

FCC Test Report

Report No.: RF170411C19-1

FCC ID: SLYWR1X22

Test Model: WR-1

Series Model: WR-1-1 (refer to item 3.1 for more details)

Received Date: Apr. 11, 2017

Test Date: Jun. 12 ~ Aug. 10, 2017

Issued Date: Aug. 11, 2017

Applicant: Control4 Corporation

Address: 11734 S. Election Road, Draper, UT 84020, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures	17
4.1.4 Deviation from Test Standard	18
4.1.5 Test Setup	18
4.1.6 EUT Operating Conditions	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	40
4.2.1 Limits of Conducted Emission Measurement	40
4.2.2 Test Instruments	40
4.2.3 Test Procedures	41
4.2.4 Deviation from Test Standard	41
4.2.5 Test Setup	41
4.2.6 EUT Operating Conditions	41
4.2.7 Test Results	42
4.3 Transmit Power Measurement	46
4.3.1 Limits of Transmit Power Measurement	46
4.3.2 Test Setup	46
4.3.3 Test Instruments	47
4.3.4 Test Procedure	47
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Conditions	47
4.3.7 Test Result	48
4.4 Occupied Bandwidth Measurement	52
4.4.1 Test Setup	52
4.4.2 Test Instruments	52
4.4.3 Test Procedure	52
4.4.4 Test Result	53
4.5 Peak Power Spectral Density Measurement	55
4.5.1 Limits of Peak Power Spectral Density Measurement	55
4.5.2 Test Setup	55
4.5.3 Test Instruments	55
4.5.4 Test Procedures	56
4.5.5 Deviation from Test Standard	56
4.5.6 EUT Operating Conditions	56
4.5.7 Test Results	57
4.6 Frequency Stability	62
4.6.1 Limits of Frequency Stability Measurement	62

4.6.2	Test Setup	62
4.6.3	Test Instruments	62
4.6.4	Test Procedure	62
4.6.5	Deviation from Test Standard	62
4.6.6	EUT Operating Condition	62
4.6.7	Test Results	63
4.7	6dB Bandwidth Measurement	64
4.7.1	Limits of 6dB Bandwidth Measurement	64
4.7.2	Test Setup	64
4.7.3	Test Instruments	64
4.7.4	Test Procedure	64
4.7.5	Deviation from Test Standard	64
4.7.6	EUT Operating Condition	64
4.7.7	Test Results	65
5	Pictures of Test Arrangements	67
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	68
	Appendix – Information on the Testing Laboratories	71

Release Control Record

Issue No.	Description	Date Issued
RF170411C19-1	Original release.	Aug. 11, 2017

1 Certificate of Conformity

Product: 802.11ac Dual Band Wireless Router
Brand: pakedge
Test Model: WR-1
Series Model: WR-1-1 (refer to item 3.1 for more details)
Sample Status: Engineering sample
Applicant: Control4 Corporation
Test Date: Jun. 12 ~ Aug. 10, 2017
Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Suntee Liu , **Date:** Aug. 11, 2017
Suntee Liu / Specialist

Approved by : Ken Liu , **Date:** Aug. 11, 2017
Ken Liu / Senior Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.92dB at 0.25006MHz.
15.407(b)(1/2/3/4(ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.86 dB
	200MHz ~ 1000MHz	3.87 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	802.11ac Dual Band Wireless Router
Brand	pakedge
Test Model	WR-1
Series Model	WR-1-1
Model Difference	Refer to Note
Sample Status	Engineering sample
Power Supply Rating	12Vdc (adapter)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK
Modulation Technology	OFDM
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	5180~5240MHz, 5745~5825MHz
Number of Channel	5180~5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5745~5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1
Output Power	CDD Mode: 5180~5240MHz: 346.820mW 5745~5825MHz: 447.513mW Beamforming Mode: 5180~5240MHz: 173.410mW 5745~5825MHz: 223.757mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Cable Supplied	NA

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function	Beamforming
802.11b	2TX	Not Support
802.11g	2TX	Not Support
802.11a	2TX	Not Support
802.11n (HT20)	2TX	Support
802.11n (HT40)	2TX	Support
802.11ac (VHT20)	2TX	Support
802.11ac (VHT40)	2TX	Support
802.11ac (VHT80)	2TX	Support

* The modulation and bandwidth are similar for 802.11n mode for 20MHz/40MHz and 802.11ac mode for 20MHz/40MHz, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

2. The EUT uses following antennas.

Antenna Type		PCB			Antenna Connector			NA	
Antenna 1									
Frequency (GHz)	2.40			2.45			2.50		
Gain (dBi)	3.50			3.90			3.67		
Antenna 2									
Frequency (GHz)	2.40			2.45			2.50		
Gain (dBi)	4.03			4.18			4.59		
Antenna 3									
Frequency (GHz)	5.15	5.25	5.35	5.45	5.55	5.65	5.75	5.85	
Gain (dBi)	4.37	4.31	4.96	5.28	4.42	3.99	3.92	3.97	
Antenna 4									
Frequency (GHz)	5.15	5.25	5.35	5.45	5.55	5.65	5.75	5.85	
Gain (dBi)	4.55	3.94	3.64	4.30	4.03	4.16	3.98	4.44	

* The 4.59dBi gain with 2.4GHz max. gain is chosen for final tests.

* The 5.28dBi gain with 5GHz max. gain is chosen for final tests.

3. All models are listed as below. Model WR-1 is the representative for final test.

Brand	Model	Difference
pakedge	WR-1	Marketing requirement
	WR-1-1	

4. The EUT uses following adapters.

Adapter 1	
Brand	Powertron Electronics Corp.
Model	PA1015-120DUB150
Input Power	100-240Vac, 50-60Hz, 0.4A
Output Power	12Vdc, 1.5A, 18W Max
Power Line	1.5m DC cable without core attached on adapter

Adapter 2	
Brand	Powertron Electronics Corp.
Model	PA1015-120IB150
Input Power	100-240Vac, 50-60Hz, 0.4A
Output Power	12Vdc, 1.5A, 18W Max.
Power Line	1.5m DC cable without core attached on adapter

5. 2.4GHz and 5GHz technologies can transmit at same time.

6. Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.

3.2 Description of Test Modes

5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	√	Adapter 1
B	-	√	√	-	Adapter 2

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note:

1. The antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.
2. "-": means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)	Remark
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0	-
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	13.0	-
	802.11n (HT40)		38 to 46	38, 46	OFDM	27.0	-
	802.11ac (VHT80)		42	42	OFDM	58.5	-
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0	-
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	13.0	-
	802.11n (HT40)		151 to 159	151, 159	OFDM	27.0	-
	802.11ac (VHT80)		155	155	OFDM	58.5	-

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)	Remark
A, B	802.11n (HT20)	5180-5240	36 to 48	165	OFDM	13.0	-
		5745-5825	149 to 165		OFDM	13.0	-

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)	Remark
A, B	802.11n (HT20)	5180-5240	36 to 48	165	OFDM	13.0	-
		5745-5825	149 to 165		OFDM	13.0	-

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)	Remark
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0	-
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	13.0	-
	802.11n (HT40)		38 to 46	38, 46	OFDM	27.0	-
	802.11ac (VHT80)		42	42	OFDM	58.5	-
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0	-
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	13.0	-
	802.11n (HT40)		151 to 159	151, 159	OFDM	27.0	-
	802.11ac (VHT80)		155	155	OFDM	58.5	-

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	27 deg. C, 68% RH 26 deg. C, 68% RH	120Vac, 60Hz	James Yang Jones Chang
RE<1G	26 deg. C, 68% RH 24 deg. C, 67% RH	120Vac, 60Hz	Jones Chang
PLC	25 deg. C, 69% RH 25 deg. C, 75% RH	120Vac, 60Hz	Jones Chang Luis Lee
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Ted Chang Edward Lin

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.


Duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.007/2.107 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (HT20): Duty cycle = $4.938/5.088 = 0.971$, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11n (HT40): Duty cycle = $2.38/2.49 = 0.956$, Duty factor = $10 * \log(1/0.956) = 0.20$

802.11ac (VHT80): Duty cycle = $1.127/1.215 = 0.928$, Duty factor = $10 * \log(1/0.928) = 0.33$

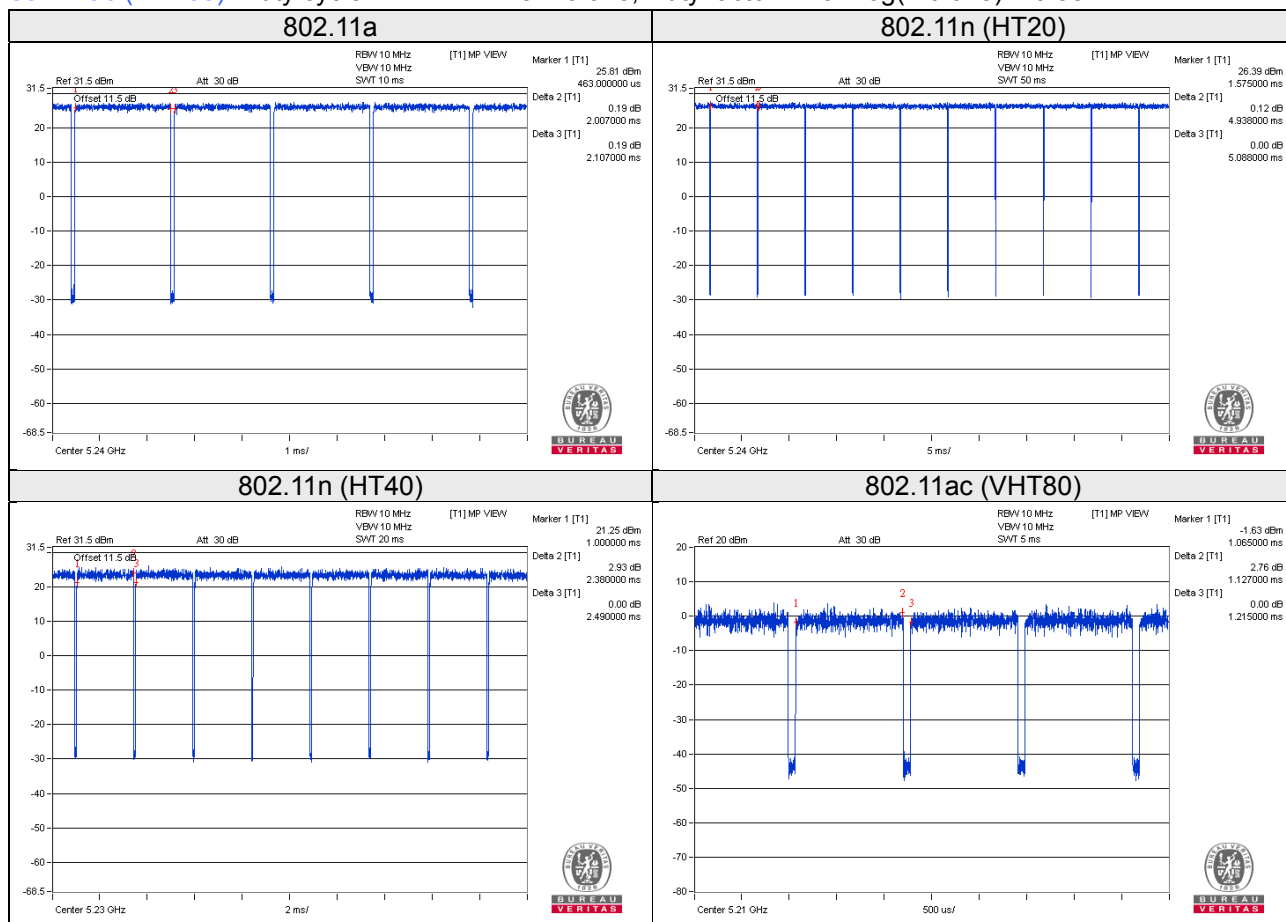

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-
C.	Flash	HP	v250W	01	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	4	3	N	0	-

3.4.1 Configuration of System under Test

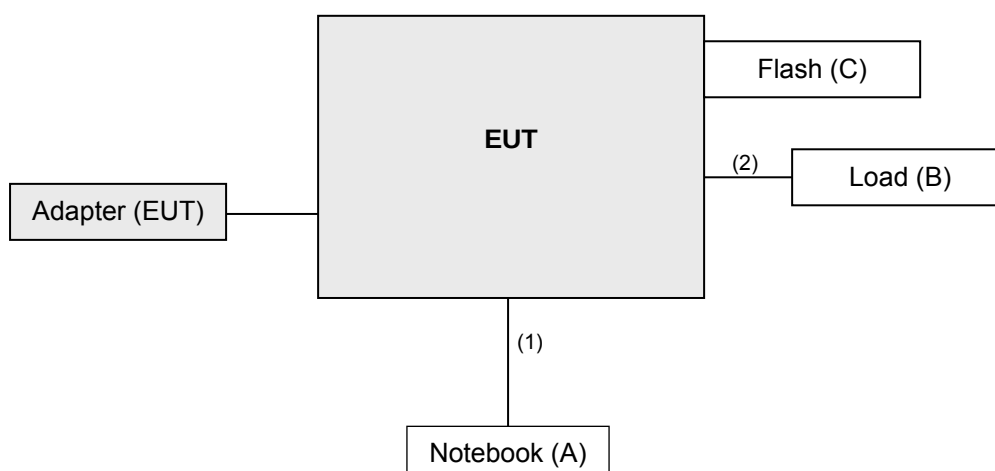

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r04

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v01r04			Field Strength at 3m	
			PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30 P}}{3} \text{ uV/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESIB7	100187	May 02, 2017	May 01, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 16, 2016	Nov. 15, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	9120D	209	Dec. 27, 2016	Dec. 26, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna	EM-6879	269	Aug. 11, 2016	Aug. 10, 2017
Preamplifier Agilent	8447D	2944A10738	Aug. 22, 2016	Aug. 21, 2017
Preamplifier Agilent	8449B	3008A01922	Sep. 18, 2016	Sep. 17, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (214378)	Aug. 22, 2016	Aug. 21, 2017
RF signal cable HUBER+SUHNER	SUCOFLEX 106	Cable-CH3-03 (309224+12738)	Aug. 22, 2016	Aug. 21, 2017
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 17, 2016	Oct. 16, 2017
High Speed Peak Power Meter	ML2495A	0824012	Aug. 11, 2016	Aug. 10, 2017
Power Sensor	MA2411B	0738171	Aug. 11, 2016	Aug. 10, 2017

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

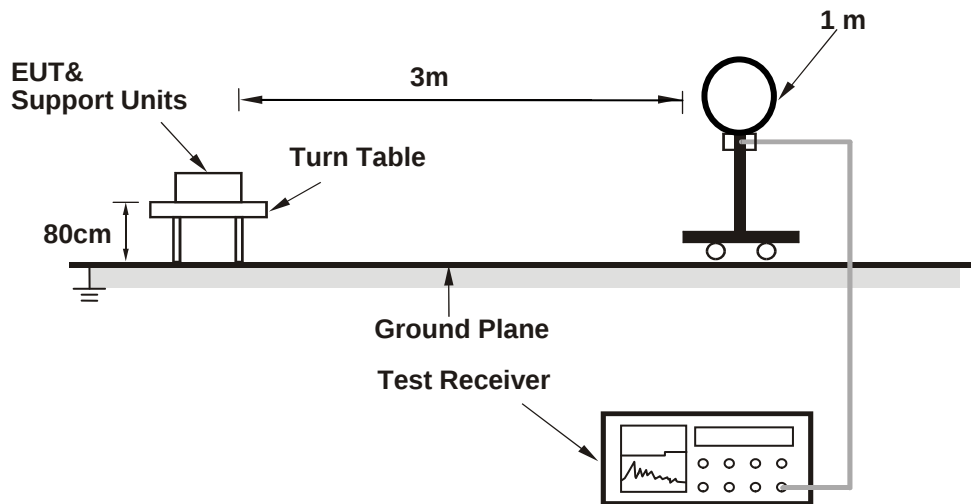

For Radiated emission 30MHz to 1GHz

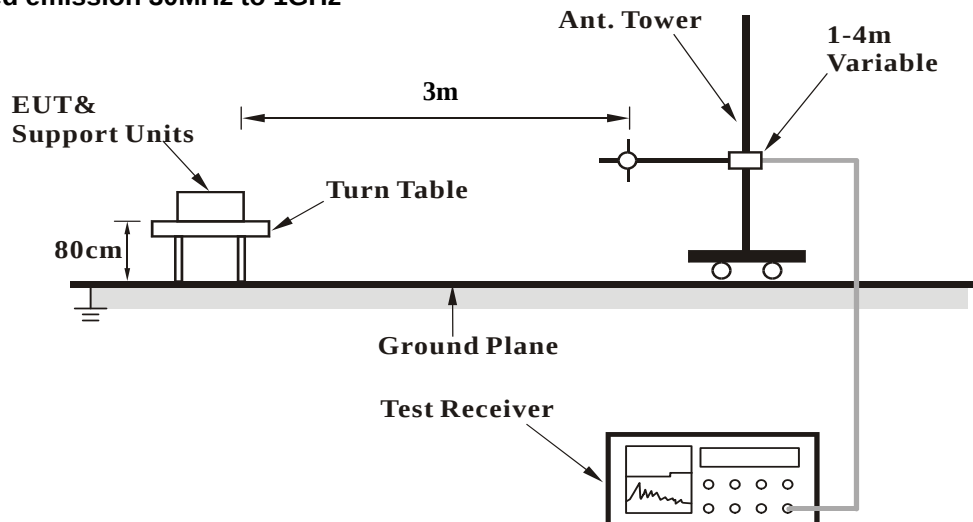

For Radiated emission above 1GHz

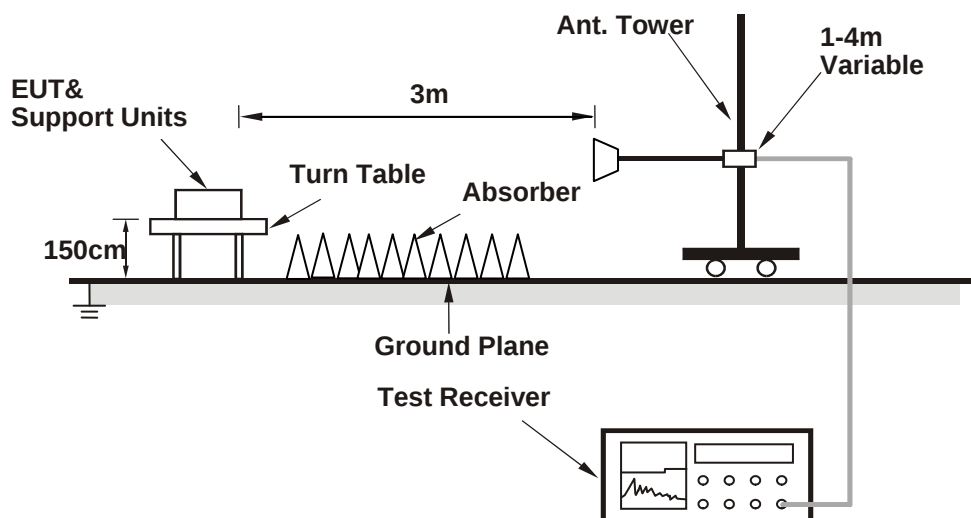

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

Above 1GHz data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.1 PK	74.0	-15.9	1.55 H	30	57.3	0.8
2	5150.00	52.4 AV	54.0	-1.6	1.55 H	30	51.6	0.8
3	*5180.00	114.3 PK			1.44 H	26	75.6	38.7
4	*5180.00	104.6 AV			1.44 H	26	65.9	38.7
5	#10360.00	60.1 PK	74.0	-13.9	2.35 H	62	47.4	12.7
6	#10360.00	47.4 AV	54.0	-6.6	2.35 H	62	34.7	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.9 PK	74.0	-8.1	2.72 V	233	65.1	0.8
2	5150.00	51.4 AV	54.0	-2.6	2.72 V	233	50.6	0.8
3	*5180.00	112.6 PK			3.00 V	235	73.9	38.7
4	*5180.00	102.4 AV			3.00 V	235	63.7	38.7
5	#10360.00	64.4 PK	74.0	-9.6	3.44 V	178	51.7	12.7
6	#10360.00	51.9 AV	54.0	-2.1	3.44 V	178	39.2	12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.9 PK	74.0	-17.1	1.68 H	22	56.1	0.8
2	5150.00	46.0 AV	54.0	-8.0	1.68 H	22	45.2	0.8
3	*5200.00	116.8 PK			1.64 H	13	78.1	38.7
4	*5200.00	107.0 AV			1.64 H	13	68.3	38.7
5	#10400.00	58.4 PK	74.0	-15.6	1.76 H	341	45.7	12.7
6	#10400.00	46.2 AV	54.0	-7.8	1.76 H	341	33.5	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	2.99 V	346	57.8	0.8
2	5150.00	47.7 AV	54.0	-6.3	2.99 V	346	46.9	0.8
3	*5200.00	114.8 PK			2.85 V	231	76.1	38.7
4	*5200.00	104.4 AV			2.85 V	231	65.7	38.7
5	#10400.00	66.6 PK	74.0	-7.4	3.14 V	176	53.9	12.7
6	#10400.00	52.4 AV	54.0	-1.6	3.14 V	176	39.7	12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.5 PK			1.49 H	13	79.7	38.8
2	*5240.00	108.6 AV			1.49 H	13	69.8	38.8
3	5350.00	57.2 PK	74.0	-16.8	1.70 H	28	56.1	1.1
4	5350.00	45.1 AV	54.0	-8.9	1.70 H	28	44.0	1.1
5	#10480.00	59.0 PK	74.0	-15.0	2.30 H	62	45.5	13.5
6	#10480.00	46.5 AV	54.0	-7.5	2.30 H	62	33.0	13.5
7	15720.00	60.2 PK	74.0	-13.8	2.58 H	119	46.3	13.9
8	15720.00	48.2 AV	54.0	-5.8	2.58 H	119	34.3	13.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	114.9 PK			2.67 V	79	76.1	38.8
2	*5240.00	105.3 AV			2.67 V	79	66.5	38.8
3	5350.00	55.2 PK	74.0	-18.8	3.00 V	16	54.1	1.1
4	5350.00	43.2 AV	54.0	-10.8	3.00 V	16	42.1	1.1
5	#10480.00	62.6 PK	74.0	-11.4	3.52 V	173	49.1	13.5
6	#10480.00	49.8 AV	54.0	-4.2	3.52 V	173	36.3	13.5
7	15720.00	61.4 PK	74.0	-12.6	2.85 V	174	47.5	13.9
8	15720.00	48.9 AV	54.0	-5.1	2.85 V	174	35.0	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.20	57.2 PK	68.2	-11.0	1.73 H	18	55.5	1.7
2	*5745.00	119.2 PK			1.73 H	18	79.3	39.9
3	*5745.00	109.3 AV			1.73 H	18	69.4	39.9
4	#5953.60	57.6 PK	68.2	-10.6	1.73 H	18	55.0	2.6
5	11490.00	61.0 PK	74.0	-13.0	2.10 H	258	46.5	14.5
6	11490.00	48.3 AV	54.0	-5.7	2.10 H	258	33.8	14.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.80	55.9 PK	68.2	-12.3	3.31 V	155	54.2	1.7
2	*5745.00	116.6 PK			3.31 V	155	76.7	39.9
3	*5745.00	106.4 AV			3.31 V	155	66.5	39.9
4	#5959.20	58.2 PK	68.2	-10.0	3.31 V	155	55.6	2.6
5	11490.00	60.0 PK	74.0	-14.0	1.77 V	333	45.5	14.5
6	11490.00	47.0 AV	54.0	-7.0	1.77 V	333	32.5	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	56.1 PK	68.2	-12.1	1.76 H	20	54.4	1.7
2	*5785.00	118.7 PK			1.76 H	20	78.6	40.1
3	*5785.00	108.6 AV			1.76 H	20	68.5	40.1
4	#5959.20	57.8 PK	68.2	-10.4	1.76 H	20	55.2	2.6
5	11570.00	60.6 PK	74.0	-13.4	2.40 H	345	46.3	14.3
6	11570.00	47.9 AV	54.0	-6.1	2.40 H	345	33.6	14.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5616.80	56.0 PK	68.2	-12.2	3.13 V	165	54.3	1.7
2	*5785.00	116.5 PK			3.13 V	165	76.4	40.1
3	*5785.00	105.9 AV			3.13 V	165	65.8	40.1
4	#5942.40	58.1 PK	68.2	-10.1	3.13 V	165	55.5	2.6
5	11570.00	59.4 PK	74.0	-14.6	2.19 V	69	45.1	14.3
6	11570.00	46.3 AV	54.0	-7.7	2.19 V	69	32.0	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.80	55.4 PK	68.2	-12.8	1.69 H	24	53.7	1.7
2	*5825.00	118.4 PK			1.69 H	24	78.2	40.2
3	*5825.00	107.9 AV			1.69 H	24	67.7	40.2
4	#5939.20	57.3 PK	68.2	-10.9	1.69 H	24	54.7	2.6
5	11650.00	61.0 PK	74.0	-13.0	2.02 H	311	46.6	14.4
6	11650.00	47.8 AV	54.0	-6.2	2.02 H	311	33.4	14.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5608.00	55.4 PK	68.2	-12.8	3.09 V	162	53.7	1.7
2	*5825.00	116.4 PK			3.09 V	162	76.2	40.2
3	*5825.00	106.1 AV			3.09 V	162	65.9	40.2
4	#5970.40	56.8 PK	68.2	-11.4	3.09 V	162	54.1	2.7
5	11650.00	59.9 PK	74.0	-14.1	1.89 V	71	45.5	14.4
6	11650.00	46.1 AV	54.0	-7.9	1.89 V	71	31.7	14.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.5 PK	74.0	-5.5	1.57 H	19	67.7	0.8
2	5150.00	52.5 AV	54.0	-1.5	1.57 H	19	51.7	0.8
3	*5180.00	116.2 PK			1.42 H	29	77.5	38.7
4	*5180.00	105.4 AV			1.42 H	29	66.7	38.7
5	#10360.00	59.9 PK	74.0	-14.1	2.40 H	65	47.2	12.7
6	#10360.00	46.5 AV	54.0	-7.5	2.40 H	65	33.8	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	2.80 V	232	66.9	0.8
2	5150.00	50.4 AV	54.0	-3.6	2.80 V	232	49.6	0.8
3	*5180.00	112.6 PK			2.94 V	233	73.9	38.7
4	*5180.00	102.0 AV			2.94 V	233	63.3	38.7
5	#10360.00	63.5 PK	74.0	-10.5	3.27 V	182	50.8	12.7
6	#10360.00	51.3 AV	54.0	-2.7	3.27 V	182	38.6	12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.1 PK			1.53 H	31	79.4	38.7
2	*5200.00	107.0 AV			1.53 H	31	68.3	38.7
3	#10400.00	60.0 PK	74.0	-14.0	2.20 H	63	47.3	12.7
4	#10400.00	48.3 AV	54.0	-5.7	2.20 H	63	35.6	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	113.9 PK			2.87 V	234	75.2	38.7
2	*5200.00	103.5 AV			2.87 V	234	64.8	38.7
3	#10400.00	66.2 PK	74.0	-7.8	3.14 V	177	53.5	12.7
4	#10400.00	52.3 AV	54.0	-1.7	3.14 V	177	39.6	12.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.5 PK			1.57 H	30	80.7	38.8
2	*5240.00	108.7 AV			1.57 H	30	69.9	38.8
3	5350.00	53.5 PK	74.0	-20.5	1.60 H	0	52.4	1.1
4	5350.00	42.2 AV	54.0	-11.8	1.60 H	0	41.1	1.1
5	#10480.00	59.3 PK	74.0	-14.7	2.32 H	60	45.8	13.5
6	#10480.00	46.3 AV	54.0	-7.7	2.32 H	60	32.8	13.5
7	15720.00	63.3 PK	74.0	-10.7	2.52 H	135	49.4	13.9
8	15720.00	50.2 AV	54.0	-3.8	2.52 H	135	36.3	13.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.5 PK			2.79 V	48	76.7	38.8
2	*5240.00	105.2 AV			2.79 V	48	66.4	38.8
3	5350.00	56.1 PK	74.0	-17.9	2.75 V	200	55.0	1.1
4	5350.00	43.7 AV	54.0	-10.3	2.75 V	200	42.6	1.1
5	#10480.00	63.4 PK	74.0	-10.6	3.43 V	175	49.9	13.5
6	#10480.00	49.6 AV	54.0	-4.4	3.43 V	175	36.1	13.5
7	15720.00	60.9 PK	74.0	-13.1	2.89 V	176	47.0	13.9
8	15720.00	47.6 AV	54.0	-6.4	2.89 V	176	33.7	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	56.2 PK	68.2	-12.0	1.68 H	19	54.5	1.7
2	*5745.00	119.2 PK			1.68 H	19	79.3	39.9
3	*5745.00	108.7 AV			1.68 H	19	68.8	39.9
4	#5973.60	56.8 PK	68.2	-11.4	1.68 H	19	54.1	2.7
5	11490.00	60.9 PK	74.0	-13.1	1.70 H	279	46.4	14.5
6	11490.00	47.6 AV	54.0	-6.4	1.70 H	279	33.1	14.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.00	56.4 PK	68.2	-11.8	3.12 V	155	54.7	1.7
2	*5745.00	115.7 PK			3.12 V	155	75.8	39.9
3	*5745.00	104.9 AV			3.12 V	155	65.0	39.9
4	#5934.40	57.5 PK	68.2	-10.7	3.12 V	155	54.9	2.6
5	11490.00	60.4 PK	74.0	-13.6	2.31 V	77	45.9	14.5
6	11490.00	46.5 AV	54.0	-7.5	2.31 V	77	32.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.80	56.3 PK	68.2	-11.9	1.61 H	20	54.6	1.7
2	*5785.00	118.5 PK			1.61 H	20	78.4	40.1
3	*5785.00	107.9 AV			1.61 H	20	67.8	40.1
4	#6000.00	57.6 PK	68.2	-10.6	1.61 H	20	54.8	2.8
5	11570.00	61.0 PK	74.0	-13.0	1.98 H	292	46.7	14.3
6	11570.00	47.6 AV	54.0	-6.4	1.98 H	292	33.3	14.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.60	55.1 PK	68.2	-13.1	3.23 V	165	53.4	1.7
2	*5785.00	115.4 PK			3.23 V	165	75.3	40.1
3	*5785.00	105.0 AV			3.23 V	165	64.9	40.1
4	#5937.60	56.5 PK	68.2	-11.7	3.23 V	165	53.9	2.6
5	11570.00	59.0 PK	74.0	-15.0	2.12 V	68	44.7	14.3
6	11570.00	46.1 AV	54.0	-7.9	2.12 V	68	31.8	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5601.60	55.7 PK	68.2	-12.5	1.54 H	19	54.1	1.6
2	*5825.00	119.0 PK			1.54 H	19	78.8	40.2
3	*5825.00	108.5 AV			1.54 H	19	68.3	40.2
4	#5999.20	58.1 PK	68.2	-10.1	1.54 H	19	55.3	2.8
5	11650.00	60.4 PK	74.0	-13.6	1.77 H	244	46.0	14.4
6	11650.00	47.8 AV	54.0	-6.2	1.77 H	244	33.4	14.4
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.40	55.2 PK	68.2	-13.0	3.19 V	164	53.5	1.7
2	*5825.00	115.8 PK			3.19 V	164	75.6	40.2
3	*5825.00	104.7 AV			3.19 V	164	64.5	40.2
4	#5985.60	57.6 PK	68.2	-10.6	3.19 V	164	54.8	2.8
5	11650.00	59.1 PK	74.0	-14.9	1.99 V	60	44.7	14.4
6	11650.00	46.1 AV	54.0	-7.9	1.99 V	60	31.7	14.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.21 H	23	64.9	0.8
2	5150.00	52.5 AV	54.0	-1.5	1.21 H	23	51.7	0.8
3	*5190.00	111.0 PK			1.21 H	29	72.3	38.7
4	*5190.00	101.6 AV			1.21 H	29	62.9	38.7
5	#10380.00	58.7 PK	74.0	-15.3	1.18 H	76	45.9	12.8
6	#10380.00	45.9 AV	54.0	-8.1	1.18 H	76	33.1	12.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.9 PK	74.0	-14.1	1.10 V	32	59.1	0.8
2	5150.00	46.8 AV	54.0	-7.2	1.10 V	32	46.0	0.8
3	*5190.00	104.8 PK			1.13 V	30	66.1	38.7
4	*5190.00	94.9 AV			1.13 V	30	56.2	38.7
5	#10380.00	60.9 PK	74.0	-13.1	1.19 V	57	48.1	12.8
6	#10380.00	46.4 AV	54.0	-7.6	1.19 V	57	33.6	12.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.1 PK	74.0	-6.9	1.10 H	32	66.3	0.8
2	5150.00	52.3 AV	54.0	-1.7	1.10 H	32	51.5	0.8
3	*5230.00	116.3 PK			1.14 H	31	77.5	38.8
4	*5230.00	106.7 AV			1.14 H	31	67.9	38.8
5	#10460.00	58.8 PK	74.0	-15.2	2.08 H	309	45.5	13.3
6	#10460.00	45.8 AV	54.0	-8.2	2.08 H	309	32.5	13.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.3 PK	74.0	-9.7	1.42 V	209	63.5	0.8
2	5150.00	49.3 AV	54.0	-4.7	1.42 V	209	48.5	0.8
3	*5230.00	113.0 PK			3.43 V	41	74.2	38.8
4	*5230.00	102.9 AV			3.43 V	41	64.1	38.8
5	#10460.00	60.5 PK	74.0	-13.5	2.74 V	350	47.2	13.3
6	#10460.00	47.7 AV	54.0	-6.3	2.74 V	350	34.4	13.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.80	64.1 PK	68.2	-4.1	1.67 H	19	62.4	1.7
2	#5650.00	66.5 PK	68.2	-1.7	1.70 H	21	64.8	1.7
3	*5755.00	116.0 PK			1.67 H	19	76.1	39.9
4	*5755.00	105.6 AV			1.67 H	19	65.7	39.9
5	#5925.60	56.7 PK	68.2	-11.5	1.67 H	19	54.1	2.6
6	11510.00	59.3 PK	74.0	-14.7	1.89 H	200	44.8	14.5
7	11510.00	46.1 AV	54.0	-7.9	1.89 H	200	31.6	14.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5649.60	60.7 PK	68.2	-7.5	3.17 V	157	59.0	1.7
2	#5650.00	60.0 PK	68.2	-8.2	3.25 V	166	58.3	1.7
3	*5755.00	113.0 PK			3.17 V	157	73.1	39.9
4	*5755.00	103.0 AV			3.17 V	157	63.1	39.9
5	#5963.20	56.5 PK	68.2	-11.7	3.17 V	157	53.9	2.6
6	11510.00	58.7 PK	74.0	-15.3	2.22 V	177	44.2	14.5
7	11510.00	45.5 AV	54.0	-8.5	2.22 V	177	31.0	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.00	61.7 PK	68.2	-6.5	1.52 H	20	60.0	1.7
2	#5650.00	65.4 PK	68.2	-2.8	1.66 H	22	63.7	1.7
3	*5795.00	116.4 PK			1.52 H	20	76.3	40.1
4	*5795.00	106.2 AV			1.52 H	20	66.1	40.1
5	#5925.00	62.6 PK	68.2	-5.6	1.58 H	37	60.0	2.6
6	#5931.20	57.6 PK	68.2	-10.6	1.52 H	20	55.0	2.6
7	11590.00	60.7 PK	74.0	-13.3	1.89 H	355	46.4	14.3
8	11590.00	47.6 AV	54.0	-6.4	1.89 H	355	33.3	14.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.60	60.6 PK	68.2	-7.6	3.26 V	155	58.9	1.7
2	#5650.00	62.8 PK	68.2	-5.4	2.99 V	150	61.1	1.7
3	*5795.00	115.3 PK			3.26 V	157	75.2	40.1
4	*5795.00	104.0 AV			3.26 V	157	63.9	40.1
5	#5925.00	57.1 PK	68.2	-11.1	3.00 V	160	54.5	2.6
6	#5991.20	56.8 PK	68.2	-11.4	3.26 V	155	54.0	2.8
7	11590.00	59.3 PK	74.0	-14.7	2.30 V	70	45.0	14.3
8	11590.00	46.4 AV	54.0	-7.6	2.30 V	70	32.1	14.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.0 PK	74.0	-7.0	1.11 H	22	66.2	0.8
2	5150.00	53.0 AV	54.0	-1.0	1.11 H	22	52.2	0.8
3	*5210.00	107.5 PK			1.34 H	25	68.8	38.7
4	*5210.00	99.1 AV			1.34 H	25	60.4	38.7
5	5350.00	57.2 PK	74.0	-16.8	1.08 H	20	56.1	1.1
6	5350.00	44.5 AV	54.0	-9.5	1.08 H	20	43.4	1.1
7	#10420.00	59.1 PK	74.0	-14.9	1.67 H	221	46.2	12.9
8	#10420.00	45.3 AV	54.0	-8.7	1.67 H	221	32.4	12.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.4 PK	74.0	-13.6	1.05 V	55	59.6	0.8
2	5150.00	46.8 AV	54.0	-7.2	1.05 V	55	46.0	0.8
3	*5210.00	100.9 PK			1.04 V	27	62.2	38.7
4	*5210.00	91.0 AV			1.04 V	27	52.3	38.7
5	5350.00	56.9 PK	74.0	-17.1	1.14 V	34	55.8	1.1
6	5350.00	43.6 AV	54.0	-10.4	1.14 V	34	42.5	1.1
7	#10420.00	58.8 PK	74.0	-15.2	1.00 V	360	45.9	12.9
8	#10420.00	46.0 AV	54.0	-8.0	1.00 V	360	33.1	12.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz	FUNCTION	Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5635.20	61.4 PK	68.2	-6.8	1.77 H	21	59.7	1.7
2	#5650.00	66.6 PK	68.2	-1.6	1.59 H	22	64.9	1.7
3	*5775.00	107.6 PK			1.77 H	21	67.6	40.0
4	*5775.00	98.0 AV			1.77 H	21	58.0	40.0
5	#5925.00	57.9 PK	68.2	-10.3	1.60 H	51	55.3	2.6
6	#5987.20	58.0 PK	68.2	-10.2	1.77 H	21	55.2	2.8
7	11550.00	58.9 PK	74.0	-15.1	2.15 H	197	44.4	14.5
8	11550.00	46.1 AV	54.0	-7.9	2.15 H	197	31.6	14.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5643.20	58.6 PK	68.2	-9.6	3.25 V	159	56.9	1.7
2	#5650.00	62.3 PK	68.2	-5.9	3.21 V	160	60.6	1.7
3	*5775.00	104.8 PK			3.25 V	159	64.8	40.0
4	*5775.00	94.8 AV			3.25 V	159	54.8	40.0
5	#5925.00	58.1 PK	68.2	-10.1	3.10 V	106	55.5	2.6
6	#5962.40	57.2 PK	68.2	-11.0	3.25 V	159	54.6	2.6
7	11550.00	58.9 PK	74.0	-15.1	1.87 V	174	44.4	14.5
8	11550.00	46.1 AV	54.0	-7.9	1.87 V	174	31.6	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data: 802.11n (HT20)

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	A

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	30.7 QP	40.0	-9.3	1.99 H	77	45.2	-14.5
2	113.50	35.9 QP	43.5	-7.6	1.50 H	217	52.7	-16.8
3	166.00	33.0 QP	43.5	-10.5	1.50 H	253	46.8	-13.8
4	220.44	42.0 QP	46.0	-4.0	1.02 H	140	58.0	-16.0
5	249.60	31.9 QP	46.0	-14.1	1.02 H	73	45.8	-13.9
6	482.92	26.5 QP	46.0	-19.5	1.99 H	146	34.6	-8.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	49.34	36.1 QP	40.0	-3.9	1.00 V	329	50.3	-14.2
2	111.56	36.9 QP	43.5	-6.6	1.00 V	224	53.9	-17.0
3	162.11	33.3 QP	43.5	-10.2	1.00 V	288	46.9	-13.6
4	218.50	36.4 QP	46.0	-9.6	1.00 V	133	52.4	-16.0
5	383.76	25.2 QP	46.0	-20.8	1.00 V	186	35.6	-10.4
6	482.92	23.4 QP	46.0	-22.6	2.00 V	169	31.5	-8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz	TEST MODE	B

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	27.2 QP	40.0	-12.8	2.00 H	11	41.8	-14.6
2	154.33	27.1 QP	43.5	-16.4	1.51 H	100	40.8	-13.7
3	237.94	34.8 QP	46.0	-11.2	1.51 H	238	49.5	-14.7
4	391.54	28.1 QP	46.0	-17.9	1.01 H	232	38.3	-10.2
5	747.34	28.9 QP	46.0	-17.1	1.01 H	16	31.2	-2.3
6	881.50	38.5 QP	46.0	-7.5	2.00 H	11	38.4	0.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	35.73	33.7 QP	40.0	-6.3	1.00 V	123	49.6	-15.9
2	49.34	34.2 QP	40.0	-5.8	1.49 V	14	48.5	-14.3
3	125.17	30.2 QP	43.5	-13.3	1.00 V	12	46.0	-15.8
4	237.94	37.0 QP	46.0	-9.0	1.99 V	166	51.7	-14.7
5	467.50	36.7 QP	46.0	-9.3	2.00 V	168	45.1	-8.4
6	881.50	41.9 QP	46.0	-4.1	1.00 V	24	41.8	0.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 22, 2016	Dec. 21, 2017
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ENV216	101196	Apr. 20, 2017	Apr. 19, 2018
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

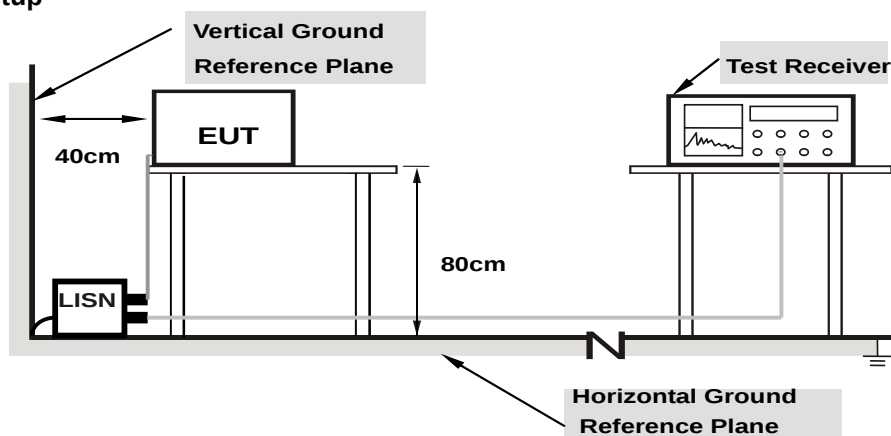

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Worst-case data: 802.11n (HT20)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	10.41	41.14	28.45	51.55	38.86	65.57	55.57	-14.02	-16.71
2	0.25006	10.45	39.72	37.39	50.17	47.84	61.76	51.76	-11.59	-3.92
3	0.70609	10.48	27.35	19.49	37.83	29.97	56.00	46.00	-18.17	-16.03
4	2.51800	10.56	28.67	19.74	39.23	30.30	56.00	46.00	-16.77	-15.70
5	6.85000	10.77	24.15	17.06	34.92	27.83	60.00	50.00	-25.08	-22.17
6	12.60600	11.03	19.78	12.30	30.81	23.33	60.00	50.00	-29.19	-26.67

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

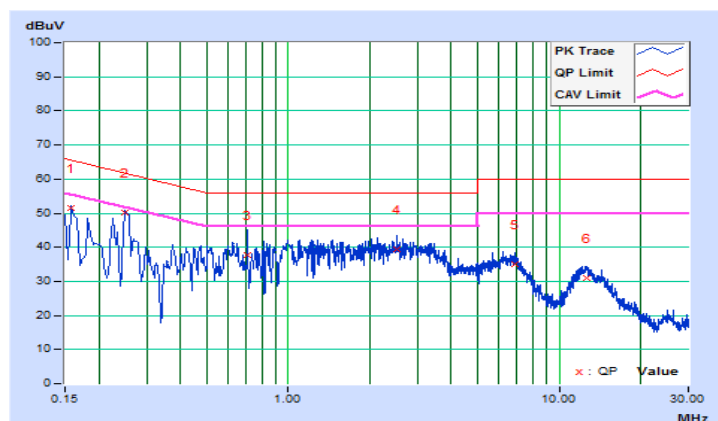


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15728	10.16	41.26	26.80	51.42	36.96	65.61	55.61	-14.19	-18.65
2	0.18600	10.19	31.15	15.09	41.34	25.28	64.21	54.21	-22.87	-28.93
3	0.25006	10.21	41.59	30.62	51.80	40.83	61.76	51.76	-9.96	-10.93
4	0.53000	10.23	24.60	12.23	34.83	22.46	56.00	46.00	-21.17	-23.54
5	3.75800	10.41	30.07	18.25	40.48	28.66	56.00	46.00	-15.52	-17.34
6	6.51800	10.51	26.53	18.19	37.04	28.70	60.00	50.00	-22.96	-21.30

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

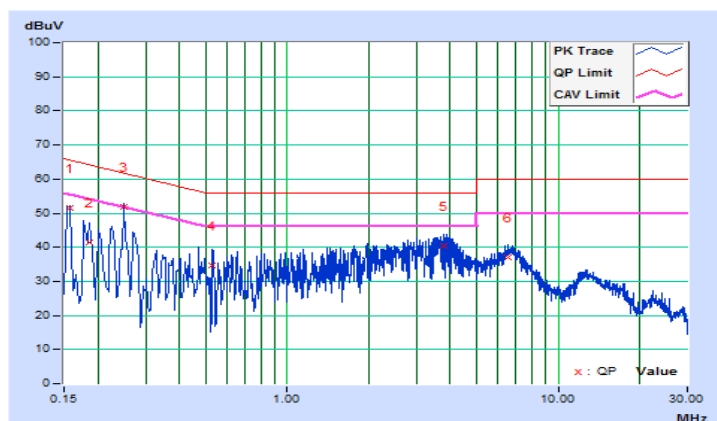


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	10.41	35.95	21.13	46.36	31.54	65.20	55.20	-18.84	-23.66
2	0.18508	10.42	32.50	16.55	42.92	26.97	64.25	54.25	-21.33	-27.28
3	0.21851	10.44	31.97	22.03	42.41	32.47	62.88	52.88	-20.47	-20.41
4	0.26765	10.46	30.63	27.61	41.09	38.07	61.19	51.19	-20.10	-13.12
5	0.28891	10.47	36.61	29.23	47.08	39.70	60.56	50.56	-13.48	-10.86
6	4.72861	10.69	22.18	12.92	32.87	23.61	56.00	46.00	-23.13	-22.39

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

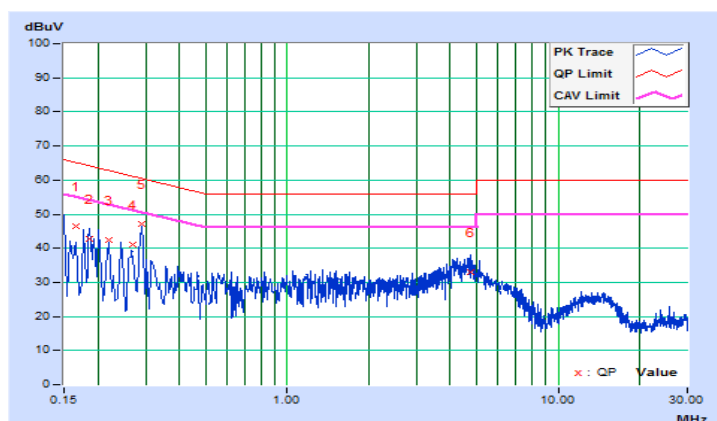


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	10.17	36.39	21.89	46.56	32.06	65.20	55.20	-18.64	-23.14
2	0.17605	10.18	35.88	21.62	46.06	31.80	64.67	54.67	-18.61	-22.87
3	0.19255	10.19	34.19	21.88	44.38	32.07	63.93	53.93	-19.55	-21.86
4	0.22429	10.20	27.31	15.02	37.51	25.22	62.66	52.66	-25.15	-27.44
5	0.28891	10.21	32.97	25.91	43.18	36.12	60.56	50.56	-17.38	-14.44
6	4.61131	10.44	18.78	9.53	29.22	19.97	56.00	46.00	-26.78	-26.03

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

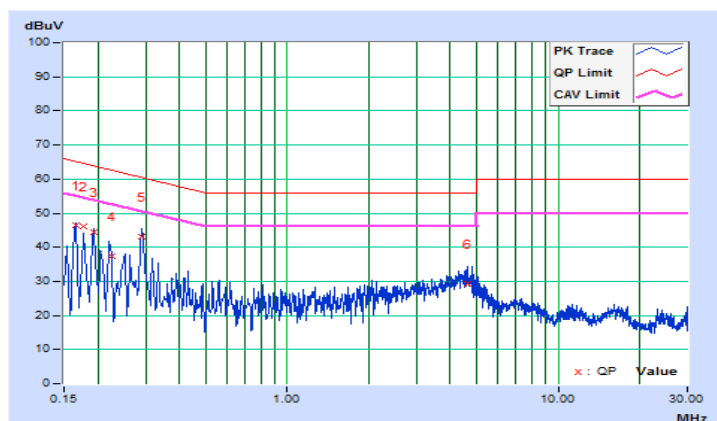

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	-		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	-		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.


4.3.2 Test Setup

For Power Output


802.11a, 802.11n (HT20), 802.11n (HT40)

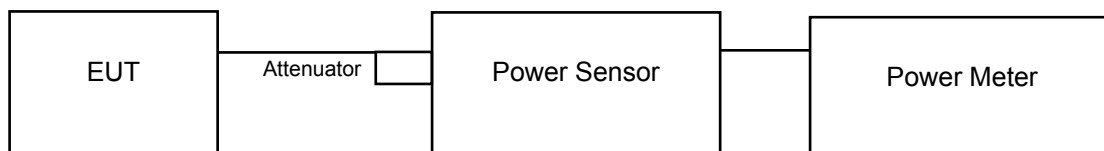

802.11ac (VHT80)



For Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- 1) Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- 2) Set sweep trigger to "free run".
- 3) Set RBW = 1 MHz.
- 4) Set VBW $\geq$ 3 MHz.
- 5) Number of points in sweep $\geq$ 2 Span / RBW.
- 6) Sweep time $\leq$ (number of points in sweep) * T
- 7) Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- 8) Detector = RMS.
- 9) Trace mode = max hold.
- 10) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For 26dB Bandwidth

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

CDD Mode

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	19.06	18.43	150.201	21.77	30	Pass
40	5200	22.03	21.36	296.361	24.72	30	Pass
48	5240	22.43	21.95	331.660	25.21	30	Pass
149	5745	22.68	22.53	364.414	25.62	30	Pass
157	5785	22.93	22.57	377.053	25.76	30	Pass
165	5825	23.23	23.11	415.022	26.18	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	19.54	18.82	166.158	22.21	30	Pass
40	5200	21.94	21.67	303.208	24.82	30	Pass
48	5240	22.47	22.31	346.820	25.40	30	Pass
149	5745	22.65	22.71	370.715	25.69	30	Pass
157	5785	22.81	22.73	378.484	25.78	30	Pass
165	5825	23.37	23.21	426.681	26.30	30	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	17.61	16.58	103.176	20.14	30	Pass
46	5230	21.84	21.42	291.433	24.65	30	Pass
151	5755	22.14	21.76	313.650	24.96	30	Pass
159	5795	23.65	23.34	447.513	26.51	30	Pass

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	17.23	16.52	97.720	19.90	30	Pass
155	5775	17.34	17.32	108.151	20.34	30	Pass

Beamforming Mode

802.11n (HT20)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	16.53	15.81	83.079	19.19	27.71	Pass
40	5200	18.93	18.66	151.604	21.81	27.71	Pass
48	5240	19.46	19.30	173.410	22.39	27.71	Pass
149	5745	19.64	19.70	185.358	22.68	27.71	Pass
157	5785	19.80	19.72	189.242	22.77	27.71	Pass
165	5825	20.36	20.20	213.341	23.29	27.71	Pass

Note:

- 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.

802.11n (HT40)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	14.60	13.57	51.588	17.13	27.71	Pass
46	5230	18.83	18.41	145.716	21.64	27.71	Pass
151	5755	19.13	18.75	156.825	21.95	27.71	Pass
159	5795	20.64	20.33	223.757	23.50	27.71	Pass

Note:

- 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.

802.11ac (VHT80)

Chan.	Freq. (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	14.22	13.51	48.860	16.89	27.71	Pass
155	5775	14.33	14.31	54.076	17.33	27.71	Pass

Note:

- 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.

26dB Bandwidth:

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	19.74	19.12
40	5200	28.50	30.78
48	5240	37.23	35.97

802.11n (HT20)

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	20.97	20.62
40	5200	26.36	29.39
48	5240	39.07	37.99

802.11n (HT40)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	40.52	40.22
46	5230	68.82	76.64

802.11ac (VHT80)


Channel	Frequency (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	83.57	83.12

Spectrum Plot of Worst Value


802.11a

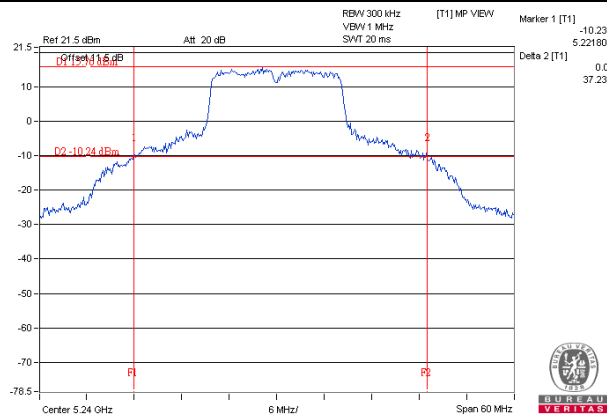


802.11n (HT20)

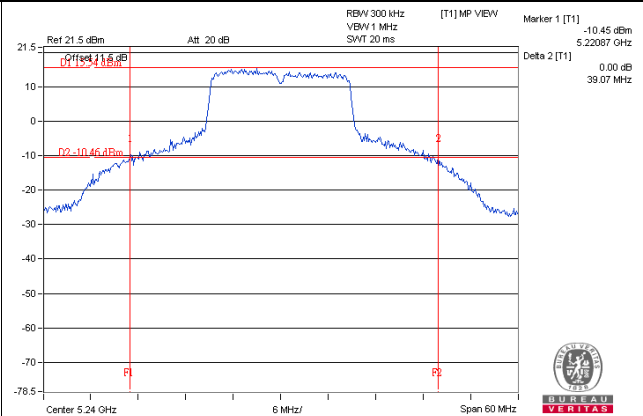

802.11n (HT40)

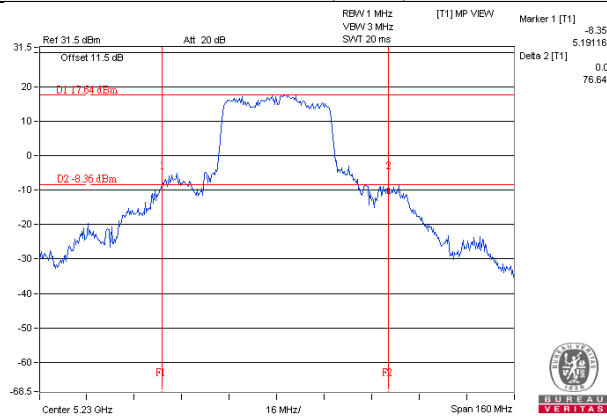


802.11ac (VHT80)

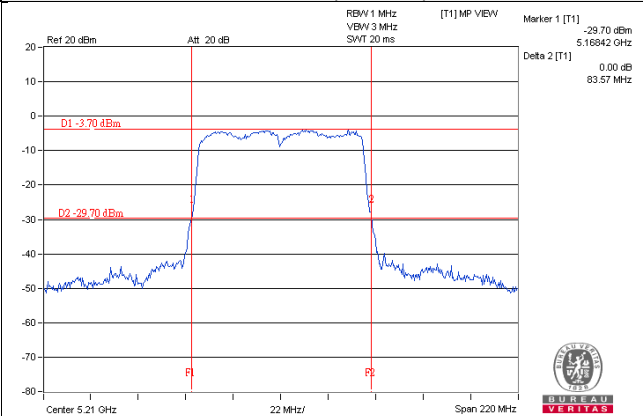

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.56	16.44
40	5200	16.80	16.92
48	5240	19.91	19.32
149	5745	27.48	25.39
157	5785	29.88	26.40
165	5825	32.28	28.92

802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.76	17.64
40	5200	18.00	17.88
48	5240	19.68	18.36
149	5745	28.56	26.64
157	5785	31.32	27.84
165	5825	34.08	29.52

802.11n (HT40)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	36.00	36.24
46	5230	36.48	36.72
151	5755	38.40	37.68
159	5795	50.28	47.16

802.11ac (VHT80)


Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	75.84	76.08
155	5775	75.84	76.32

Spectrum Plot of Worst Value


802.11a

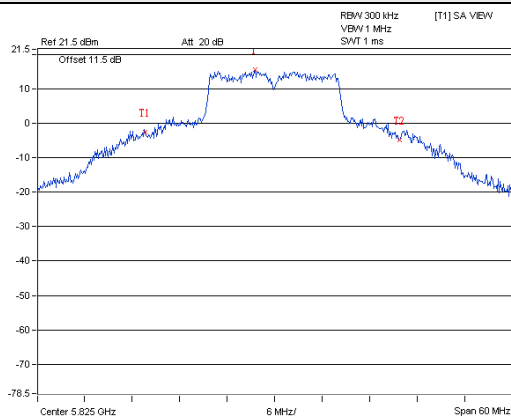


802.11n (HT20)

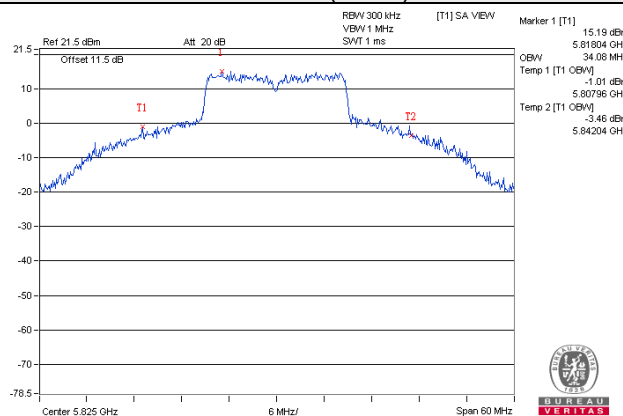

802.11n (HT40)

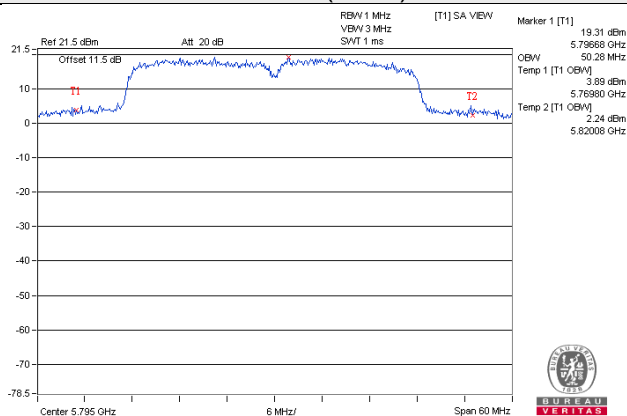

802.11ac (VHT80)

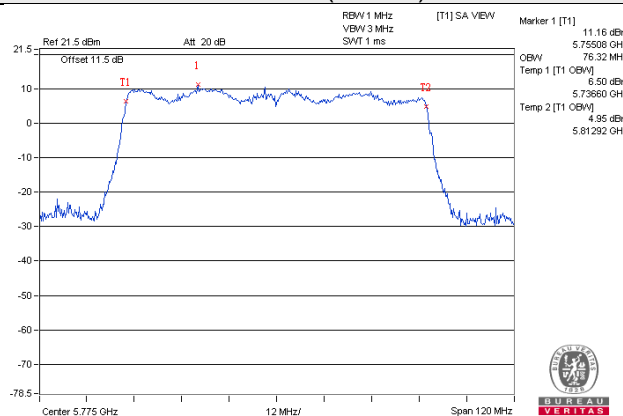


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	11dBm/ MHz
		Mobile and Portable client device	
U-NII-2A	-		11dBm/ MHz
U-NII-2C	-		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1 band:

Duty cycle of test signal is $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Duty cycle of test signal is $< 98\%$

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3 band:

Duty cycle of test signal is $\geq 98\%$

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS.
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured 1) power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz} / 300 \text{ kHz})$.
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value.

Duty cycle of test signal is $< 98\%$

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $\text{BWCF} = 10\log(500 \text{ kHz} / 300 \text{ kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1 band:

802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	6.08	7.55	0.21	10.10	14.71	Pass
40	5200	8.53	9.95	0.21	12.52	14.71	Pass
48	5240	10.10	10.90	0.21	13.74	14.71	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $17-(8.29-6) = 14.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
36	5180	5.78	7.75	0.13	10.01	14.71	Pass
40	5200	7.94	10.07	0.13	12.27	14.71	Pass
48	5240	10.08	10.71	0.13	13.54	14.71	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $17-(8.29-6) = 14.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
38	5190	0.09	2.26	0.20	4.51	14.71	Pass
46	5230	5.72	7.38	0.20	9.83	14.71	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $17-(8.29-6) = 14.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)		Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1				
42	5210	-5.26	-3.17	0.33	-0.76	14.71	Pass

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $17 - (8.29 - 6) = 14.71\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

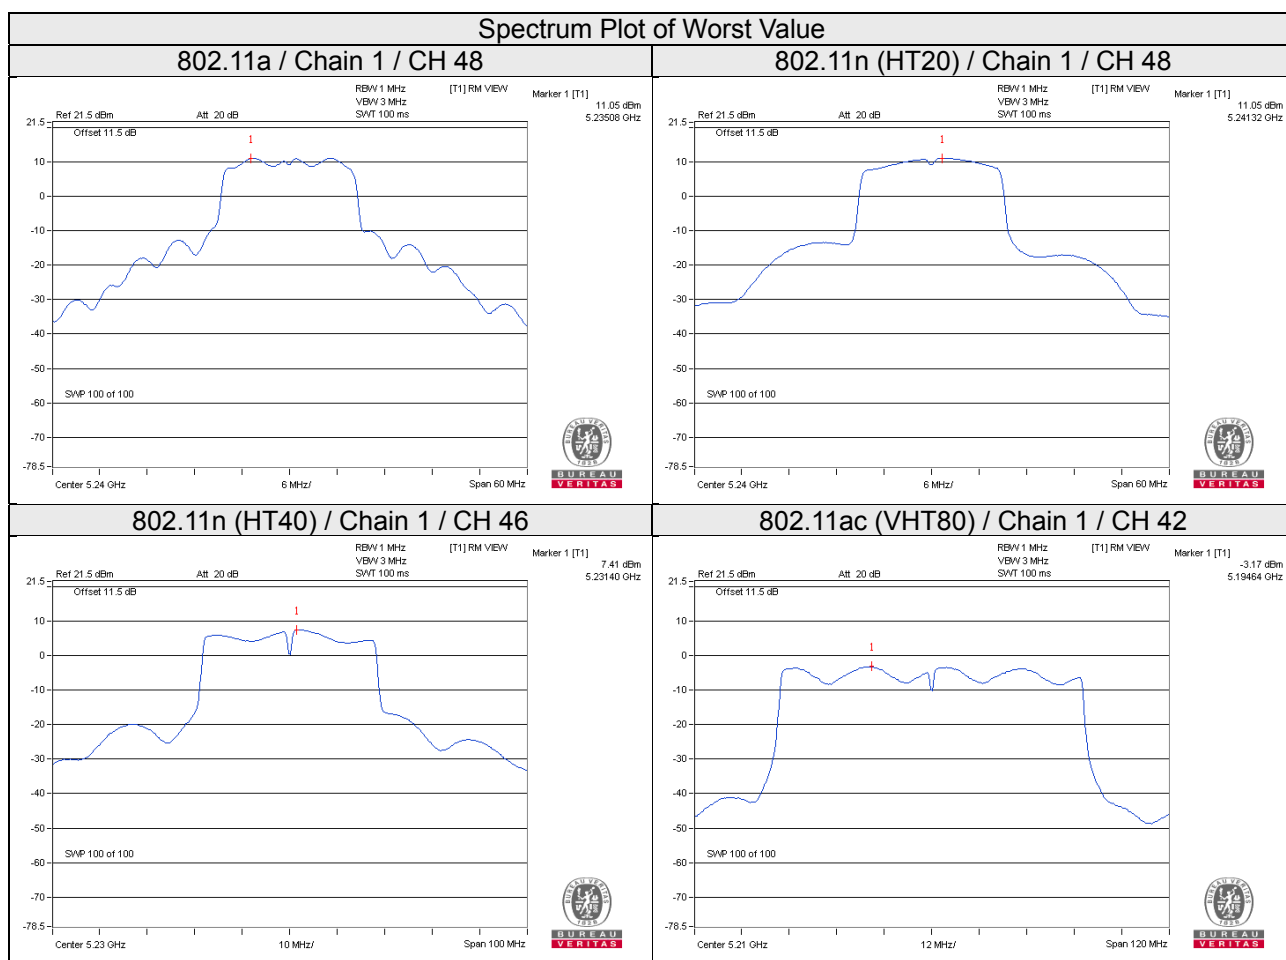

For U-NII-3 band:

802.11a

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 0	Chain 1				
149	5745	2.78	3.04	5.00	5.26	0.21	8.14	27.71	Pass
157	5785	2.66	2.80	4.88	5.02	0.21	7.96	27.71	Pass
165	5825	3.01	2.63	5.23	4.85	0.21	8.05	27.71	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 0	Chain 1				
149	5745	2.33	2.80	4.55	5.02	0.13	7.93	27.71	Pass
157	5785	2.41	2.56	4.63	4.78	0.13	7.84	27.71	Pass
165	5825	2.23	2.48	4.45	4.70	0.13	7.71	27.71	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)		PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 0	Chain 1				
151	5755	-1.26	-0.91	0.96	1.31	0.20	4.34	27.71	Pass
159	5795	-0.23	-0.17	1.99	2.05	0.20	5.22	27.71	Pass

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)


Chan.	Freq. (MHz)	PSD (dBm/300kHz)		PSD (dBm/500kHz)		Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		Chain 0	Chain 1	Chain 0	Chain 1				
155	5775	-8.93	-8.86	-6.71	-6.64	0.33	-3.35	27.71	Pass

Note:


1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5GHz Max. directional gain = $5.28\text{dBi} + 10\log(2) = 8.29\text{dBi} > 6\text{dBi}$, so the limit shall be reduced to $30 - (8.29 - 6) = 27.71\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a

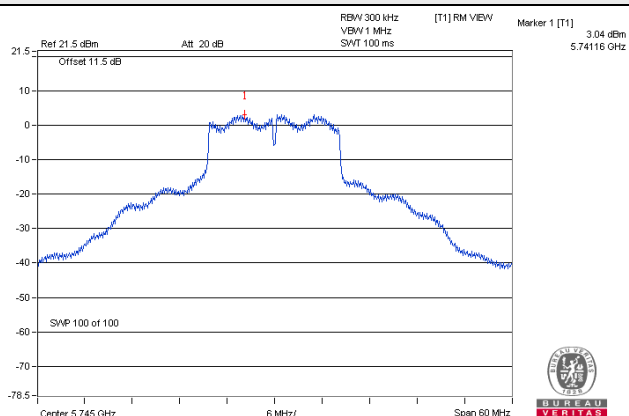


802.11n (HT20)

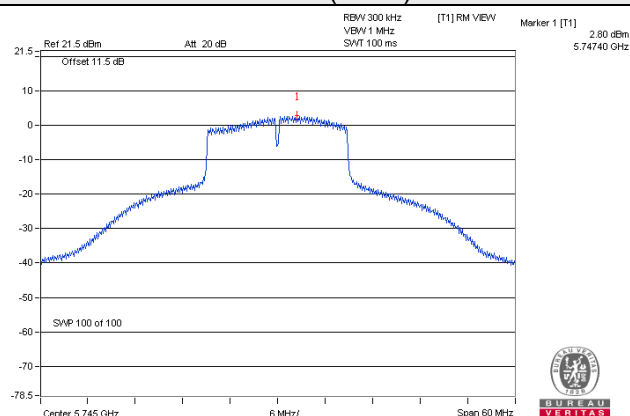

802.11n (HT40)

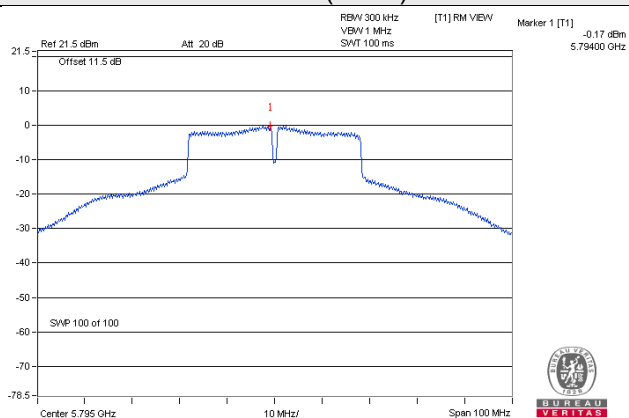

802.11ac (VHT80)

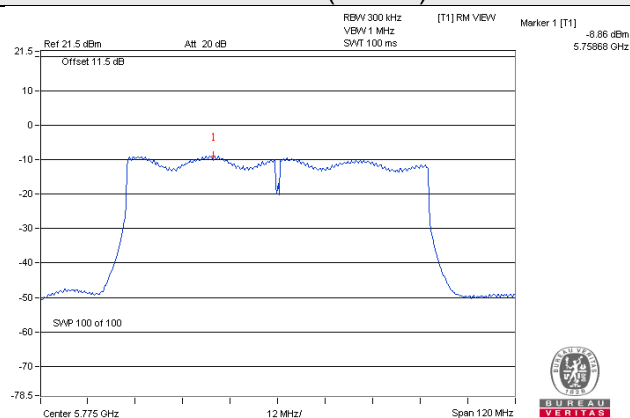


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

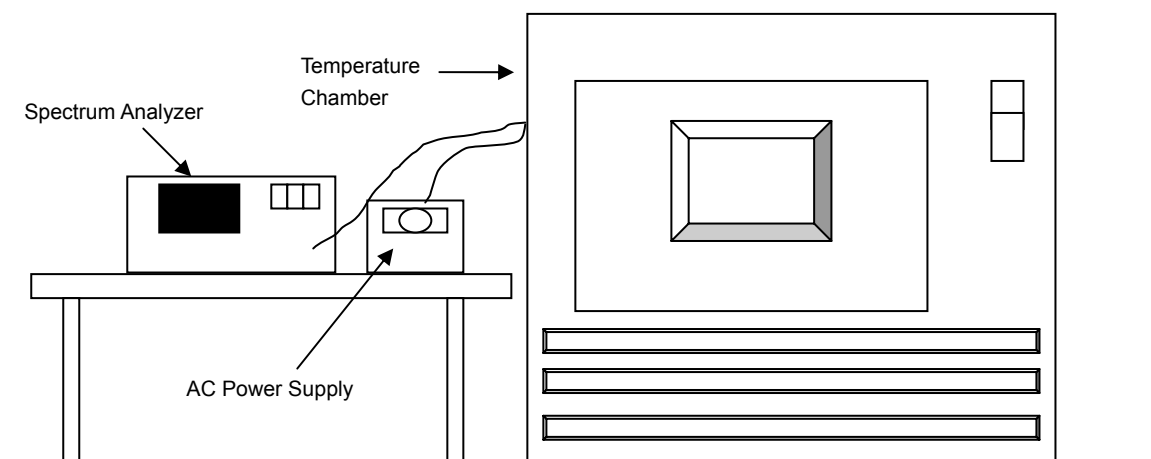

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5179.9861	-0.00027	5179.9848	-0.00029	5179.9872	-0.00025	5179.9878	-0.00024
40	120	5180.0096	0.00019	5180.0074	0.00014	5180.007	0.00014	5180.0078	0.00015
30	120	5179.9853	-0.00028	5179.9844	-0.00030	5179.9828	-0.00033	5179.986	-0.00027
20	120	5179.9757	-0.00047	5179.9801	-0.00038	5179.9765	-0.00045	5179.9767	-0.00045
10	120	5180.0213	0.00041	5180.019	0.00037	5180.0222	0.00043	5180.0223	0.00043
0	120	5180.0239	0.00046	5180.0221	0.00043	5180.0227	0.00044	5180.0245	0.00047
-10	120	5179.9947	-0.00010	5179.9939	-0.00012	5179.9938	-0.00012	5179.9967	-0.00006
-20	120	5180.0212	0.00041	5180.021	0.00041	5180.019	0.00037	5180.0196	0.00038
-30	120	5180.0245	0.00047	5180.0231	0.00045	5180.0235	0.00045	5180.0221	0.00043


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5179.9754	-0.00047	5179.9802	-0.00038	5179.9763	-0.00046	5179.9776	-0.00043
	120	5179.9757	-0.00047	5179.9801	-0.00038	5179.9765	-0.00045	5179.9767	-0.00045
	102	5179.9759	-0.00047	5179.9804	-0.00038	5179.9775	-0.00043	5179.977	-0.00044

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

Measurement Procedure REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	16.32	15.73	0.5	Pass
157	5785	16.42	15.76	0.5	Pass
165	5825	16.42	16.32	0.5	Pass

802.11n (HT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	17.56	15.90	0.5	Pass
157	5785	17.66	15.69	0.5	Pass
165	5825	17.68	16.31	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.86	35.09	0.5	Pass
159	5795	35.87	35.53	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	76.17	76.15	0.5	Pass

Spectrum Plot of Worst Value


802.11a

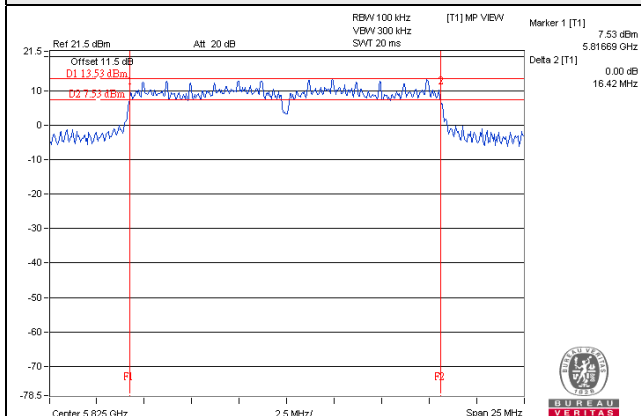


802.11n (HT20)

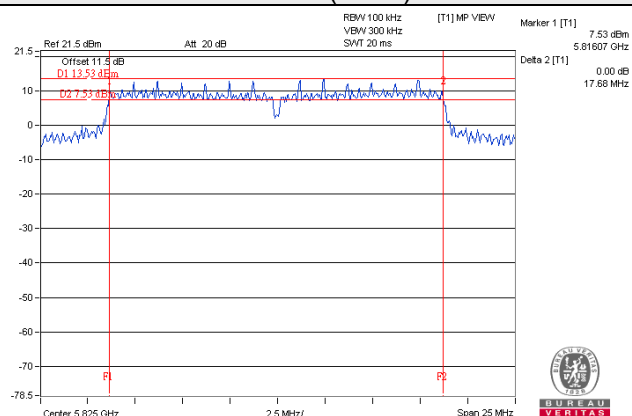

802.11n (HT40)

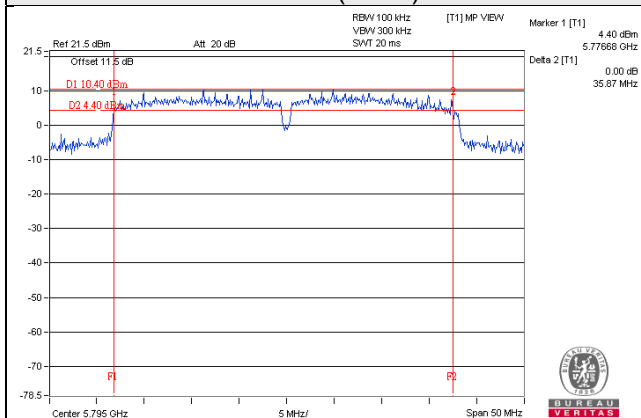

802.11ac (VHT80)

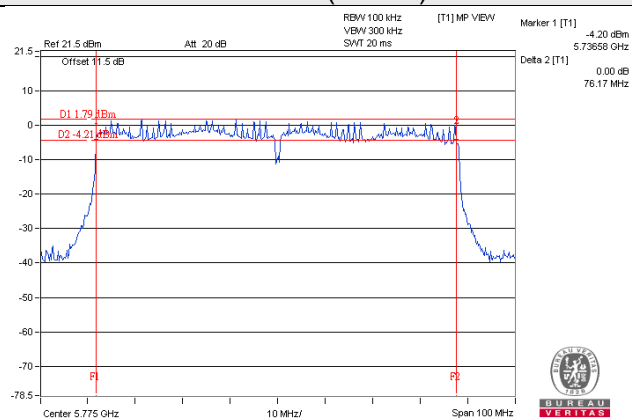


5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)

802.11a

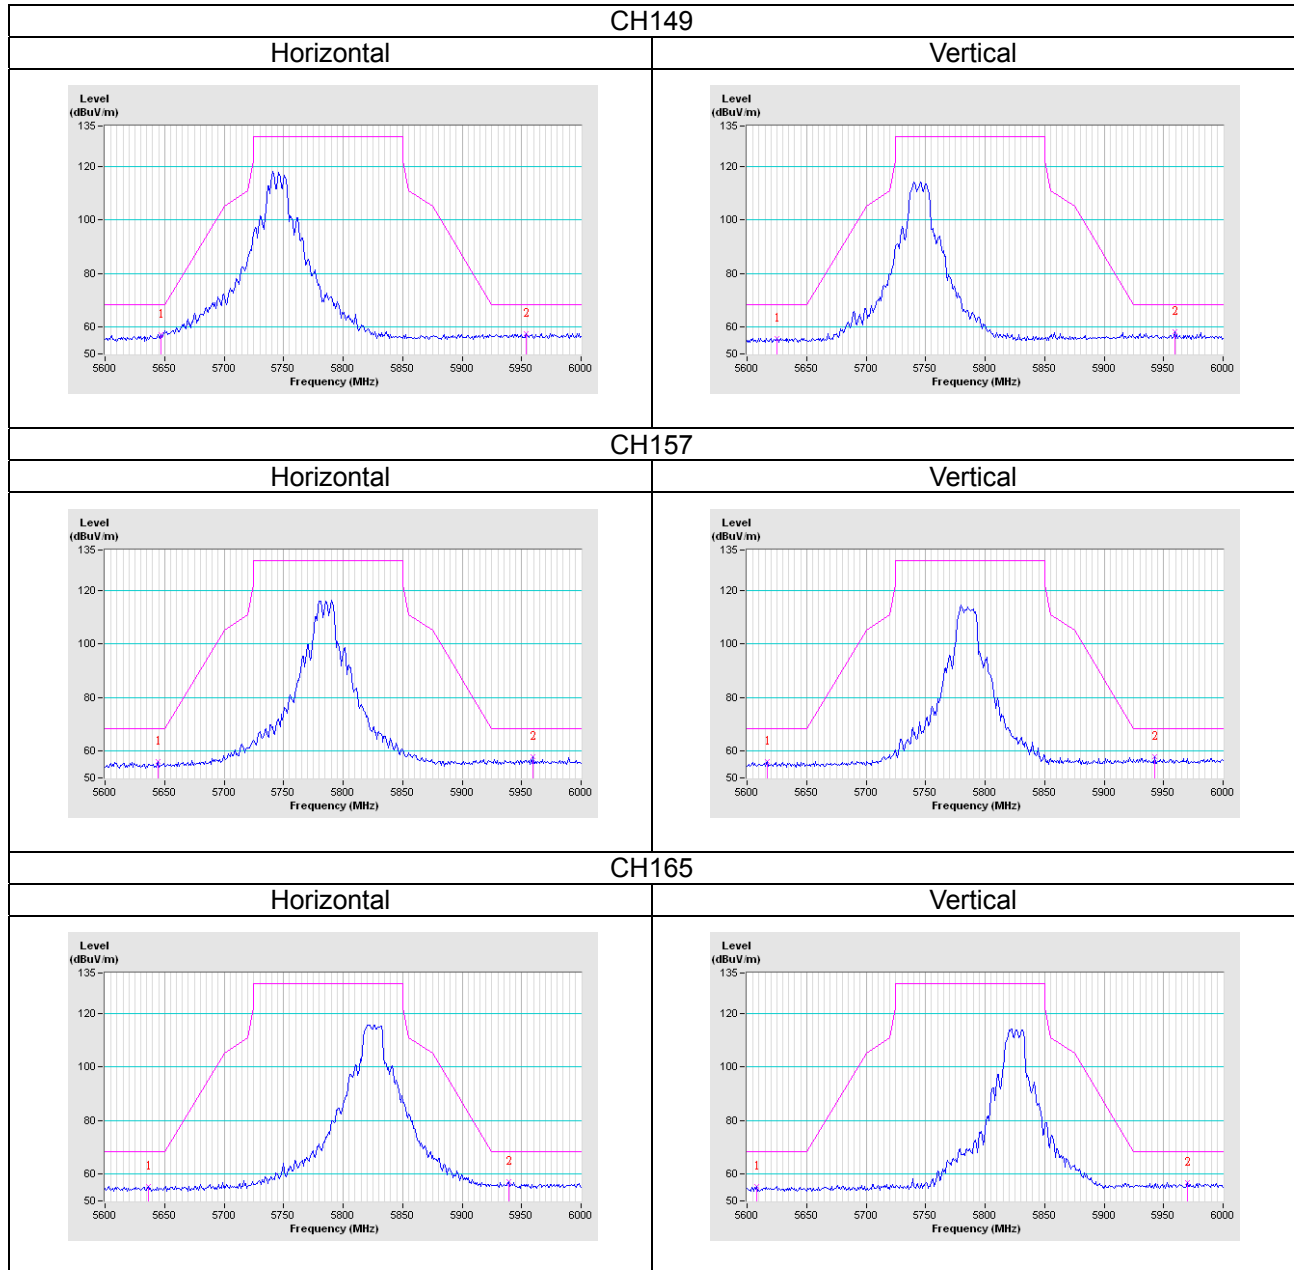


802.11n (HT20)

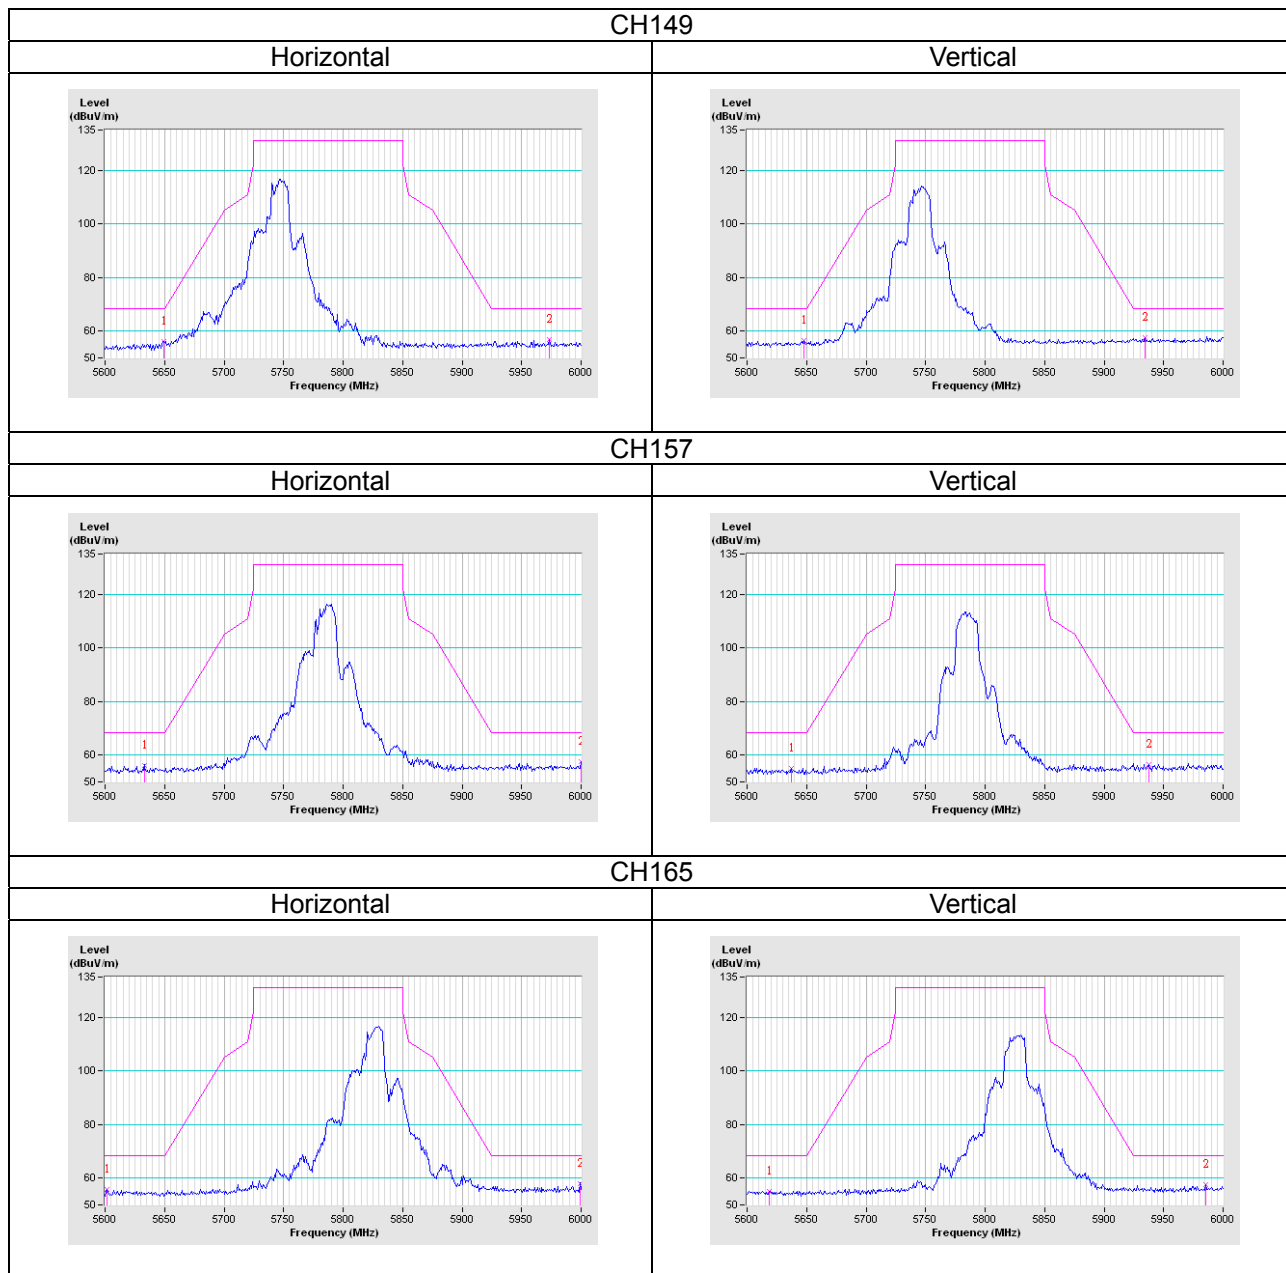


802.11n (HT40)

CH151

Horizontal

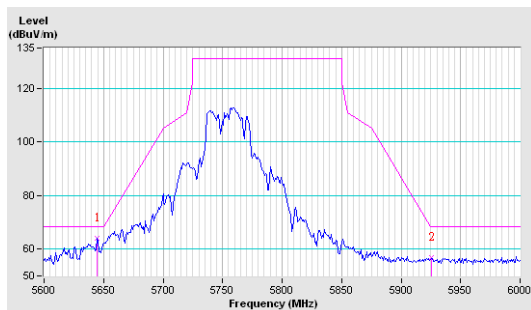


Vertical

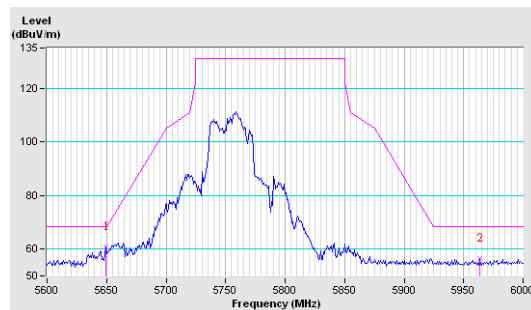


CH159

Horizontal

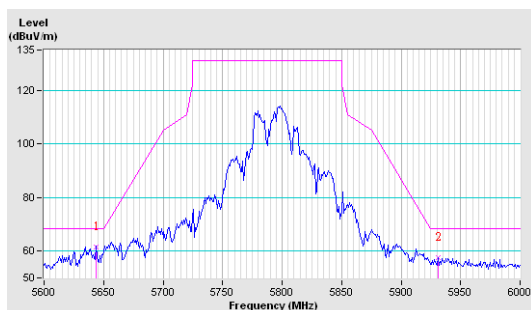


Vertical

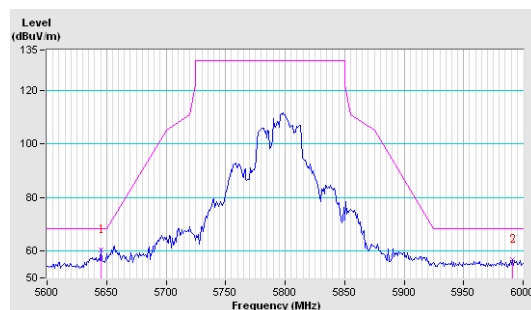


802.11ac (VHT80)

CH155

Horizontal

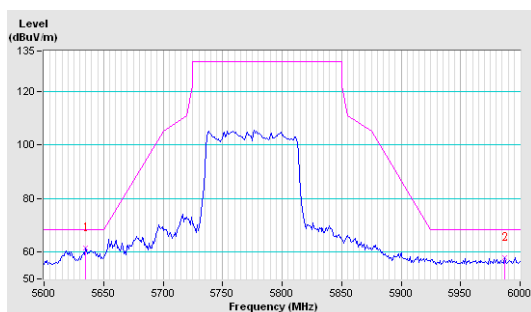

Vertical

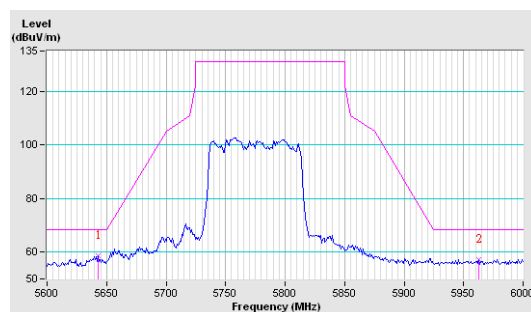

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---