



**FCC Class II Permissive Change Test Report
(FCC Part 15.247)**

**For the
MUELLER SYSTEMS
RFDC RADIO MODULE
FCC ID: SM6-RFDC**

**WLL Report# 12677-01 Rev. 0
September 26, 2012**

Prepared for:

**Mueller Systems
48 Leona Drive
Middleboro, MA 02346**

Prepared By:

**Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879**



Testing Certificate AT-1448

**FCC Class II Permissive Change Test Report
(FCC Part 15.247)**

**For the
MUELLER SYSTEMS
RFDC RADIO MODULE**

FCC ID: SM6-RFDC

September 26, 2011

WLL Report# 12677-01 Rev. 0



James Ritter
EMC Compliance Engineer

Reviewed by:



Steven D. Koster
Vice President

Abstract

This report has been prepared on behalf of Mueller Systems to support Application for a Class II Permissive Change to existing certified equipment. The test report and application are submitted for a Digital Transmission System under Part 15.247 (10/2010) of the FCC Rules & Regulations. This Permissive Change Test Report documents the test configuration and test results for a Mueller Systems RFDC Radio Module.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Mueller Systems RFDC Radio Module remains in compliance with the limits for a Digital Transmission System under Part 15.247 (10/2010).

Revision History	Reason	Date
Rev 0	Initial Release	September 26, 2011

Table of Contents

Abstract..... ii

1 Introduction.....4

 1.1 Reason for Class II Permissive Change 4

 1.2 Compliance Statement 4

 1.3 Test Scope..... 4

 1.4 Contract Information..... 4

 1.5 Test Dates..... 4

 1.6 Test and Support Personnel 4

 1.7 Abbreviations 5

2 Equipment Under Test6

 2.1 EUT Identification & Description..... 6

 2.2 Test Configuration 6

 2.3 Testing Algorithm..... 7

 2.4 Test Location..... 7

 2.5 Measurements 7

 2.5.1 References 7

 2.6 Measurement Uncertainty 7

3 Test Equipment9

4 Test Results.....10

 4.1 FCC Part 15.247 (b) RF Power Output: (FCC Part §2.1046) 10

 4.2 Radiated Spurious Emissions: (FCC Part §15.247)..... 14

 4.2.1 Test Procedure 14

List of Tables

Table 1: Device Summary..... 6

Table 2: Expanded Uncertainty List 8

Table 3: Test Equipment List..... 9

Table 4: Part 15.247 RF Power Output Results 10

Table 5: Radiated Emission Test Data, < 1GHz 15

Table 6: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 902.5MHz 16

Table 7: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 915.35MHz 17

Table 8: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 927.35MHz 18

Table 9: Radiated Emission Test Data, LCom 6dBi Antenna TX@ 902.5MHz 19

Table 10: Radiated Emission Test Data, LCom 6dBi Antenna, TX@ 915.35MHz 20

Table 11: Radiated Emission Test Data, LCom 6dBi Antenna, TX@ 927.35MHz 21

List of Figures

Figure 1: Test Configuration..... 6

Figure 2: Conducted Peak Power, 902.5MHz..... 11

Figure 3: Conducted Peak Power, 915.35MHz..... 12

Figure 4: Conducted Peak Power, 927.35MHz..... 13

1 Introduction

1.1 Reason for Class II Permissive Change

The permissive change incorporates the addition of two antennas. The antennas are the following :
PCTEL MFB9153MMK-DAT, 3dBd (5.15dBi) Gain, Omni Directional Dipole Antenna

L-COM HGV-906U, 6dBi Gain, Omni Directional Dipole Antenna

1.2 Compliance Statement

The Mueller Systems RFDC Radio Module remains in compliance with the limits for a Digital Transmission System under Part 15.247 (10/2010).

1.3 Test Scope

Tests for radiated emissions and conducted Peak Power (at antenna terminal) were performed. All measurements were performed in accordance with FCC Public Notice DA 00-705 and the 2009 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation unless a different measurement technique is specified by the FCC.

1.4 Contract Information

Customer:	Mueller Systems 48 Leona Drive Middleboro, MA 02346
Purchase Order Number:	835964
Quotation Number:	67064A

1.5 Test Dates

Testing was performed on the following date(s): 9/7/2012 and 9/10/2012

1.6 Test and Support Personnel

Washington Laboratories, LTD	James Ritter
Client Representative	Mike Higgins

1.7 Abbreviations

A	A mpere
ac	a lternating current
AM	A mplitude Modulation
Amps	A mperes
b/s	b its per second
BW	B and W idth
CE	C onducted E mission
cm	c entimeter
CW	C ontinuous W ave
dB	d eci B el
dc	d irect current
EMI	E lectromagnetic I nterference
EUT	E quipment U nder T est
FM	F requency M odulation
G	g iga - prefix for 10 ⁹ multiplier
Hz	H ertz
IF	I ntermediate F requency
k	k ilo - prefix for 10 ³ multiplier
LISN	L ine I mpedance S tabilization N etwork
M	M ega - prefix for 10 ⁶ multiplier
m	m eter
μ	m icro - prefix for 10 ⁻⁶ multiplier
NB	N arrow b and
QP	Q uasi- P eak
RE	R adiated E missions
RF	R adio F requency
rms	r oot- m ean- s quare
SN	S erial Nu Mber
S/A	S pectrum A nalyzer
V	V olt

2 Equipment Under Test

2.1 EUT Identification & Description

The Mueller Systems device is an RFDC Radio Module.

Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	Mueller Systems
FCC ID:	SM6-RFDC
Model:	RFDC RADIO MODULE
FCC Rule Parts:	§15.247
Frequency Range:	902.5MHz – 927.35MHz
Maximum Output Power:	29.84dBm
Antenna Connector	RPSMA (for external whip)
Antenna Type	Omni directional Dipole antenna
Antenna Gain	5.15dBi (3dBd) and 6.0dBi
Power Source & Voltage:	120VAC

2.2 Test Configuration

The RFDC Radio Module was operated from 120VAC 60Hz power via an AC field radio motherboard. Commands were sent to the RFDC Radio Module using an RS232 port connected to a support laptop using Windows HyperTerminal program. Radiated Emissions test were performed with both of the replacement antennas in place in the worst case orthogonal of the EUT.

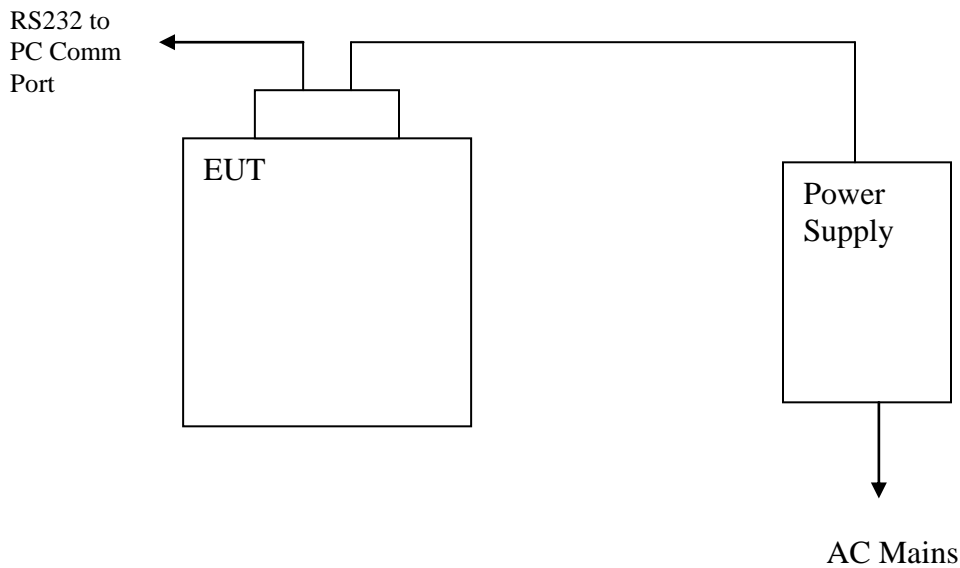


Figure 1: Test Configuration

2.3 Testing Algorithm

The RFDC Radio Module was programmed for operation via a serial cable connected to a laptop running HyperTerminal. Channel selection and modulation was accomplished using the laptop to set the EUT into a continuous transmit pseudo-random data stream at the Low, Center and High channels. Once the channel was set, the laptop was removed from the setup.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where u_c = standard uncertainty
 a, b, c, \dots = individual uncertainty elements
 $Div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution
 Divisor = 1.732 for rectangular distribution
 Divisor = 2 for normal distribution
 Divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where U = expanded uncertainty
 k = coverage factor
 $k \leq 2$ for 95% coverage (ANSI/NCSL Z540-2 Annex G)
 u_c = standard uncertainty

Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded Uncertainty
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	+/-4.55 dB

3 Test Equipment

Table 3 lists the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Conducted Emissions at Antenna Terminal		Test Date: 09/7/2012	
Asset #	Manufacturer/Model	Description	Cal. Due
618	HP – 8563A	ANALYZER SPECTRUM	2/10/2013
Test Name: Radiated Emissions		Test Date: 09/17/2011	
Asset #	Manufacturer/Model	Description	Cal. Due
68	HP - 85650A	ADAPTER QP	7/1/2013
70	HP - 85685A	PRESELECTOR RF W/OPT 8ZE	7/1/2013
72	HP - 8568B	ANALYZER SPECTRUM	7/1/2013
425	ARA - DRG-118/A	ANTENNA DRG 1-18GHZ	9/7/2013
66	HP - 8449B	PRE-AMPLIFIER RF. 1-26.5GHZ	12/1/2012
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	12/27/2012
Metric Test 220595	HP8565E	ANALYZER SPECTRUM	02/24/2013

4 Test Results

4.1 FCC Part 15.247 (b) RF Power Output: (FCC Part §2.1046)

To measure the output power the output from the transmitter was connected to the input of a spectrum analyzer. The Current grant RF power levels and report filing levels are reported in the tables below along with the new measured RF power levels.

This is applicable for the 902 – 928MHz band of this device.

Table 4: Part 15.247 RF Power Output Results

Grant listed as 0.955 Watts for 902 - 928MHz

Channel and/or Frequency	Peak Measured Level (dBm)	Peak Measured Level (Watts)	FCC Grant Report Level (dBm)	FCC Grant Report Level (Watts)	Limit (dBm)
Low Channel (902.5MHz)	29.17	0.826	29.50	0.891	30
Mid Channel (915.35MHz)	29.84	0.964	29.50	0.891	30
High Channel (927.35MHz)	28.84	0.766	28.84	0.766	30

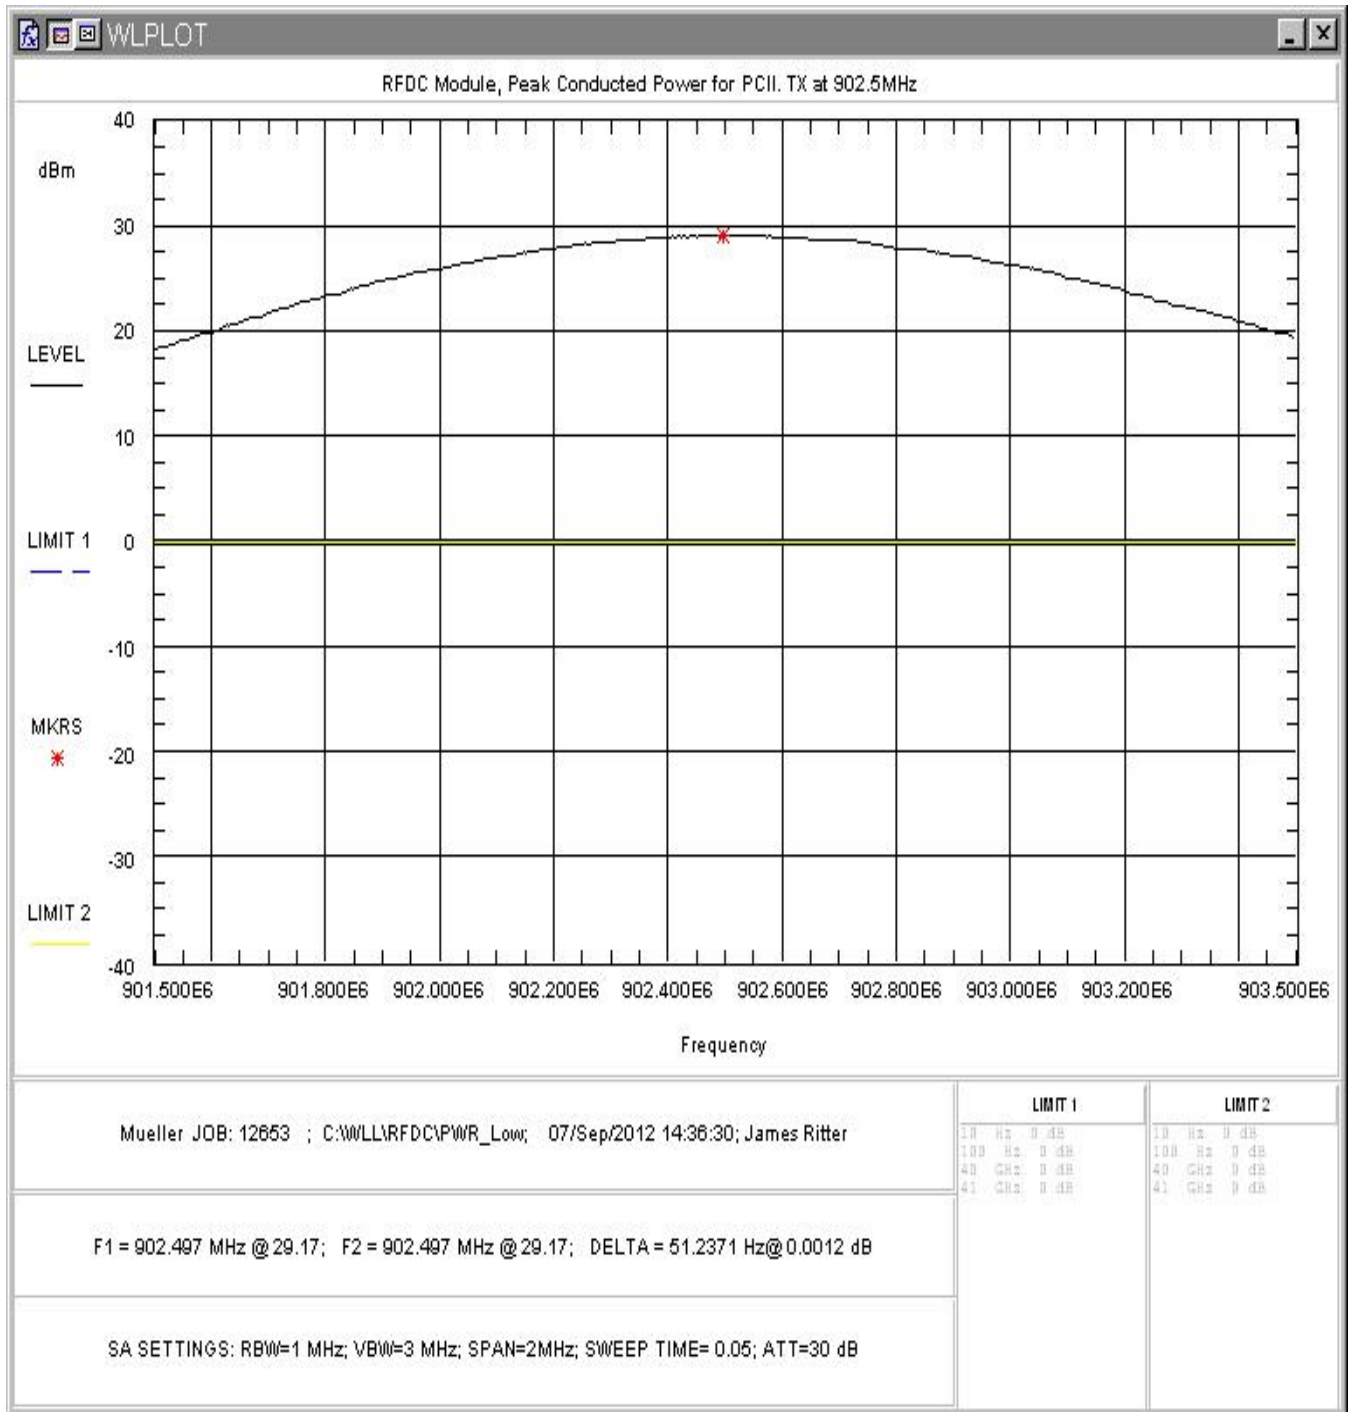


Figure 2: Conducted Peak Power, 902.5MHz



Figure 3: Conducted Peak Power, 915.35MHz

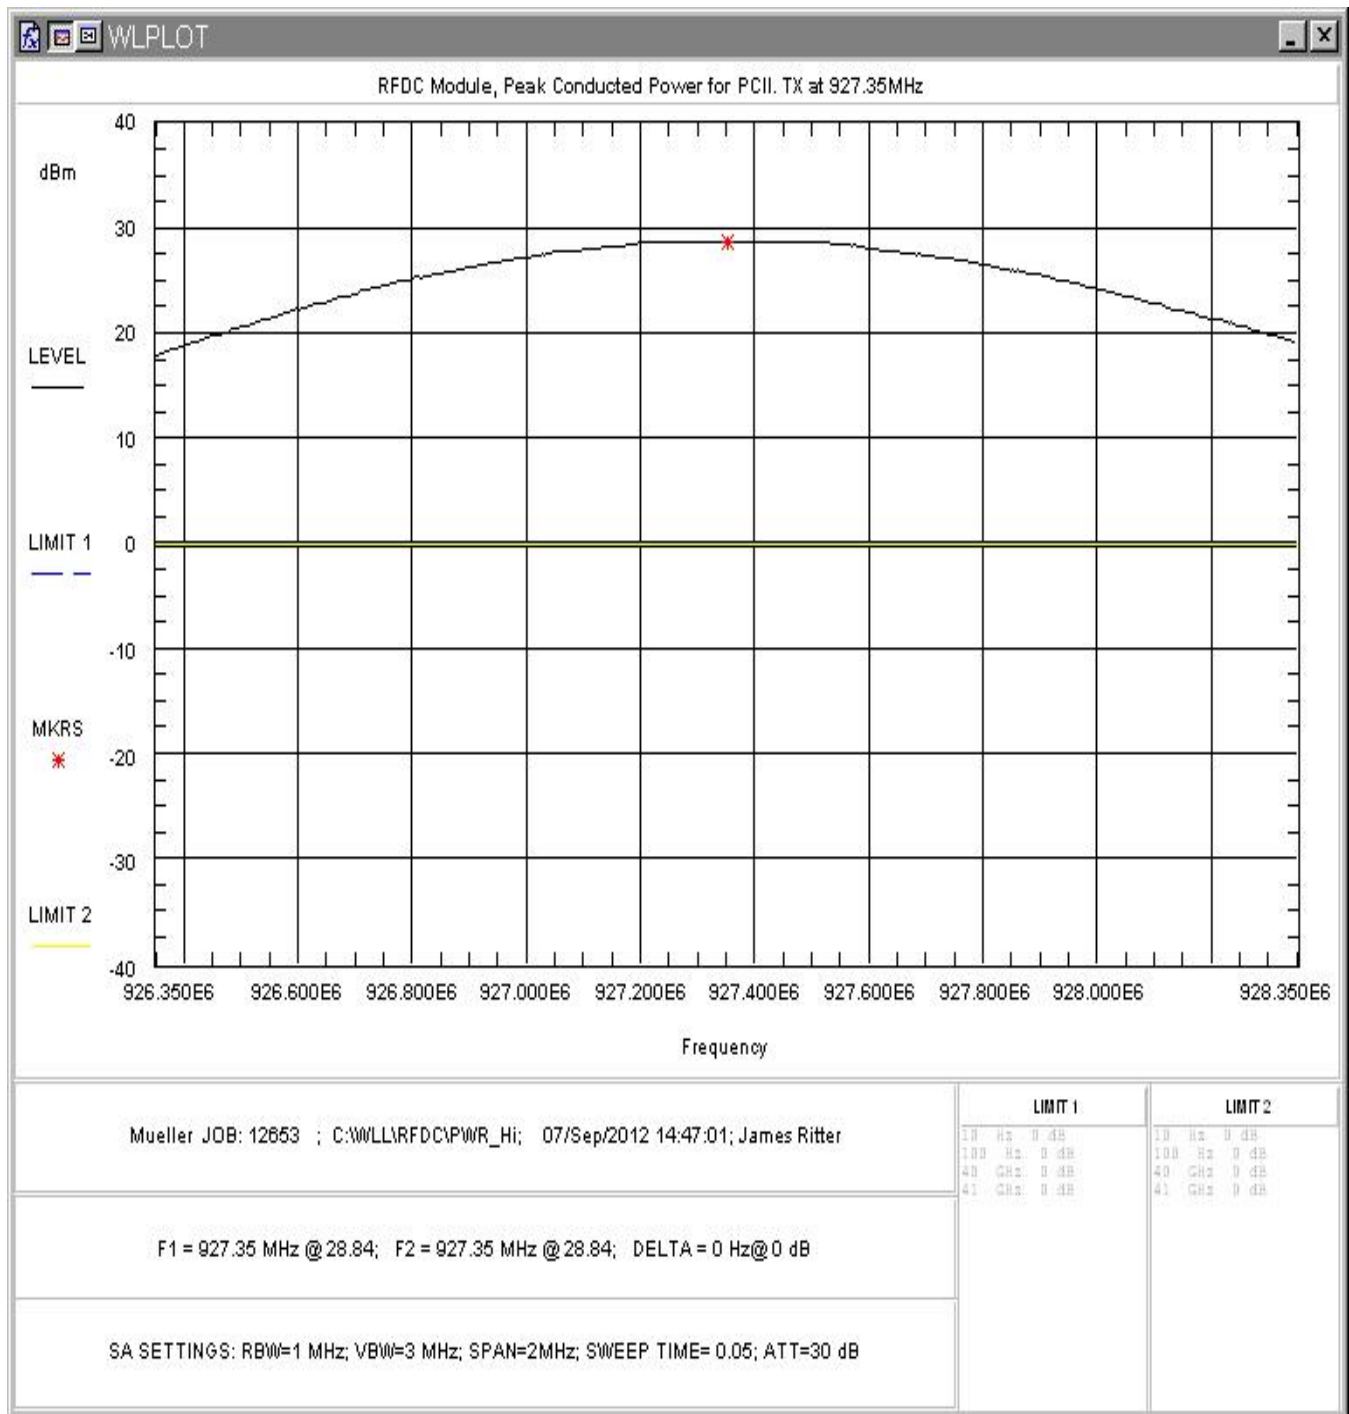


Figure 4: Conducted Peak Power, 927.35MHz

4.2 Radiated Spurious Emissions: (FCC Part §15.247)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

4.2.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

3 Orthogonals of the EUT were scanned in the restricted bands up to the 10th harmonic with the worst case readings shown.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	10 Hz (Avg.) 1MHz (Peak)

Table 5: Radiated Emission Test Data, < 1GHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
114.41	V	180.00	1.00	12.50	16.1	27.0	150.0	-14.9	
123.93	V	270.00	1.00	12.80	16.0	27.6	150.0	-14.7	
240.00	V	270.00	1.00	8.30	14.6	13.9	200.0	-23.1	
114.41	H	190.00	2.97	8.30	16.1	16.6	150.0	-19.1	
123.93	H	180.00	2.97	10.40	16.0	20.9	150.0	-17.1	
240.00	H	185.00	3.00	9.90	14.6	16.7	200.0	-21.5	

Note: Emissions below 1GHz were common to all channels and both antennas tested.

Table 6: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 902.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2707.50	V	0.00	1.75	44.30	8.5	437.6	5000.0	-21.2	Peak
3610.00	V	300.00	1.66	43.47	6.6	319.9	5000.0	-23.9	Peak
4512.50	V	90.00	1.60	42.10	7.6	306.5	5000.0	-24.3	Peak
5415.00	V	350.00	1.54	42.80	6.6	296.2	5000.0	-24.5	Peak
Average									
2707.50	V	0.00	1.75	31.97	8.5	105.8	500.0	-13.5	Average
3610.00	V	300.00	1.66	30.80	7.6	83.4	500.0	-15.6	Average
4512.50	V	90.00	1.60	31.10	7.6	86.4	500.0	-15.3	Average
5415.00	V	350.00	1.54	31.63	9.0	107.6	500.0	-13.3	Average
Peak									
2707.50	H	200.00	2.40	45.13	8.5	481.5	5000.0	-20.3	Peak
3610.00	H	225.00	2.32	43.13	6.6	307.6	5000.0	-24.2	Peak
4512.50	H	270.00	2.30	41.97	7.6	301.9	5000.0	-24.4	Peak
5415.00	H	300.00	2.06	42.80	9.0	389.4	5000.0	-22.2	Peak
Average									
2707.50	H	200.00	2.40	31.97	8.5	105.8	500.0	-13.5	Average
3610.00	H	225.00	2.32	30.63	6.6	73.0	500.0	-36.7	Average
4512.50	H	270.00	2.30	30.5	7.6	80.3	500.0	-35.9	Average
5415.00	H	300.00	2.06	31.1	9.0	101.6	500.0	-33.8	Average

Table 7: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 915.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2746.05	V	0.00	2.34	43.45	8.2	382.9	5000.0	-22.3	Peak
3661.40	V	90.00	2.30	42.90	6.8	305.8	5000.0	-24.3	Peak
4576.75	V	5.00	1.92	42.82	7.3	319.0	5000.0	-23.9	Peak
7322.80	V	90.00	1.90	43.20	12.6	617.1	5000.0	-18.2	Peak
Average									
2746.05	V	0.00	2.34	32.78	8.2	112.1	500.0	-13.0	Average
3661.40	V	90.00	2.30	31.50	6.8	82.3	500.0	-15.7	Average
4576.75	V	5.00	1.92	30.50	7.3	77.2	500.0	-16.2	Average
7322.80	V	90.00	1.90	32.00	12.6	170.0	500.0	-9.4	Average
Peak									
2746.05	H	10.00	2.30	44.50	8.2	432.1	5000.0	-21.3	Peak
4576.75	H	0.00	2.31	42.60	7.3	311.0	5000.0	-24.1	Peak
7322.80	H	180.00	2.59	44.51	12.6	717.5	5000.0	-16.9	Peak
Average									
2746.05	H	10.00	2.30	32.70	8.2	111.1	500.0	-13.1	Average
4576.75	H	0.00	2.31	30.52	7.3	77.4	500.0	-16.2	Average
7322.80	H	180.00	2.59	32.6	12.6	182.1	500.0	-8.8	Average

Table 8: Radiated Emission Test Data, PCTel 5.15dBi Antenna, TX@ 927.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2782.05	V	180.00	2.20	44.30	7.9	408.6	5000.0	-21.8	Peak
3709.40	V	180.00	2.20	43.80	7.0	345.4	5000.0	-23.2	Peak
4636.77	V	200.00	2.00	41.97	7.3	291.0	5000.0	-24.7	Peak
Average									
2782.05	V	180.00	2.20	31.97	7.9	98.8	500.0	-14.1	Average
3709.40	V	180.00	2.20	31.80	7.0	86.8	500.0	-15.2	Average
4636.77	V	200.00	2.00	30.47	7.3	77.4	500.0	-16.2	Average
Peak									
2782.05	H	1.90	300.00	44.30	7.9	408.6	5000.0	-21.8	Peak
3709.40	H	1.90	0.00	43.30	7.0	326.1	5000.0	-23.7	Peak
4636.77	H	1.80	345.00	42.10	7.3	295.4	5000.0	-24.6	Peak
Average									
2782.05	H	1.90	300.00	32.10	7.9	100.3	500.0	-14.0	Average
3709.40	H	1.90	0.00	31.80	7.0	86.8	500.0	-15.2	Average
4636.77	H	1.80	345.00	30.63	7.3	78.9	500.0	-16.0	Average

Table 9: Radiated Emission Test Data, LCom 6dBi Antenna TX @ 902.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2707.50	V	270.00	2.60	48.67	-3.4	184.0	5000.0	-28.7	Peak
3610.00	V	270.00	3.19	38.40	-1.4	70.6	5000.0	-37.0	Peak
4512.50	V	180.00	2.66	45.02	1.3	208.2	5000.0	-27.6	Peak
5415.00	V	270.00	2.49	42.02	3.8	196.0	5000.0	-28.1	Peak
Average									
2707.50	V	270.00	2.60	37.50	-3.4	50.8	500.0	-19.9	Average
3610.00	V	270.00	3.19	27.19	-1.4	19.4	500.0	-28.2	Average
4512.50	V	180.00	2.66	32.86	1.3	51.3	500.0	-19.8	Average
5415.00	V	270.00	2.49	32.64	3.8	66.6	500.0	-17.5	Average
Peak									
2707.50	H	0.00	2.70	45.60	-3.4	129.2	5000.0	-31.8	Peak
3610.00	H	45.00	2.54	43.88	-1.4	132.6	5000.0	-31.5	Peak
4512.50	H	180.00	2.45	43.76	1.3	180.1	5000.0	-28.9	Peak
5415.00	H	280.00	2.32	45.58	3.8	295.4	5000.0	-24.6	Peak
Average									
2707.50	H	0.00	2.70	36.10	-3.4	43.3	500.0	-21.3	Average
3610.00	H	45.00	2.54	33.80	-1.4	41.6	500.0	-21.6	Average
4512.50	H	180.00	2.45	33.20	1.3	53.4	500.0	-19.4	Average
5415.00	H	280.00	2.32	34.20	3.8	79.7	500.0	-16.0	Average

Table 10: Radiated Emission Test Data, LCom 6dBi Antenna, TX@ 915.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2746.05	V	0.00	2.34	43.10	8.2	367.8	5000.0	-22.7	Peak
3661.40	V	90.00	2.30	42.80	6.8	302.3	5000.0	-24.4	Peak
4576.75	V	5.00	1.92	42.50	7.3	307.5	5000.0	-24.2	Peak
7322.80	V	90.00	1.90	42.97	12.6	601.0	5000.0	-18.4	Peak
Average									
2746.05	V	0.00	2.34	32.47	8.2	108.2	500.0	-13.3	Average
3661.40	V	90.00	2.30	31.30	6.8	80.4	500.0	-15.9	Average
4576.75	V	5.00	1.92	30.30	7.3	75.5	500.0	-16.4	Average
7322.80	V	90.00	1.90	31.65	12.6	163.2	500.0	-9.7	Average
Peak									
2746.05	H	10.00	2.30	44.30	8.2	422.3	5000.0	-21.5	Peak
4576.75	H	0.00	2.31	41.97	7.3	289.3	5000.0	-24.8	Peak
7322.80	H	180.00	2.59	44.13	12.6	686.8	5000.0	-17.2	Peak
Average									
2746.05	H	10.00	2.30	32.30	8.2	106.1	500.0	-13.5	Average
4576.75	H	0.00	2.31	30.13	7.3	74.0	500.0	-16.6	Average
7322.80	H	180.00	2.59	32.3	12.6	175.9	500.0	-9.1	Average

Table 11: Radiated Emission Test Data, LCom 6dBi Antenna, TX@ 927.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
Peak									
2782.05	V	180.00	2.20	48.30	7.9	647.6	5000.0	-17.8	Peak
3709.40	V	180.00	2.20	43.80	7.0	345.4	5000.0	-23.2	Peak
4636.77	V	200.00	2.00	42.40	7.3	305.8	5000.0	-24.3	Peak
Average									
2782.05	V	180.00	2.20	36.13	7.9	159.5	500.0	-9.9	Average
3709.40	V	180.00	2.20	31.80	7.0	86.8	500.0	-15.2	Average
4636.77	V	200.00	2.00	30.45	7.3	77.2	500.0	-16.2	Average
Peak									
2782.05	H	1.90	300.00	44.10	7.9	399.3	5000.0	-22.0	Peak
3709.40	H	1.90	0.00	43.60	7.0	337.5	5000.0	-23.4	Peak
4636.77	H	1.80	345.00	42.10	7.3	295.4	5000.0	-24.6	Peak
Average									
2782.05	H	1.90	300.00	32.10	7.9	100.3	500.0	-14.0	Peak
3709.40	H	1.90	0.00	31.80	7.0	86.8	500.0	-15.2	Average
4636.77	H	1.80	345.00	30.40	7.3	76.8	500.0	-16.3	Average