



**FCC & Industry Canada
Class II Permissive Change Test Report
For the
MUELLER SYSTEMS
REPEATER RADIO MODULE
FCC ID: SM6-RMXR
IC ID: 9235A-RMXR**

**WLL Report# 12975-01 Rev. 1
April 22, 2013
Re-issued June 14, 2013**

Prepared for:

**Mueller Systems
48 Leona Drive
Middleboro, MA 02346**

Prepared By:

**Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879**



Testing Certificate AT-1448

**FCC & Industry Canada
Class II Permissive Change Test Report
For the
MUELLER SYSTEMS
REPEATER RADIO MODULE**


**FCC ID: SM6-RMXR
IC ID: 9235A-RMXR**

**April 22, 2013
Re-issued June 14, 2013
WLL Report# 12975-01 Rev. 1**



James Ritter
EMC Lab manager

Reviewed by:



John P. Repella
QA Manager

Abstract

This report has been prepared on behalf of Mueller Systems to support Application for a Class II Permissive Change to existing certified equipment. The test report and application are submitted for a limited modular Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2010) of the FCC Rules and Spectrum Management and Telecommunications Policy RSS-210 issue 8 of Industry Canada. This Certification Test Report documents the test configuration and test results for the Repeater Radio Module.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Mueller Systems Repeater Radio Module remains in compliance with the limits for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2010).

Revision History	Reason	Date
Rev 0	Initial Release	April 22, 2013
Rev 1	Corrected references for ANSI 63.4-2009 to ANSI 63.4-2003	June 14, 2013 JR

Table of Contents

Abstract..... ii

1 Introduction.....1

 1.1 Reason for Class II Permissive Change 1

 1.2 Compliance Statement 1

 1.3 Test Scope..... 1

 1.4 Contract Information..... 1

 1.5 Test Dates..... 1

 1.6 Test and Support Personnel 1

 1.7 Abbreviations 2

2 Equipment Under Test3

 2.1 EUT Identification & Description..... 3

 2.2 Test Configuration 3

 2.3 Testing Algorithm..... 4

 2.4 Test Location..... 4

 2.5 Measurements 4

 2.5.1 References..... 4

 2.6 Measurement Uncertainty 4

3 Test Equipment6

4 Test Results.....7

 4.1 RF Power Output (FCC Part15.247 (b) & IC RSS-210 [A8.4 (1)]) 7

 4.2 Radiated Spurious Emissions: (FCC Part §15.247 & IC RSS-210 Sect.2.2) 11

 4.2.1 Test Procedure 11

List of Tables

Table 1: Device Summary..... 3

Table 2: Expanded Uncertainty List 5

Table 3: Test Equipment List..... 6

Table 4: Part 15.247 RF Power Output Results..... 7

Table 5: Radiated Emission Test Data below 1GHz (Restricted Bands)..... 12

Table 6: Radiated Emission Test Data, 4dBi Antenna TX@ 902.5MHz 12

Table 7: Radiated Emission Test Data, 4dBi Antenna, TX@ 915.35MHz 13

Table 8: Radiated Emission Test Data, 4dBi Antenna, TX@ 927.35MHz 14

Table 9: Receiver Radiated Emission Test Data..... 16

List of Figures

Figure 1: Test Configuration..... 3

Figure 2: Conducted Peak Power, 902.5MHz..... 8

Figure 3: Conducted Peak Power, 915.35MHz..... 9

Figure 4: Conducted Peak Power, 927.35MHz..... 10

1 Introduction

1.1 Reason for Class II Permissive Change

This Class II permissive change is to incorporate the following modifications or additions to the Repeater Radio Module:

The addition of the following antenna:

Model W2203 4 dBi Phased dipole antenna.

As this antenna is not the highest gain antenna authorized with this module no new RF exposure report is required.

1.2 Compliance Statement

The Mueller Systems Repeater Radio Module remains in compliance with the limits for a Frequency Hopping System under Part 15.247 (10/2010) and Industry Canada RSS-210 issue 8.

1.3 Test Scope

Tests for radiated emissions and conducted Peak Power (at antenna terminal) were performed. All measurements were performed in accordance with FCC Public Notice DA 00-705 and the 2003 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation unless a different measurement technique is specified by the FCC.

1.4 Contract Information

Customer:	Mueller Systems 48 Leona Drive Middleboro, MA 02346
Purchase Order Number:	877687
Quotation Number:	67451

1.5 Test Dates

Testing was performed on the following date(s):	4/18/2013
---	-----------

1.6 Test and Support Personnel

Washington Laboratories, LTD	James Ritter
Customer Representative	David Splitz

1.7 Abbreviations

A	Ampere
ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	BandWidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	deciBel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10⁹ multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10³ multiplier
LISN	Line Impedance Stabilization Network
M	Mega - prefix for 10⁶ multiplier
m	meter
μ	micro - prefix for 10⁻⁶ multiplier
NB	Narrowband
QP	Quasi-Peak
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The Mueller Systems device is a Repeater Radio Module.

Table 1: Device Summary

ITEM	DESCRIPTION
Manufacturer:	Mueller Systems
FCC ID:	SM6-RMXR
IC ID:	9235A-RMXR
Model:	Repeater Radio Module
FCC Rule Parts:	§15.247
Frequency Range:	902.5MHz – 927.35MHz
Maximum Output Power:	29.35dBm
Antenna Connector	RPSMA (for external antenna)
Antenna Type	Phased Dipole
Antenna Gain	4.0dBi
Power Source & Voltage:	120VAC Power Supply providing 3.7VDC

2.2 Test Configuration

The Repeater Radio Module was operated from 3.7VDC power supply.. Commands were sent to the Repeater Radio Module using an RS232 port connected to a support laptop using Windows HyperTerminal program. Radiated Emissions test were performed with the replacement antenna and the module in the worst case orthogonal position.

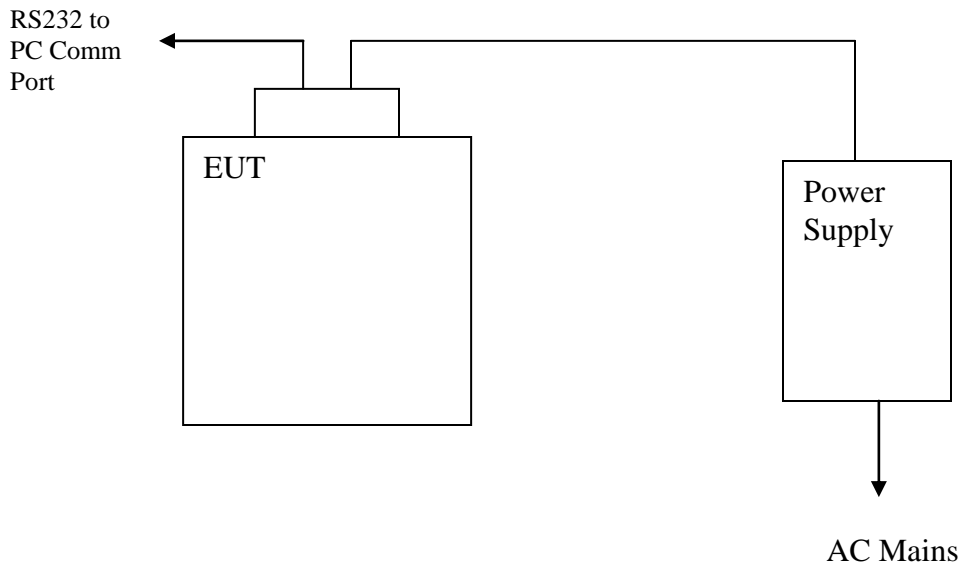


Figure 1: Test Configuration

2.3 Testing Algorithm

The Repeater Radio Module was programmed for operation via a serial cable connected to a laptop running HyperTerminal. Channel selection and modulation was accomplished using the laptop to set the EUT into a continuous transmit pseudo-random data stream at the Low, Center and High channels. Once the channel was set, the laptop was removed from the setup.

Worst case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in Equation 1 to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where u_c = standard uncertainty
 a, b, c, \dots = individual uncertainty elements
 $Div_{a, b, c}$ = the individual uncertainty element divisor based on the probability distribution
 Divisor = 1.732 for rectangular distribution
 Divisor = 2 for normal distribution
 Divisor = 1.414 for trapezoid distribution

Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where U = expanded uncertainty
 k = coverage factor
 $k \leq 2$ for 95% coverage (ANSI/NCSL Z540-2 Annex G)
 u_c = standard uncertainty

Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

Table 2: Expanded Uncertainty List

Scope	Standard(s)	Expanded Uncertainty
Radiated Emissions	CISPR11, CISPR22, CISPR14, FCC Part 15	± 4.55 dB

3 Test Equipment

Table 3 lists the test equipment used for measurements along with the calibration information.

Table 3: Test Equipment List

Test Name: Conducted Emissions at Antenna Terminal		Test Date: 04/18/2013	
Asset #	Manufacturer/Model	Description	Cal. Due
528	AGILENT - E4446A	ANALYZER SPECTRUM	8/30/2013

Test Name: Radiated Emissions		Test Date: 04/18/2013	
Asset #	Manufacturer/Model	Description	Cal. Due
725	B-Z TECHNOLOGIES - BZP118UD1X2	1 - 18GHZ LOW NOISE AMP	1/28/2014
528	AGILENT - E4446A	ANALYZER SPECTRUM	8/30/2013
4	ARA - DRG-118/A	ANTENNA DRG 1-18GHZ	2/20/2015
802	HP - 8568B	SPECTRUM ANALYZER	4/27/2013
71	HP - 85685A	PRESELECTOR RF	6/27/2013
69	HP - 85650A	ADAPTER QP	6/27/2013
742	PENN ENGINEERING - WR284	2.2-4.15GHZ BANDPASS FILTER	5/29/2014
281	ITC - 21A-3A1	WAVEGUIDE 4.51-10.0GHZ	5/29/2014
382	SUNOL SCIENCES CORPORATION - JB1	ANTENNA BICONLOG	6/26/2014

4 Test Results

4.1 RF Power Output (FCC Part15.247 (b) & IC RSS-210 [A8.4 (1)])

To measure the output power the output from the transmitter was connected to the input of a spectrum analyzer. The original grant RF power levels and the original report filing levels are reported in the tables below along with the measured RF power levels.

This is applicable for the 902 – 928MHz band of this device.

Table 4: Part 15.247 RF Power Output Results

Grant listed as 0.955 Watts for 902 - 928MHz

Channel and/or Frequency	Peak Measured Level (dBm)	Peak Measured Level (Watts)	Original Grant Report Level (dBm)	Original Grant Report Level (Watts)	Limit (dBm)
Low Channel (902.5MHz)	28.78dBm	0.755	29.07dBm	0.807	30
Mid Channel (915.35MHz)	29.01dBm	0.796	29.07dBm	0.807	30
High Channel (927.35MHz)	29.42dBm	0.875	29.70dBm	0.933	30

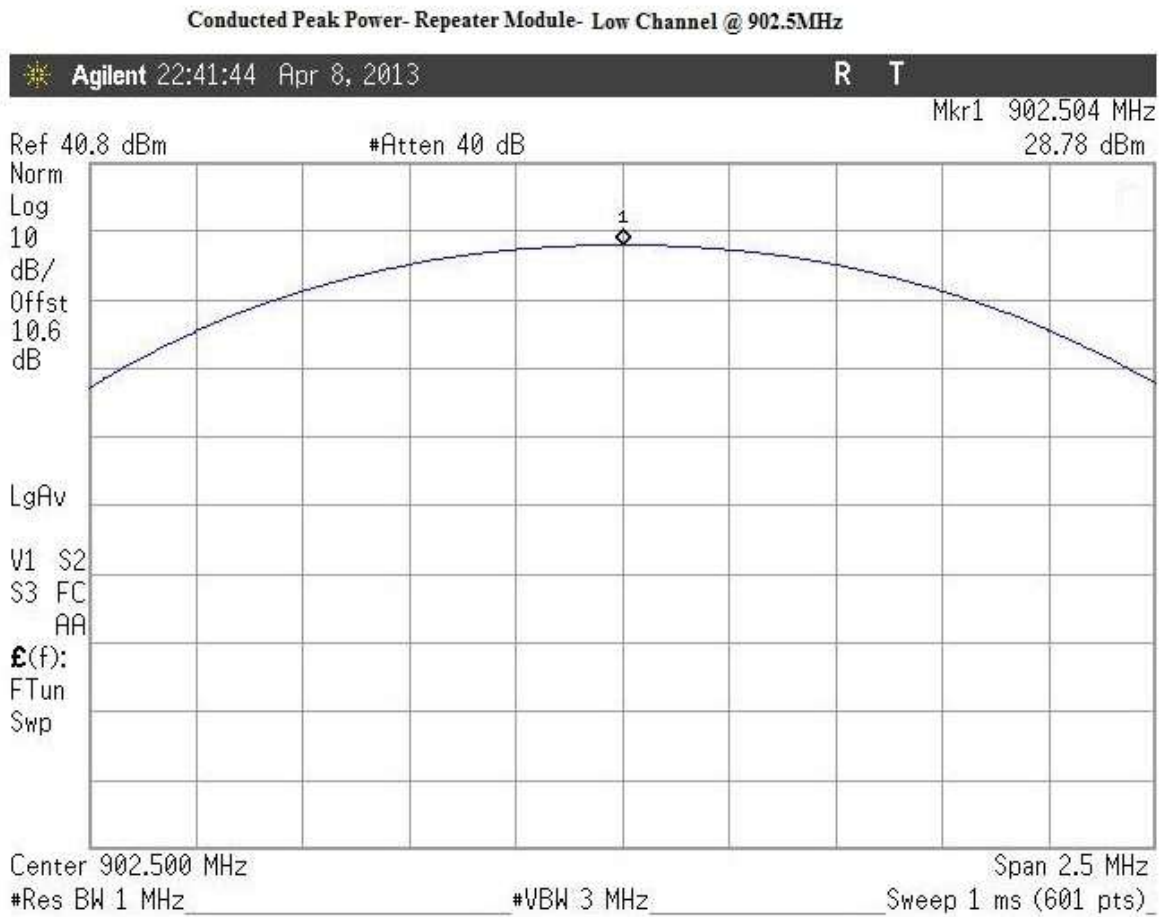


Figure 2: Conducted Peak Power, 902.5MHz

Conducted Peak Power- Repeater Module- Center Channel @ 915.35MHz

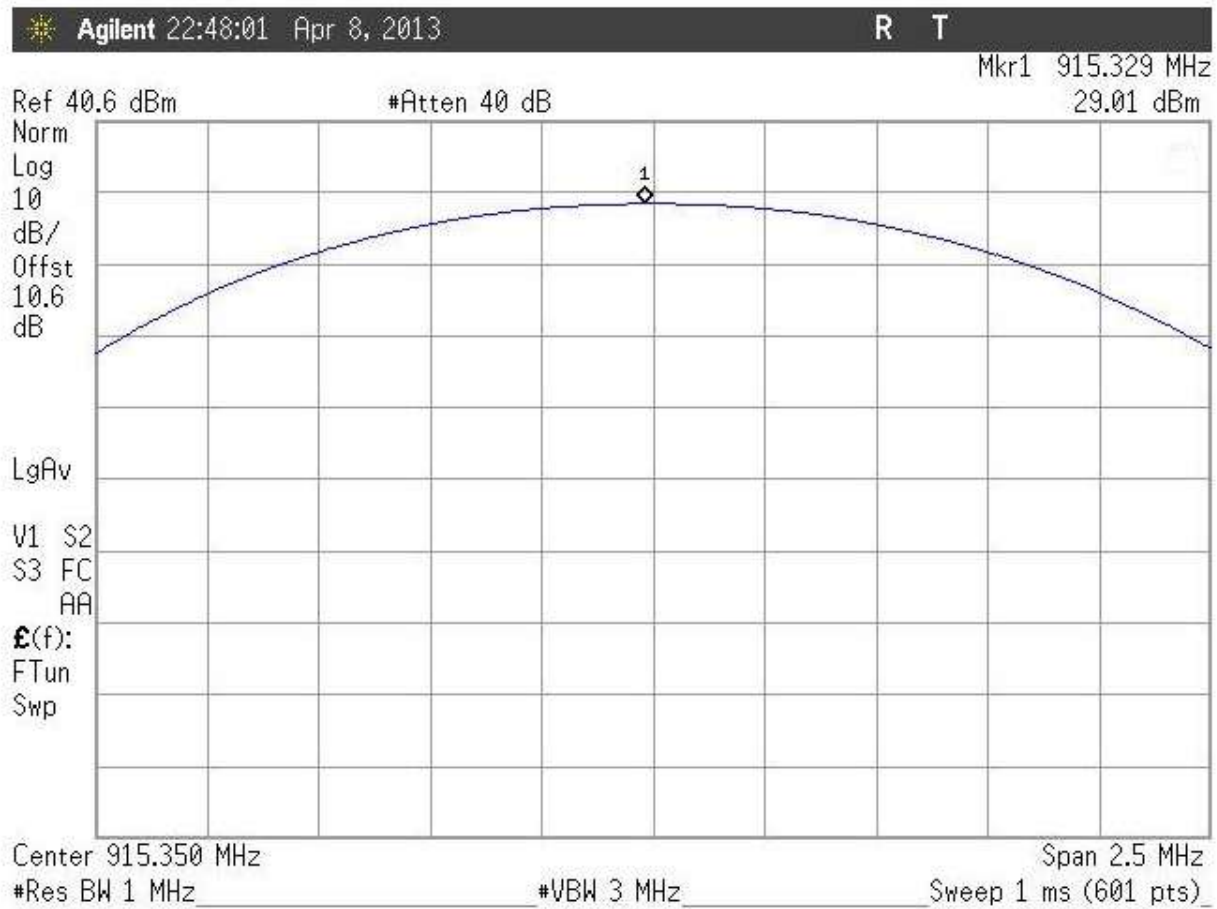


Figure 3: Conducted Peak Power, 915.35MHz

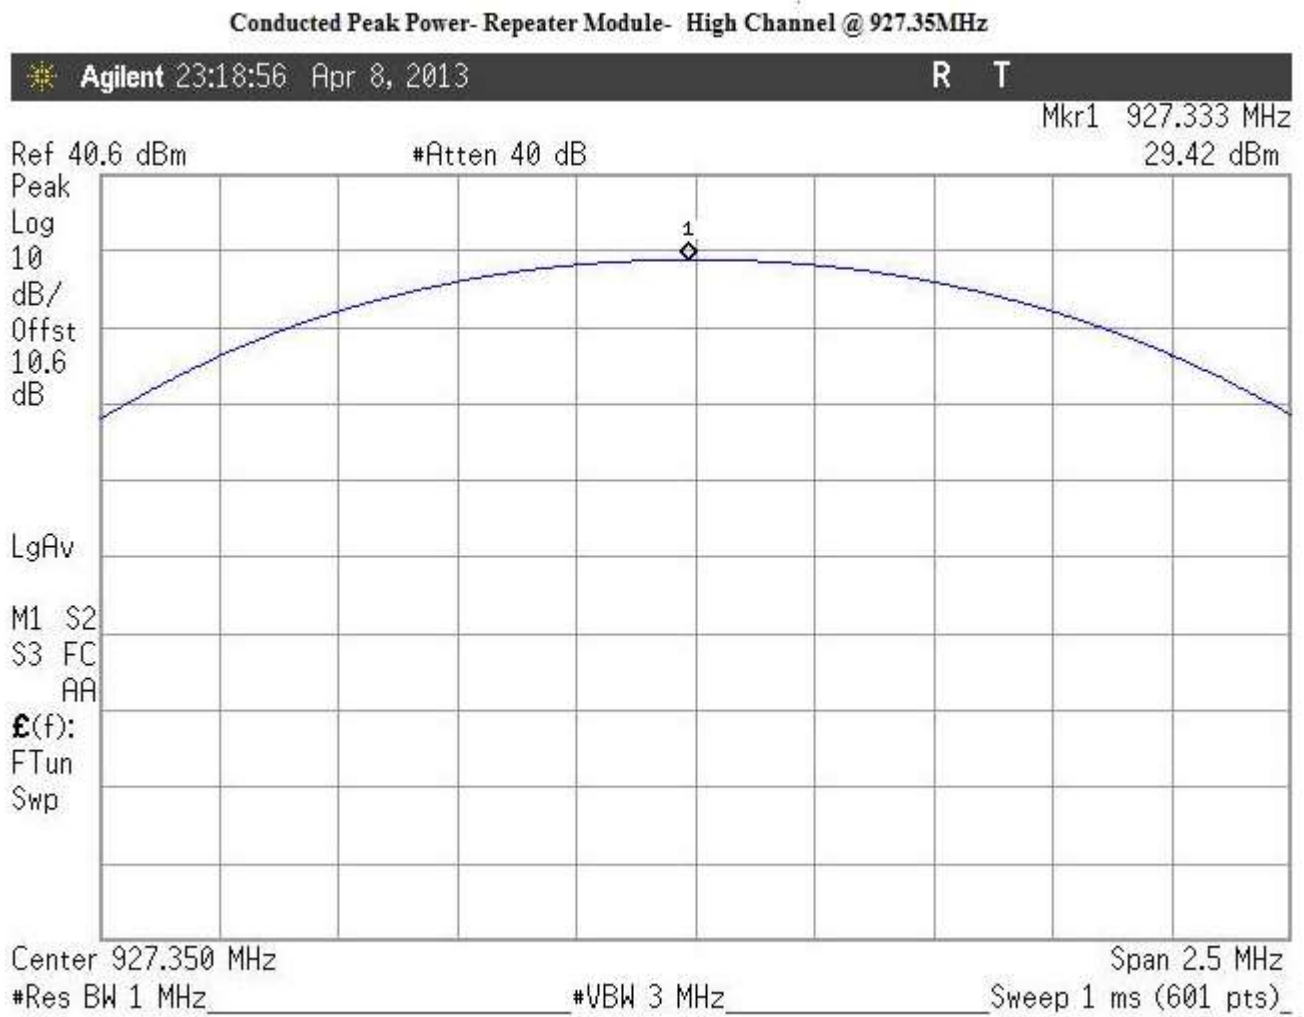


Figure 4: Conducted Peak Power, 927.35MHz

4.2 Radiated Spurious Emissions: (FCC Part §15.247 & IC RSS-210 Sect.2.2)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

4.2.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

Average readings were taken by optimizing the signal for maximum strength then setting the analyzer to 0-span linear mode. The video bandwidth was then reduced to 10Hz. The resulting reading was the converted mathematically back to a log scale (dBuV) and placed in the result spreadsheet SA reading column. All harmonics and spurious signals were continuous in nature.

3 Orthogonals of the EUT were scanned in the restricted bands up to the 10th harmonic with the worst case readings shown.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	10 Hz (Avg) 1MHz (Peak)

Table 5: Radiated Emission Test Data below 1GHz (Restricted Bands)

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
266.96	V	0.00	1.45	9.80	14.9	17.2	200.0	-21.3	Peak
168.14	V	90.00	1.00	6.90	12.5	9.3	150.0	-24.1	Peak
281.50	V	190.00	1.30	13.50	15.7	28.8	200.0	-16.8	Peak
266.96	H	3.40	3.40	7.80	12.5	10.3	200.0	-25.7	Peak
168.14	H	3.90	3.90	8.70	12.5	11.4	150.0	-22.3	Peak
281.50	H	3.50	3.50	12.10	15.7	24.5	200.0	-18.2	Peak

Frequencies Common to all TX channels

Table 6: Radiated Emission Test Data, 4dBi Antenna TX@ 902.5MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2707.50	V	0.00	2.53	44.89	-2.8	127.8	5000.0	-31.8	Peak
2707.50	V	0.00	2.53	40.41	-2.8	76.3	500.0	-16.3	Avg
3610.00	V	90.00	2.62	41.08	-1.1	99.6	5000.0	-34.0	Peak
3611.00	V	90.00	2.62	31.26	-1.1	32.2	500.0	-23.8	Avg
4512.50	V	190.00	2.38	39.96	0.9	110.7	5000.0	-33.1	Peak
4512.50	V	190.00	2.38	28.56	0.9	29.8	500.0	-24.5	Avg
5415.00	V	10.00	2.40	39.28	2.8	126.4	5000.0	-31.9	Peak
5415.00	V	10.00	2.40	29.50	2.8	41.0	500.0	-21.7	Avg
2707.50	H	120.00	1.90	45.92	-2.8	143.9	5000.0	-30.8	Peak
2707.50	H	120.00	1.90	41.06	-2.8	82.2	500.0	-15.7	Avg
3610.00	H	180.00	1.82	42.67	-1.1	119.6	5000.0	-32.4	Peak
3611.00	H	180.00	1.82	32.46	-1.1	36.9	500.0	-22.6	Avg
4512.50	H	290.00	2.46	39.94	0.9	110.4	5000.0	-33.1	Peak
4512.50	H	290.00	2.46	28.81	0.9	30.7	500.0	-24.2	Avg
5415.00	H	270.00	2.40	40.10	2.8	138.9	5000.0	-31.1	Peak
5415.00	H	270.00	2.40	30.10	2.8	43.9	500.0	-21.1	Avg

Table 7: Radiated Emission Test Data, 4dBi Antenna, TX@ 915.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2746.05	V	180.00	2.00	50.92	-2.8	255.1	5000.0	-25.8	Peak
2746.05	V	180.00	2.00	45.62	-2.8	138.6	500.0	-11.1	Avg
3661.40	V	270.00	1.74	42.47	-0.7	121.9	5000.0	-32.3	Peak
3661.40	V	270.00	1.74	32.85	-0.7	40.3	500.0	-21.9	Avg
4576.75	V	180.00	2.65	41.67	0.7	130.7	5000.0	-31.7	Peak
4576.75	V	180.00	2.65	33.07	0.7	48.5	500.0	-20.3	Avg
2746.05	H	290.00	2.44	48.74	-2.8	198.5	5000.0	-28.0	Peak
2746.05	H	290.00	2.44	44.61	-2.8	123.4	500.0	-12.2	Avg
3661.40	H	180.00	2.47	40.83	-0.7	100.9	5000.0	-33.9	Peak
3661.40	H	180.00	2.47	29.44	-0.7	27.2	500.0	-25.3	Avg
4576.75	H	320.00	2.30	40.07	0.7	108.7	5000.0	-33.3	Peak
4576.75	H	320.00	2.30	30.38	0.7	35.6	500.0	-22.9	Avg

Table 8: Radiated Emission Test Data, 4dBi Antenna, TX@ 927.35MHz

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
2782.00	V	0.00	2.72	49.35	-2.8	212.3	5000.0	-27.4	Peak
2782.00	V	0.00	2.72	46.43	-2.8	151.7	500.0	-10.4	Avg
3709.40	V	0.00	2.80	40.65	-0.4	102.9	5000.0	-33.7	Peak
3709.40	V	0.00	2.80	31.35	-0.4	35.3	500.0	-23.0	Avg
4636.75	V	180.00	2.26	42.35	0.7	141.3	5000.0	-31.0	Peak
4636.75	V	180.00	2.26	34.28	0.7	55.8	500.0	-19.0	Avg
7418.80	V	190.00	2.00	42.63	9.1	387.1	5000.0	-22.2	Peak
7418.80	V	190.00	2.00	33.99	9.1	143.2	500.0	-10.9	Avg
2782.00	H	120.00	2.06	50.53	-2.8	243.2	5000.0	-26.3	Peak
2782.00	H	120.00	2.06	48.50	-2.8	192.5	500.0	-8.3	Avg
3709.40	H	0.00	2.17	43.94	-0.4	150.2	5000.0	-30.4	Peak
3709.40	H	0.00	2.17	32.96	-0.4	42.4	500.0	-21.4	Avg
4636.75	H	190.00	2.13	41.58	0.7	129.3	5000.0	-31.7	Peak
4636.75	H	190.00	2.13	32.12	0.7	43.5	500.0	-21.2	Avg
7418.80	H	90.00	2.33	42.15	9.1	366.3	5000.0	-22.7	Peak
7418.80	H	90.00	2.33	30.59	9.1	96.8	500.0	-14.3	Avg

4.3 Receiver Radiated Emissions (FCC 15.209 & IC RSS-210 sect 2.5)

4.3.1 Requirements

Test Arrangement: Table Top

RSS210 Compliance Limits for Receivers	
Frequency	Limits
30-88 MHz	100 μ V/m
88-216 MHz	150 μ V/m
216-960 MHz	200 μ V/m
>960MHz	500 μ V/m

4.3.2 Test Procedure

The requirements of call for the EUT to be placed on an 80 cm high 1 X 1.5 meters non-conductive motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Bi-conical log (hybrid) broadband antenna was mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The output of the antenna was connected to the input of the spectrum analyzer and the emissions in the frequency range of 30 MHz to 3 GHz were measured. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The output from the antenna was connected, via a preamplifier, to the input of the spectrum analyzer. The detector function was set to quasi-peak, peak, or average as appropriate. The measurement bandwidth of the spectrum analyzer system was set to at least 120 kHz, with all post-detector filtering no less than 10 times the measurement bandwidth.

All measurements above 1GHz were made at a distance of 3m with a Resolution Bandwidth of 1MHz and a Video bandwidth of 10Hz.

4.3.3 Test Data

The EUT complied with the Receiver Radiated Emissions requirements. Table 9 provides the test results for radiated emissions.

4.3.4 Radiated Data Reduction and Reporting

To convert the raw spectrum analyzer radiated data into a form that can be compared with the FCC limits, it is necessary to account for various calibration factors that are supplied with the antennas and

other measurement accessories. These factors are included into the antenna factor (AF) column of the table and in the cable factor (CF) column of the table. The AF (in dB/m) and the CF (in dB) is algebraically added to the raw Spectrum Analyzer Voltage in dBμV to obtain the Radiated Electric Field in dBμV/m. This logarithmic amplitude is converted to linear amplitude, and then compared to the Industry Canada limit.

Example:

Spectrum Analyzer Voltage: VdBμV

Antenna Correction Factor: AFdB/m

Cable Correction Factor: CFdB

Electric Field: EdBV/m = V dBμV + AFdB/m + CFdB

To convert to linear units of measure: EdBV/m/20 Inv log

Table 9: Receiver Radiated Emission Test Data

Frequency (MHz)	Polarity H/V	Azimuth (Degree)	Ant. Height (m)	SA Level (dBuV)	Corr Factors (dB)	Corr. Level (uV/m)	Limit (uV/m)	Margin (dB)	Comments
266.96	V	0.00	1.45	9.80	14.9	17.2	200.0	-21.3	Peak
168.14	V	90.00	1.00	6.90	12.5	9.3	150.0	-24.1	Peak
281.50	V	190.00	1.30	12.00	15.7	24.2	200.0	-18.3	Peak
45.17	V	190.00	1.00	21.10	7.5	26.9	100.0	-11.4	Peak
51.33	V	200.00	1.00	19.80	8.1	24.9	100.0	-12.1	Peak
74.92	V	180.00	1.00	11.60	8.1	9.7	100.0	-20.3	Peak
117.86	V	190.00	1.00	9.80	14.2	15.9	150.0	-19.5	Peak
457.69	V	200.00	1.60	6.10	19.8	19.7	200.0	-20.1	Peak
810.22	V	0.00	2.70	6.50	26.5	44.7	200.0	-13.0	Peak
898.38	V	90.00	2.70	9.20	28.3	75.2	200.0	-8.5	Peak
266.96	H	0.00	3.40	7.80	14.9	13.7	200.0	-23.3	Peak
168.14	H	0.00	3.90	8.70	12.5	11.4	150.0	-22.3	Peak
281.50	H	200.00	3.50	8.30	15.7	15.8	200.0	-22.0	Peak
45.17	H	180.00	4.00	16.10	10.3	20.9	100.0	-13.6	Peak
51.33	H	220.00	4.00	18.30	7.5	19.5	100.0	-14.2	Peak
117.86	H	190.00	3.80	9.00	14.2	14.5	150.0	-20.3	Peak
457.69	H	200.00	1.90	5.10	19.8	17.6	200.0	-21.1	Peak
810.22	H	180.00	2.30	8.40	26.5	55.6	200.0	-11.1	Peak
898.38	H	180.00	2.30	10.10	28.3	83.4	200.0	-7.6	Peak

Note: No emissions were noted above 1GHz