

FCC RADIO TEST REPORT

FCC ID: SMC-H70

Product : JMGO Smart Projector

Trade Mark : N/A

Model Name : N7

Serial Model : N7S, N7C, N7 PRO

Report No. : SER180428004004E

Prepared for

SHENZHEN HOLATEK CO.,LTD.
Rm.1001,Unit 4,Bld.B,Kexing Science Park,Keyuan Road,
Nashan District, Shenzhen,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>



TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN HOLATEK CO.,LTD.
Address : Rm.1001,Unit 4,Bld.B,Kexing Science Park,Keyuan Road,
 Nashan District, Shenzhen,China
Manufacturer's Name : SHENZHEN HOLATEK CO.,LTD.
Address : Rm.1001,Unit 4,Bld.B,Kexing Science Park,Keyuan Road,
 Nashan District, Shenzhen,China

Product description

Product name..... : JMGO Smart Projector
Model and/or type reference : N7
Serial Model : N7S, N7C, N7 PRO

Standards : FCC Part15.407

Test procedure..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test
 Procedures New Rules v01r01
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01
 FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test.....
Date (s) of performance of tests..... 28 Apr. 2018 ~25 Jun. 2018
Date of Issue..... 25 Jun. 2018
Test Result..... **Pass**

Testing Engineer : Loren Luo
 (Loren Luo)

Technical Manager : Jason Chen
 (Jason Chen)

Authorized Signatory : Sam Chen
 (Sam Chen)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	12
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	14
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
3 . EMC EMISSION TEST	17
3.1 CONDUCTED EMISSION MEASUREMENT	17
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	17
3.1.2 TEST PROCEDURE	18
3.1.3 DEVIATION FROM TEST STANDARD	18
3.1.4 TEST SETUP	18
3.1.5 EUT OPERATING CONDITIONS	18
3.2 RADIATED EMISSION MEASUREMENT	23
3.2.1 APPLICABLE STANDARD	23
3.2.2 CONFORMANCE LIMIT	23
3.2.3 MEASURING INSTRUMENTS	23
3.2.4 TEST CONFIGURATION	24
3.2.5 TEST PROCEDURE	25
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	26
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	27
3.2.8 TEST RESULTS (1GHZ-26GHZ)	31
3.2.9 TEST RESULTS (26GHZ-40GHZ)	33
4 . POWER SPECTRAL DENSITY TEST	37
4.1 APPLIED PROCEDURES / LIMIT	37
4.2 TEST PROCEDURE	38
4.3 DEVIATION FROM STANDARD	38
4.4 TEST SETUP	38
4.5 EUT OPERATION CONDITIONS	38
4.6 TEST RESULTS	39
5 . 26DB & 99% EMISSION BANDWIDTH	48
5.1 APPLIED PROCEDURES / LIMIT	48
5.2 TEST PROCEDURE	48
5.3 EUT OPERATION CONDITIONS	49
5.4 TEST RESULTS	50

Table of Contents

	Page
6 . MINIMUM 6 DB BANDWIDTH	58
6.1 APPLIED PROCEDURES / LIMIT	58
6.2 TEST PROCEDURE	58
6.3 DEVIATION FROM STANDARD	58
6.4 TEST SETUP	58
6.5 EUT OPERATION CONDITIONS	58
6.6 TEST RESULTS	59
7 . MAXIMUM CONDUCTED OUTPUT POWER	67
7.1 PPLIED PROCEDURES / LIMIT	67
7.2 TEST PROCEDURE	67
7.3 DEVIATION FROM STANDARD	69
7.4 TEST SETUP	69
7.5 EUT OPERATION CONDITIONS	69
7.6 TEST RESULTS	70
8 . OUT OF BAND EMISSIONS	72
8.1 APPLICABLE STANDARD	72
8.2 TEST PROCEDURE	72
8.3 DEVIATION FROM STANDARD	72
8.4 TEST SETUP	72
8.5 EUT OPERATION CONDITIONS	72
8.6 TEST RESULTS	73
9.SPURIOUS RF CONDUCTED EMISSIONS	80
9.1CONFORMANCE LIMIT	80
9.2MEASURING INSTRUMENTS	80
9.3TEST SETUP	80
9.4TEST PROCEDURE	80
9.5TEST RESULTS	80
10. FREQUENCY STABILITY MEASUREMENT	95
10.1 LIMIT	95
10.2 TEST PROCEDURES	95
10.3 TEST SETUP LAYOUT	95
10.4 EUT OPERATION DURING TEST	95
10.5 TEST RESULTS	96
11. ANTENNA REQUIREMENT	102
11.1 STANDARD REQUIREMENT	102
11.2 EUT ANTENNA	102



Revision History

Report No.	Version	Description	Issued Date
SER180428004004E	Rev.01	Initial issue of report	Jun 25, 2018

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	(Outsourcing)
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Outsourcing: The 26G-40G Spurious Radiated Emissions in this test were outsourced to the Shenzhen Academy of Metrology & Quality Inspection

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A-1.

FCC- Accredited : Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.80\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(30MHz~1GHz)	$\pm 2.64\text{dB}$
5	All emissions, radiated(1GHz~6GHz)	$\pm 2.40\text{dB}$
6	All emissions, radiated(> 6GHz)	$\pm 2.52\text{dB}$
7	Temperature	$\pm 0.5^\circ\text{C}$
8	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	JMGO Smart Projector	
Trade Mark	N/A	
Model Name	N7	
Serial Model	N7S, N7C, N7 PRO	
Model Difference	Different types of sales channels with different requirements, the circuit and RF module are the same.	
FCC ID	SMC-H70	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/ac(40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11 a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS15; 802.11n(HT40):MCS0-MCS15; 802.11ac: NSS1,MCS0-MCS9,NSS2,MCS0-MCS9;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	Antenna A/B: FPCB Antenna
	Smart system	<input checked="" type="checkbox"/> SISO for 802.11a <input checked="" type="checkbox"/> MIMO for 802.11n/ac
	Antenna Gain	See Table for Filed Antenna
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Ratings	DC 19V from Adapter	
Adapter	Model:GQ150-1900780-E1 Input: 100-240V~50/60Hz 2.0A Max Output: 19V---7.8A	
Battery	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	H53S_MB_VerC_170808	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n(20MHz) band I (5180-5240MHz):

802.11a/n/ac (20MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band I (5190-5230MHz):

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

Frequency and Channel list for 802.11a/n(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)	Channel	Frequen cy (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

The EUT has two types of antenna.

Antenna	Brand	Model Name (P/N)	Antenna Type	Connector	Antenna Gain(dBi)	
					5.2G	5.8G
A(main)	N/A	N/A	FPCB	I-PEX	3	3
B(aux)	N/A	N/A	FPCB	I-PEX	3	3

Note: The EUT has two types of antenna.

Only the highest antenna gain for each type has been recorded in this test report, please refer to antenna list for more antenna information.

5G Band:

For IEEE 802.11a mode (1TX, 2RX):

The EUT can support both 1TX and 2RX functions.

For 1TX

Only Chain 1 can be used as transmitting antenna.

Chain 1 and Chain 2 could receive simultaneously.

For IEEE 802.11n mode (1TX/2TX, 2RX):

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Chain 1 can be used as transmitting antenna.

Chain 1 and Chain 2 could receive simultaneously.

For 2TX

Chain 1 and Chain 2 could both transmit/receive simultaneously.

Only 2TX function was selected to test and record in the report, the 1TX test results were covered by 2TX Test results.

For IEEE 802.11ac mode (1TX/2TX, 2RX):

The EUT can support both 1TX and 2TX functions.

For 1TX

Only Chain 1 can be used as transmitting antenna.

Chain 1 and Chain 2 could receive simultaneously.


For 2TX

Both Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could both transmit/receive simultaneously.

Only 2TX function was selected to test and record in the report, the 1TX test results were covered by 2TX Test results.

Chain 1 (Connect to Ant A for WLAN 5G) Chain 2 (Connect to Ant B for WLAN 5G)

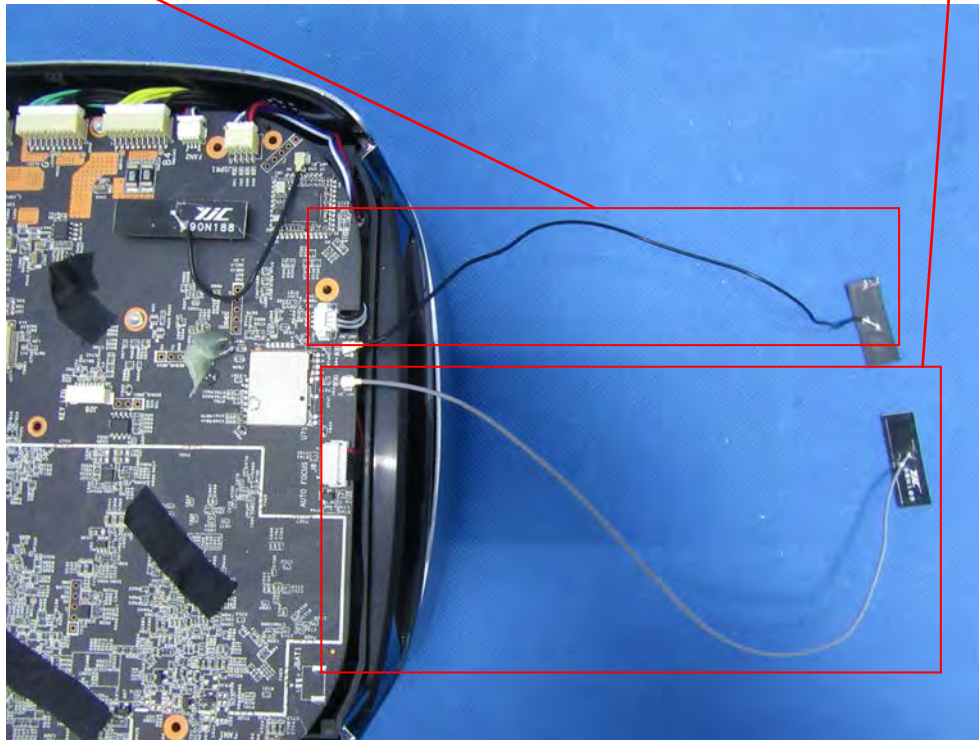

The Control software(rf test tool.exe) can control Model antenna A B,
 For 5GHz mode,antenna A B are transmitting, May antennas simultaneously transmit.
 And the data is recorded for radiated emission, and band edge.
 For MIMO mode, Directional gain= $[10\log(GA+ G B)]$ dbi =6.01dbi in 5.2GHz
 Directional gain= $[10\log(GA+ G B)]$ dbi =6.01dbi in 5.8GHz
 802.11n/ac 5GHz has MIMO mode.

Note: GA means antenna gain for ANT A in Num.
 GB means antenna gain for ANT B in Num.

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac 20 CH36/ CH40/ CH 48 802.11a /n/ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ac40 CH38/ CH 46 802.11n/ac40 CH 151 / CH 159
Mode 4	802.11ac80 CH 42/CH 155


For Radiated Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a/n/ac 20 CH36/ CH40/ CH 48 802.11a /n/ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ac40 CH38/ CH 46 802.11n/ac40 CH 151 / CH 159
Mode 4	802.11 ac80 CH 42/CH 155

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode



Radiated Spurious Emission Test



For Conducted Test Cases

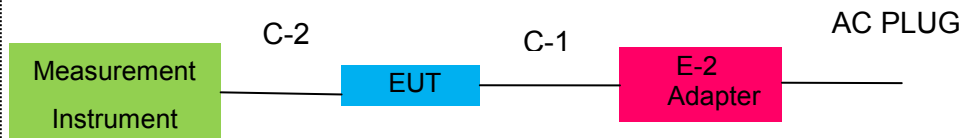

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	JMGO Smart Projector	N/A	N7	N/A	EUT
E-2	Adapter	N/A	GQ150-1900780-E1	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	Power Cable	NO	NO	1.2m	
C-2	RF Cable	NO	NO	0.5m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation & Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2017.06.06	2018.06.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2017.10.26	2018.10.25	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.06.06	2018.06.05	1 year
4	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2018.04.08	2019.04.07	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2018.04.08	2019.04.07	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year
9	Amplifier	EMC	EMC051835SE	980246	2017.08.09	2018.08.08	1 year
10	Amplifier	MITEQ	TTA1840-35-HG	177156	2017.06.06	2018.06.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year
12	Power Meter	DARE	RPR3006W	15100041SN084	2017.08.07	2018.08.06	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
17	Filter	TRILTHIC	2400MHz	29	2018.03.29	2019.03.28	1 year
18	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2018.04.18	2019.04.19	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2017.06.06	2018.06.05	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2017.06.06	2018.06.05	1 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Conducted Emission Limit		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	56.00	46.00	FCC/ RSS-247
5.0 -30.0	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

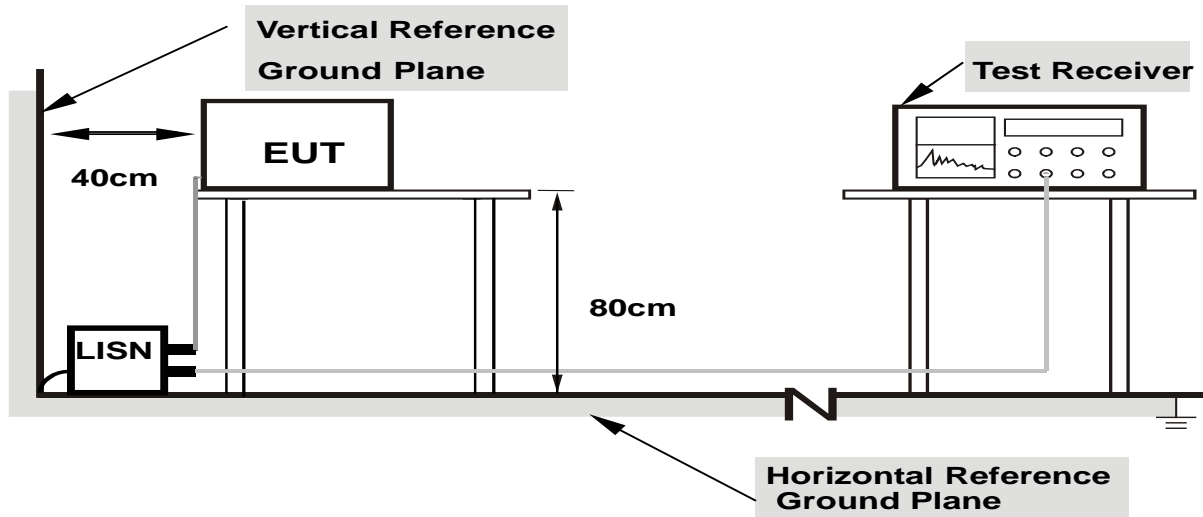

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 19V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	55.31	9.82	65.13	65.78	-0.65	QP
0.1539	39.67	9.82	49.49	55.78	-6.29	AVG
0.2460	47.54	9.82	57.36	61.89	-4.53	QP
0.2540	40.44	9.82	50.26	51.62	-1.36	AVG
0.3540	29.06	9.83	38.89	48.87	-9.98	AVG
0.3580	41.22	9.83	51.05	58.77	-7.72	QP
0.4220	35.94	9.83	45.77	57.41	-11.64	QP
0.4260	28.52	9.83	38.35	47.33	-8.98	AVG
0.7660	19.17	9.85	29.02	46.00	-16.98	AVG
0.7740	32.60	9.85	42.45	56.00	-13.55	QP
3.1940	20.78	10.05	30.83	46.00	-15.17	AVG
3.2860	32.84	10.05	42.89	56.00	-13.11	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

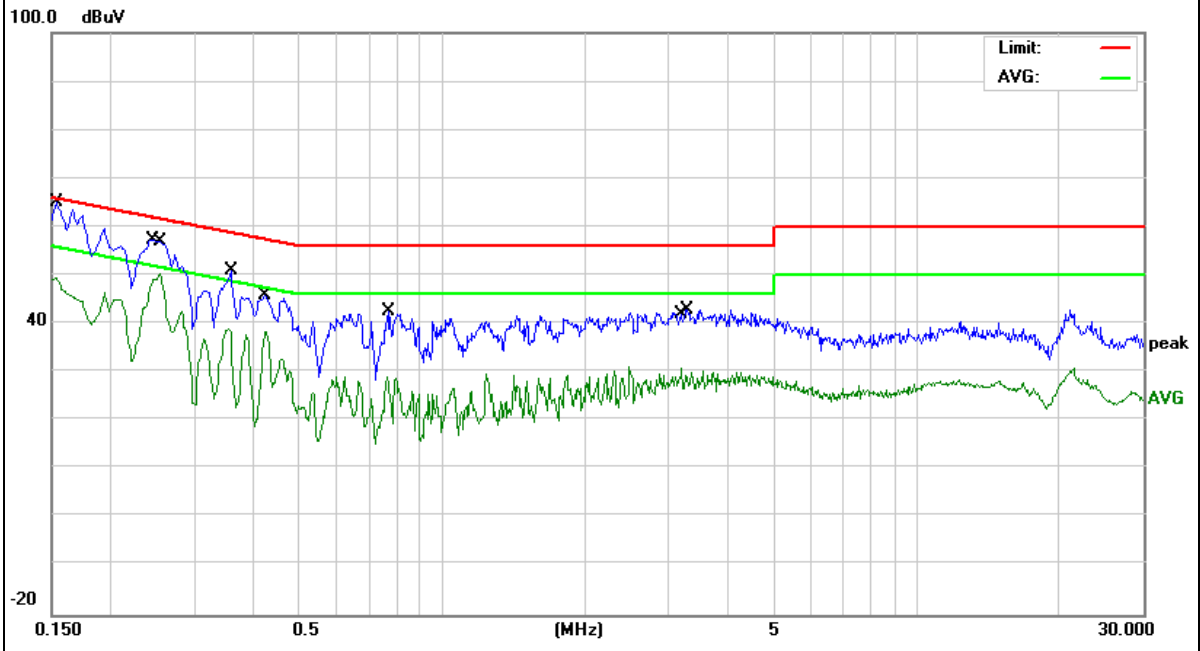


EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 19V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	53.40	9.92	63.32	65.78	-2.46	QP
0.1539	40.75	9.92	50.67	55.78	-5.11	AVG
0.2500	47.50	9.92	57.42	61.75	-4.33	QP
0.2540	40.65	9.92	50.57	51.62	-1.05	AVG
0.3500	29.74	9.92	39.66	48.96	-9.30	AVG
0.3540	42.34	9.93	52.27	58.87	-6.60	QP
0.5780	32.79	9.93	42.72	56.00	-13.28	QP
0.5820	17.81	9.93	27.74	46.00	-18.26	AVG
0.7620	15.92	9.93	25.85	46.00	-20.15	AVG
0.7660	30.81	9.93	40.74	56.00	-15.26	QP
21.2260	34.40	10.28	44.68	60.00	-15.32	QP
21.2260	23.34	10.28	33.62	50.00	-16.38	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

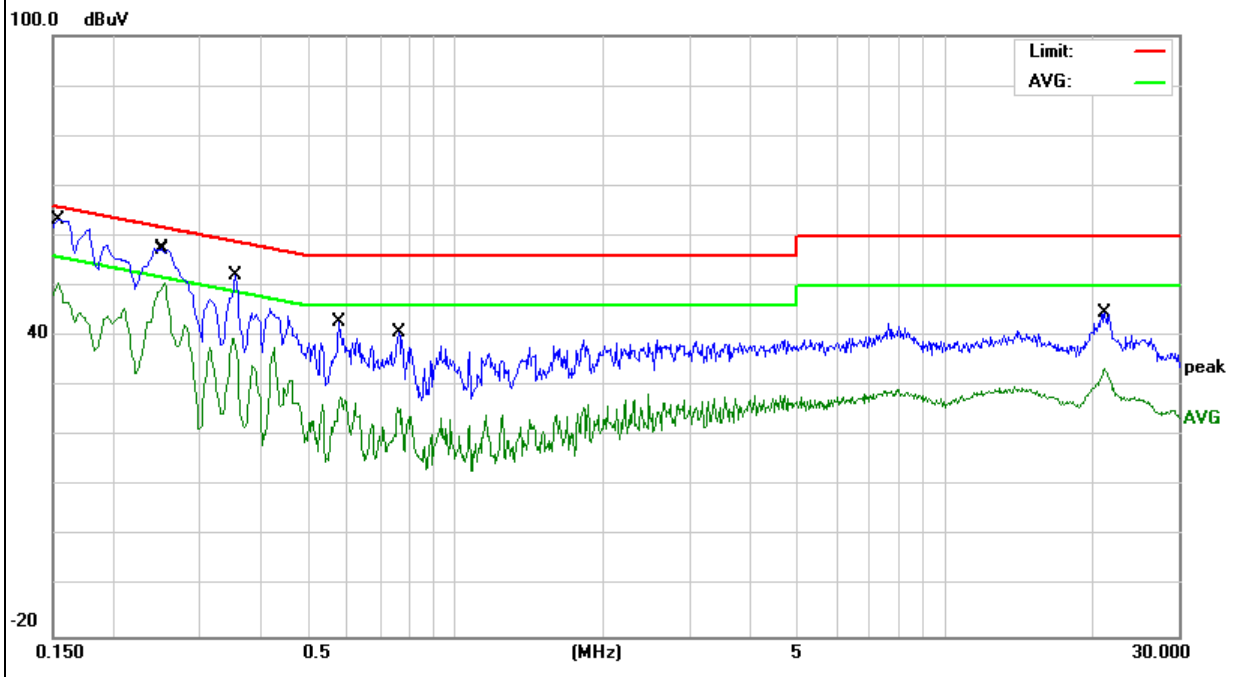


EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 19V from Adapter AC 240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1739	53.26	9.82	63.08	64.77	-1.69	QP
0.1739	39.22	9.82	49.04	54.77	-5.73	AVG
0.2459	49.28	9.82	59.10	61.89	-2.79	QP
0.2540	40.51	9.82	50.33	51.62	-1.29	AVG
0.3539	41.77	9.83	51.60	58.87	-7.27	QP
0.3659	30.58	9.83	40.41	48.59	-8.18	AVG
0.4219	27.28	9.83	37.11	47.41	-10.30	AVG
0.4299	39.02	9.83	48.85	57.25	-8.40	QP
0.7219	36.22	9.84	46.06	56.00	-9.94	QP
0.7378	20.23	9.84	30.07	46.00	-15.93	AVG
2.6859	34.00	9.98	43.98	56.00	-12.02	QP
2.7099	18.99	9.98	28.97	46.00	-17.03	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

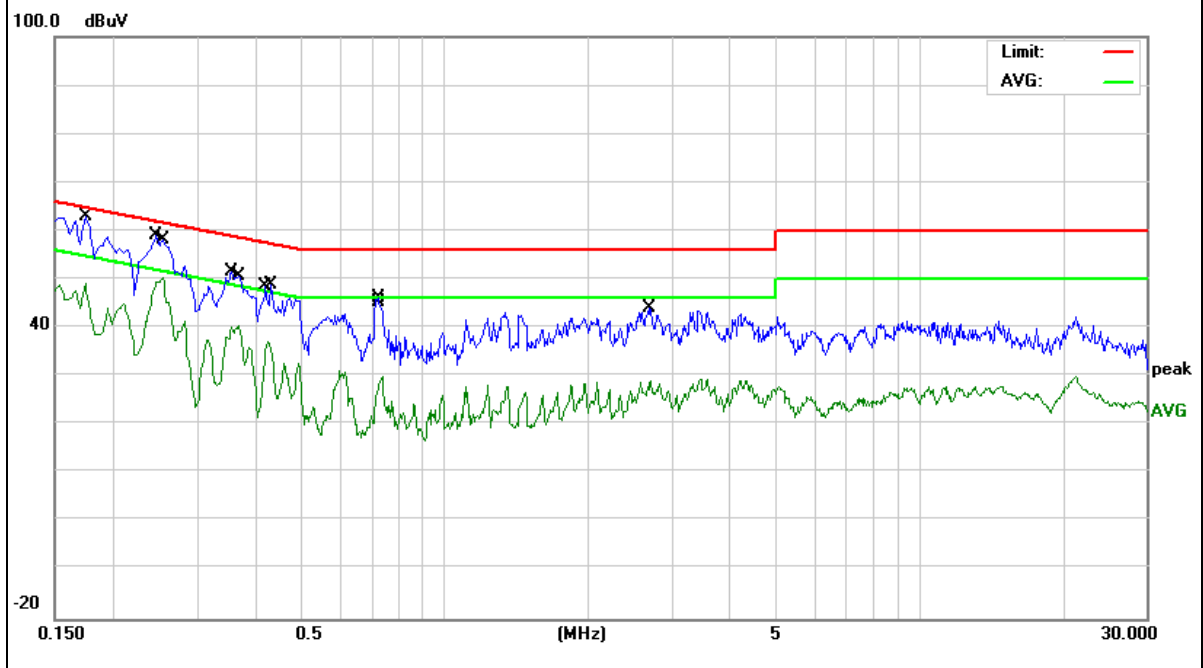


EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 19V from Adapter AC 240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1539	56.81	9.92	66.73	65.78	0.95	QP
0.1539	39.85	9.92	49.77	55.78	-6.01	AVG
0.2500	49.05	9.92	58.97	61.75	-2.78	QP
0.2540	40.66	9.92	50.58	51.62	-1.04	AVG
0.3459	29.60	9.92	39.52	49.06	-9.54	AVG
0.3579	42.41	9.93	52.34	58.78	-6.44	QP
0.4580	22.32	9.93	32.25	46.73	-14.48	AVG
0.4620	37.47	9.93	47.40	56.66	-9.26	QP
0.7179	32.04	9.93	41.97	56.00	-14.03	QP
0.7339	14.08	9.93	24.01	46.00	-21.99	AVG
21.1739	34.94	10.28	45.22	60.00	-14.78	QP
21.1739	22.50	10.28	32.78	50.00	-17.22	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

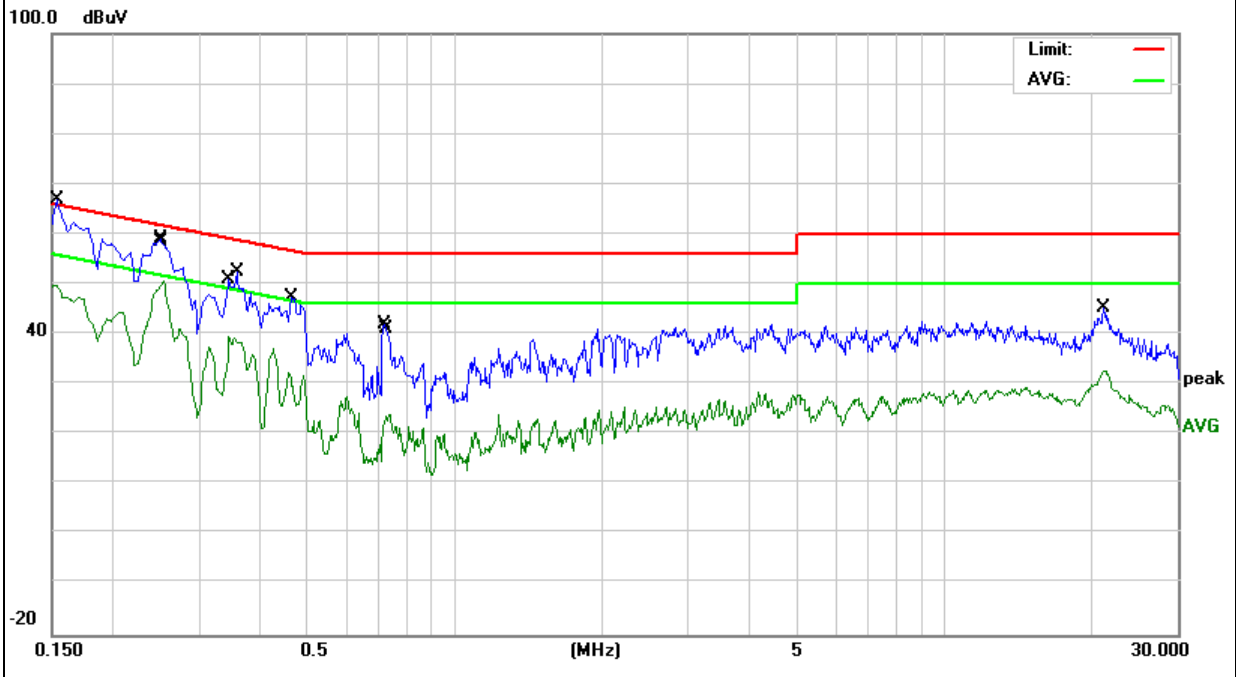

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark : 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

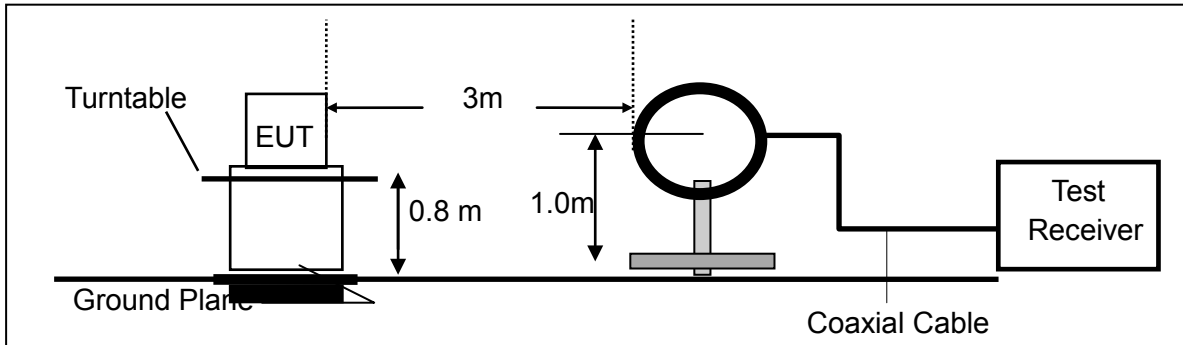

(b) For radiated emissions from 30MHz to 1000MHz

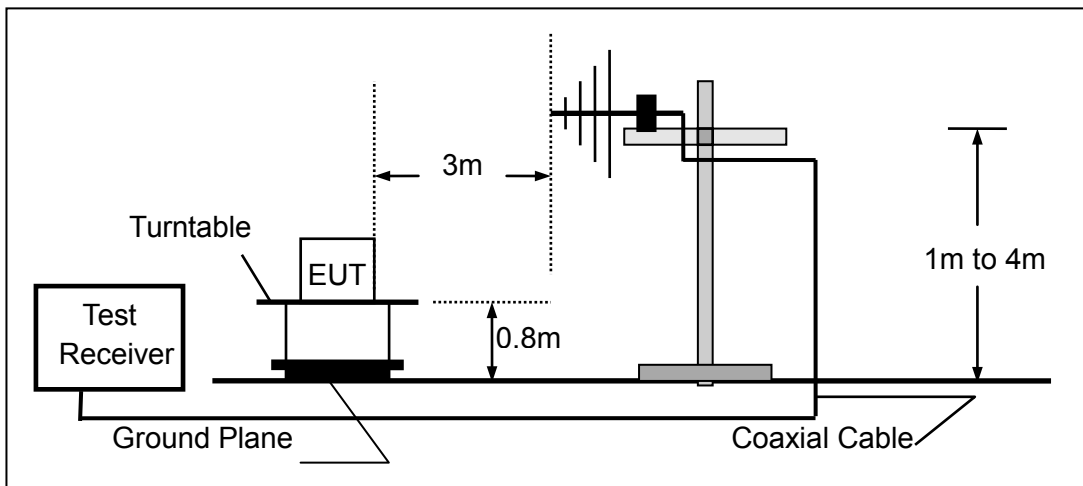

(c) For radiated emissions above 1000MHz

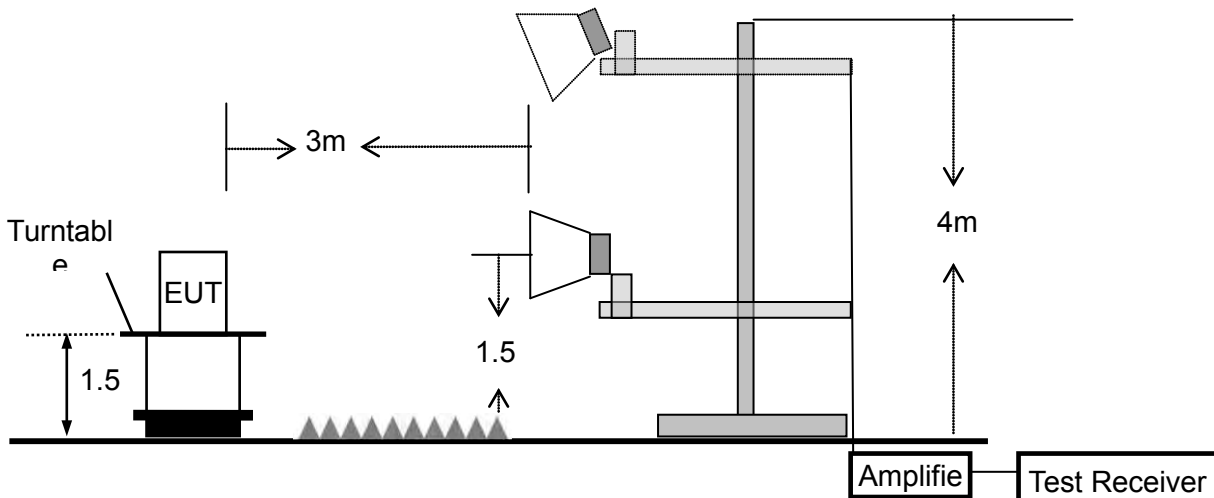

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT:	JMGO Smart Projector	Model Name. :	N7
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX(5.2G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	32.1794	12.45	20.26	32.71	40.00	-7.29	QP
V	44.7433	21.68	13.89	35.57	40.00	-4.43	QP
V	48.1625	21.25	13.38	34.63	40.00	-5.37	QP
V	58.8185	24.09	11.60	35.69	40.00	-4.31	QP
V	75.1821	20.05	11.22	31.27	40.00	-8.73	QP
V	599.3211	18.36	18.69	37.05	46.00	-8.95	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

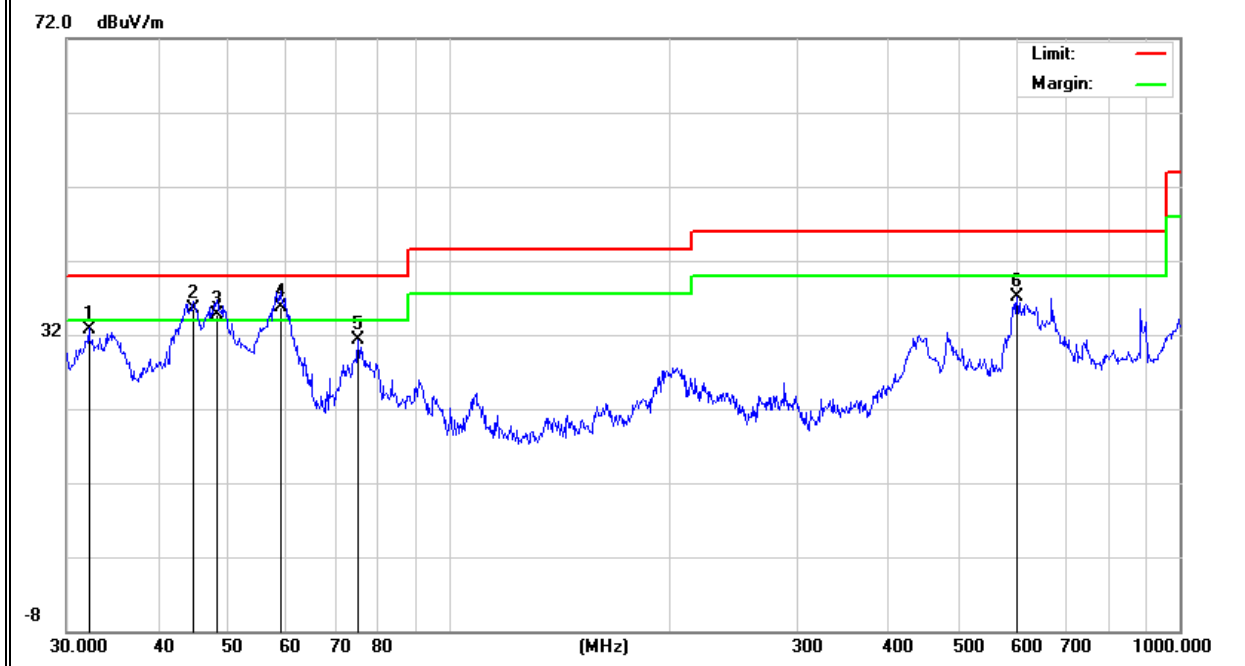

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	52.2079	16.59	13.16	29.75	40.00	-10.25	QP
H	58.8185	18.03	11.60	29.63	40.00	-10.37	QP
H	197.8925	21.88	13.75	35.63	43.50	-7.87	QP
H	287.9904	18.50	14.05	32.55	46.00	-13.45	QP
H	625.0778	16.45	20.09	36.54	46.00	-9.46	QP
H	884.5027	12.54	25.29	37.83	46.00	-8.17	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

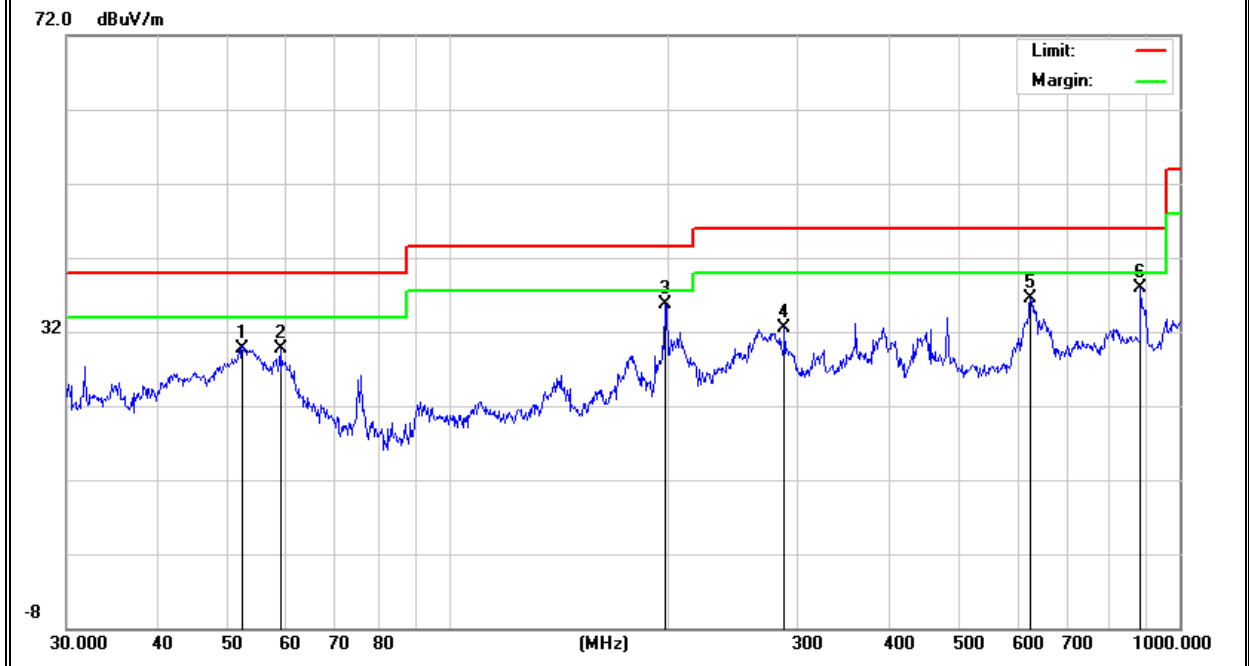


EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX(5.8G)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	35.6240	16.32	18.63	34.95	40.00	-5.05	QP
V	44.1200	20.88	14.30	35.18	40.00	-4.82	QP
V	58.6126	23.29	11.61	34.90	40.00	-5.10	QP
V	75.9770	22.29	11.56	33.85	40.00	-6.15	QP
V	185.7880	17.93	12.70	30.63	43.50	-12.87	QP
V	636.1340	16.03	19.83	35.86	46.00	-10.14	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

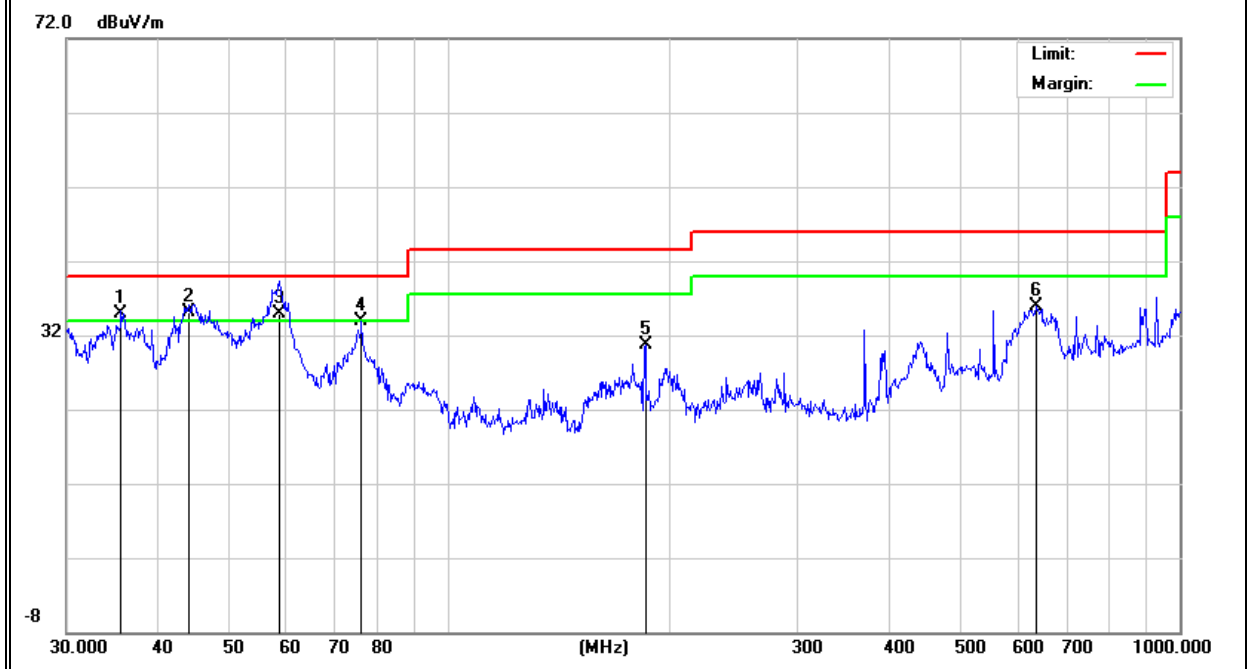

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	30.2108	9.56	21.11	30.67	40.00	-9.33	QP
H	57.7961	21.08	11.72	32.80	40.00	-7.20	QP
H	75.9770	20.24	11.56	31.80	40.00	-8.20	QP
H	278.0668	23.31	14.05	37.36	46.00	-8.64	QP
H	556.7744	18.14	18.61	36.75	46.00	-9.25	QP
H	929.0081	12.88	25.76	38.64	46.00	-7.36	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

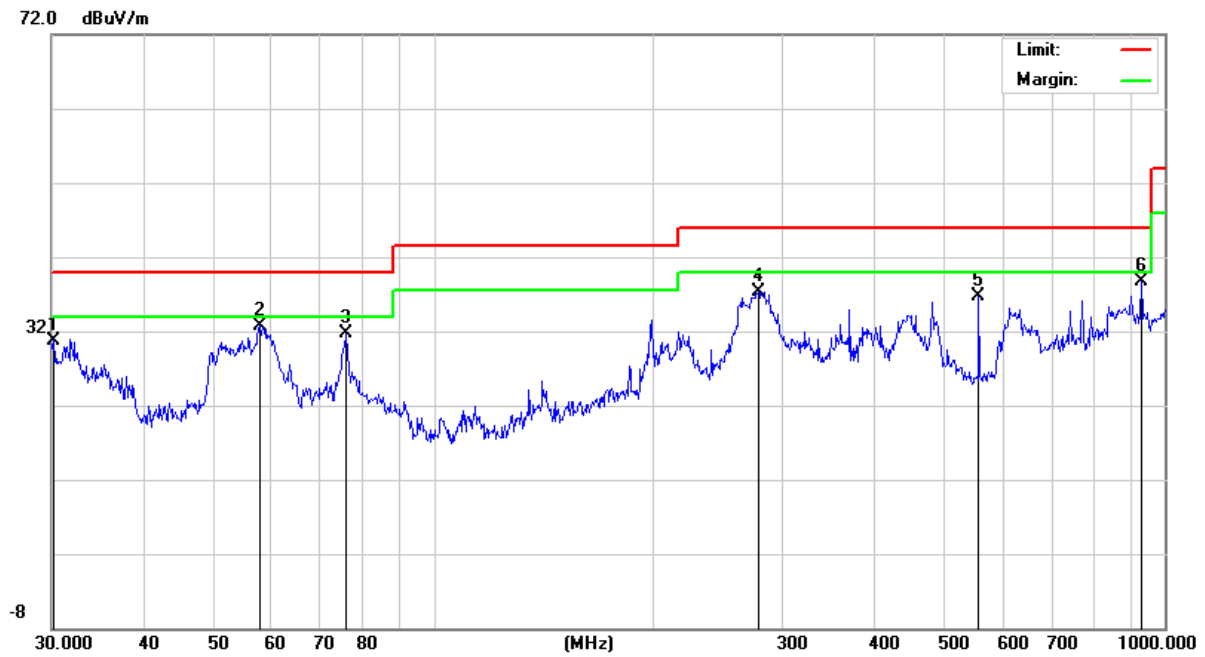

3.2.8 TEST RESULTS (1GHz-26GHz)

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX(5.2G)		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4435.265	61.39	5.94	35.40	44.00	58.73	74.00	-15.27	Pk
Vertical	4434.265	42.15	5.94	35.40	44.00	39.49	54.00	-14.51	AV
Vertical	10370.254	63.33	8.46	39.75	44.50	67.04	74.00	-6.96	Pk
Vertical	10370.254	41.65	8.46	39.75	44.50	45.36	54.00	-8.64	AV
Vertical	15540.651	60.29	10.12	38.80	44.10	65.11	74.00	-8.89	Pk
Vertical	15540.651	38.51	10.12	38.80	42.70	44.73	54.00	-9.27	AV
Horizontal	4434.251	63.33	5.94	35.18	44.00	60.45	74.00	-13.55	Pk
Horizontal	4434.251	43.29	5.94	35.18	44.00	40.41	54.00	-13.59	AV
Horizontal	10370.127	58.27	8.46	38.71	44.50	60.94	74.00	-13.06	Pk
Horizontal	10370.127	42.16	8.46	38.71	44.50	44.83	54.00	-9.17	AV
Horizontal	10540.325	56.27	10.12	38.38	44.10	60.67	74.00	-13.33	Pk
Horizontal	10540.325	40.27	10.12	38.38	44.10	44.67	54.00	-9.33	AV
Middle Channel (5200 MHz)-Above 1G									
Vertical	4592.63	58.62	6.48	36.35	44.05	57.40	74.00	-16.60	Pk
Vertical	4592.63	42.27	6.48	36.35	44.05	41.05	54.00	-12.95	AV
Vertical	10401.21	59.34	8.47	37.88	44.51	61.18	74.00	-12.82	Pk
Vertical	10401.21	41.11	8.47	37.88	44.51	42.95	54.00	-11.05	AV
Vertical	15600.26	59.63	10.12	38.80	44.10	64.45	74.00	-9.55	Pk
Vertical	15600.26	38.27	10.12	38.80	42.70	44.49	54.00	-9.51	AV
Horizontal	4592.35	58.24	6.48	36.37	44.05	57.04	74.00	-16.96	Pk
Horizontal	4592.35	44.16	6.48	36.37	44.05	42.96	54.00	-11.04	AV
Horizontal	10400.33	60.29	8.47	38.64	44.50	62.90	74.00	-11.10	Pk
Horizontal	10400.33	40.27	8.47	38.64	44.50	42.88	54.00	-11.12	AV
Horizontal	15600.33	59.16	10.12	38.38	44.10	63.56	74.00	-10.44	Pk
Horizontal	15600.33	40.37	10.12	38.38	44.10	44.77	54.00	-9.23	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.625	62.37	7.1	37.24	43.5	63.21	74.00	-10.79	Pk
Vertical	4739.625	42.25	7.1	37.24	43.5	43.09	54.00	-10.91	AV
Vertical	10480.247	60.12	8.46	37.68	44.5	61.76	74.00	-12.24	Pk
Vertical	10480.247	40.59	8.46	37.68	44.5	42.23	54.00	-11.77	AV
Vertical	15720.364	60.29	10.12	38.8	44.1	65.11	74.00	-8.89	Pk
Vertical	15720.364	38.57	10.12	38.8	42.7	44.79	54.00	-9.21	AV
Horizontal	4739.238	61.14	7.1	37.24	43.5	61.98	74.00	-12.02	Pk
Horizontal	4739.238	40.26	7.1	37.24	43.5	41.1	54.00	-12.9	AV
Horizontal	10481.652	60.58	8.46	38.57	44.5	63.11	74.00	-10.89	Pk
Horizontal	10481.652	41.46	8.46	38.57	44.5	43.99	54.00	-10.01	AV
Horizontal	15720.357	58.67	10.12	38.38	44.1	63.07	74.00	-10.93	Pk
Horizontal	15720.357	42.37	10.12	38.38	44.1	46.77	54.00	-7.23	AV

Note: "802.11a (5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX (5.8G)		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4680.236	62.19	5.94	35.40	44.00	59.53	74.00	-14.47	Pk
Vertical	4680.236	43.33	5.94	35.40	44.00	40.67	54.00	-13.33	AV
Vertical	11490.357	58.67	8.46	39.75	44.50	62.38	74.00	-11.62	Pk
Vertical	11490.357	41.29	8.46	39.75	44.50	45.00	54.00	-9.00	AV
Vertical	17235.624	50.19	10.12	38.80	44.10	55.01	74.00	-18.99	Pk
Vertical	17235.624	40.67	10.12	38.80	42.70	46.89	54.00	-7.11	AV
Horizontal	4680.125	58.63	5.94	35.18	44.00	55.75	74.00	-18.25	Pk
Horizontal	4680.125	40.27	5.94	35.18	44.00	37.39	54.00	-16.61	AV
Horizontal	11490.361	57.23	8.46	38.71	44.50	59.90	74.00	-14.10	Pk
Horizontal	11490.361	40.15	8.46	38.71	44.50	42.82	54.00	-11.18	AV
Horizontal	17235.249	60.38	10.12	38.38	44.10	64.78	74.00	-9.22	Pk
Horizontal	17235.249	38.69	10.12	38.38	44.10	43.09	54.00	-10.91	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.374	61.56	6.48	36.35	44.05	60.34	74.00	-13.66	Pk
Vertical	4592.374	42.17	6.48	36.35	44.05	40.95	54.00	-13.05	AV
Vertical	11570.238	58.34	8.47	37.88	44.51	60.18	74.00	-13.82	Pk
Vertical	11570.238	42.33	8.47	37.88	44.51	44.17	54.00	-9.83	AV
Vertical	17355.627	59.34	10.12	38.80	44.10	64.16	74.00	-9.84	Pk
Vertical	17355.627	38.81	10.12	38.80	42.70	45.03	54.00	-8.97	AV
Horizontal	4592.324	58.63	6.48	36.37	44.05	57.43	74.00	-16.57	Pk
Horizontal	4592.324	42.15	6.48	36.37	44.05	40.95	54.00	-13.05	AV
Horizontal	11570.325	60.19	8.47	38.64	44.50	62.80	74.00	-11.20	Pk
Horizontal	11570.325	42.13	8.47	38.64	44.50	44.74	54.00	-9.26	AV
Horizontal	17355.298	60.27	10.12	38.38	44.10	64.67	74.00	-9.33	Pk
Horizontal	17355.298	41.55	10.12	38.38	44.10	45.95	54.00	-8.05	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.624	61.28	7.10	37.24	43.50	62.12	74.00	-11.88	Pk
Vertical	6039.624	41.44	7.10	37.24	43.50	42.28	54.00	-11.72	AV
Vertical	11652.325	60.39	8.46	37.68	44.50	62.03	74.00	-11.97	Pk
Vertical	11652.325	41.56	8.46	37.68	44.50	43.20	54.00	-10.80	AV
Vertical	17473.625	60.24	10.12	38.80	44.10	65.06	74.00	-8.94	Pk
Vertical	17473.625	39.64	10.12	38.80	42.70	45.86	54.00	-8.14	AV
Horizontal	6039.658	59.68	7.10	37.24	43.50	60.52	74.00	-13.48	Pk
Horizontal	6039.658	41.57	7.10	37.24	43.50	42.41	54.00	-11.59	AV
Horizontal	11652.357	59.33	8.46	38.57	44.50	61.86	74.00	-12.14	Pk
Horizontal	11652.357	41.27	8.46	38.57	44.50	43.80	54.00	-10.20	AV
Horizontal	17474.659	58.15	10.12	38.38	44.10	62.55	74.00	-11.45	Pk
Horizontal	17474.659	40.23	10.12	38.38	44.10	44.63	54.00	-9.37	AV

Note: "802.11a(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.
 The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.
 Emission level (dBuV/m) = 20 log Emission level (uV/m).
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.2.9 TEST RESULTS (26.5GHZ-40GHZ)


EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 19V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz , TX (5.8G)-802.11a 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:

Channel (5180 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

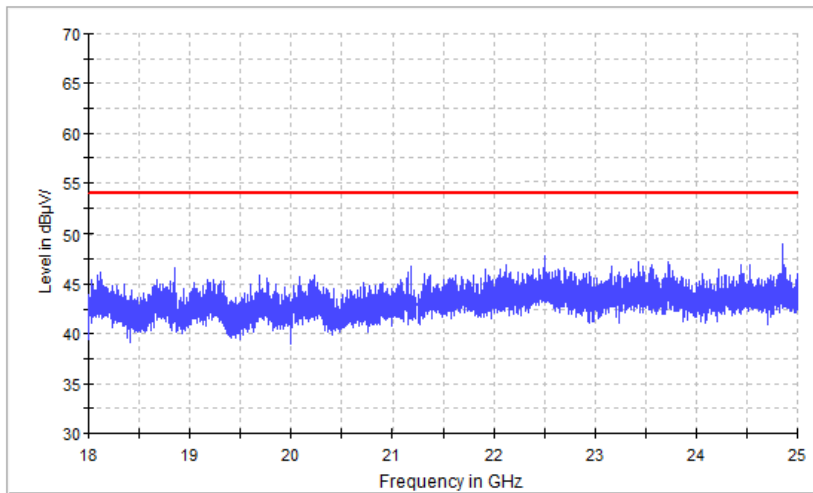

Vertical


FCC Electric Field Strength 18-26.5GHz

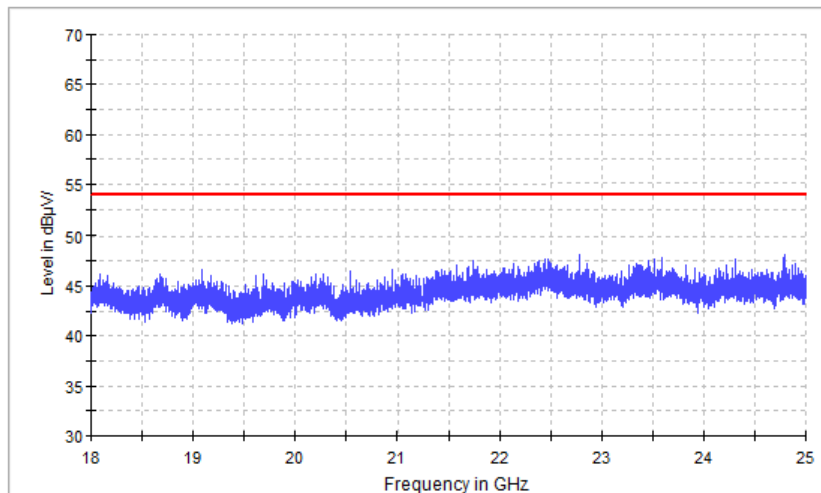

Channel (5180 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

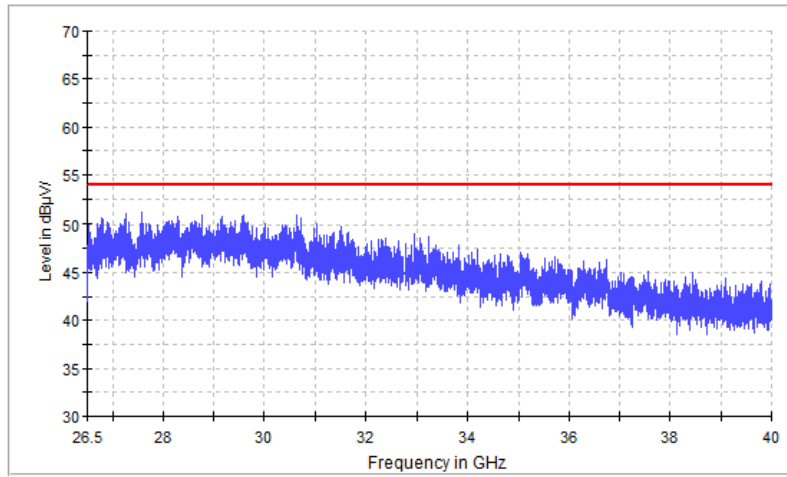

Vertical


FCC Electric Field Strength 26.5-40GHz

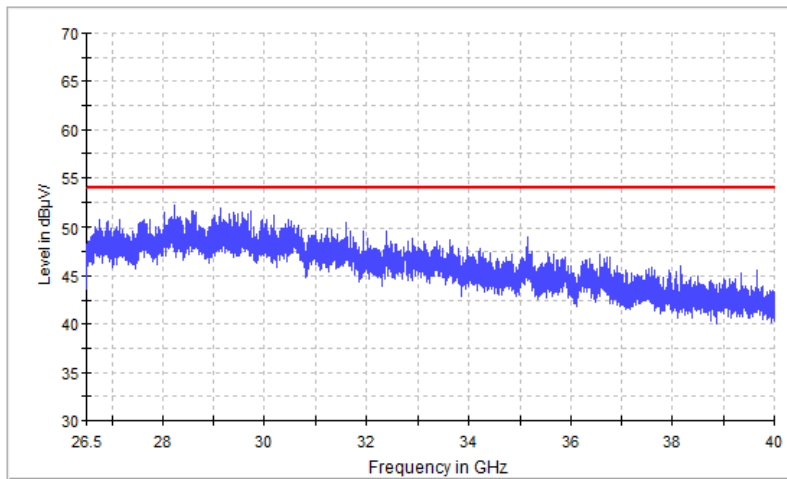

Channel (5745 MHz) 18-26.5G


Horizontal

FCC Electric Field Strength 18-26.5GHz

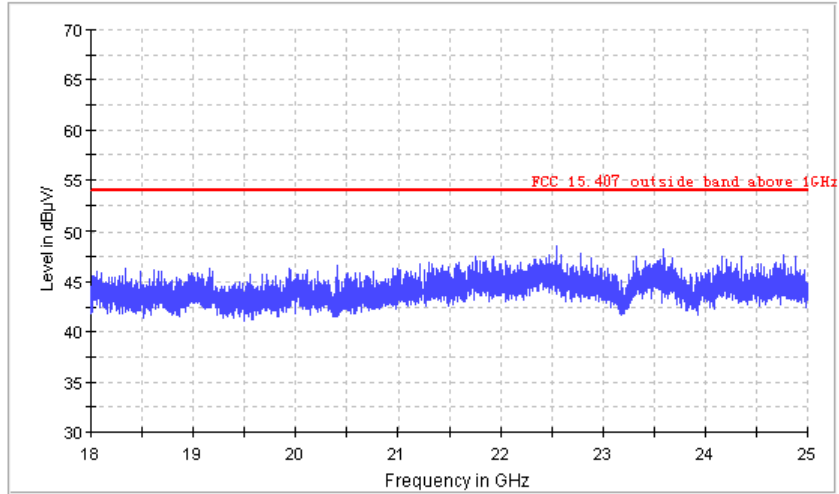

Vertical


FCC Electric Field Strength 18-26.5GHz

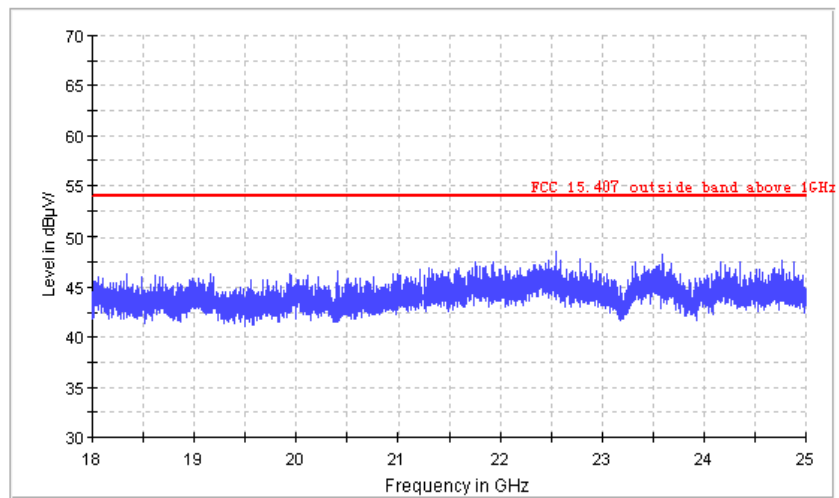

Channel (5745 MHz) 26.5-40G


Horizontal

FCC Electric Field Strength 26.5-40GHz

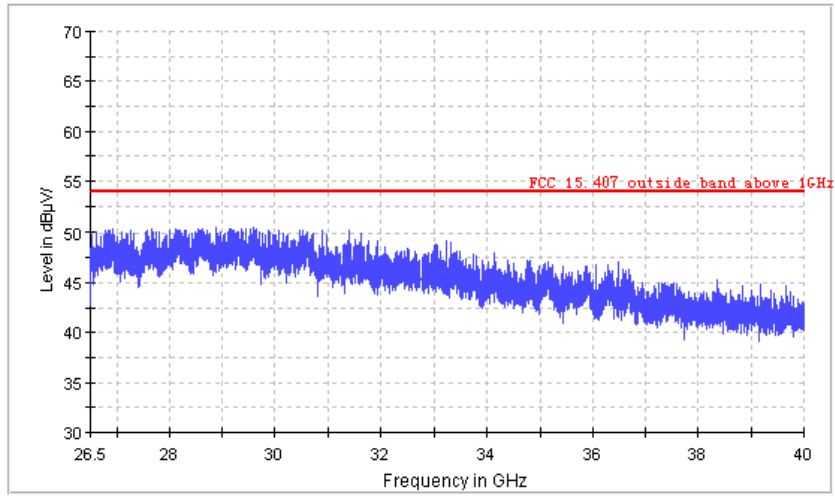

Vertical

FCC Electric Field Strength 26.5-40GHz

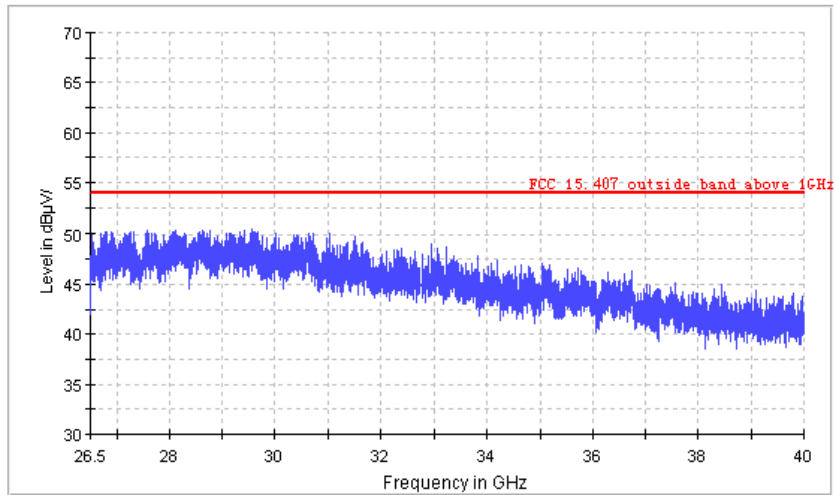

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


Mode	Frequency	Measured Power Density (dBm)		Total power density (dBm)	Calculate power density (dBm)(Note 1)		Limit (dBm)	Result
		ANT A	ANT B		ANT A	ANT B		
802.11 a	5185 MHz	0.25	-0.13	-	0.25	-0.13	11	PASS
	5200 MHz	0.26	0.03	-	0.26	0.03	11	PASS
	5240 MHz	-0.97	-1.14	-	-0.97	-1.14	11	PASS
802.11 n20	5185 MHz	0.21	-0.22	3.01	3.01		10.99	PASS
	5200 MHz	-0.25	0.05	2.91	2.91		10.99	PASS
	5240 MHz	-1.13	-1.25	1.82	1.82		10.99	PASS
802.11 n40	5190 MHz	-3.89	-3.65	-0.76	-0.76		10.99	PASS
	5230 MHz	-4.58	-4.86	-1.71	-1.71		10.99	PASS
802.11 ac20	5185 MHz	-0.53	-0.50	2.50	2.50		10.99	PASS
	5200 MHz	-5.58	-5.65	-2.60	-2.60		10.99	PASS
	5240 MHz	-0.55	-0.99	2.25	2.25		10.99	PASS
802.11 ac40	5190 MHz	-3.32	-3.86	-0.57	-0.57		10.99	PASS
	5230 MHz	-4.74	-4.86	-1.79	-1.79		10.99	PASS
802.11 ac80	5210 MHz	-5.76	-6.78	-3.23	-3.23		10.99	PASS

Note: 1. Calculate power density= Measured Power Density+10log(1MHz/RBW)


RBW=1MHz

2. For 802.11n/ac 5GHz has MIMO mode.Direction gain=6.01dbi

6.01dbi > 6.0 dbi so power density limit= 11dBm/MHz-(6.01-6.0)=10.99




(802.11a) PSD plot on channel 36

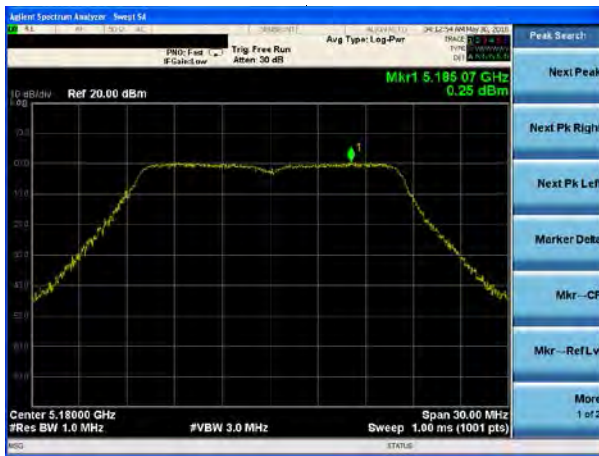


(802.11n20) PSD plot on channel 36



(802.11a) PSD plot on channel 40

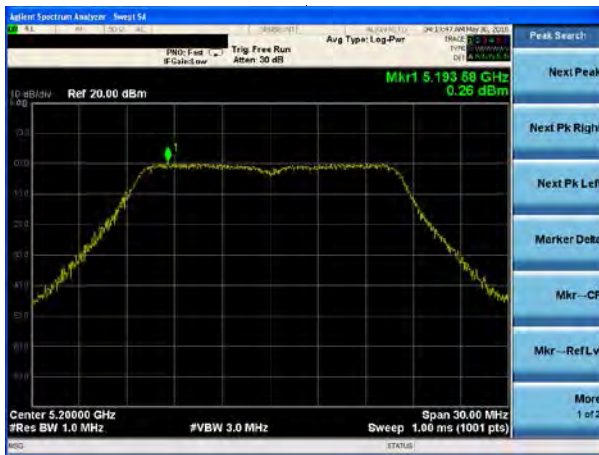


(802.11n20) PSD plot on channel 40

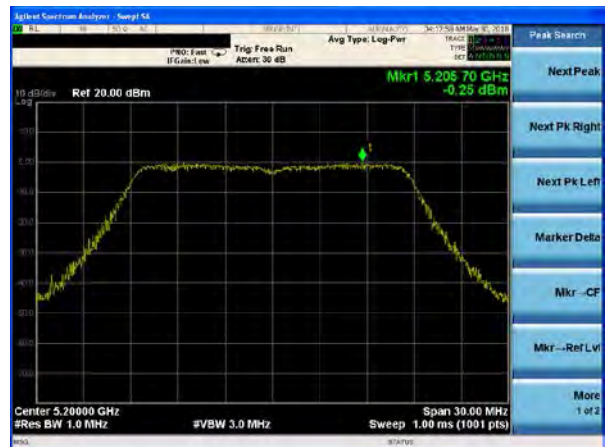


(802.11a) PSD plot on channel 48



(802.11n20) PSD plot on channel 48

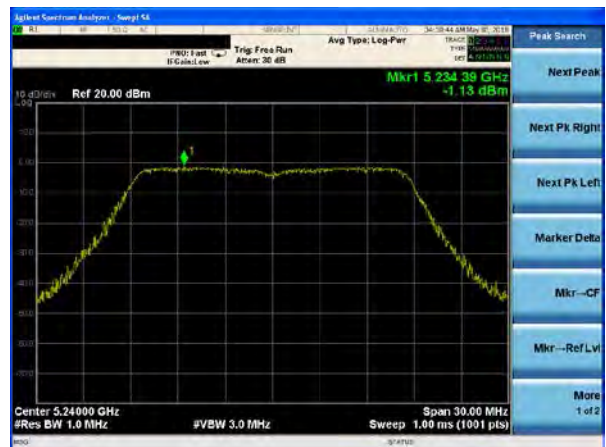


(802.11n40) PSD plot on channel 38

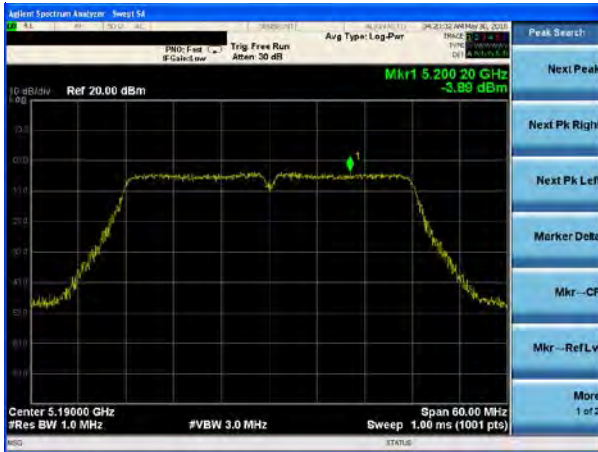


(802.11ac20) PSD plot on channel 36




(802.11n40) PSD plot on channel 46

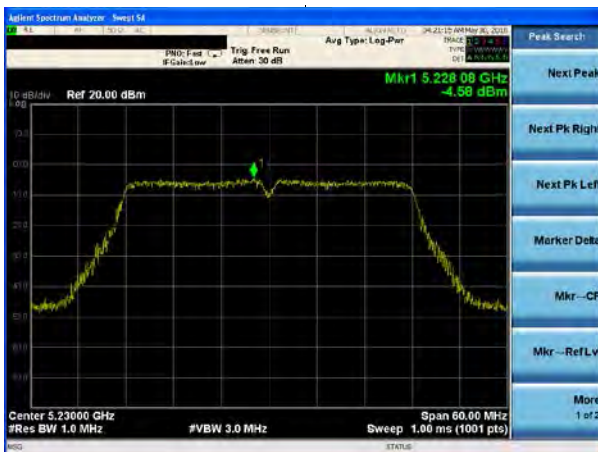

(802.11ac20) PSD plot on channel 40

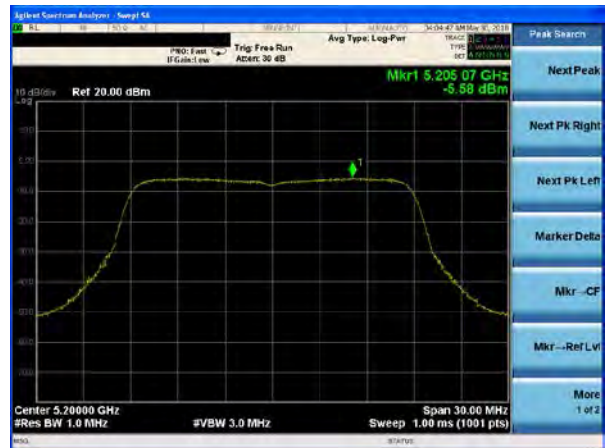


(802.11ac20) PSD plot on channel 48

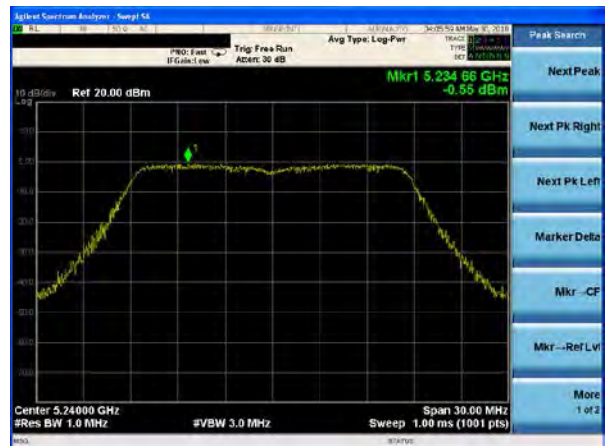


(802.11ac40) PSD plot on channel 38



(802.11ac80) PSD plot on channel 42

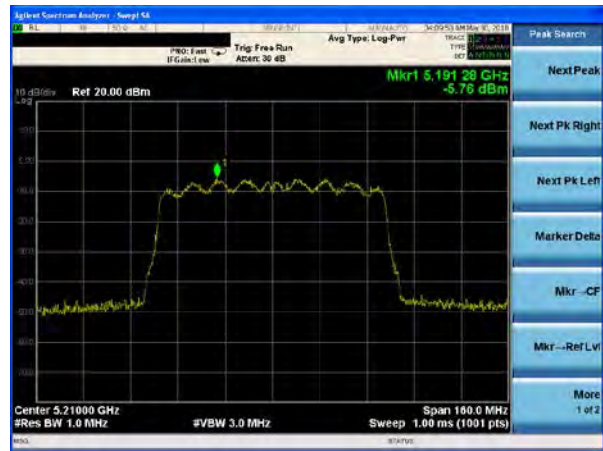

(802.11ac40) PSD plot on channel 46

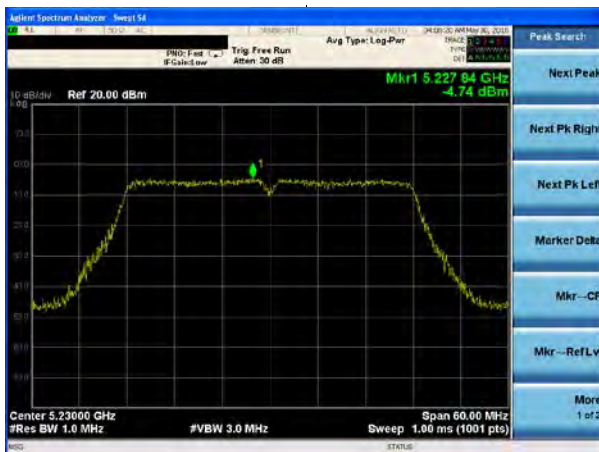

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band IV (5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx

Mode	Frequency	Measured Power Density (dBm)		Total power density (dBm)	Calculate power density (dBm)(Note 1)		Limit (dBm)	Result
		ANT A	ANT B		ANT A	ANT B		
802.11 a	5745 MHz	-1.130	-1.236	-	-1.22	-1.32	30	PASS
	5785 MHz	-1.171	-1.192	-	-1.26	-1.28	30	PASS
	5825 MHz	-2.391	-2.631	-	-2.48	-2.72	30	PASS
802.11 n20	5745 MHz	-1.186	-1.625	1.61	1.52		29.99	PASS
	5785 MHz	-0.619	-1.374	2.03	1.94		29.99	PASS
	5825 MHz	-2.041	-2.347	0.82	0.73		29.99	PASS
802.11 n40	5755 MHz	-4.647	-4.957	-1.79	-1.88		29.99	PASS
	5795 MHz	-4.485	-5.000	-1.72	-1.81		29.99	PASS
802.11 ac20	5745 MHz	0.027	-0.907	2.60	2.51		29.99	PASS
	5785 MHz	-0.769	-1.046	2.11	2.02		29.99	PASS
	5825 MHz	-2.417	-3.156	0.24	0.15		29.99	PASS
802.11 ac40	5755 MHz	-4.187	-4.979	-1.55	-1.64		29.99	PASS
	5795 MHz	-4.659	-5.194	-1.91	-2.00		29.99	PASS
802.11 ac80	5775 MHz	-6.946	-7.567	-4.24	-4.33		29.99	PASS

Note:


(1) Calculate power density= Measured Power Density+10log(500kHz/RBW)

RBW=0.51MHz

(2) (2) For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.01dbi

6.01 dbi > 6.0 dbi so power density limit= 30-(6.01-6)=29.9

(802.11a) PSD plot on channel 149

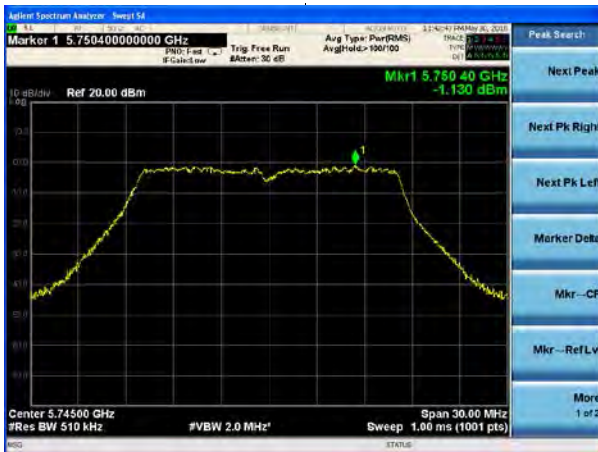


(802.11n20) PSD plot on channel 149




(802.11a) PSD plot on channel 157



(802.11n20) PSD plot on channel 157

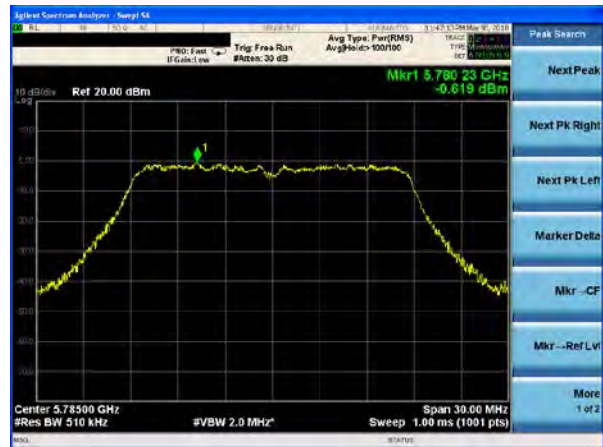


(802.11a) PSD plot on channel 165

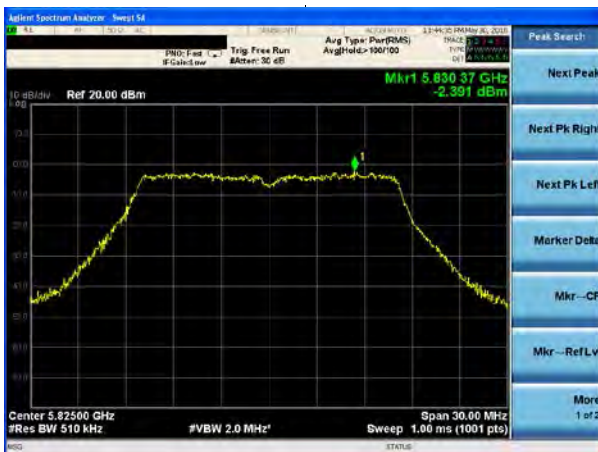

(802.11n20) PSD plot on channel 165




(802.11n40) PSD plot on channel 151

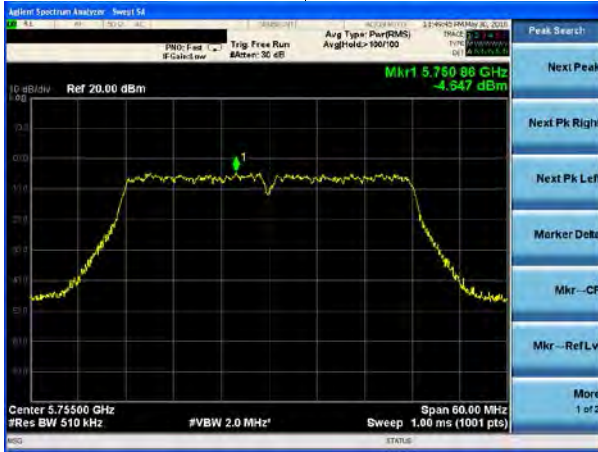

(802.11ac20) PSD plot on channel 149




(802.11n40) PSD plot on channel 159

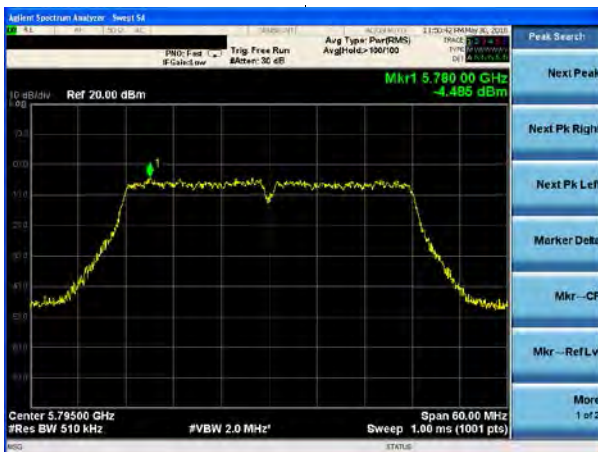


(802.11ac20) PSD plot on channel 157



(802.11ac20) PSD plot on channel 165

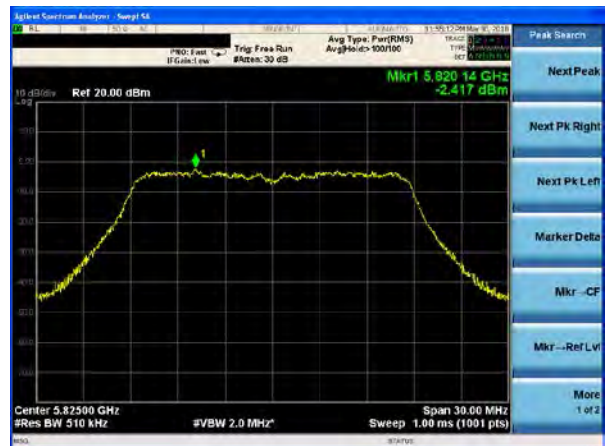


(802.11ac40) PSD plot on channel 151

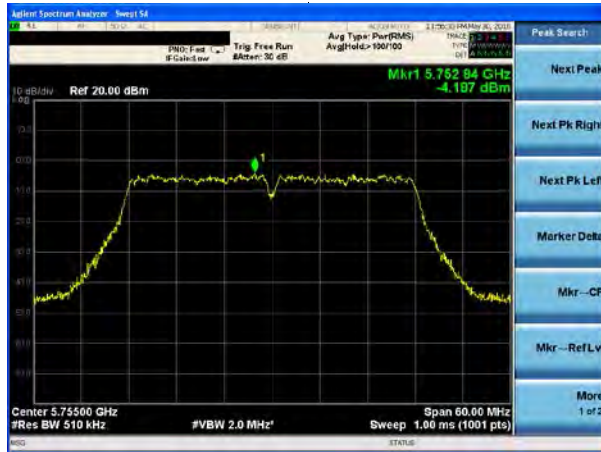

(802.11ac80) PSD plot on channel 155



(802.11ac40) PSD plot on channel 159

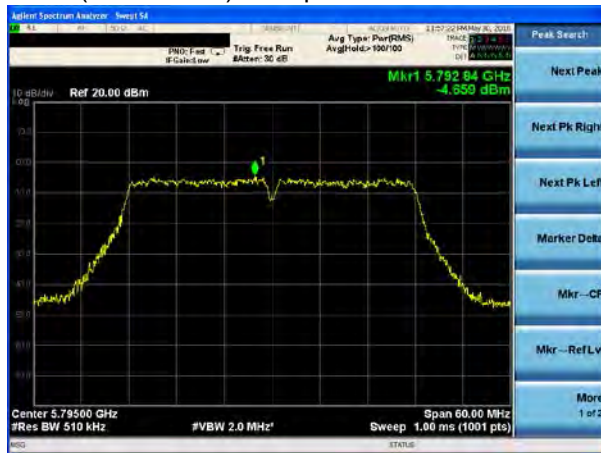

5. 26DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

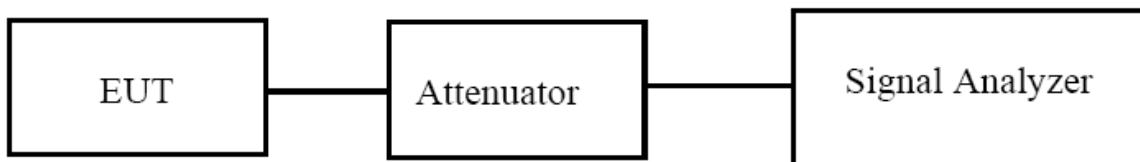

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	26dB bandwidth (MHz)	Result
			Antenna A	Antenna B	Antenna A	Antenna B	
802.11a	CH36	5180	16.770	16.748	21.08	20.92	Pass
	CH40	5200	16.759	16.774	20.95	20.84	Pass
	CH48	5240	16.755	16.767	21.14	21.13	Pass
802.11 n20	CH36	5180	17.818	17.817	21.70	21.86	Pass
	CH40	5200	17.809	17.818	21.73	21.72	Pass
	CH48	5240	17.790	17.799	21.69	21.51	Pass
802.11 n40	CH 38	5190	36.587	36.605	44.09	44.09	Pass
	CH 46	5230	36.600	36.618	43.69	43.68	Pass
802.11 ac20	CH36	5180	17.857	17.849	21.59	21.66	Pass
	CH40	5200	17.833	17.840	21.51	21.64	Pass
	CH48	5240	17.846	17.851	21.54	21.56	Pass
802.11 ac40	CH 38	5190	36.532	36.579	43.42	43.43	Pass
	CH 46	5230	36.548	36.641	43.23	43.70	Pass
802.11 ac80	CH 42	5210	74.982	74.984	82.00	82.14	Pass

Test plot


(802.11a) -26dB&99%Bandwidth plot on channel 36

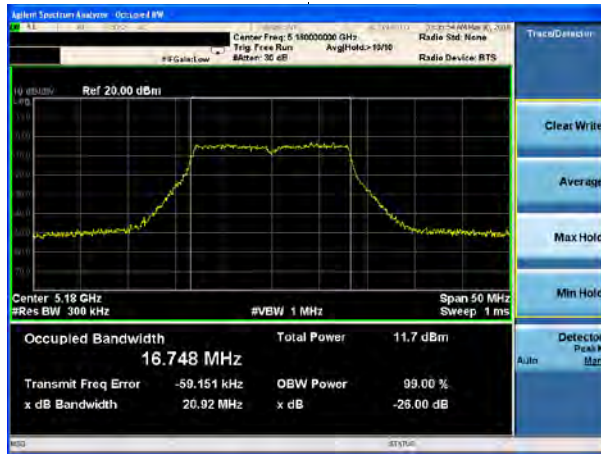


(802.11 n20) -26dB&99%Bandwidth plot on channel 36

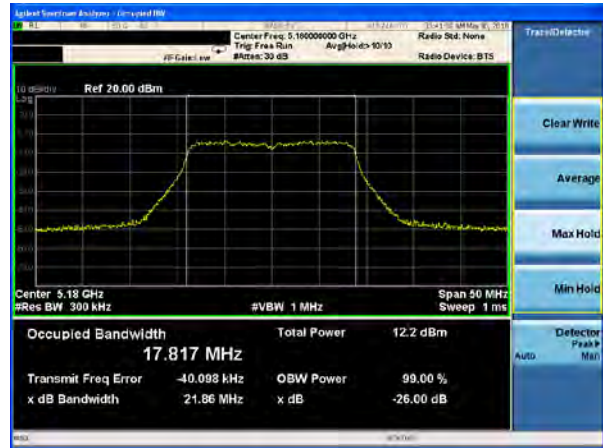

(802.11a) -26dB&99%Bandwidth plot on channel 40

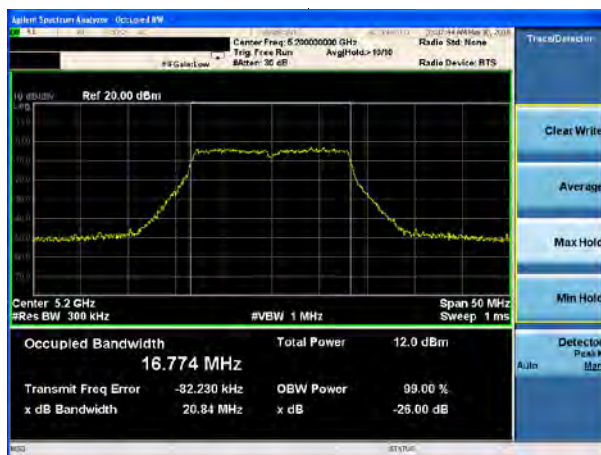


(802.11 n20) -26dB&99%Bandwidth plot on channel 40

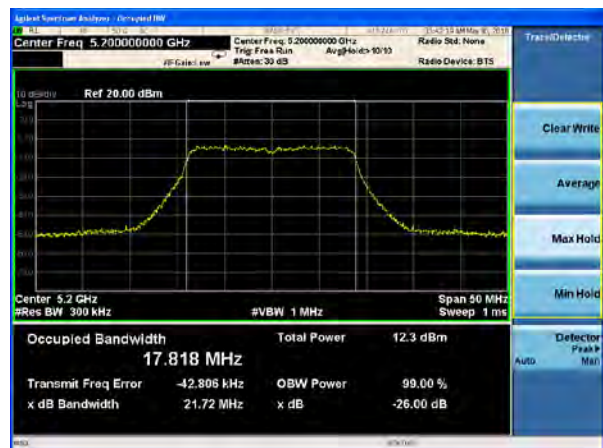

(802.11a) -26dB&99%Bandwidth plot on channel 48




(802.11 n20) -26dB&99%Bandwidth plot on channel 48

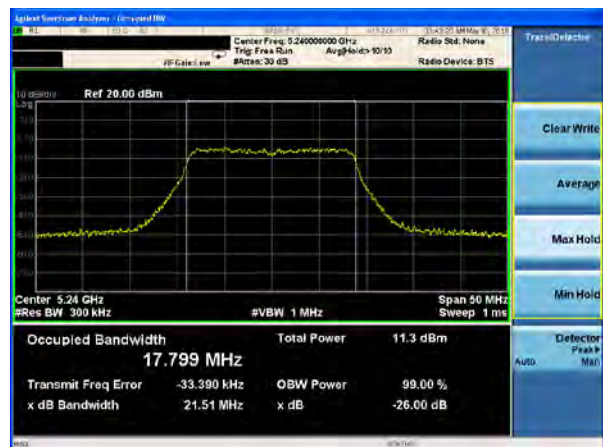


Test plot

(802.11 n40) -26dB&99%Bandwidth plot on channel 38

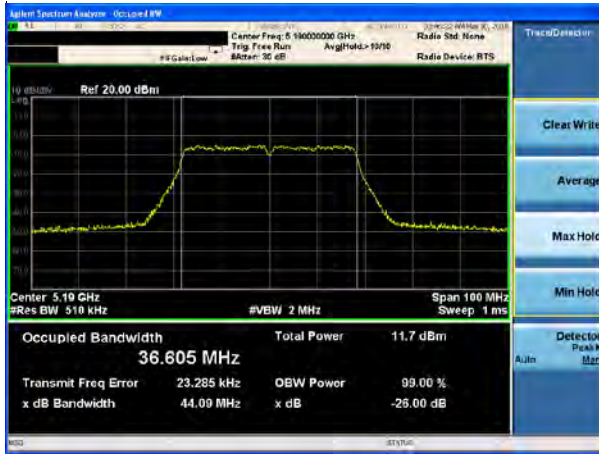


(802.11 ac20) -26dB&99%Bandwidth plot on channel 36

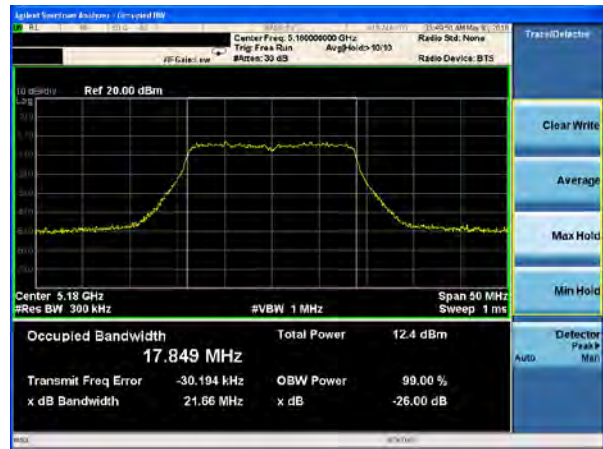


(802.11 n40) -26dB&99%Bandwidth plot on channel 46



(802.11 ac20) -26dB&99%Bandwidth plot on channel 40

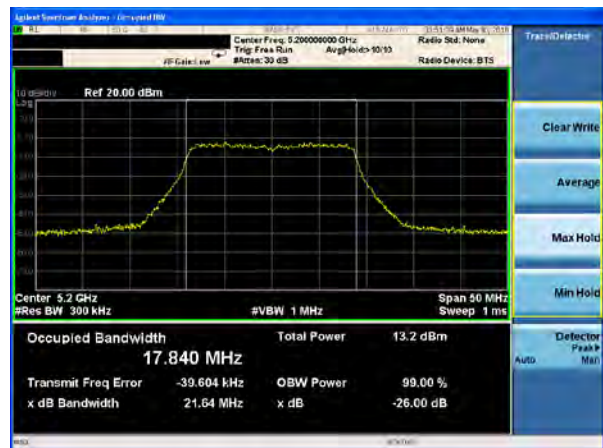


(802.11 ac20) -26dB&99%Bandwidth plot on channel 48

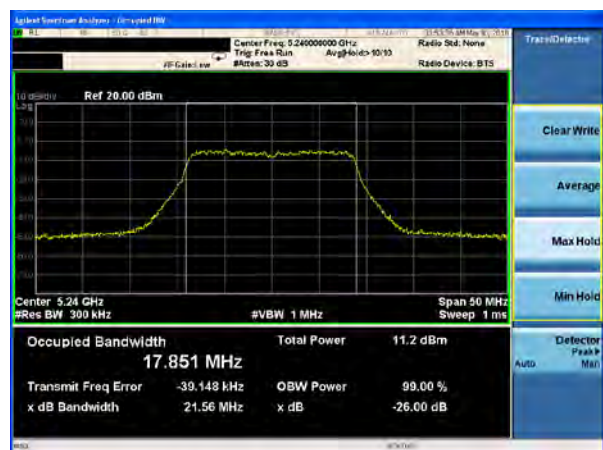

Test plot

(802.11 ac40) -26dB&99%Bandwidth plot on channel 38

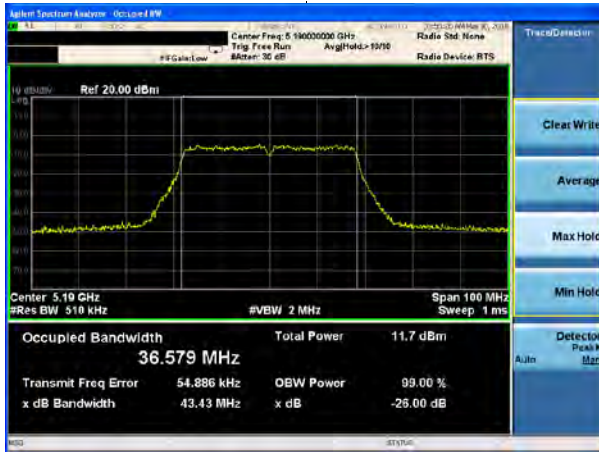

(802.11 ac80) -26dB&99%Bandwidth plot on channel 42



(802.11 ac40) -26dB&99%Bandwidth plot on channel 46



EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band IV(5745-5850MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)		26dB bandwidth (MHz)		Result
			Antenna A	Antenna B	Antenna A	Antenna B	
802.11a	CH149	5745	16.757	16.761	20.95	20.92	Pass
	CH157	5785	16.753	16.753	21.02	21.02	Pass
	CH165	5825	16.754	16.761	21.01	20.98	Pass
802.11 n20	CH149	5745	17.818	17.816	21.71	21.39	Pass
	CH157	5785	17.809	17.796	21.54	21.71	Pass
	CH165	5825	17.835	17.826	21.86	21.43	Pass
802.11 n40	CH151	5755	36.629	36.596	43.38	43.65	Pass
	CH159	5795	36.628	36.558	43.63	43.96	Pass
802.11 ac20	CH149	5745	17.849	17.817	21.72	21.56	Pass
	CH157	5785	17.826	17.803	21.66	21.77	Pass
	CH165	5825	17.861	17.854	21.49	21.70	Pass
802.11 ac40	CH151	5755	36.573	36.530	43.72	43.53	Pass
	CH159	5795	36.633	36.535	43.83	43.64	Pass
802.11 ac80	CH155	5775	75.025	75.009	82.27	81.99	Pass

Test plot


(802.11a) -26dB&99%Bandwidth plot on channel 149




(802.11 n20) -26dB&99%Bandwidth plot on channel 149

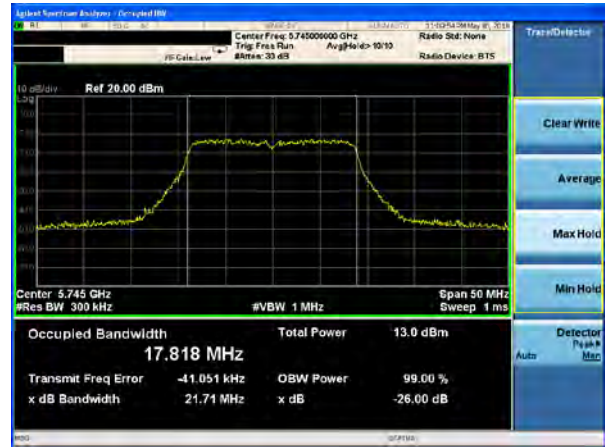

(802.11a) -26dB&99%Bandwidth plot on channel 157

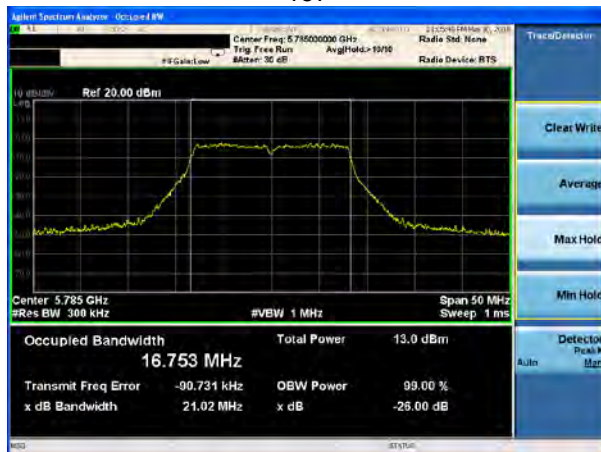


(802.11 n20) -26dB&99%Bandwidth plot on channel 157

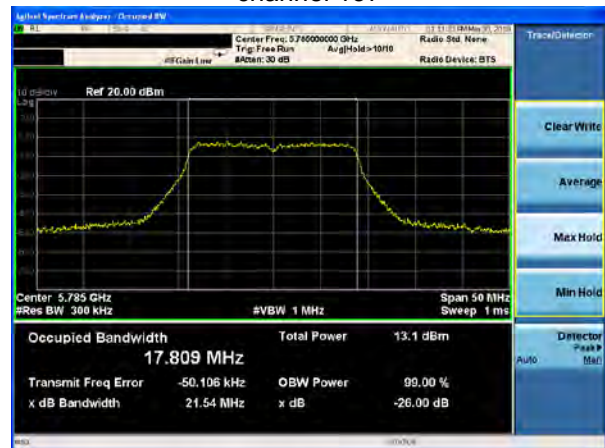

(802.11a) -26dB&99%Bandwidth plot on channel 165




(802.11 n20) -26dB&99%Bandwidth plot on channel 165

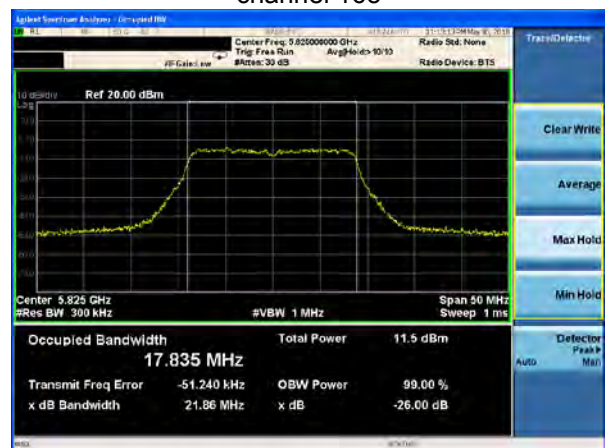


Test plot


(802.11 n40) -26dB&99%Bandwidth plot on channel 151

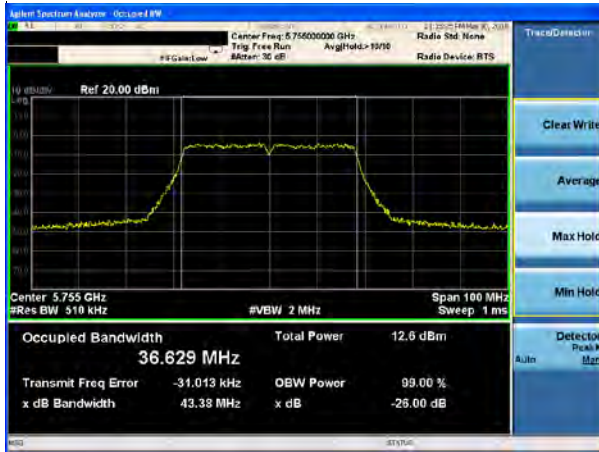


(802.11 ac20) -26dB&99%Bandwidth plot on channel 149

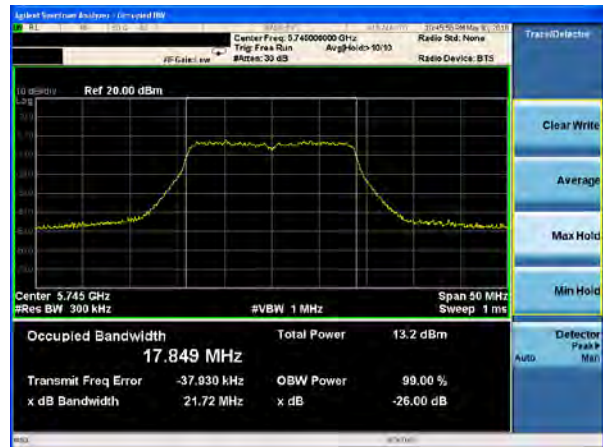


(802.11 n40) -26dB&99%Bandwidth plot on channel 159

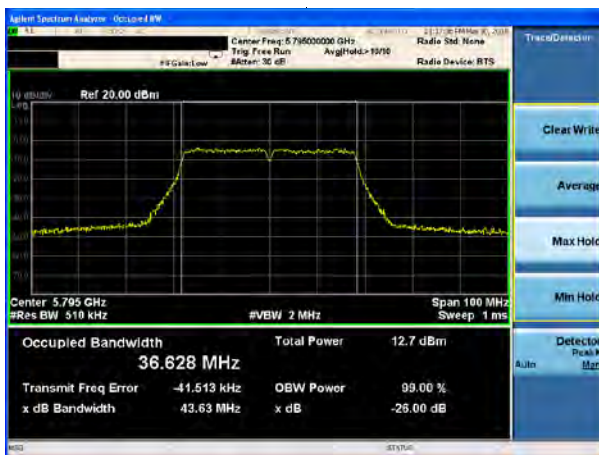

(802.11 ac20) -26dB&99%Bandwidth plot on channel 157

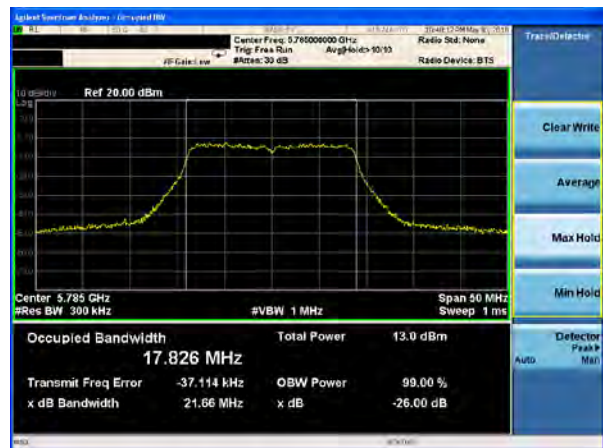


(802.11 ac20) -26dB&99%Bandwidth plot on channel 165

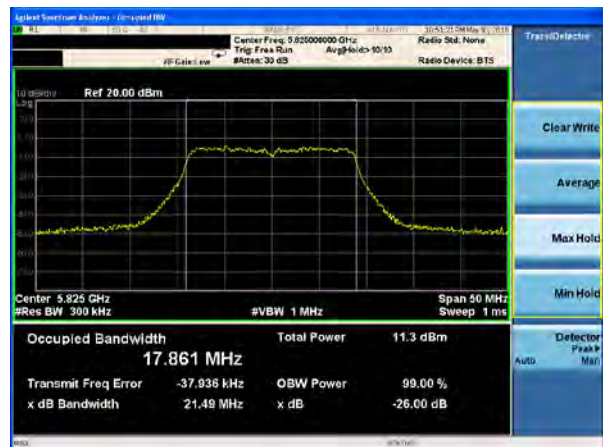


Test plot


(802.11 ac40) -26dB&99%Bandwidth plot on channel 151

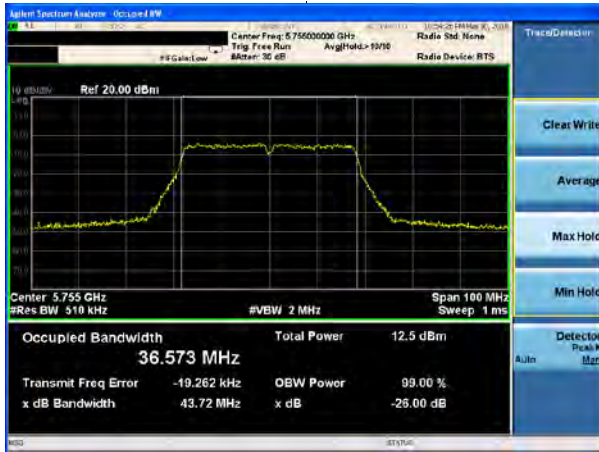

(802.11 ac80) -26dB&99%Bandwidth plot on channel 155

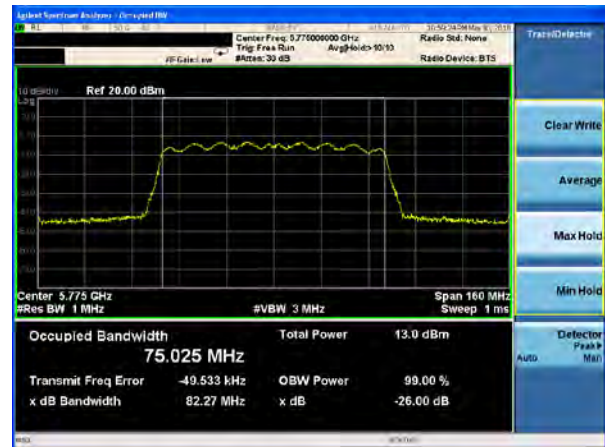

(802.11 ac40) -26dB&99%Bandwidth plot on channel 159

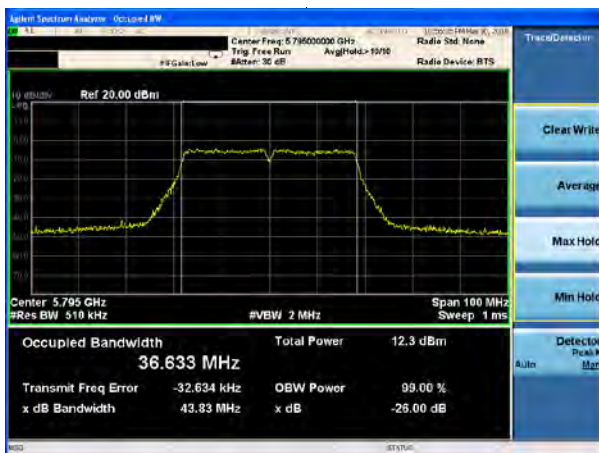

6. MINIMUM 6 DB BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

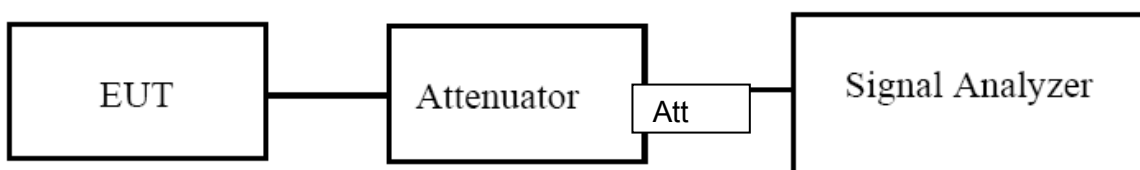

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


Mode	Channel	Frequency (MHz)	6dB bandwidth (MHz)	6dB bandwidth (MHz)	Limit (KHz)	Result
			Antenna A	Antenna B		
802.11a	CH36	5180	16.59	16.55	≧ 500	Pass
	CH40	5200	16.58	16.56	≧ 500	Pass
	CH48	5240	16.57	16.57	≧ 500	Pass
802.11 n20	CH36	5180	17.73	17.77	≧ 500	Pass
	CH40	5200	17.74	17.72	≧ 500	Pass
	CH48	5240	17.74	17.71	≧ 500	Pass
802.11 n40	CH 38	5190	36.57	36.58	≧ 500	Pass
	CH 46	5230	36.59	36.58	≧ 500	Pass
802.11 ac20	CH36	5180	17.77	17.77	≧ 500	Pass
	CH40	5200	17.77	17.73	≧ 500	Pass
	CH48	5240	17.73	17.72	≧ 500	Pass
802.11 ac40	CH 38	5190	36.57	36.59	≧ 500	Pass
	CH 46	5230	36.56	36.55	≧ 500	Pass
802.11 ac80	CH 42	5210	75.45	75.87	≧ 500	Pass

Test plot


(802.11a) 6dB Bandwidth plot on channel 36

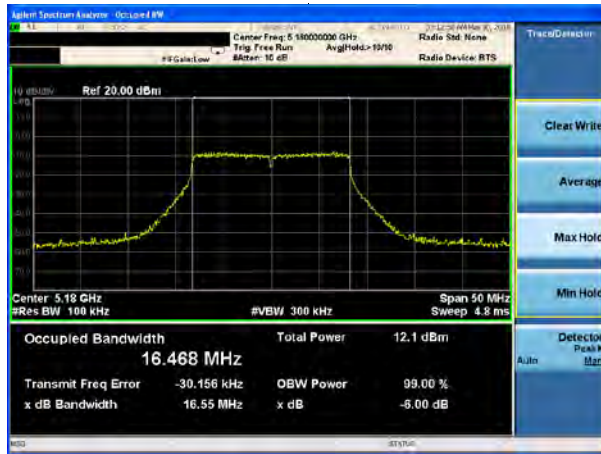


(802.11 n20) 6dB Bandwidth plot on channel 36

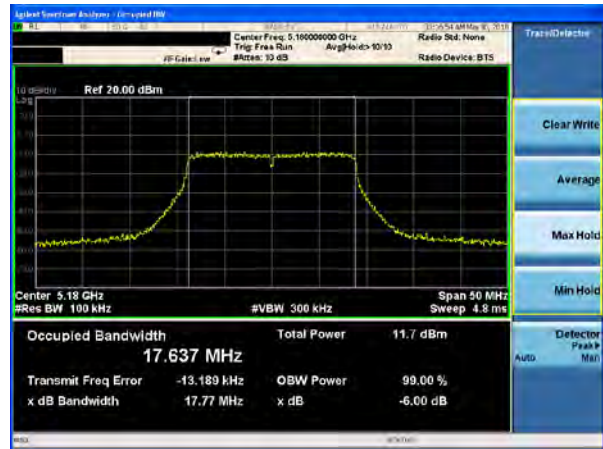

(802.11a) 6dB Bandwidth plot on channel 40

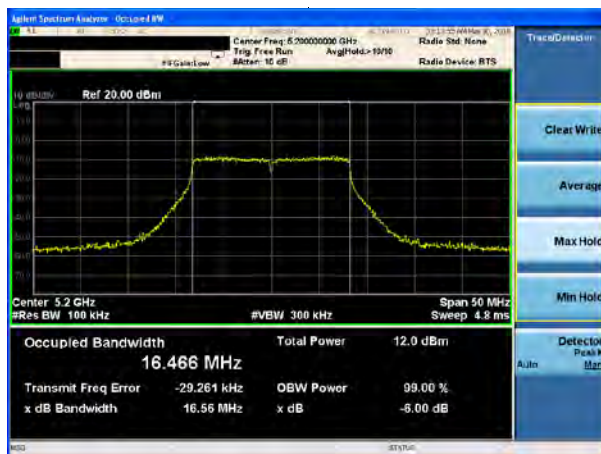


(802.11 n20) 6dB Bandwidth plot on channel 40

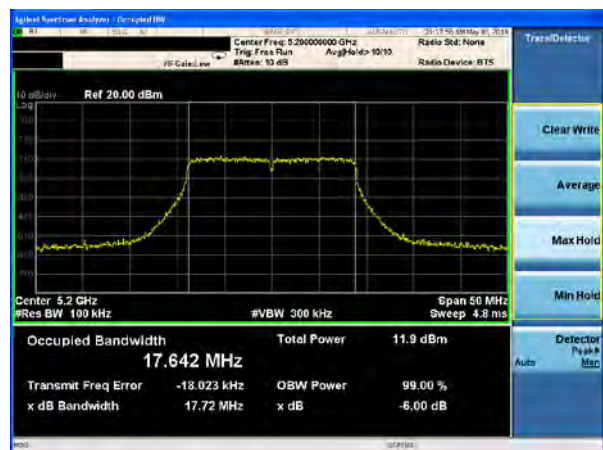

(802.11a) 6dB Bandwidth plot on channel 48




(802.11 n20) 6dB Bandwidth plot on channel 48

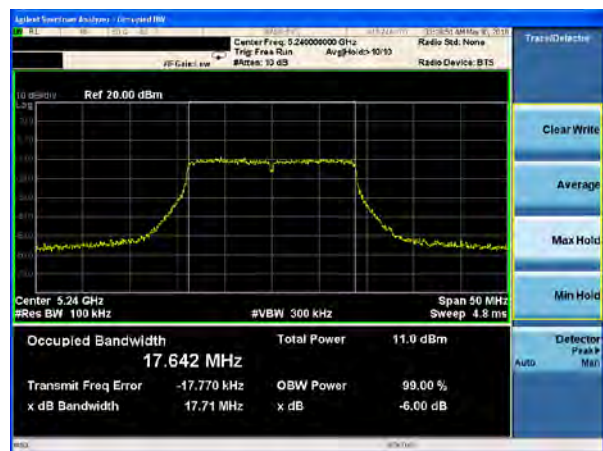


Test plot


(802.11 n40) 6dB Bandwidth plot on channel 38

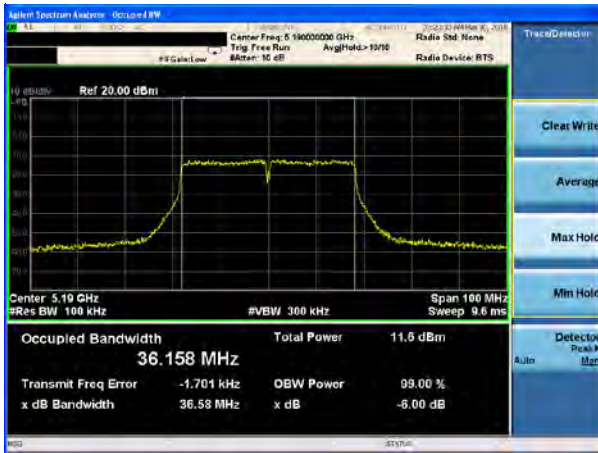


(802.11 ac20) 6dB Bandwidth plot on channel 36

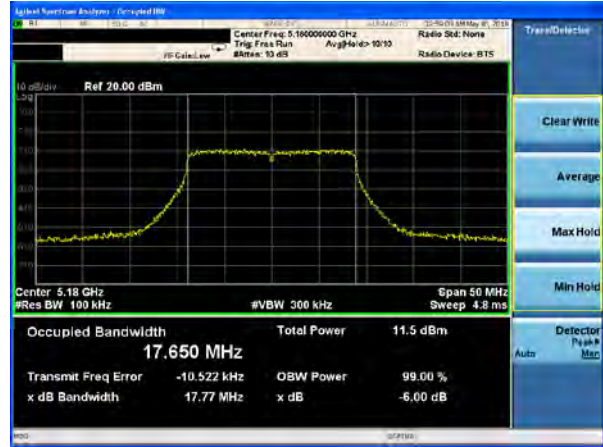


(802.11 n40) 6dB Bandwidth plot on channel 46

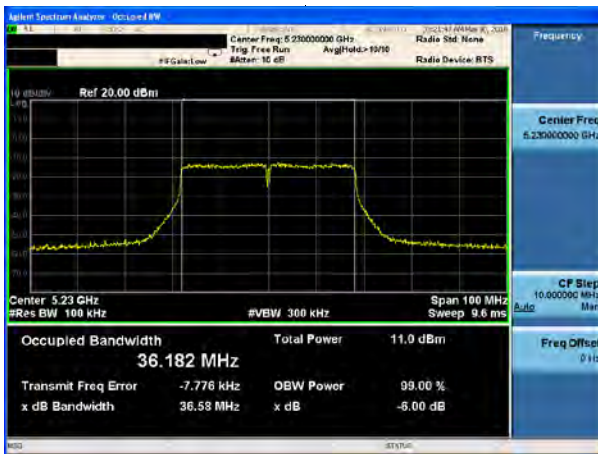

(802.11 ac20) 6dB Bandwidth plot on channel 40

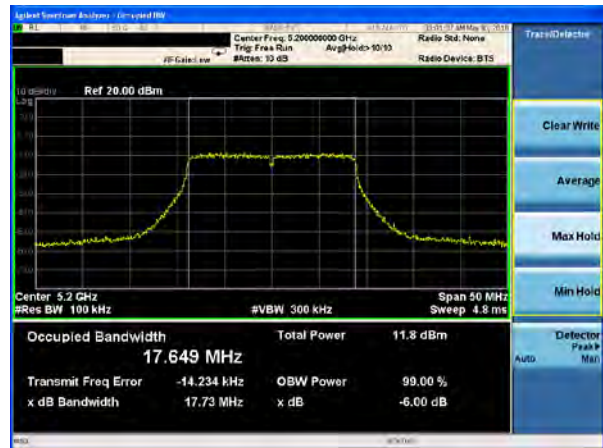


(802.11 ac20) 6dB Bandwidth plot on channel 48

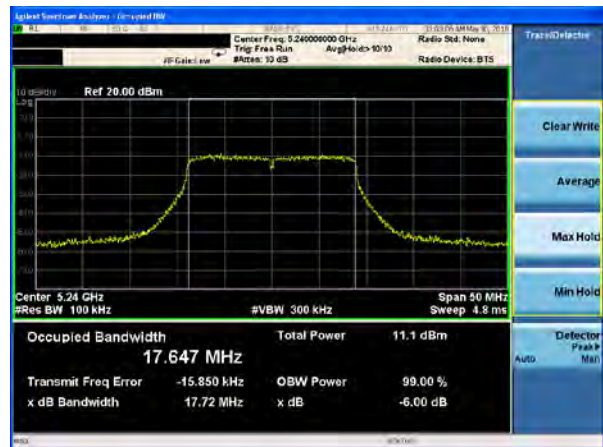


Test plot


(802.11 ac40) 6dB Bandwidth plot on channel 38

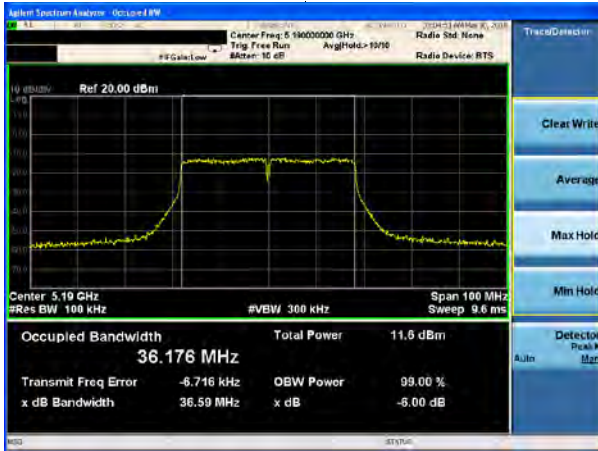

(802.11 ac80) 6dB Bandwidth plot on channel 42

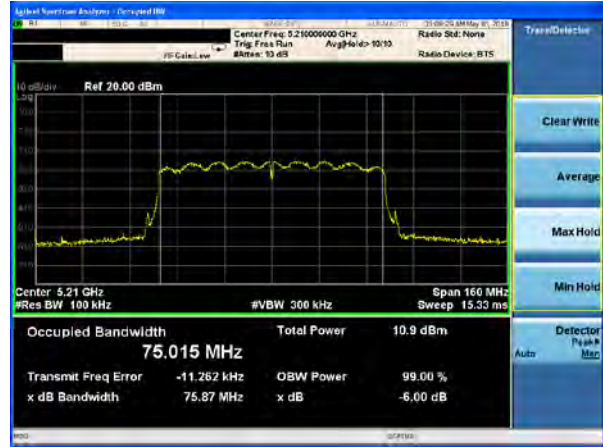

(802.11 ac40) 6dB Bandwidth plot on channel 46

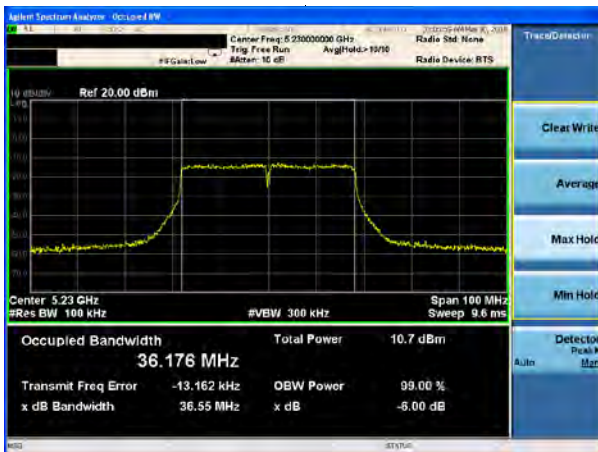

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.


EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


Mode	Channel	Frequency (MHz)	-6dB bandwidth (MHz)	-6dB bandwidth (MHz)	Limit (KHz)	Result
			Antenna A	Antenna B		
802.11a	149	5745	16.58	16.56	≧ 500	Pass
	157	5785	16.57	16.57	≧ 500	Pass
	165	5825	16.58	16.57	≧ 500	Pass
802.11 n20	149	5745	17.72	17.72	≧ 500	Pass
	157	5785	17.71	17.79	≧ 500	Pass
	165	5825	17.74	17.76	≧ 500	Pass
802.11 n40	151	5755	36.53	36.56	≧ 500	Pass
	159	5795	36.54	36.58	≧ 500	Pass
802.11 ac20	149	5745	17.72	17.76	≧ 500	Pass
	157	5785	17.72	17.73	≧ 500	Pass
	165	5825	17.74	17.73	≧ 500	Pass
802.11 ac40	149	5745	36.54	36.51	≧ 500	Pass
	157	5785	36.56	36.55	≧ 500	Pass
802.11 ac80	155	5775	75.40	75.42	≧ 500	Pass

Test plot


(802.11a) 6dB Bandwidth plot on channel 149

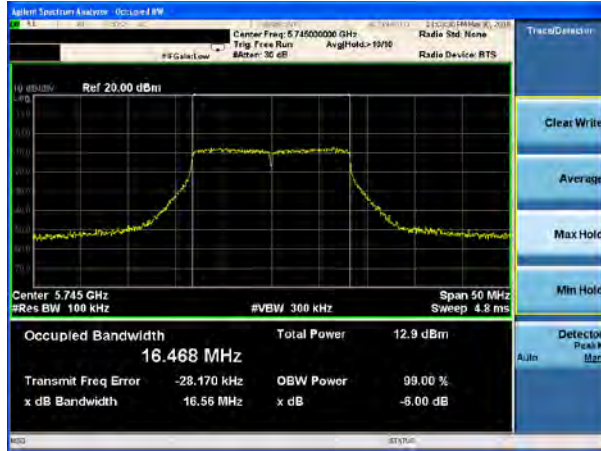


(802.11 n20) 6dB Bandwidth plot on channel 149

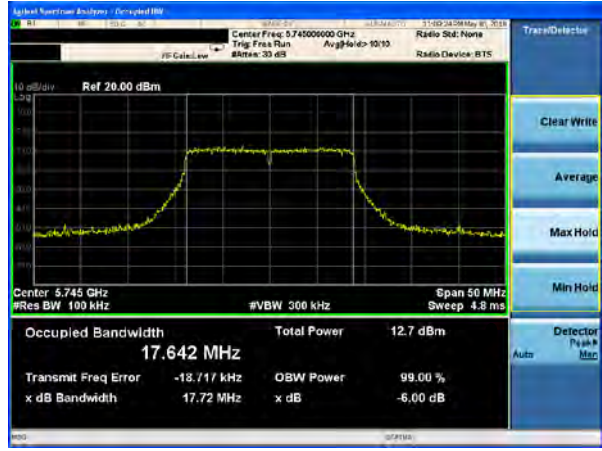


(802.11a) 6dB Bandwidth plot on channel 157

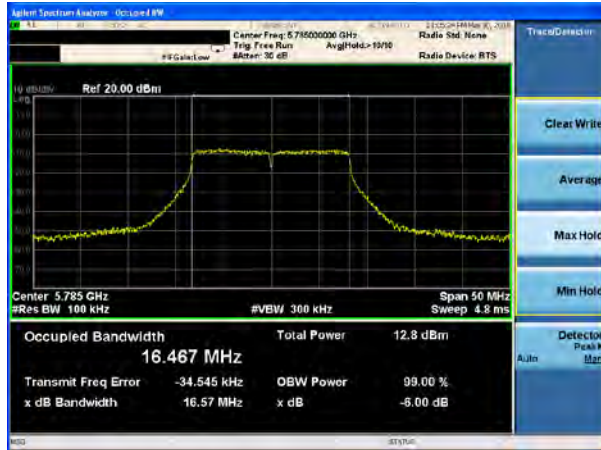


(802.11 n20) 6dB Bandwidth plot on channel 157

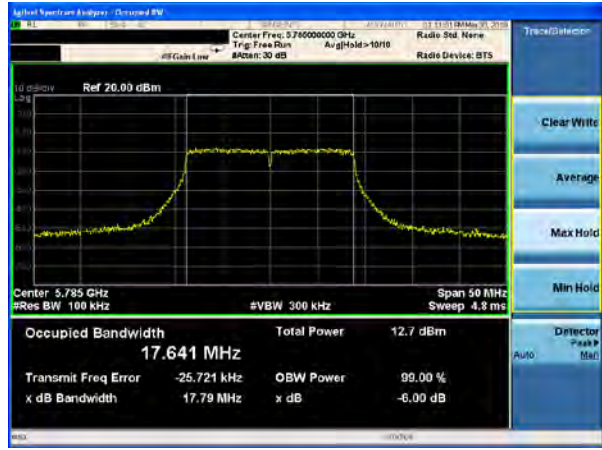

(802.11a) 6dB Bandwidth plot on channel 165

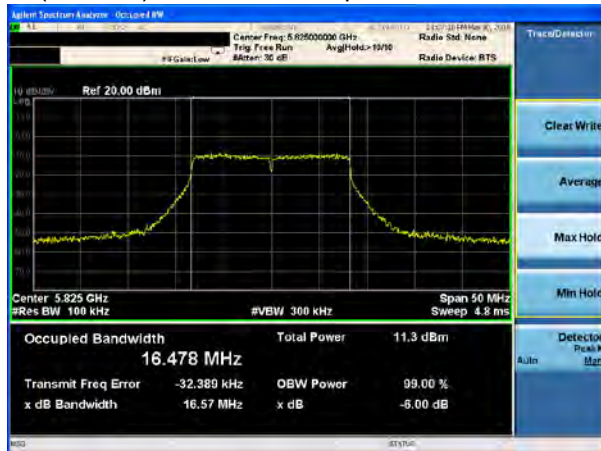


(802.11 n20) 6dB Bandwidth plot on channel 165

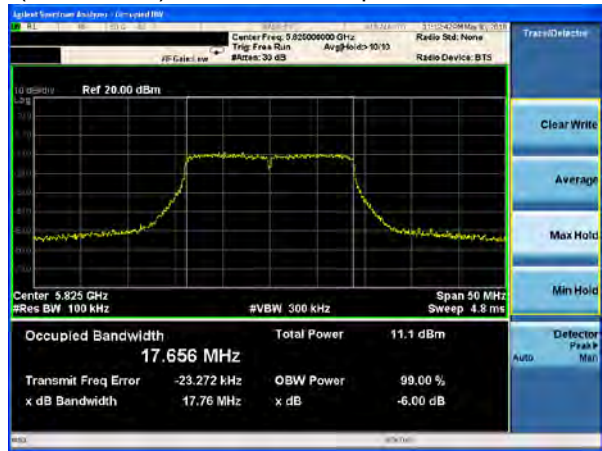


Test plot


(802.11 n40) 6dB Bandwidth plot on channel 151

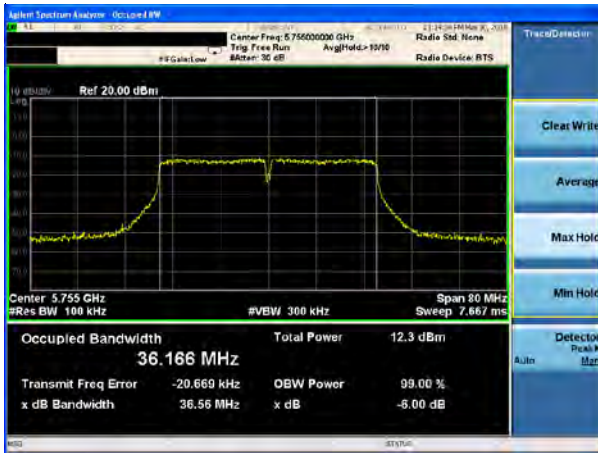


(802.11 ac20) 6dB Bandwidth plot on channel 149

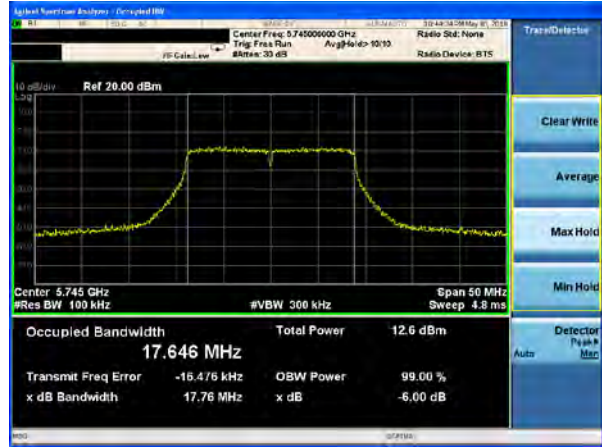


(802.11 n40) 6dB Bandwidth plot on channel 159

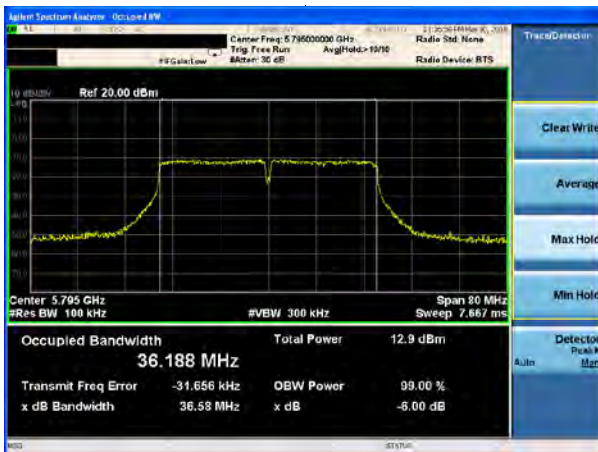

(802.11 ac20) 6dB Bandwidth plot on channel 157

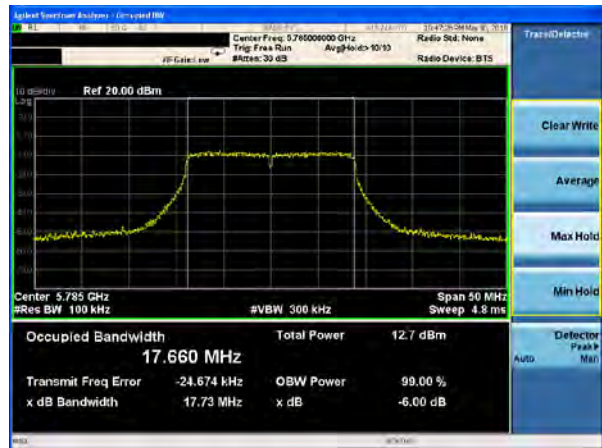


(802.11 ac20) 6dB Bandwidth plot on channel 165

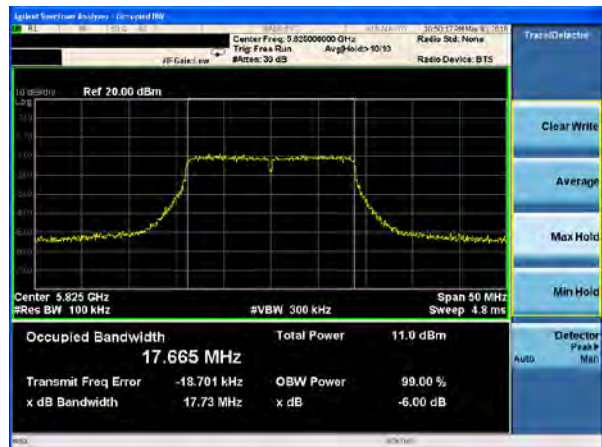


Test plot


(802.11 ac40) 6dB Bandwidth plot on channel 151

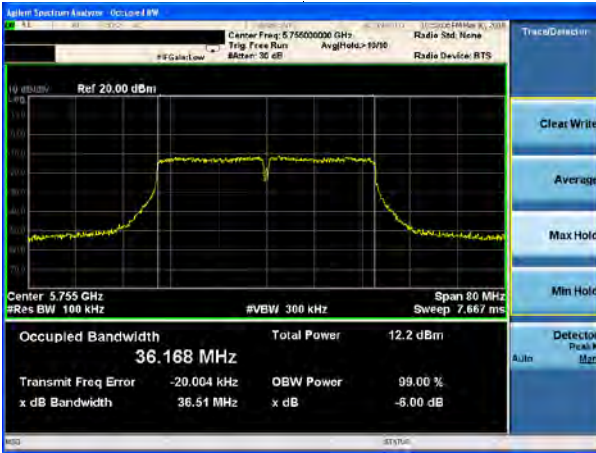

(802.11 ac80) 6dB Bandwidth plot on channel 155

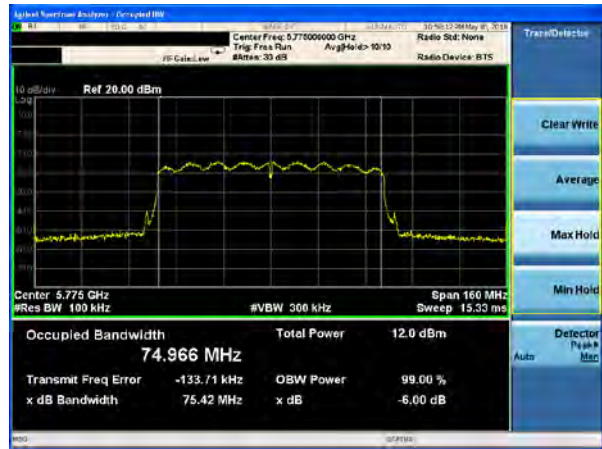

(802.11 ac40) 6dB Bandwidth plot on channel 159

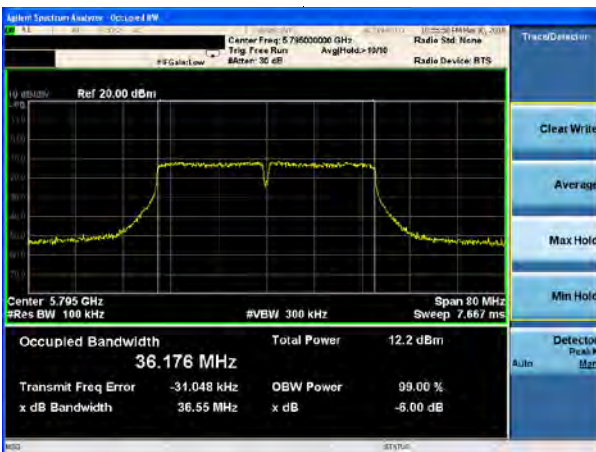

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

7.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".


(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

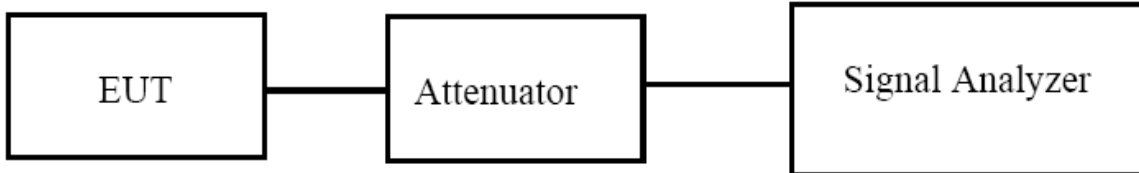

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX (5G) Mode Frequency Band I (5150-5250MHz)		

Note:

EUT has two antennas, and different modes support different transmit mode what describe as following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx

Test Channel	Frequency	Maximum output power. Antenna port		Total Power	LIMIT	Result
		(AV) (dBm)				
	(MHz)	ANT A	ANT B	dBm	dBm	
TX 802.11a Mode						
CH36	5180	8.2	8.2	-	23.98	Pass
CH40	5200	8.3	8.3	-	23.98	Pass
CH48	5240	7.2	7.1	-	23.98	Pass
TX 802.11 n20M Mode						
CH36	5180	7.3	7.4	10.36	23.97	Pass
CH40	5200	7.0	7.0	10.01	23.97	Pass
CH48	5240	6.2	6.1	9.16	23.97	Pass
TX 802.11 n40M Mode						
CH38	5190	7.0	7.1	10.06	23.97	Pass
CH46	5230	6.2	6.1	9.16	23.97	Pass
TX 802.11 ac20M Mode						
CH36	5180	7.3	7.3	10.31	23.97	Pass
CH40	5200	7.3	7.3	10.31	23.97	Pass
CH48	5240	6.5	6.6	9.56	23.97	Pass
TX 802.11 ac40M Mode						
CH38	5190	6.5	6.5	9.51	23.97	Pass
CH46	5230	5.8	5.8	8.81	23.97	Pass
TX 802.11 ac80M Mode						
CH42	5210	6.1	6.1	9.11	23.97	Pass

Note: For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.01dbi

$$6.01\text{dbi} > 6.0\text{ dbi so power density limit} = 23.98 - (6.01 - 6) = 23.97$$

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5825MHz)		

Note:

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx

Test Channel	Frequency (MHz)	Maximum output power. Antenna port		Total Power	LIMIT dBm	Result
		(AV) (dBm)		(AV)		
		ANT A	ANT B	dBm		
TX 802.11a Mode						
CH 149	5745	8.2	8.2	-	30	Pass
CH 157	5785	8.0	8.1	-	30	Pass
CH 165	5825	7.0	7.1	-	30	Pass
TX 802.11 n20M Mode						
CH 149	5745	7.7	7.8	10.76	29.99	Pass
CH 157	5785	7.8	7.7	10.76	29.99	Pass
CH 165	5825	6.0	6.1	9.06	29.99	Pass
TX 802.11 n40M Mode						
CH 151	5755	7.4	7.5	10.46	29.99	Pass
CH 159	5795	7.3	7.4	10.36	29.99	Pass
TX 802.11 ac20M Mode						
CH 149	5745	7.8	7.8	10.81	29.99	Pass
CH 157	5785	7.4	7.3	10.36	29.99	Pass
CH 165	5825	5.8	5.9	8.86	29.99	Pass
TX 802.11 ac40M Mode						
CH 151	5755	7.1	7.0	10.06	29.99	Pass
CH 159	5795	7.3	7.4	10.36	29.99	Pass
TX 802.11 ac80M Mode						
CH 155	5775	6.7	6.6	9.66	29.99	Pass

Note: For 802.11n/ac 5GHz has MIMO mode. Directional gain=6.01dbi

$$6.01 \text{ dbi} > 6.0 \text{ dbi} \text{ so power density limit} = 30 - (6.01 - 6) = 29.99$$

8. OUT OF BAND EMISSIONS

8.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.


8.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

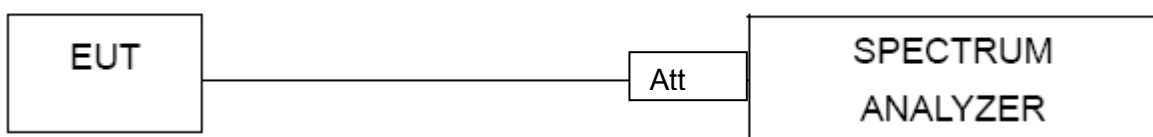

8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.6 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.


EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx


5.2G

5.15~5.25 GHz


(802.11a) Band Edge, Left Side

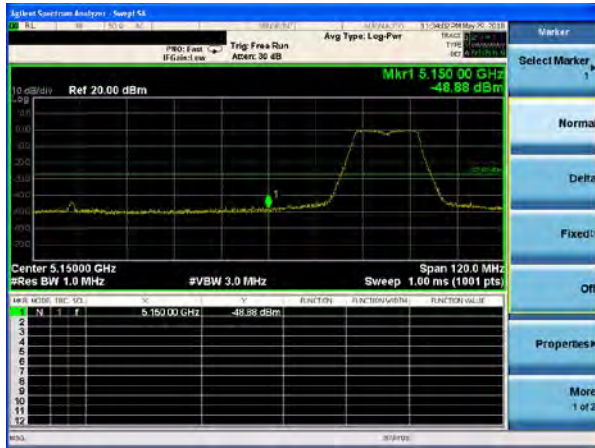


(802.11n20) Band Edge, Left Side

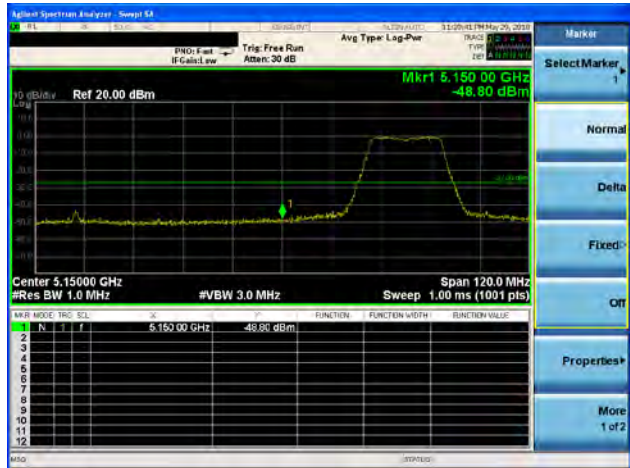

(802.11a) Band Edge, Right Side

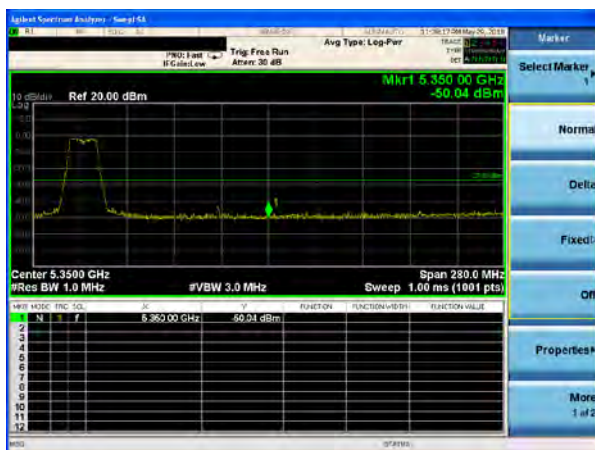

(802.11n20) Band Edge, Right Side

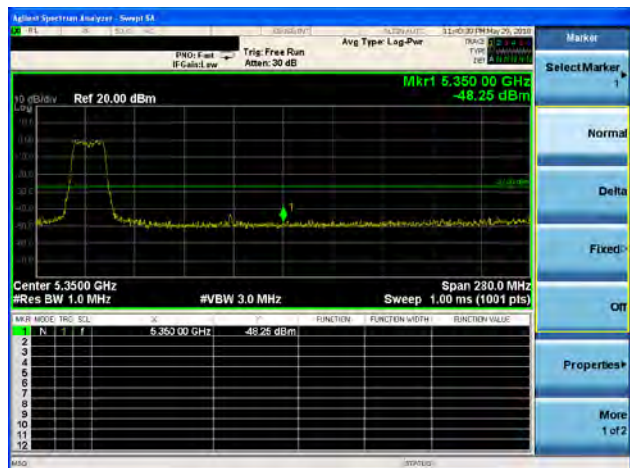


5.15~5.25 GHz


(802.11n40) Band Edge, Left Side




(802.11ac20) Band Edge, Left Side

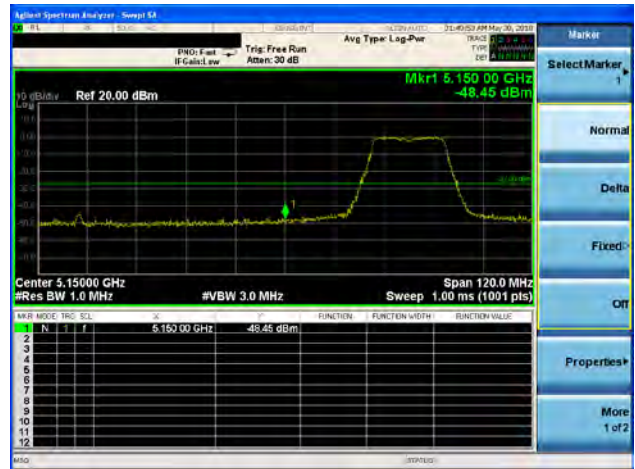

(802.11n40) Band Edge, Right Side

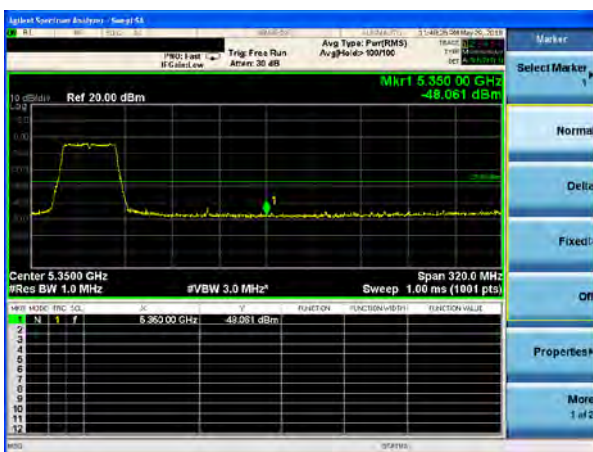

(802.11ac20) Band Edge, Right Side

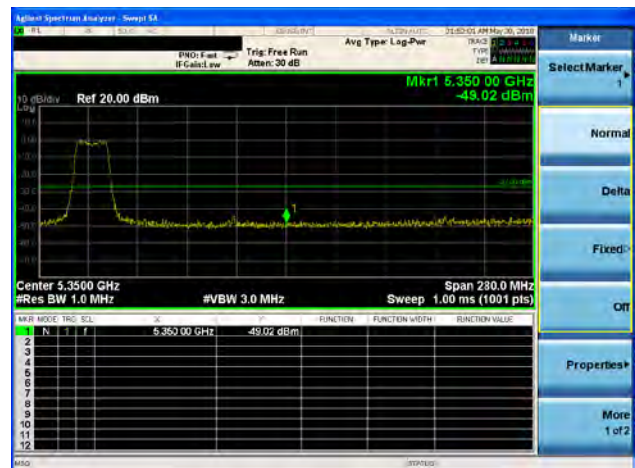


5.15~5.25 GHz


(802.11ac40) Band Edge, Left Side




(802.11ac80) Band Edge, Left Side

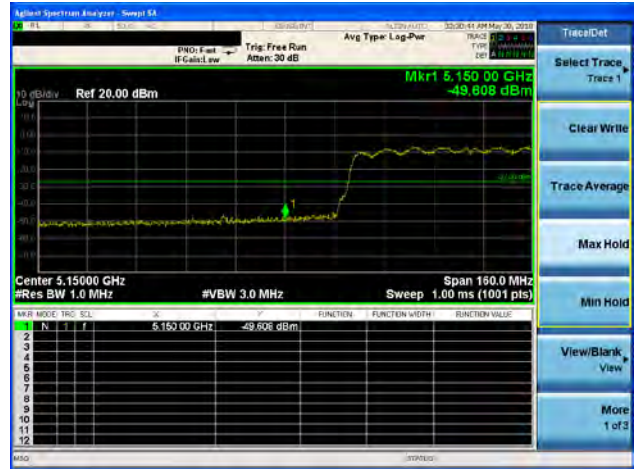

(802.11ac40) Band Edge, Right Side

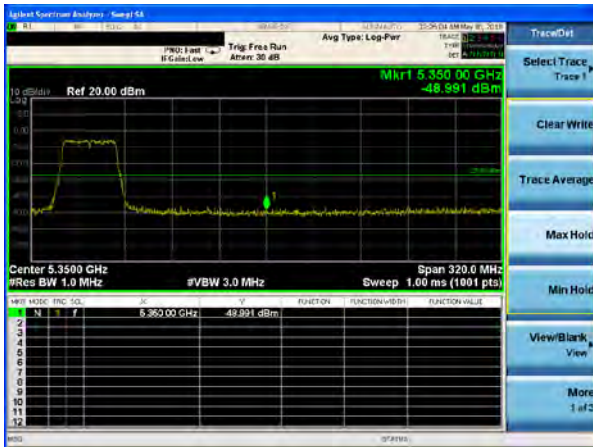

(802.11ac80) Band Edge, Right Side


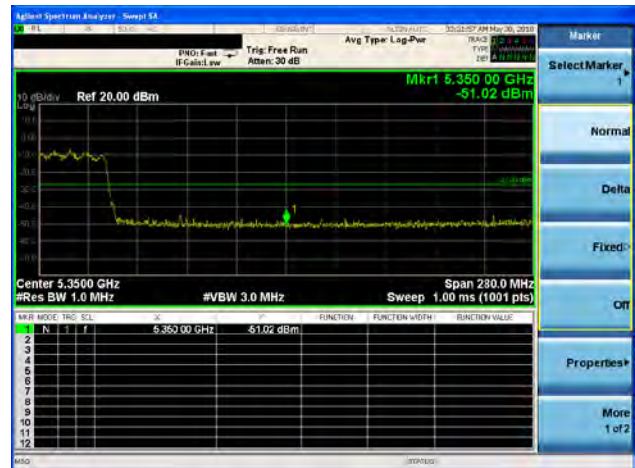


5.8G

5.75~5.85 GHz



(802.11a) Band Edge, Left Side

(802.11n20) Band Edge, Left Side

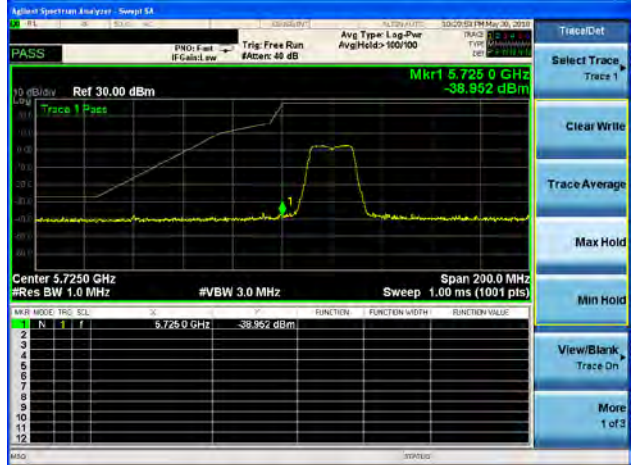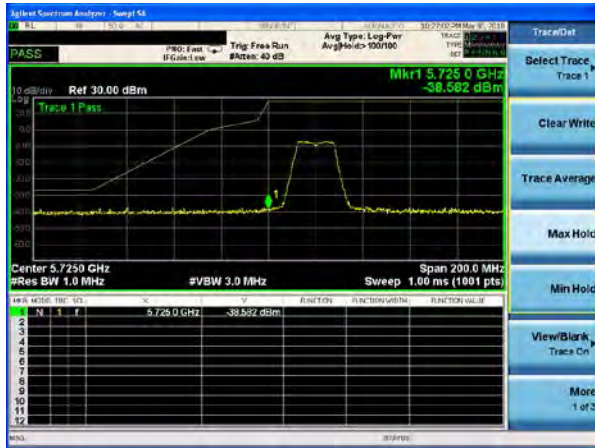


(802.11a) Band Edge, Right Side

(802.11n20) Band Edge, Right Side

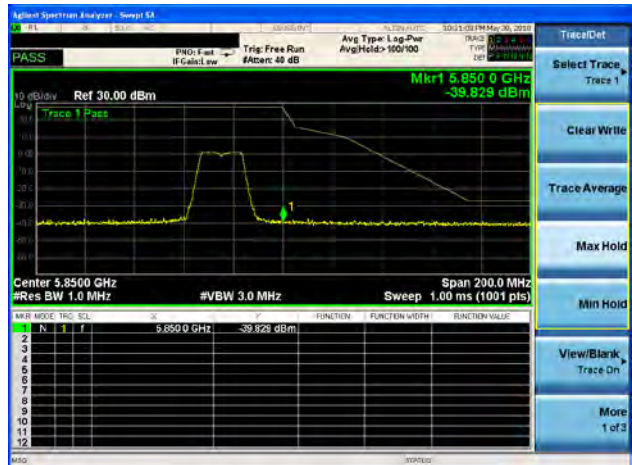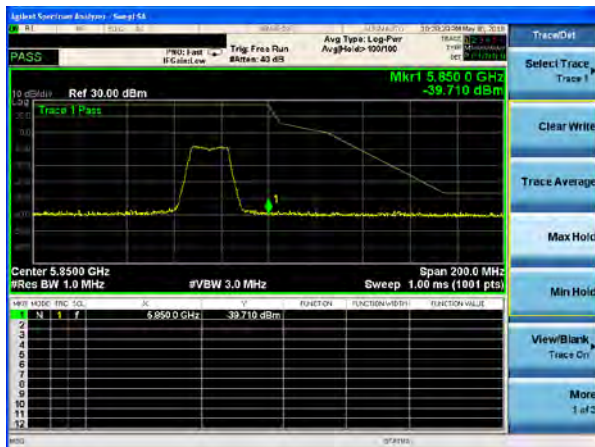


5.75~5.85 GHz


(802.11n40) Band Edge, Left Side

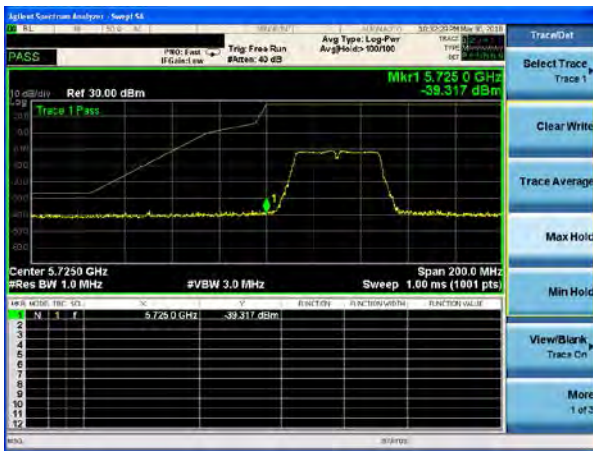


(802.11ac20) Band Edge, Left Side

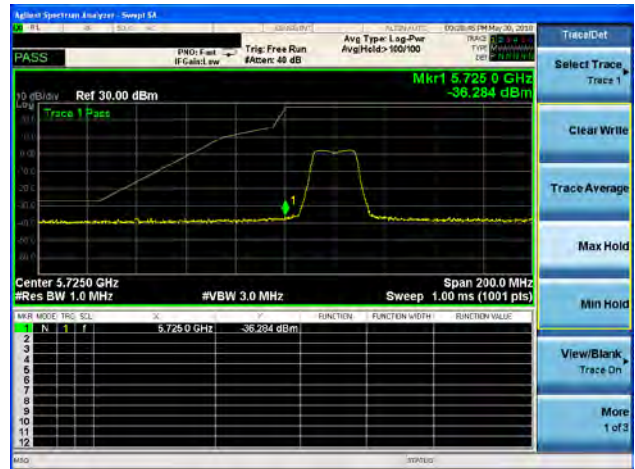

(802.11n40) Band Edge, Right Side

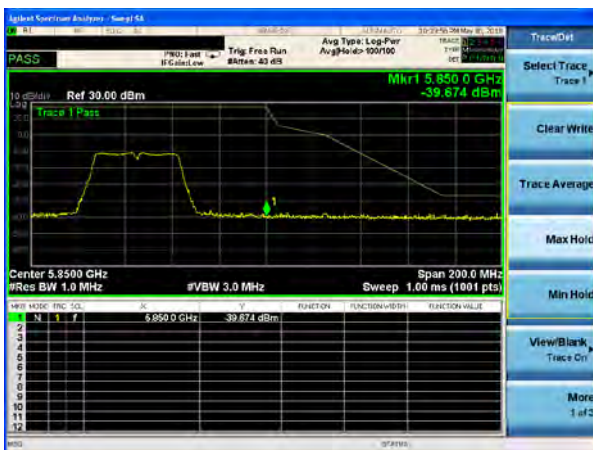

(802.11ac20) Band Edge, Right Side

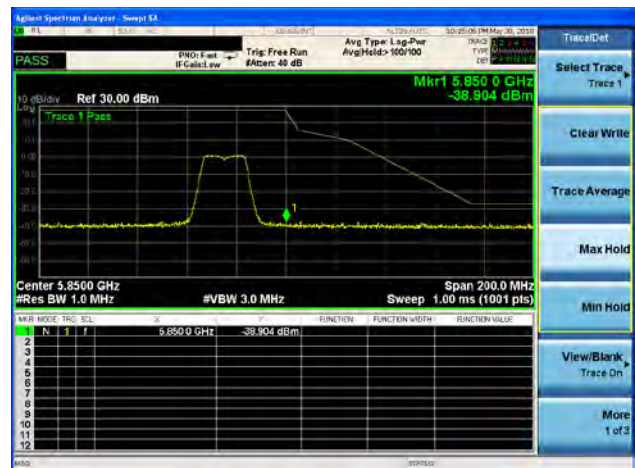


5.75~5.83 GHz


(802.11ac40) Band Edge, Left Side



(802.11ac80) Band Edge, Left Side

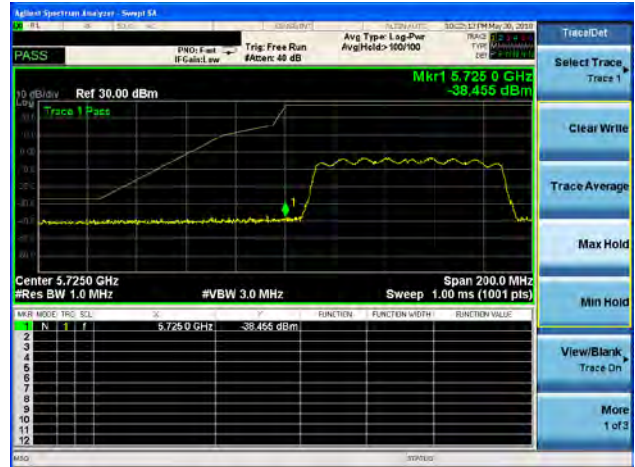

(802.11ac40) Band Edge, Right Side

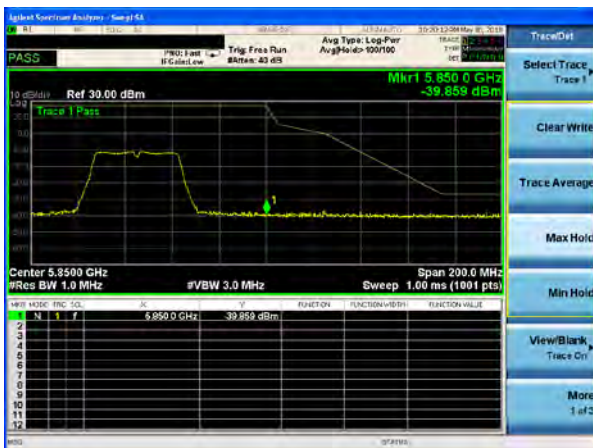

(802.11ac80) Band Edge, Right Side



9.SPURIOUS RF CONDUCTED EMISSIONS

9.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

9.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

9.3 TEST SETUP

Please refer to Section 6.1 of this test report.

9.4 TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequency range from 9KHz to 26.5GHz.

9.5 TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

EUT has two antennas, and different modes support different transmit mode what describe as Following form:

Mode	Tx/Rx
802.11a	1Tx, 2Rx
802.11n/ac	1Tx /2Tx, 2Rx

5.2G Test Plot

802.11a on channel 36



802.11a on channel 40



802.11a on channel 36



802.11a on channel 40



Test Plot

802.11a on channel 48



802.11n20 on channel 36



802.11a on channel 48




802.11n20 on channel 36



Test Plot

802.11n20 on channel 40

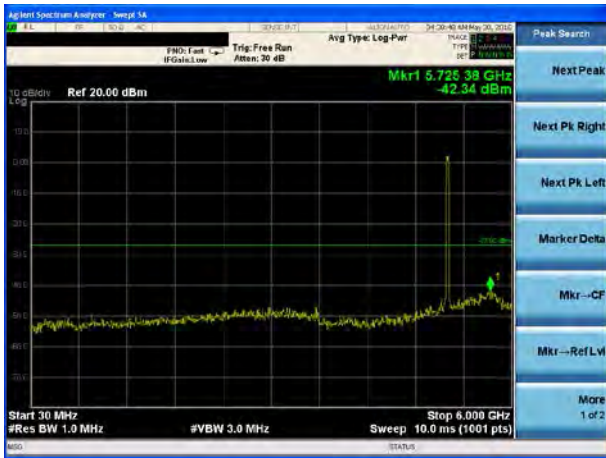

802.11n20 on channel 48



802.11n20 on channel 40



802.11n20 on channel 48



Test Plot

802.11n40 on channel 38



802.11n40 on channel 46



802.11n40 on channel 38



802.11n40 on channel 46



Test Plot

802.11ac20 on channel 36



802.11ac20 on channel 40



802.11ac20 on channel 36



802.11ac20 on channel 40



Test Plot

802.11ac20 on channel 48



802.11ac40 on channel 38



802.11ac20 on channel 48



802.11ac40 on channel 38



Test Plot

802.11ac40 on channel 46



802.11ac80 on channel 42



802.11 ac40 on channel 46



802.11 ac80 on channel 42



5.8G Test Plot

802.11a on channel 149



802.11a on channel 157



802.11a on channel 149



802.11a on channel 157



Test Plot

802.11a on channel 165



802.11n20 on channel 149



802.11a on channel 165




802.11n20 on channel 149



Test Plot

802.11n20 on channel 157

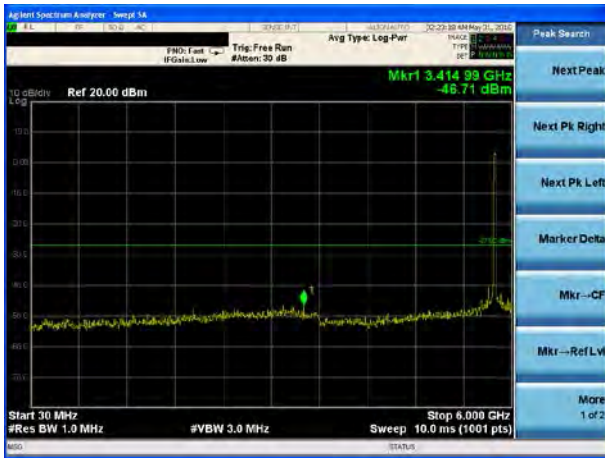

802.11n20 on channel 165



802.11n20 on channel 157



802.11n20 on channel 165



Test Plot

802.11n40 on channel 151



802.11n40 on channel 159



802.11n40 on channel 151



802.11n40 on channel 159



Test Plot

802.11ac20 on channel 149



802.11ac20 on channel 157



802.11ac20 on channel 149



802.11ac20 on channel 157



Test Plot

802.11ac20 on channel 165



802.11ac40 on channel 151



802.11ac20 on channel 165



802.11ac40 on channel 151



Test Plot

802.11ac40 on channel 159



802.11ac80 on channel 155



802.11 ac40 on channel 159



802.11 ac80 on channel 155



10. Frequency Stability Measurement

10.1 LIMIT


Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

10.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 70^\circ\text{C}$.

10.3 TEST SETUP LAYOUT

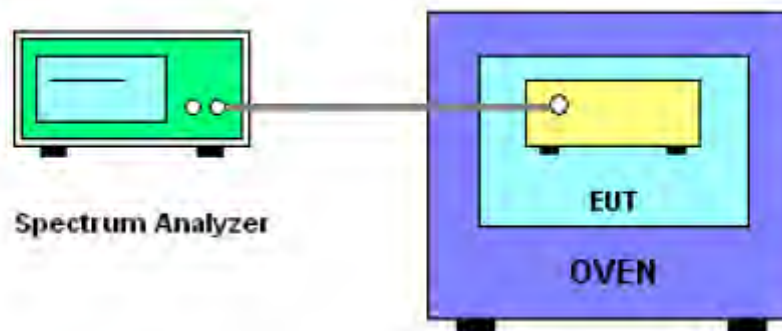

10.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

10.5 TEST RESULTS

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5180.0124	5180	0.0124	-2.3919
		V max (V)	21.85	5180.0156	5180	0.0156	-3.0116
		V min (V)	16.15	5180.0125	5180	0.0125	-2.4131
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5180MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	19	T (°C)	-20	5180.0124	5180	0.0124	-2.3938
		T (°C)	-10	5180.0126	5180	0.0126	-2.4324
		T (°C)	0	5180.0196	5180	0.0196	-3.7838
		T (°C)	10	5180.0127	5180	0.0127	-2.4517
		T (°C)	20	5180.0132	5180	0.0132	-2.5483
		T (°C)	30	5180.0146	5180	0.0146	-2.8185
		T (°C)	40	5180.0129	5180	0.0129	-2.4903
		T (°C)	50	5180.0155	5180	0.0155	-2.9923
		T (°C)	60	5180.0173	5180	0.0173	-3.3398
		T (°C)	70	5180.0129	5180	0.0129	-2.4903
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5200.0169	5200	0.0169	-3.2500
		V max (V)	21.85	5200.0127	5200	0.0127	-2.4423
		V min (V)	16.15	5200.0145	5200	0.0145	-2.7885
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5200MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	5	T (°C)	-20	5200.0136	5200	0.0136	-2.6154
		T (°C)	-10	5200.0129	5200	0.0129	-2.4808
		T (°C)	0	5200.0143	5200	0.0143	-2.7500
		T (°C)	10	5200.0147	5200	0.0147	-2.8269
		T (°C)	20	5200.0119	5200	0.0119	-2.2885
		T (°C)	30	5200.0138	5200	0.0138	-2.6538
		T (°C)	40	5200.0165	5200	0.0165	-3.1731
		T (°C)	50	5200.0148	5200	0.0148	-2.8462
		T (°C)	60	5200.0124	5200	0.0124	-2.3846
		T (°C)	70	5200.0167	5200	0.0167	-3.2115
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5240.0169	5240	0.0169	-3.2252
		V max (V)	21.85	5240.0137	5240	0.0137	-2.6145
		V min (V)	16.15	5240.0159	5240	0.0159	-3.0344
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5240MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	19	T (°C)	-20	5240.0146	5240	0.0146	-2.7863
		T (°C)	-10	5240.0138	5240	0.0138	-2.6336
		T (°C)	0	5240.0157	5240	0.0157	-2.9962
		T (°C)	10	5240.0126	5240	0.0126	-2.4046
		T (°C)	20	5240.0132	5240	0.0132	-2.5191
		T (°C)	30	5240.0129	5240	0.0129	-2.4618
		T (°C)	40	5240.0161	5240	0.0161	-3.0725
		T (°C)	50	5240.0122	5240	0.0122	-2.3282
		T (°C)	60	5240.0175	5240	0.0175	-3.3397
		T (°C)	70	5240.0132	5240	0.0132	-2.5191
Limits				± 20 ppm			
Result				Complies			

EUT :	JMGO Smart Projector	Model Name. :	N7
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 19V
Test Mode :	TX Frequency(5745-5850MHz)		

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5745.00253	5745	0.00253	-0.4404
		V max (V)	21.85	5745.00862	5745	0.00862	-1.5004
		V min (V)	16.15	5745.00326	5745	0.00326	-0.5674
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5745MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	19	T (°C)	-20	5745.00329	5745	0.00329	-0.5727
		T (°C)	-10	5745.00651	5745	0.00651	-1.1332
		T (°C)	0	5745.00584	5745	0.00584	-1.0165
		T (°C)	10	5745.00965	5745	0.00965	-1.6797
		T (°C)	20	5745.00457	5745	0.00457	-0.7955
		T (°C)	30	5745.00637	5745	0.00637	-1.1088
		T (°C)	40	5745.00694	5745	0.00694	-1.2080
		T (°C)	50	5745.00876	5745	0.00876	-1.5248
		T (°C)	60	5745.00734	5745	0.00734	-1.2776
		T (°C)	70	5745.00624	5745	0.00624	-1.0862
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5785.01569	5785	0.01569	-2.7122
		V max (V)	21.85	5785.01650	5785	0.01650	-2.8522
		V min (V)	16.15	5785.01365	5785	0.01365	-2.3596
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5785MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	19	T (°C)	-20	5785.00639	5785	0.00639	-1.1046
		T (°C)	-10	5785.00254	5785	0.00254	-0.4391
		T (°C)	0	5785.00627	5785	0.00627	-1.0838
		T (°C)	10	5785.00539	5785	0.00539	-0.9317
		T (°C)	20	5785.00527	5785	0.00527	-0.9110
		T (°C)	30	5785.00651	5785	0.00651	-1.1253
		T (°C)	40	5785.00538	5785	0.00538	-0.9300
		T (°C)	50	5785.00489	5785	0.00489	-0.8453
		T (°C)	60	5785.00657	5785	0.00657	-1.1357
		T (°C)	70	5785.00597	5785	0.00597	-1.0320
Limits				± 20 ppm			
Result				Complies			

Voltage vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
T nom (°C)	20	V nom (V)	19.00	5825.00356	5825	0.00356	-0.6112
		V max (V)	21.85	5825.00657	5825	0.00657	-1.1279
		V min (V)	16.15	5825.00571	5825	0.00571	-0.9803
Limits				± 20 ppm			
Result				Complies			

Temperature vs. Frequency Stability

TEST CONDITIONS				Reference Frequency: 5825MHz			
				f	fc	Max. Deviation (MHz)	Max. Deviation (ppm)
V nom (V)	19	T (°C)	-20	5825.01459	5825	0.01459	-2.5047
		T (°C)	-10	5825.01364	5825	0.01364	-2.3416
		T (°C)	0	5825.01347	5825	0.01347	-2.3124
		T (°C)	10	5825.01425	5825	0.01425	-2.4464
		T (°C)	20	5825.01329	5825	0.01329	-2.2815
		T (°C)	30	5825.01527	5825	0.01527	-2.6215
		T (°C)	40	5825.01427	5825	0.01427	-2.4498
		T (°C)	50	5825.01692	5825	0.01692	-2.9047
		T (°C)	60	5825.01651	5825	0.01651	-2.8343
		T (°C)	70	5825.01547	5825	0.01547	-2.6558
Limits				± 20 ppm			
Result				Complies			

11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2 EUT ANTENNA

Antenna	Brand	Model Name (P/N)	Antenna Type	Connector	Antenna Gain(dBi)	
					5.2G	5.8G
A(main)	N/A	N/A	FPCB	I-PEX	3	3
B(aux)	N/A	N/A	FPCB	I-PEX	3	3

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

END OF REPORT