

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Smart Projector

ISSUED TO
SHENZHEN HOLATEK CO., LTD.

Rm.1001, Unit 4, Bld.B, Kexing Science Park, Keyuan Road, Nanshan District, Shenzhen, China



Tested by: *Zou Liu*

Zou Liu
(Engineer)

Date *Jun 22, 2018*

Approved by: *Wei Yanquan*

Wei Yanquan
(Chief Engineer)

Date *Jun 22, 2018*

Report No.: BL-SZ1840394-602

EUT Name: Smart Projector

Model Name: N7L (refer section 2.4)

Brand Name: JMGO

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: SMC-M61

Test Conclusion: Pass

Test Date: May 03, 2018 ~ May 23, 2018

Date of Issue: Jun. 22, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jun. 15, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jun. 22, 2018</u>	<u>Update the Description of Model name differentiation in section 2.4</u>

TABLE OF CONTENTS

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)..... 5

1.1 Identification of the Testing Laboratory..... 5

1.2 Identification of the Responsible Testing Location..... 5

1.3 Laboratory Condition..... 5

1.4 Announce..... 5

2 PRODUCT INFORMATION..... 6

2.1 Applicant Information..... 6

2.2 Manufacturer Information..... 6

2.3 Factory Information..... 6

2.4 General Description for Equipment under Test (EUT)..... 6

2.5 Ancillary Equipment..... 7

2.6 Technical Information..... 7

2.7 Additional Instructions..... 8

3 SUMMARY OF TEST RESULTS..... 10

3.1 Test Standards..... 10

3.2 Verdict..... 10

4 GENERAL TEST CONFIGURATIONS..... 11

4.1 Test Environments..... 11

4.2 Test Equipment List..... 11

4.3 Measurement Uncertainty..... 12

4.4 Description of Test Setup..... 13

4.4.1 For Antenna Port Test..... 13

4.4.2 For AC Power Supply Port Test..... 13

4.4.3 For Radiated Test (Below 30 MHz)..... 14

4.4.4 For Radiated Test (30 MHz-1 GHz)..... 14

4.4.5 For Radiated Test (Above 1 GHz)..... 15

4.5	Measurement Results Explanation Example.....	16
4.5.1	For conducted test items:.....	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards.....	17
5.1.2	Antenna Anti-Replacement Construction.....	17
5.1.3	Antenna Gain.....	18
5.2	Output Power.....	19
5.2.1	Test Limit.....	19
5.2.2	Test Setup.....	19
5.2.3	Test Procedure.....	19
5.2.4	Test Result.....	20
5.3	Occupied Bandwidth.....	21
5.3.1	Limit.....	21
5.3.2	Test Setup.....	21
5.3.3	Test Procedure.....	21
5.3.4	Test Result.....	21
5.4	Conducted Spurious Emission.....	22
5.4.1	Limit.....	22
5.4.2	Test Setup.....	22
5.4.3	Test Procedure.....	22
5.4.4	Test Result.....	23
5.5	Band Edge (Authorized-band band-edge).....	24
5.5.1	Limit.....	24
5.5.2	Test Setup.....	24
5.5.3	Test Procedure.....	24
5.5.4	Test Result.....	24
5.6	Conducted Emission.....	25
5.6.1	Limit.....	25
5.6.2	Test Setup.....	25
5.6.3	Test Procedure.....	25
5.6.4	Test Result.....	25

5.7	Radiated Spurious Emission.....	26
5.7.1	Limit.....	26
5.7.2	Test Setup.....	26
5.7.3	Test Procedure.....	26
5.7.4	Test Result.....	29
5.8	Band Edge (Restricted-band band-edge).....	30
5.8.1	Limit.....	30
5.8.2	Test Setup.....	30
5.8.3	Test Procedure.....	30
1.1.1	Test Result.....	30
5.9	Power Spectral density (PSD).....	31
5.9.1	Limit.....	31
5.9.2	Test Setup.....	31
5.9.3	Test Procedure.....	31
5.9.4	Test Result.....	31
ANNEX A	TEST RESULT.....	32
A.1	Output Power.....	32
A.2	Occupied Bandwidth.....	35
A.3	Conducted Spurious Emissions.....	40
A.4	Band Edge (Authorized-band band-edge).....	47
A.5	Conducted Emissions.....	52
A.6	Radiated Spurious Emission.....	58
A.7	Band Edge (Restricted-band band-edge).....	69
A.8	Power Spectral Density (PSD).....	71
ANNEX B	TEST SETUP PHOTOS.....	74
ANNEX C	EUT EXTERNAL PHOTOS.....	74
ANNEX D	EUT INTERNAL PHOTOS.....	74

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	SHENZHEN HOLATEK CO., LTD.
Address	Rm.1001, Unit 4, Bld.B, Kexing Science Park, Keyuan Road, Nanshan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	SHENZHEN HOLATEK CO., LTD.
Address	Rm.1001, Unit 4, Bld.B, Kexing Science Park, Keyuan Road, Nanshan District, Shenzhen, China

2.3 Factory Information

Factory	FOXSTAR TECHNOLOGY CO., LTD
Address	Building4, Foxconn District, Longsheng Industrial Park, LONGSHENG ROAD, 473000 NANYANG CITY, HENNAN PROVINCE, CHINA

2.4 General Description for Equipment under Test (EUT)

EUT Name	Smart Projector
Model Name Under Test	N7L
Series Model Name	G7, N7H, N70, G7S, G7 Pro
Description of Model name differentiation	Only with different model name for marketing purpose.
Hardware Version	M61 MB Ver D
Software Version	1.0.16
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

Note:

1. The product contains two RF modules(**F21AUUM13-W2** and **BT8633**).

2. F21AUUM13-W2 module:

Supports IEEE 802.11 a/b/g/n/ac(1TX/1RX) and Bluetooth.

Supports two transmit chains which marked as ANT1 and ANT2 for testing in the report.

Both ANT 1 and ANT 2 support transmit and receive functions of IEEE 802.11 a/b/g/n/ac , but only one of them will be used at one time.

Both ANT 1 and ANT 2 support transmit and receive functions of Bluetooth , but only one of them will be used at one time.

3. BT8633 module:

Only supports Bluetooth.

Supports one transmit chain which marked as ANT 3 in the report.

F21AUUM13-W2 module and BT8633 module can not be used at one time.

2.5 Ancillary Equipment

Ancillary Equipment 1	Adapter	
	Brand Name	Huntkey
	Model No.	HKA09019047-6P
	Serial No.	N/A
	Rated Input	100-240 V~, 50 / 60 Hz, 1.5 A
	Rated Output	19 V= 4.74 A

2.6 Technical Information

Network and Wireless connectivity	Bluetooth 4.1 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n (HT20/40), 802.11ac
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS	
Modulation Type	GFSK	
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location	
Transfer Rate	1 Mbps	
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.	
Number of channel	40 (at intervals of 2 MHz)	
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)	
Antenna Type	ANT1	PIFA Antenna (RF module:F21AUUM13-W2)
	ANT2	PIFA Antenna (RF module:F21AUUM13-W2)
	ANT3	PIFA Antenna (RF module: BT8633)
Antenna Gain	ANT1	2.41 dBi (RF module:F21AUUM13-W2)
	ANT2	2.53 dBi (RF module:F21AUUM13-W2)
	ANT3	2.50 dBi (RF module: BT8633)
Antenna System(MIMO Smart Antenna)	N/A	

Note:

1. The product contains two RF modules(**F21AUUM13-W2** and **BT8633**).

2. F21AUUM13-W2 module:

Supports IEEE 802.11 a/b/g/n/ac(1TX/1RX) and Bluetooth.

Supports two transmit chains which marked as ANT1 and ANT2 for testing in the report.

Both ANT 1 and ANT 2 support transmit and receive functions of IEEE 802.11 a/b/g/n/ac , but only one of them will be used at one time.

Both ANT 1 and ANT 2 support transmit and receive functions of Bluetooth , but only one of them will be used at one time.

3. BT8633 module:

Only supports Bluetooth.

Supports one transmit chain which marked as ANT 3 in the report.

4. F21AUUM13-W2 module and BT8633 module can not be used at one time.

2.7 Additional Instructions

ANT1/ANT2


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	Bluetooth MP Tool		
Support Units (Software installation media)	Description	Manufacturer	Model
		Notebook	Lenovo
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	Power parameter Settings is 0xe9
	CH19	2440	
	CH39	2480	

Run Software

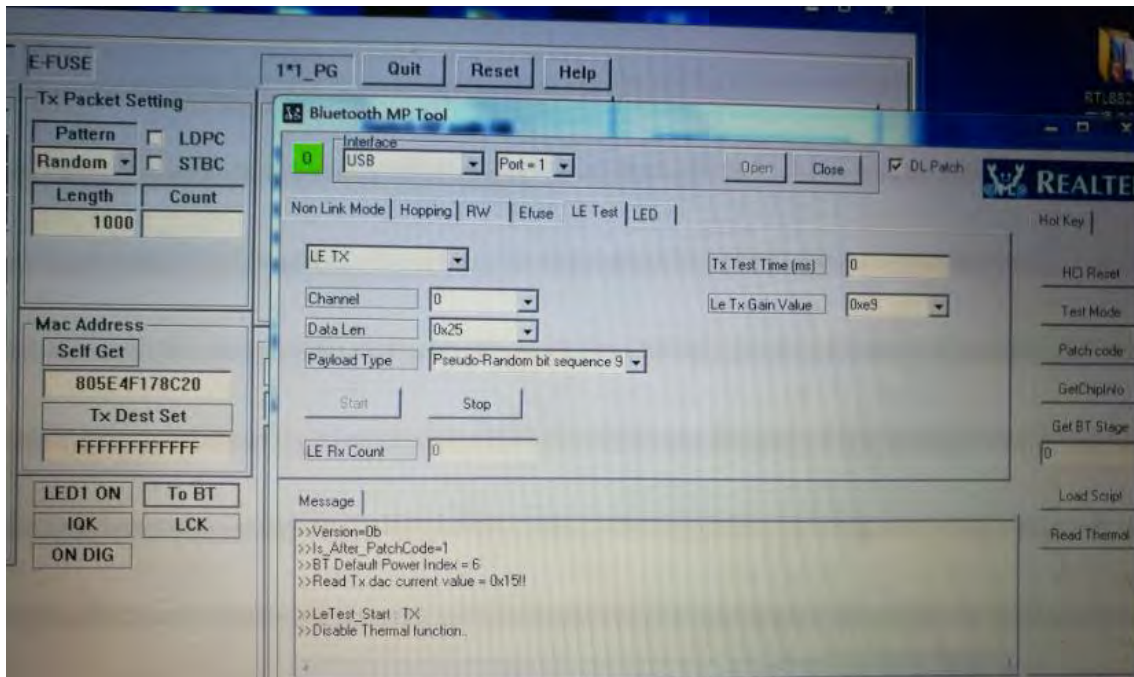


ANT3

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMU.
------	---

Power level setup in software			
Test Software Version	BlueTest3		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	TX LEVEL is built-in set parameters and cannot be changed and selected.
	CH19	2440	
	CH39	2480	

Run Software

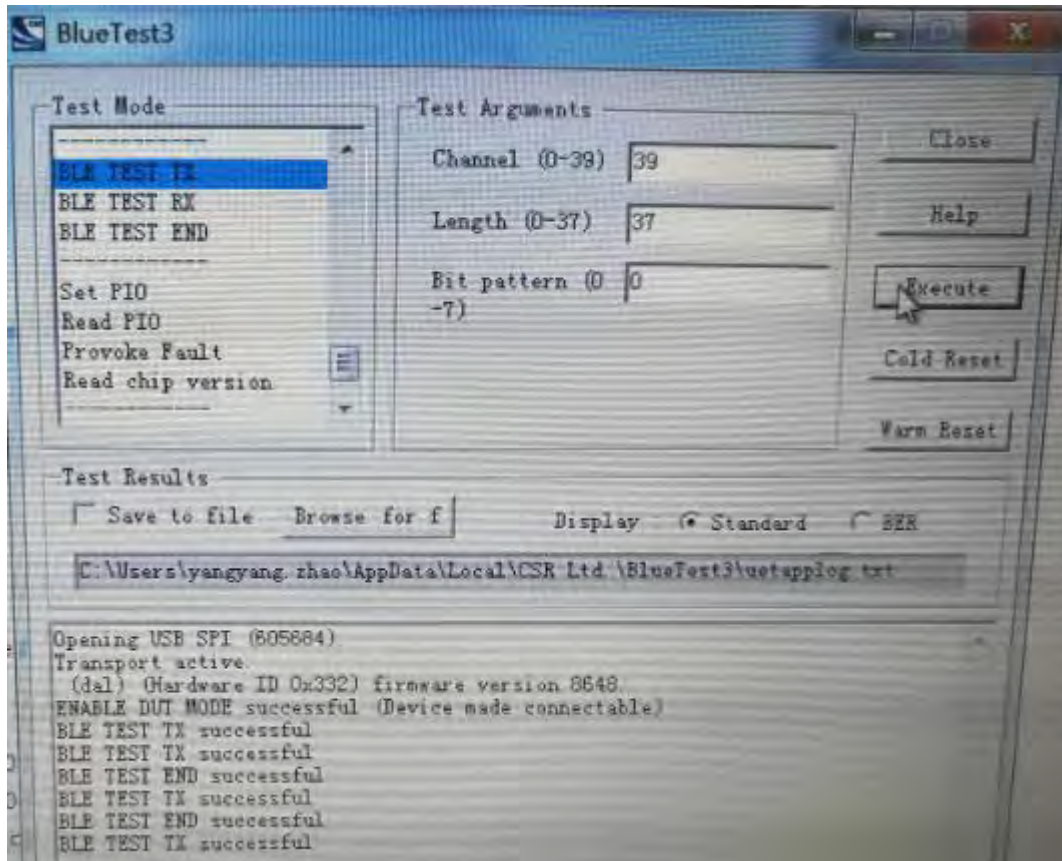

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	--	N/A	N/A ^{Note2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	120 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2017.06.12	2018.06.11
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2017.06.12	2018.06.11
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2017.09.07	2018.09.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2017.06.22	2018.06.21
LISN	SCHWARZBECK	NSLK 8127	8127-687	2017.06.22	2018.06.21
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2017.06.12	2018.06.11
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2017.06.12	2018.06.11
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2017.06.22	2018.06.21
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2017.06.27	2018.06.26
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2017.06.22	2018.06.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400 KF	J211060273	N/A	2019.01.06
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.24	2019.02.23
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2016.08.09	2018.08.08
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Mouth Simulator	B&K	4227	2423931	2017.11.16	2018.11.15
Sound Calibrator	B&K	4231	2430337	2017.11.16	2018.11.15
Sound Level Meter	B&K	NL-20	00844023	2017.11.16	2018.11.15
Ear Simulator	B&K	4185	2409449	2017.11.16	2018.11.15
Ear Simulator	B&K	4195	2418189	2017.11.16	2018.11.15
Audio analyzer	B&K	UPL 16	100129	2017.11.16	2018.11.15

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$

4.4 Description of Test Setup

4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

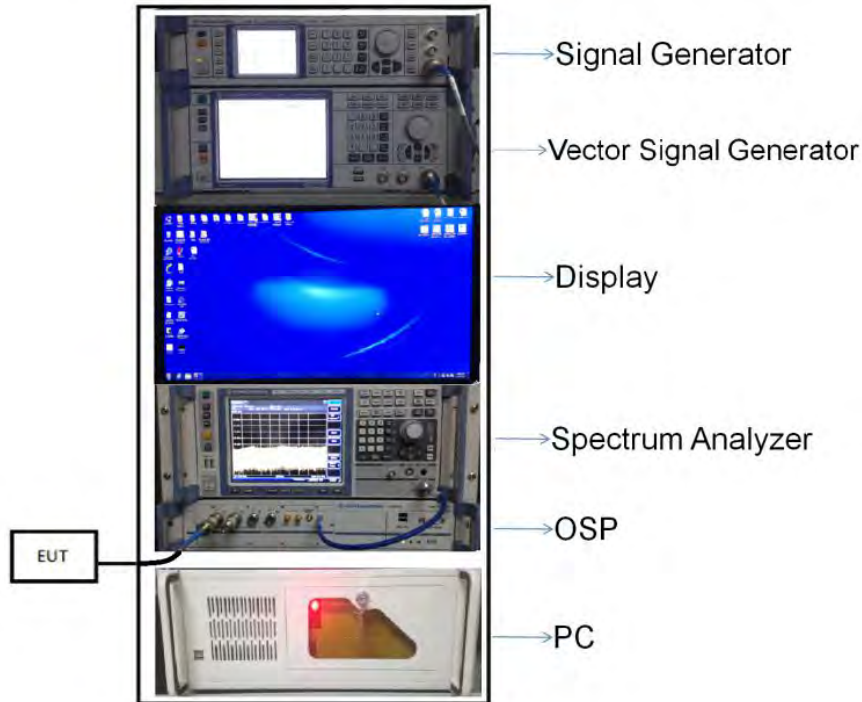


(Diagram 1)

4.4.2 For AC Power Supply Port Test

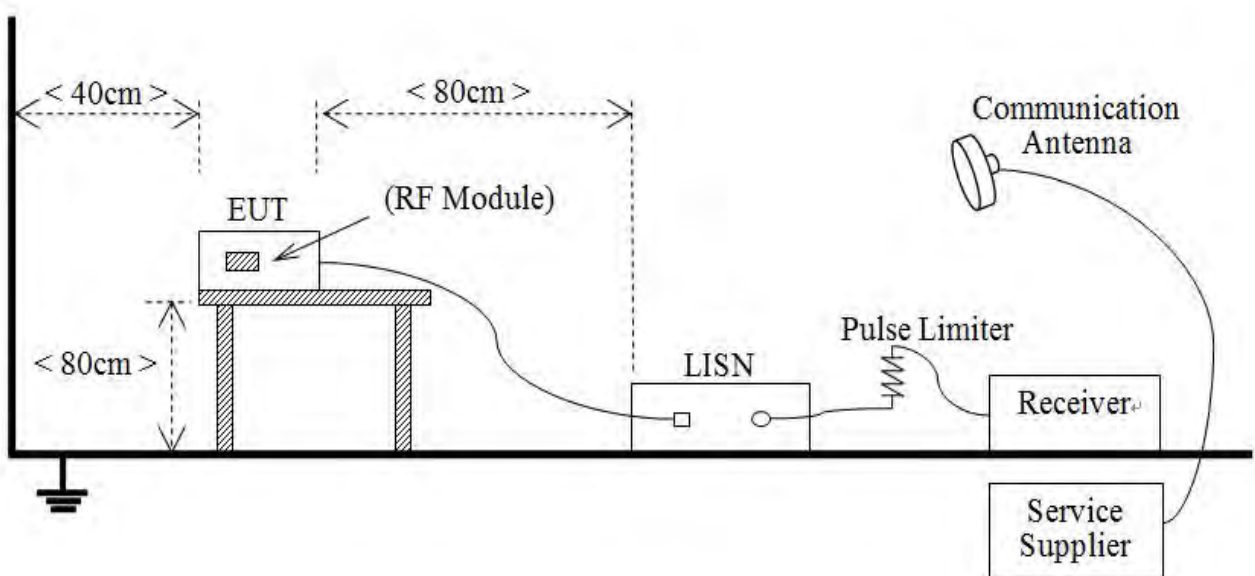


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

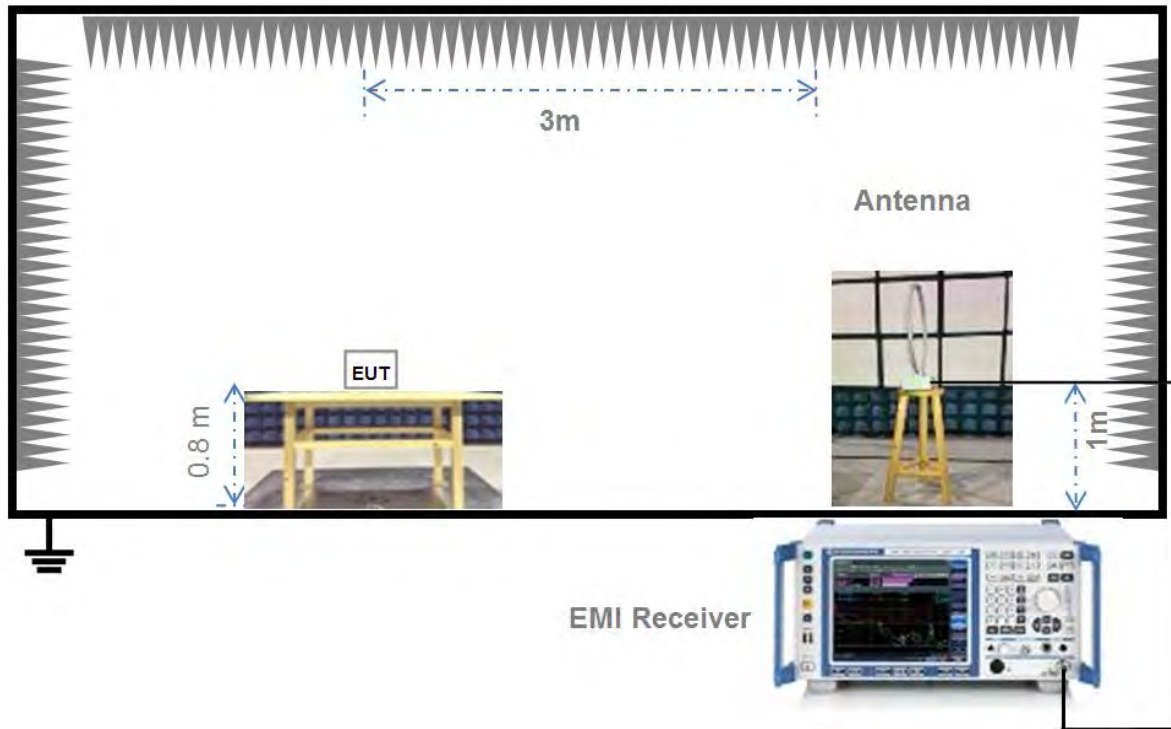


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

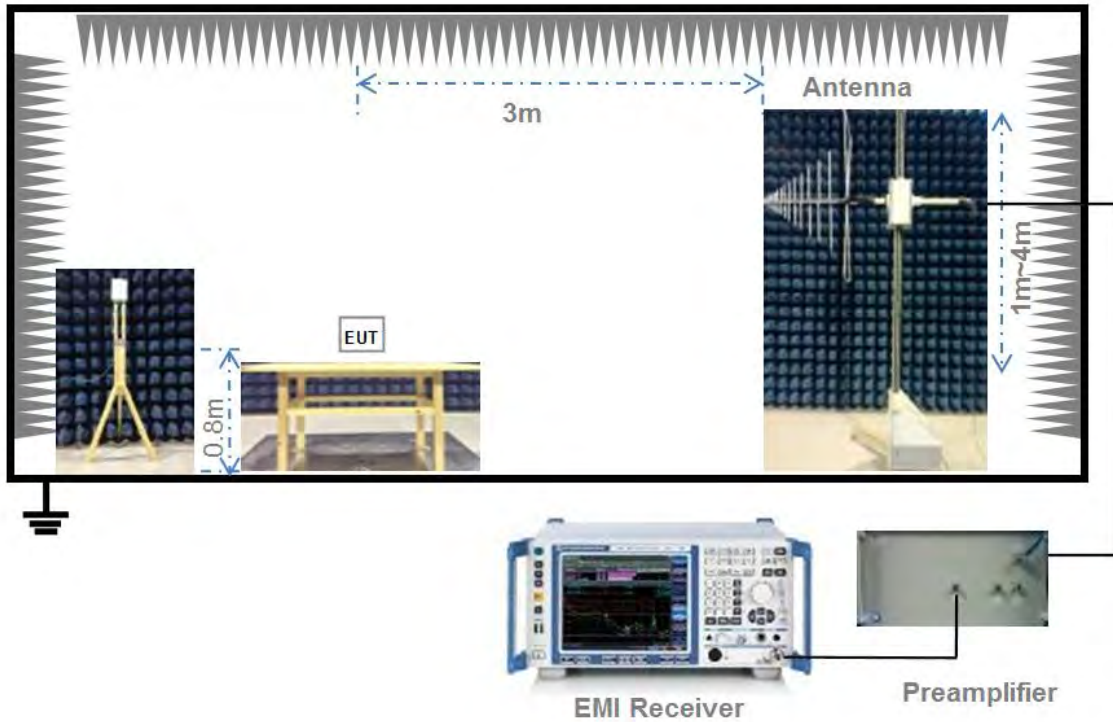

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

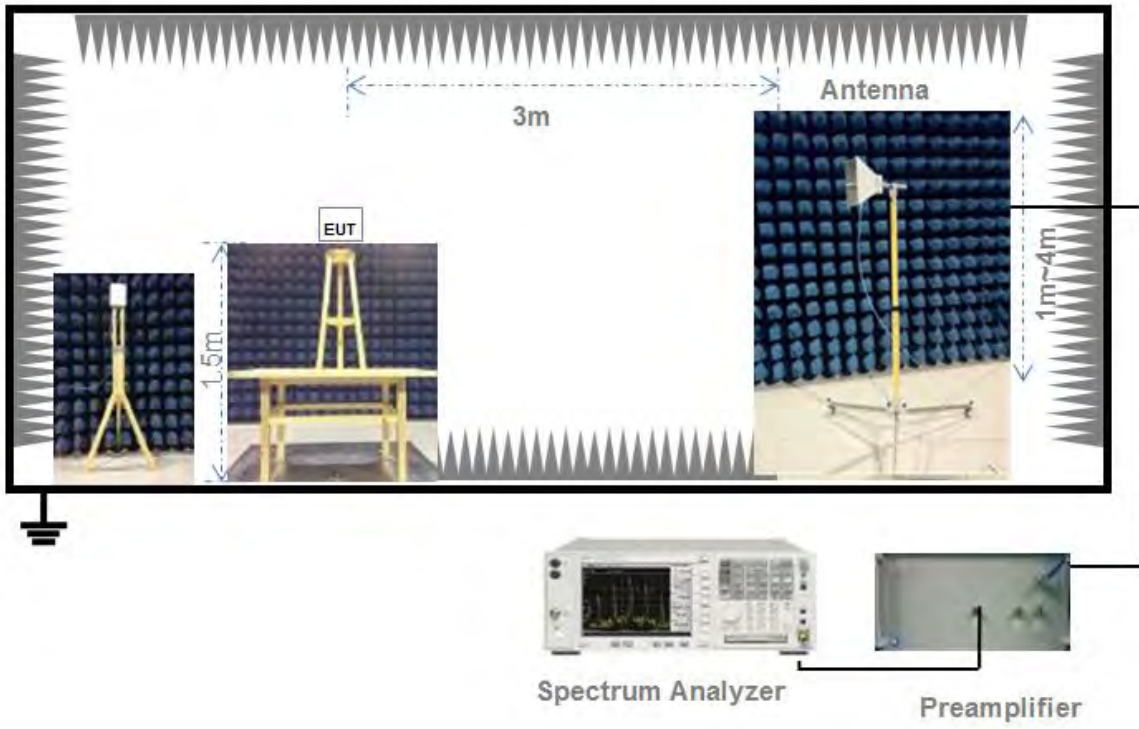

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
Compliance with 15.203, use of a standard antenna jack or electrical connector is prohibited.	The antenna is the unique connector with a wire antenna.

Reference Documents	Item
Photo	

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW \geq DTS bandwidth.

Set VBW $\geq 3 \times$ RBW.

Set span $\geq 3 \times$ RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.

Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b).

Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V}/\text{m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V}/\text{m}@3\text{m}$ (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding

measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).

e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

f) Compare the resultant electric field strength level to the applicable limit.

g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW ≥ 3 x RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
-----------	-----

9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

1.1.1 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW ≥ 3 RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Peak Power Test Data

ANT1

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE)		dBm	mW	
	dBm	mW			
Low	8.61	7.26	30	1000	Pass
Middle	8.94	7.83			Pass
High	8.30	6.76			Pass

ANT2

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE)		dBm	mW	
	dBm	mW			
Low	8.41	6.93	30	1000	Pass
Middle	8.65	7.33			Pass
High	8.06	6.40			Pass


ANT3

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK(BLE)		dBm	mW	
	dBm	mW			
Low	0.06	1.01	30	1000	Pass
Middle	2.97	1.98			Pass
High	3.47	2.22			Pass

Test plots

ANT1

GFSK(BLE) LOW CHANNEL

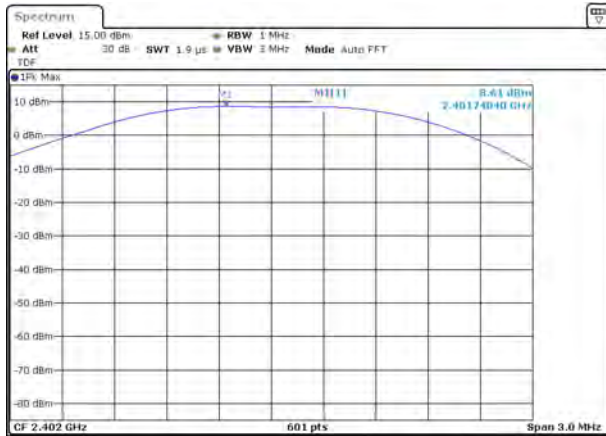


Date: 8 MAY 2018 15:24:16

GFSK(BLE) MIDDLE CHANNEL



Date: 8 MAY 2018 15:29:33


GFSK(BLE) HIGH CHANNEL

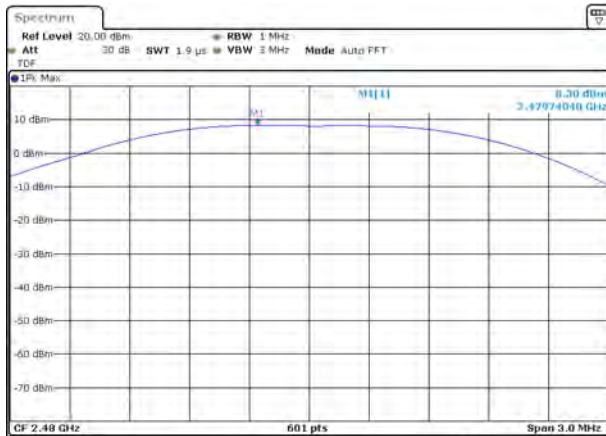

Date: 8 MAY 2018 15:28:44


ANT2

GFSK(BLE) LOW CHANNEL

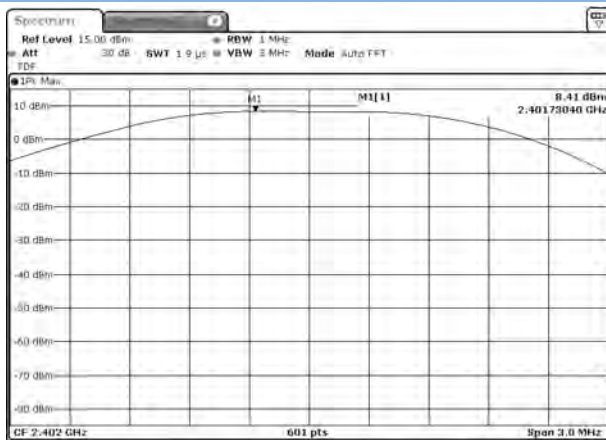


Date: 11 MAY 2018 14:15:40

GFSK(BLE) MIDDLE CHANNEL

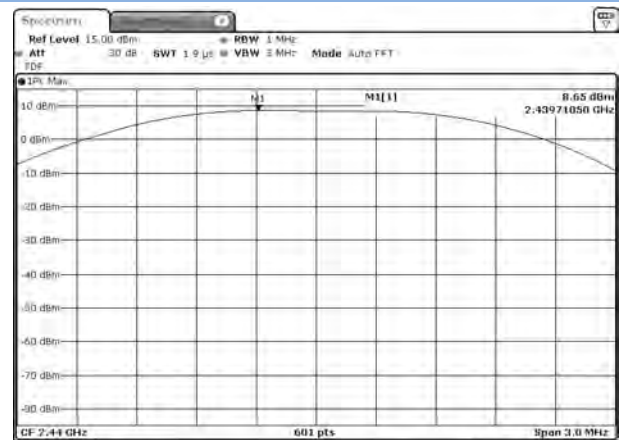

Date: 11 MAY 2018 14:17:53


GFSK(BLE) HIGH CHANNEL

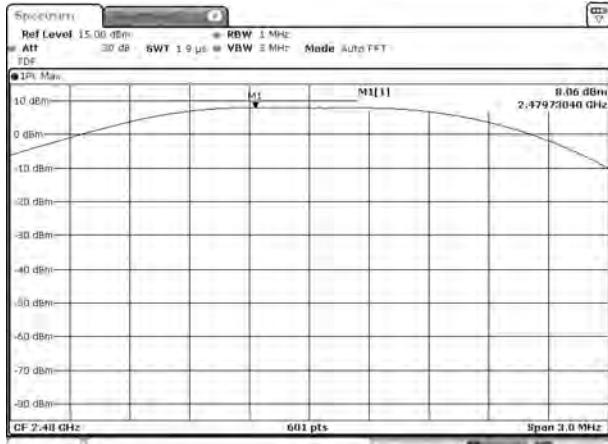

Date: 13 MAY 2018 14:19:41


ANT3

GFSK(BLE) LOW CHANNEL

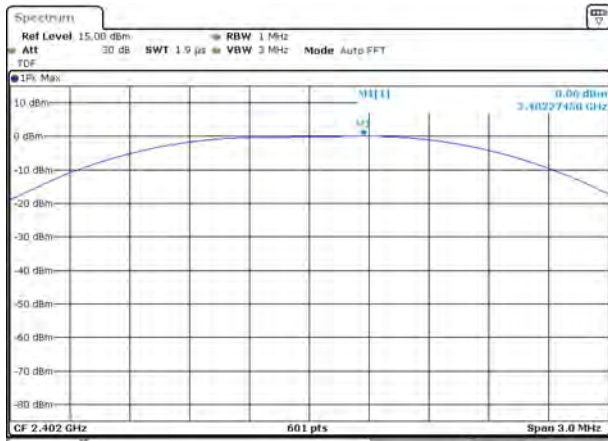


Date: 23 MAY 2018 10:22:42

GFSK(BLE) MIDDLE CHANNEL

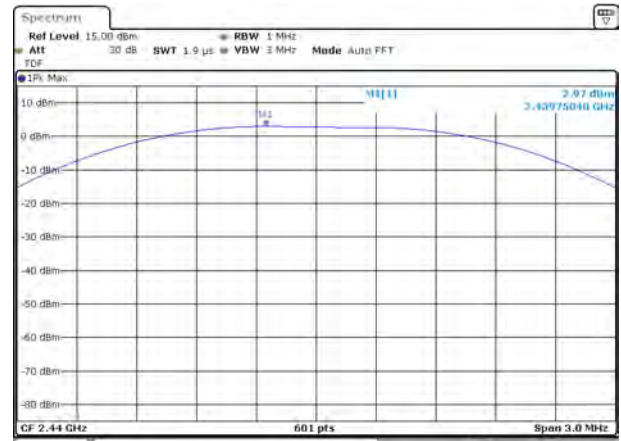

Date: 23 MAY 2018 10:26:27

GFSK(BLE) HIGH CHANNEL

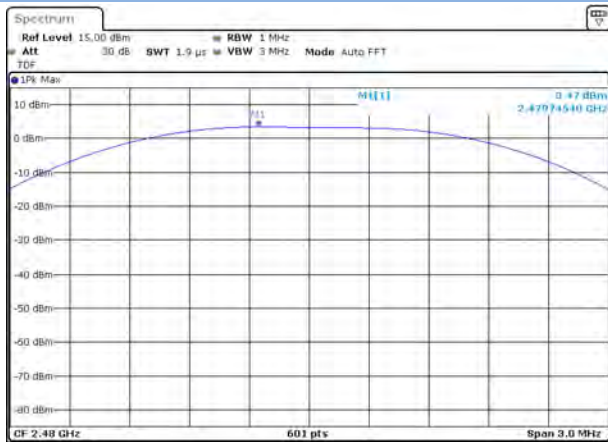

Date: 23 MAY 2018 10:28:38

A.2 Occupied Bandwidth

Test Data

ANT1

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (KHz)	99% Bandwidth (KHz)	6 dB Bandwidth Limits (KHz)
Low Channel	699.951	1046.310	≥500
Middle Channel	717.285	1037.627	≥500
High Channel	743.408	1028.944	≥500

ANT2

Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (KHz)	99% Bandwidth (KHz)	6 dB Bandwidth Limits (KHz)
Low Channel	747.803	1028.944	≥500
Middle Channel	756.592	1037.627	≥500
High Channel	752.197	1041.968	≥500

ANT3


Test Mode	GFSK (BLE)		
Channel	6 dB Bandwidth (KHz)	99% Bandwidth (KHz)	6 dB Bandwidth Limits (KHz)
Low Channel	695.557	1028.944	≥500
Middle Channel	691.406	1007.236	≥500
High Channel	700.195	1020.260	≥500

Test plots

ANT1


6 dB Bandwidth

GFSK (BLE) LOW CHANNEL

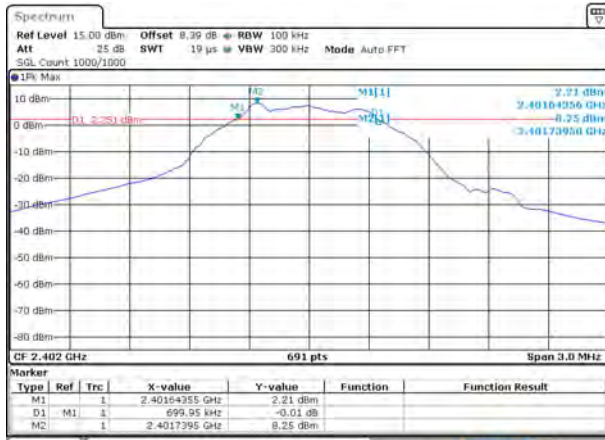


Date: 8 MAY 2018 15:24:20

GFSK (BLE) MIDDLE CHANNEL

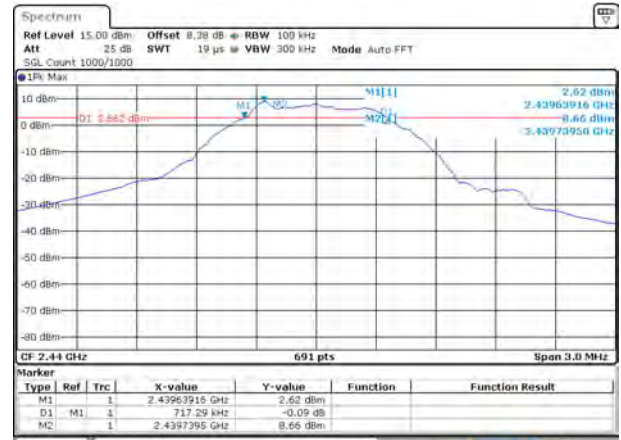

Date: 8 MAY 2018 15:28:37

GFSK (BLE) HIGH CHANNEL

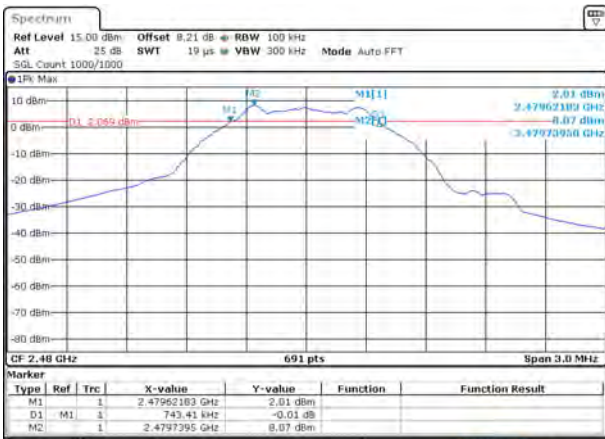

Date: 8 MAY 2018 15:28:49

99% Bandwidth

GFSK (BLE) LOW CHANNEL



Date: 8 MAY 2018 15:24:25

GFSK (BLE) MIDDLE CHANNEL



Date: 8 MAY 2018 15:28:42


GFSK (BLE) HIGH CHANNEL




ANT2

6 dB Bandwidth

GFSK (BLE) LOW CHANNEL

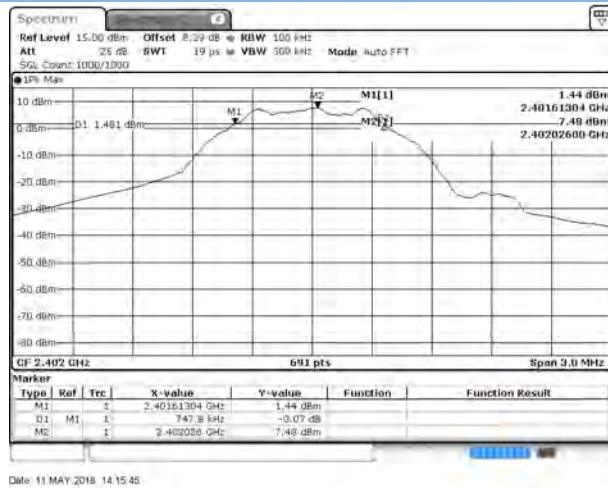

GFSK (BLE) MIDDLE CHANNEL

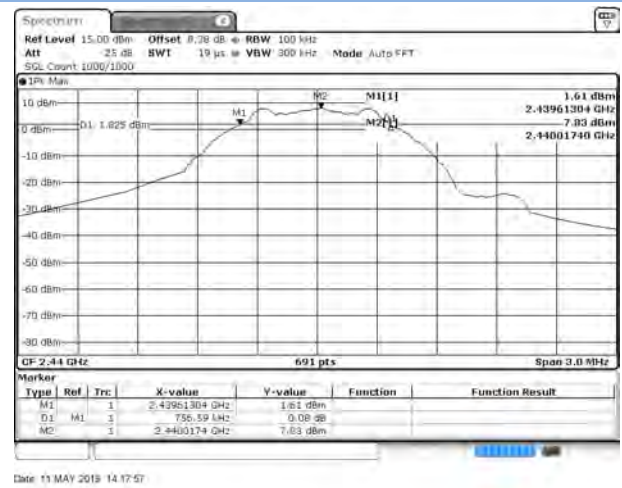

GFSK (BLE) HIGH CHANNEL




99% Bandwidth

GFSK (BLE) LOW CHANNEL



Date: 11 MAY 2019 14:15:50

GFSK (BLE) MIDDLE CHANNEL

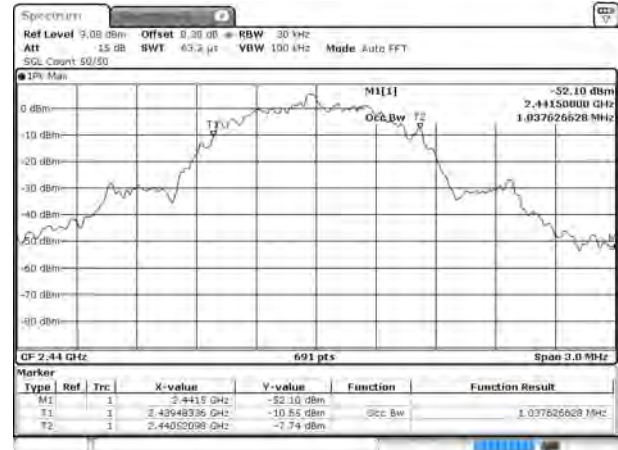

Date: 11 MAY 2019 14:18:03

GFSK (BLE) HIGH CHANNEL




Date: 11 MAY 2019 14:19:51

ANT3


6 dB Bandwidth

GFSK (BLE) LOW CHANNEL

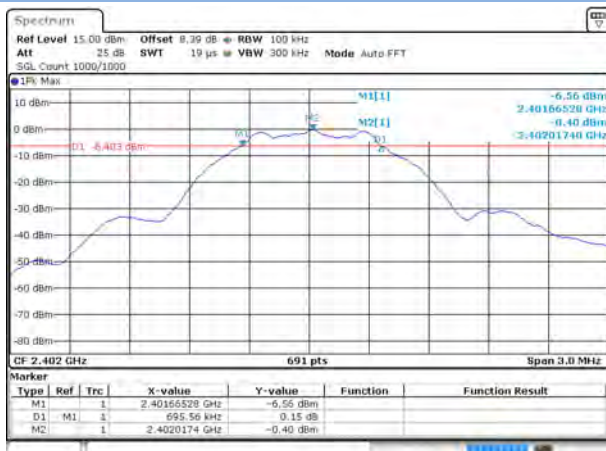


Date: 23 MAY 2018 10:22:46

GFSK (BLE) MIDDLE CHANNEL

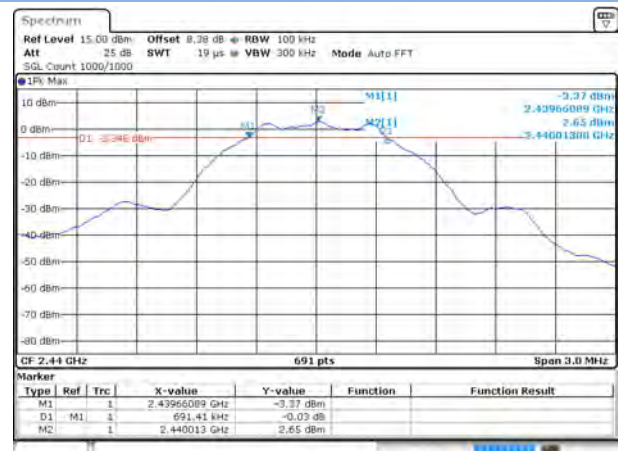

Date: 23 MAY 2018 10:26:32

GFSK (BLE) HIGH CHANNEL

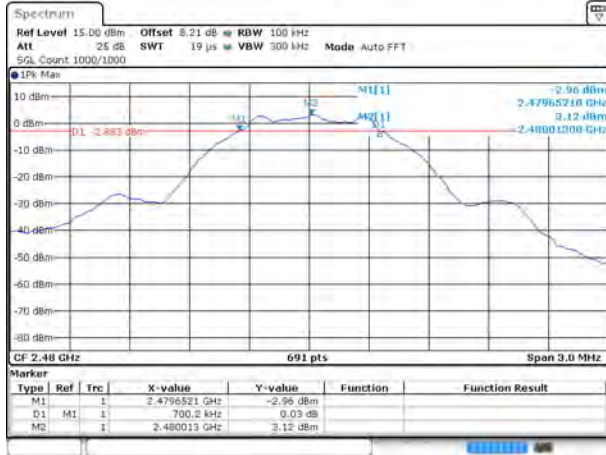

Date: 23 MAY 2016 10:28:40

99% Bandwidth

GFSK (BLE) LOW CHANNEL



Date: 23 MAY 2016 10:22:52

GFSK (BLE) MIDDLE CHANNEL



Date: 23 MAY 2016 10:26:37

GFSK (BLE) HIGH CHANNEL



Date: 23 MAY 2016 10:28:45

A.3 Conducted Spurious Emissions

Test Data

ANT1

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.70	8.37	-11.63	Pass
Middle	-40.38	8.69	-11.31	Pass
High	-40.14	8.06	-11.94	Pass

ANT2

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-40.07	7.58	-12.42	Pass
Middle	-40.28	7.84	-12.16	Pass
High	-40.95	7.22	-12.78	Pass


ANT3

GFSK (BLE)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-34.94	-0.27	-20.27	Pass
Middle	-30.10	2.67	-17.33	Pass
High	-29.22	3.20	-16.80	Pass


Test Plots

ANT1


GFSK (BLE) LOW CHANNEL , CARRIER LEVEL

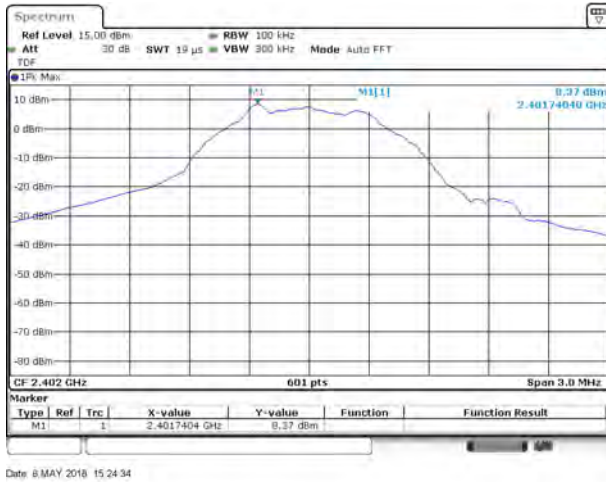


GFSK (BLE)LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

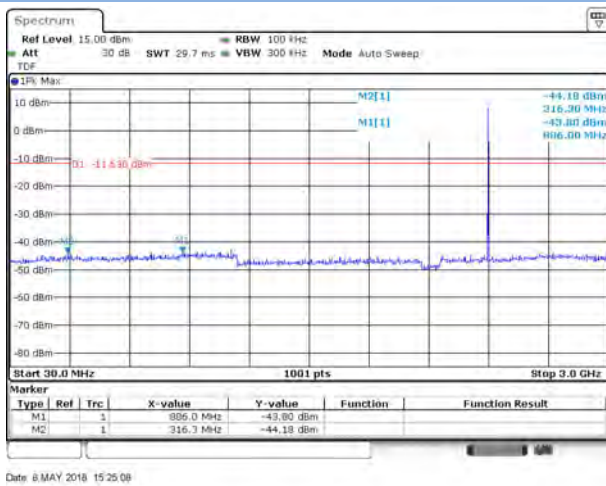


GFSK (BLE)LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

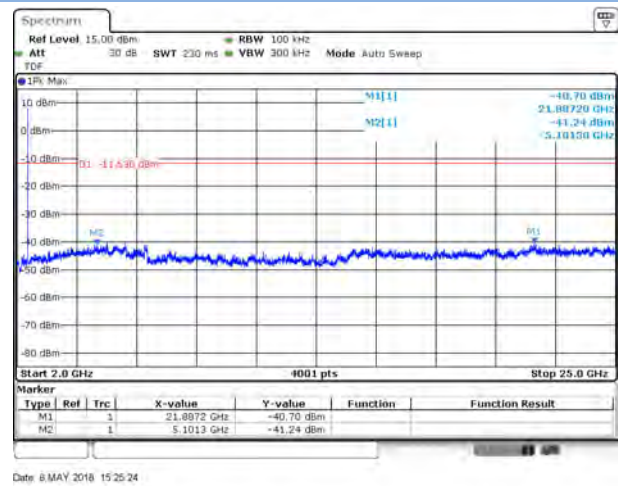

GFSK (BLE)MIDDLE CHANNEL , CARRIER LEVEL

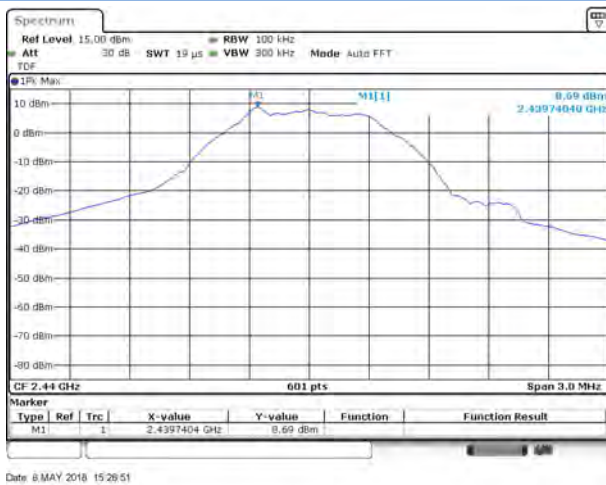


GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

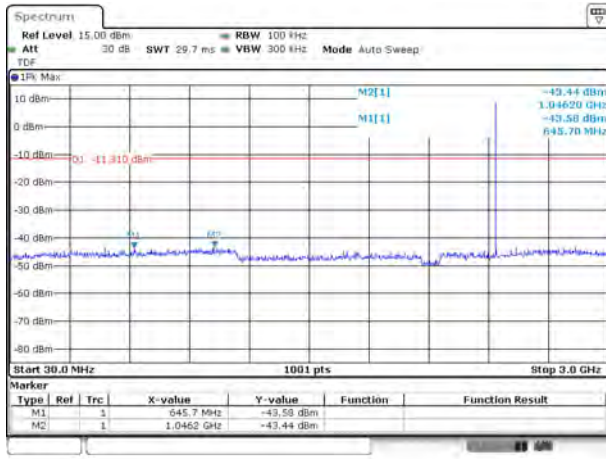


Date: 8 MAY 2018 15:27:32

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

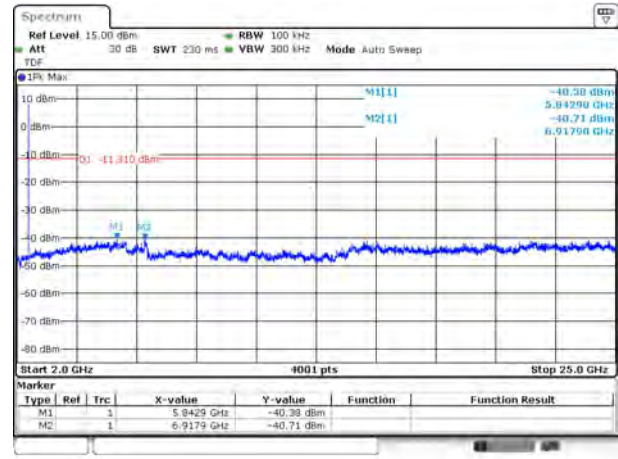


Date: 8 MAY 2018 15:27:55

GFSK (BLE)High CHANNEL , CARRIER LEVEL

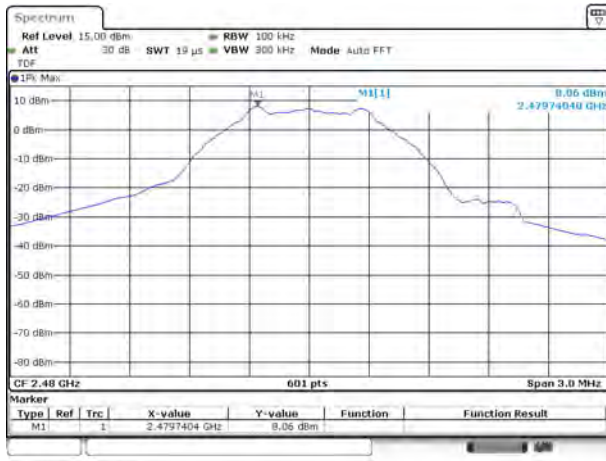


Date: 8 MAY 2018 15:29:06

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

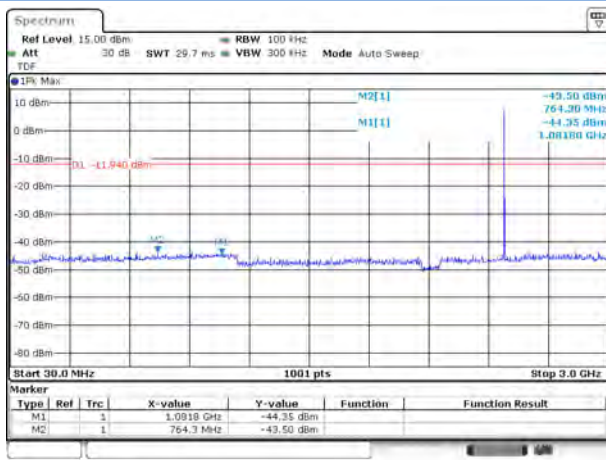

Date: 8 MAY 2018 15:29:37


GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

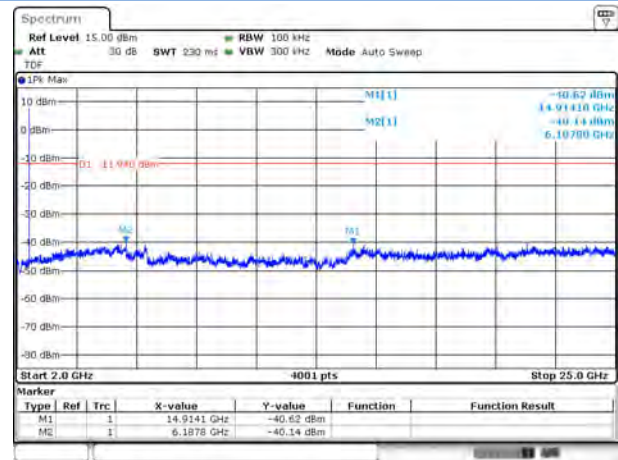

Date: 8 MAY 2018 15:29:52


ANT2

GFSK (BLE) LOW CHANNEL , CARRIER LEVEL

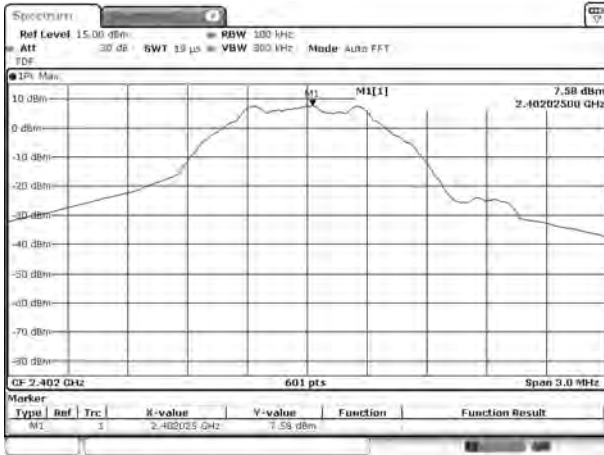


Date: 11 MAY 2019 14:15:58

GFSK (BLE)LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

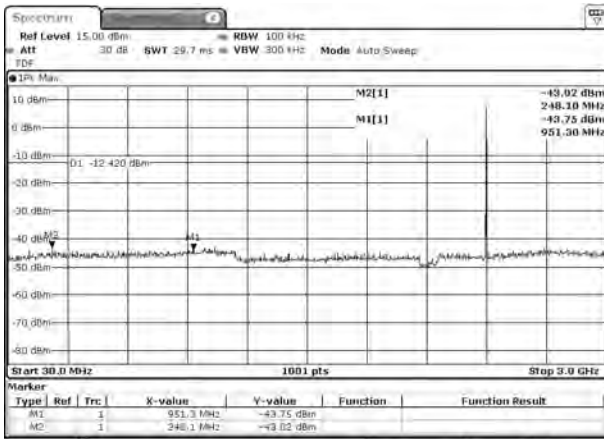

Date: 11 MAY 2019 14:16:42

GFSK (BLE)LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

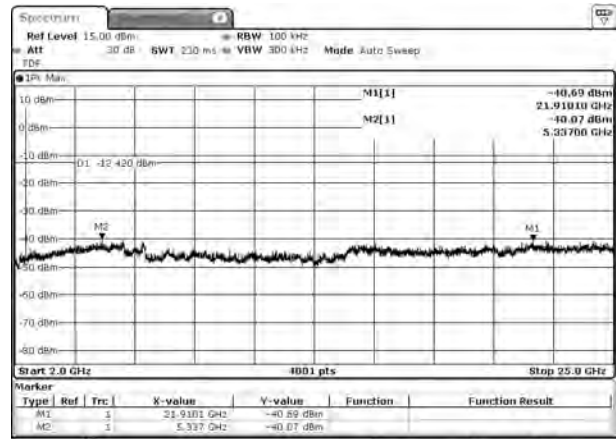


Date: 11 MAY 2019 14:16:58

GFSK (BLE)MIDDLE CHANNEL , CARRIER LEVEL




Date: 11 MAY 2019 14:18:12

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

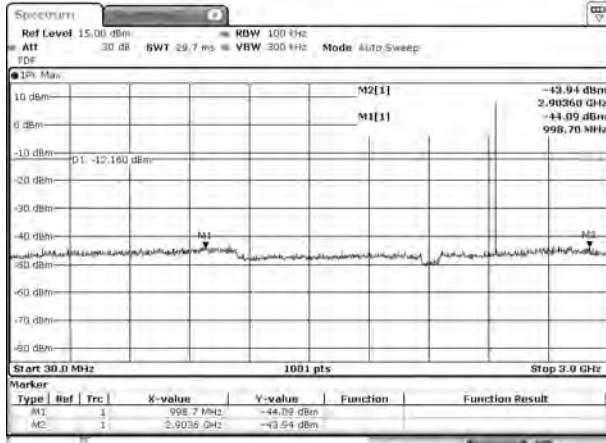


Date: 11 MAY 2019 14:18:43

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

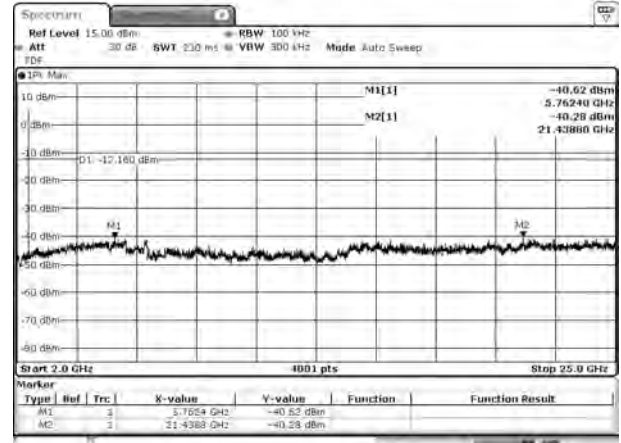


Date: 11 MAY 2019 14:19:58

GFSK (BLE)High CHANNEL , CARRIER LEVEL

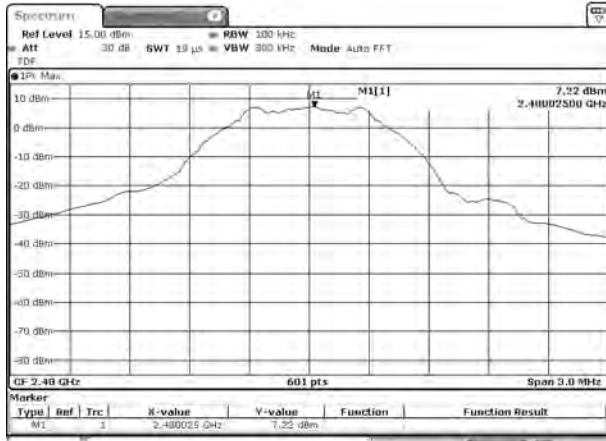


Date: 11 MAY 2019 14:20:02

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

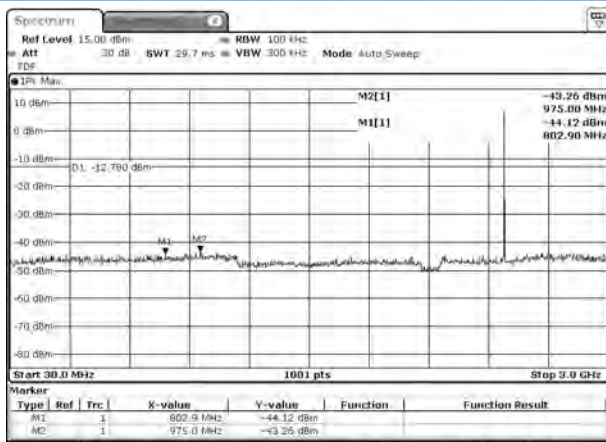

Date: 11 MAY 2019 14:20:40


GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

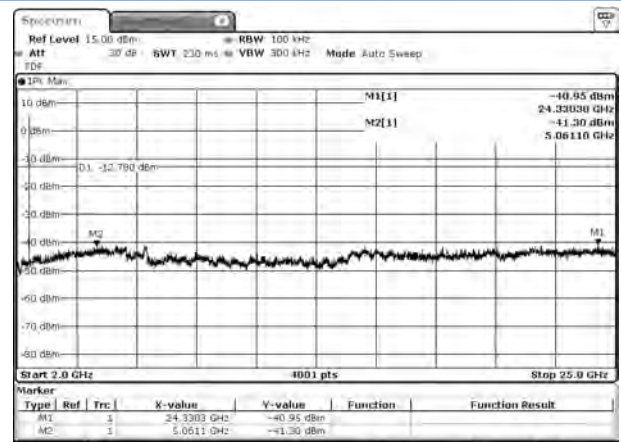


Date: 11 MAY 2019 14:20:53

ANT3


GFSK (BLE) LOW CHANNEL , CARRIER LEVEL

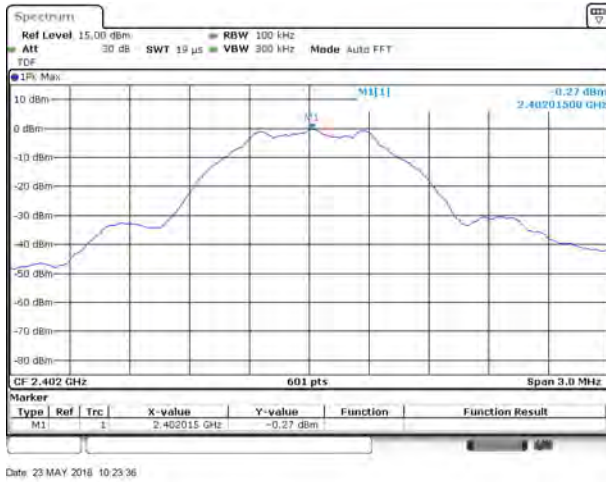

GFSK (BLE)LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

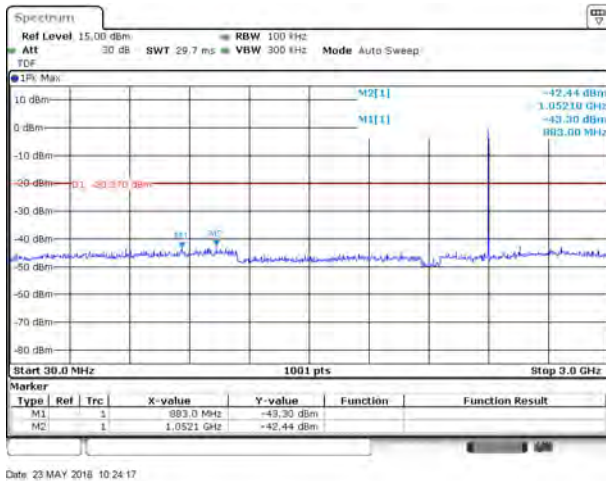


GFSK (BLE)LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

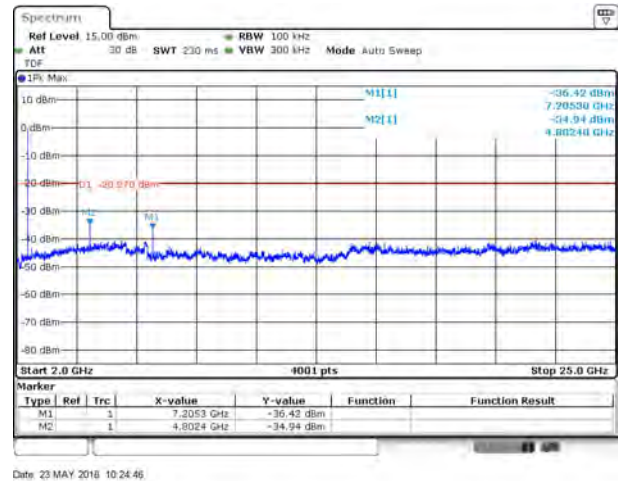

GFSK (BLE)MIDDLE CHANNEL , CARRIER LEVEL




GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

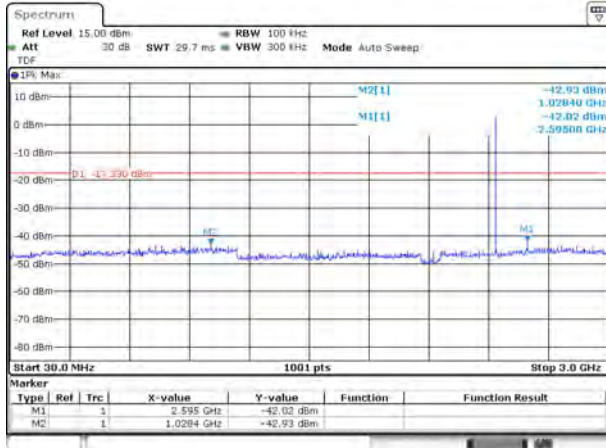


Date: 23 MAY 2018 10:27:22

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

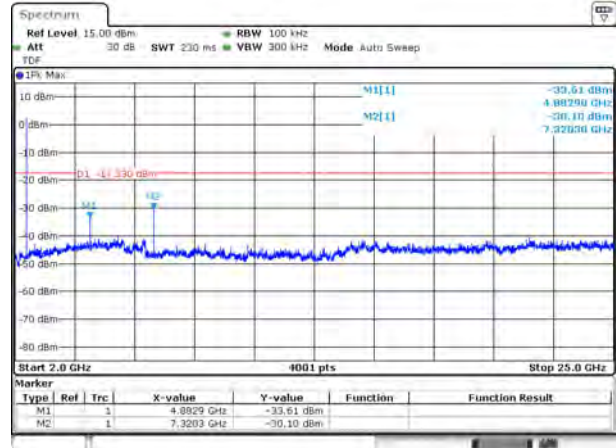


Date: 23 MAY 2018 10:27:39

GFSK (BLE)High CHANNEL , CARRIER LEVEL

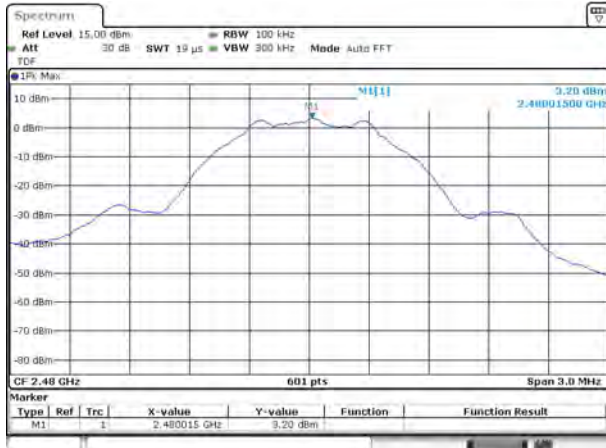


Date: 23 MAY 2018 10:28:54

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

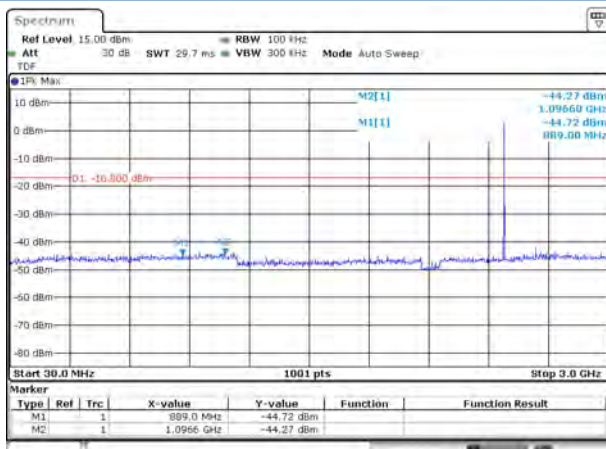

Date: 23 MAY 2018 10:29:36

GFSK (BLE)MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

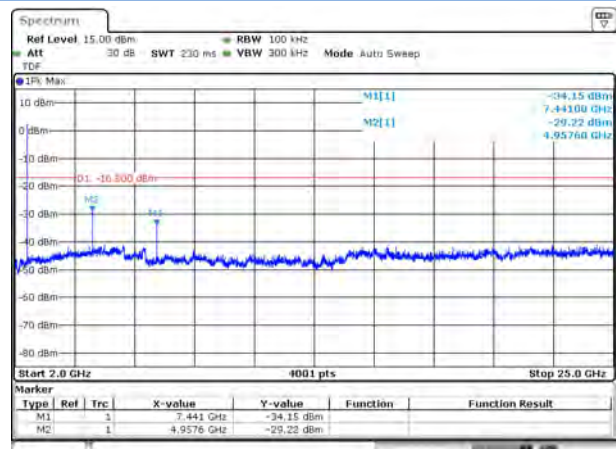

Date: 23 MAY 2018 10:29:49

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Data

ANT1

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-27.16	8.37	-11.63	Pass
High Channel	-46.99	8.06	-11.94	Pass

ANT2

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-27.55	7.58	-12.42	Pass
High Channel	-46.66	7.22	-12.78	Pass


ANT3

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-41.93	-0.27	-20.27	Pass
High Channel	-48.31	3.20	-16.80	Pass


Test Plots

ANT1


LOW CHANNEL, Carrier level

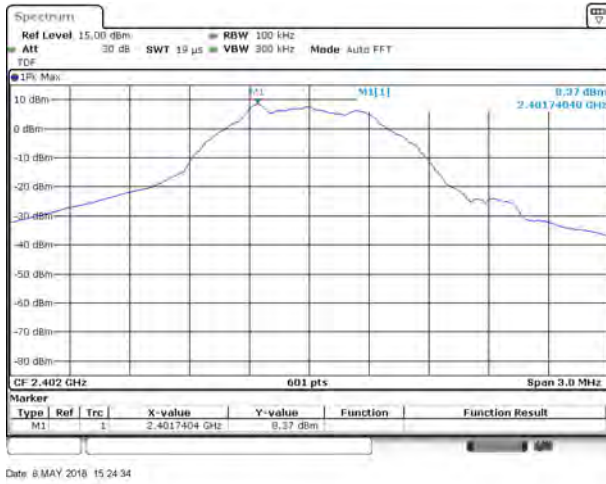

LOW CHANNEL, Reference level

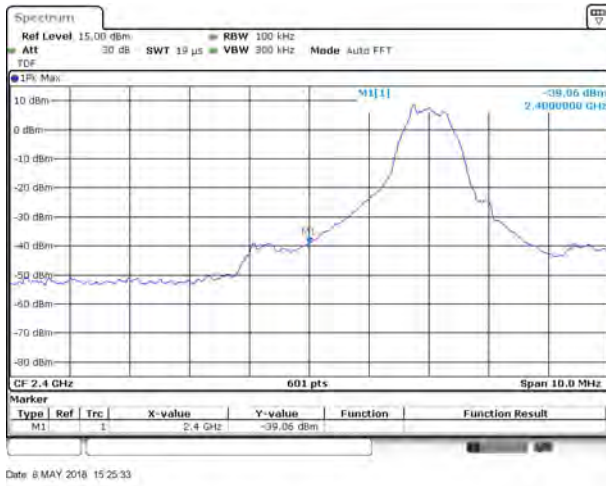


LOW CHANNEL, Band Edge

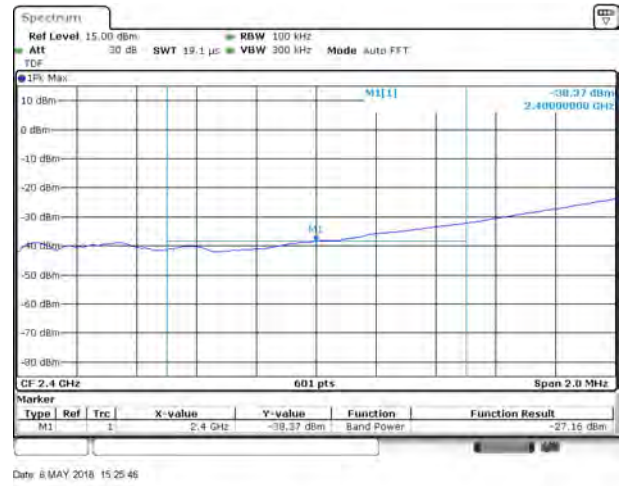


High CHANNEL, Carrier level



HIGH CHANNEL, Reference level

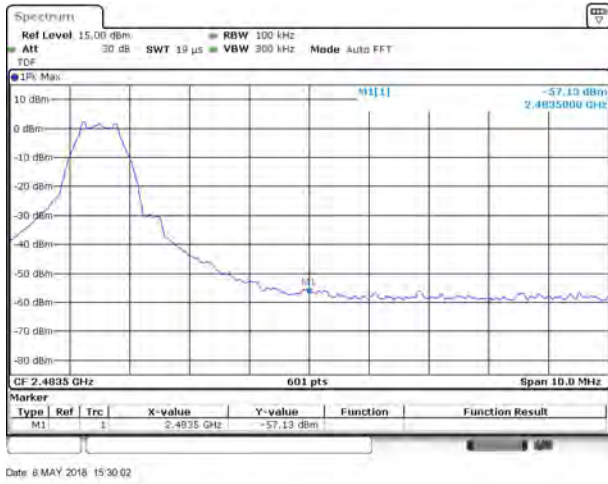


HIGH CHANNEL, Band Edge

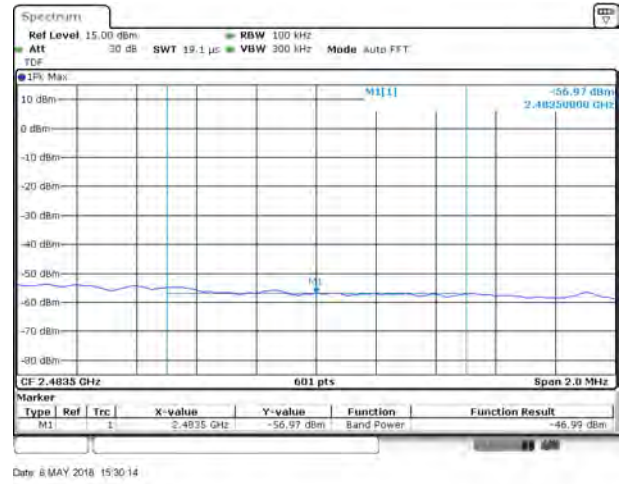


ANT2


LOW CHANNEL, Carrier level

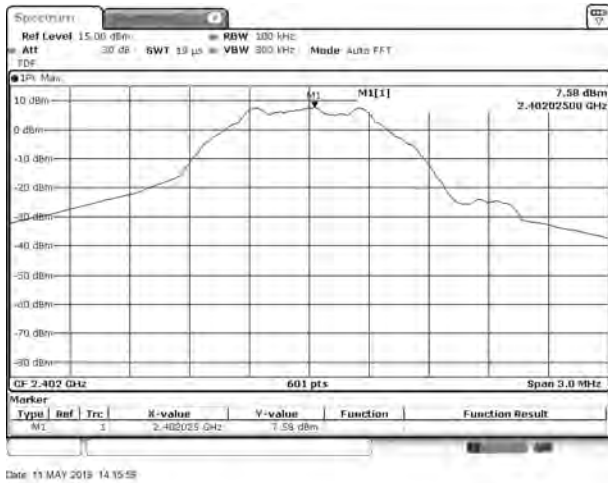


LOW CHANNEL, Reference level

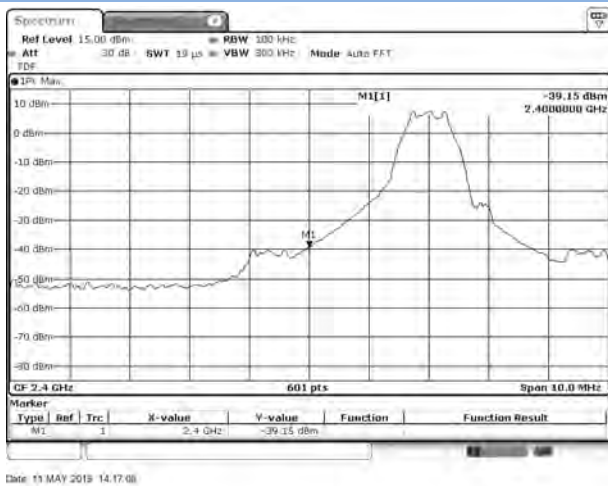


LOW CHANNEL, Band Edge

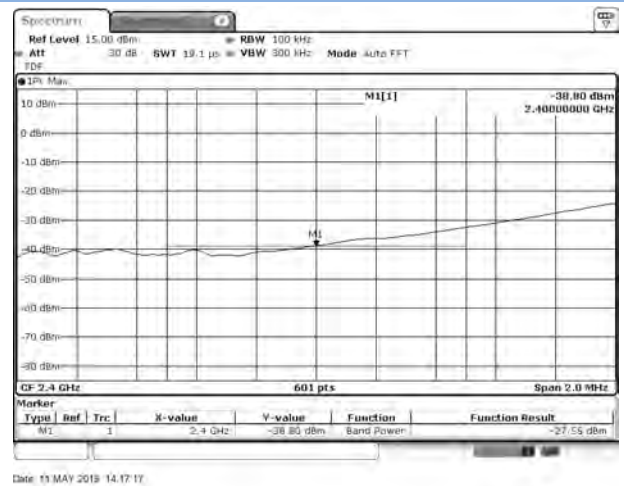


High CHANNEL, Carrier level

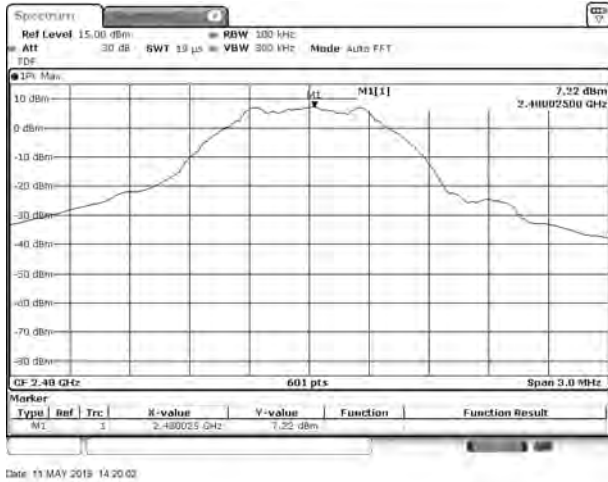

HIGH CHANNEL, Reference level

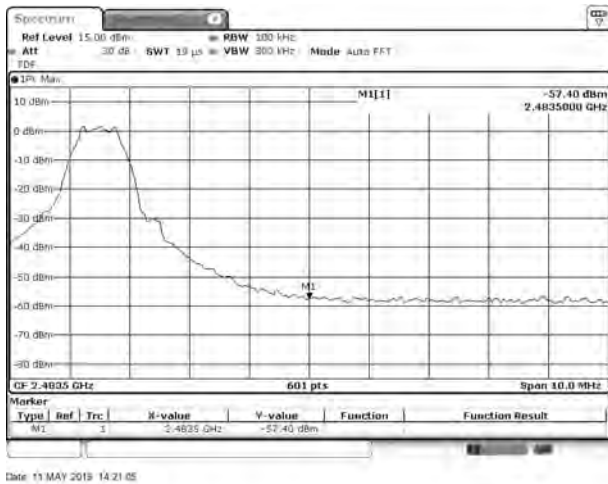

HIGH CHANNEL, Band Edge

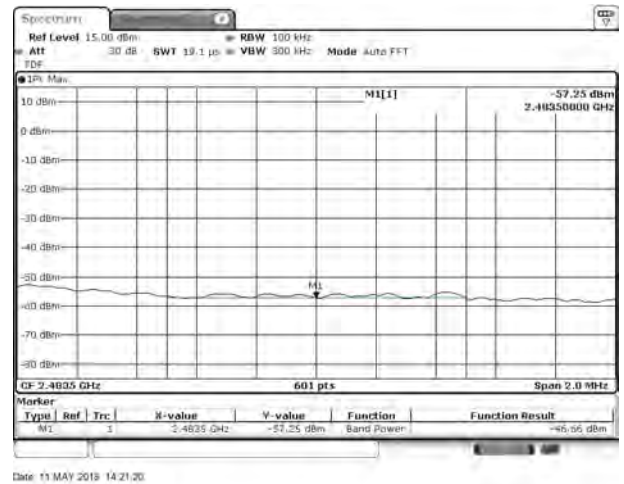


ANT3


LOW CHANNEL, Carrier level




LOW CHANNEL, Reference level

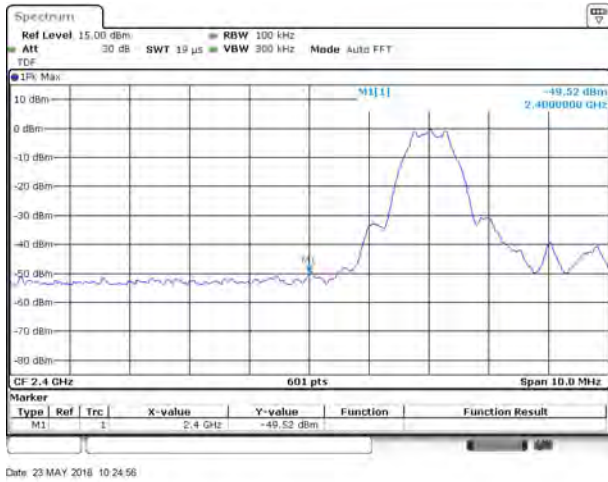

LOW CHANNEL, Band Edge

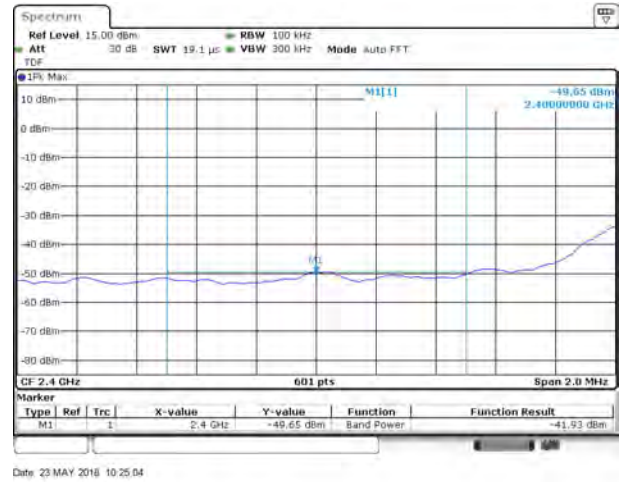


High CHANNEL, Carrier level

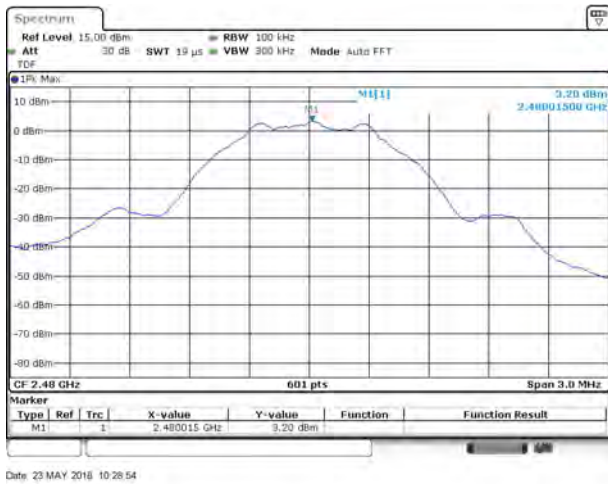

HIGH CHANNEL, Reference level



HIGH CHANNEL, Band Edge

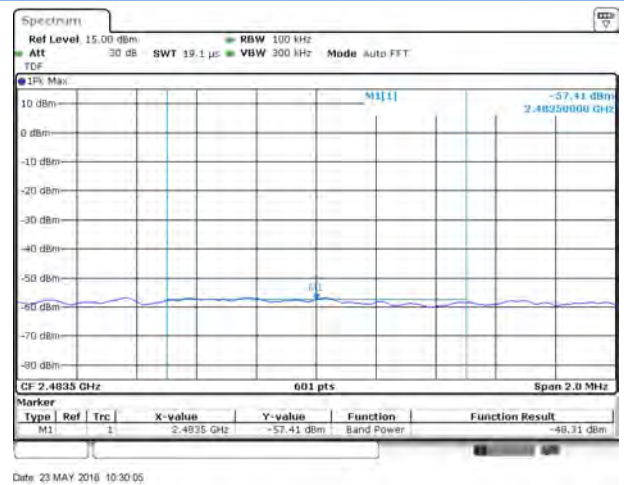


A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

ANT1

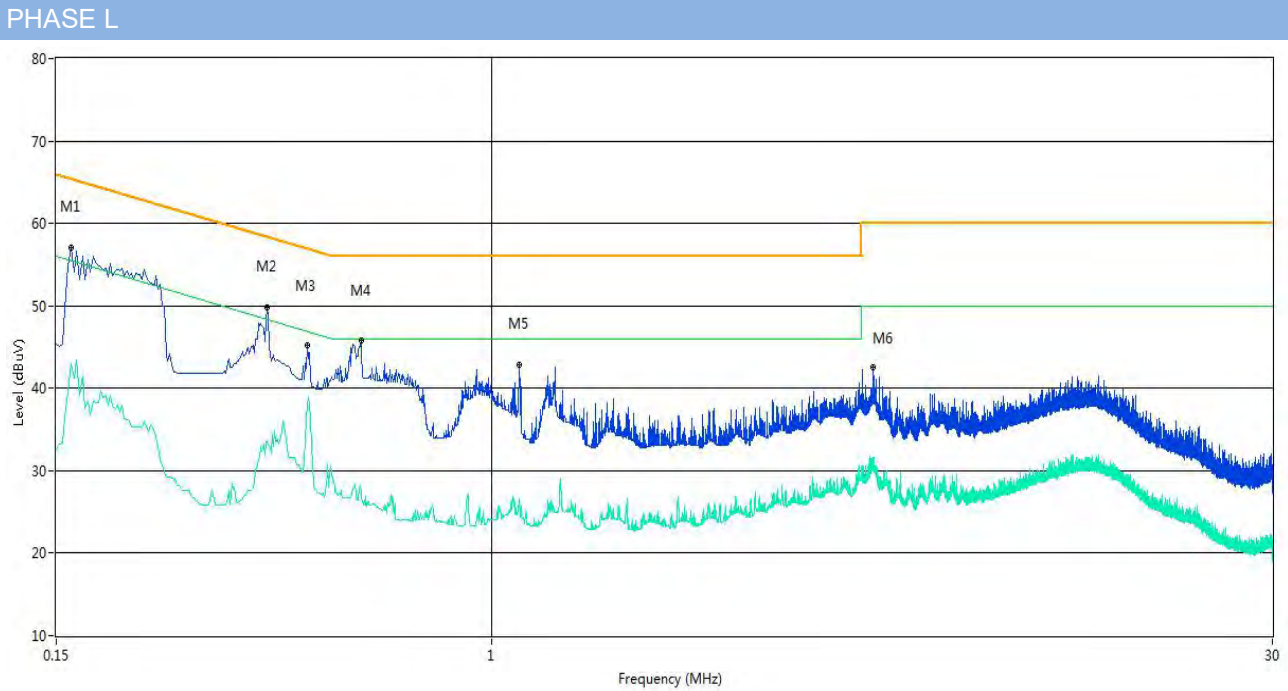

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	57.1	10.04	65.5	8.40	Peak	L Line	Pass
1**	0.160	43.0	10.04	55.5	12.50	AV	L Line	Pass
2	0.376	49.9	10.04	58.4	8.50	Peak	L Line	Pass
2**	0.376	33.5	10.04	48.4	14.90	AV	L Line	Pass
3	0.448	45.2	10.04	56.9	11.70	Peak	L Line	Pass
3**	0.448	38.2	10.04	46.9	8.70	AV	L Line	Pass
4	0.566	45.8	10.05	56.0	10.20	Peak	L Line	Pass
4**	0.566	27.7	10.05	46.0	18.30	AV	L Line	Pass
5	1.128	42.9	10.06	56.0	13.10	Peak	L Line	Pass
5**	1.128	26.1	10.06	46.0	19.90	AV	L Line	Pass
6	5.278	42.5	10.18	60.0	17.50	Peak	L Line	Pass
6**	5.278	31.5	10.18	50.0	18.50	AV	L Line	Pass


PHASE N

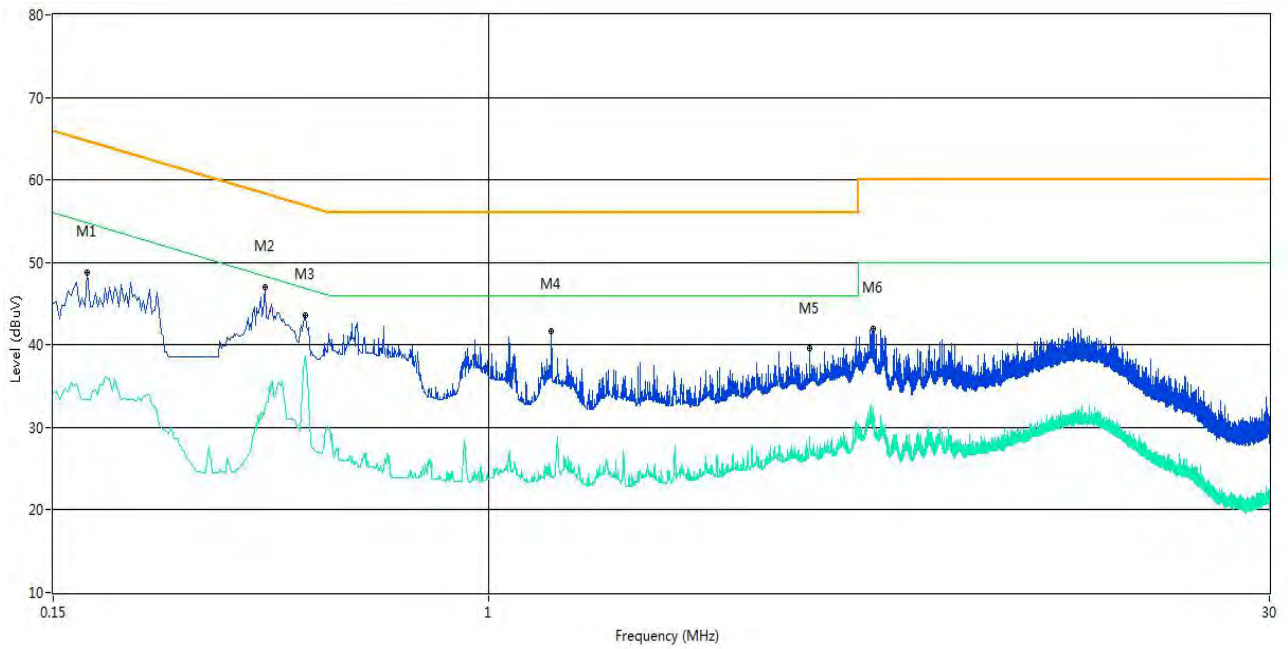

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.174	48.8	10.04	64.8	16.00	Peak	N Line	Pass
1**	0.174	33.2	10.04	54.8	21.60	AV	N Line	Pass
2	0.378	47.0	10.04	58.3	11.30	Peak	N Line	Pass
2**	0.378	32.5	10.04	48.3	15.80	AV	N Line	Pass
3	0.450	43.6	10.04	56.9	13.30	Peak	N Line	Pass
3**	0.450	38.5	10.04	46.9	8.40	AV	N Line	Pass
4	1.314	41.6	10.07	56.0	14.40	Peak	N Line	Pass
4**	1.314	24.1	10.07	46.0	21.90	AV	N Line	Pass
5	4.052	39.7	10.15	56.0	16.30	Peak	N Line	Pass
5**	4.052	28.4	10.15	46.0	17.60	AV	N Line	Pass
6	5.336	42.0	10.18	60.0	18.00	Peak	N Line	Pass
6**	5.336	32.4	10.18	50.0	17.60	AV	N Line	Pass


ANT2

PHASE L

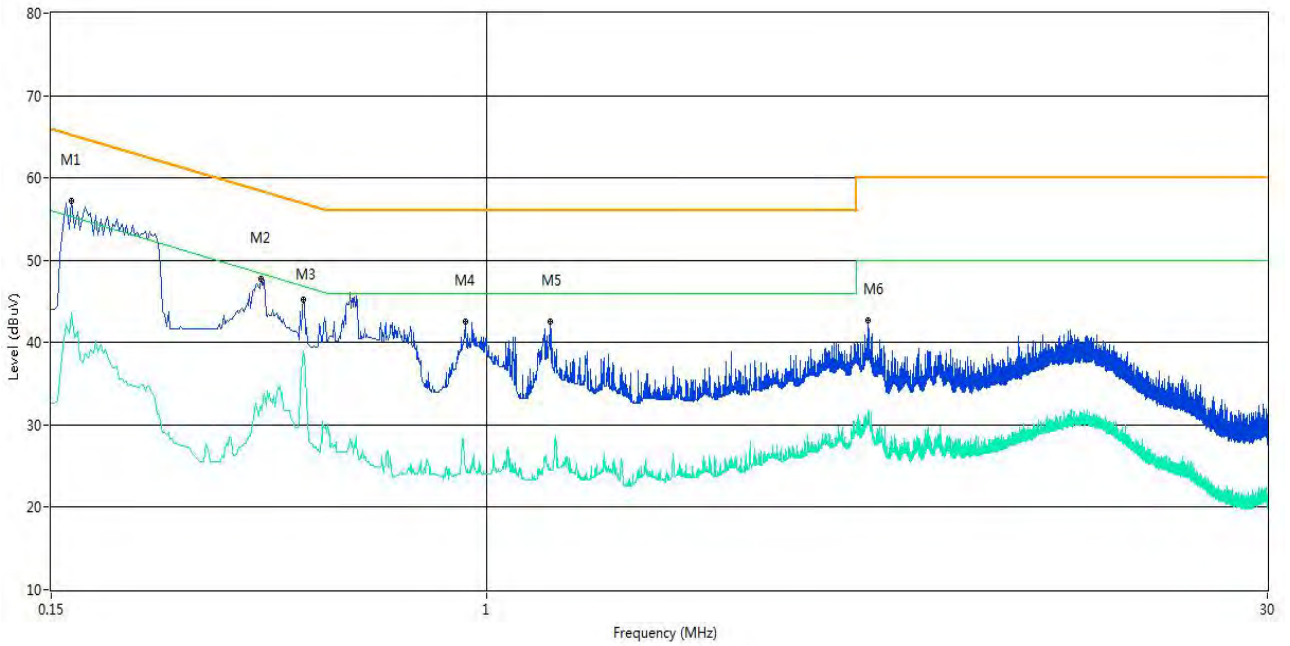

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.164	57.2	10.04	65.3	8.10	Peak	L Line	Pass
1**	0.164	43.6	10.04	55.3	11.70	AV	L Line	Pass
2	0.374	47.7	10.04	58.4	10.70	Peak	L Line	Pass
2**	0.374	32.2	10.04	48.4	16.20	AV	L Line	Pass
3	0.450	45.2	10.04	56.9	11.70	Peak	L Line	Pass
3**	0.450	39.0	10.04	46.9	7.90	AV	L Line	Pass
4	0.910	42.6	10.06	56.0	13.40	Peak	L Line	Pass
4**	0.910	24.7	10.06	46.0	21.30	AV	L Line	Pass
5	1.318	42.5	10.07	56.0	13.50	Peak	L Line	Pass
5**	1.318	24.8	10.07	46.0	21.20	AV	L Line	Pass
6	5.278	42.7	10.18	60.0	17.30	Peak	L Line	Pass
6**	5.278	31.7	10.18	50.0	18.30	AV	L Line	Pass


PHASE N

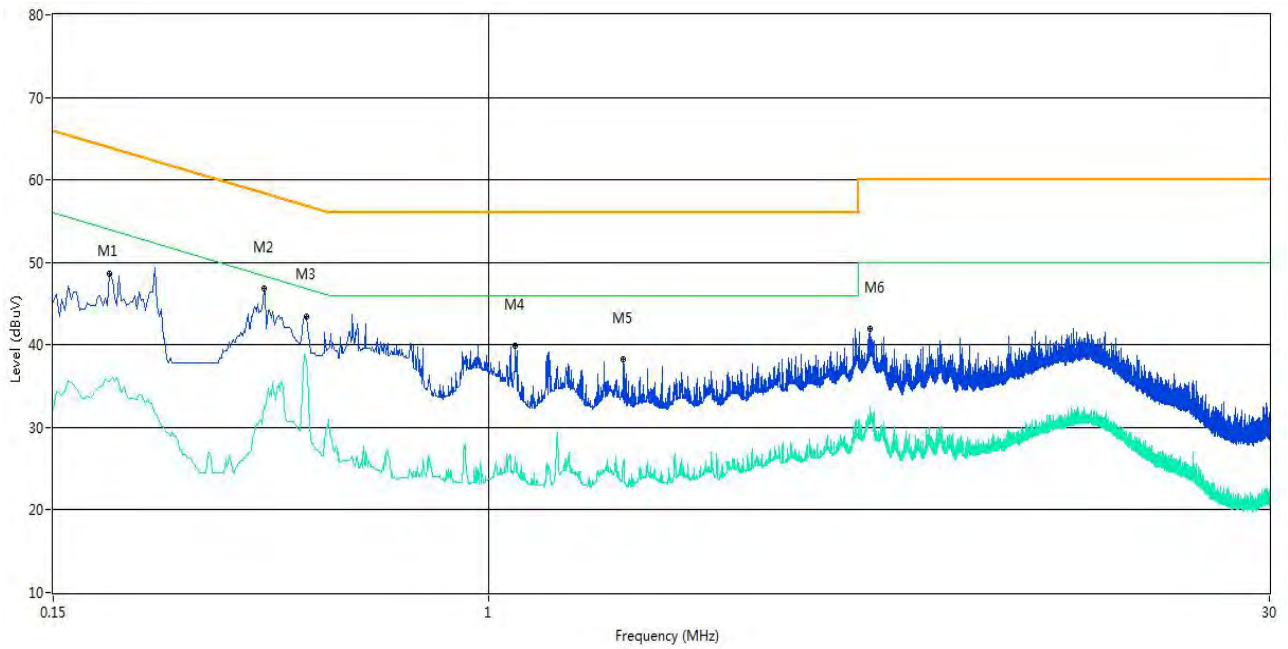

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.192	48.6	10.04	63.9	15.30	Peak	N Line	Pass
1**	0.192	35.7	10.04	53.9	18.20	AV	N Line	Pass
2	0.376	46.9	10.04	58.4	11.50	Peak	N Line	Pass
2**	0.376	32.5	10.04	48.4	15.90	AV	N Line	Pass
3	0.452	43.4	10.04	56.8	13.40	Peak	N Line	Pass
3**	0.452	38.2	10.04	46.8	8.60	AV	N Line	Pass
4	1.122	39.9	10.06	56.0	16.10	Peak	N Line	Pass
4**	1.122	26.4	10.06	46.0	19.60	AV	N Line	Pass
5	1.796	38.2	10.08	56.0	17.80	Peak	N Line	Pass
5**	1.796	25.5	10.08	46.0	20.50	AV	N Line	Pass
6	5.258	42.0	10.18	60.0	18.00	Peak	N Line	Pass
6**	5.258	31.5	10.18	50.0	18.50	AV	N Line	Pass


ANT3

PHASE L

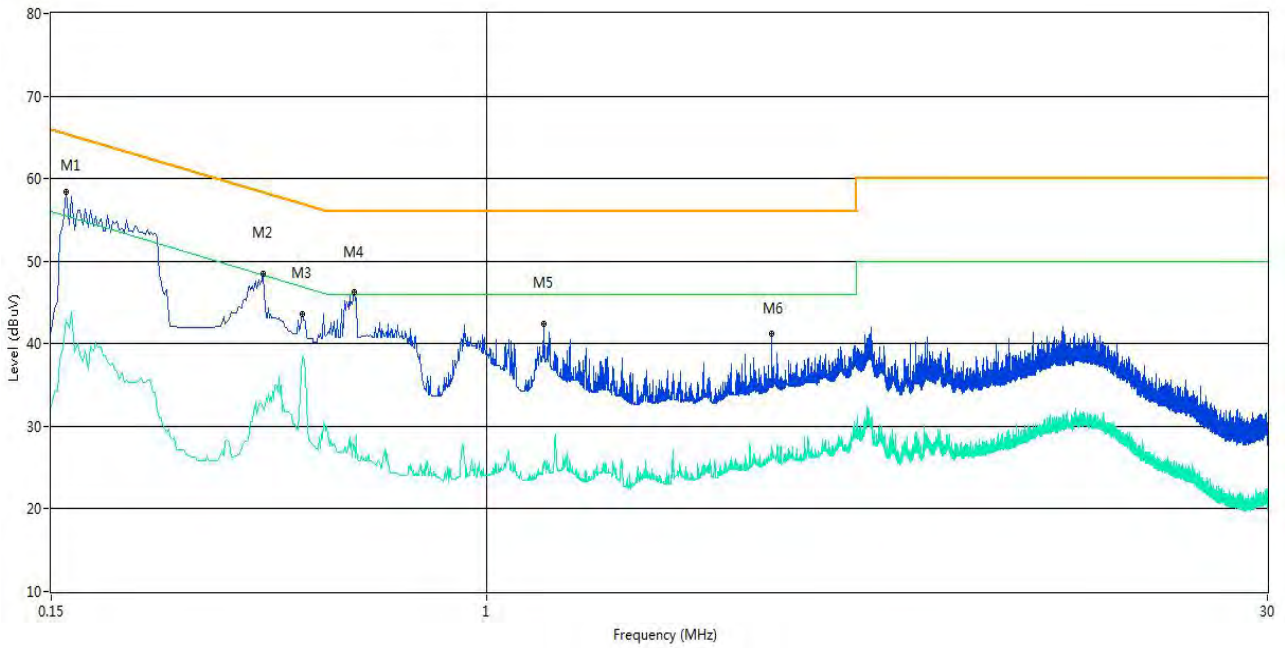

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	58.4	10.04	65.5	7.10	Peak	L Line	Pass
1**	0.160	42.8	10.04	55.5	12.70	AV	L Line	Pass
2	0.378	48.5	10.04	58.3	9.80	Peak	L Line	Pass
2**	0.378	32.2	10.04	48.3	16.10	AV	L Line	Pass
3	0.448	43.6	10.04	56.9	13.30	Peak	L Line	Pass
3**	0.448	38.5	10.04	46.9	8.40	AV	L Line	Pass
4	0.562	46.2	10.05	56.0	9.80	Peak	L Line	Pass
4**	0.562	27.8	10.05	46.0	18.20	AV	L Line	Pass
5	1.282	42.4	10.07	56.0	13.60	Peak	L Line	Pass
5**	1.282	25.8	10.07	46.0	20.20	AV	L Line	Pass
6	3.464	41.2	10.13	56.0	14.80	Peak	L Line	Pass
6**	3.464	27.6	10.13	46.0	18.40	AV	L Line	Pass

PHASE N

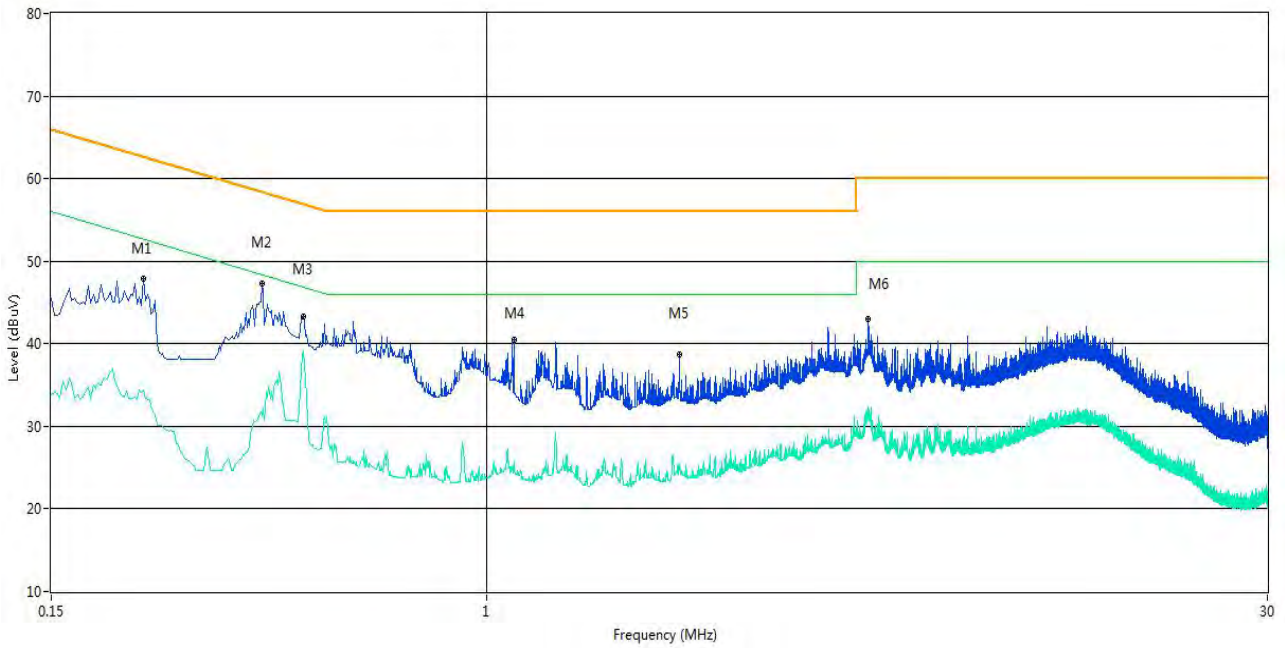

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.224	48.0	10.04	62.7	14.70	Peak	N Line	Pass
1**	0.224	34.5	10.04	52.7	18.20	AV	N Line	Pass
2	0.376	47.3	10.04	58.4	11.10	Peak	N Line	Pass
2**	0.376	31.3	10.04	48.4	17.10	AV	N Line	Pass
3	0.450	43.3	10.04	56.9	13.60	Peak	N Line	Pass
3**	0.450	39.1	10.04	46.9	7.80	AV	N Line	Pass
4	1.126	40.5	10.06	56.0	15.50	Peak	N Line	Pass
4**	1.126	25.6	10.06	46.0	20.40	AV	N Line	Pass
5	2.316	38.7	10.10	56.0	17.30	Peak	N Line	Pass
5**	2.316	24.7	10.10	46.0	21.30	AV	N Line	Pass
6	5.274	43.0	10.18	60.0	17.00	Peak	N Line	Pass
6**	5.274	32.4	10.18	50.0	17.60	AV	N Line	Pass

A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz.

Test Data and Plots


ANT1

30 MHz to 1 GHz, ANT V

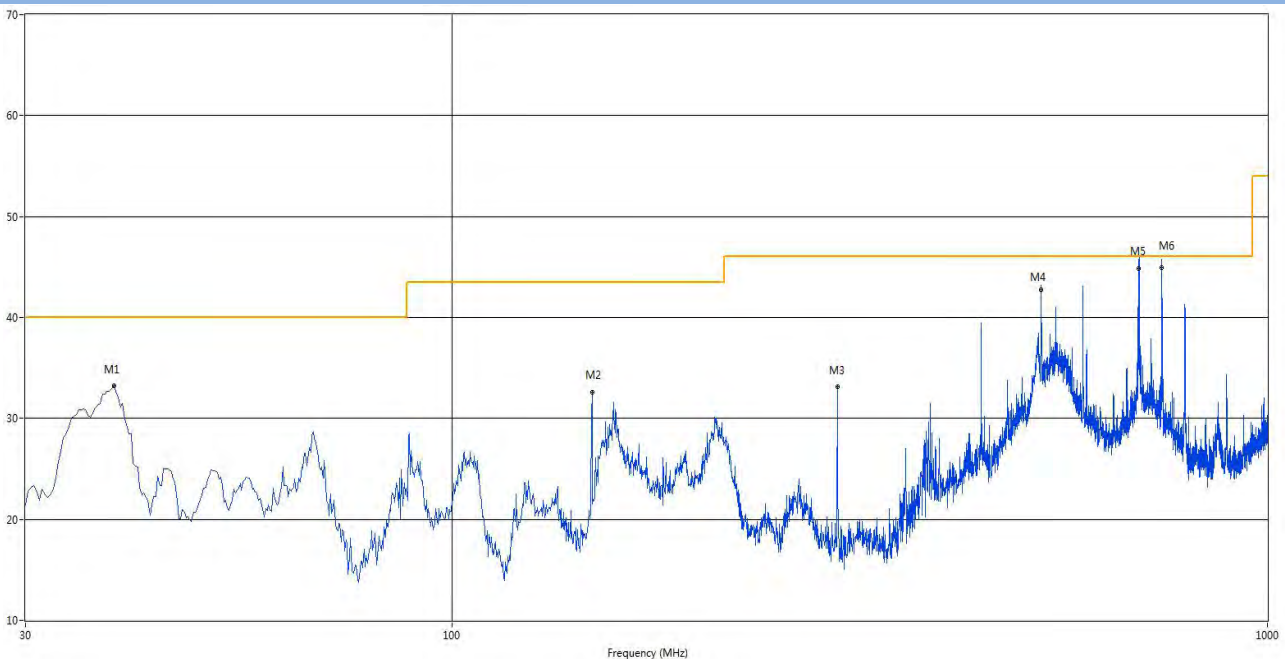

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	38.487	33.19	-25.63	40.0	6.81	Peak	132.20	200	Vertical	Pass
2	148.583	32.56	-29.06	43.5	10.94	Peak	5.70	100	Vertical	Pass
3	296.992	33.11	-22.84	46.0	12.89	Peak	0.40	100	Vertical	Pass
4	528.095	43.19	-16.98	46.0	2.81	Peak	145.70	100	Vertical	N/A
4*	528.095	42.78	-16.98	46.0	3.22	QP	145.70	100	Vertical	Pass
5	695.905	45.52	-14.37	46.0	0.48	Peak	211.40	100	Vertical	N/A
5*	695.905	44.86	-14.37	46.0	1.14	QP	211.40	100	Vertical	Pass
6	742.465	45.72	-13.53	46.0	0.28	Peak	186.00	100	Vertical	N/A
6*	742.465	44.93	-13.53	46.0	1.07	QP	186.00	100	Vertical	Pass


30 MHz to 1 GHz, ANT H

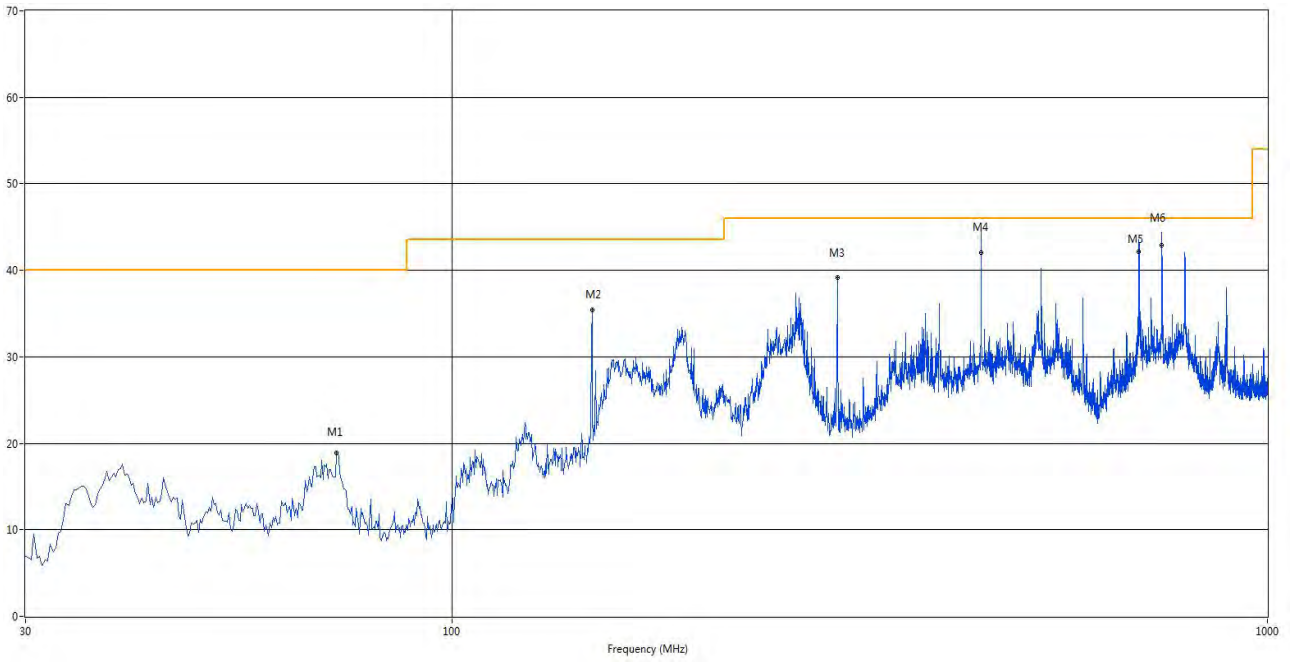

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	72.195	18.83	-29.08	40.0	21.17	Peak	66.00	200	Horizontal	Pass
2	148.583	35.39	-29.06	43.5	8.11	Peak	138.00	200	Horizontal	Pass
3	296.992	39.20	-22.84	46.0	6.80	Peak	360.00	100	Horizontal	Pass
4	445.500	44.03	-19.08	46.0	1.97	Peak	168.80	102	Horizontal	N/A
4*	445.500	42.02	-19.08	46.0	3.98	QP	168.80	102	Horizontal	Pass
5	695.905	43.50	-14.37	46.0	2.50	Peak	294.50	100	Horizontal	N/A
5*	695.905	42.10	-14.37	46.0	3.90	QP	294.50	100	Horizontal	Pass
6	742.465	44.44	-13.53	46.0	1.56	Peak	267.70	100	Horizontal	N/A
6*	742.465	42.90	-13.53	46.0	3.10	QP	267.70	100	Horizontal	Pass


ANT2

30 MHz to 1 GHz, ANT V

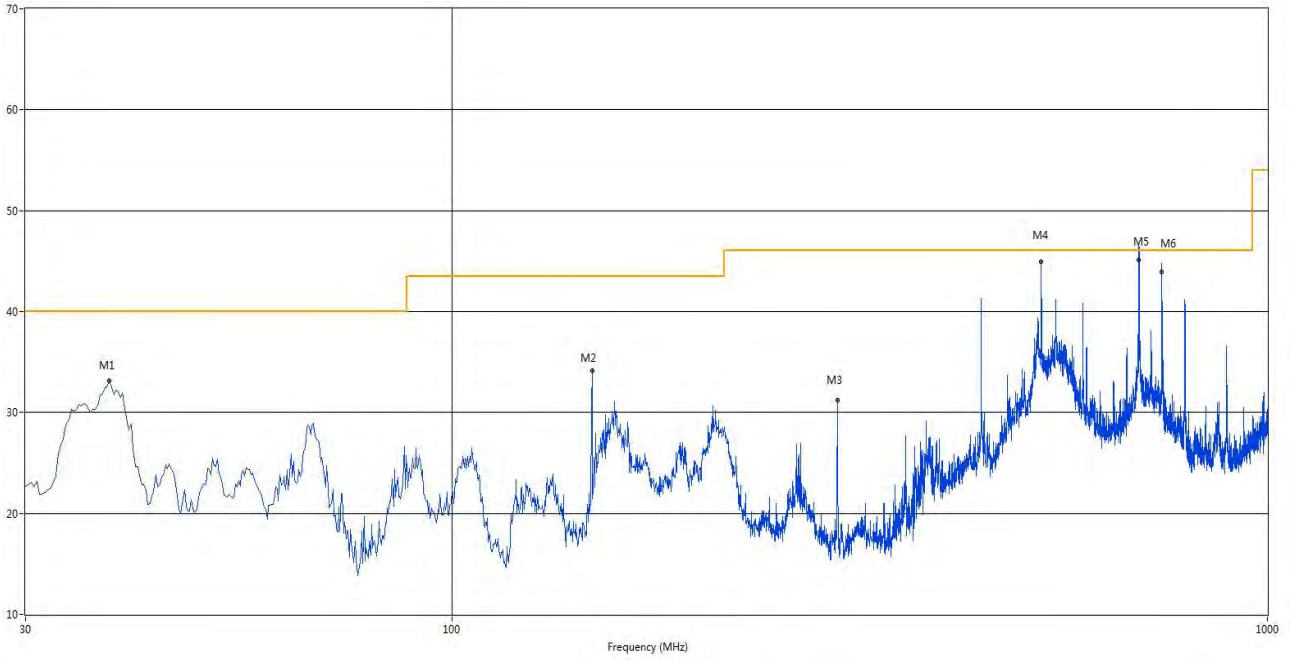

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	38.002	33.10	-25.73	40.0	6.90	Peak	122.60	100	Vertical	Pass
2	148.583	34.18	-29.06	43.5	9.32	Peak	48.20	200	Vertical	Pass
3	296.992	31.22	-22.84	46.0	14.78	Peak	335.20	200	Vertical	Pass
4	528.095	45.12	-16.98	46.0	0.88	Peak	157.10	100	Vertical	N/A
4*	528.095	44.91	-16.98	46.0	1.09	QP	157.10	100	Vertical	Pass
5	696.000	48.78	-14.37	46.0	-2.78	Peak	237.30	102	Vertical	N/A
5*	696.000	44.92	-14.37	46.0	1.08	QP	237.30	102	Vertical	Pass
6	742.465	44.76	-13.53	46.0	1.24	Peak	188.10	100	Vertical	N/A
6*	742.465	43.89	-13.53	46.0	2.11	QP	188.10	100	Vertical	Pass


30 MHz to 1 GHz, ANT H

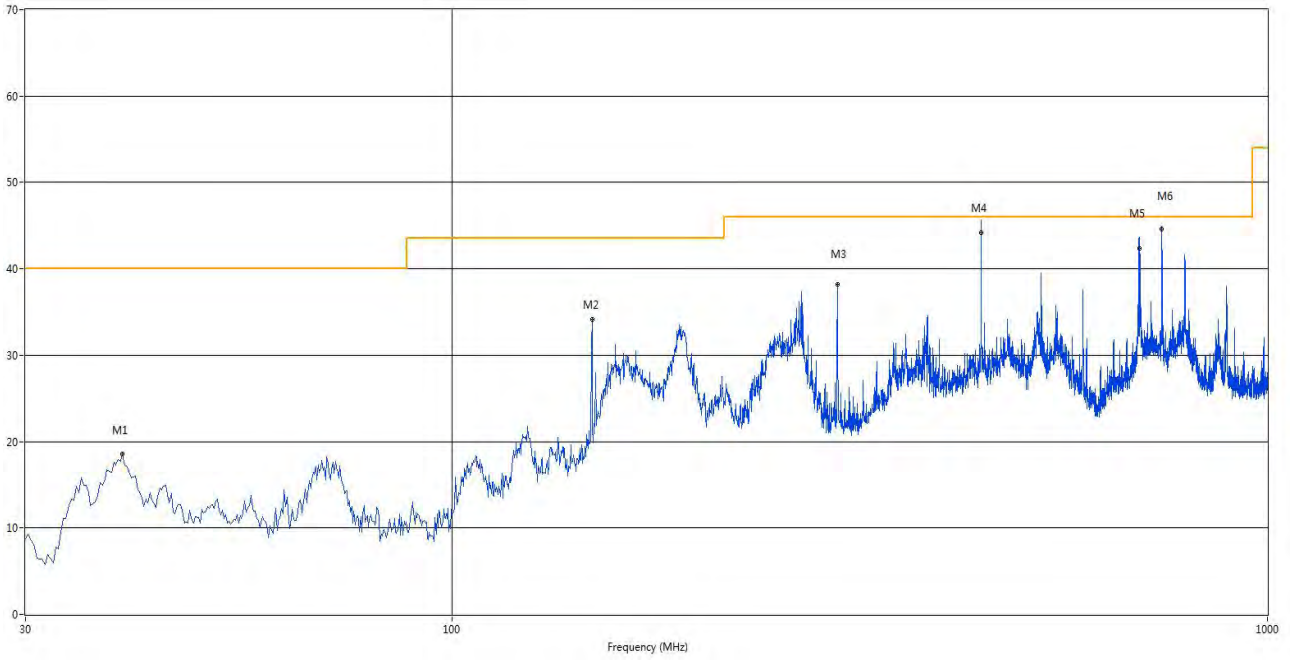

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	39.458	18.59	-25.53	40.0	21.41	Peak	97.00	100	Horizontal	Pass
2	148.583	34.18	-29.06	43.5	9.32	Peak	115.10	200	Horizontal	Pass
3	296.992	38.17	-22.84	46.0	7.83	Peak	360.00	200	Horizontal	Pass
4	445.402	45.64	-19.10	46.0	0.36	Peak	155.70	100	Horizontal	N/A
4*	445.402	44.18	-19.10	46.0	1.82	QP	155.70	100	Horizontal	Pass
5	696.148	43.63	-14.36	46.0	2.37	Peak	282.20	100	Horizontal	N/A
5*	696.148	42.39	-14.36	46.0	3.61	QP	282.20	100	Horizontal	Pass
6	742.465	44.91	-13.53	46.0	1.09	Peak	74.70	100	Horizontal	N/A
6*	742.465	44.60	-13.53	46.0	1.40	QP	74.70	100	Horizontal	Pass


ANT3

30 MHz to 1 GHz, ANT V

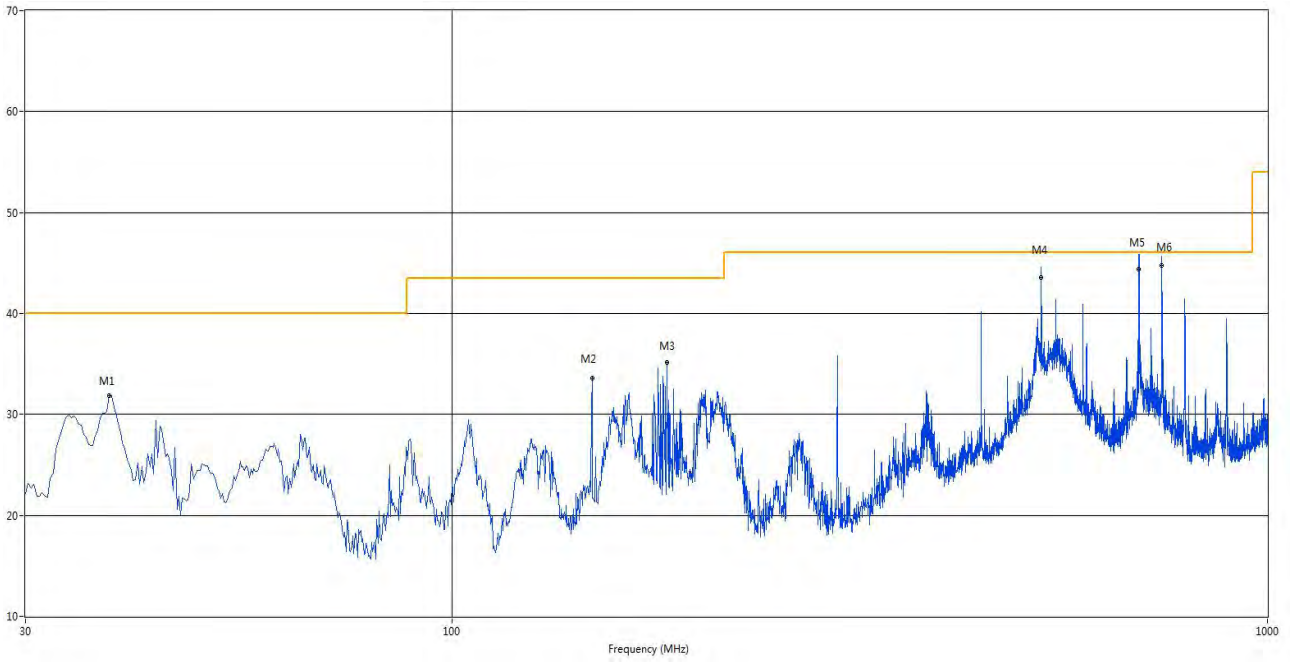

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	38.002	31.89	-25.82	40.0	8.11	Peak	51.60	100	Vertical	Pass
2	148.583	33.61	-28.95	43.5	9.89	Peak	33.20	200	Vertical	Pass
3	183.502	35.19	-26.88	43.5	8.31	Peak	179.30	100	Vertical	Pass
4	527.991	45.79	-16.96	46.0	0.21	Peak	160.90	109	Vertical	N/A
4*	527.991	43.56	-16.96	46.0	2.44	QP	160.90	109	Vertical	Pass
5	696.001	48.69	-14.04	46.0	-2.69	Peak	238.10	102	Vertical	N/A
5*	696.001	44.76	-14.04	46.0	1.24	QP	238.10	102	Vertical	Pass
6	742.500	46.54	-13.15	46.0	-0.54	Peak	188.50	100	Vertical	N/A
6*	742.500	44.78	-13.15	46.0	1.22	QP	188.50	100	Vertical	Pass

30 MHz to 1 GHz, ANT H

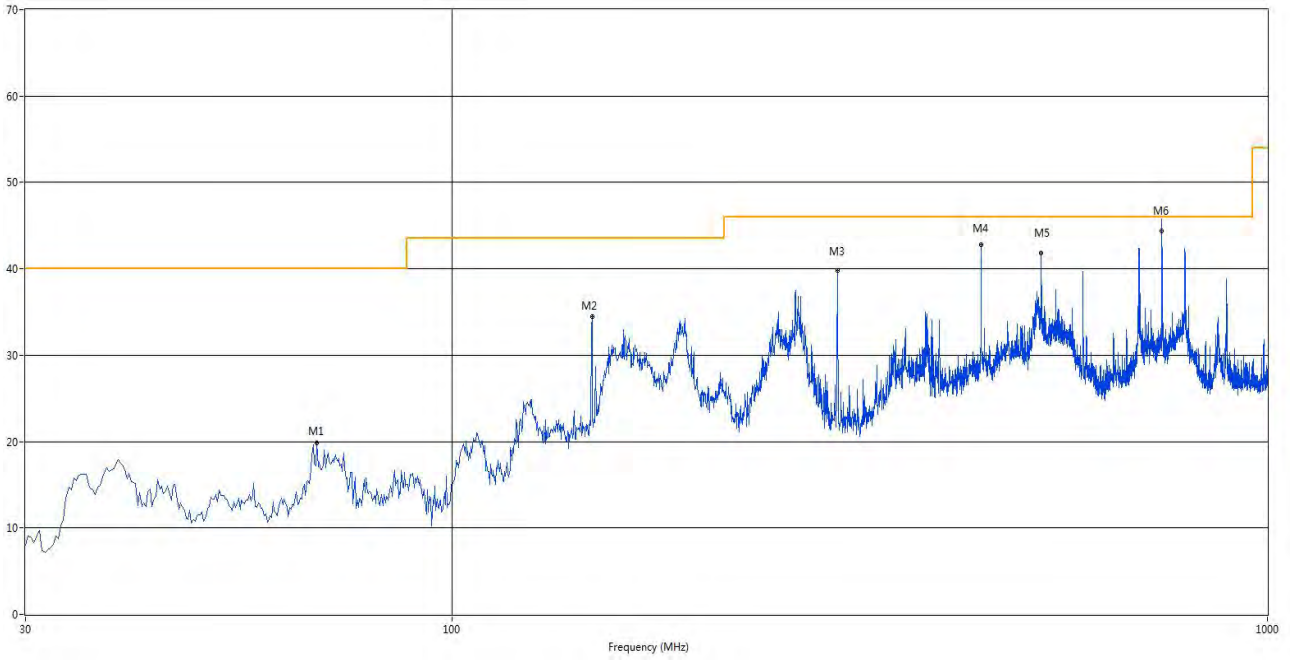

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	68.315	19.87	-27.45	40.0	20.13	Peak	48.30	200	Horizontal	Pass
2	148.583	34.51	-29.06	43.5	8.99	Peak	110.60	200	Horizontal	Pass
3	296.992	39.76	-22.84	46.0	6.24	Peak	360.00	200	Horizontal	Pass
4	445.645	42.80	-19.08	46.0	3.20	Peak	178.80	100	Horizontal	Pass
5	528.095	41.84	-16.98	46.0	4.16	Peak	48.30	200	Horizontal	Pass
6	742.500	47.12	-13.53	46.0	-1.12	Peak	267.80	118	Horizontal	N/A
6*	742.500	44.77	-13.53	46.0	1.23	QP	267.80	118	Horizontal	Pass

Note: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

ANT1
GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1993.11	52.56	-8.59	74	21.44	Peak	18	150	Vertical	Pass
2	2402.51	103.23	-6.10	74	-29.23	Peak	227.8	150	Vertical	N/A
3	5958.40	52.70	3.00	74	21.30	Peak	160.5	150	Vertical	Pass
4	8347.34	46.80	14.81	74	27.20	Peak	334.4	150	Vertical	Pass
5	13238.77	43.90	8.72	74	30.10	Peak	208.3	150	Vertical	Pass
6	20976.71	44.62	12.28	74	29.38	Peak	108.1	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1913.09	52.84	-9.76	74	21.16	Peak	160	150	Horizontal	Pass
2	2402.05	97.35	-6.13	74	-23.35	Peak	0.6	150	Horizontal	N/A
3	5922.99	53.77	2.68	74	20.23	Peak	21.6	150	Horizontal	Pass
4	10503.74	45.31	20.81	74	28.69	Peak	317.3	150	Horizontal	Pass
5	17180.12	46.76	9.18	74	27.24	Peak	335.1	150	Horizontal	Pass
6	20417.64	46.49	12.26	74	27.51	Peak	309.7	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1991.22	52.89	-8.59	74	21.11	Peak	194.2	150	Vertical	Pass
2	2440.63	103.42	-6.13	74	-29.42	Peak	216.3	150	Vertical	N/A
3	5960.98	52.65	3.00	74	21.35	Peak	311.9	150	Vertical	Pass
4	8167.64	44.05	13.88	74	29.95	Peak	193.9	150	Vertical	Pass
5	12874.79	45.12	20.84	74	28.88	Peak	261.4	150	Vertical	Pass
6	23073.21	44.47	10.58	74	29.53	Peak	130	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1914.05	52.89	-9.76	74	21.11	Peak	94.9	150	Horizontal	Pass
2	2440.12	96.24	-6.13	74	-22.24	Peak	207.1	150	Horizontal	N/A
3	5917.87	53.69	2.64	74	20.31	Peak	263.1	150	Horizontal	Pass
4	9167.22	44.67	17.49	74	29.34	Peak	63.5	150	Horizontal	Pass
5	14767.47	46.13	8.58	74	27.87	Peak	244	150	Horizontal	Pass
6	24710.48	46.09	11.66	74	27.91	Peak	57	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1991.23	52.42	-8.55	74	21.58	Peak	60.7	150	Vertical	Pass
2	2480.38	103.56	-6.10	74	-29.56	Peak	19.2	150	Vertical	N/A
3	5960.41	52.94	2.87	74	21.06	Peak	272.1	150	Vertical	Pass
4	7740.85	46.59	14.75	74	27.41	Peak	167.8	150	Vertical	Pass
5	12603.99	43.86	9.31	74	30.14	Peak	263.2	150	Vertical	Pass
6	19878.54	47.69	11.10	74	26.31	Peak	75	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1914.86	52.05	-9.72	74	21.95	Peak	60.4	150	Horizontal	Pass
2	2480.02	96.04	-6.12	74	-22.04	Peak	130.1	150	Horizontal	N/A
3	5922.87	53.20	2.65	74	20.80	Peak	253.9	150	Horizontal	Pass
4	7819.47	47.17	18.93	74	26.83	Peak	178.5	150	Horizontal	Pass
5	15495.42	45.46	9.16	74	28.54	Peak	253.2	150	Horizontal	Pass
6	21835.28	47.90	13.25	74	26.10	Peak	238.7	150	Horizontal	Pass

ANT2

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1978.90	52.63	-8.90	74	21.37	Peak	243.5	150	Vertical	Pass
2	2402.53	100.35	-6.14	74	-26.35	Peak	34.5	150	Vertical	N/A
3	3958.57	53.57	-4.49	74	20.43	Peak	217	150	Vertical	Pass
4	7123.13	43.54	19.06	74	30.46	Peak	256.4	150	Vertical	Pass
5	12502.91	47.26	9.36	74	26.74	Peak	105.6	150	Vertical	Pass
6	21725.46	44.25	11.04	74	29.75	Peak	214.8	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1913.37	52.09	-9.76	74	21.91	Peak	329.7	150	Horizontal	Pass
2	2402.09	99.71	-6.13	74	-25.71	Peak	66.7	150	Horizontal	N/A
3	5891.43	52.45	3.73	74	21.55	Peak	153.2	150	Horizontal	Pass
4	11671.80	44.69	13.82	74	29.31	Peak	106.8	150	Horizontal	Pass
5	16784.94	45.98	9.74	74	28.02	Peak	219	150	Horizontal	Pass
6	18022.46	44.92	11.45	74	29.08	Peak	253.8	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1979.24	50.74	-8.83	74	23.26	Peak	231.9	150	Vertical	Pass
2	2440.91	101.05	-6.14	74	-27.05	Peak	160.3	150	Vertical	N/A
3	3955.26	53.60	-4.49	74	20.40	Peak	173.5	150	Vertical	Pass
4	6157.24	46.40	16.80	74	27.60	Peak	46.4	150	Vertical	Pass
5	13935.52	44.96	20.71	74	29.04	Peak	8.6	150	Vertical	Pass
6	22923.46	48.66	9.70	74	25.34	Peak	357.1	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1915.47	51.40	-9.74	74	22.60	Peak	277.6	150	Horizontal	Pass
2	2440.55	100.08	-6.14	74	-26.08	Peak	142.3	150	Horizontal	N/A
3	5895.41	52.57	3.75	74	21.43	Peak	104.4	150	Horizontal	Pass
4	8616.89	41.43	14.81	74	32.57	Peak	134	150	Horizontal	Pass
5	16816.14	45.74	9.67	74	28.26	Peak	344.2	150	Horizontal	Pass
6	23772.05	46.74	12.08	74	27.26	Peak	178.7	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1978.34	52.36	-8.74	74	21.64	Peak	331.2	150	Vertical	Pass
2	2480.45	99.89	-6.13	74	-25.89	Peak	101.6	150	Vertical	N/A
3	3961.73	53.60	-4.51	74	20.40	Peak	285.2	150	Vertical	Pass
4	6876.04	46.52	20.52	74	27.48	Peak	155	150	Vertical	Pass
5	17627.29	43.32	9.63	74	30.68	Peak	337.8	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1911.02	51.65	-9.76	74	22.35	Peak	247.8	150	Horizontal	Pass
2	2480.92	98.92	-6.10	74	-24.92	Peak	345.6	150	Horizontal	N/A
3	5899.48	52.64	3.65	74	21.36	Peak	276.2	150	Horizontal	Pass
4	11009.15	42.39	15.28	74	31.61	Peak	281.2	150	Horizontal	Pass
5	14278.70	42.52	10.14	74	31.48	Peak	29.2	150	Horizontal	Pass
6	22763.73	43.94	9.45	74	30.06	Peak	131.8	150	Horizontal	Pass

ANT3
GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2065.46	38.74	-8.01	74	35.26	Peak	277.3	150	Vertical	Pass
2	2402.05	89.64	-6.10	74	-15.64	Peak	186.5	150	Vertical	N/A
3	2938.95	44.36	-1.50	74	29.64	Peak	26.3	150	Vertical	Pass
4	11896.42	43.00	16.71	74	31.00	Peak	36.2	150	Vertical	Pass
5	14715.47	44.96	9.07	74	29.04	Peak	25.4	150	Vertical	Pass
6	18386.44	44.59	12.44	74	29.42	Peak	316.9	150	Vertical	Pass

GFSK LOW CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1852.70	38.18	-10.26	74	35.82	Peak	57.9	150	Horizontal	Pass
2	2402.10	90.56	-6.13	74	-16.56	Peak	162.4	150	Horizontal	N/A
3	4880.35	62.39	-1.01	74	11.61	Peak	152.9	150	Horizontal	Pass
3**	4880.35	53.28	-1.01	54	0.72	AV	152.9	150	Horizontal	Pass
4	9650.17	45.38	14.80	74	28.62	Peak	293.7	150	Horizontal	Pass
5	13914.73	46.02	9.08	74	27.98	Peak	316.2	150	Horizontal	Pass
6	22653.91	47.35	8.97	74	26.65	Peak	301.8	150	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2065.89	38.26	-7.94	74	35.74	Peak	188.2	150	Vertical	Pass
2	2440.09	89.33	-6.14	74	-15.33	Peak	78.8	150	Vertical	N/A
3	2939.83	43.87	-1.16	74	30.13	Peak	24.6	150	Vertical	Pass
4	7426.37	44.22	13.84	74	29.78	Peak	189.2	150	Vertical	Pass
5	15755.41	42.20	8.68	74	31.80	Peak	125.5	150	Vertical	Pass
6	19209.65	44.74	13.08	74	29.26	Peak	192.5	150	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1854.29	38.99	-9.97	74	35.01	Peak	307.2	150	Horizontal	Pass
2	2440.44	90.27	-6.13	74	-16.27	Peak	211.5	150	Horizontal	N/A
3	4879.63	61.65	-0.94	74	12.35	Peak	315.1	150	Horizontal	Pass
3**	4879.63	52.54	-0.94	54	1.46	AV	315.1	150	Horizontal	Pass
4	9773.71	43.83	18.93	74	30.17	Peak	232.5	150	Horizontal	Pass
5	17845.67	45.19	11.19	74	28.81	Peak	6.8	150	Horizontal	Pass
6	24490.85	42.92	8.93	74	31.08	Peak	134.7	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2065.80	38.56	-7.82	74	35.44	Peak	57.7	150	Vertical	Pass
2	2480.55	88.73	-6.14	74	-14.73	Peak	210.6	150	Vertical	N/A
3	2937.47	44.00	-1.43	74	30.00	Peak	344	150	Vertical	Pass
4	7235.44	48.60	20.40	74	25.40	Peak	81.5	150	Vertical	Pass
5	14434.69	43.77	8.64	74	30.23	Peak	27.9	150	Vertical	Pass
6	21196.34	46.51	12.64	74	27.49	Peak	207.7	150	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 25 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	1853.55	39.66	-10.13	74	34.34	Peak	333.2	150	Horizontal	Pass
2	2480.93	89.52	-6.13	74	-15.52	Peak	146.2	150	Horizontal	N/A
3	4879.04	60.73	-1.09	74	13.27	Peak	189.1	150	Horizontal	Pass
3**	4879.04	51.62	-1.09	54	2.38	AV	189.1	150	Horizontal	Pass
4	11963.81	48.67	15.78	74	25.34	Peak	342	150	Horizontal	Pass
5	17429.70	44.71	9.02	74	29.29	Peak	325.7	150	Horizontal	Pass
6	19419.30	45.11	13.82	74	28.89	Peak	54.9	150	Horizontal	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Test Data

ANT1

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	44.46	74	29.537	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	53.89	74	20.11	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass

ANT2

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	45.24	74	28.762	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	48.60	74	25.399	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass

ANT3

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK	Low	2390	44.04	74	29.959	PEAK	Pass
		2390	N/A	54	N/A	AVERAGE	Pass
GFSK	HIGH	2483.5	51.62	74	22.381	PEAK	Pass
		2483.5	N/A	54	N/A	AVERAGE	Pass


Test Plots

ANT1

LOW CHANNEL, PEAK



HIGH CHANNEL, PEAK

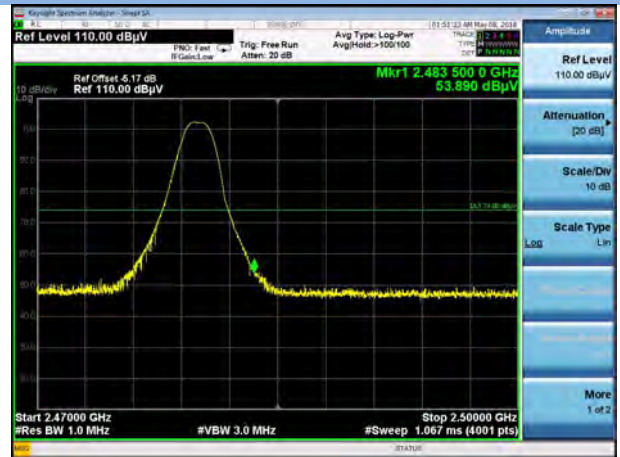


ANT2

LOW CHANNEL, PEAK




HIGH CHANNEL, PEAK

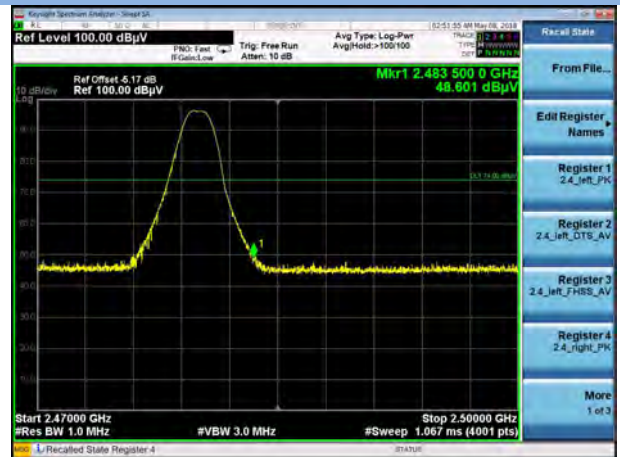


ANT3

LOW CHANNEL, PEAK

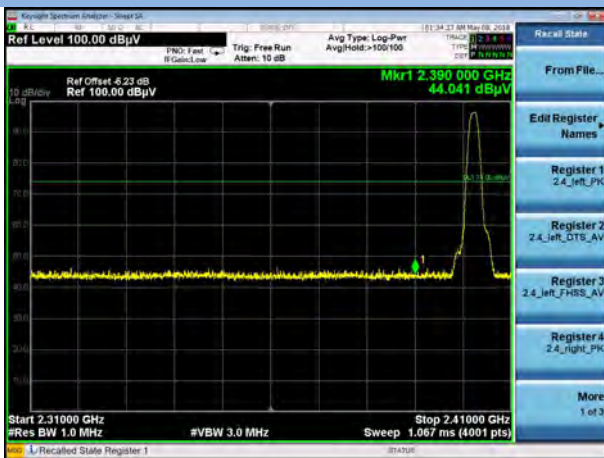

HIGH CHANNEL, PEAK

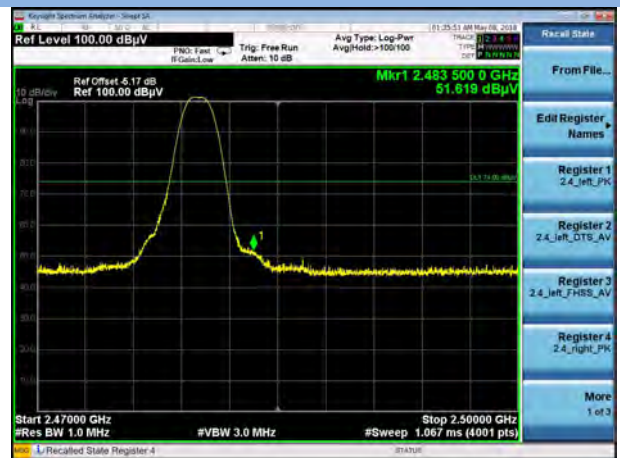

A.8 Power Spectral Density (PSD)

Test Data

ANT1

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-6.97	8	Pass
Middle Channel	-6.11	8	Pass
High Channel	-7.02	8	Pass

ANT2

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-7.31	8	Pass
Middle Channel	-7.63	8	Pass
High Channel	-8.03	8	Pass


ANT3

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-15.99	8	Pass
Middle Channel	-12.95	8	Pass
High Channel	-12.29	8	Pass


Test plots

ANT1


GFSK(BLE) LOW CHANNEL

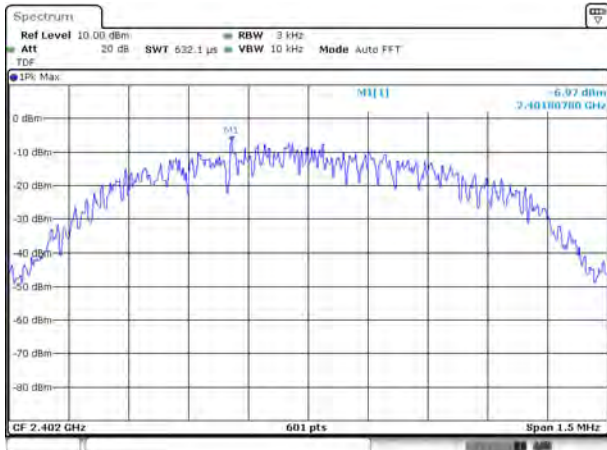

GFSK(BLE) MIDDLE CHANNEL

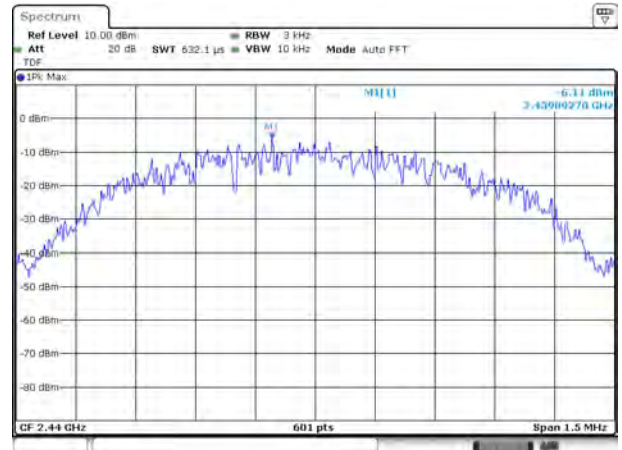


GFSK(BLE) HIGH CHANNEL

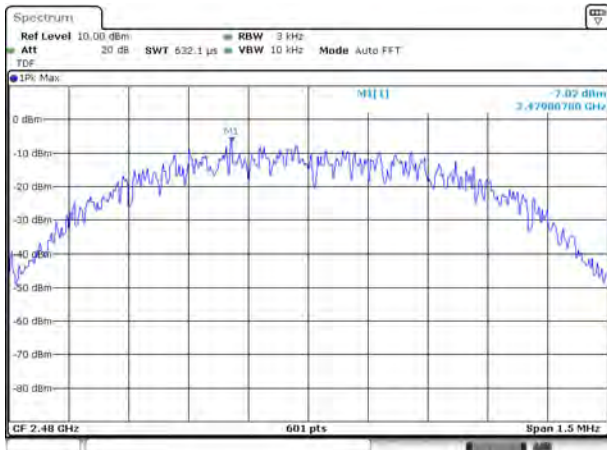


ANT2


GFSK(BLE) LOW CHANNEL

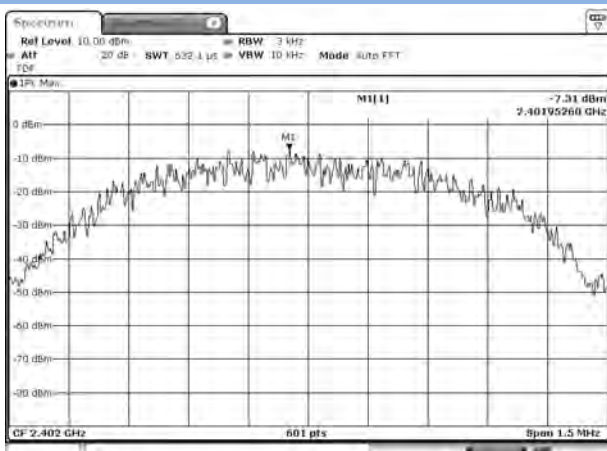

GFSK(BLE) MIDDLE CHANNEL

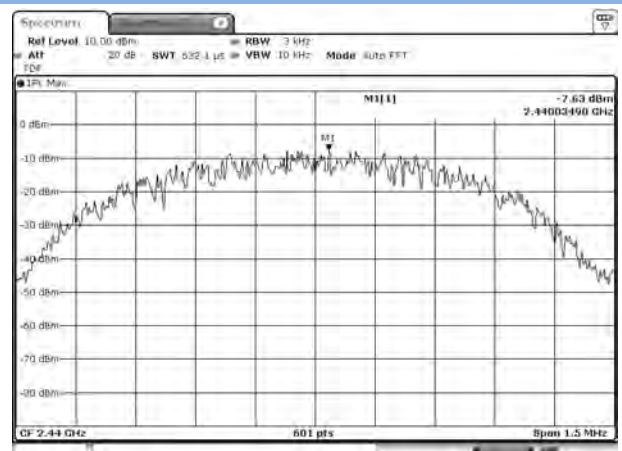


GFSK(BLE) HIGH CHANNEL

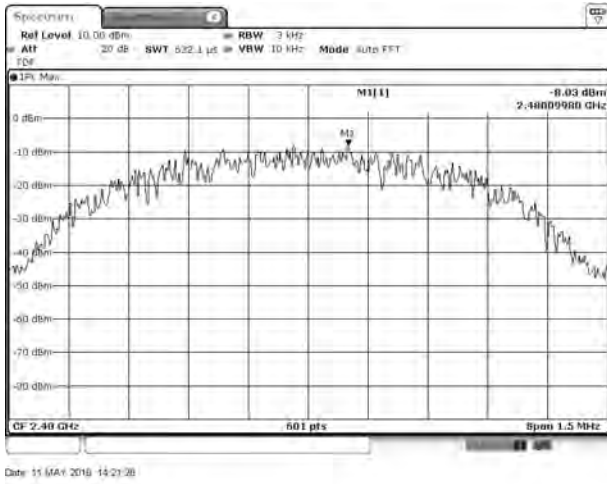


ANT3


GFSK(BLE) LOW CHANNEL

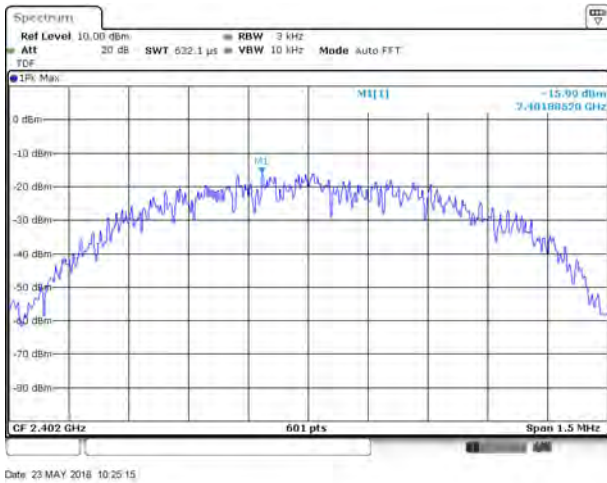

GFSK(BLE) MIDDLE CHANNEL

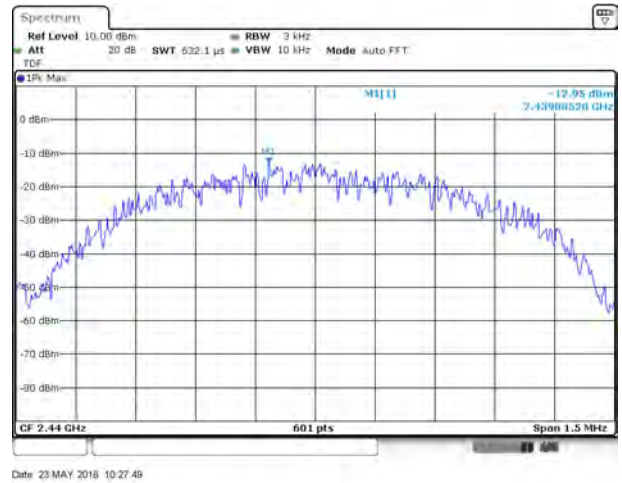

GFSK(BLE) HIGH CHANNEL

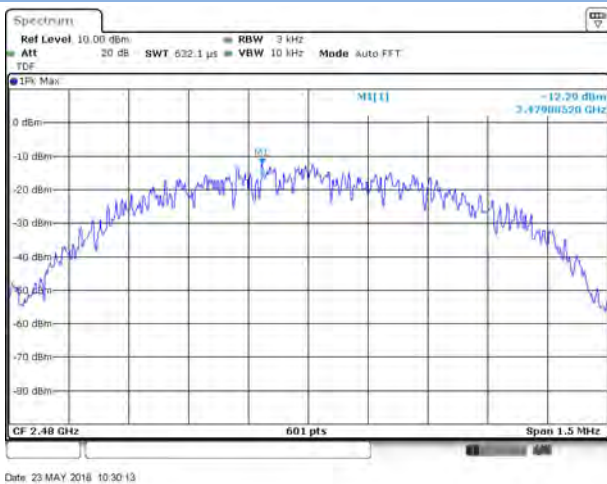

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1840394-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1840394-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1840394-AI.PDF".

--END OF REPORT--