

FCC Test Report


Report No.: AGC01600180201FE03

FCC ID : SMC-SA
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : JMGO Smart Home Theater
BRAND NAME : N/A
MODEL NAME : Refer to page 5
CLIENT : SHENZHEN HOLATEK CO., LTD
DATE OF ISSUE : Mar. 31, 2018
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S) :
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 31, 2018	Valid	Initial Release

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 5

2. GENERAL INFORMATION 6

 2.1. PRODUCT DESCRIPTION 6

 2.2. TABLE OF CARRIER FREQUENCY 7

3. MEASUREMENT UNCERTAINTY 8

4. DESCRIPTION OF TEST MODES 9

5. SYSTEM TEST CONFIGURATION 10

 5.1. CONFIGURATION OF EUT SYSTEM 10

 5.2. EQUIPMENT USED IN EUT SYSTEM 10

 5.3. SUMMARY OF TEST RESULTS 10

6. TEST FACILITY 11

7. RADIATED EMISSION 12

 7.1 TEST LIMIT 12

 7.2. MEASUREMENT PROCEDURE 13

 7.3. TEST SETUP 15

 7.4. TEST RESULT 16

8. BAND EDGE EMISSION 30

 8.1. MEASUREMENT PROCEDURE 30

 8.2 TEST SETUP 30

 8.3 RADIATED TEST RESULT 30

9. 20DB BANDWIDTH 39

 9.1. MEASUREMENT PROCEDURE 39

 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 39

 9.3. MEASUREMENT RESULTS 40

10. FCC LINE CONDUCTED EMISSION TEST 48

 10.1. LIMITS OF LINE CONDUCTED EMISSION TEST 48

 10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 48

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 49
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 49
10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 50
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 52

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


1. VERIFICATION OF CONFORMITY

Applicant	SHENZHEN HOLATEK CO., LTD
Address	Rm.1001, Unit4, Bld.B, Kexing Science Park, Keyuan Road, Nashan District, Shenzhen
Manufacturer	BYD Precision Manufacturing., Ltd
Address	NO.3001, Baohe Road, Baolong Industrial Town, Longgang Shenzhen. china
Product Designation	JMGO Smart Home Theater
Brand Name	N/A
Test Model	SA
Series Model	SC, SA Pro, SC Pro, SCC, SAA, S2, S3, S4, S5, S6, S7, S8, S9, S20, S30, S40, S50, S60, S70, S80, S90, S21, S22, S23, S24, S25, S26, S27, S28, S29, S31, S32, S33, S34, S35, S36, S37, S38, S39, T11, T12, T13, T14, T15, T16, T17, T18, T19, T21, T22, T23, T24, T25, T26, T27, T28, T29, T31, T32, T33, T34, T35, T36, T37, T38, T39, S200, S300, S400, S500, S600, S700, S800, S900, S201, S202, S203, S204, S205, S206, S207, S208, S209, S301, S302, S303, S304, S305, S306, S307, S308, S309, T101, T102, T103, T104, T105, T106, T107, T108, T109, T201, T202, T203, T204, T205, T206, T207, T208, T209, T301, T302, T303, T304, T305, T306, T307, ST308, T309
Model Difference	All are the same except the model name.
Date of test	Mar. 11, 2018 to Mar. 30, 2018
Deviation	None
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested by



Max Zhang(Zhang Yi)

Mar. 31, 2018

Reviewed by



Bart Xie(Xie Xiaobin))

Mar. 31, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
Maximum field strength	91.49dBuV/m(AV)@3m
Bluetooth Version	V4.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR GFSK for BLE
Number of channels	79 for BR/EDR, 40 for BLE
Antenna Gain	3dBi
Antenna Designation	Fixed Antenna (Met 15.203 Antenna requirement)
Hardware Version	VerC
Software Version	1.0.18
Power Supply	AC120V/60Hz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2.2. TABLE OF CARRIER FREQUENCY
BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, $U_c = \pm 3.2$ dB
- Uncertainty of Radiated Emission below 1GHz, $U_c = \pm 3.9$ dB
- Uncertainty of Radiated Emission above 1GHz, $U_c = \pm 4.8$ dB

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Low channel for BLE
11	Middle channel for BLE
12	High channel for BLE

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	JmGO Smart Home Theater	SA	SMC-SA	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Compliant

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP LAB CODE	600153-0
Designation Number	CN5028
FCC Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun.20, 2017	Jun.19, 2018
LISN	R&S	ESH2-Z5	100086	Aug.21, 2017	Aug.20, 2018

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Power sensor	Aglient	U2021XA	MY54110007	Sep.21, 2017	Sep.20, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Active loop antenna (9K-30MHz)	A.H.	SAS-562B	N/A	Mar.01, 2016	Feb.28, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7. RADIATED EMISSION

7.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark:

- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7.2. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 1.5MHz/ VBW 5MHz for Peak, RBW 1.5MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

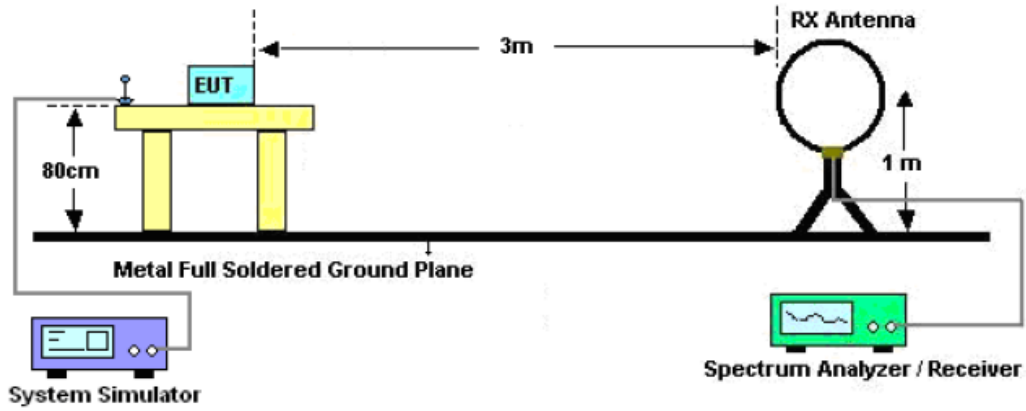

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

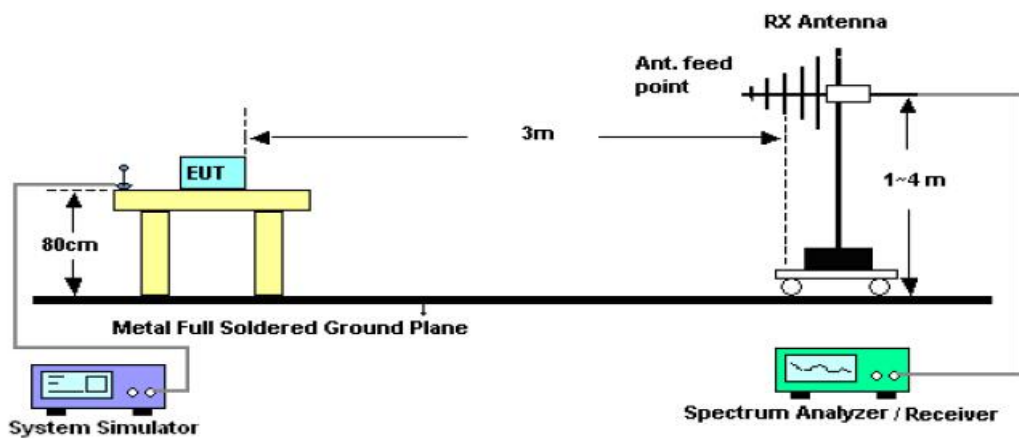

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

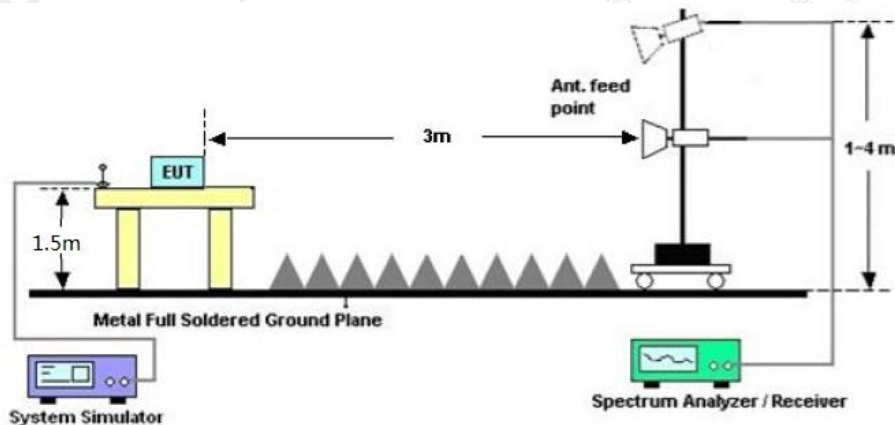

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION 30MHZ- 1GHZ FOR BR/EDR

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Horizontal

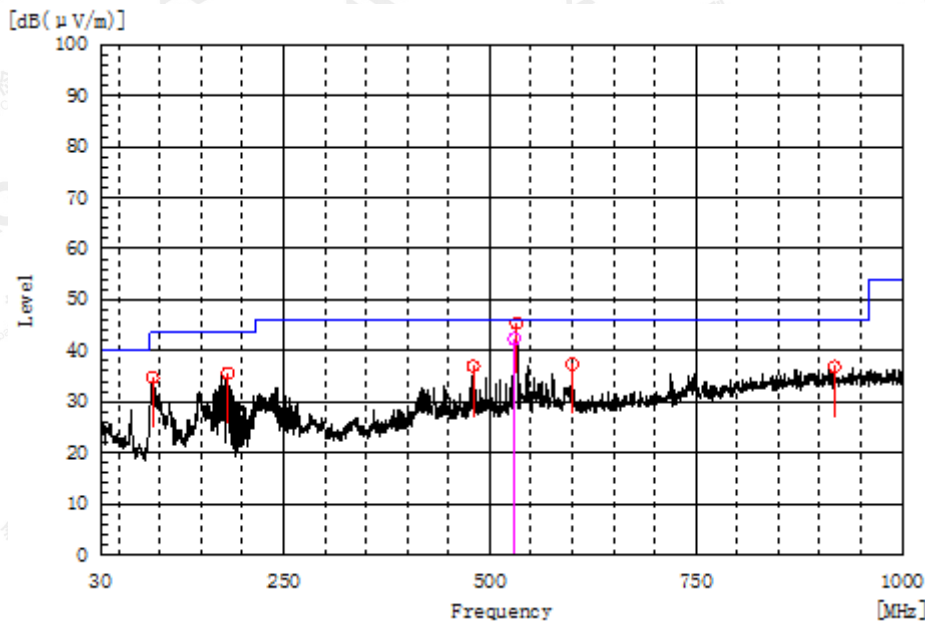


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
91.595	H	22.3	12.4	34.7	43.5	8.8	Pass	200.0	268.0
182.775	H	21.3	14.3	35.6	43.5	7.9	Pass	150.0	286.9
531.975	H	21.9	23.5	45.4	46.0	0.6	Pass	200.0	157.8
918.035	H	6.5	30.4	36.9	46.0	9.1	Pass	200.0	268.0
480.080	H	14.4	22.6	37.0	46.0	9.0	Pass	150.0	286.9
599.875	H	12.4	24.9	37.3	46.0	8.7	Pass	200.0	85.9

Frequency MHz	Polarization	Reading dB(uV) QP	Factor dB (1/m)	Level dB(uV/m) QP	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
529.840	H	18.9	23.4	42.3	46.0	3.7	Pass	200.0	157.8

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Vertical

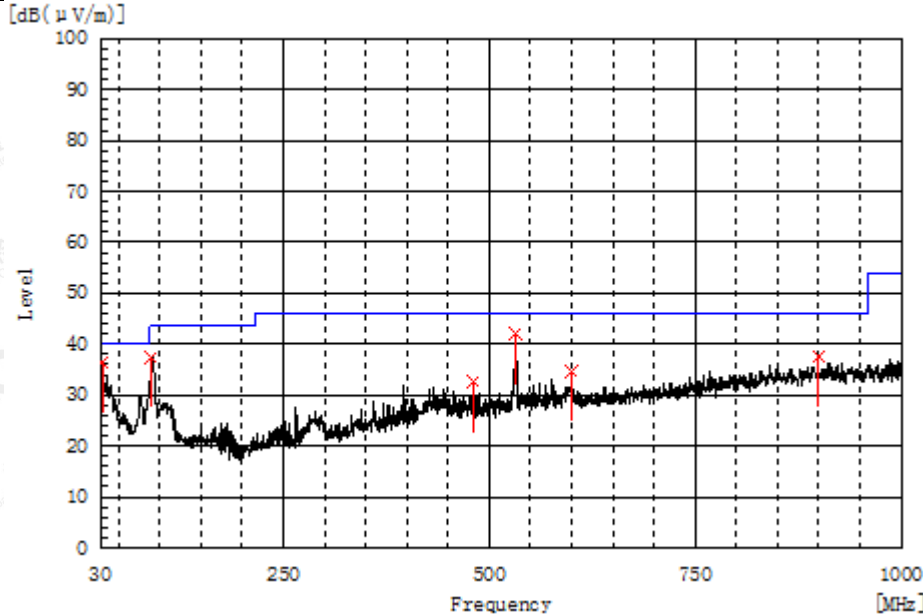

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
30.970	V	20.7	15.6	36.3	40.0	3.7	Pass	100.0	92.5
90.140	V	25.2	12.3	37.5	43.5	6.0	Pass	200.0	178.2
480.565	V	9.9	22.6	32.5	46.0	13.5	Pass	150.0	215.6
531.975	V	18.4	23.5	41.9	46.0	4.1	Pass	150.0	252.0
599.875	V	9.9	24.9	34.8	46.0	11.2	Pass	100.0	92.5
899.605	V	7.3	30.2	37.5	46.0	8.5	Pass	100.0	92.5

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION 30MHz- 1GHz FOR BLE


EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Horizontal

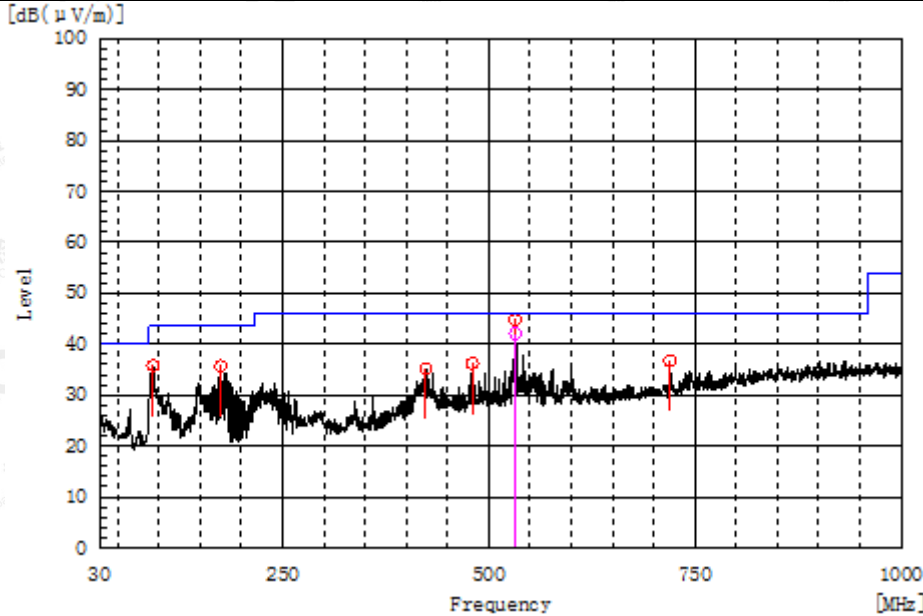

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
93.535	H	23.3	12.5	35.8	43.5	7.7	Pass	100.0	171.0
175.015	H	20.5	15.2	35.7	43.5	7.8	Pass	100.0	88.4
480.080	H	13.6	22.6	36.2	46.0	9.8	Pass	100.0	318.1
531.975	H	21.3	23.5	44.8	46.0	1.2	Pass	100.0	115.3
719.670	H	9.9	26.8	36.7	46.0	9.3	Pass	100.0	133.2
423.820	H	13.7	21.5	35.2	46.0	10.8	Pass	100.0	25.0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Vertical

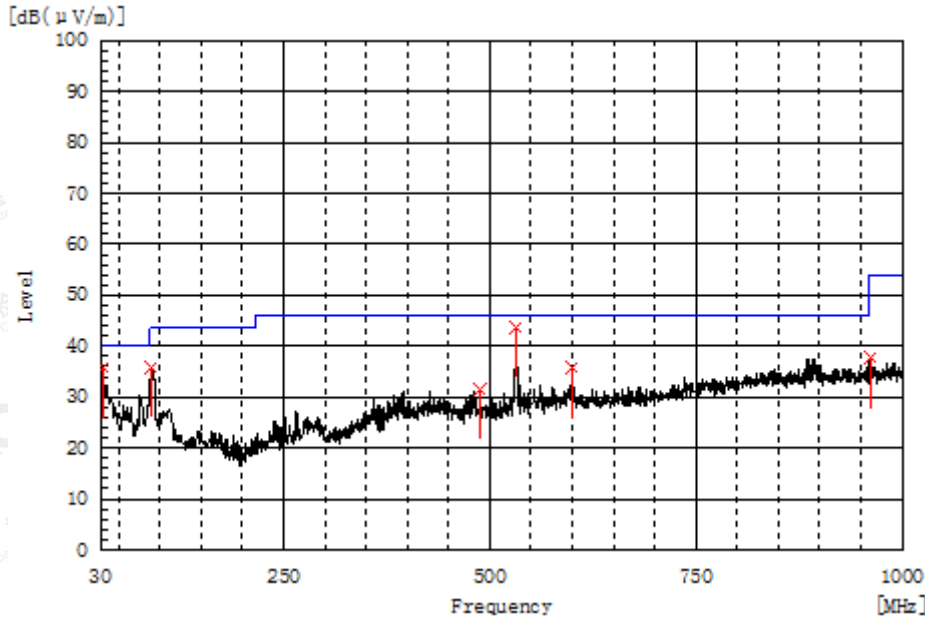

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
30.970	V	20.2	15.6	35.8	40.0	4.2	Pass	200.0	90.5
90.140	V	23.6	12.3	35.9	43.5	7.6	Pass	100.0	72.2
488.325	V	8.9	22.7	31.6	46.0	14.4	Pass	150.0	72.8
531.975	V	20.2	23.5	43.7	46.0	2.3	Pass	150.0	72.8
599.875	V	10.9	24.9	35.8	46.0	10.2	Pass	200.0	90.5
961.685	V	6.9	30.8	37.7	54.0	16.3	Pass	200.0	90.5

RESULT: PASS

Note:

Factor=Antenna Factor + Cable loss, Margin=Result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The mode 10 is the worst case, and only the data of the worst case recorded in this test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

FIELD STRENGTH OF FUNDAMENTAL FOR BR/EDR

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	GFSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	90.51	2.45	92.96	114	-21.04	peak
2402.013	88.31	2.45	90.76	94	-3.24	AVG
2441.016	90.25	2.88	93.13	114	-20.87	peak
2441.016	88.14	2.88	91.02	94	-2.98	AVG
2480.021	90.52	3.14	93.66	114	-20.34	peak
2480.021	88.35	3.14	91.49	94	-2.51	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	GFSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	88.46	2.45	90.91	114	-23.09	peak
2402.013	86.28	2.45	88.73	94	-5.27	AVG
2441.016	88.21	2.88	91.09	114	-22.91	peak
2441.016	86.09	2.88	88.97	94	-5.03	AVG
2480.021	88.42	3.14	91.56	114	-22.44	peak
2480.021	86.26	3.14	89.4	94	-4.6	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	π /4-DQPSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	89.54	2.45	91.99	114	-22.01	peak
2402.013	87.35	2.45	89.8	94	-4.2	AVG
2441.016	89.44	2.88	92.32	114	-21.68	peak
2441.016	87.29	2.88	90.17	94	-3.83	AVG
2480.021	89.51	3.14	92.65	114	-21.35	peak
2480.021	87.66	3.14	90.8	94	-3.2	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	π /4-DQPSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	87.48	2.45	89.93	114	-24.07	peak
2402.013	85.29	2.45	87.74	94	-6.26	AVG
2441.016	87.39	2.88	90.27	114	-23.73	peak
2441.016	85.31	2.88	88.19	94	-5.81	AVG
2480.021	87.56	3.14	90.7	114	-23.3	peak
2480.021	85.71	3.14	88.85	94	-5.15	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	8DPSK	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	89.24	2.45	91.69	114	-22.31	peak
2402.013	87.11	2.45	89.56	94	-4.44	AVG
2441.016	89.21	2.88	92.09	114	-21.91	peak
2441.016	87.05	2.88	89.93	94	-4.07	AVG
2480.021	89.32	3.14	92.46	114	-21.54	peak
2480.021	87.31	3.14	90.45	94	-3.55	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	8DPSK	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
2402.013	87.04	2.45	89.49	114	-24.51	peak
2402.013	84.95	2.45	87.4	94	-6.6	AVG
2441.016	87.33	2.88	90.21	114	-23.79	peak
2441.016	85.69	2.88	88.57	94	-5.43	AVG
2480.021	87.25	3.14	90.39	114	-23.61	peak
2480.021	85.24	3.14	88.38	94	-5.62	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

FIELD STRENGTH OF FUNDAMENTAL FOR BLE

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	GFSK for BLE	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2402.013	87.84	2.45	90.29	114	-23.71	peak
2402.013	83.72	2.45	86.17	94	-7.83	AVG
2440.016	87.64	2.88	90.52	114	-23.48	peak
2440.016	83.26	2.88	86.14	94	-7.86	AVG
2480.021	87.79	3.14	90.93	114	-23.07	peak
2480.021	83.67	3.14	86.81	94	-7.19	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humiditytity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Modulation :	GFSK for BLE	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2402.013	85.69	2.45	88.14	114	-25.86	peak
2402.013	81.57	2.45	84.02	94	-9.98	AVG
2440.016	85.57	2.88	88.45	114	-25.55	peak
2440.016	81.36	2.88	84.24	94	-9.76	AVG
2480.021	85.69	3.14	88.83	114	-25.17	peak
2480.021	81.74	3.14	84.88	94	-9.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION ABOVE 1GHZ FOR BR/EDR

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4804.026	42.64	7.12	49.76	74	-24.24	peak
4804.026	39.54	7.12	46.66	54	-7.34	AVG
7206.039	37.52	9.84	47.36	74	-26.64	peak
7206.039	34.26	9.84	44.1	54	-9.9	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4804.026	41.85	7.12	48.97	74	-25.03	peak
4804.026	38.27	7.12	45.39	54	-8.61	AVG
7206.039	36.74	9.84	46.58	74	-27.42	peak
7206.039	33.28	9.84	43.12	54	-10.88	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 2	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4882.032	42.34	7.12	49.46	74	-24.54	peak
4882.032	39.25	7.12	46.37	54	-7.63	AVG
7323.048	37.17	9.84	47.01	74	-26.99	peak
7323.048	34.04	9.84	43.88	54	-10.12	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 2	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4882.032	41.88	7.12	49	74	-25	peak
4882.032	38.64	7.12	45.76	54	-8.24	AVG
7323.048	38.22	9.84	48.06	74	-25.94	peak
7323.048	35.04	9.84	44.88	54	-9.12	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4960.042	43.25	7.12	50.37	74	-23.63	peak
4960.042	39.95	7.12	47.07	54	-6.93	AVG
7440.063	38.45	9.84	48.29	74	-25.71	peak
7440.063	35.04	9.84	44.88	54	-9.12	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Value Type
4960.042	42.88	7.12	50	74	-24	peak
4960.042	38.69	7.12	45.81	54	-8.19	AVG
7440.063	37.52	9.84	47.36	74	-26.64	peak
7440.063	34.19	9.84	44.03	54	-9.97	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION ABOVE 1GHZ FOR BLE

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.026	44.52	7.12	51.64	74	-22.36	peak
4804.026	40.15	7.12	47.27	54	-6.73	AVG
7206.039	40.28	9.84	50.12	74	-23.88	peak
7206.039	36.38	9.84	46.22	54	-7.78	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.026	44.15	7.12	51.27	74	-22.73	peak
4804.026	39.28	7.12	46.4	54	-7.6	AVG
7206.039	39.54	9.84	49.38	74	-24.62	peak
7206.039	35.29	9.84	45.13	54	-8.87	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 11	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4880.032	45.26	7.12	52.38	74	-21.62	peak
4880.032	41.33	7.12	48.45	54	-5.55	AVG
7320.048	40.52	9.84	50.36	74	-23.64	peak
7320.048	36.44	9.84	46.28	54	-7.72	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 11	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4880.032	44.85	7.12	51.97	74	-22.03	peak
4880.032	40.29	7.12	47.41	54	-6.59	AVG
7320.048	39.58	9.84	49.42	74	-24.58	peak
7320.048	35.41	9.84	45.25	54	-8.75	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 12	Polarization :	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.042	47.55	7.12	54.67	74	-19.33	peak
4960.042	42.34	7.12	49.46	54	-4.54	AVG
7440.063	40.52	9.84	50.36	74	-23.64	peak
7440.063	36.41	9.84	46.25	54	-7.75	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 12	Polarization :	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.042	46.25	7.12	53.37	74	-20.63	peak
4960.042	41.05	7.12	48.17	54	-5.83	AVG
7440.063	40.85	9.84	50.69	74	-23.31	peak
7440.063	36.58	9.84	46.42	54	-7.58	AVG

Remark:
 Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Note: Other emissions from 8G to 25 GHz are considered as ambient noise. No recording in the test report.
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 The “Factor” value can be calculated automatically by software of measurement system.
 The GFSK modulation was the worst case and only the data of worst recorded in this report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz ; VBW=1/on time(1KHz) / Sweep=AUTO
3. Other procedures refer to clause 7.2.

8.2 TEST SETUP

RADIATED EMISSION TEST SETUP

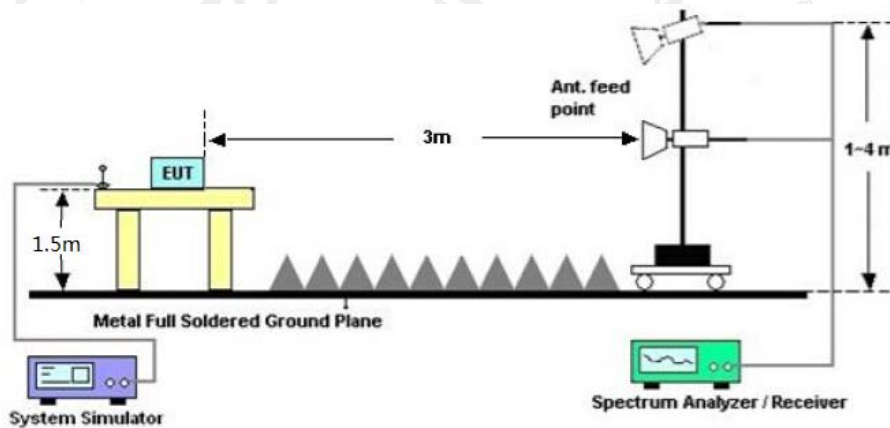

8.3 RADIATED TEST RESULT

Note:


1. Factor=Antenna Factor + Cable loss - Amplifier gain. Field Strength=Factor + Reading level
2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μV) to represent the Amplitude. Use the F dB(μV/m) to represent the Field Strength. So A=F.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


FOR BR/EDR:

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Horizontal

PK Value

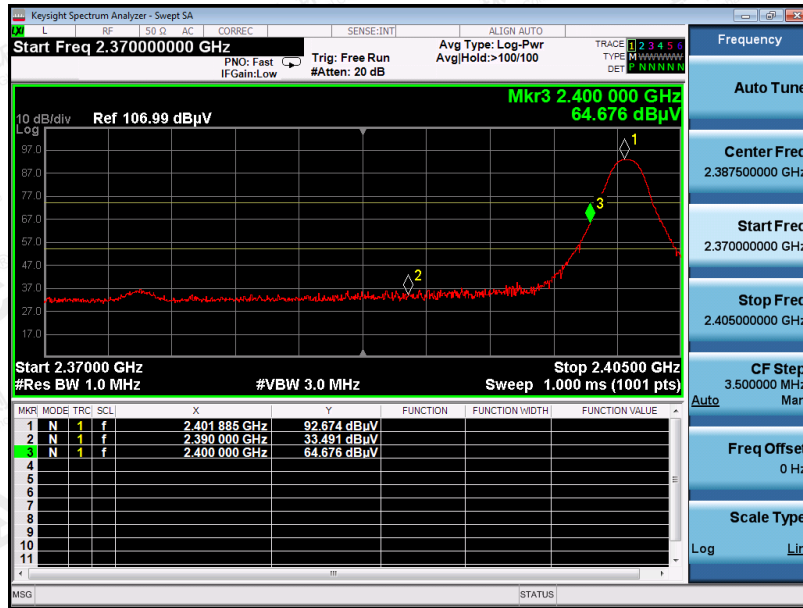


AV Value

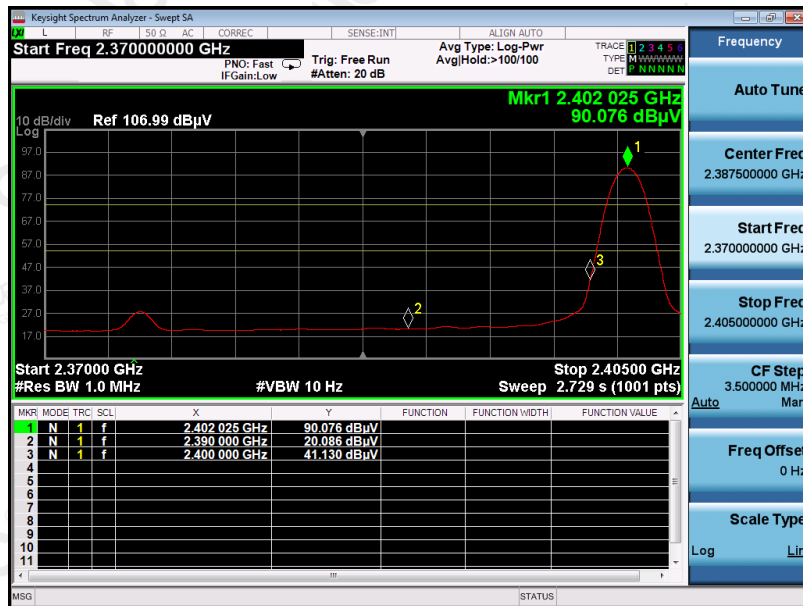


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 1	Polarization :	Vertical

PK Value

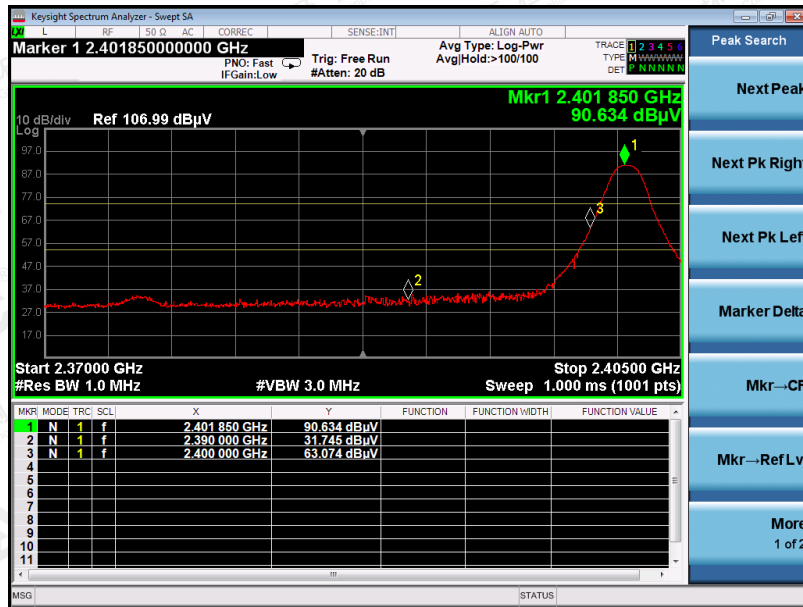


AV Value

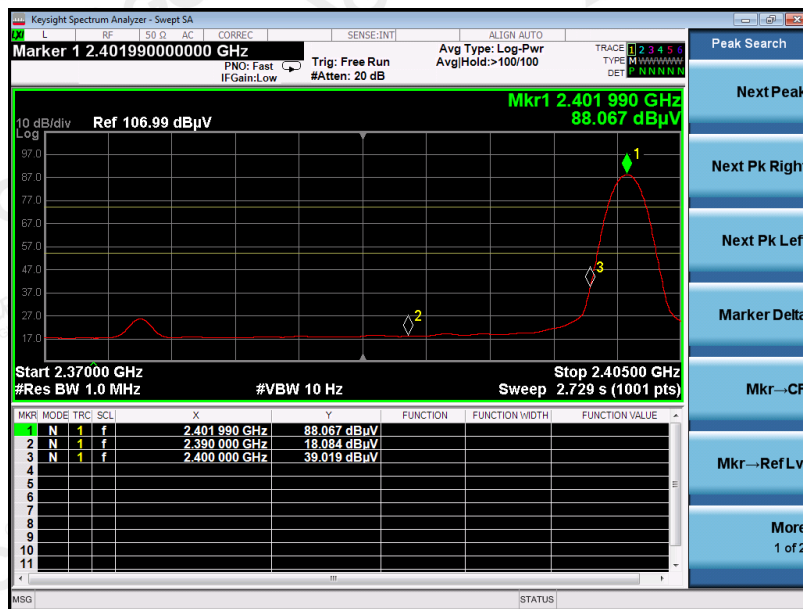

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Horizontal

PK Value

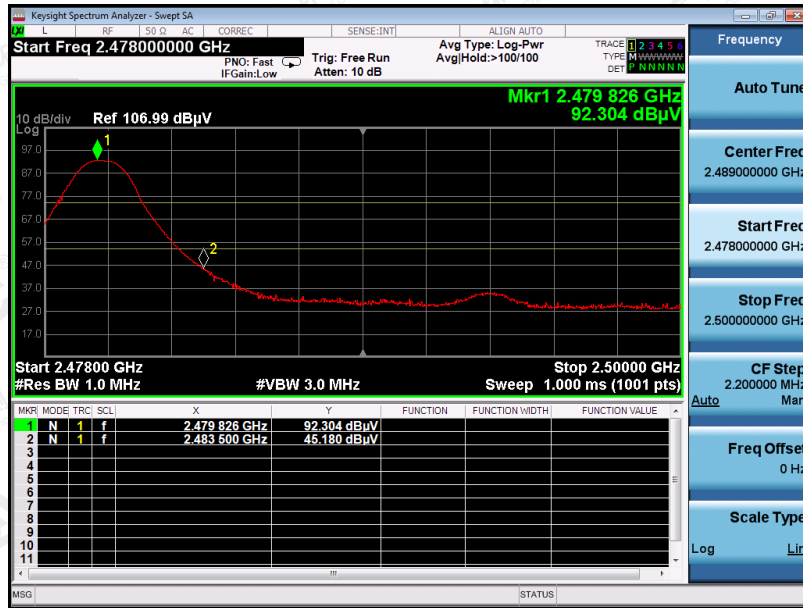

AV Value



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 3	Polarization :	Vertical

PK Value



AV Value




Note: The GFSK modulation was the worst case and only the data of worst recorded in this report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


FOR BLE

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Horizontal

PK Value

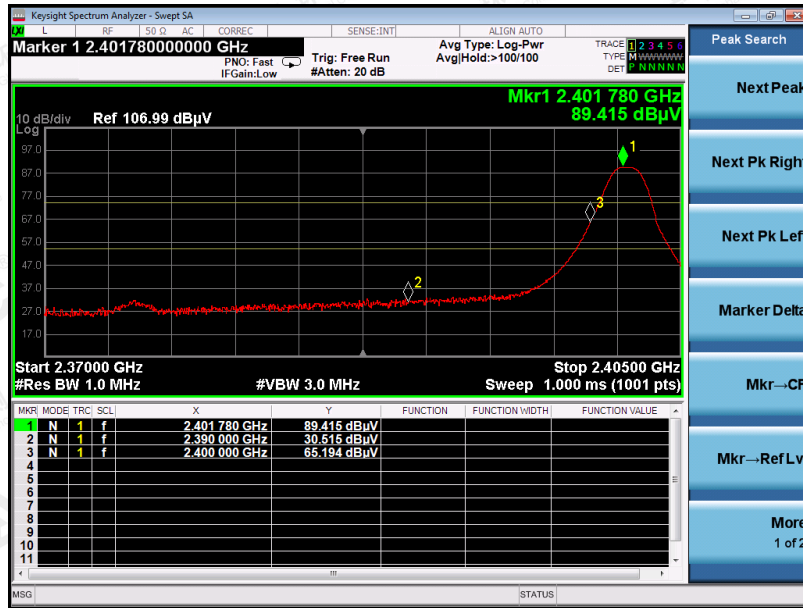

AV Value

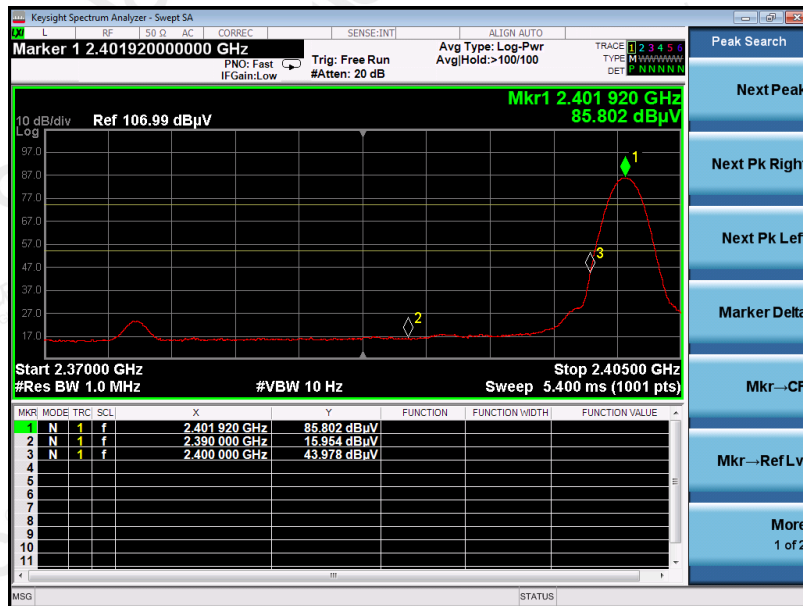


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 10	Polarization :	Vertical

PK Value




AV Value

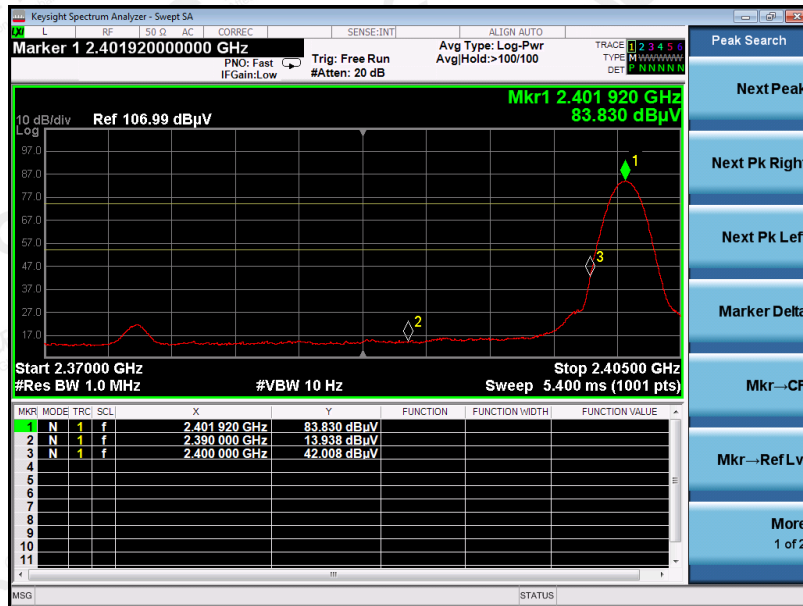


The results shown in this test report refer only to the sample(s) tested otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 12	Polarization :	Horizontal

PK Value

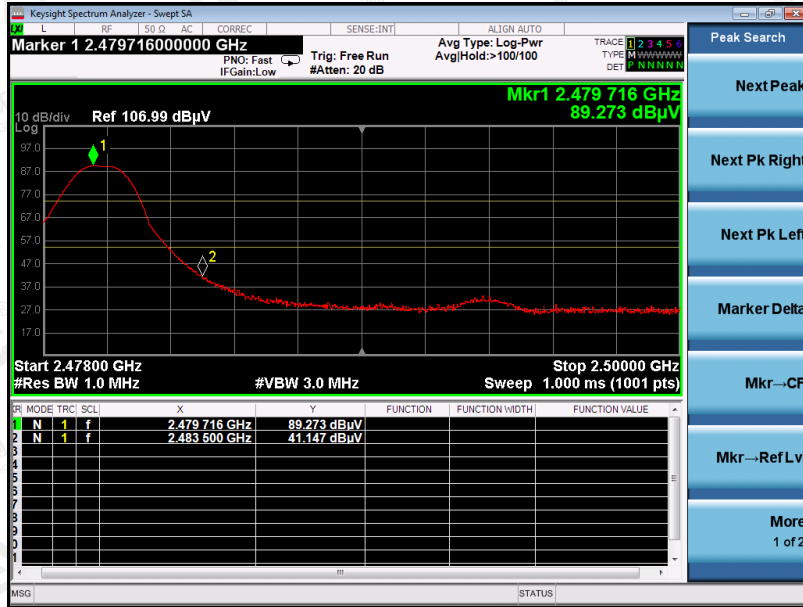


AV Value

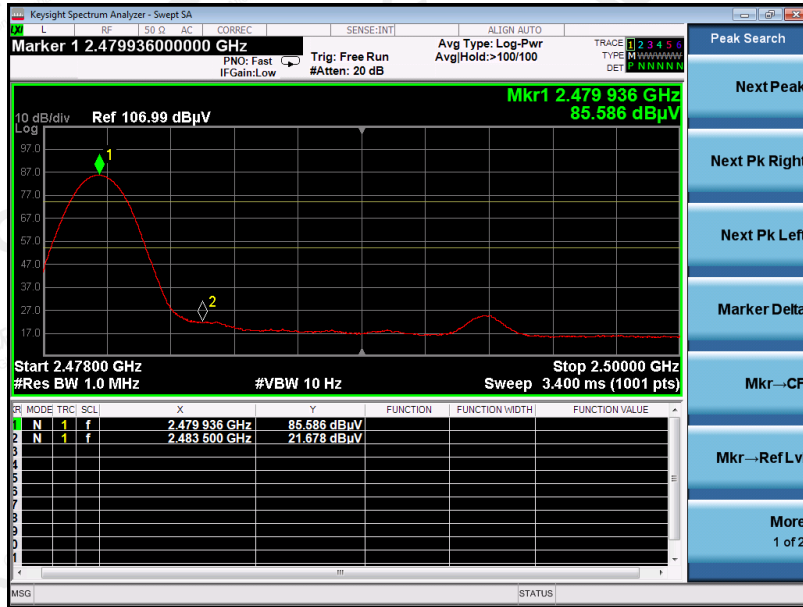


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

EUT :	JmGO Smart Home Theater	Model Name. :	SA
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	AC120V
Test Mode :	Mode 12	Polarization :	Vertical

PK Value

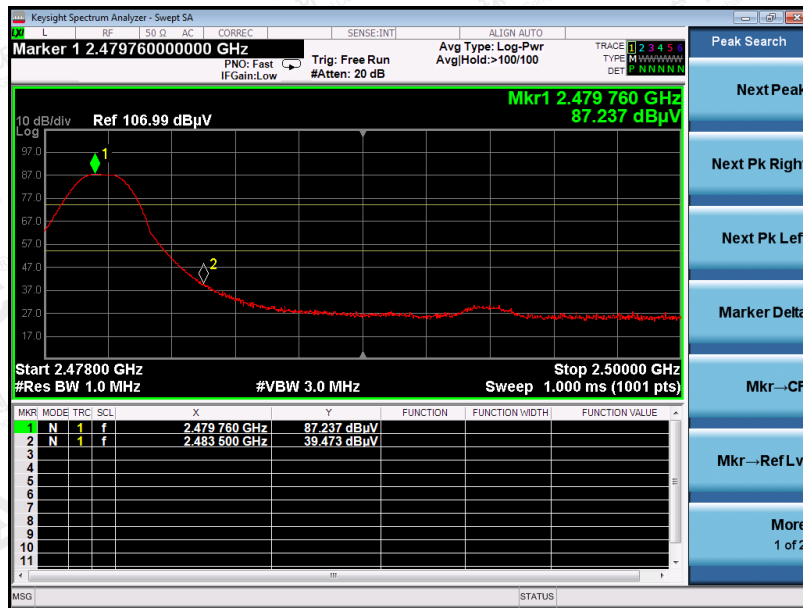

AV Value

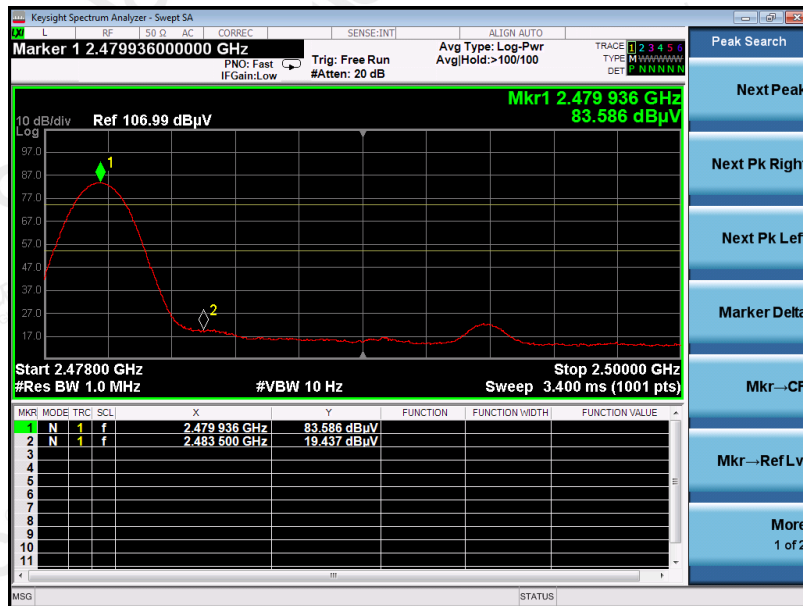


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 30 KHz, VBW $\geq 3 \times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

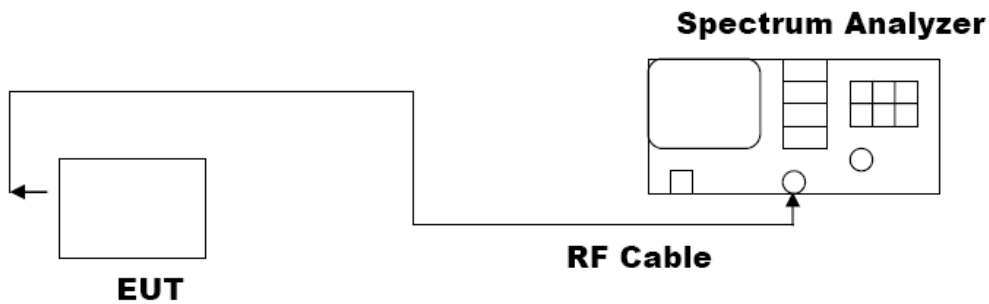

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	0.8616	PASS
Middle Channel	0.9229	PASS
High Channel	0.9194	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

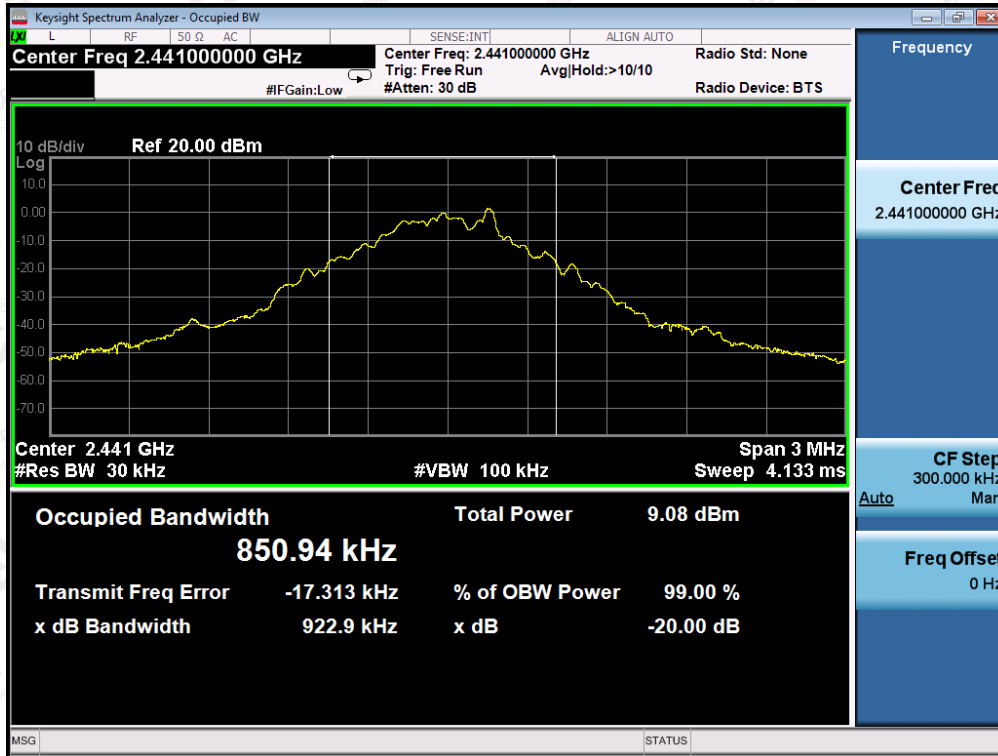

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

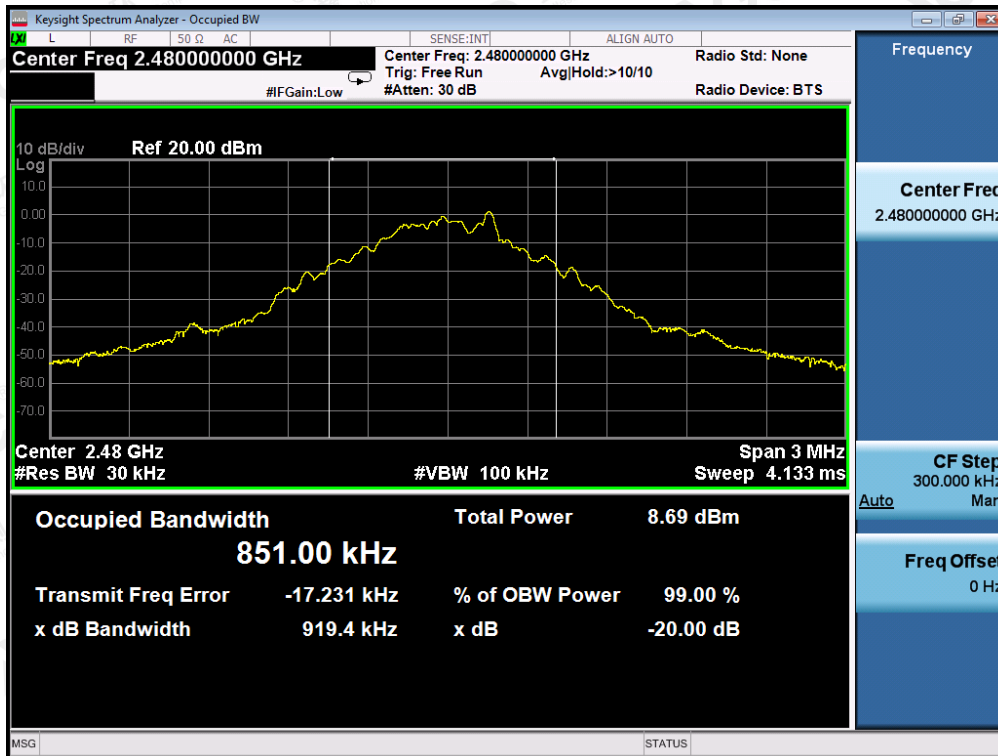


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	π /4-DQPSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.219	PASS
Middle Channel	1.219	PASS
High Channel	1.222	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

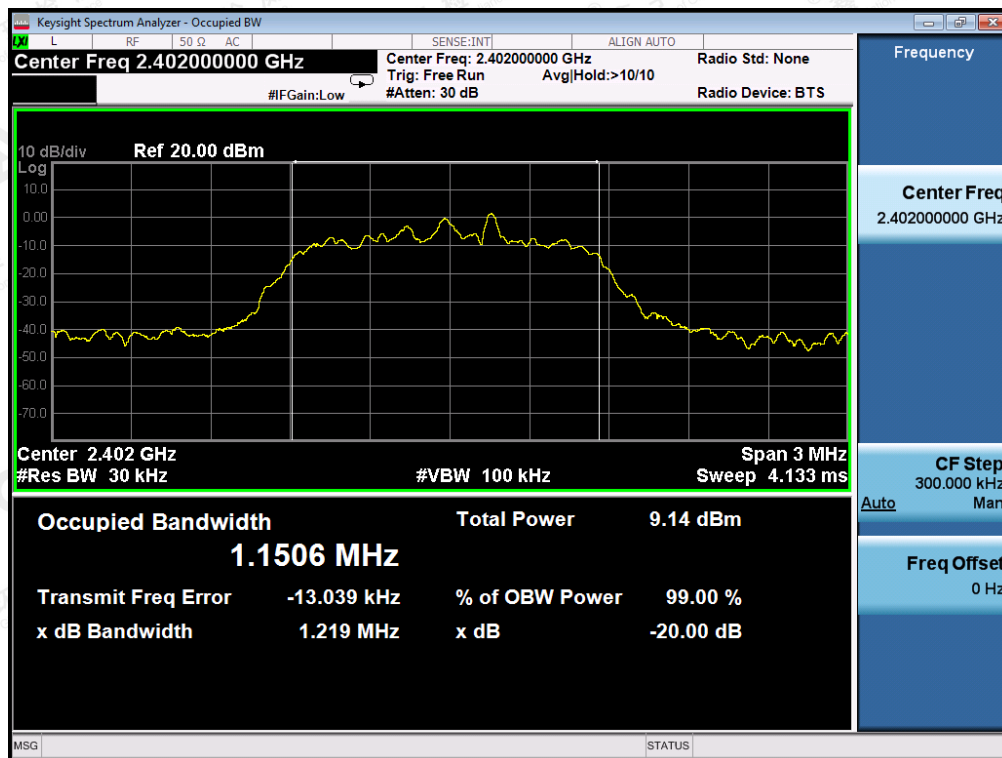


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

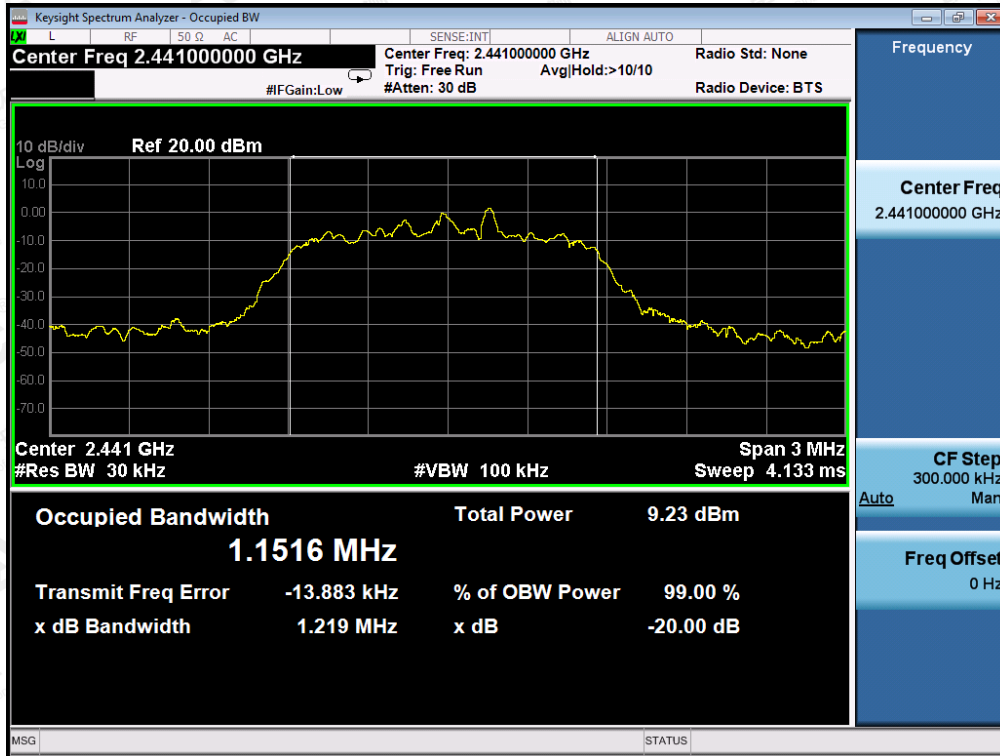

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

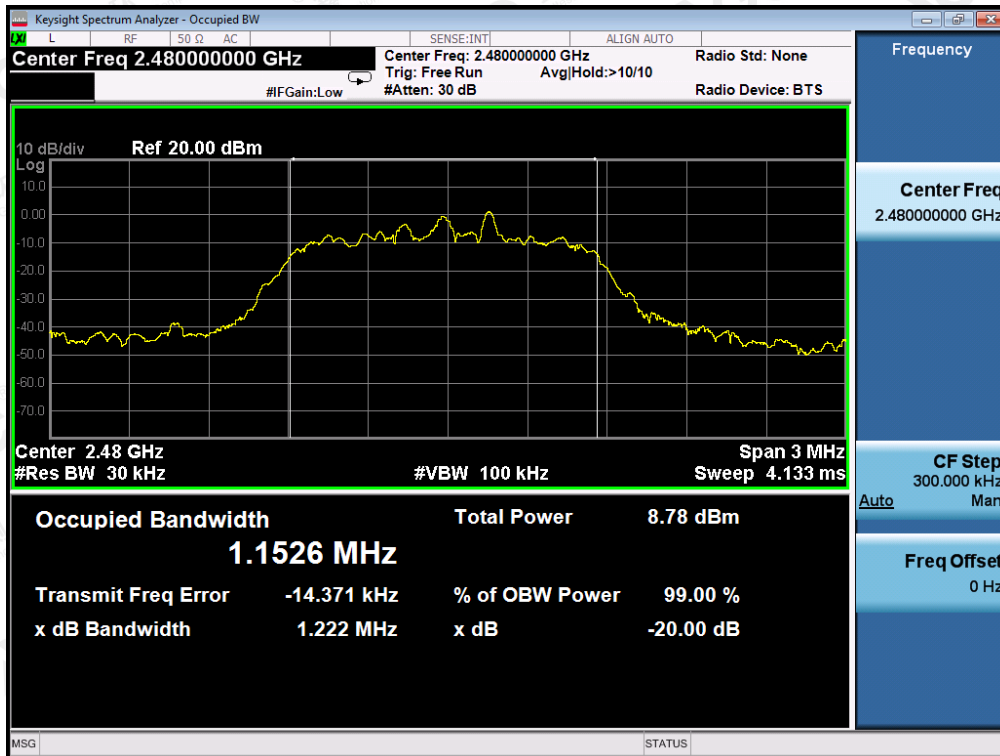


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	8DPSK for BR/EDR


Test Data (MHz)		Criteria
Low Channel	1.255	PASS
Middle Channel	1.258	PASS
High Channel	1.256	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

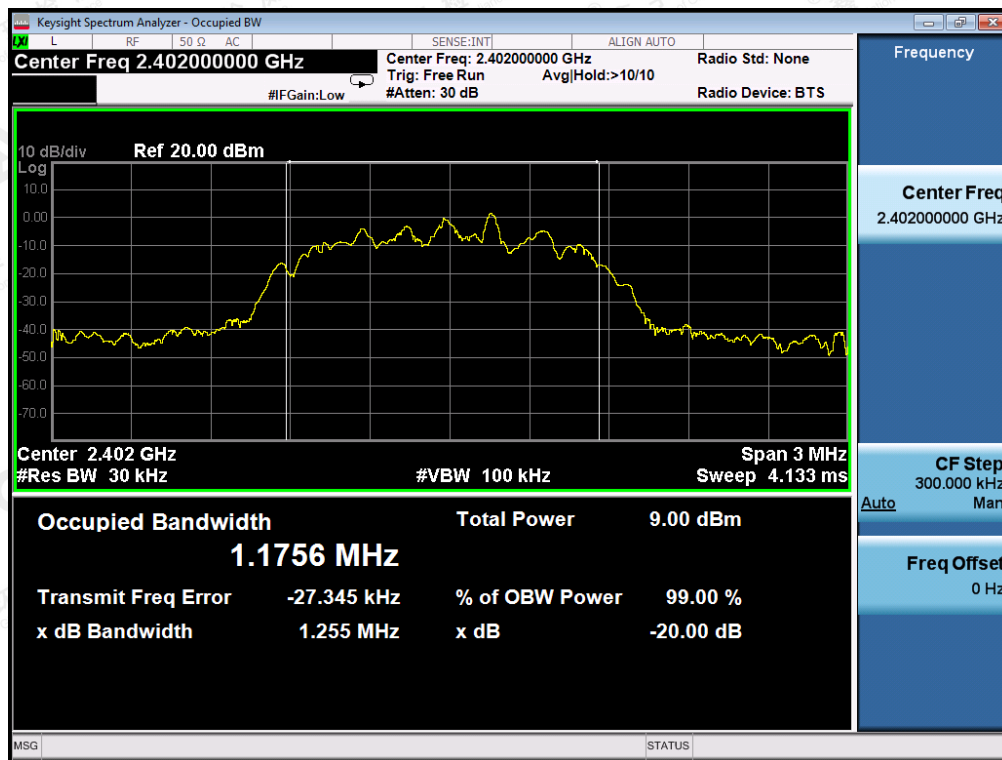


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

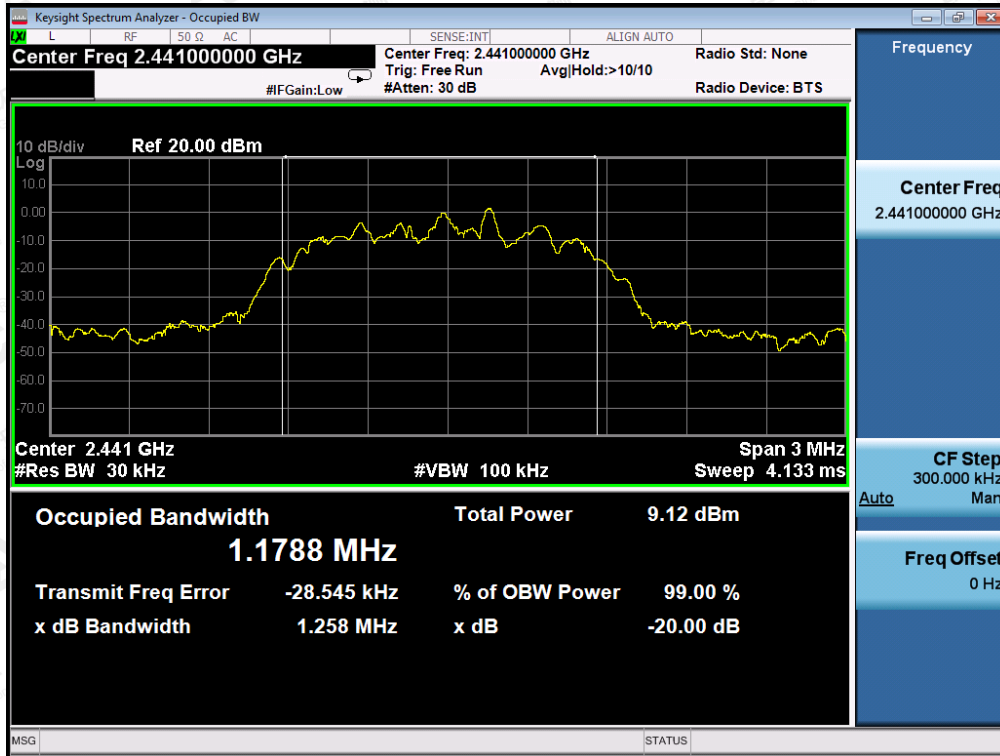

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

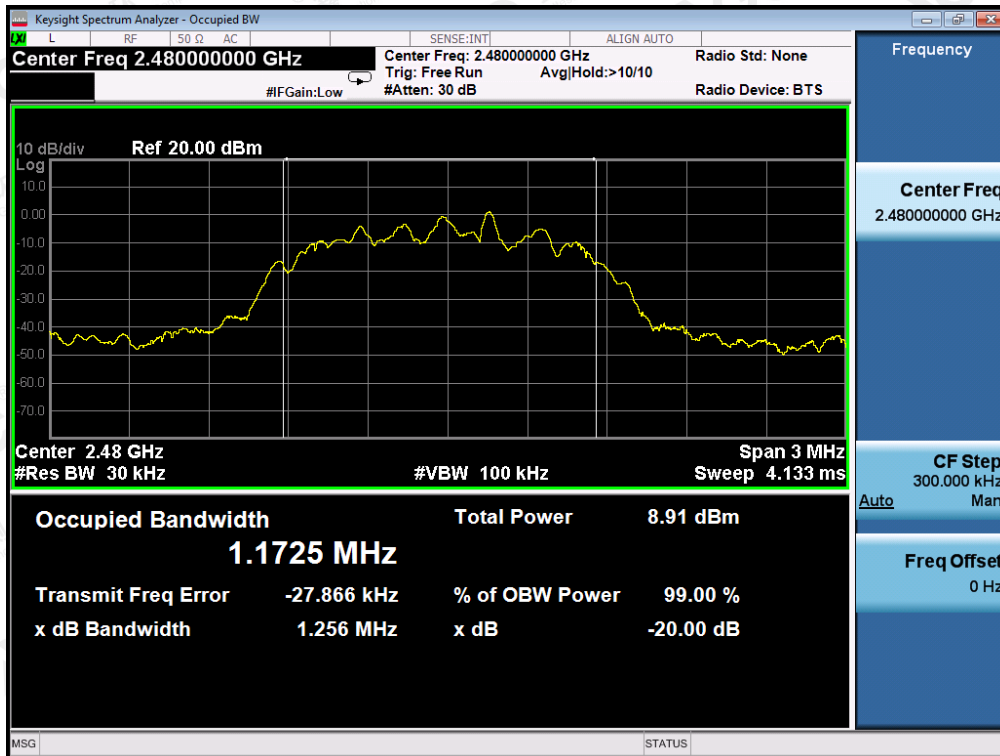

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK for BLE


Test Data (MHz)		Criteria
Low Channel	1.125	PASS
Middle Channel	1.132	PASS
High Channel	1.128	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

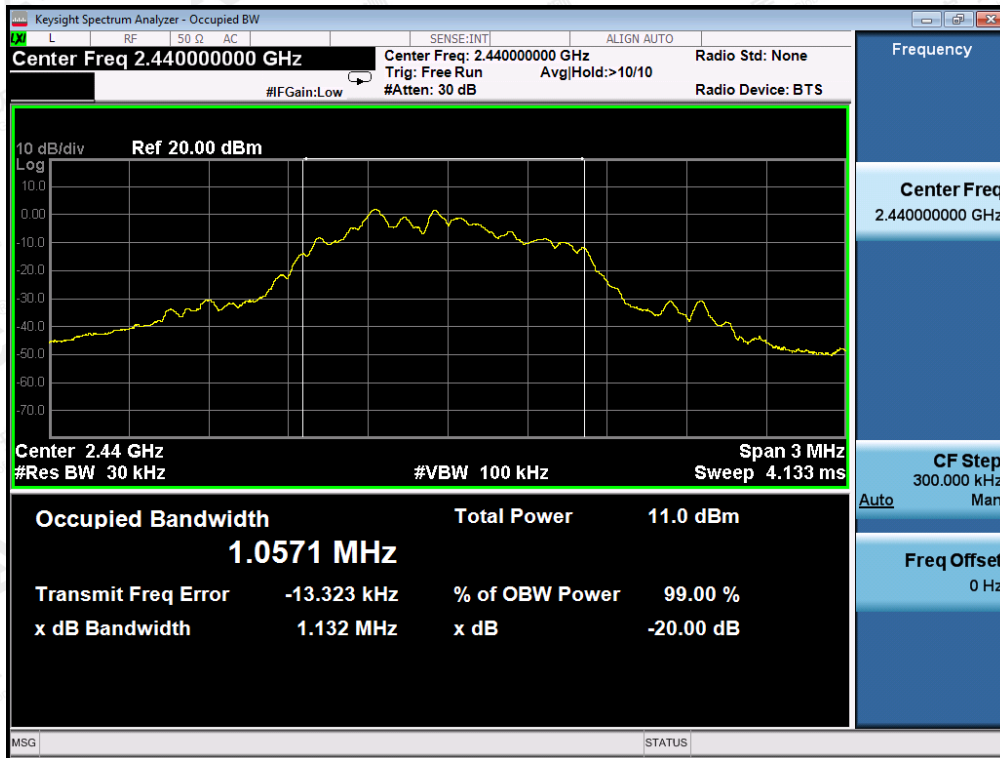

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

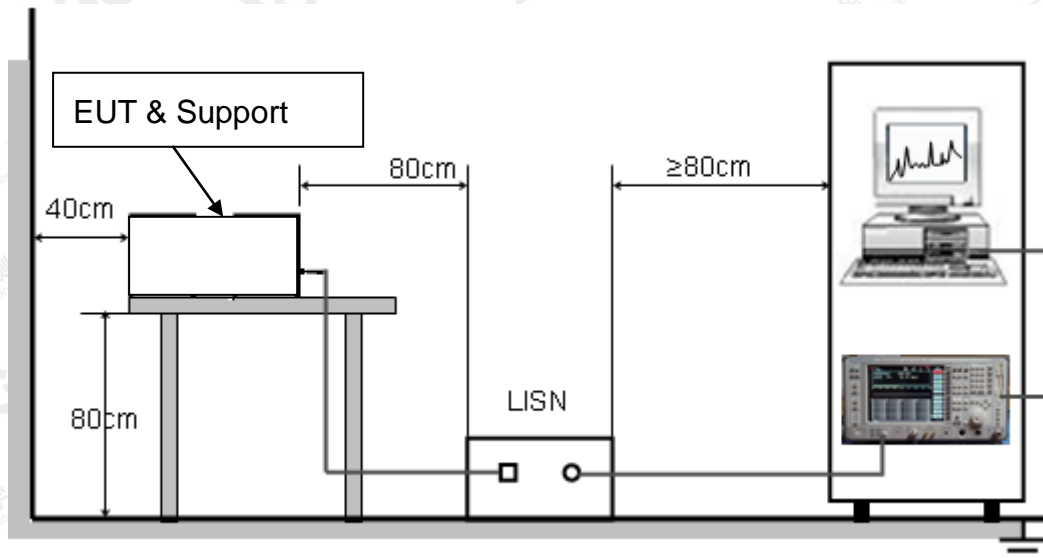

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120VV/60Hz power from a LISN, if any.
5. The EUT received charging voltage by adapter which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

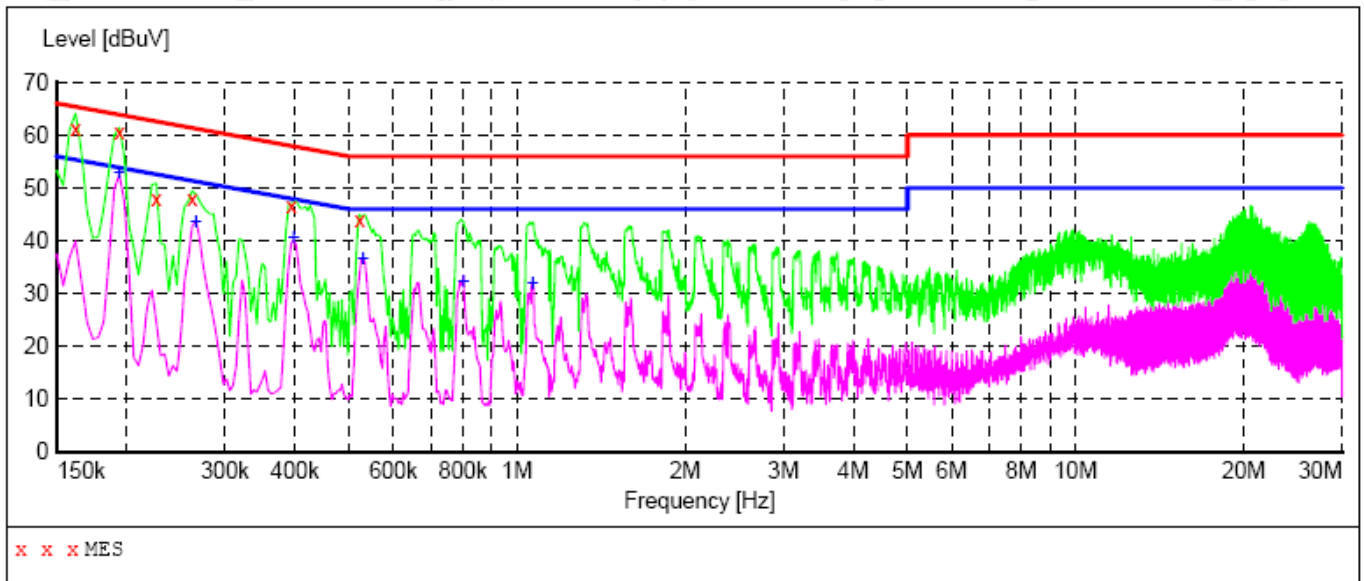

MEASUREMENT RESULT:


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector
0.162000	61.10	11.4	65	4.3	QP
0.194000	60.60	11.4	64	3.3	QP
0.226000	47.90	11.3	63	14.7	QP
0.262000	48.00	11.3	61	13.4	QP
0.394000	46.40	11.4	58	11.6	QP
0.522000	44.00	11.4	56	12.0	QP

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector
0.194000	52.90	11.4	54	1.0	AV
0.266000	43.60	11.3	51	7.6	AV
0.398000	40.50	11.4	48	7.4	AV
0.530000	36.70	11.4	46	9.3	AV
0.802000	32.30	11.4	46	13.7	AV
1.066000	31.80	11.3	46	14.2	AV

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

LINE CONDUCTED EMISSION TEST-N

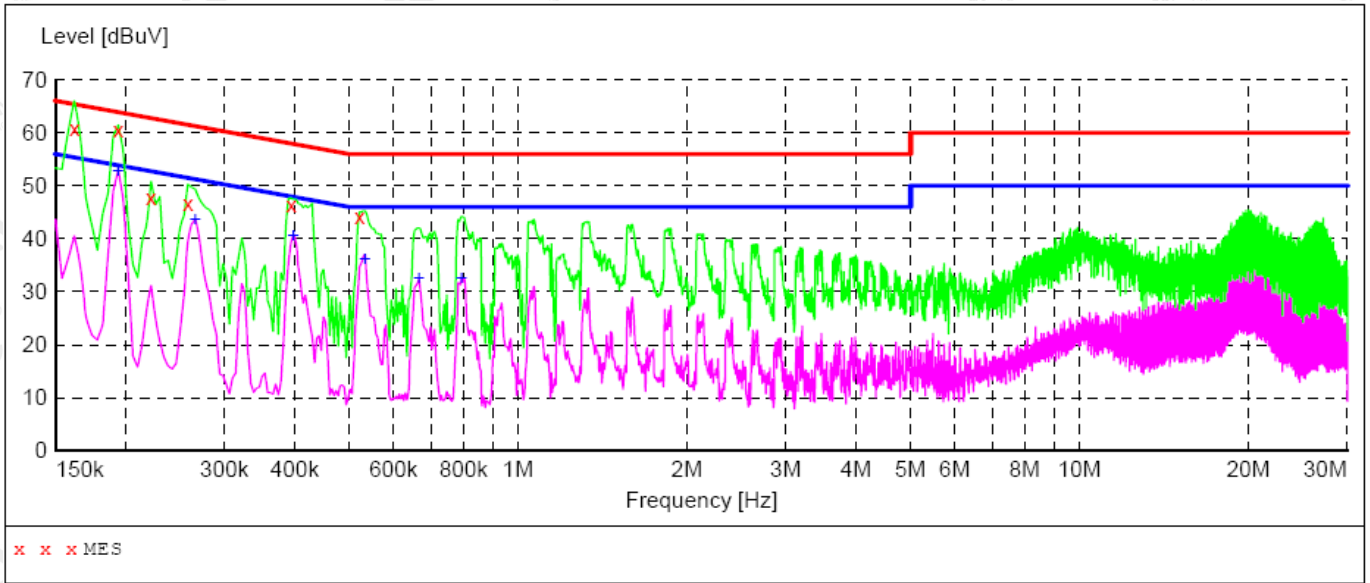

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector
0.162000	60.90	11.4	65	4.5	QP
0.194000	60.50	11.4	64	3.4	QP
0.222000	47.70	11.4	63	15.0	QP
0.258000	46.60	11.3	62	14.9	QP
0.394000	46.40	11.4	58	11.6	QP
0.522000	44.10	11.4	56	11.9	QP

MEASUREMENT RESULT:

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector
0.194000	52.80	11.4	54	1.1	AV
0.266000	43.70	11.3	51	7.5	AV
0.398000	40.50	11.4	48	7.4	AV
0.534000	36.00	11.4	46	10.0	AV
0.666000	32.50	11.4	46	13.5	AV
0.794000	32.40	11.4	46	13.6	AV

RESULT: PASS


Note: The mode 1 is the worst case, and only the data of the worst case recorded in this test report.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

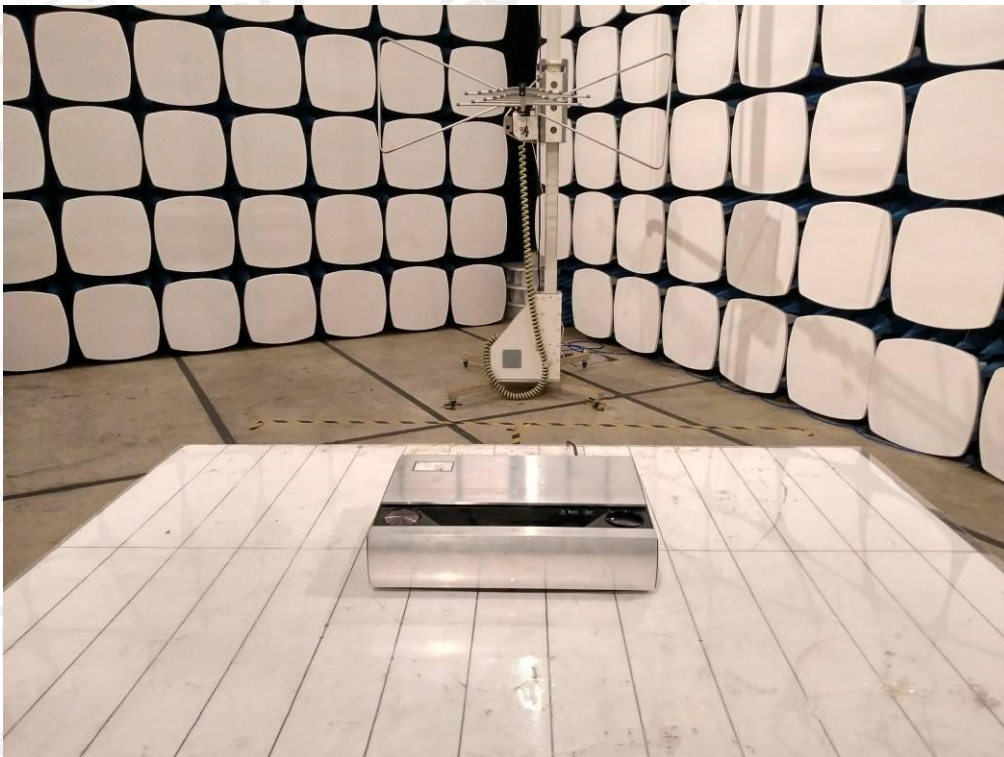

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ

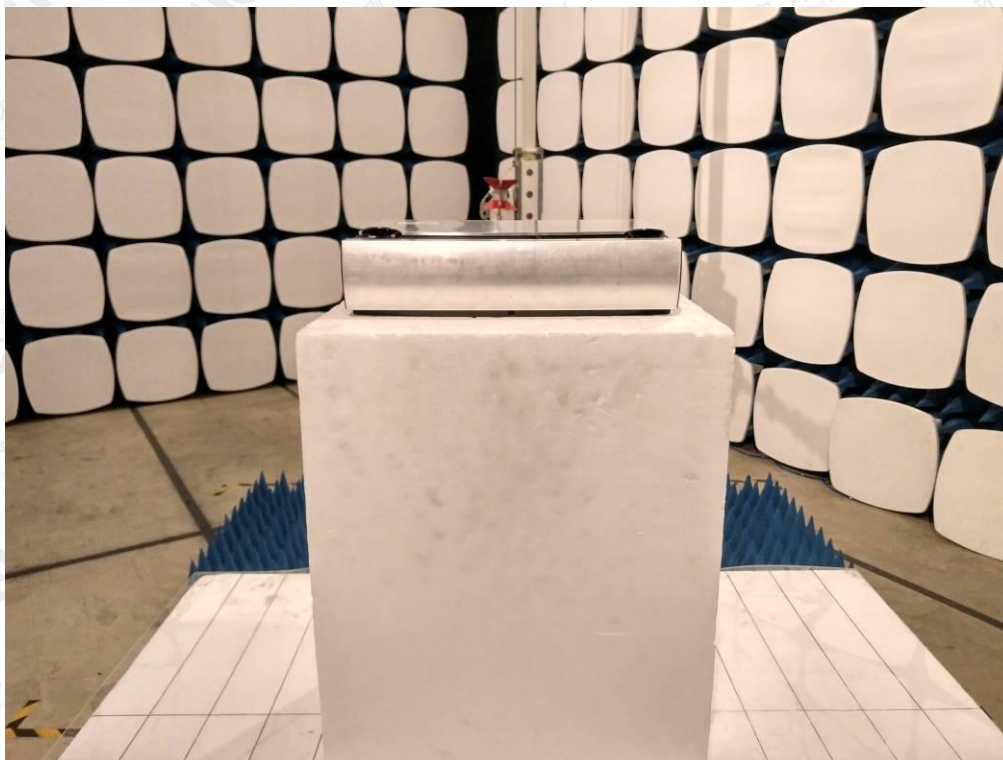

---END OF REPORT---

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.