

※ Quick User Guide & Warranty Card

# JMGO

JmGO Smart Home Theater



## Public Notice

We are dedicated to improving and perfecting the performance and function of our products. The pictures and function introduction included in this user guide shall be subject to the actual product and preset content. We preserve the right to make change to the functions and HM interface as stated in the user guide hereinwithout prior notice. The product is subject to the physical object.

Please make sure that your device is kept properly, and we are not liable for any loss resulted from mal-operationof hardware or other circumstances such as maintenance and repair and leakage of personal information to any third party . And we will not be responsible for the accidental losses possibly incurred during the course of using this user guide. Similarly, this also applies to the claim for compensation of any third party during use of the device.

Though the function introduction ofthe products in this guide has been carefully examined and proof-read by our team, 100% zero mistake or discrepancy is not easy. In case of any careless omission, your understanding and correcting will be greatly appreciated. For more detail about our products and value added services, please follow and log on our official website: [www.jmgo.com](http://www.jmgo.com).

## Safety Instructions

Please read carefully this user guide before use and keep it properly for urgent need;

During use of the product, the air inlet and outlet shall not be blocked in case of damaging the device as a result of high temperature;

Please protect the product from falling from height or hit, so as to avoid damage to it;

The lens cap is power driven, and forcible manual manipulation shall be absolutely forbidden;

In case of any functional failure, please contact our after-sale service personnel for help and do not disassemble the device by yourself.

## Brief Product Introduction

Dear JMGO users,

Firstly, great thanks to you for buying our JMGO smart theater projector! JMGO smart theater projector, jointly invested by the following three movie stars: REN Quan, LI Bingbing and HUANG Xiaoming, adopting HD projection solution which incorporates into itself the smarter chip, rock sound quality, and combination of household use and portability, serves you with the clear and crisp, beautiful and vivid giant screen cinema. Prior to use, please read this user guide carefully and keep it properly for future use.

A handwritten signature in black ink, appearing to read '胡震宇' (HU Zhenyu), is centered on a light blue rectangular background.

Chairman of the Board: HU Zhenyu

## List of Items



Theater Projector ×1



Remote Control ×1



Power Adapter ×1



AC Cable ×1



Quick User Guide ×1



Certificate of Conformity×1


- Remark: Please check the actual products you received is consistent with the above, and in case of any discrepancy, contact the JMGO customer service in a timely manner.

# Contents

Description of Appearance and Functions of Product .....	1
Distance and Projection Picture Size .....	3
Introduction of Touch Power Button and Indicator Light .....	5
Power Driven Lens Door .....	6
Remote Control .....	7
Focus Adjustment .....	8
Bluetooth Speaker .....	9
Keystone Correction .....	10
3D Play .....	11
Network Setting .....	12
System Version .....	13


System Upgrade .....	14	
Video Signal Source Switching.....		16
Mirroring Settings .....	17	
Peripheral Connection .....		18
JMGO Control APP .....	19	
Instructions for Environment Protection .....		20
Warranty Card .....	21	

## Description of Appearance and Functions of Product

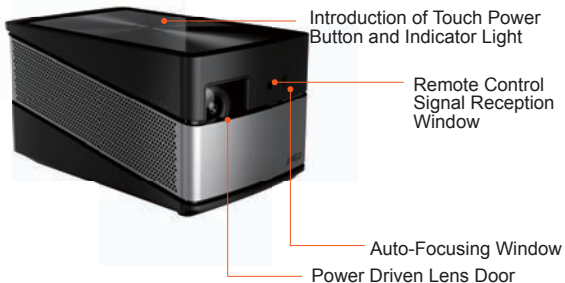



## Description of Appearance and Functions of Product

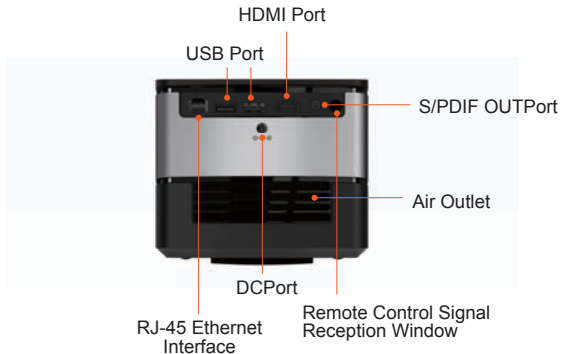


## Distance and Projection Picture Size

The projection picture size is determined by the following factors: the distance between lens and screens, scaling ratio and video format.

The optimum projection distance of JMGO Smart Theater Projector ranges from 0.5 meter to 4 meters, beyond which the brightness and definition will decline resulting in unsound pictures.

The projected area is directly proportional to projection distance: i.e. the further, the larger, merely the definition of corresponding pictures will be sacrificed; Users can choose the most suitable distance based on the actual conditions.

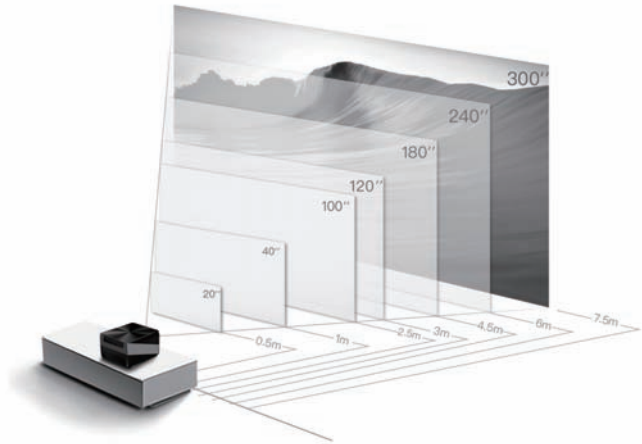

## Introduction to Touch Power Button and Indicator Light



The power button of the device is a touch type with which a simple touch upon the button will perform the function of power switch. The indicator lights around the power button help the users to understand in what working conditions the device is by means of color changing.

- 1.Red light means the device is in standby mode
- 2.When the device is in standby mode, slightly touching the power button or tapping the “Power” button of remote control will open the device and get projection mode started.


## Power Driven Lens Ca

Either slightly touching upon the “Power” button or shortly tapping the “Power” button of remote can get the device started or closed with the power driven lens cap being opened or closed automatically. The lens cap functions as a cover providing adequate protection to the lens.


Forcible manual manipulation of power driven lens cap shall be absolutely prohibited to avoid damages to the structure of the device.



# Remote Control

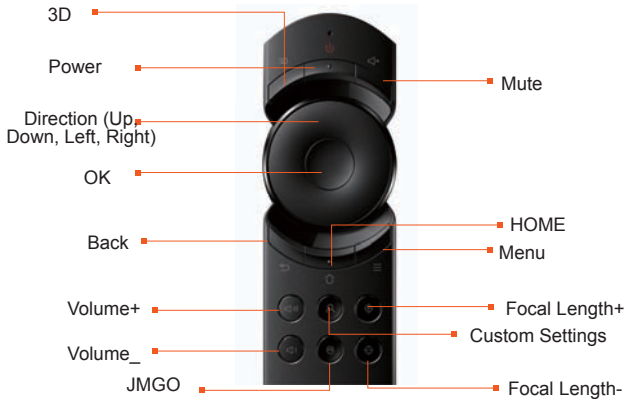

## Focal Length Adjustment

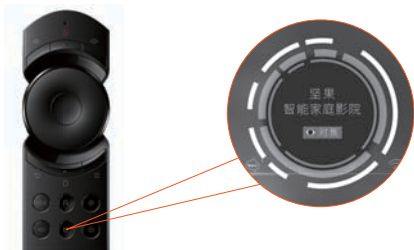

1. The device itself can make focal adjustment automatically upon being opened so as to get the high definition pictures.
2. Once being moved, the device can get its focal length adjusted automatically with the help of an internal G-sensor to obtain the favorable projection.
3. Automatic focusing can be activated by a long press on the “JMGO” button.
4. Judgement on the definition may vary from person to person. And the user can make minor focal adjustment through the focusing button of the device so as to get the most optimum effect he wants



## Bluetooth Speaker

JMGO Projector in standby mode is ready automatically in blue-tooth mode and can be used as a separate blue-tooth speaker. Then JMGO projector can be connected through blue tooth to play music. See the following procedures:

1. Open the blue tooth of the device, and search for the blue-tooth devices connectable;
2. Choose the “JMGO-XX” among the listed devices and go matching;
3. Upon matching being done which is indicated by the blue light, the music can be played through JMGO device.





## Keystone Correction

For keystone correction, please follow the steps as “Go to Settings>System Settings>Images>Keystone Correction”. When an inclined projection angle is inevitable, the users can get a standard square picture through the keystone correction




## 3D Play

During the playing of 3D movies, users can set the play modes of 3D movies through the shortcut menu called out by taping lightly the “JMGO” button of remote control when the video playing interface is being displayed.



## Network Setting

The product herein is compatible with both wired and wireless Internet connection:  
For wired connection, please plug network cable into the port of the device directly.  
For wireless connection, please follow the following steps: Go to Settings>Common Settings>Network Settings” and choose among the available networks for Wi-Fi connection.

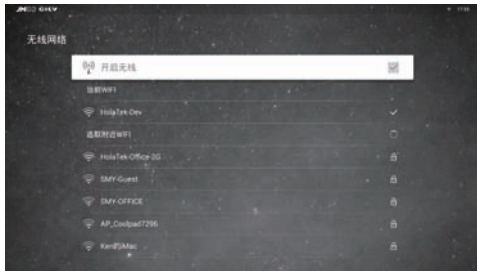

## System Version

Follow the path below as “Go to Settings>System Settings>About the Device Itself”, then the info about system version will be available.



# System Update

The system of the device herein can be updated both online and locally.



**Online System Update:** The path to online system update is as follows: Settings-General Settings- Version Update-System Update. Upon “System Update” being chosen, the system will figure out automatically whether it is the newest version. And the version info of the system will be displayed on the screen, if it is the newest one, forget it, if it is not the newest, suggest on whether to update to the newest or not will also be available for the user to make decision.


Note: JMGO will continuously provide information about online system update and maintenance relative to our products and it is possible for us to recommend without prior notice online services of system update in order to serve the users with the latest software system and service contents.

**Local System Update:** In this pattern, a software update patch needs to be downloaded from official website of JMGO and then copied to the root directory of a mobile HDD or a USB disk which later needs to be connected with the USB port of certain device; afterwards, follow the following steps “General Settings-Version Update-System Update”, click on the “Local Update” button, then the system will automatically find the update patch itself and get the system installed and updated accordingly.

Note: The USB disk pulling out or power cutting of f during the process of system updating shall be prohibited.

## Video Signal Source Switching

When external signal source is imported through HDMI port into the device, the user can enter the signal source setting interface by either calling out the shortcut menu upon tapping the “JMGO” button or clicking on the “Signal Source” button on the desktop. At the signal source setting interface, choose the favorable signal source, then the external video source will be displayed through the device onto the screen.

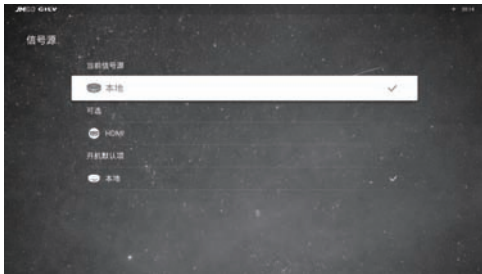

## Wireless Screen Sharing Settings

The device herein is compatible with the wireless screen sharing. Following the steps “Go to Settings-Common Settings-Wireless Screen Sharing”, the user will go to the screen sharing interface where guide for the screen sharing settings will be available.





## Peripheral Connection



Game Console

PC

## JMGO Control APP

The device herein can be controlled by mobile phone for which the “JMGO Control” APP can be downloaded by scanning the below QR code. The APP controlling of the device will be a relaxing and pleasant experience for the user. JMGO APP is applicable to both Android and IOS.



## Instructions to Environment Protection

The names and contents of hazardous substances or trace elements contained in the components of the device are as follows:

Component Name	Hazardous Substances or Elements					
	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
The Device	X	O	O	O	O	O
Remote Control	X	O	O	O	O	O
Cable	O	O	O	O	O	O
Power Adapter	X	O	O	O	O	O
Packaging Material	O	O	O	O	O	O

O: means the contents of the relevant hazardous substance in all the homogeneous materials of the concerned component are all below the rated level as stipulated in China's national standard-GB/T26572-2011.

X: means the contents of the relevant hazardous substance in all the homogeneous materials of the concerned component are all beyond the rated level as stipulated in China's national standard-GB/T26572-2011. And there is no feasible and alternative solution yet to this problem, the content of such substance, however, now conforms to the requirement on environment protection of RoHS.

## Warranty Card

Customer's name ..... (Mr./Miss)

Contact phone .....

Customer's address .....

SN .....

Store's name .....

Store's address .....

Date of purchase .....

## ※ Policies on After Sale Services

JMGO values your business and always attempts to provide you the very best of service. If this product require maintenance, either contact the dealer from whom you originally purchased the product or visit our product support website at [en.jmgo.com](http://en.jmgo.com) for information on how to obtain service or a Return Material Authorization (RMA). If it is determined that the product may be defective, you will be given an RMA number and instructions for product return. An unauthorized return (i.e., one for which an RMA number has not been issued) will be returned to you at your expense. Authorized returns must be shipped in an approved shipping container, repaired and insured, to the address provided on your return paper. Your original box and package should be kept for storing or shipping your JMGO system.

### Limited Warranty:

JMGO warrants that the product, in the course of its normal use, will for the term defined below, be free from defects in materials and workmanship and will conform to JMGO's specification therefor. The term of your limited warranty is for 1 year and this period shall commence on the purchase date appearing on your purchasing receipt. Subject to limitations specified above, your sole and exclusive warranty shall be, during the period of warranty, the repair or replacement of the product with an equivalent or better one.

### Warranty information:

Manufacturer: Shenzhen Holatek Co., Ltd.

Address: Room 1001, Building B4, Kexing Science Park, Keyuan Road, Nanshan District, Shenzhen, China

Website: [en.jmgo.com](http://en.jmgo.com)

Email: [contact@jmgo.com](mailto:contact@jmgo.com)

1. Copyright © Shenzhen Holatek Co., Ltd. All rights reserved.
2. The document is for reference only.

## **FCC WARNING**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body and the device is only for indoor used This device is acting as slave and operating in the 2.4 GHz (2412 ~2462 MHz) band and 5GHz(5150 GHz.5250GHz;5725 GHz.5825GHz) band.

FCC ID: SMCV8

**Manufacturer's Name: SHENZHEN HOLATEK Co.,LTD**

**Trade Mark: JMGO**

**Model number:V8**

**Operating Temperature: -10° C to 40° C**



Please follow us-"JMGO Smart Home Theater"  
By scanning the above QR code with WeChat APP.

Tel: 400-662-0138  
[www.jmgo.com](http://www.jmgo.com)