



China

RF - TEST REPORT

Report Number : **SMFC-U0005** Date of Issue: 2009-6-17

Model : C-U0005

Product Type : Wireless Presenter

Applicant : Wanlida Group Co., Ltd.

Address : No. 618 Jiahe Road

: Xiamen Fujian, China

Production Facility : Wanlida Group Co., Ltd.

Address : No. 618 Jiahe Road

Xiamen Fujian, China

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including
Appendices : 46

TÜV SÜD China is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD China reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD China shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD China issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

Report Number: SMFC-U0005

Page 1 of 46



China

1. Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Technical Requirements.....	8
	Transmitter mode	
7.1	Conducted Emission AC Power Port- transmitter mode.....	8
7.2	Conducted Peak Power.....	11
7.3	Band edge compliance of RF emission.....	12
7.4	Spurious RF Conducted emission.....	20
7.5	Spurious radiated emissions.....	26
7.6	6dB bandwidth.....	30
7.7	Power spectral density.....	33
	Receiver mode	
7.8	Conducted Emission AC Power Port - receiver mode.....	36
7.9	Spurious radiated emissions-receiver mode.....	39
	7.10 Maximum Permissible Exposure (MPE).....	44
8	Test Equipments List.....	46



China

2. Details about the Test Laboratory

Details about the Test Laboratory

Company name: Neutron Engineering Inc.
No.3.JinShaGang 1st Road,
ShiXia,DaLang Town,
DongGuan, China

Telephone: 86 769 83183000
Fax: 86 769 83196000

January 24, 2005 File on
Federal Communications Commission
Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

Registration Number: 319330



China

3. Description of the Equipment Under Test

Description of the Equipment Under Test

Product: Wireless Presenter
 Model no.: C-U0005
 Serial number: NIL
 Options and accessories: NIL
 Rating: C-U0005 (Receiver), 5Vd.c./90mA
 Antenna: Integral antenna inside enclosure of EUT, NOT accessible by end user
 RF Transmission 2403-2480MHz 78channels
 Frequency:
 Description of the EUT: Primary function for C-U0005 is a wireless presenter receiver which has 78 channels working from 2403MHz to 2480MHz.

Working Frequency of Each Channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01	2403 MHz	Channel 21	2423 MHz	Channel 41	2443 MHz	Channel 61	2463 MHz
Channel 02	2404 MHz	Channel 22	2424 MHz	Channel 42	2444 MHz	Channel 62	2464 MHz
Channel 03	2405 MHz	Channel 23	2425 MHz	Channel 43	2445 MHz	Channel 63	2465 MHz
Channel 04	2406 MHz	Channel 24	2426 MHz	Channel 44	2446 MHz	Channel 64	2466 MHz
Channel 05	2407 MHz	Channel 25	2427 MHz	Channel 45	2447 MHz	Channel 65	2467 MHz
Channel 06	2408 MHz	Channel 26	2428 MHz	Channel 46	2448 MHz	Channel 66	2468 MHz
Channel 07	2409 MHz	Channel 27	2429 MHz	Channel 47	2449 MHz	Channel 67	2469 MHz
Channel 08	2410 MHz	Channel 28	2430 MHz	Channel 48	2450 MHz	Channel 68	2470 MHz
Channel 09	2411 MHz	Channel 29	2431 MHz	Channel 49	2451 MHz	Channel 69	2471 MHz
Channel 10	2412 MHz	Channel 30	2432 MHz	Channel 50	2452 MHz	Channel 70	2472 MHz
Channel 11	2413 MHz	Channel 31	2433 MHz	Channel 51	2453 MHz	Channel 71	2473 MHz
Channel 12	2414 MHz	Channel 32	2434 MHz	Channel 52	2454 MHz	Channel 72	2474 MHz
Channel 13	2415 MHz	Channel 33	2435 MHz	Channel 53	2455 MHz	Channel 73	2475 MHz
Channel 14	2416 MHz	Channel 34	2436 MHz	Channel 54	2456 MHz	Channel 74	2476 MHz
Channel 15	2417 MHz	Channel 35	2437 MHz	Channel 55	2457 MHz	Channel 75	2477 MHz
Channel 16	2418 MHz	Channel 36	2438 MHz	Channel 56	2458 MHz	Channel 76	2478 MHz
Channel 17	2419 MHz	Channel 37	2439 MHz	Channel 57	2459 MHz	Channel 77	2479 MHz
Channel 18	2420 MHz	Channel 38	2440 MHz	Channel 58	2460 MHz	Channel 78	2480 MHz
Channel 19	2421 MHz	Channel 39	2441 MHz	Channel 59	2461 MHz		
Channel 20	2422 MHz	Channel 40	2442 MHz	Channel 60	2462 MHz		



China

4. Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators



China

5. Summary of Test Results

Technical Requirements				
Transmitter mode				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
15.207 Conducted Emission AC Power Port	9	☒	☐	☐
15.247 (b) (1) Conducted peak output power	10	☒	☐	☐
15.247(d) Band edge compliance of RF emissions	11	☒	☐	☐
15.247(d) Spurious RF conducted emissions	19	☒	☐	☐
15.247(d) 15.209 Spurious radiated emissions	25	☒	☐	☐
15.247(a)(2) 6dB bandwidth	29	☒	☐	☐
15.247(e) Power spectral density	32	☒	☐	☐
Receiver mode				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
15.207 Conducted Emission AC Power Port	36	☒	☐	☐
15.247(d) 15.209 Spurious radiated emissions	39	☒	☐	☐



China

6. General Remarks

This submittal(s) (test report) is intended for

FCC ID: SMFC-U0005(For receiver C-U0005)

filing to comply with

- Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules. Tests have been carried out in accordance with FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705 and DTS procedures KDB 558074.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Testing Start Date: 2009-6-2

Testing End Date: 2009-6-4

- TÜV SÜD CHINA, SHENZHEN BRANCH -

Reviewed by:

Prepared by:

Kitty Xu
Assistant Department Manager


Mike Zhuo
Project Engineer

7. Technical Requirement

7.1 Conducted Emission-transmitter mode

Test Method

- 1 The EUT was placed on a table, which is 0.8m above ground plane
- 2 The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3 Maximum procedure was performed to ensure EUT compliance
- 4 A EMI test receiver (R&S Test Receiver ESCI) is used to test the emissions from both sides of AC line

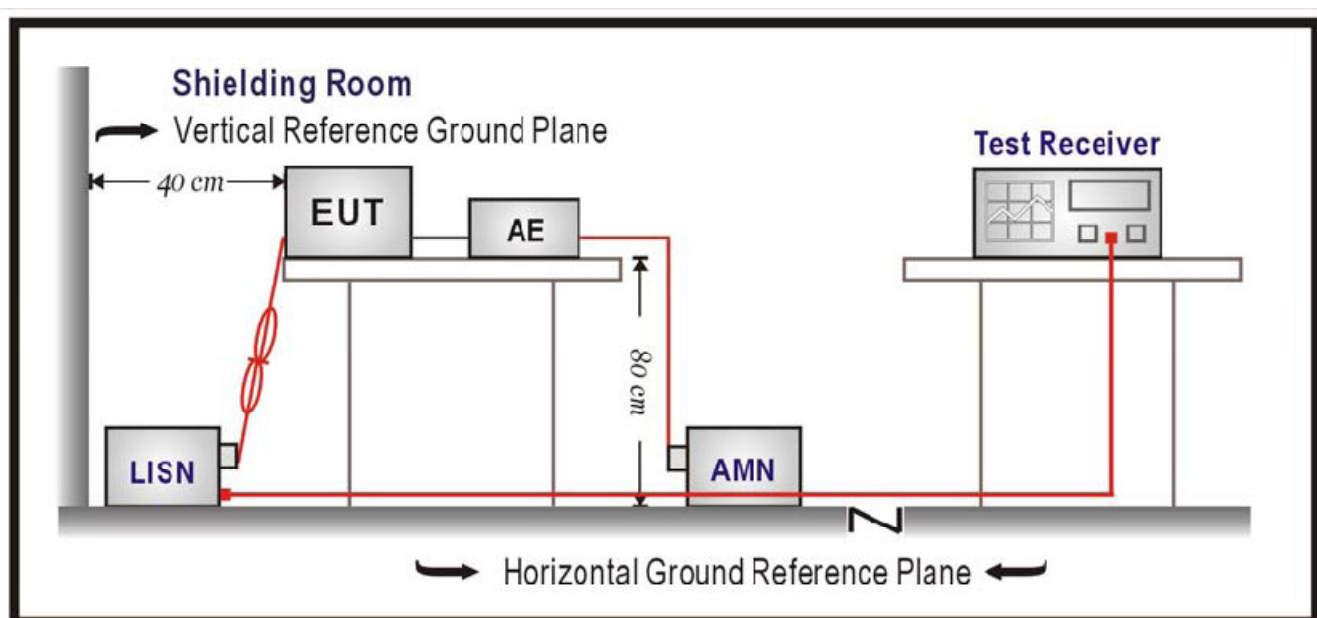


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission


Peak Plot -----L line for C-U0005 only

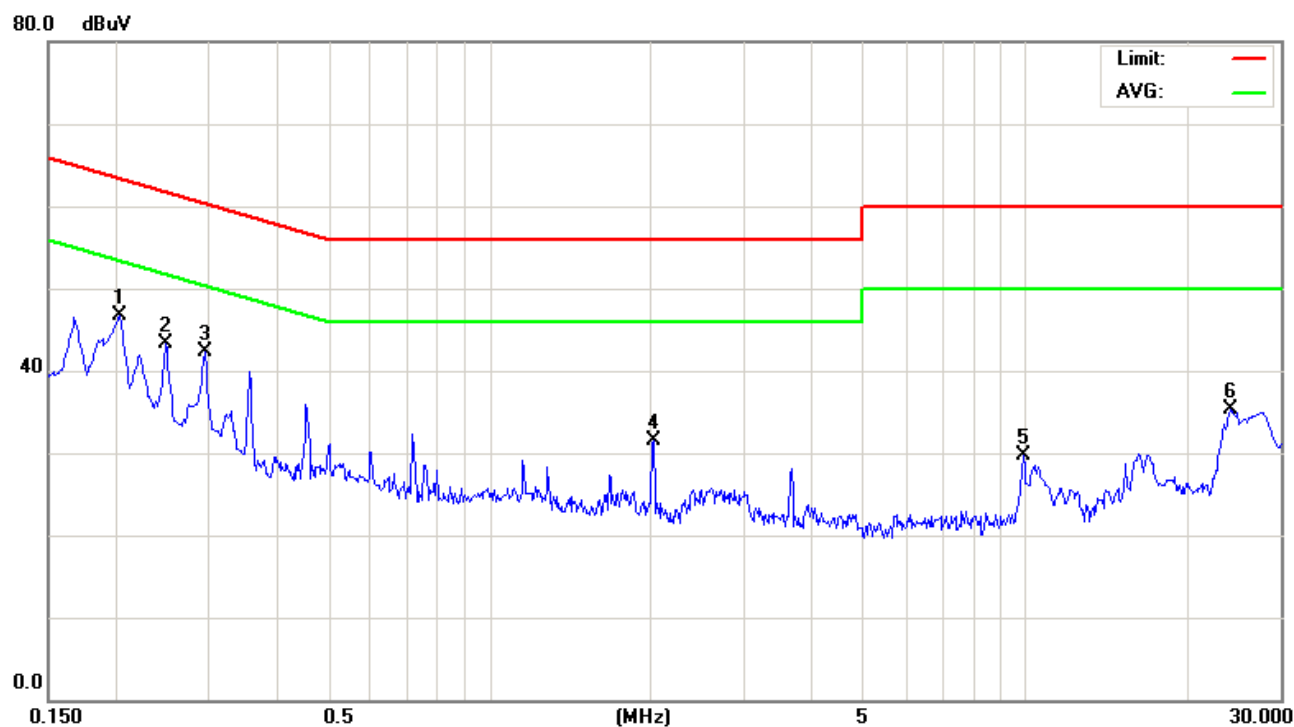

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.2040	37.01	9.64	46.65	63.45	-16.80	peak
2		0.2490	33.62	9.63	43.25	61.79	-18.54	peak
3		0.2940	32.76	9.64	42.40	60.41	-18.01	peak
4		2.0225	21.81	9.64	31.45	56.00	-24.55	peak
5		9.9330	19.56	10.13	29.69	60.00	-30.31	peak
6		24.2250	24.69	10.59	35.28	60.00	-24.72	peak

Conducted Emission

Peak Plot -----N line for C-U0005 only

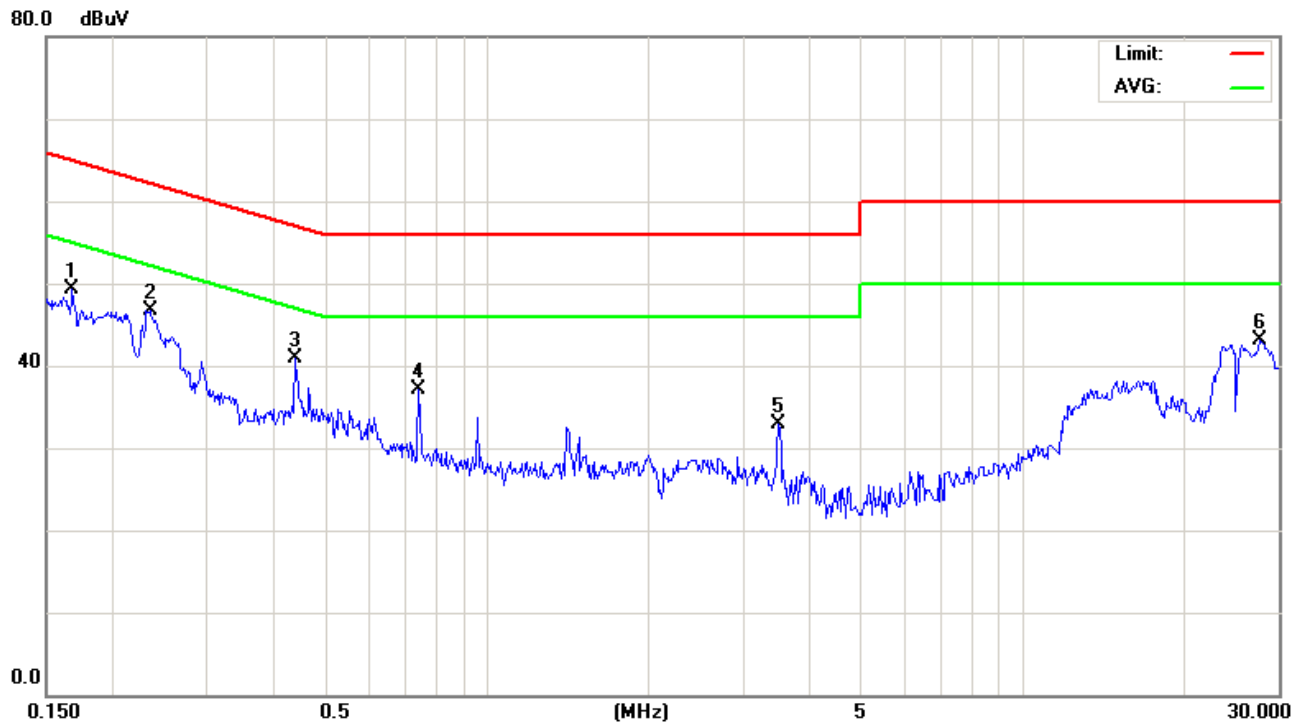


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1680	39.64	9.68	49.32	65.06	-15.74	peak
2	*	0.2341	37.10	9.67	46.77	62.30	-15.53	peak
3		0.4380	31.32	9.65	40.97	57.10	-16.13	peak
4		0.7440	27.37	9.64	37.01	56.00	-18.99	peak
5		3.5070	23.18	9.74	32.92	56.00	-23.08	peak
6		27.5616	32.09	10.92	43.01	60.00	-16.99	peak

7.2 Conducted peak output power

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

The measurement is made according to DTS procedures KDB 558074.

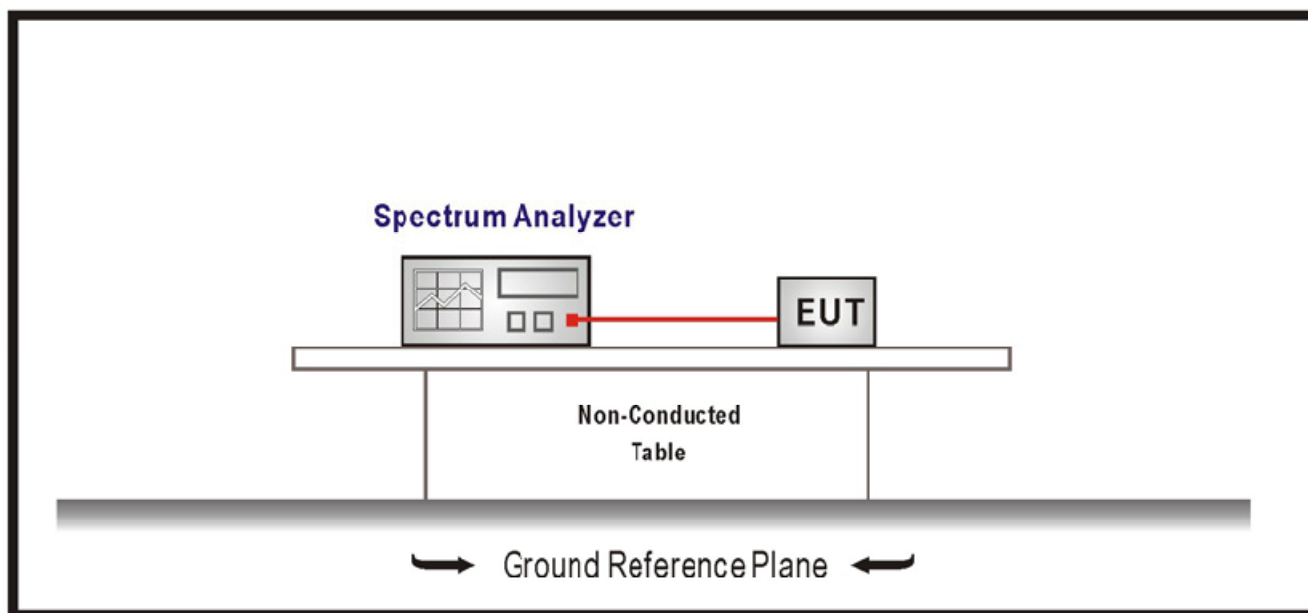

Limits for conducted peak output power measurements

Frequency Range MHz	Limit W	Limit dBm
2400-2483	≤ 1	≤ 30

Conducted peak output power


Model	Frequency	Peak power(dBm)	Results
C-U0005	CH01	-1.29	P
	CH38	-1.18	P
	CH78	-1.57	P

7.3 Band edge compliance of RF emissions


Test Method

The measurement is made according to DTS procedures KDB 558074.

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBW to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

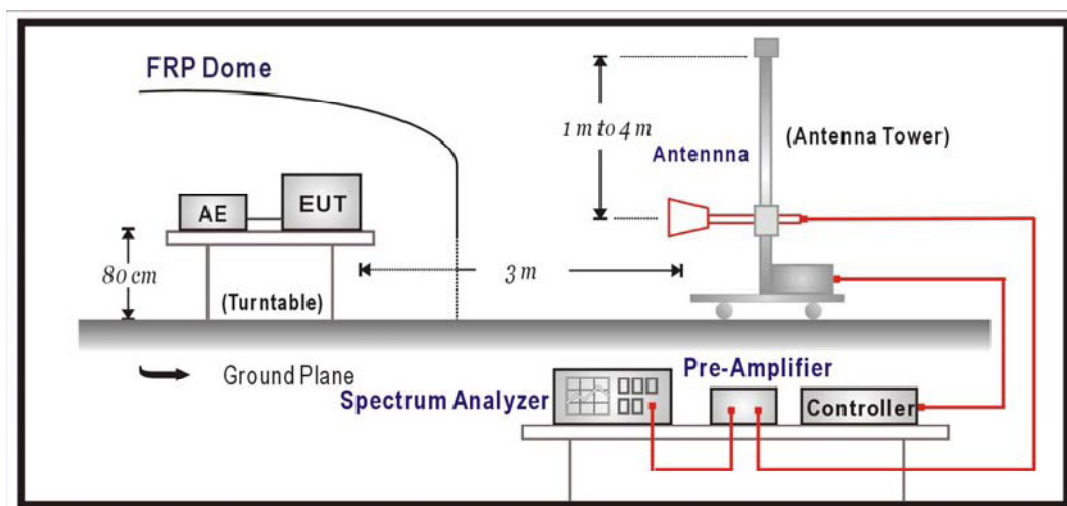

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW and VBW to 100kHz, to measure the conducted peak band edge. Set RBW 1MHz and VBW to 10Hz, to measure the conducted AV band edge.

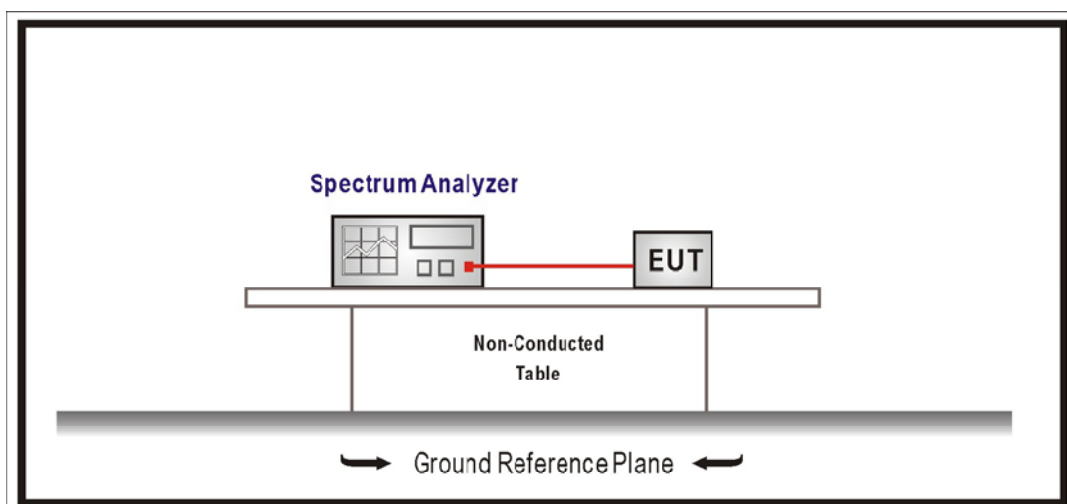



China

Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).


Frequency MHz	Limit Average dBuV/m	Limit Peak dBuV/m
Below 2390 Above 2483.5	54	74

Band edge compliance of RF emissions

EUT:	Wireless Presenter(receiver)	Model Name :	C-U0005
Temperature:	20°C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	5V USB port from computer
Test Mode :	Transmit mode		
Test By:	Tony Liu	Test date	2009-06-02

Lower edge

Horizontal

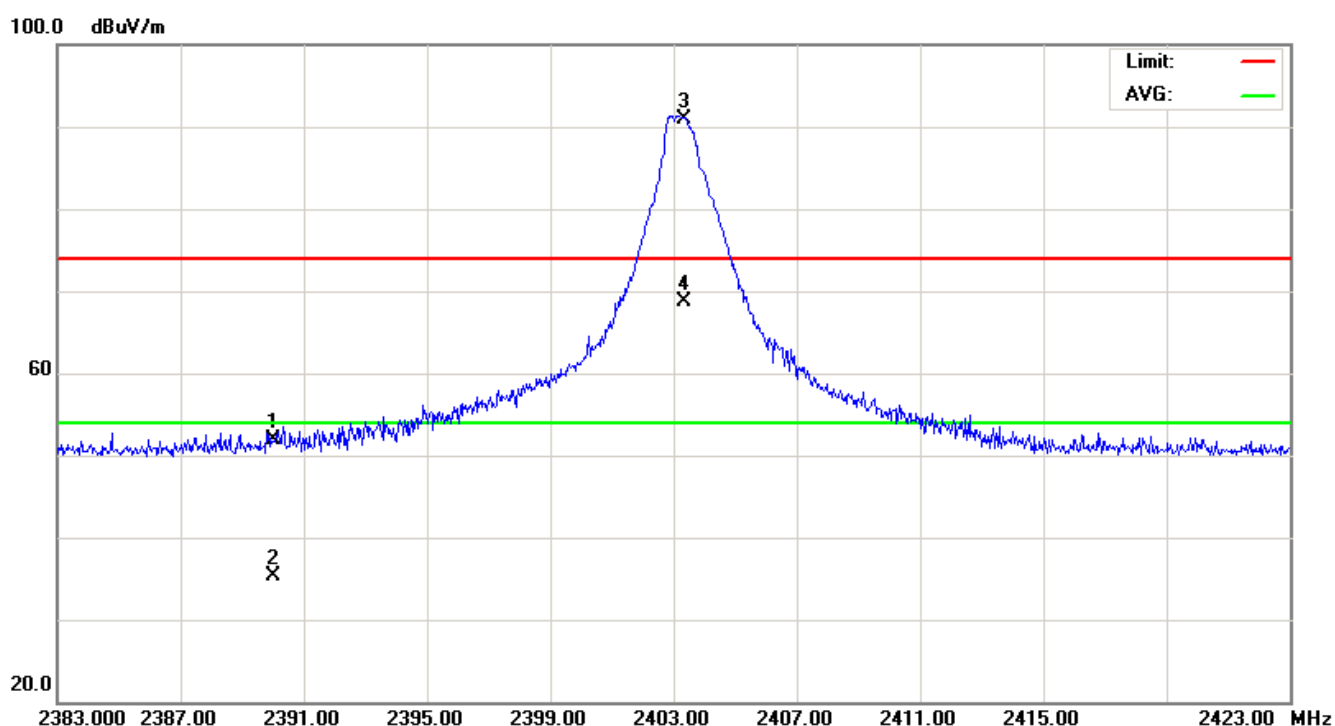


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1		2390.000	19.67	32.32	51.99	74.00	-22.01	peak
2		2390.000	2.89	32.32	35.21	54.00	-18.79	AVG
3	*	2403.360	58.62	32.36	90.98	74.00	16.98	peak
4	X	2403.360	36.31	32.36	68.67	54.00	14.67	AVG

Result: Pass

Report Number: SMFC-U0005


Page 14 of 46

Vertical

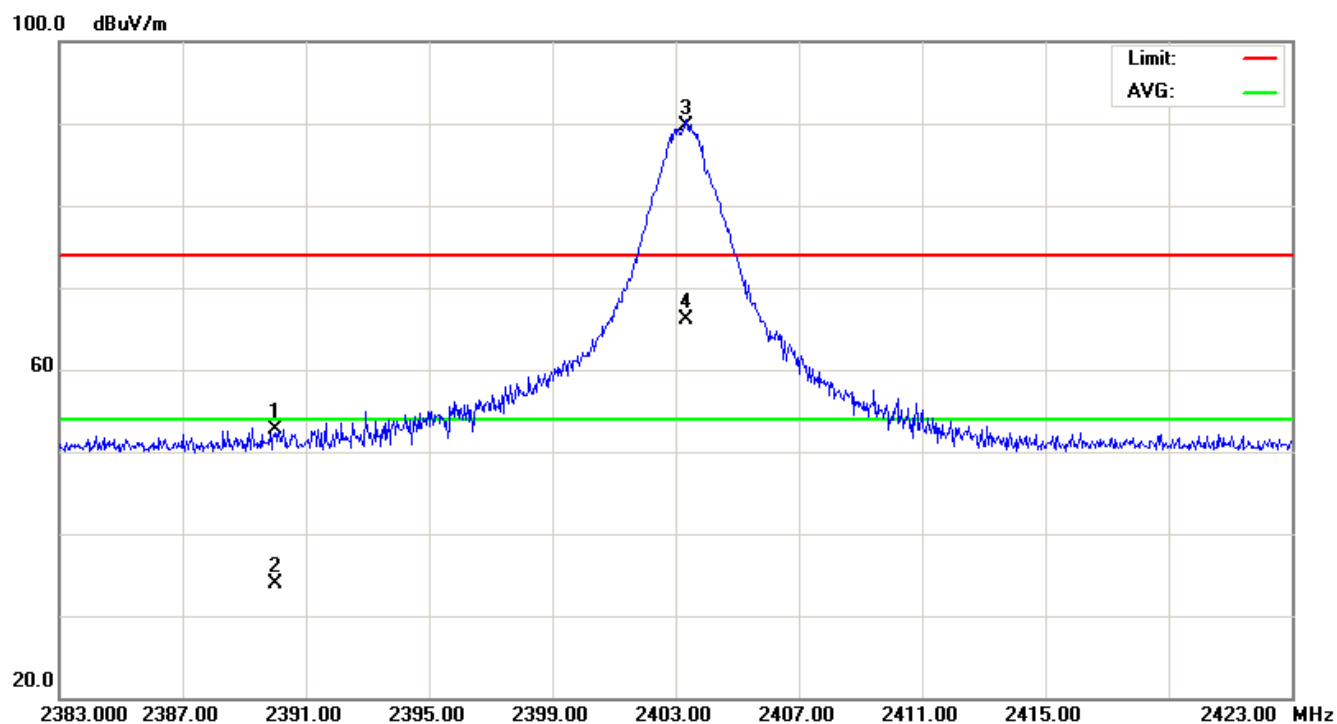

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	20.32	32.32	52.64	74.00	-21.36	peak
2		2390.000	1.67	32.32	33.99	54.00	-20.01	AVG
3	*	2403.300	57.42	32.36	89.78	74.00	15.78	peak
4	X	2403.300	33.83	32.36	66.19	54.00	12.19	AVG

Result: Pass

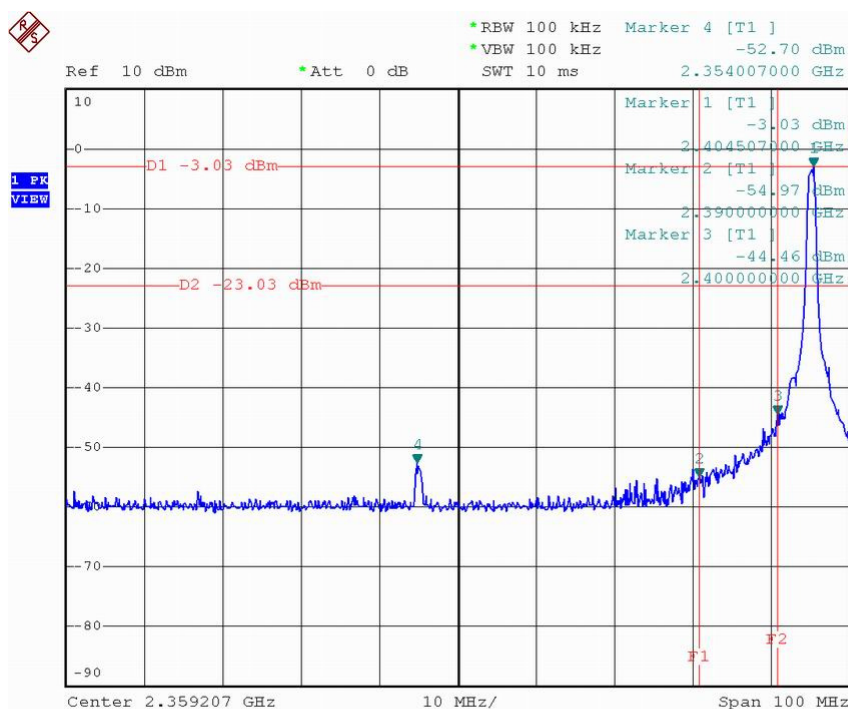


Date: 2.JUN.2009 20:56:49

Result: Pass

Upper edge


Horizontal

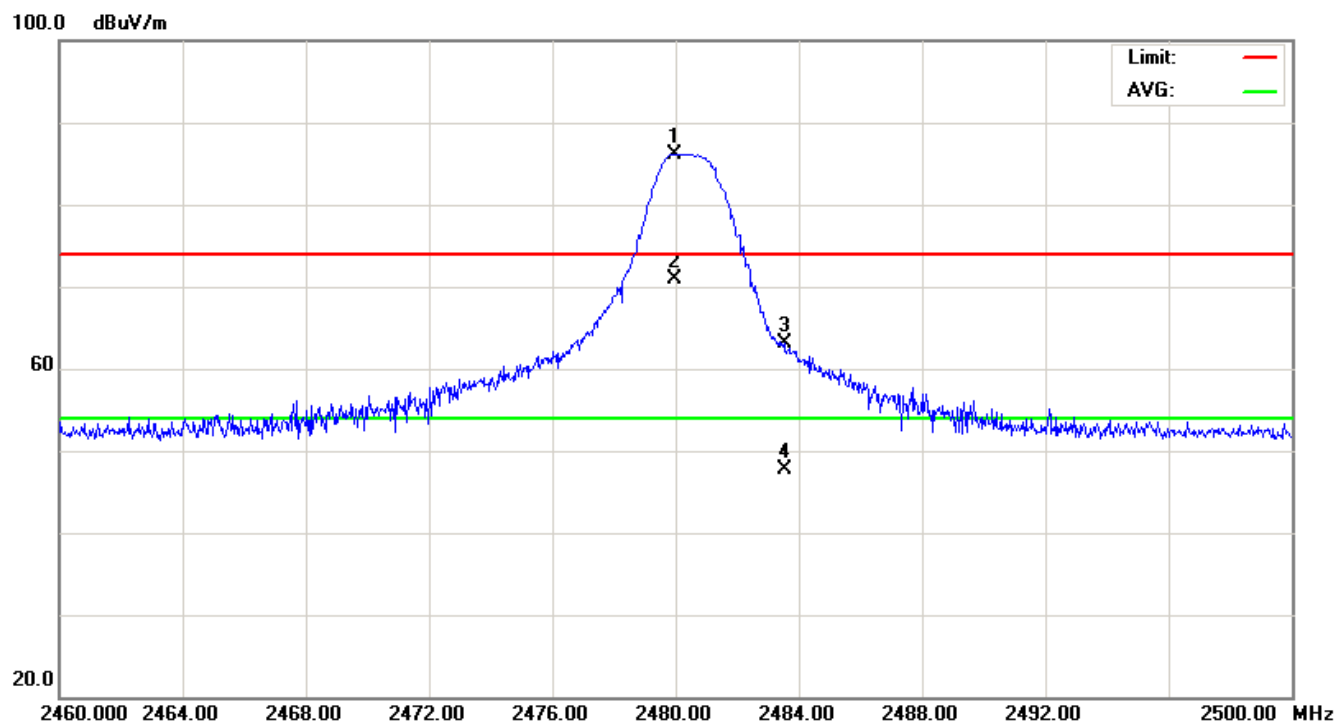

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2479.960	53.91	32.28	86.19	74.00	12.19	peak
2	*	2479.960	38.55	32.28	70.83	54.00	16.83	AVG
3		2483.500	30.73	32.28	63.01	74.00	-10.99	peak
4		2483.500	15.37	32.28	47.65	54.00	-6.35	AVG


Result: Pass

Vertical

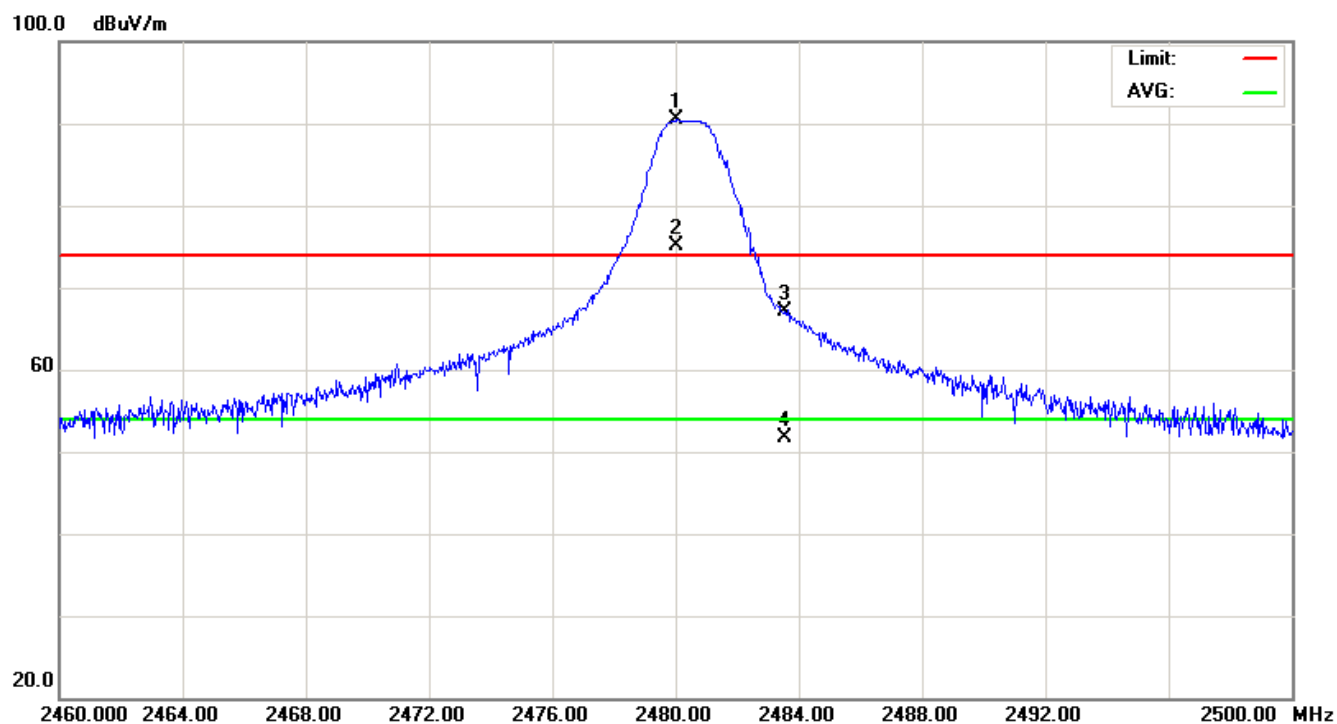

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2480.000	58.14	32.28	90.42	74.00	16.42	peak
2	*	2480.000	42.78	32.28	75.06	54.00	21.06	AVG
3		2483.500	34.73	32.28	67.01	74.00	-6.99	peak
4		2483.500	19.37	32.28	51.65	54.00	-2.35	AVG

Result: Pass

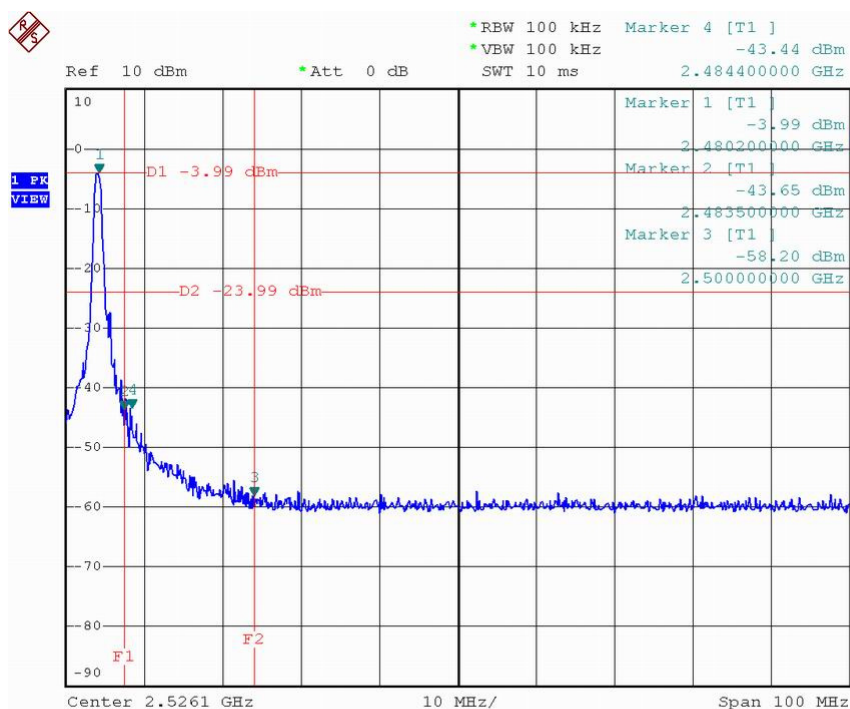

Date: 2.JUN.2009 20:37:50

Result: Pass

7.4 Spurious RF conducted emissions


Test Method

The measurement is made according to DTS procedures KDB 558074.

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The resolution bandwidth(RBW) and the video bandwidth (VBW) of the spectrum analyzer were respectively set to 100kHz and 100kHz.

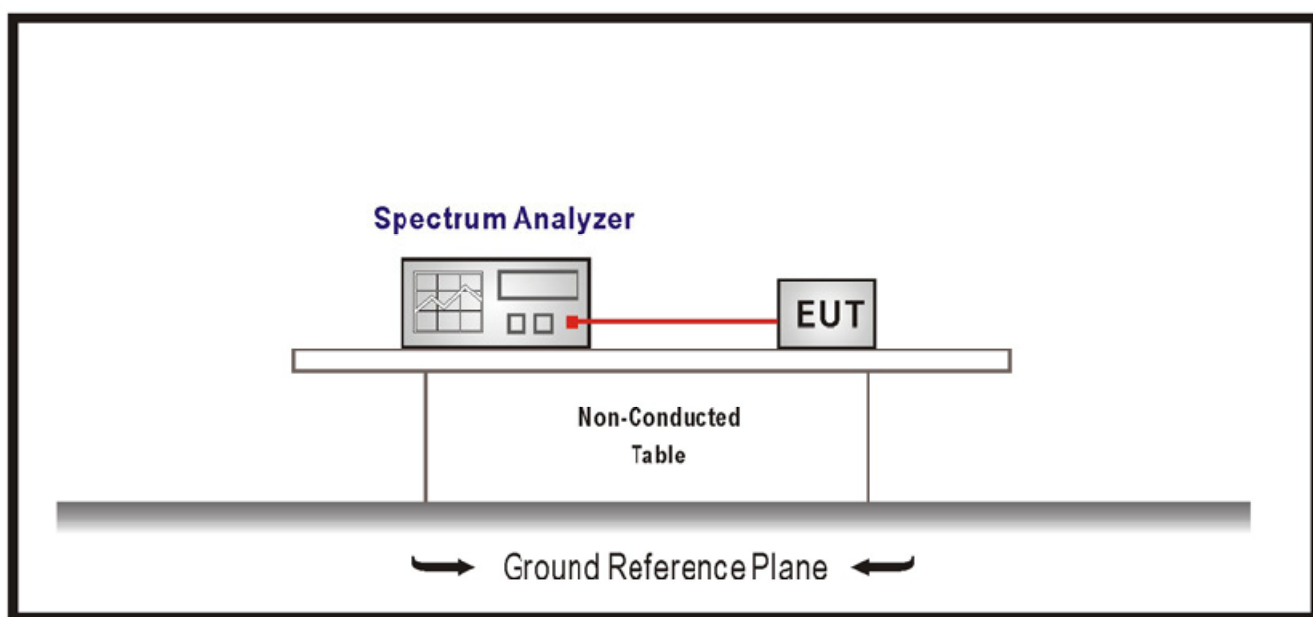


Limit


Frequency Range MHz	Limit (dBc)
1000-25000	-20

Spurious RF conducted emissions

EUT:	Wireless Presenter(receiver)	Model Name :	C-U0005
Temperature:	20°C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	5V USB port from computer
Test Mode :	Transmit mode		
Test By:	Tony Liu	Test date	2009-06-02

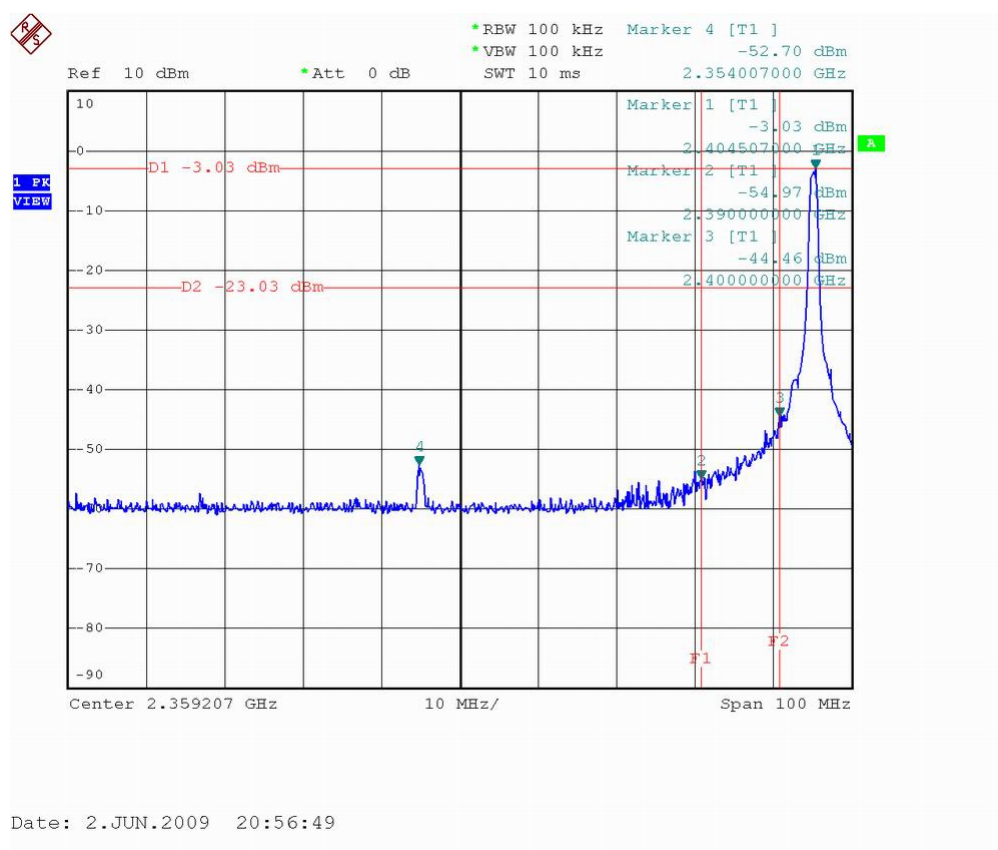


*: The highest emission of $f < 2390$ MHz was detected at 2.3540 GHz which below the 20 dBc limit line.

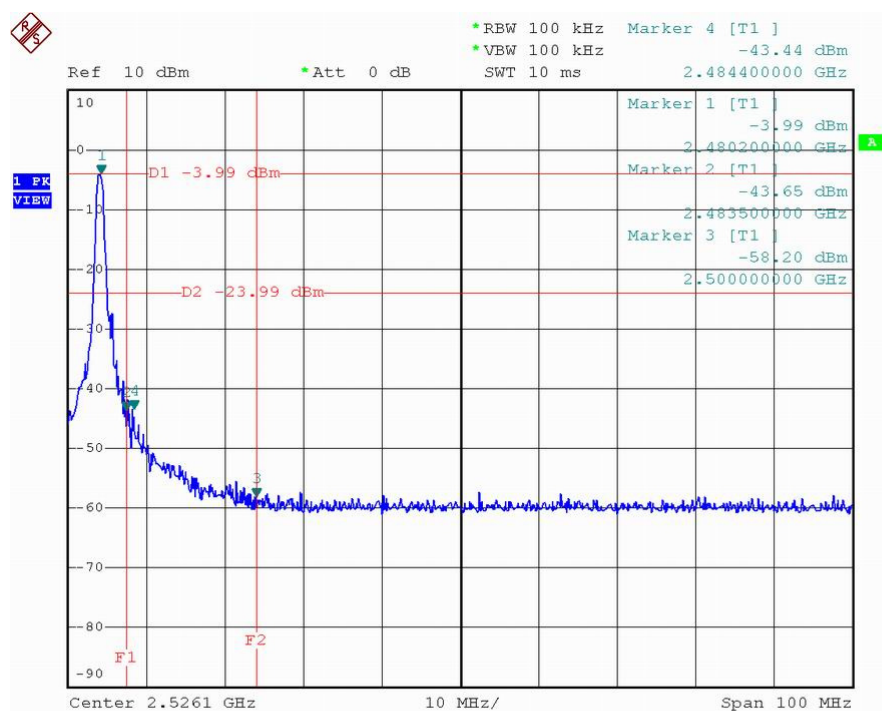

Date: 2.JUN.2009 20:37:50


*: The highest emission of $f > 2483.5$ MHz was detected at 2.4385 GHz which below the 20 dBc limit line.

2403MHz

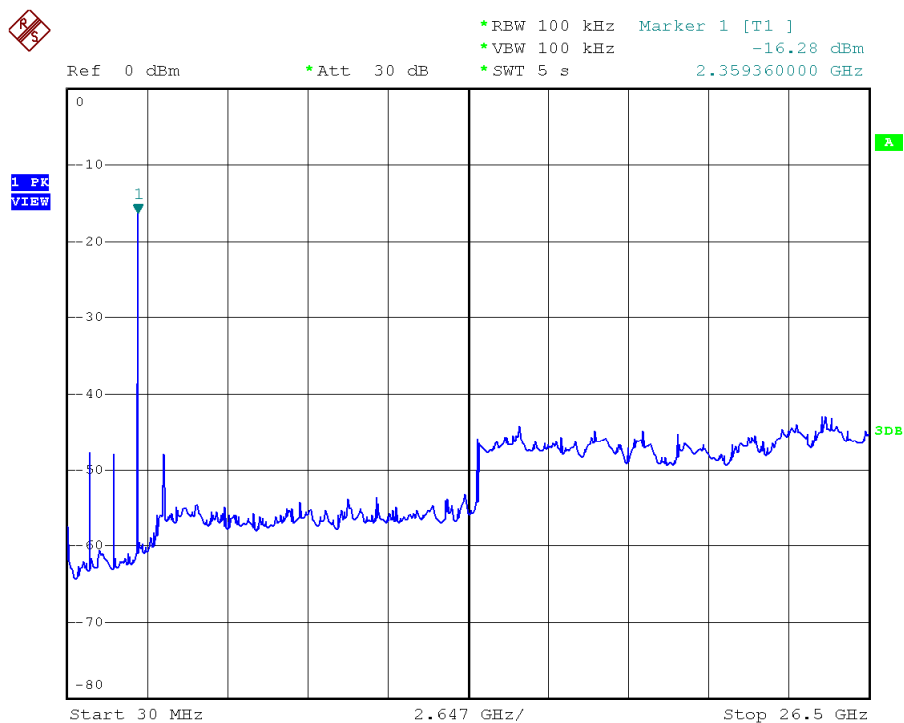


Date: 3.JUN.2009 00:23:23

2440MHz

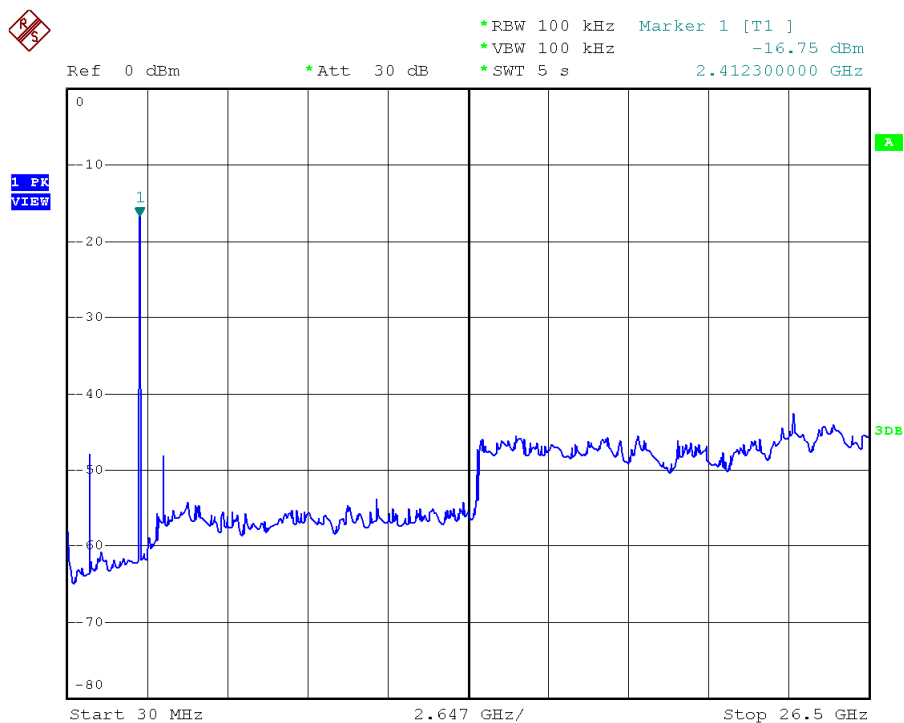

Date: 3.JUN.2009 00:24:20

2480MHz

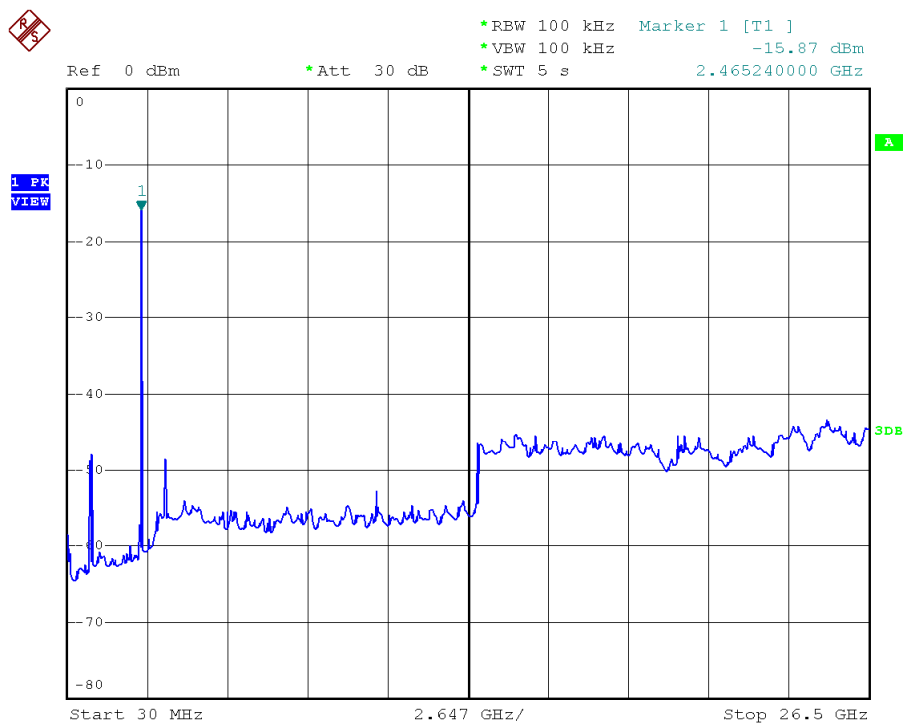


Date: 3.JUN.2009 00:25:35

7.5 Spurious radiated emissions

Test Method

The measurement is made according to DTS procedures KDB 558074.

- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

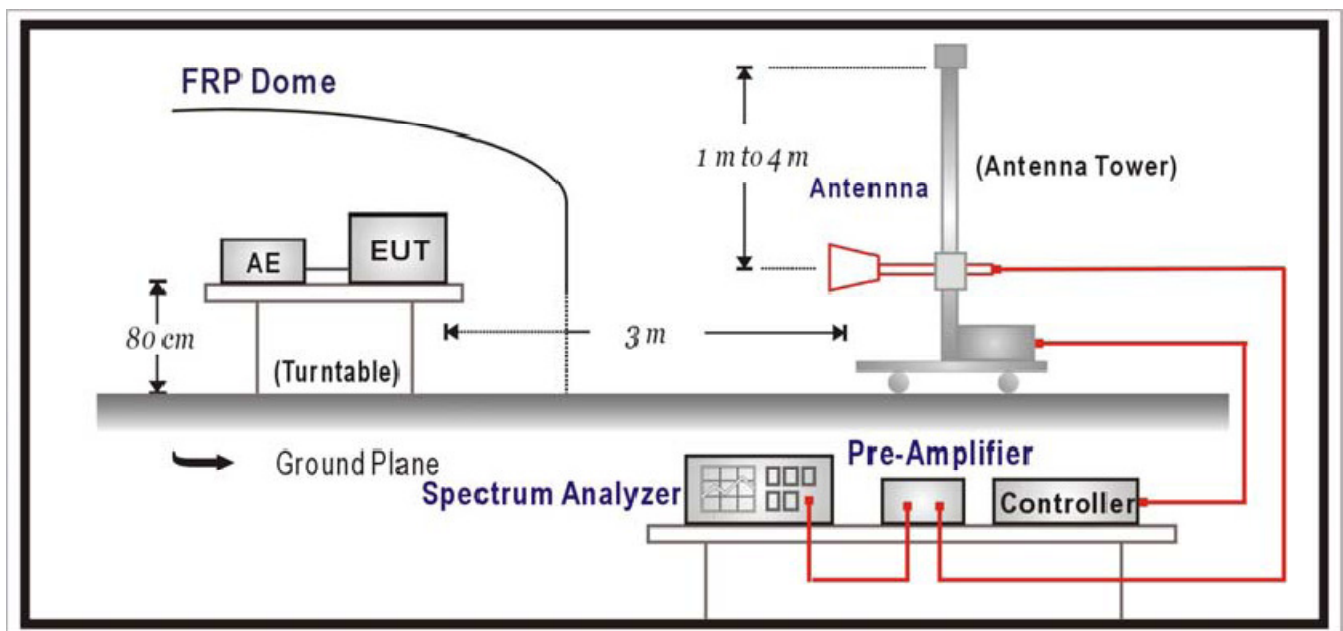

Limit

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK




China

Radiated Emission

EUT:	Wireless Presenter(receiver)	Model Name :	C-U0005
Test Mode :	Transmit mode		
Test By:	Tony Liu	Test date	2009-06-04


CH01 2403MHz

Horizontal

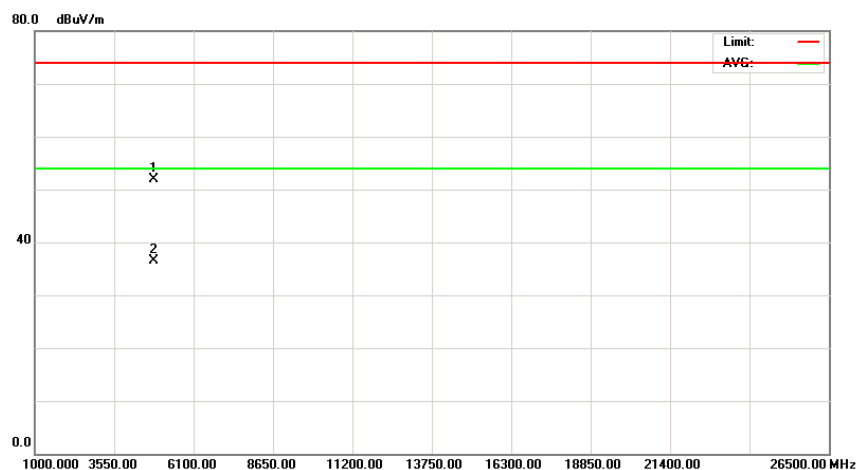


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4806.600	46.76	5.19	51.95	74.00	-22.05	peak
2	*	4806.600	31.40	5.19	36.59	54.00	-17.41	AVG

Vertical

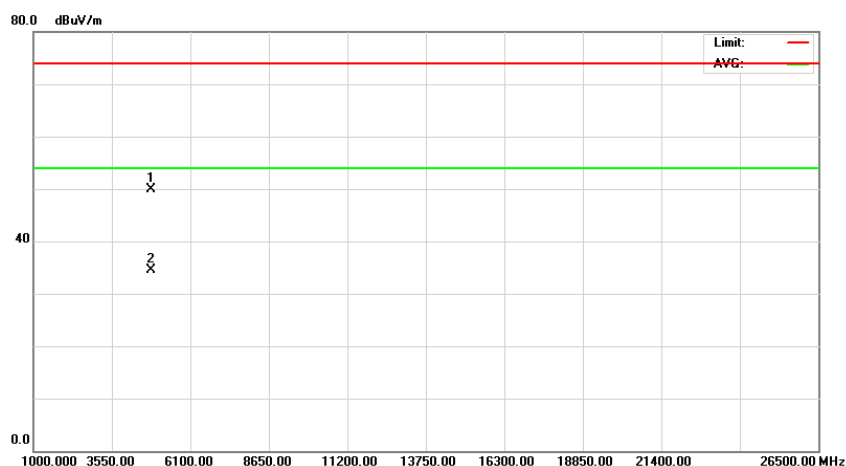


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4806.600	44.77	5.19	49.96	74.00	-24.04	peak
2	*	4806.600	29.41	5.19	34.60	54.00	-19.40	AVG

CH38 2440MHz Horizontal

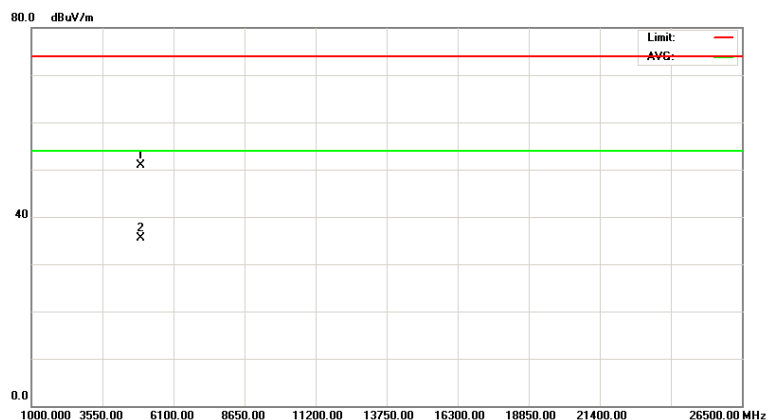

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.930	45.47	5.41	50.88	74.00	-23.12	peak
2	*	4880.930	30.11	5.41	35.52	54.00	-18.48	AVG

Vertical

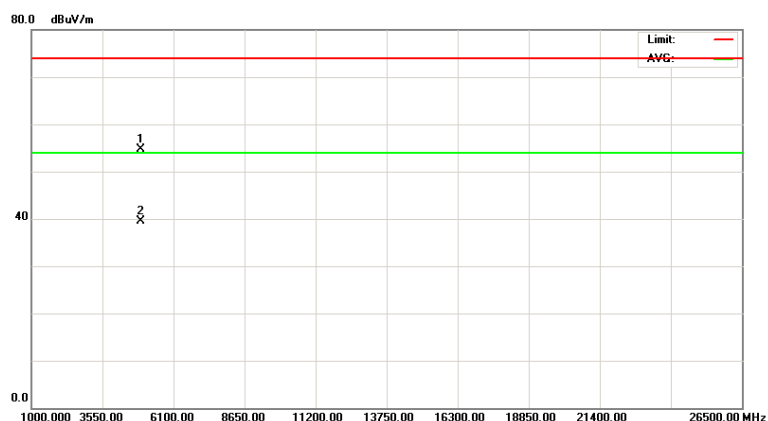


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4880.700	49.38	5.41	54.79	74.00	-19.21	peak
2	*	4880.700	34.02	5.41	39.43	54.00	-14.57	AVG




China

CH78 2480MHz Horizontal

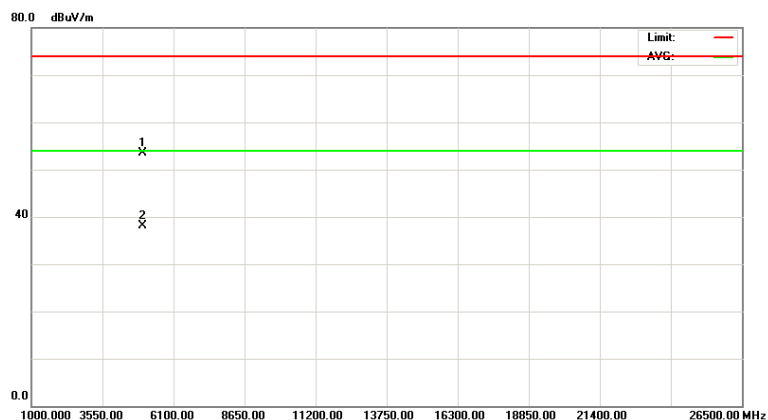

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
		MHz	Level	Factor	ment	dBuV/m	dB	
1		4959.855	47.92	5.64	53.56	74.00	-20.44	peak
2	*	4959.855	32.38	5.64	38.02	54.00	-15.98	AVG

Vertical

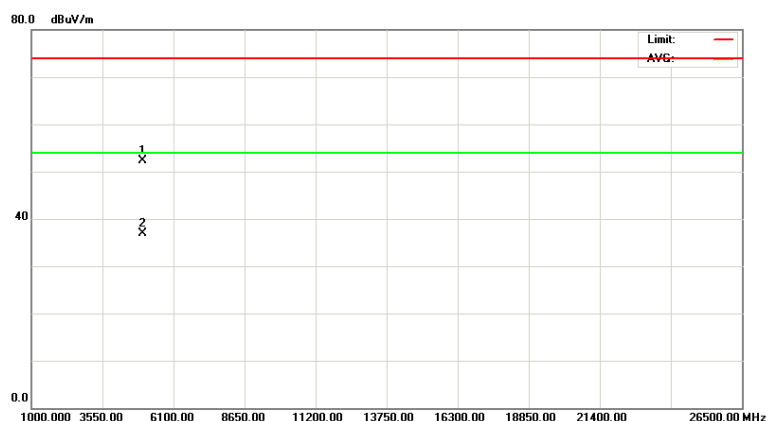

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
		MHz	Level	Factor	ment	dBuV/m	dB	
1		4959.925	46.58	5.64	52.22	74.00	-21.78	peak
2	*	4959.925	31.22	5.64	36.86	54.00	-17.14	AVG


Result: Pass

7.6 6 dB bandwidth

Test Method

The measurement is made according to DTS procedures KDB 558074

- 1 Place the EUT on the table and set it in the transmitting mode.
- 2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3 Mark the peak frequency and -6dB (upper and lower) frequency.

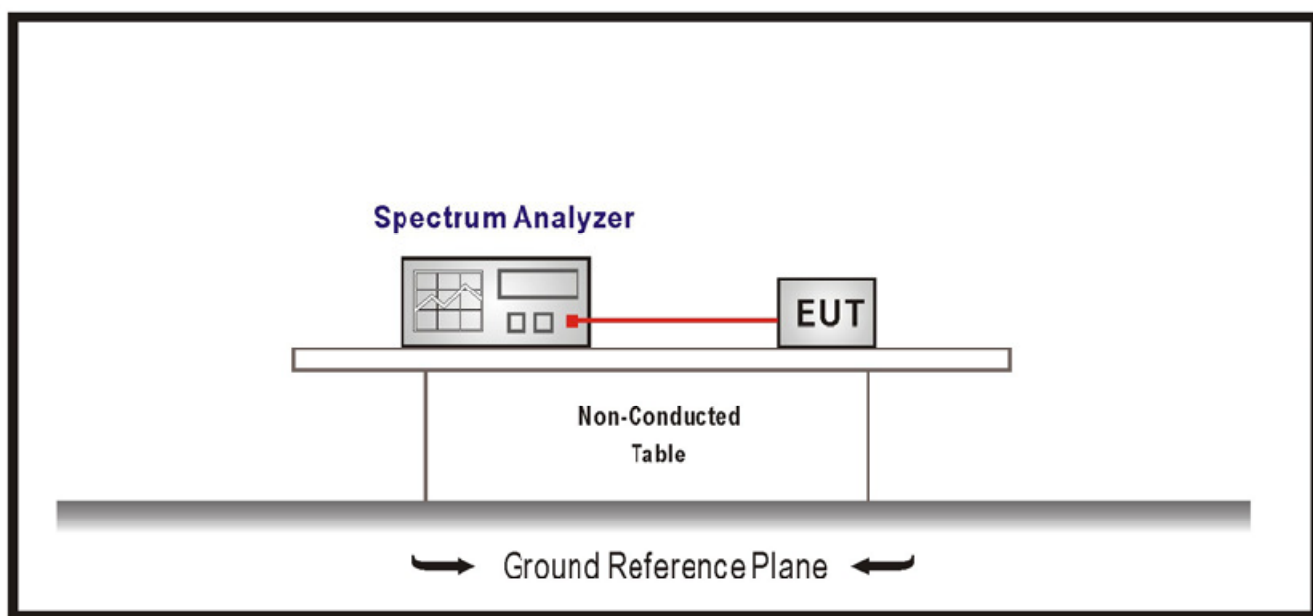

Limit

Limit [kHz]


≥ 500

6 dB bandwidth


6 dB bandwidth

EUT:	Wireless Presenter(receiver)	Model Name :	C-U0005
Temperature:	20°C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	5V USB port from computer
Test Mode :	Transmit mode		
Test By:	Tony Liu	Test date	2009-06-02


Frequency MHz	Bandwidth kHz	Limit kHz	Result
2403	970	≥ 500	Pass
2440	1000	≥ 500	Pass
2480	1010	≥ 500	Pass

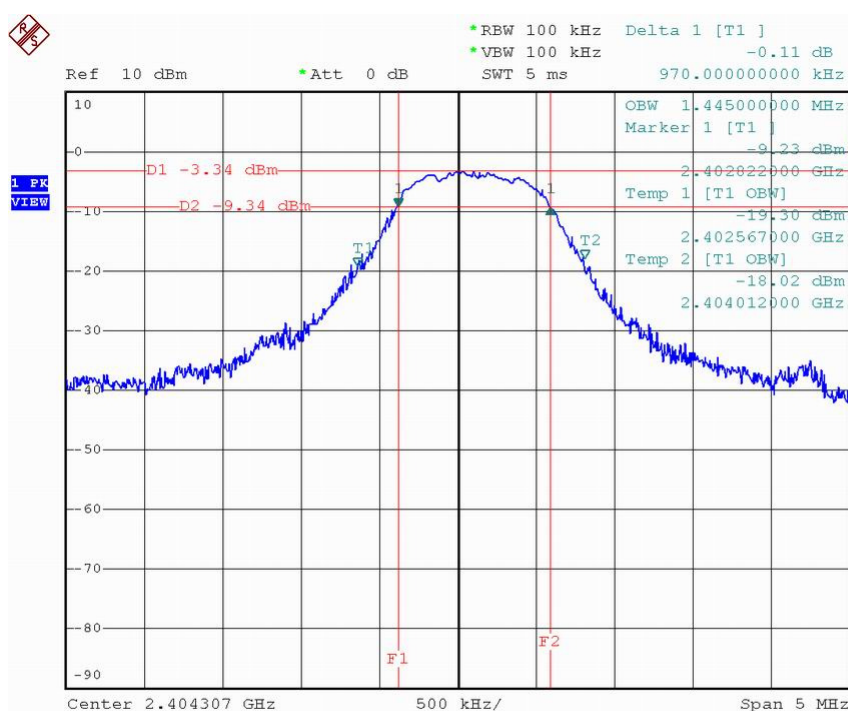

Date: 2.JUN.2009 20:50:53

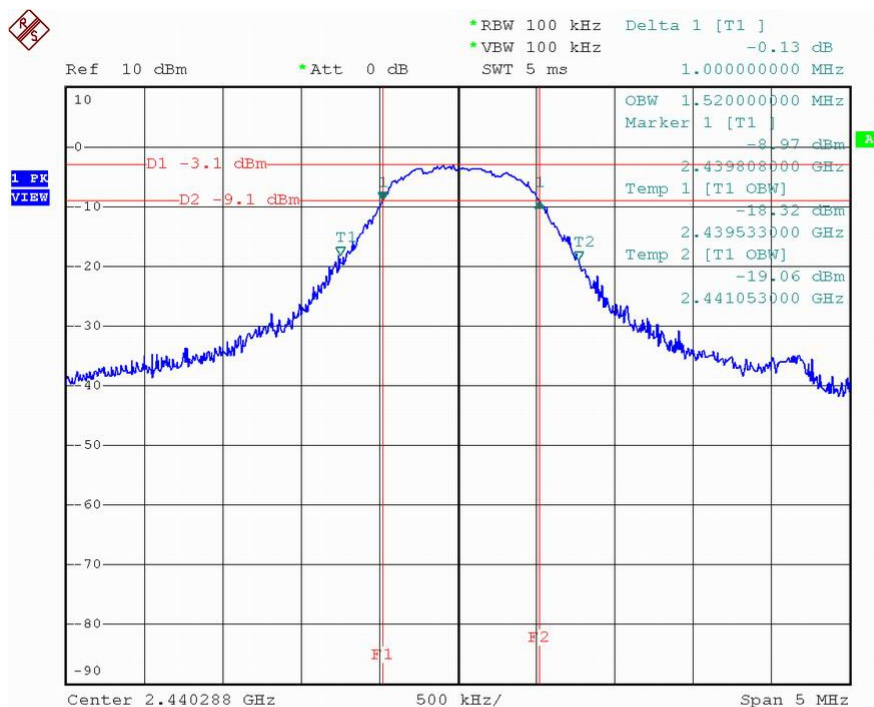

Date: 2.JUN.2009 20:26:25

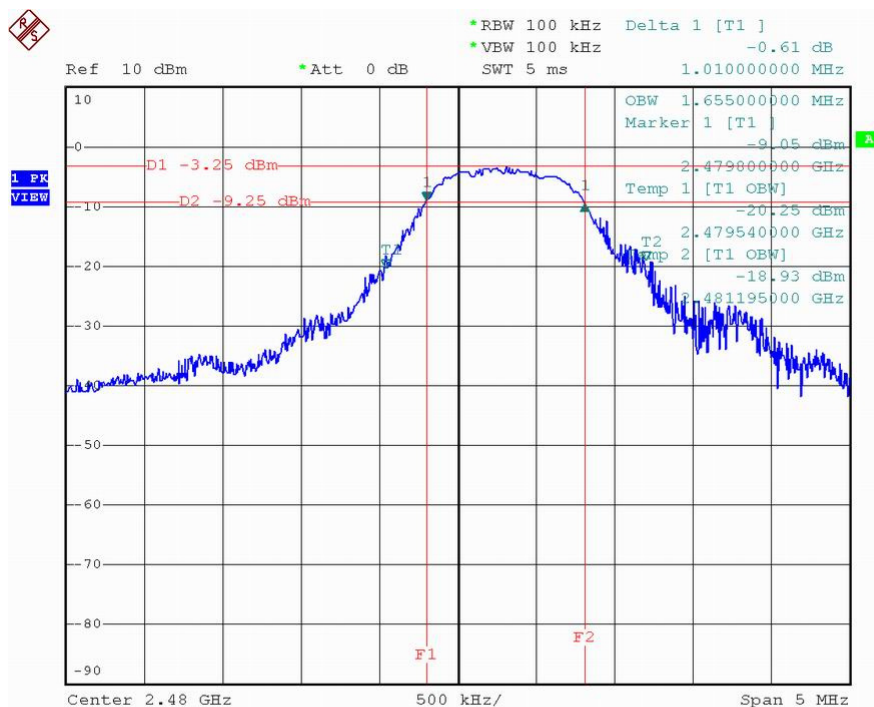


Date: 2.JUN.2009 20:41:27

7.7 Power spectral density

Test Method

- 1 Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2 Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5MHz, Sweep = 500 s
- 3 Record the max reading.

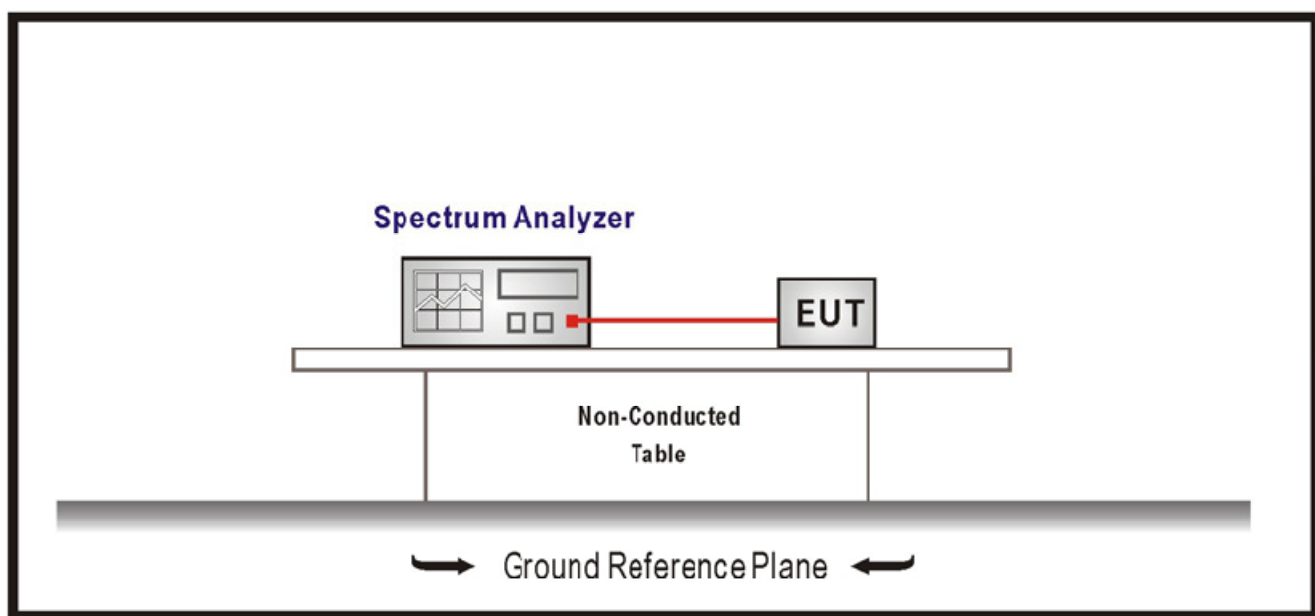


Limit

Limit dBm / 3 kHz
8


Power spectral density

EUT:	Wireless Presenter	Model Name :	C-U0005
Temperature:	20°C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	5V USB port
Test Mode :	Transmit mode		
Test By:	Tony Liu	Test date	2009-06-02


Frequency MHz	P dBm	Result
2403	-12.76	Pass
2440	-13.36	Pass
2480	-13.74	Pass

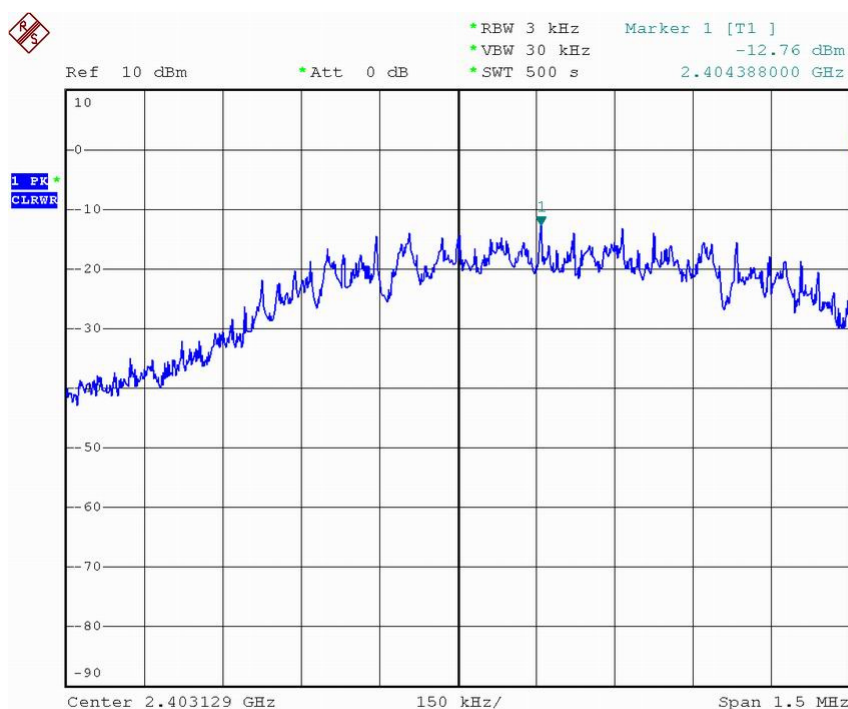

Date: 2.JUN.2009 19:55:39

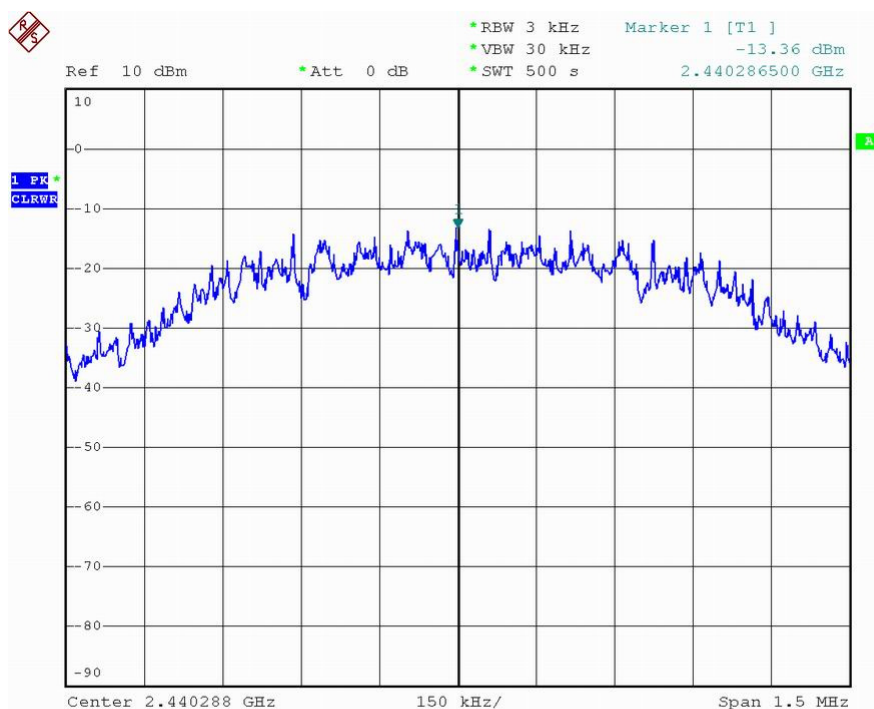

Date: 2.JUN.2009 20:22:52

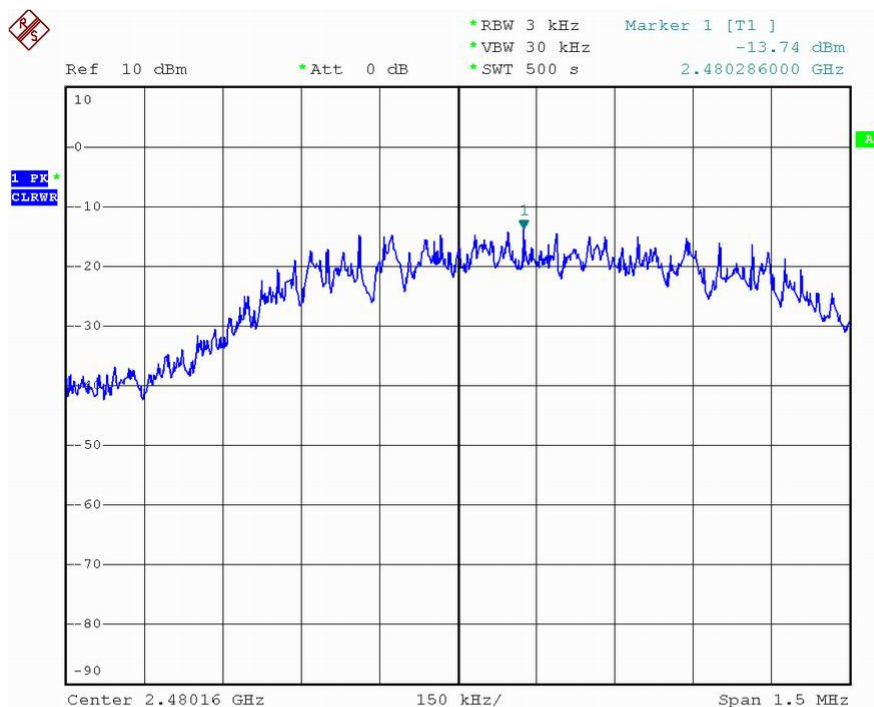


Date: 2.JUN.2009 20:10:47

7.8 Conducted Emission-receiver mode

Test Method

- 1 The EUT was placed on a table, which is 0.8m above ground plane
- 2 The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3 Maximum procedure was performed to ensure EUT compliance
- 4 A EMI test receiver (R&S Test Receiver ESCI) is used to test the emissions from both sides of AC line

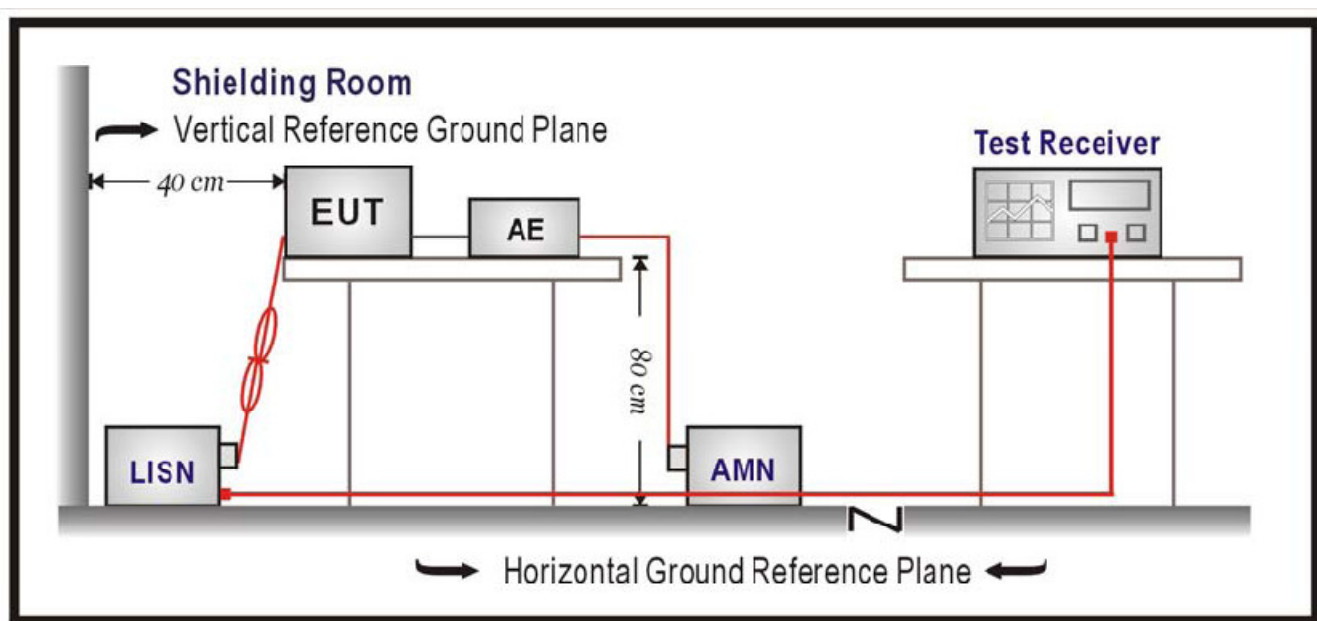


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

Peak Plot -----L line for C-U0005 only

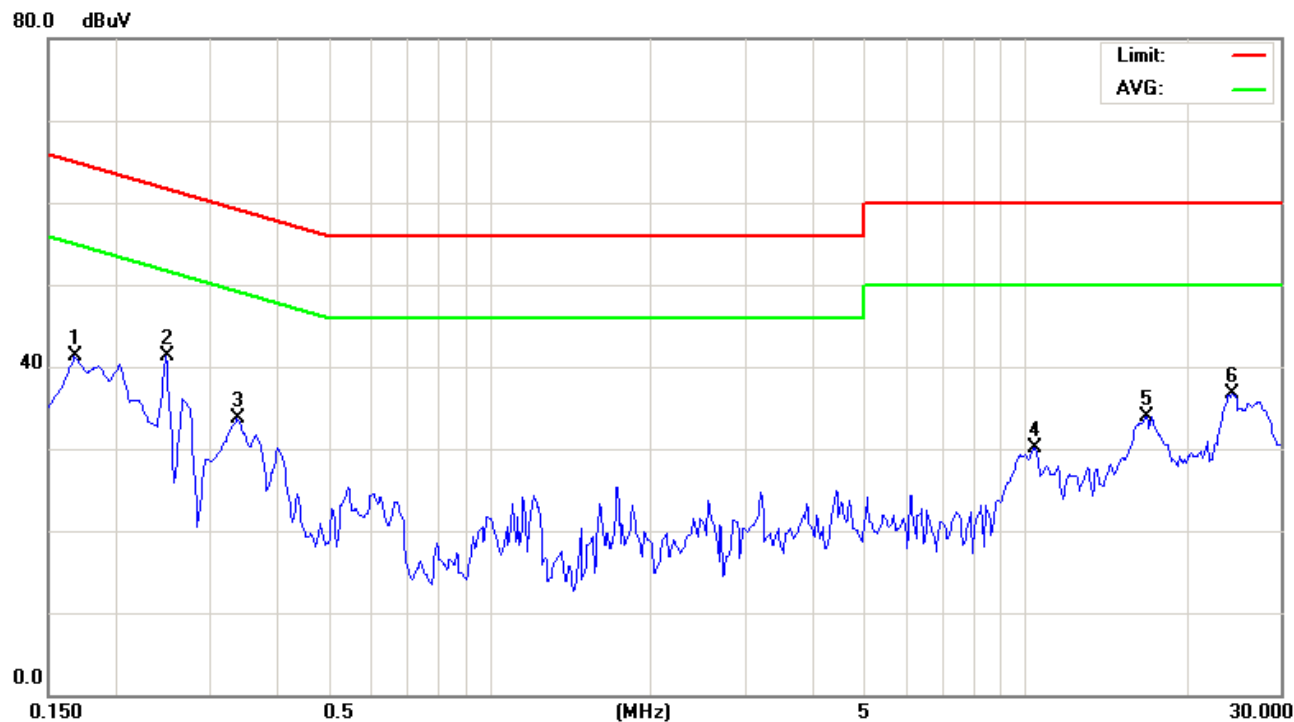


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1680	31.21	10.02	41.23	65.06	-23.83	peak
2	*	0.2490	31.37	10.03	41.40	61.79	-20.39	peak
3		0.3390	23.58	10.03	33.61	59.23	-25.62	peak
4		10.3920	19.89	10.29	30.18	60.00	-29.82	peak
5		16.8360	23.50	10.40	33.90	60.00	-26.10	peak
6		24.3960	26.09	10.54	36.63	60.00	-23.37	peak

Result: Pass

Conducted Emission

Peak Plot -----N line for C-U0005 only

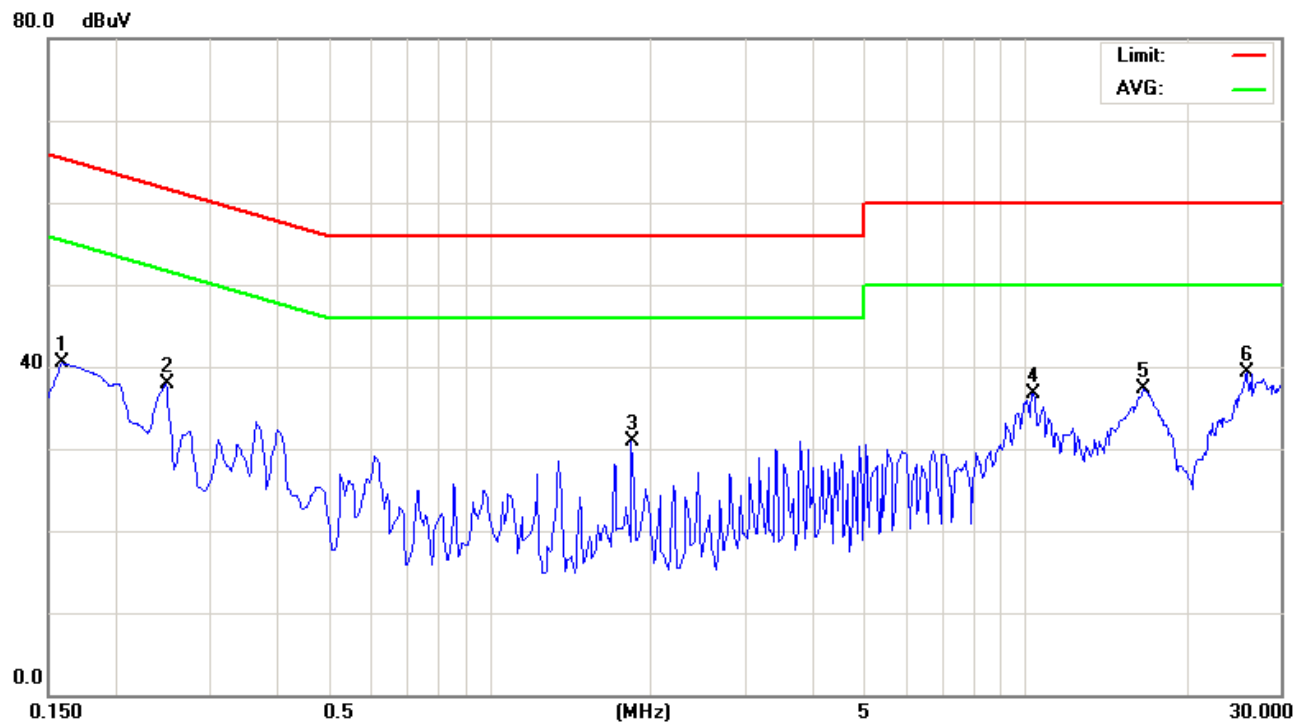


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1590	30.26	10.15	40.41	65.52	-25.11	peak
2		0.2490	27.80	10.14	37.94	61.79	-23.85	peak
3		1.8420	20.60	10.26	30.86	56.00	-25.14	peak
4		10.3200	26.30	10.38	36.68	60.00	-23.32	peak
5		16.6020	26.83	10.47	37.30	60.00	-22.70	peak
6	*	25.8638	28.76	10.58	39.34	60.00	-20.66	peak

Result: Pass

7.9 Radiated emissions –receiver mode

Test Method


- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

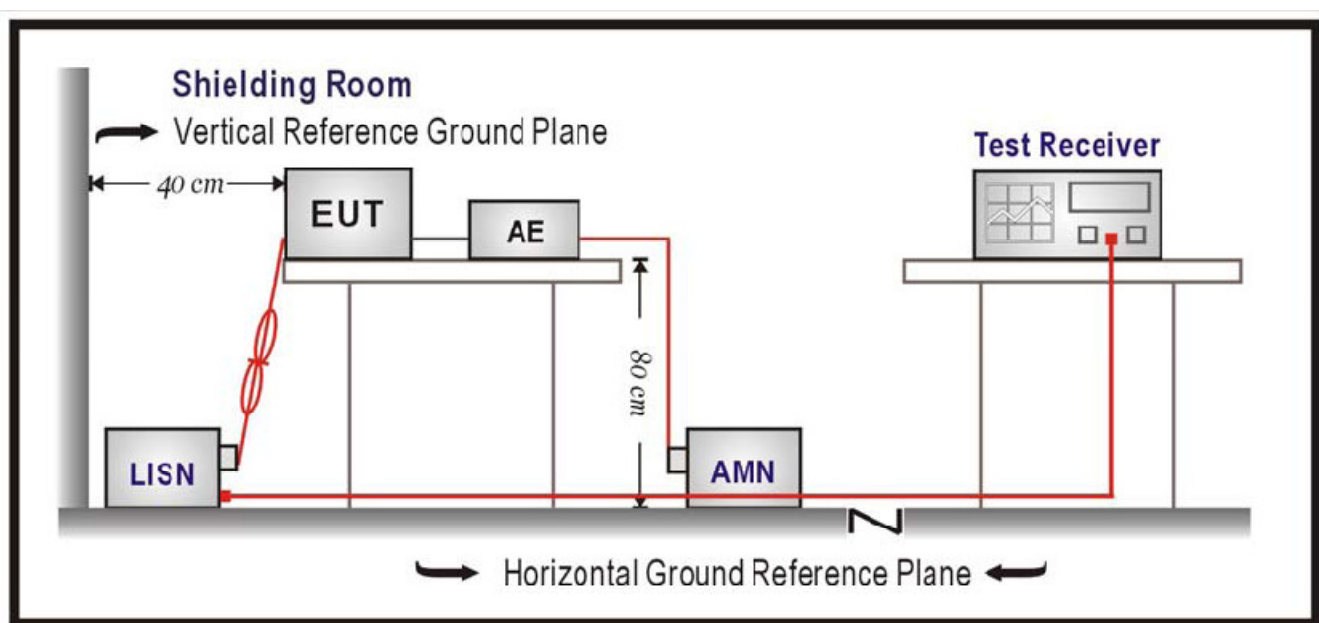

Limit

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Horizontal 30-1000MHz

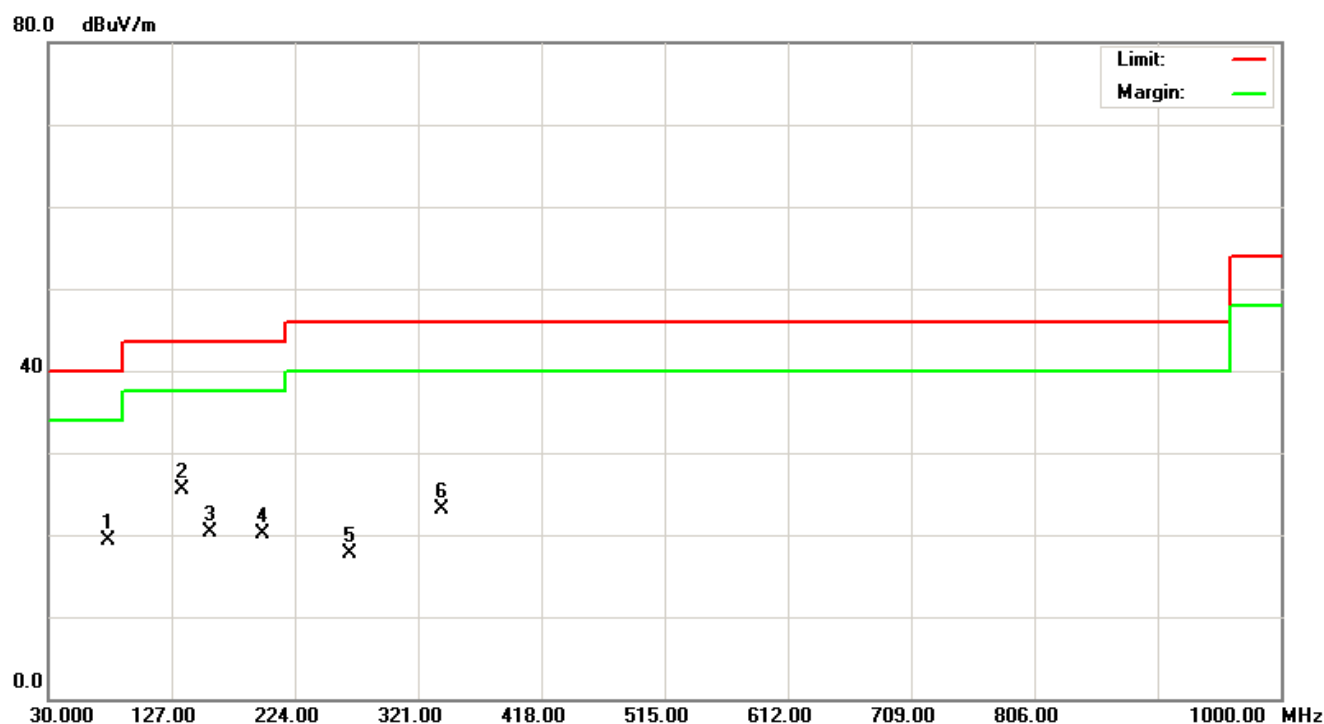


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		76.9000	37.97	-18.68	19.29	40.00	-20.71	peak
2	*	134.2300	40.12	-14.66	25.46	43.50	-18.04	peak
3		156.9000	33.97	-13.62	20.35	43.50	-23.15	peak
4		197.9300	35.64	-15.50	20.14	43.50	-23.36	peak
5		267.3400	30.78	-13.08	17.70	46.00	-28.30	peak
6		339.0700	33.11	-10.00	23.11	46.00	-22.89	peak

Result: Pass



China

Above 1000MHz

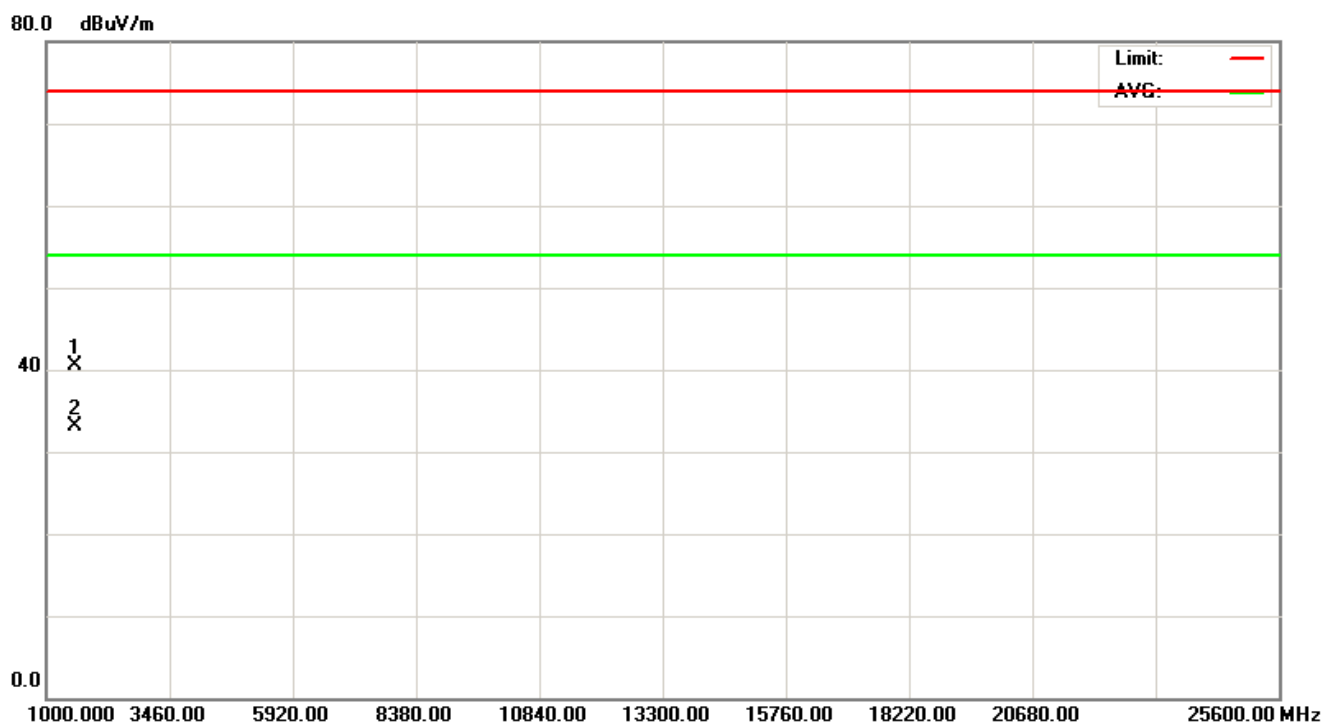


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		1558.860	45.78	-5.20	40.58	74.00	-33.42	peak
2	*	1558.860	38.23	-5.20	33.03	54.00	-20.97	AVG

Result: Pass

Vertical

30-1000MHz

80.0 dBuV/m

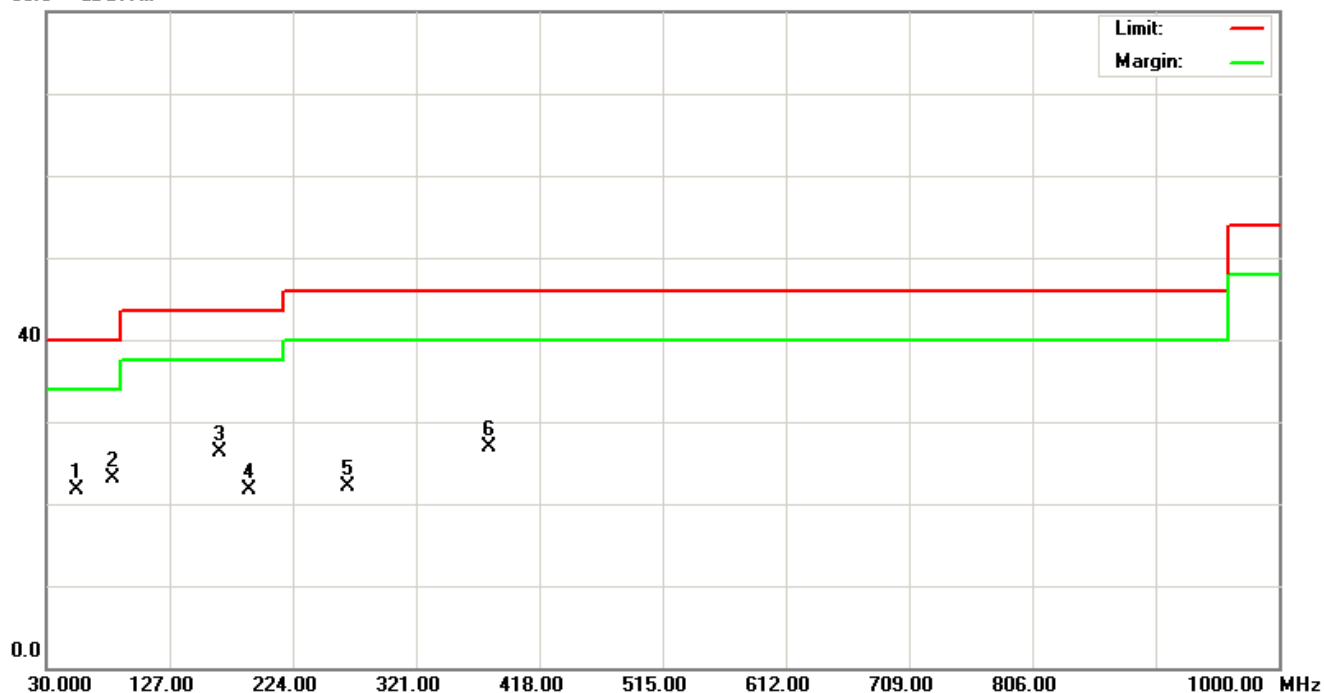

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		54.2300	36.90	-15.23	21.67	40.00	-18.33	peak
2	*	81.9000	42.54	-19.47	23.07	40.00	-16.93	peak
3		165.8700	39.89	-13.57	26.32	43.50	-17.18	peak
4		189.7000	37.26	-15.51	21.75	43.50	-21.75	peak
5		267.0900	35.14	-13.09	22.05	46.00	-23.95	peak
6		377.6700	35.61	-8.65	26.96	46.00	-19.04	peak


Result: Pass



China

Above 1000MHz

80.0 dBuV/m

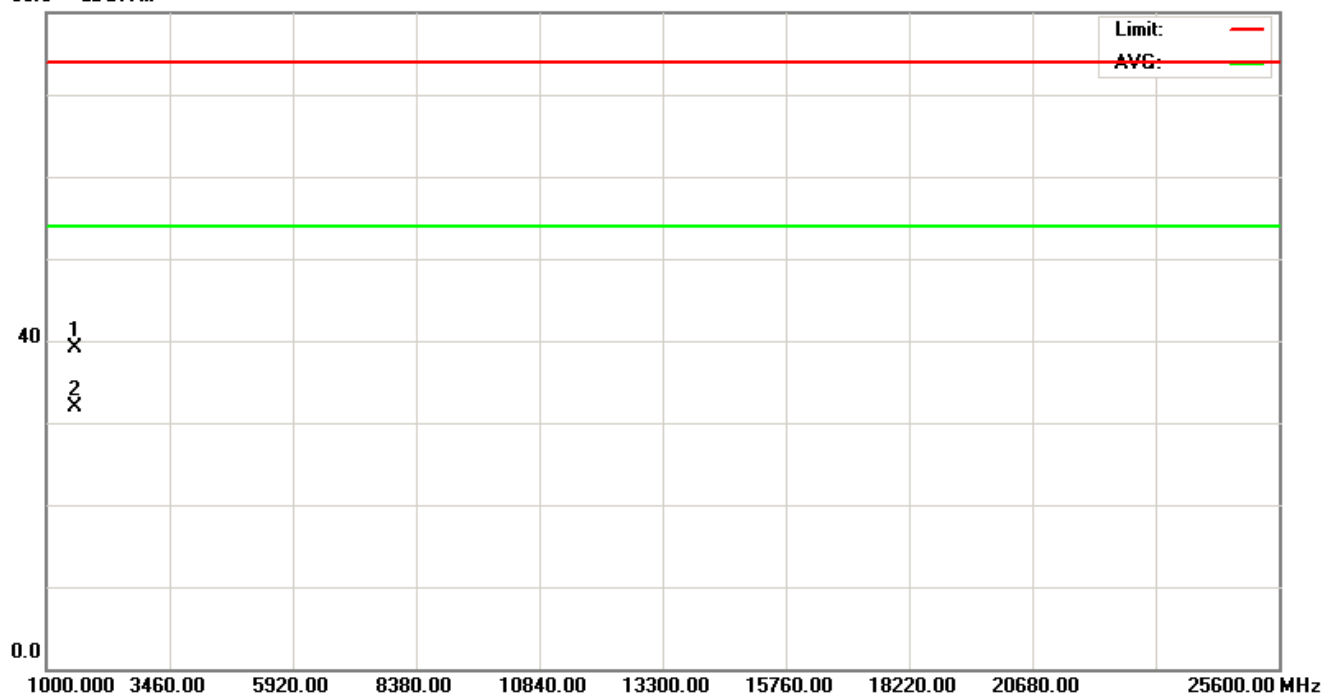

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		1556.980	44.28	-5.20	39.08	74.00	-34.92	peak
2	*	1556.980	37.13	-5.20	31.93	54.00	-22.07	AVG

Result: Pass



China

7.10 Maximum Permissible Exposure (MPE)

Test Method

In this document, we try to prove the safety of radiation harmfulness to the human body for our product. The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The Gain of the antenna used in this product is measured in a Fully Anechoic Chamber (FAC) calibrated for antenna measurement in ADT, and also the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the distance, away from the product, where the limit of MPE is reached.

Although the Friis transmission formula is a far field assumption, the calculated result of that is an over-prediction for near field power density. We will take that as the worst case to specify the safety range.

RF Exposure Limit

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A)Limits For Occupational / Control Exposures				
300-1500	...	...	F/300	6
1500-100,000	...	...	5	6
(B)Limits For General Population / Uncontrolled Exposure				
300-1500	...	...	F/1500	6
1500-100,000	...	...	1.0	30

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

where

P_d = power density in mW/cm^2

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale, for C-U0005, $G=2.67dBi$

$\pi = 3.1416$

R = distance between observation point and center of the radiator in cm; for C-U0005,
 $R=20cm$

Frequency(MHz)	Peak power (dBm/mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
CH01(2403)	-1.29/0.74	0.00027	1.0
CH38(2440)	-1.18/0.76	0.00028	1.0
CH78(2480)	-1.57/0.70	0.00026	1.0

8 .Test Equipment list

8.1 CONDUCTED EMISSION MEASUREMENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00042991	Jan. 23, 2010
2	LISN	EMCO	3816/2	00042990	Jan. 23, 2010
3	Pulse Limiter	Electro-Metrics	EM-7600	112644	Nov. 26, 2009
4	50Ω Terminator	N/A	N/A	N/A	May.11, 2010
5	Test Cable	N/A	C01	N/A	Nov. 26, 2009
6	EMI Test Receiver	R&S	ESCI	100082	Mar. 06, 2010

8.2 RADIATED EMISSION MEASUREMENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9160	3058	Mar. 18, 2010
2	Test Cable	N/A	10M_OS02	N/A	Nov. 26, 2009
3	Test Cable	N/A	OS02-1/-2/-3	N/A	Nov. 26, 2009
4	Pre-Amplifier	Anritsu	MH648A(OS02)	M10061	Nov. 26, 2009
5	EMI Test Receiver	R&S	ESCI	100082	Jan. 29, 2010
6	Antenna Mast	Chance Most	CMTB-1.5	N/A	N/A
7	Turn Table	Chance Most	CMTB-1.5	N/A	N/A
8	Horn Antenna	Schwarzbeck	BBHA9170	9170187	Oct. 23, 2009
9	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Mar. 09, 2009
10	Microflex Cable	United Microwave	57793	1m	Mar. 09, 2009
11	Microflex Cable	United Microwave	A30A30-5006	10M	Jul. 06, 2009