





ISO/IEC17025Accredited Lab.

Report No: FCC 0803144
File reference No: 2008-04-22

Applicant: WANLIDA GROUP CO.,LTD.

Product: Notebook

Model No: PC-88001

Trademark: N/A

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247& Part 15 Subpart B

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, Part 15 Subpart B &FCC Part 15 Subpart C, Paragraph 15.247 regulations for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: April 22,2008

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0803144 Page 2 of 81

Date: 2008-04-22



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC-Registration No.: IC5205A-01

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-01.

Page 3 of 81

Report No: 0803144 Date: 2008-04-22



Test Report Conclusion Content

1.0	General Details	3
1.1	Test Lab Details.	3
1.2	Applicant Details	3
1.3	Description of EUT	3
1.4	Submitted Sample	3
1.5	Test Duration.	4
1.6	Test Uncertainty	4
1.7	Test By	4
2.0	List of Measurement Equipment.	4
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	14
6.1	Test Method and Test Procedure.	14
6.2	Configuration of the EUT.	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit	15
7.0	6dB Bandwidth Measurement	40
8.0	Maximum Peak Output Power	54
9.0	Power Spectral Density Measurement.	56
10.0	Out of Band Measurement.	64
11.0	Antenna Requirement.	69
12.0	Maximum Permissible Exposure	70
13.0	FCC ID Label.	72
14.0	Photo of Test Setup and EUT View.	73

Date: 2008-04-22



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Wanlida Group Co., Ltd.

Address: No.618, Jiahe Road, Xiamen, China 361006

Telephone: +86-596-7653680-8516 Fax: +86-596-7662886

1.3 Description of EUT

Product: Notebook

Manufacturer: Wanlida Group Co., Ltd.

Brand Name: N/A

Model Number: PC-88001

Additional Model Name N/A
Additional Trade Name N/A

Rating: Input: DC 12V; 24W

Power Supply: Model: MPA-630, Input: 100-240V~, 1A, 50/60Hz; Output: DC12V, 2A

Type of Modulation DBPSK、DQPSK、CCK、OFDM

Frequency range 2412-2462MHz

Number of Channel 11

Air Data Rate 54, 48, 36, 24, 18, 12, 9, 6Mbps at 802.11g mode; 11, 5.5, 2, 1Mbps

at 802.11b mode

Frequency Selection By software

1.4 Submitted Sample

1 Sample

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 81

Report No: 0803144 Date: 2008-04-22



1.5 Test Duration 2008-03-06 to 2008-04-22

1.6 Test Uncertainty

Conducted Emissions Uncertainty = ± 2.4 dB Radiated Emissions Uncertainty = ± 4.2 dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0	Test Equipments							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2007-12-05	2008-12-04			
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2007-12-05	2008-12-04			
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2007-12-05	2008-12-04			
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2007-12-05	2008-12-04			
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2007-12-05	2008-12-04			
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2007-03-30	2008-03-29			
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2008-02-18	2009-02-17			
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2008-02-18	2009-02-17			
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2008-02-18	2009-02-17			
System Controller	CT	SC100	-	2008-02-18	2009-02-17			
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2008-02-18	2009-02-17			
FM-AM Signal Generator	JUNG.JIN	SG-150M	389911177	2008-02-18	2009-02-17			
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2008-02-18	2009-02-17			

The report refers only to the sample tested and does not apply to the bulk.

Page 6 of 81

Report No: 0803144 Date: 2008-04-22

	,		\Im		
Computer	IBM	8434	1S8434KCE99BLX LO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2008-02-18	2009-02-17
Power meter	Anritsu	ML2487A	6K00003613	2008-02-18	2008-02-17
Power sensor	Anritsu	MA2491A	32263	2008-02-8	2008-02-17
Spectrum Analyzer	HAMEG	HM5012	-	-	-
Power Supply	LW	APS1502	-	-	-
5K VA AC Power Source	California Instruments	5001iX	56060	2008-02-18	2009-02-17
CDN	EM TEST	CDN M2/M3	-	2008-02-18	2009-02-17
Attenuation	EM TEST	ATT6/75	-	2008-02-18	2009-02-17
Resistance	EM TEST	R100	-	2008-02-18	2009-02-17
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2008-02-18	2009-02-17
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2008-02-18	2009-02-17
Power Amplifier	AR	150W1000	300999	2008-02-18	2009-02-17
Field probe	Holaday	HI-6005	105152	2008-02-18	2009-02-17
Bilog Antenna	Chase	CBL6111C	2576	2008-02-18	2009-02-17
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2008-02-18	2009-02-17
3m OATS			N/A	2008-02-18	2009-02-17
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2007-08-16	2008-08-15
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2007-07-03	2008-07-02

Page 7 of 81

Report No: 0803144 Date: 2008-04-22



3.0 Technical Details

3.1 Summary of test results

The EUT has been	ı tested accordin	g to the following	specifications:
		A	, 50000

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107	Conducted Emission Test	PASS	Complies
& 15.207			
	Spectrum bandwidth of a		Complies
FCC Part 15 Subpart C	Orthogonal Frequency		
Paragraph 15.247(a)(2) Limit	Division Multiplex System	PASS	
r aragraph 13.247(a)(2) Linnt	Limit: 6dB		
	bandwidth>500kHz		
FCC Part 15, Paragraph	Maximum peak output		
15.247(b)	power	PASS	Complies
13.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	PASS	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	Power Spectral Density	PASS	Complies
15.247(d)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	PASS	Complies
15.247(c)	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	Table 15.209		


3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247


4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd

5.

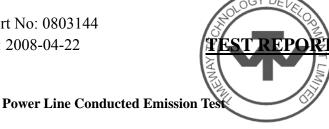

5.1

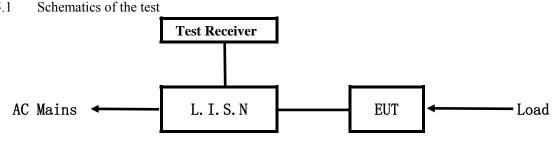


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2003.

Block diagram of Test setup

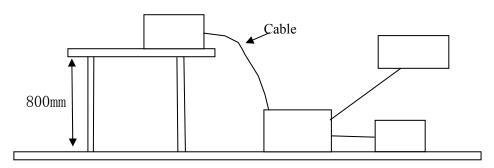

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Two channels are provided to the EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	-	

The report refers only to the sample tested and does not apply to the bulk.

Page 9 of 81

Report No: 0803144 Date: 2008-04-22



A. EUT

Device	Manufacturer	Model	FCC ID
Notebook	Wanlida Group Co., Ltd.	PC-88001	SMFPC-88001

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level Average Level		Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: the worse cases was selected to conducted the test


A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Read USB,SD card and software, Running EMC test software and Ping

wireless network

Results: Pass

Please refer to following diagram for individual

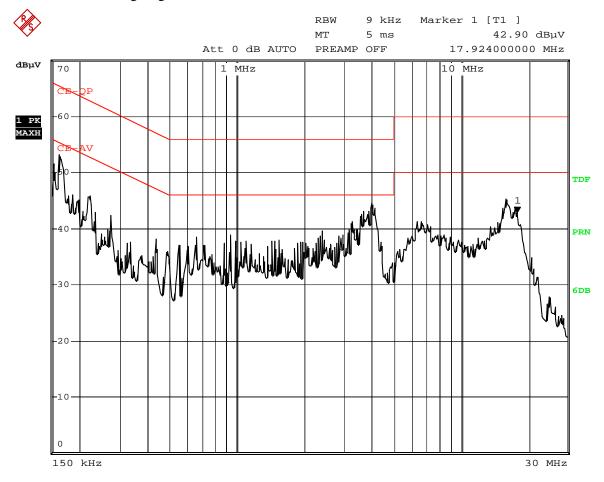

Date: 3.APR.2008 13:28:04

Emagnaman	Reading(dB μ V)				Limit	
Frequency (MHz)	Line	;	Neutral		(dB µ	V)
(IVITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.162	50.21	38.98			65.4	55.4
0.222	42.65	31.10			62.7	52.7
6.684	32.87	29.76			60.0	50.0
14.796	40.7	37.65			60.0	50.0

The report refers only to the sample tested and does not apply to the bulk.


3 Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Read USB,SD card and software, Running EMC test software and Ping

wireless network

Results: Pass

Please refer to following diagram for individual

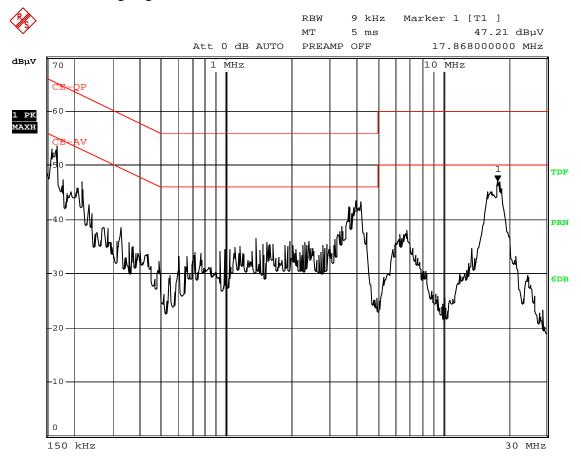

Date: 3.APR.2008 13:25:03

F		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(IVITIZ)	Quasi-peak Average		Quasi-peak	Average	Quasi-peak	Average
0.166			51.65	40.87	65.2	55.2
0.222			43.54	36.54	62.7	52.7
0.988			32.21	28.31	56.0	46.0
6.852			39.10	36.87	60.0	50.0
13.976			40.32	36.76	60.0	50.0


The report refers only to the sample tested and does not apply to the bulk.



EUT set Condition: Running notebook test program and Ping network

Results: Pass

Please refer to following diagram for individual

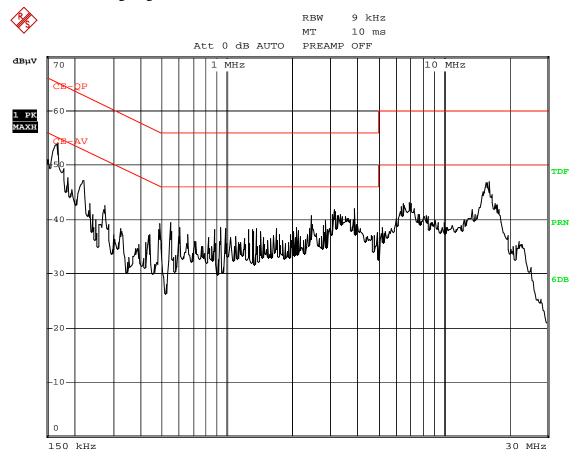

Date: 3.APR.2008 13:12:17

F		Reading(dB µ V)			Limit		
Frequency (MHz)	Line	ne Neutral		al	$(dB \mu V)$		
(IVITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.162	52.00	40.54			65.4	55.4	
0.218	45.21	33.65			62.9	52.9	
0.274	40.32	30.67			61.0	51.0	
1.316	27.32	23.43			56.0	46.0	
14.304	38.76	35.10			60.0	50.0	


The report refers only to the sample tested and does not apply to the bulk.



EUT set Condition: Running notebook test program and Ping network

Results: Pass

Please refer to following diagram for individual

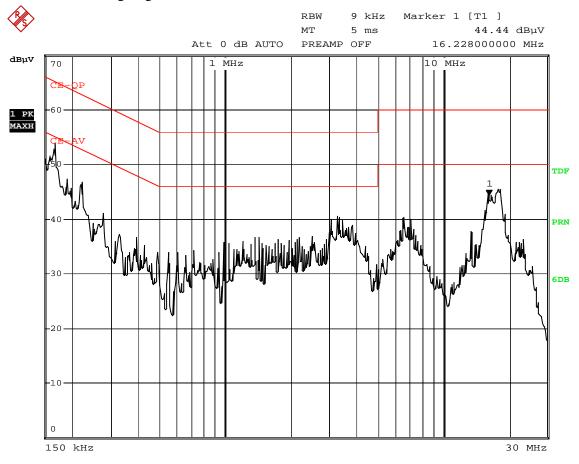

Date: 3.APR.2008 13:15:39

Frequency		Reading(dB µ V)			Limit		
	Live	;	Neutral		$(dB \mu V)$		
(MHz)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.166			52.32	41.10	65.2	55.2	
0.222			43.76	36.10	62.7	52.7	
0.386			33.98	31.65	58.1	48.8	
6.636			35.76	31.87	60.0	50.0	
13.924			39.10	35.32	60.0	50.0	

The report refers only to the sample tested and does not apply to the bulk.

Page 14 of 81

Report No: 0803144 Date: 2008-04-22



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 0803144 Page 15 of 81

Date: 2008-04-22



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No: 0803144 Page 16 of 81

Date: 2008-04-22



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Read USB,SD card and software, Running EMC test software and Ping

wireless network


Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
61.525	30.92	Н	40.00
182.775	34.39	Н	43.50
357.375	41.66	Н	46.00
960.256	44.36	Н	54.00
61.562	31.74	V	40.00
357.375	38.20	V	46.00
910.633	41.39	V	46.00
967.900	43.41	V	54.00




Test Figure:

Radiated Emission Measurement

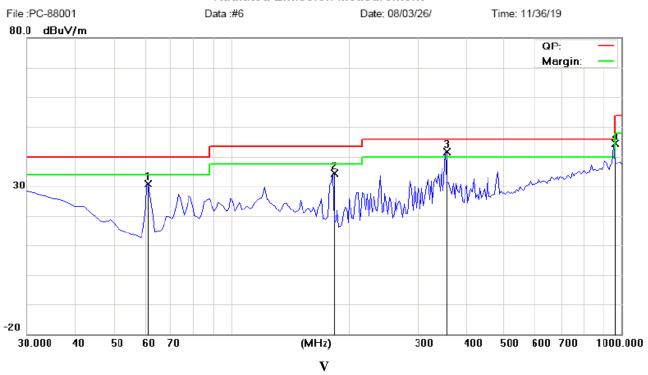

Radiated Emission Measurement

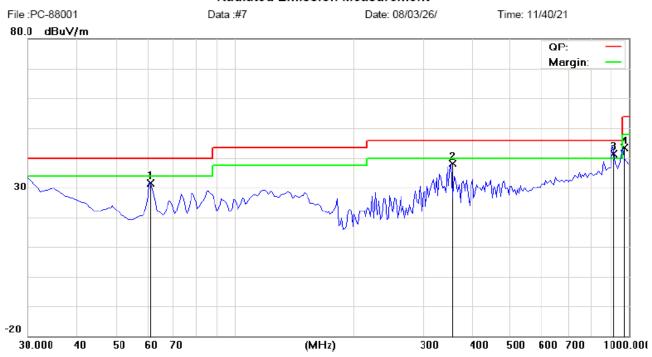

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0803144 Page 18 of 81

Date: 2008-04-22

EUT set Condition: Running notebook test program and Ping network

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
61.525	29.56	Н	40.00
182.775	34.20	Н	43.50
342.825	39.85	Н	46.00
556.225	39.35	Н	46.00
960.237	44.21	Н	46.00
30.000	35.81	V	40.00
333.125	39.44	V	46.00
364.650	39.17	V	46.00
553.800	40.81	V	46.00
910.563	42.22	V	46.00


Page 19 of 81

Report No: 0803144 Date: 2008-04-22




Test Figure:

Radiated Emission Measurement

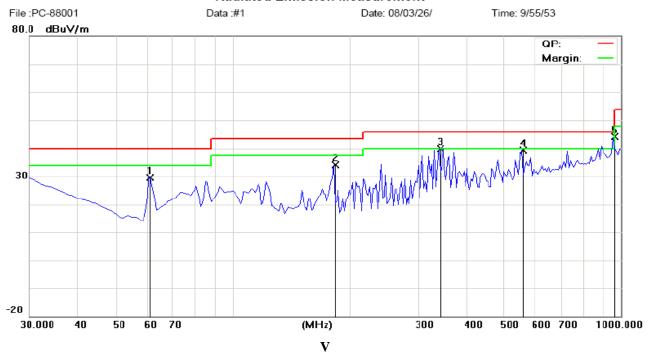

Radiated Emission Measurement

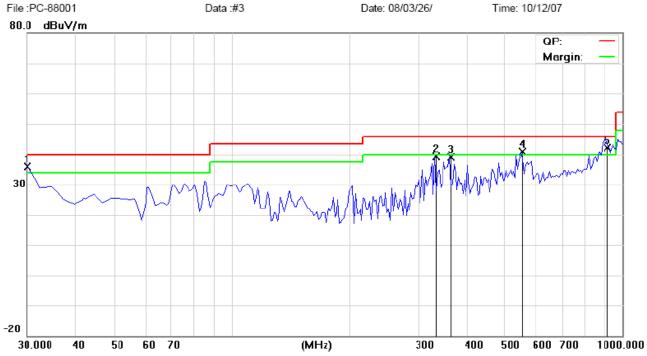

Note: Emission level $(dB\mu V/m)$ =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading $(dB\mu V)$.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0803144 Page 20 of 81

Date: 2008-04-22

Operation Mode: Transmitting & Receiving under CH01 at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2412.00	87.7(PK) /79.9 (AV)	Н	Fundamental Frequency
2412.00	80.5(PK) /72.6 (AV)	V	Fundamental Frequency
4824.00	54.6(PK) /42.1 (AV)	Н	74(Peak)/ 54(AV)
4824.00	1	V	74(Peak)/ 54(AV)
7236.00	-	H/V	74(Peak)/ 54(AV)
9648.00	1	H/V	74(Peak)/ 54(AV)
12060	ı	H/V	74(Peak)/ 54(AV)
14472	-	H/V	74(Peak)/ 54(AV)
16684	-	H/V	74(Peak)/ 54(AV)
19296	1	H/V	74(Peak)/ 54(AV)
21708	-	H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps
- 4. Test results are for the worst case condition

Operation Mode: Transmitting & Receiving under CH06 at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	84.0 (PK) /75.3 (AV)	V	Fundamental Frequency
2437.00	90.4 (PK) /81.8 (AV)	Н	Tundamental Frequency
4874.00	64.7 (PK) /49.9 (AV)	Н	74(Peak)/ 54(AV)
4874.00	ı	V	74(Peak)/ 54(AV)
7311.00	1	H/V	74(Peak)/ 54(AV)
9748.00	-	H/V	74(Peak)/ 54(AV)
12185	ı	H/V	74(Peak)/ 54(AV)
14622	1	H/V	74(Peak)/ 54(AV)
17059	1	H/V	74(Peak)/ 54(AV)
19496	•	H/V	74(Peak)/ 54(AV)
21933	-	H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 6Mbps
- 4. Test results are for the worst case condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0803144 Page 21 of 81

Operation Mode: Transmitting & Receiving under CH11 at 6Mbps

Operation Mode.	operation whose. Transmitting & Accerving under Citif at 61416ps				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)		
2462.00	87.0 (PK) /79.0 (AV)	Н	Fundamental Frequency		
2462.00	79.1 (PK) /71.3 (AV)	V	rundamental Frequency		
4824		H/V	74(Peak)/ 54(AV)		
7368		H/V	74(Peak)/ 54(AV)		
9848		H/V	74(Peak)/ 54(AV)		
12310		H/V	74(Peak)/ 54(AV)		
14772		H/V	74(Peak)/ 54(AV)		
17234		H/V	74(Peak)/ 54(AV)		
19696		H/V	74(Peak)/ 54(AV)		
22158		H/V	74(Peak)/ 54(AV)		
24650		H/V	74(Peak)/ 54(AV)		

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 6Mbps


Date: 2008-04-22

4. Test results are for the worst case condition



Please refer to the following test plots for details:

CH01 at 6Mbps: Vertical

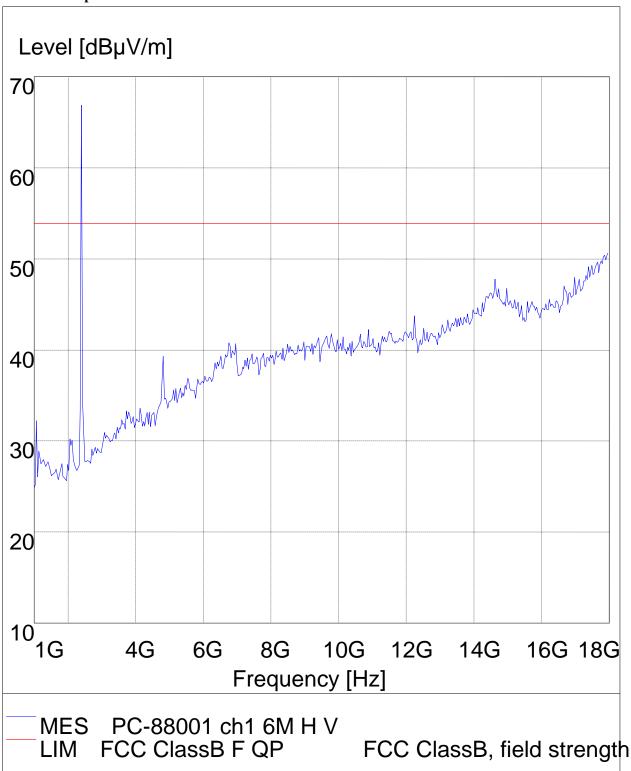


The report refers only to the sample tested and does not apply to the bulk.

Page 23 of 81

Report No: 0803144 Date: 2008-04-22



CH01 at 6Mbps: Horizontal

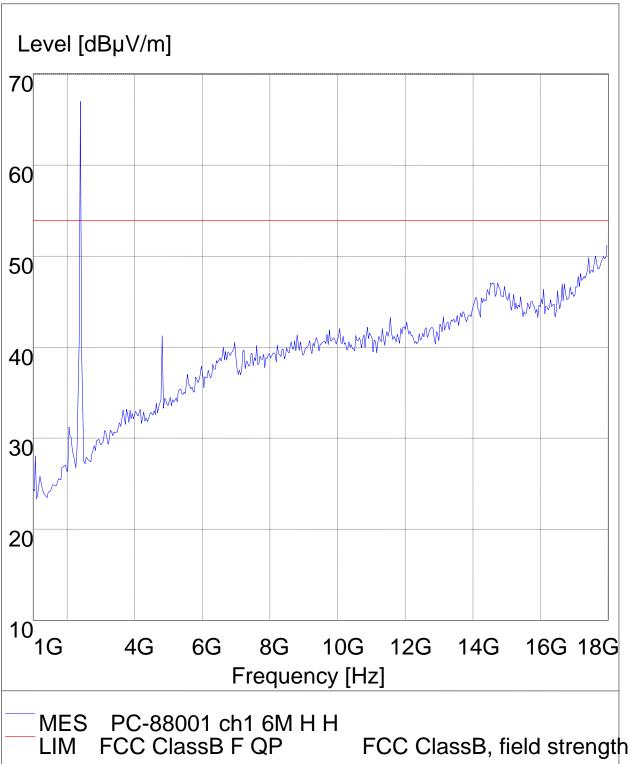


The report refers only to the sample tested and does not apply to the bulk.

Page 24 of 81

Report No: 0803144 Date: 2008-04-22




CH06 at 6Mbps: Vertical

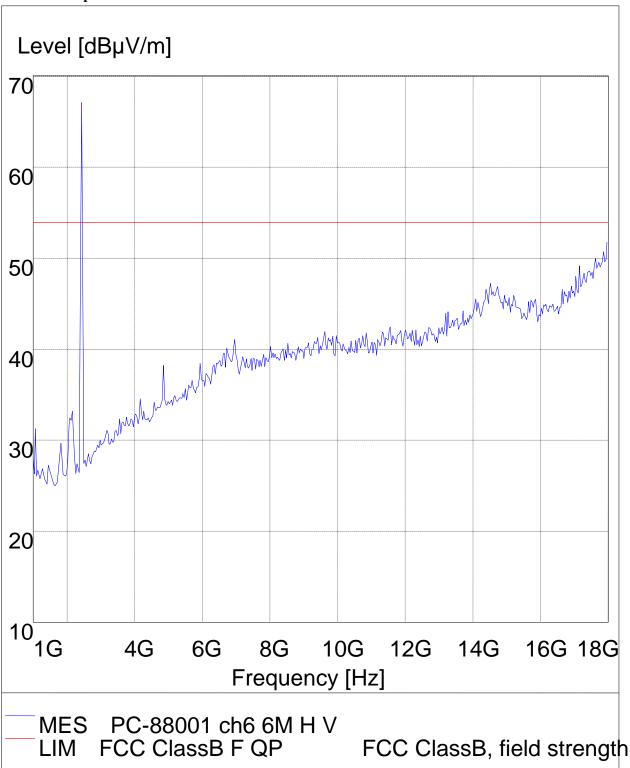

The report refers only to the sample tested and does not apply to the bulk.




CH06 at 6Mbps: Horizontal

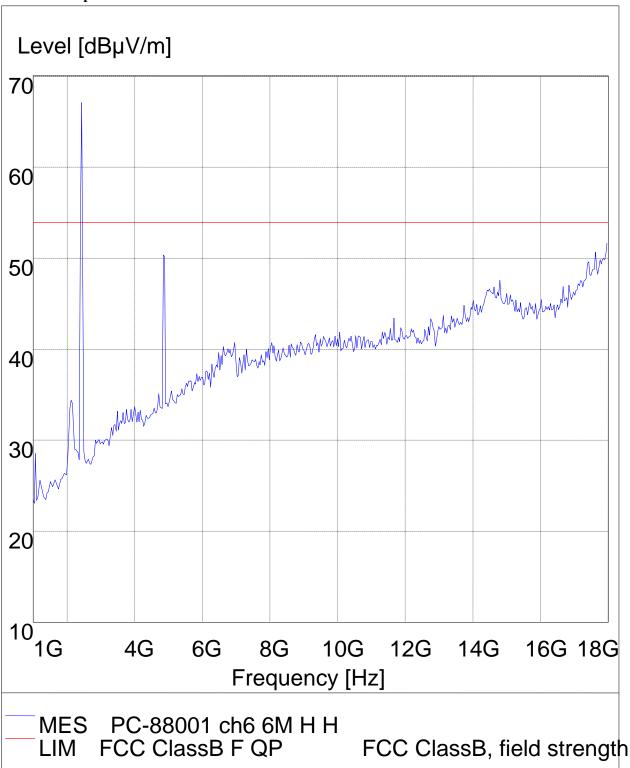

The report refers only to the sample tested and does not apply to the bulk.



CH11 at 6Mbps: Vertical

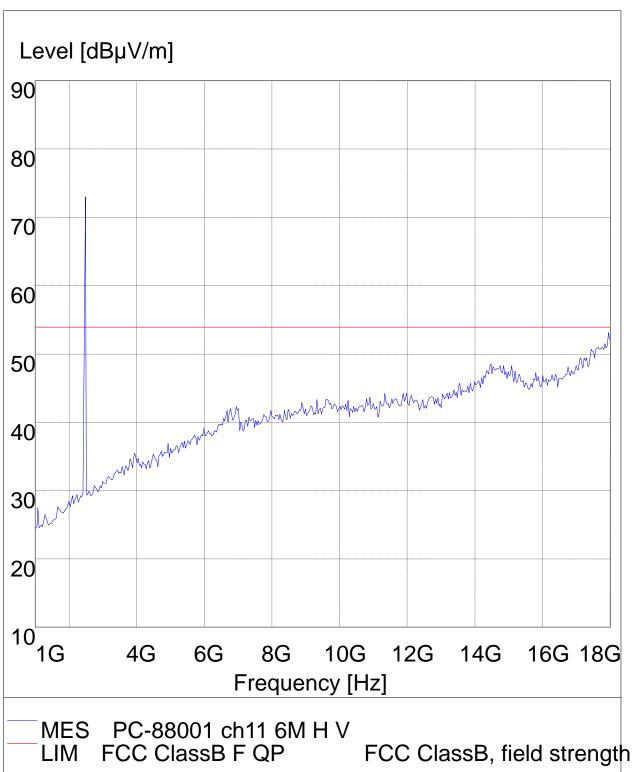


The report refers only to the sample tested and does not apply to the bulk.

Page 27 of 81

Report No: 0803144 Date: 2008-04-22




CH11at 6Mbps: Horizontal

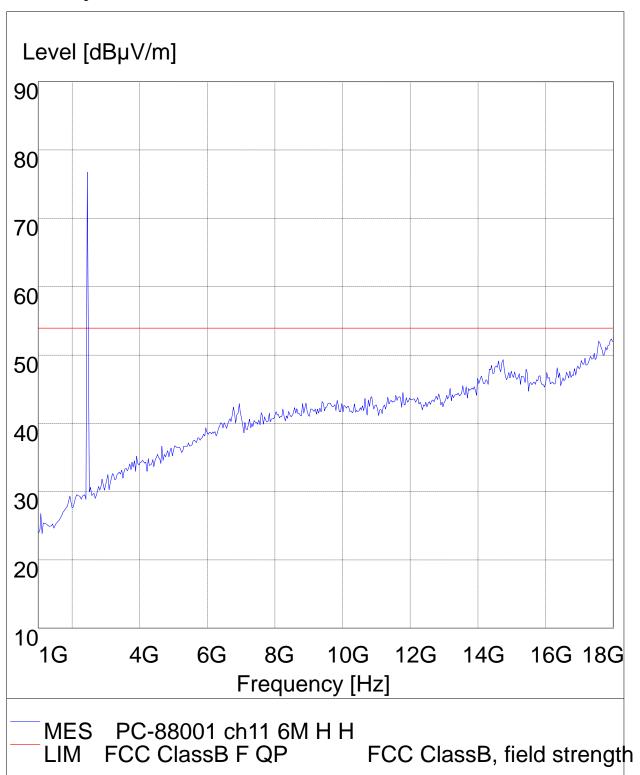

The report refers only to the sample tested and does not apply to the bulk.




18-25G CH11 6M Horizontal

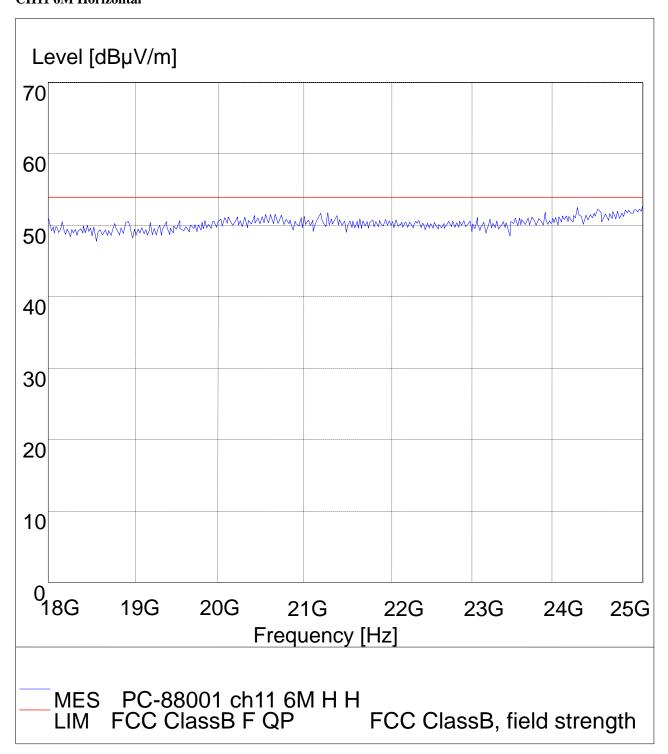

The report refers only to the sample tested and does not apply to the bulk.



18-25G CH11 6M Vertical

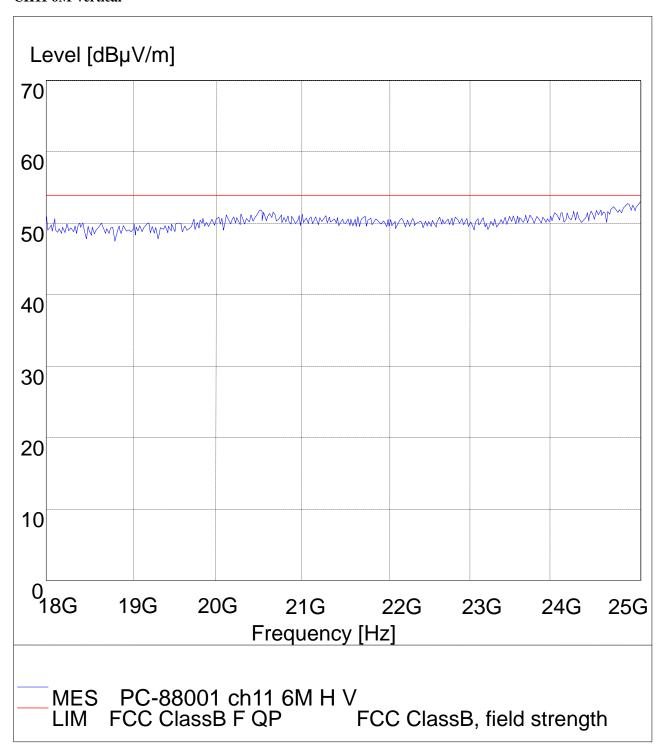

The report refers only to the sample tested and does not apply to the bulk.

Report No: 0803144 Page 30 of 81

Date: 2008-04-22

Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2412.00	86.0 (PK)/ 82.1(AV)	Н	<u> </u>
2412.00	78.7 (PK)/74.8 (AV)	V	Fundamental Frequency
4824.00	52.1 (PK)/ 48.3(AV)	Н	74(Peak)/ 54(AV)
4824.00		V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps
- 4. Test results are for the worst case condition

Operation Mode: Transmitting & Receiving under CH06 at 11Mbps

			-
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	86.8(PK)/ 83.4AV)	Н	Eundomontal Eroquanay
2437.00	79.1(PK)/76.2 (AV)	V	Fundamental Frequency
4874.00		H/V	74(Peak)/ 54(AV)
7311.00	-	H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	-	H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps
- 4. test results are for the worst case condition

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0803144 Page 31 of 81

Operation Mode: Transmitting

Operation vioue. Transmitting & Receiving under CIIII at 11 viops				
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)	
2462.00	87.6 (PK) /84.1AV)	Н	Fundamental Frequency	
2462.00	80.8 (PK) /76.6 (AV)	V	rundamental Frequency	
4924		H/V	74(Peak)/ 54(AV)	
7368		H/V	74(Peak)/ 54(AV)	
9848	-	H/V	74(Peak)/ 54(AV)	
12310	-	H/V	74(Peak)/ 54(AV)	
14772	1	H/V	74(Peak)/ 54(AV)	
17234	-	H/V	74(Peak)/ 54(AV)	
19696	-	H/V	74(Peak)/ 54(AV)	
22158		H/V	74(Peak)/ 54(AV)	
24650		H/V	74(Peak)/ 54(AV)	

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps


Date: 2008-04-22

4. Test results are for the worst case condition



Please refer to the following test plots for details

CH01 at 11Mbps: Vertical

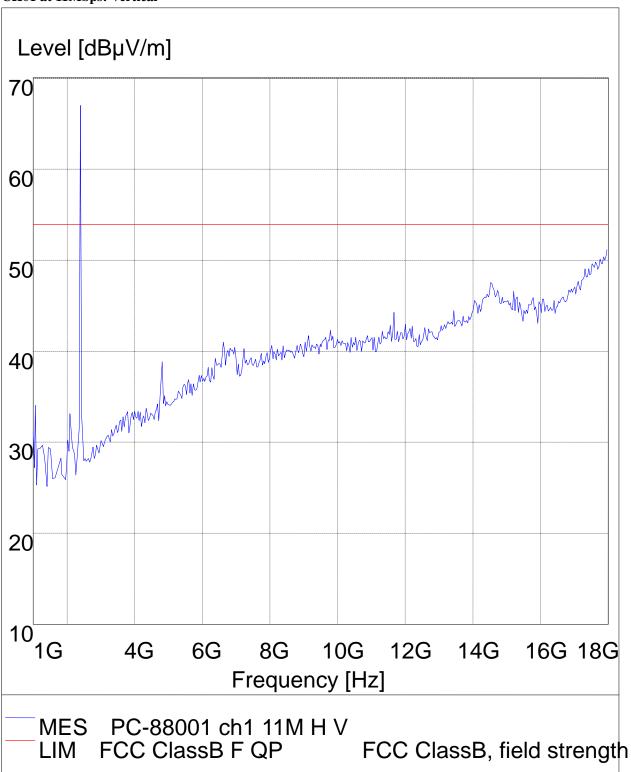


The report refers only to the sample tested and does not apply to the bulk.

Page 33 of 81

Report No: 0803144 Date: 2008-04-22



CH01 at 11Mbps: Horizontal

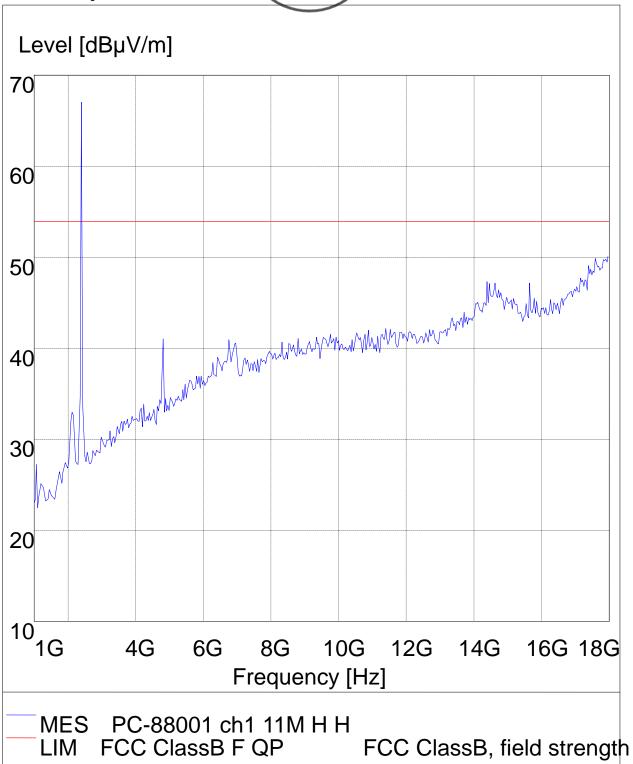


The report refers only to the sample tested and does not apply to the bulk.

Page 34 of 81

Report No: 0803144 Date: 2008-04-22



CH06 at 11Mbps: Vertical

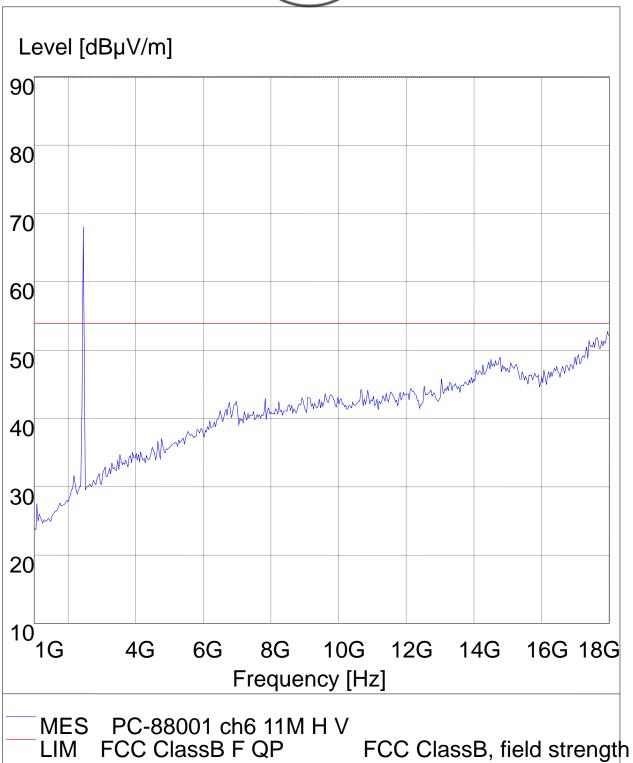


The report refers only to the sample tested and does not apply to the bulk.

Page 35 of 81

Report No: 0803144 Date: 2008-04-22



CH06 at 11Mbps: Horizontal

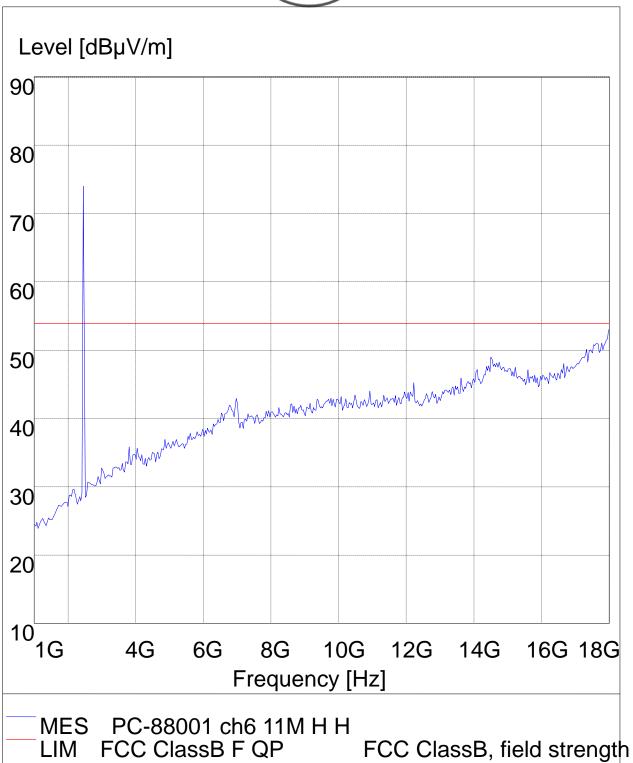


The report refers only to the sample tested and does not apply to the bulk.

Page 36 of 81

Report No: 0803144 Date: 2008-04-22



CH11 at 11Mbps: Vertical

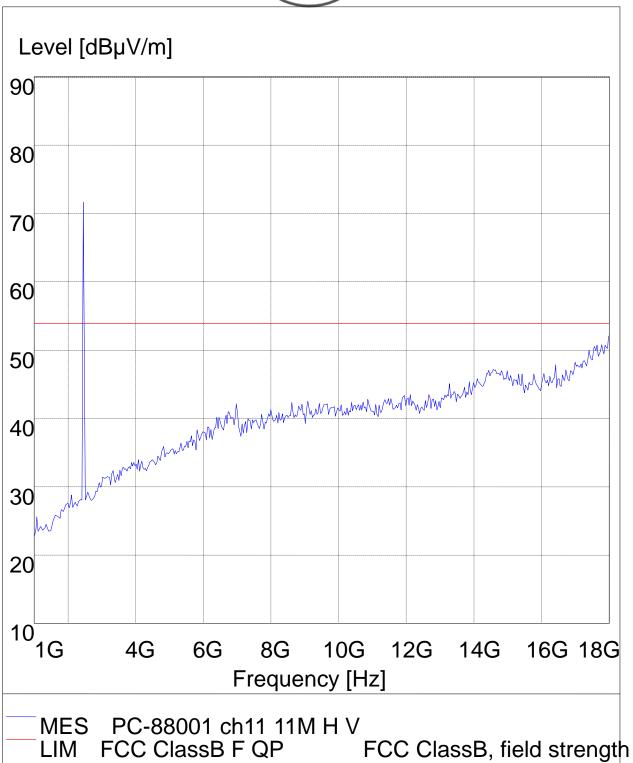


The report refers only to the sample tested and does not apply to the bulk.

Page 37 of 81

Report No: 0803144 Date: 2008-04-22



CH11 at 11Mbps: Horizontal

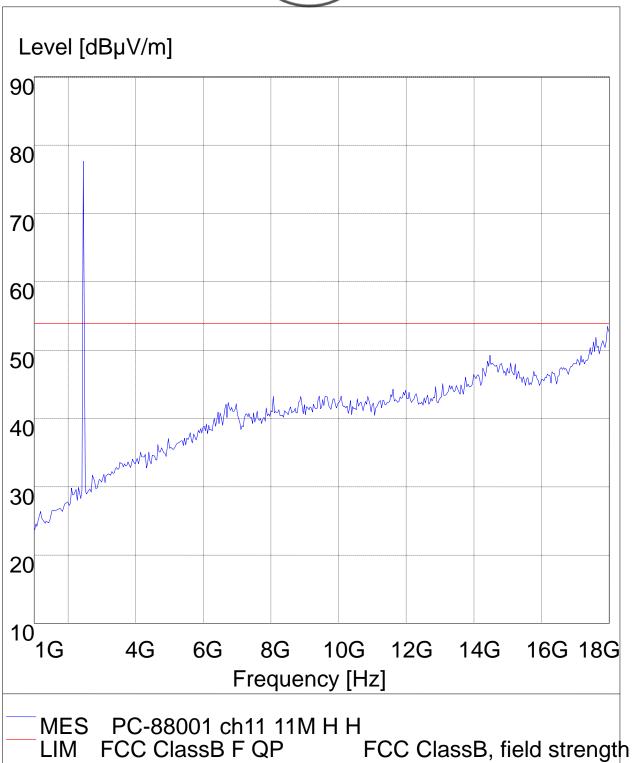


Page 38 of 81

Report No: 0803144 Date: 2008-04-22



18-25G CH11 11M Horizontal

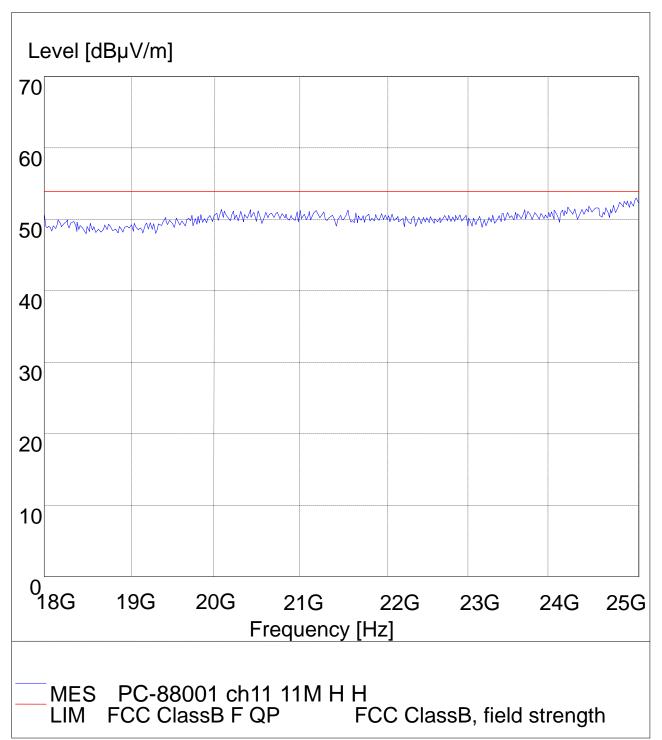


Page 39 of 81

Report No: 0803144 Date: 2008-04-22



18-25G CH11 11M Vertical

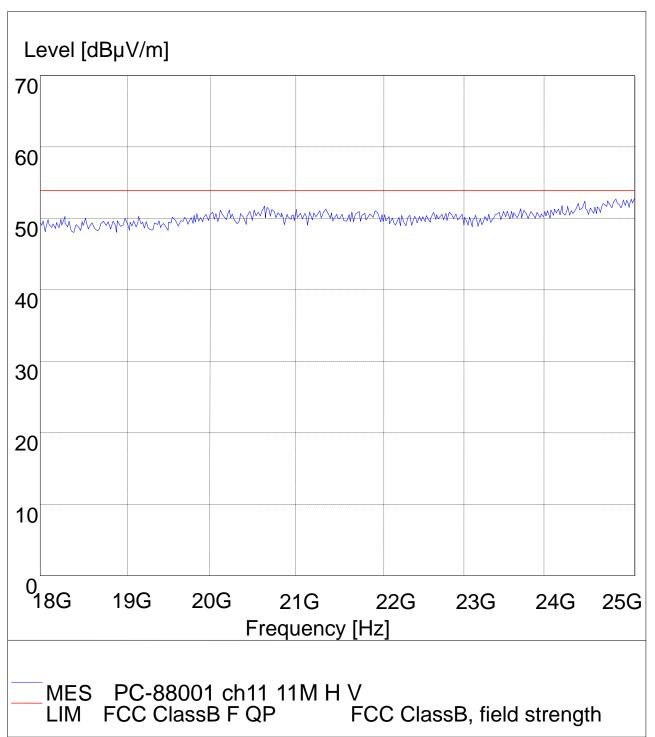


Date: 2008-04-22



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500KHz

7.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator.

The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.4 Test Result

EUT		Notebook		Model		PC-88001		
Mode		802.11b	802.11b		Input Voltage		120V~	
Temperat	ure	24 deg. C,			Humidity		56% RH	
Channel		el Frequency (MHz)	Data Transfer 6 dB Bandwidth Rate (MHz) (Mbps)			Minimum Limit (MHz)		Pass/ Fail
1		2412	1 11		.10		0.5	Pass
6		2437	1 11		.10		0.5	Pass
11		2462	1 11		.10		0.5	Pass


Page 41 of 81

Report No: 0803144 Date: 2008-04-22




Test Figure:

1. Condition: 802.11b at 11Mbps of CH01

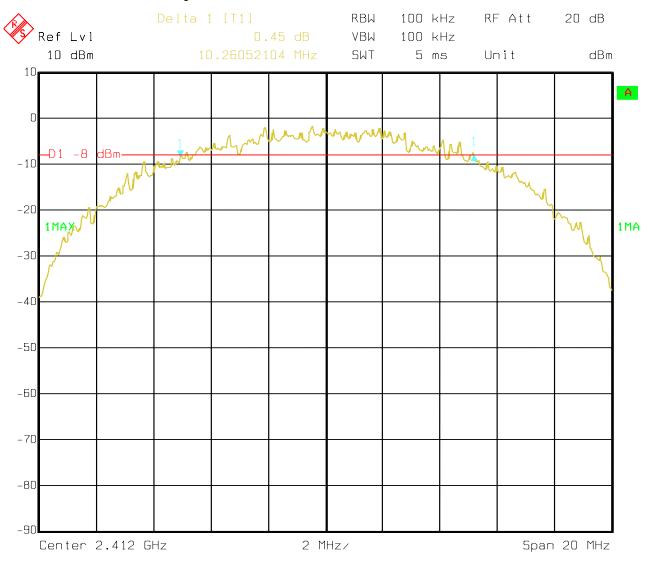

Date: 2008-04-22

2. Condition: 802.11b at 11Mbps of CH06

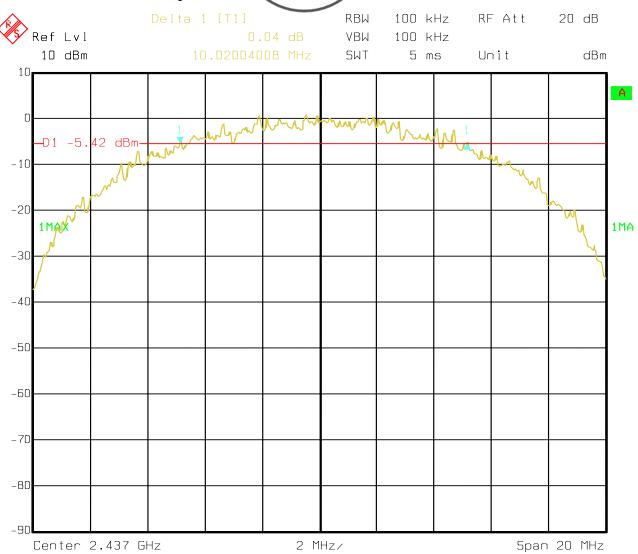


Date: 22.APR.2008 15:51:10

Report No: 0803144 Page 43 of 81

Date: 2008-04-22

TEST REPORT

3. 802.11b at 11Mbps of CH11

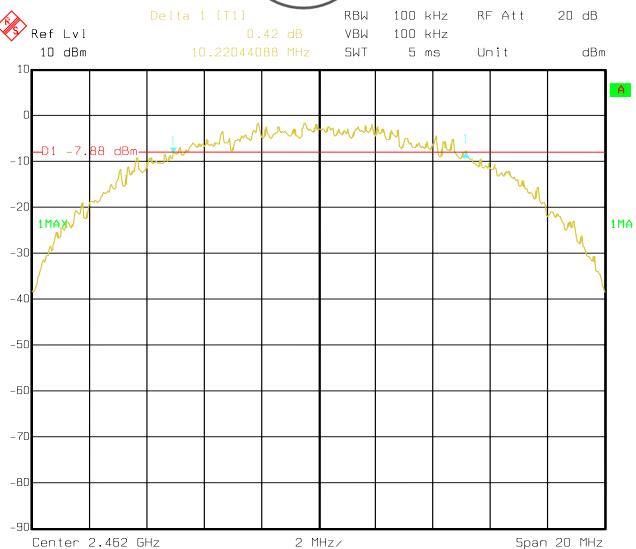


Date: 22.APR.2008 15:49:26

Date: 2008-04-22



4. 802.11b at 1Mbps of CH01

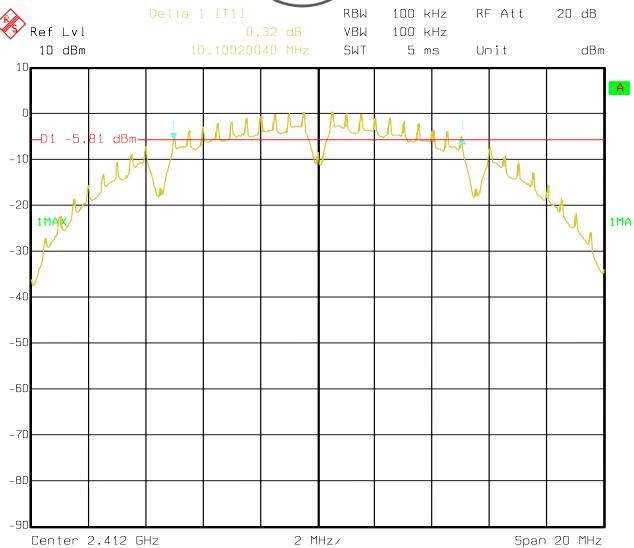


Date: 22.APR.2008 15:43:36

Report No: 0803144 Page 45 of 81

Date: 2008-04-22



5. 802.11b at 1Mbps of CH06

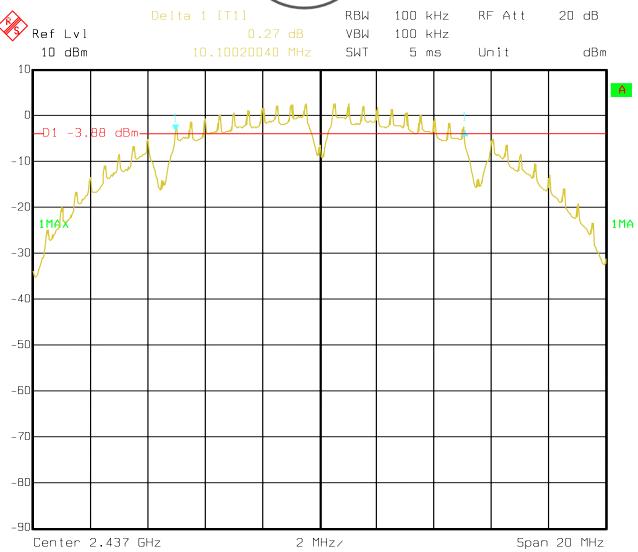


Date: 22.APR.2008 15:45:47

Date: 2008-04-22



6. 802.11b at 1Mbps of CH11

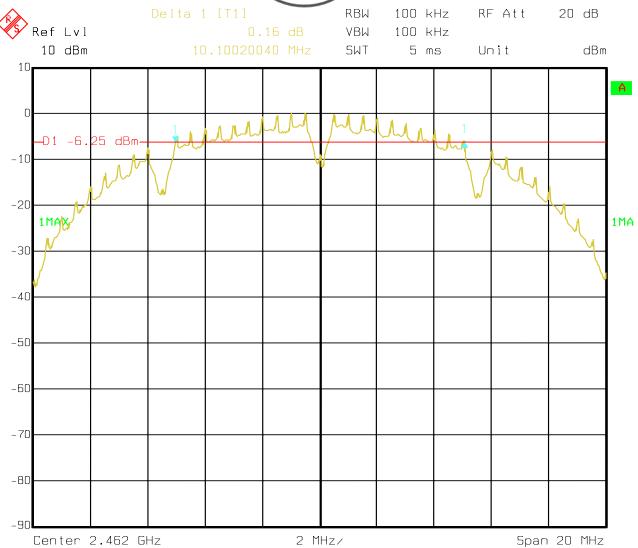

Date: 22.APR.2008 15:47:24

Report No: 0803144 Page 47 of 81

Date: 2008-04-22

					,			
EUT	N		otebook		Model		PC-88001	
Mode		8	302.11g		Input Voltage		120V~	
Temperat	ure	24 deg. C,			Humidity	56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ındwidth Hz)	th Minimum Lir (MHz)		Pass/ Fail
1		2412	6 54		.55		0.5	Pass
6		2437	6 54		.55		0.5	Pass
11		2462	6 54		.63		0.5	Pass


Page 48 of 81

Report No: 0803144 Date: 2008-04-22



Test Plots:

1. 802.11g at 6Mbps of CH01

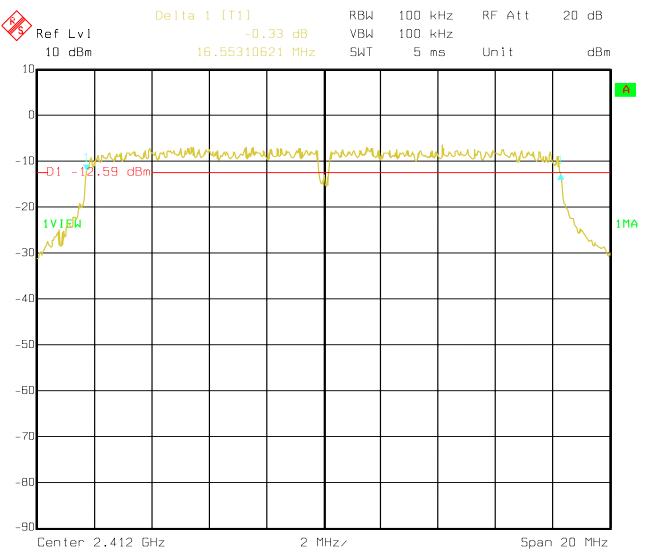


Date: 22.APR.2008 14:56:45

Date: 2008-04-22



2. 802.11g at 6Mbps of CH06

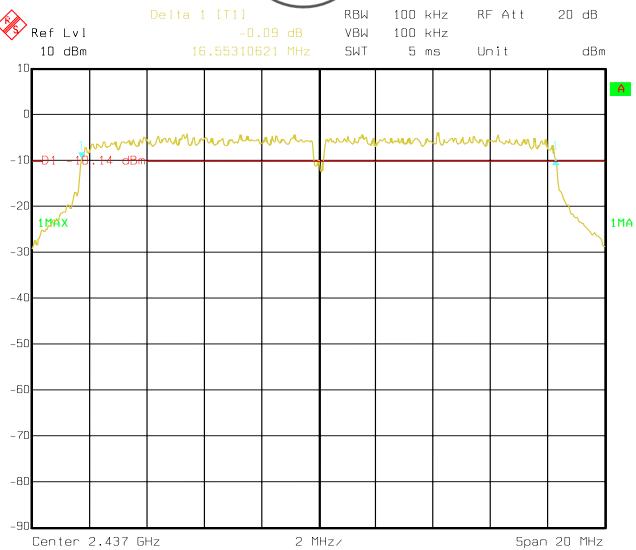


Date: 22.APR.2008 14:59:13

Report No: 0803144 Page 50 of 81

Date: 2008-04-22



3. 802.11g at 6Mbps of CH11

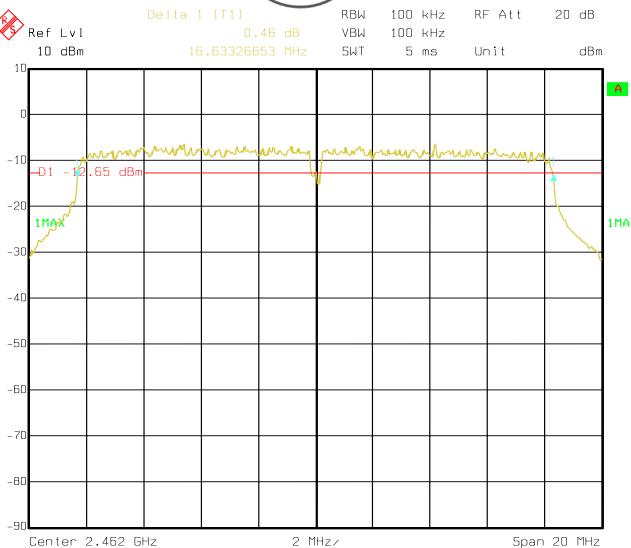


Date: 22.APR.2008 15:07:08

Report No: 0803144 Page 51 of 81

Date: 2008-04-22

4. 802.11g at 54Mbps of CH01

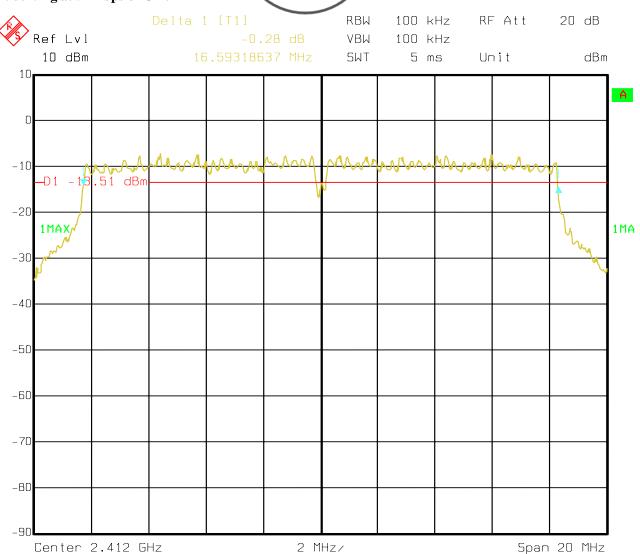


Date: 22.APR.2008 15:13:45

Report No: 0803144 Page 52 of 81

Date: 2008-04-22



5. 802.11g at 54Mbps of CH06

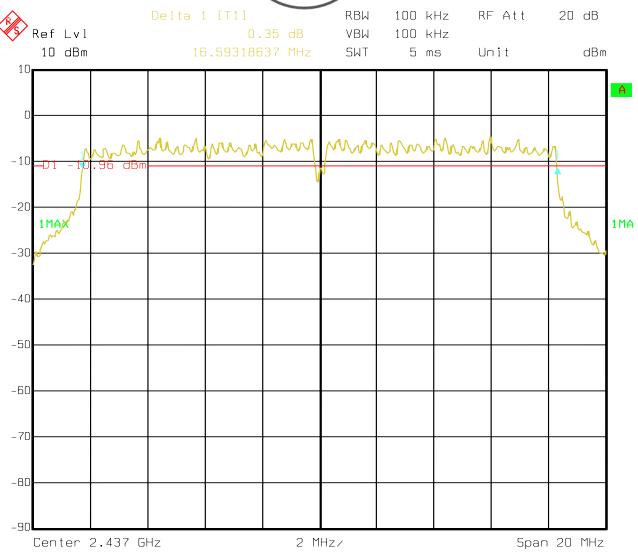


Date: 22.APR.2008 15:12:17

Report No: 0803144 Page 53 of 81

Date: 2008-04-22



6. 802.11g at 54Mbps of CH11

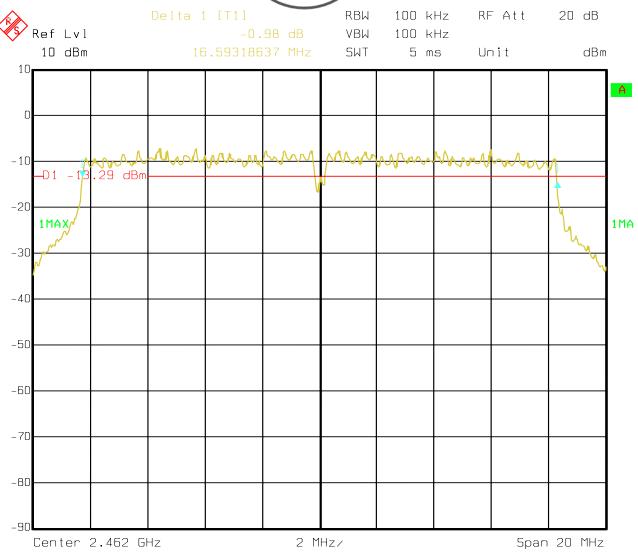

Date: 22.APR.2008 15:10:05

Report No: 0803144


Date: 2008-04-22



Page 54 of 81

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Page 55 of 81

Report No: 0803144 Date: 2008-04-22



8.4Test Results

EUT		Noteb	ook Mo		odel		PC-88001		
Mode	de 802.1		I1b Input		Input Voltage		Input Voltage		20V~
Temperati	mperature 24 deg. C,		Humidity		50	56% RH			
Channel	Ch	annel Frequency (MHz)	Peak Power Output (dBm)		Peak P Lin (dB	nit	Pass/ Fail		
1		2412	13.15		30)	Pass		
6		2437	15.00		30)	Pass		
11		2462	12.33		30)	Pass		

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

EUT		Noteb	ook Mo		odel	PC-88001	
Mode	Mode 802.1		l1g Inpu		Input Voltage		20V~
Temperati	perature 24 deg. C, Humidit		g. C, Hun		C, Humidity		5% RH
Channel	Cha	annel Frequency (MHz)	cy Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2412	12.33		30)	Pass
6		2437	14.29		30)	Pass
11		2462	11.60		30)	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11


2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Report No: 0803144 Page 56 of 81

Date: 2008-04-22

9. Power Spectral Density Measurement 9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 10kHz VBW, set sweep time=100s

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

Page 57 of 81

Report No: 0803144 Date: 2008-04-22



9.4Test Result

EUT		Noteb	ook Me		Iodel		C-88001
Mode	Mode 802.11		Ilb Input		Input Voltage		20V~
Temperat	ure	24 deg. C, Humidi		nidity 56		66% RH	
Channel	Cha	annel Frequency (MHz)	Final RF Po Level in 3kH: (dBm)		Maximum Limit (dBm)		Pass/ Fail
1		2412	-15.03		8		Pass
6		2437	-12.61		8		Pass
11		2462	-11.67		8		Pass

Note: For 802.11b mode at finial test to get the worst-case emission at 11Mbps for CH11, CH06 and CH01


EUT		Noteb	ook Mo		odel Po		C-88001	
Mode	Mode 802.1		1g	Input Voltage		1	20V~	
Temperati	perature 24 deg. C, Humid		nidity		5% RH			
Channel	Ch	annel Frequency (MHz)	Final RF Power Level in 3kHz BW (dBm)		Maximui (dB		Pass/ Fail	
1		2412	-20.86		8		Pass	
6		2437	-19.51		8		Pass	
11		2462	-18.82		8		Pass	

Note: For 802.11g mode at finial test to get the worst-case emission at 6Mbps for CH11, CH06 and CH01

Date: 2008-04-22

9.5Photo of Power Spectral Density Measurement


1.802.11g at 6Mbps of CH01

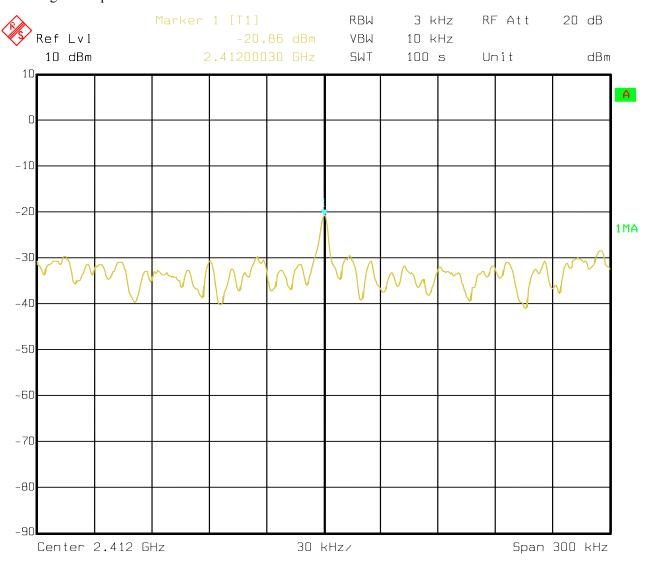

Date: 02.APR.2008 11:54:31




2. 802.11g at 6Mbps at CH06

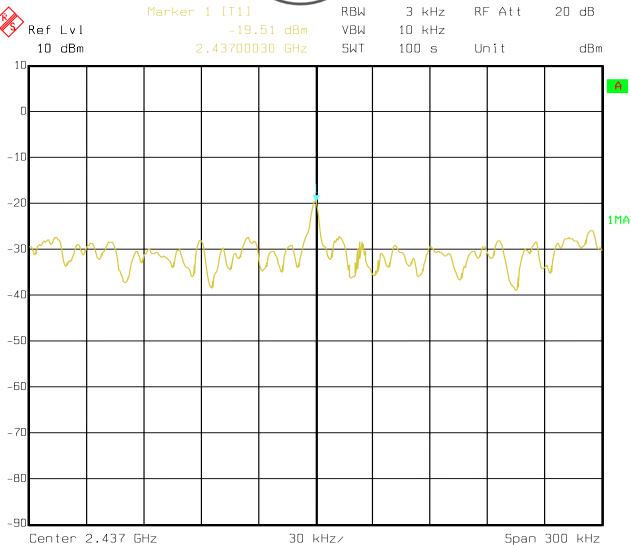

Date: 02.APR.2008 11:44:43




3. 802.11g at 6Mbps of CH11

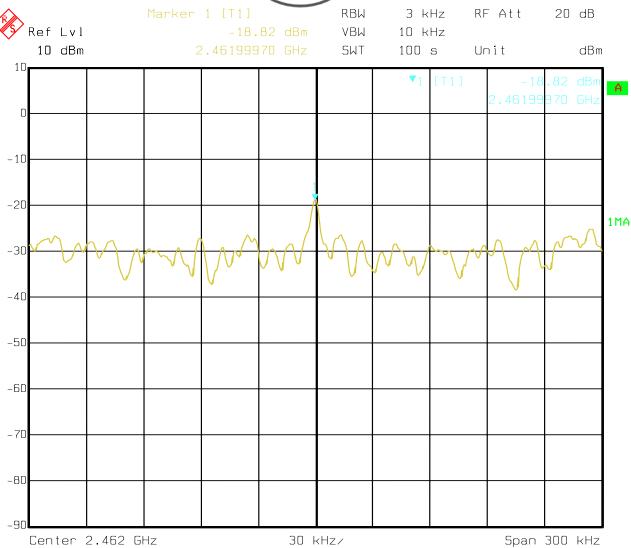

Date: 31.MAR.2008 19:02:12



4. 802.11b at 11Mbps of CH01

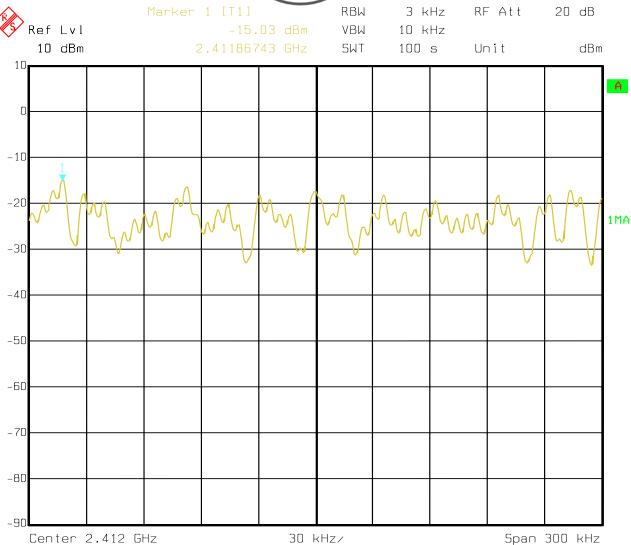


Date: 02.APR.2008 12:14:10

Page 62 of 81

Report No: 0803144 Date: 2008-04-22




5. 802.11b at 11Mbps of CH06

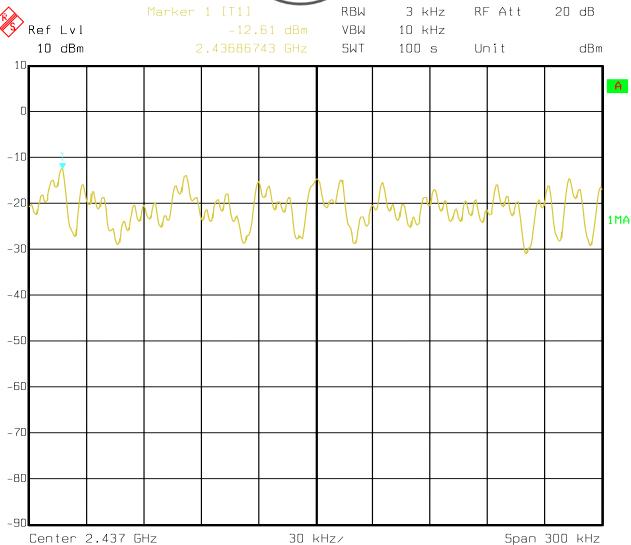

Date: 02.APR.2008 11:42:49



6. 802.11b at 11Mbps of CH11

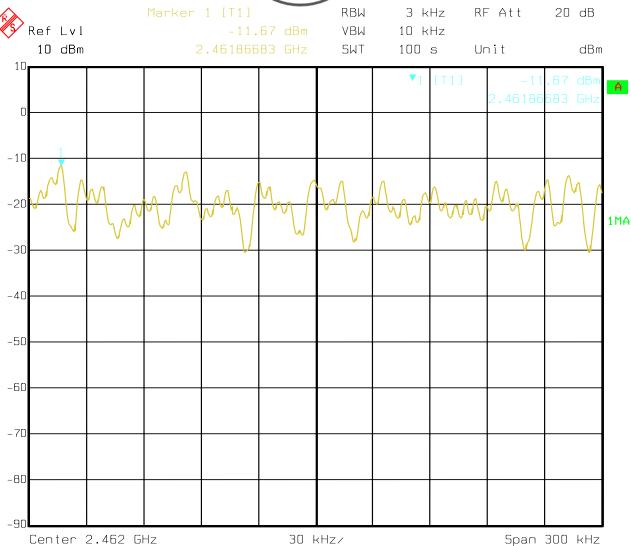

Date: 31.MAR.2008 19:06:40


Page 64 of 81

Date: 2008-04-22

Report No: 0803144



10 Out of Band Measurement 10.1 Test Setup



10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

10.4Test Result




For 802.11b mode

CH01 at 11Mbps

10.4 Out of Band Test Result

Product:	Notel	oook	Test Mode:	CH1
Mode	Keeping Tra	ansmitting	Input Voltage	120V~
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pas	SS	Detector	PK
The Max. FS in	PK (dBµV/m)	46.9(H)/42.6(V)	Limit	$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$	40.2(H)/33.2(V)	Lillit	54(dBμV/m)

Test Figure:

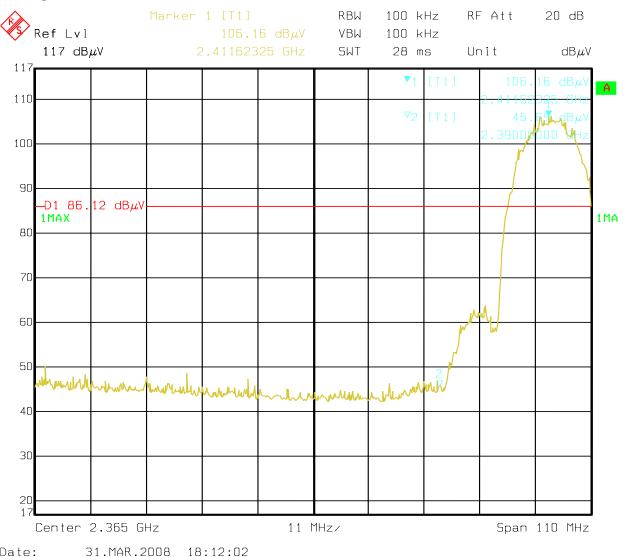

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 66 of 81

Report No: 0803144 Date: 2008-04-22




CH11 at 11Mbps

10.4 Out of Band Test Result

Product:	Notel	oook	Test Mode:	CH11
Mode	Keeping Tra	ansmitting	Input Voltage	120V~
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	47.5(H)/47.6(V)	Limit	$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$	34.1(H)/34.0(V)	Lillit	$54(dB\mu V/m)$

Test Figure:

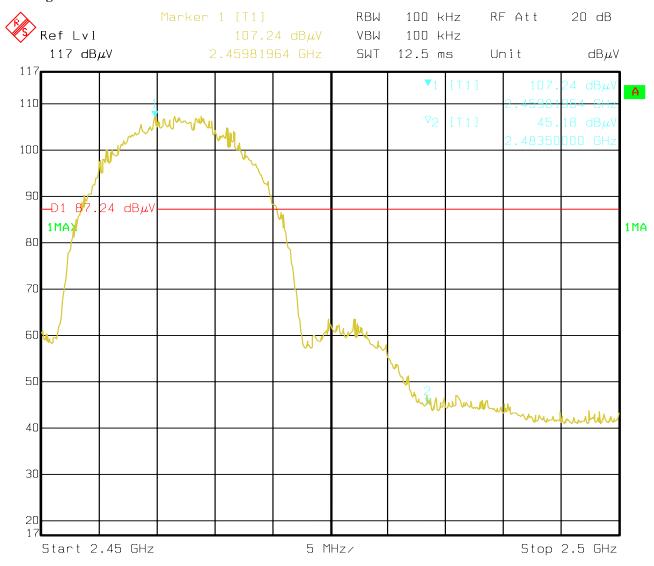

Date: 31.MAR.2008 18:15:39

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 67 of 81

Report No: 0803144 Date: 2008-04-22




For 802.11g mode CH01 at 6Mbps

10.4 Out of Band Test Result

Product:	Notel	oook	Test Mode:	CH1
Mode	Keeping Tra	ansmitting	Input Voltage	120V~
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pas	Pass		PK
The Max. FS in	PK (dBμV/m)	45.2(H)/32.3(V)	Limit	74(dBμV/m)
Restrict Band	AV(dBμV/m)	50.3(H)/39.2(V)	Limit	54(dBμV/m)

Test Figure:

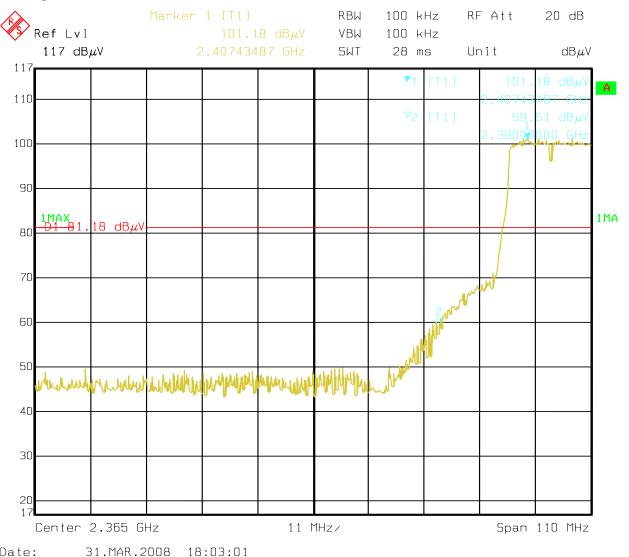

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 68 of 81

Report No: 0803144 Date: 2008-04-22




CH11 at 6Mbps

10.4 Out of Band Test Result

Product:	Notel	oook	Test Mode:	CH11
Mode	Keeping Tr	ansmitting	Input Voltage	120V~
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	48.9(H)/47.8(V)	Limit	$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$	34.1(H)/34.1(V)	Lillit	$54(dB\mu V/m)$

Test Figure:

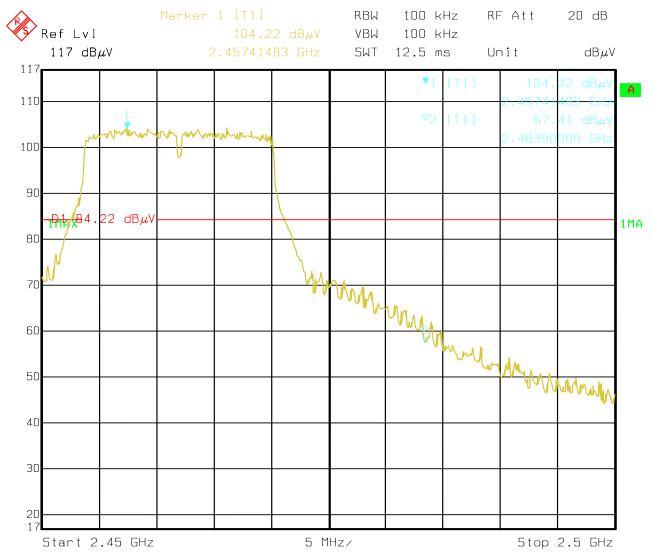

Date: 31.MAR.2008 18:55:40

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 0803144 Page 69 of 81

Date: 2008-04-22



11.0 Antenna Requirement 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

There are two antennas used in the device. An RF cable connected the IPX connector with the antenna board. The maximum Gain of both antennas is 1.4125dBi.

Report No: 0803144 Page 70 of 81

Date: 2008-04-22



12.0 Maximum Permissible Exposure

Applicable Standard

According to §1.1307(b)(5), systems operating under the provisions of this section shall be oper-ated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline. This is a Portable device.

According to §1.1310 and §2.1093 RF exposure is calculated.

Measurement Result

This is a portable device and the Max peak output power is 15.00 dBm (31.623 mW), so the EIRP is 31.623 * 1.4125 = 44.6675 mW which is lower than low threshold 120 / fGHz mW (50.6329 mW), $d \ge 2.5 \text{cm}$ in general population category;

The SAR measurement is not necessary.

Report No: 0803144 Page 71 of 81

Date: 2008-04-22



13.0 FCC ID Label

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:




Page 72 of 81

Report No: 0803144 Date: 2008-04-22



14.0 Photo of testing

14.1 Conducted test View--

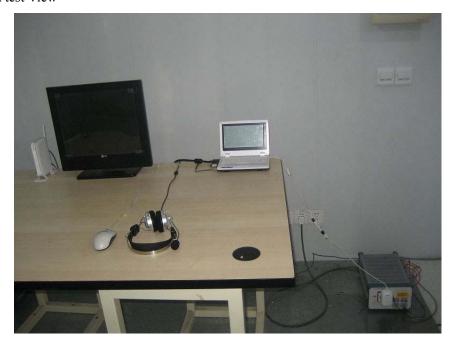

14.2 Emission Radiated test View--



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to



14.3 Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to



14.4 Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 75 of 81

Report No: 0803144 Date: 2008-04-22







Page 76 of 81

Report No: 0803144 Date: 2008-04-22





Page 77 of 81

Report No: 0803144 Date: 2008-04-22








The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to





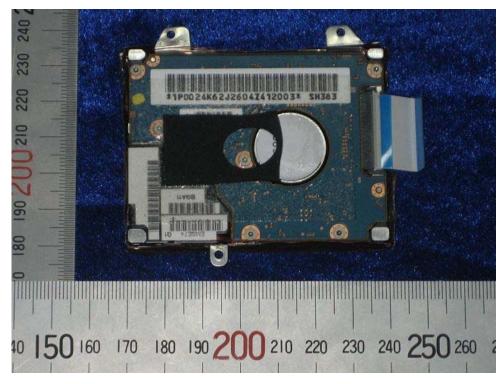

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to







Page 80 of 81

Report No: 0803144 Date: 2008-04-22



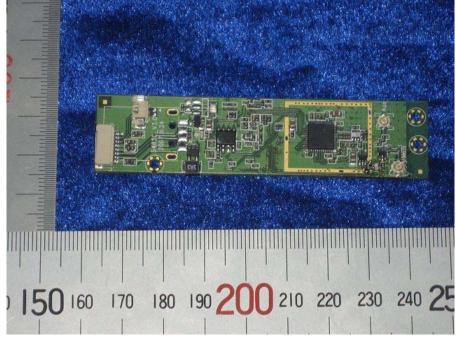

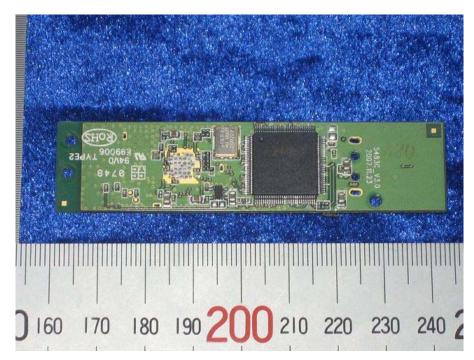

Page 81 of 81

Report No: 0803144 Date: 2008-04-22







End of the report