



Product Service

RF - TEST REPORT

Report Number : **68/850.9.008.01** Date of Issue: 6 March 2009

Model : **PC-81007**

Product Type : Notebook Computer

Applicant : Wanlida Group Co., Ltd.

Address : No. 618 Jiahe Road, Wanlida Industry Zone,
Xiamen Fujian, China 361006

Production Facility : Wanlida Group Co., Ltd.

Address : Wanlida Industry Zone, Nanjing, Fujian, China 363601

Test Result : ☒ **Positive** ☐ **Negative**

Total pages including
Appendices : 45

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

Jiangsu TÜV Product Service Ltd. – Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. Jiangsu TÜV Product Service Ltd. – Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from Jiangsu TÜV Product Service Ltd. – Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory.....	3
3	Description of the Equipment Under Test.....	4
4	Summary of Test Standards.....	5
5	Summary of Test Results.....	6
6	General Remarks.....	7
7	Technical Requirements.....	8
7.1	Conducted Emission AC Power Port.....	8
7.2	Conducted Peak Power.....	12
7.3	Band edge compliance of RF emission.....	14
7.4	Spurious RF Conducted emission.....	22
7.5	Spurious radiated emissions.....	27
7.6	6dB bandwidth.....	33
7.7	Power spectral density.....	39
8	System Measurement Uncertainty.....	45

2 Details about the Test Laboratory

Details about the Test Laboratory

Company name: Jiangsu TÜV Product Service Ltd. – Shenzhen Branch
6th Floor, H Hall,
Century Craftwork Culture Square,
No. 4001, Fuqiang Road,
Futian District 518048,
Shenzhen, P.R.C.

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

Company name: China Shenzhen Academy of Metrology and Quality Inspection,
Metrology and Quality Inspection building,
Central Section of LongZhu Road,
Nan Shan,
Shenzhen,

Telephone: 86 755 2694 1599
Fax: 86 755 2694 1545

3 Description of the Equipment Under Test

Description of the Equipment Under Test

Product: Notebook Computer

Model no.: PC-81007

Serial number: NIL

Options and accessories: NIL

Rating: DC 12V 3A, 36W
AC Adaptor:
Model: MPA-12030
Input: 100-240V ~ 50/60Hz 0.65A MAX
Output: +12V DC 3A

Antenna: Two integral antennas inside enclosure of EUT, NOT accessible by end user. Also both antennas can't transmit in the same time.
Antenna Gain: 1.5dBi

RF Transmission
Frequency: 2412-2462MHz

Description of the EUT: NIL

Auxiliary Equipment and Cable Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	S/N(LENGTH)
LCD monitor	Lenovo	9227-AE1	V1TDB38
Keyboard	Lenovo	SK-8825 (L)	02553778
Mouse	Lenovo	MO28UOL	4418011108
Headphone	Ouyun	OH601	----
USB flash drive	Kingston	Data Traveller	----
SD card	Kingston	SD4/4GBFE	----
VGA cable	Lenovo	Shield	140cm
AC Power cable	Lenovo	Unshield	180cm



Product Service

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

5 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition	Pages	Test Result		
		Pass	Fail	N/A
15.207 Conducted Emission AC Power Port	8	☒	☐	☐
15.247 (b) (1) Conducted peak output power	12	☒	☐	☐
15.247(d) Band edge compliance of RF emissions	14	☒	☐	☐
15.247(d) Spurious RF conducted emissions	22	☒	☐	☐
15.247(d) 15.209 Spurious radiated emissions	27	☒	☐	☐
15.247(a)(2) 6dB bandwidth	33	☒	☐	☐
15.247(e) Power spectral density	39	☒	☐	☐

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: SMFPC81007 filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: Jan 25 2009

Testing Start Date: Feb 12 2009

Testing End Date: Feb 27 2009

- TÜV SÜD CHINA, SHENZHEN BRANCH -

Reviewed by:

Prepared by:



Paul Yu
EMC Project Manager



Ken Li
EMC Test Engineer

7 Technical Requirement

7.1 Conducted Emission

Test Method

- 1 The EUT was placed on a table, which is 0.8m above ground plane
- 2 The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
- 3 Maximum procedure was performed to ensure EUT compliance
- 4 A EMI test receiver (R&S Test Receiver ESCS30) is used to test the emissions from both sides of AC line

Limit


Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

Conducted Disturbance

EUT: MNP-C81007
Op Cond: WiFi Running
Test Spec: L
Comment: AC 120V/50Hz

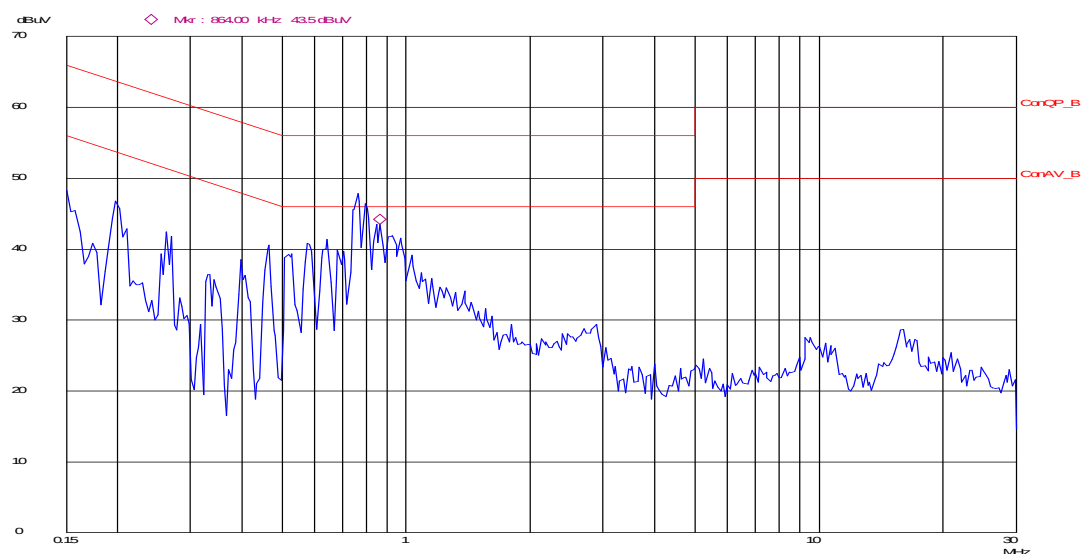

Frequency MHz	Cable Loss dB	Reading dBμV	QP Test result dBμV	QP Limit dBμV	Margin dB
0.150	9.8	28.9	38.7	66.0	27.3
0.193	9.8	35.3	45.1	63.9	18.8
0.262	9.8	30.4	40.2	61.4	21.2
0.466	9.8	26.7	36.5	56.6	20.1
0.764	9.9	33.3	43.2	56.0	12.8
0.864	9.9	31.1	41.0	56.0	15.0


Frequency MHz	Cable Loss dB	Reading dBμV	AV Test result dBμV	AV Limit dBμV	Margin dB
0.150	9.8	10.3	20.1	56.0	35.9
0.193	9.8	20.4	30.2	53.9	23.7
0.262	9.8	11.8	21.6	51.4	29.8
0.466	9.8	18.0	27.8	46.6	18.8
0.764	9.9	20.7	30.6	46.0	15.4
0.864	9.9	23.6	33.5	46.0	12.5

Remark: Test Result= Reading + Cable Loss

Conducted Emission

Conducted Disturbance

EUT: MN-PC-81007
Op Cond: WiFi Running
Test Spec: N
Comment: AC 120V/50-Hz

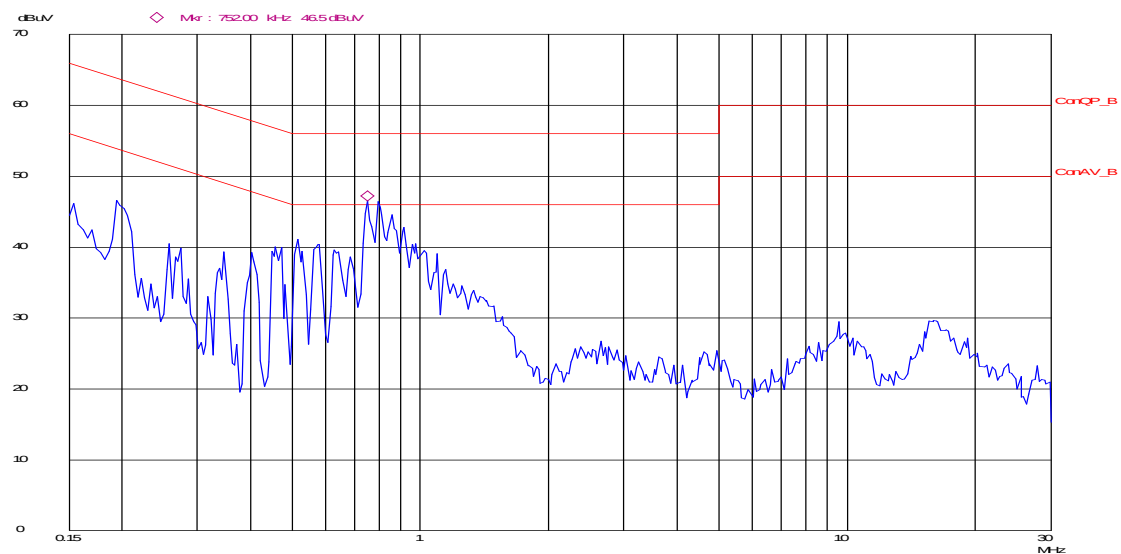

Frequency MHz	Cable Loss dB	Reading dBμV	QP Test result dBμV	QP Limit dBμV	Margin dB
0.154	9.8	28.5	38.3	65.8	27.5
0.194	9.8	35.0	44.8	63.9	19.1
0.346	9.8	25.0	34.8	59.1	24.3
0.402	9.8	26.1	35.9	57.8	21.9
0.516	9.9	28.8	38.7	56.0	17.3
0.752	9.9	34.3	44.2	56.0	11.8

Frequency MHz	Cable Loss dB	Reading dBμV	AV Test result dBμV	AV Limit dBμV	Margin dB
0.154	9.8	5.8	15.6	55.8	40.2
0.194	9.8	18.6	28.4	53.9	25.5
0.346	9.8	20.4	30.2	49.1	18.9
0.402	9.8	21.5	31.3	47.8	15.7
0.516	9.9	23.4	33.3	46.0	12.7
0.752	9.9	26.9	36.8	46.0	9.2

Remark: Test Result= Reading + Cable Loss

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Dec 23 2009
AMN	Rohde & Schwarz	ESH3-Z5	100229	Dec 23 2009
AMN	Rohde & Schwarz	ENV216	100042	Dec 23 2009

7.2 Conducted peak output power

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Limits for conducted peak output power measurements

Frequency Range MHz	Limit W	Limit dBm
2400-2483	≤1	≤30

Conducted peak output power

DSSS mode QPSK modulation 11Mbps data rate Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
CH1 2412MHz	17.55	Pass
CH2 2442MHz	17.80	Pass
CH3 2462MHz	18.26	Pass

OFDM mode BPSK modulation 6Mbps data rate Test Result

Frequency MHz	Conducted Peak Output Power dBm	Result
CH1 2412MHz	17.20	Pass
CH2 2442MHz	17.06	Pass
CH3 2462MHz	17.40	Pass



Product Service

Test Equipment

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESPI3	100244	Dec 23 2009

7.3 Band edge compliance of RF emissions

Test Method

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW and VBW to 1MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength.

The conducted RF band edge was measured by using a spectrum analyzer. Set span wide enough to capture the highest in-band emission and the emission at the band edge. Set RBW and VBW to 100kHz, to measure the conducted peak band edge.

Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Frequency MHz	Limit Average dBuV/m	Limit Peak dBuV/m
Below 2390 Above 2483.5	54	74


Band edge compliance of RF emissions

DSSS mode QPSK modulation 11Mbps data rate Test Result

Maximum Carrier Field strength

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2412.000	5.6	28.5	71.0	105.1	Horizontal	---	PK	---
2412.000	5.6	28.5	61.8	95.9	Horizontal	---	AV	---
2462.000	5.6	28.5	72.8	106.9	Horizontal	---	PK	---
2462.000	5.6	28.5	64.2	98.3	Horizontal	---	AV	---


Lower Edge PK plot

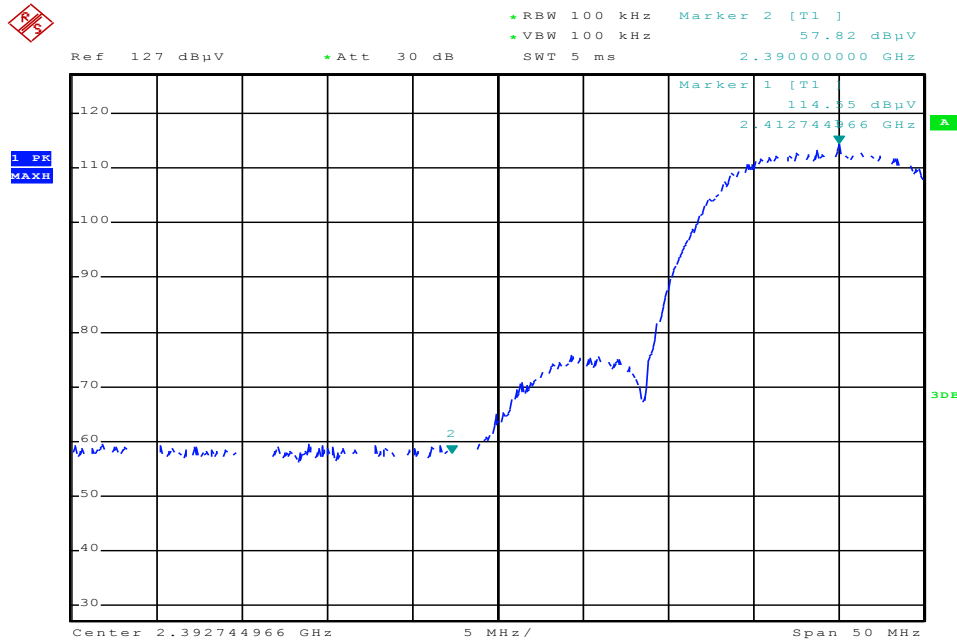

Date: 17.FEB.2009 01:17:16

Max carrier field strength PK 105.1dBuV/m, AV 95.9dBuV/m
 At 2.390GHz, the deviation of PK plot is 56.73dB
 The field strength at 2.390GHz PK 48.37dBuV/m
 Which fulfill the requirement of PK 74dBuV/m, AV 54dBuV/m.
 PK plot shows compliance with the AV limit, AV plot is omitted.

Upper Edge PK plot

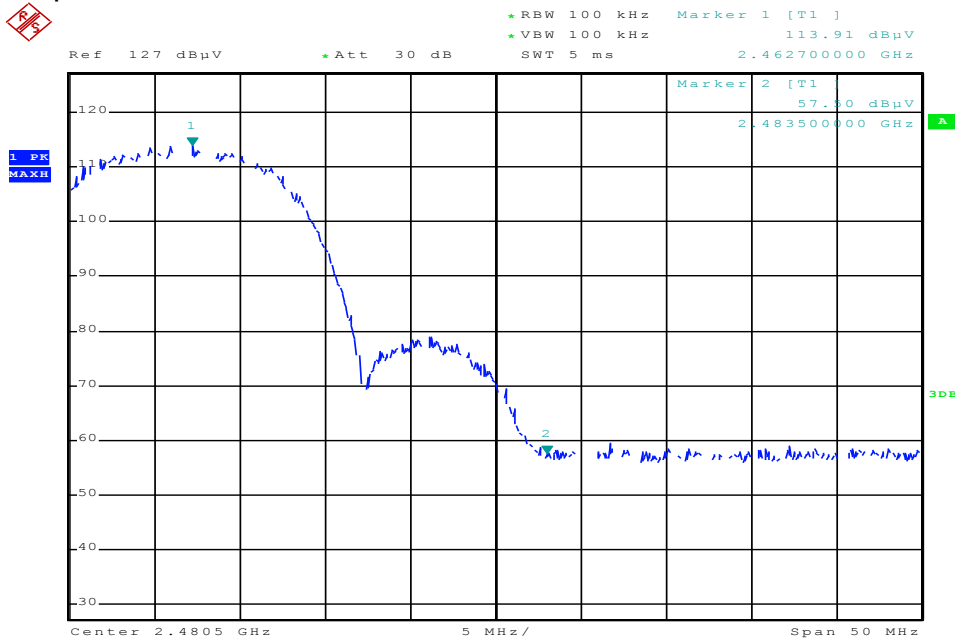

Date: 17.FEB.2009 01:23:32

Max carrier field strength PK 106.9dBuV/m, AV 98.3dBuV/m
 At 2.4835GHz, the deviation of PK plot is 56.41dB
 The field strength at 2.4835GHz PK 50.49dBuV/m
 Which fulfill the requirement of PK 74dBuV/m, AV 54dBuV/m.
 PK plot shows compliance with the AV limit, AV plot is omitted.


Band edge compliance of RF emissions

OFDM mode BPSK modulation 6Mbps data rate Test Result

Maximum Carrier Field strength Carrier Field strength


Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2412.000	5.6	28.5	71.0	105.1	Horizontal	---	PK	---
2412.000	5.6	28.5	63.4	97.5	Horizontal	---	AV	---
2462.000	5.6	28.5	35.7	105.2	Horizontal	---	PK	---
2462.000	5.6	28.5	61.0	95.1	Horizontal	---	AV	---

Lower Edge PK Plot

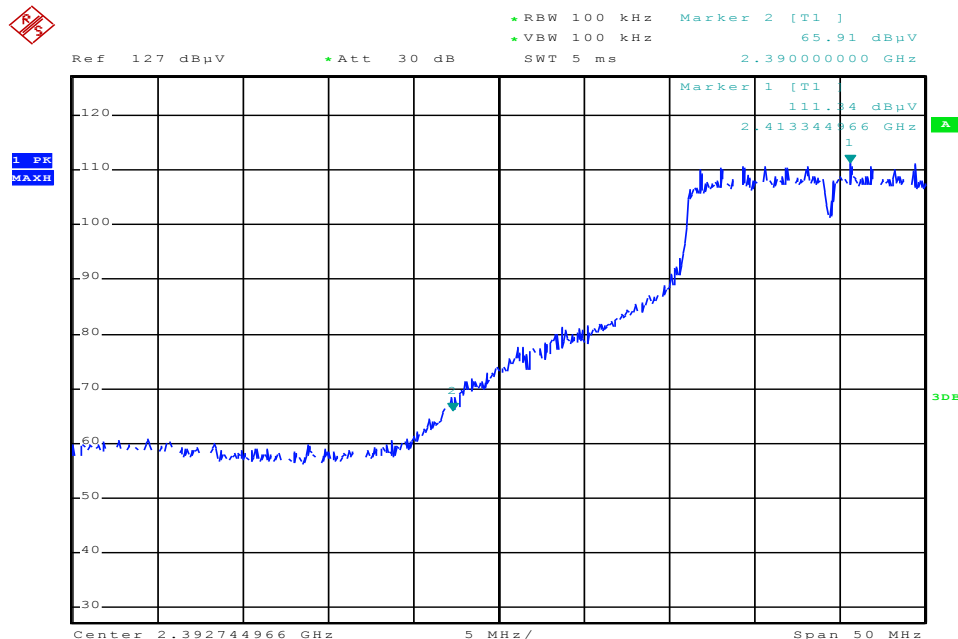

Date: 17.FEB.2009 01:18:48


AV Plot

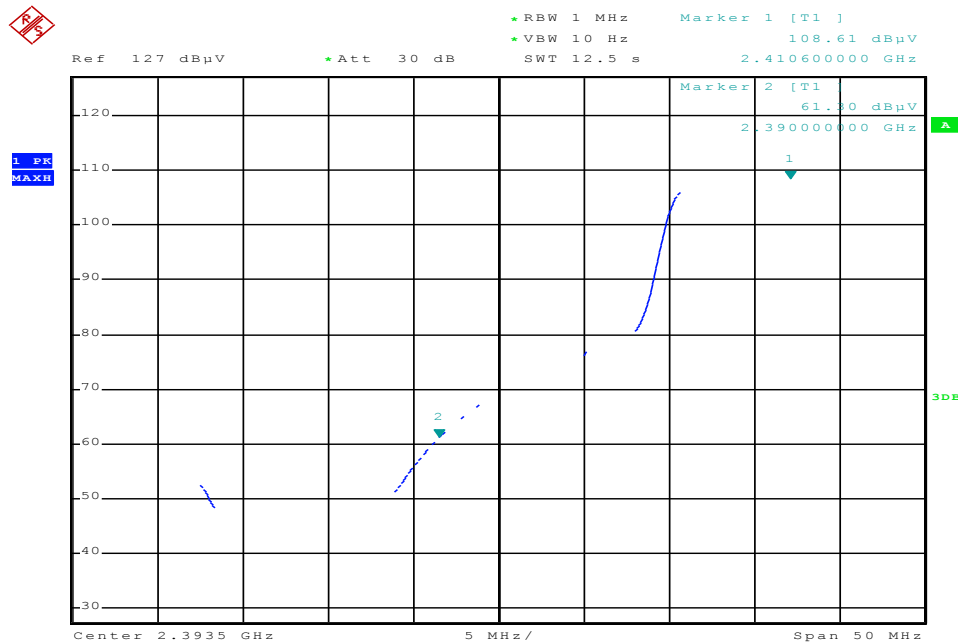

Date: 17.FEB.2009 01:27:57


Max carrier field strength PK 105.1dBuV/m, AV 97.5dBuV/m
At 2.390GHz, the deviation of PK plot is 45.43dB, AV plot is 47.31dB
The field strength at 2.390GHz PK 59.67dBuV/m, AV 50.19dBuV/m
Which fulfill the requirement of PK 74dBuV/m and AV 54dBuV/m

Upper Edge PK Plot

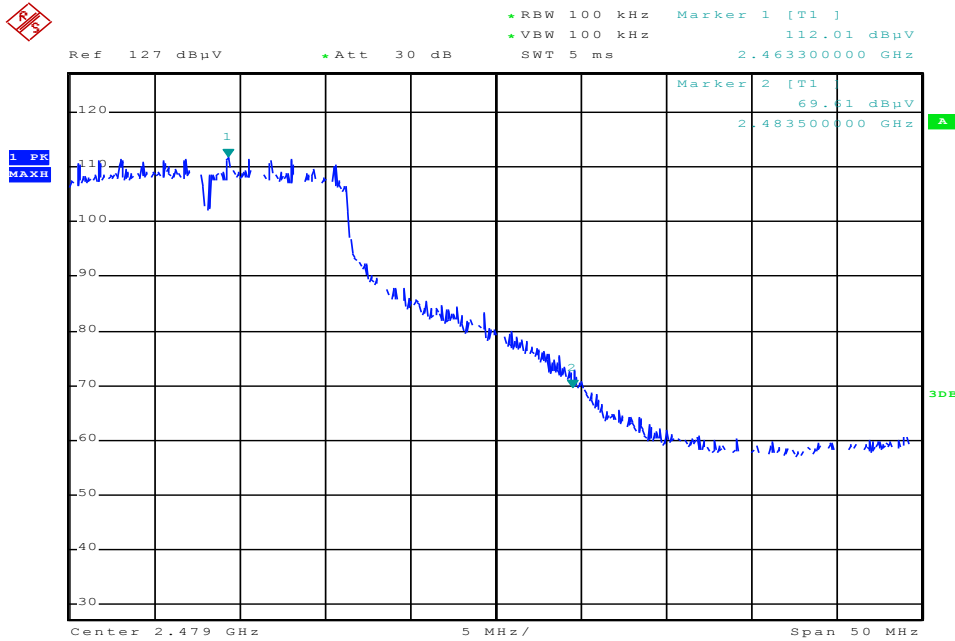

Date: 17.FEB.2009 01:21:41

AV Plot

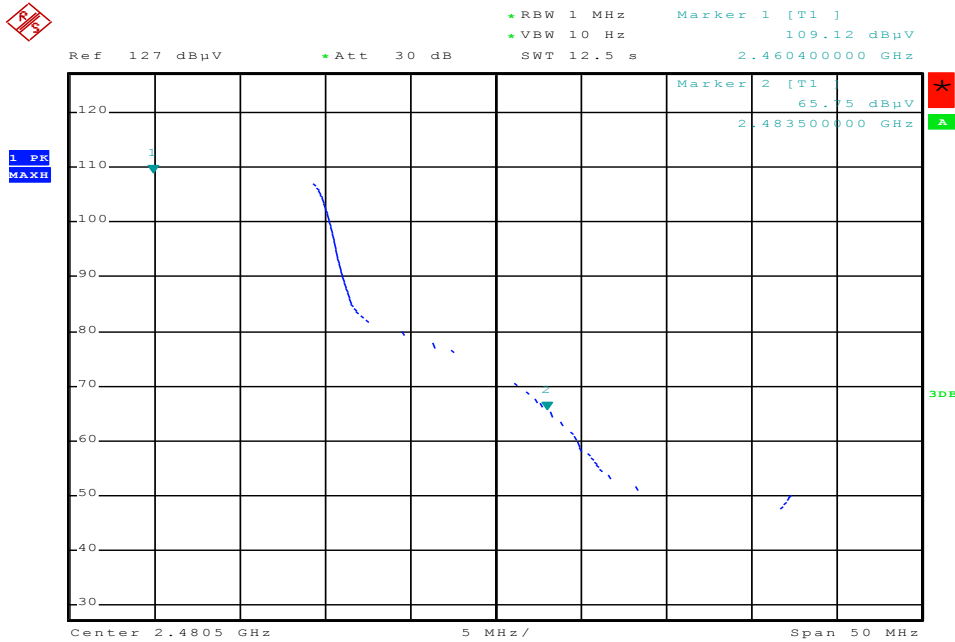

Date: 17.FEB.2009 01:25:49

Max carrier field strength PK 105.2dBuV/m, AV 95.1dBuV/m
 At 2.4835GHz, the deviation of PK plot is 42.4dB, AV plot is 43.37dB
 The field strength at 2.4835GHz PK 62.8dBuV/m, AV 51.73dBuV/m
 Which fulfill the requirement of PK 74dBuV/m and AV 54dBuV/m



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESPI3	100244	Dec 23 2009

7.4 Spurious RF conducted emissions

Test Method

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The resolution bandwidth(RBW) and the video bandwidth (VBW) of the spectrum analyzer were respectively set to 100kHz and 100kHz.


Limit

Frequency Range MHz	Limit (dBc)
1000-25000	-20


Spurious RF conducted emissions

DSSS mode QPSK modulation 11Mbps data rate Test Result

2412MHz

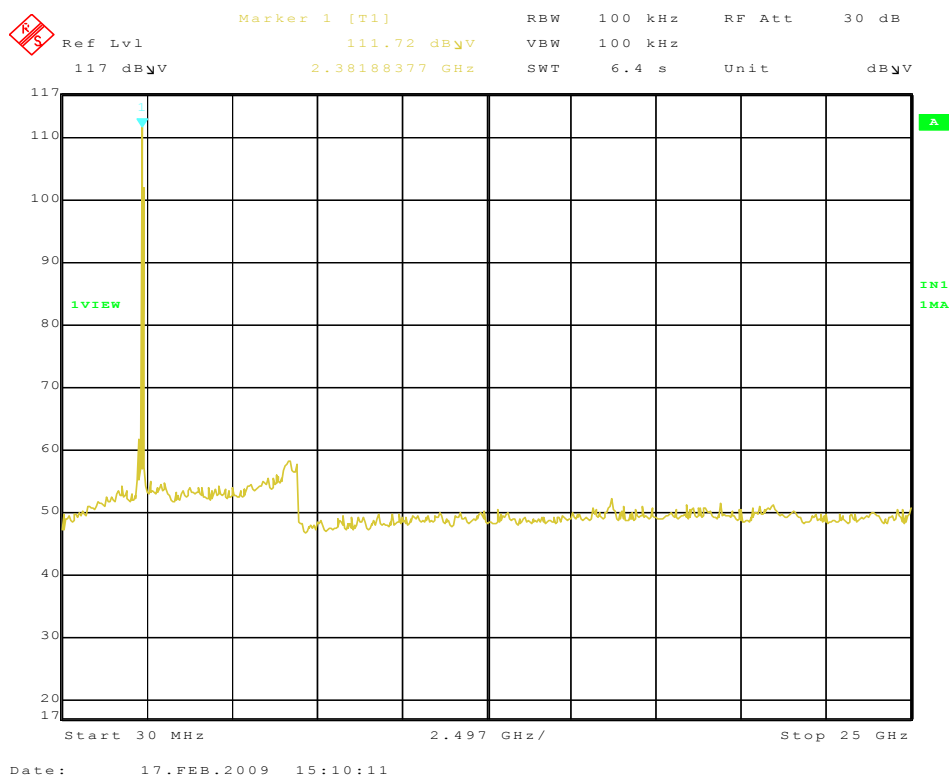


2442MHz

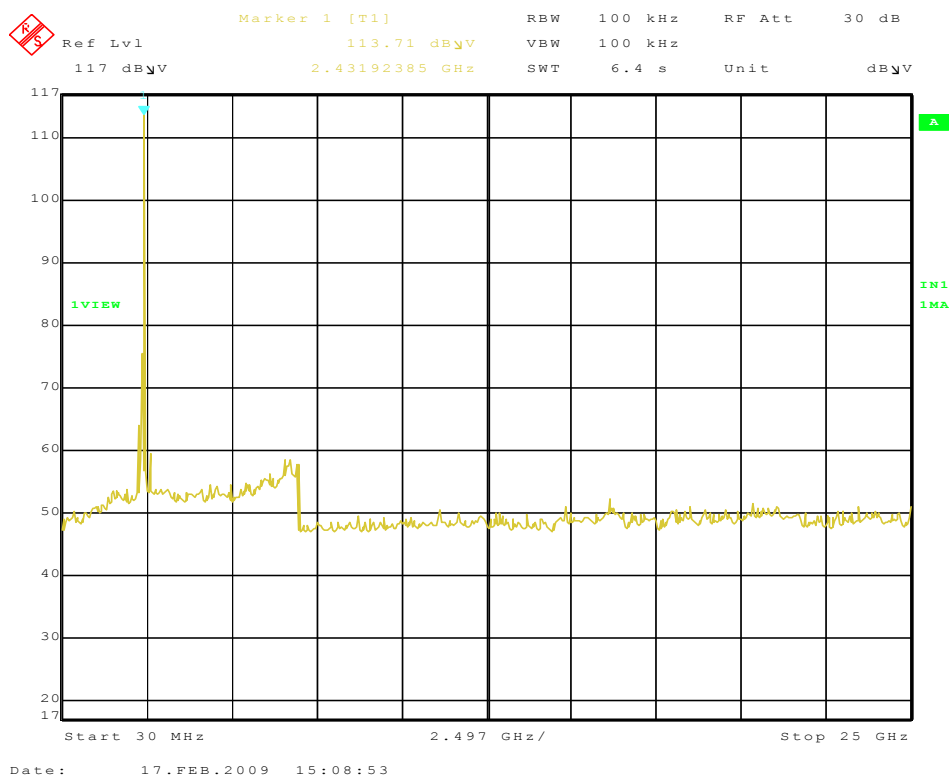

Spurious RF conducted emissions


2462MHz

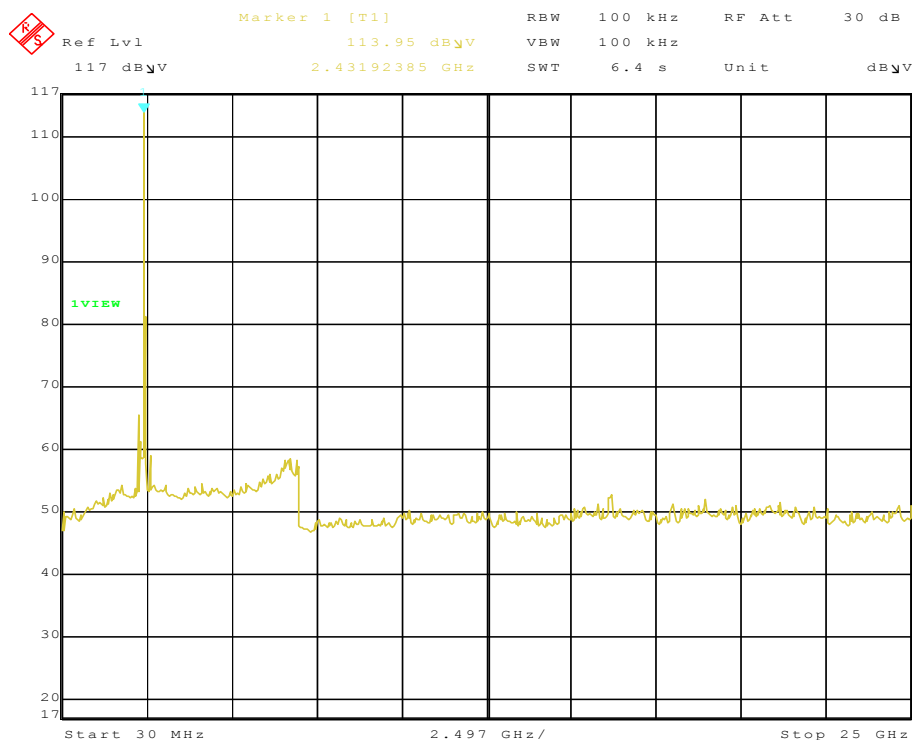

Date: 17.FEB.2009 15:06:51

OFDM mode BPSK modulation 6Mbps data rate Test Result


2412MHz

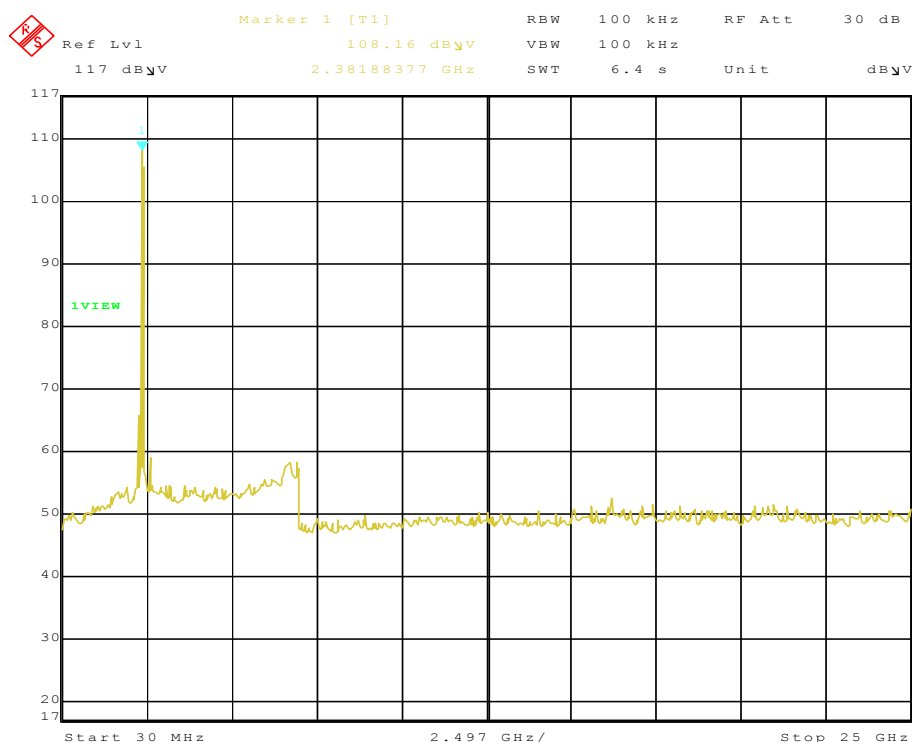

Date: 17.FEB.2009 15:11:09


Spurious RF conducted emissions

2442MHz

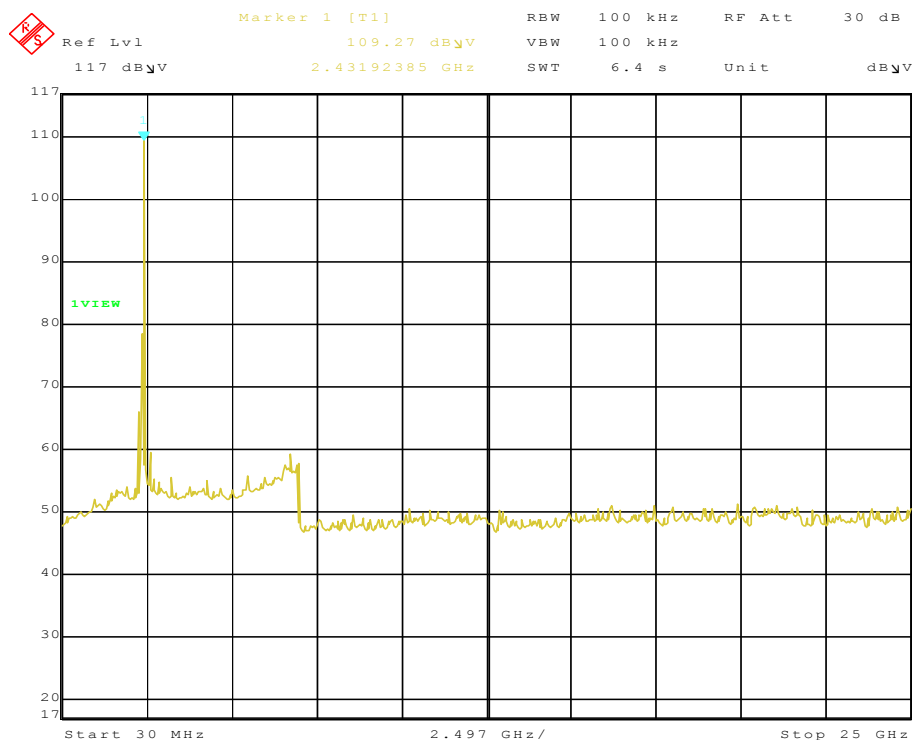

Date: 17.FEB.2009 15:09:28

2462MHz

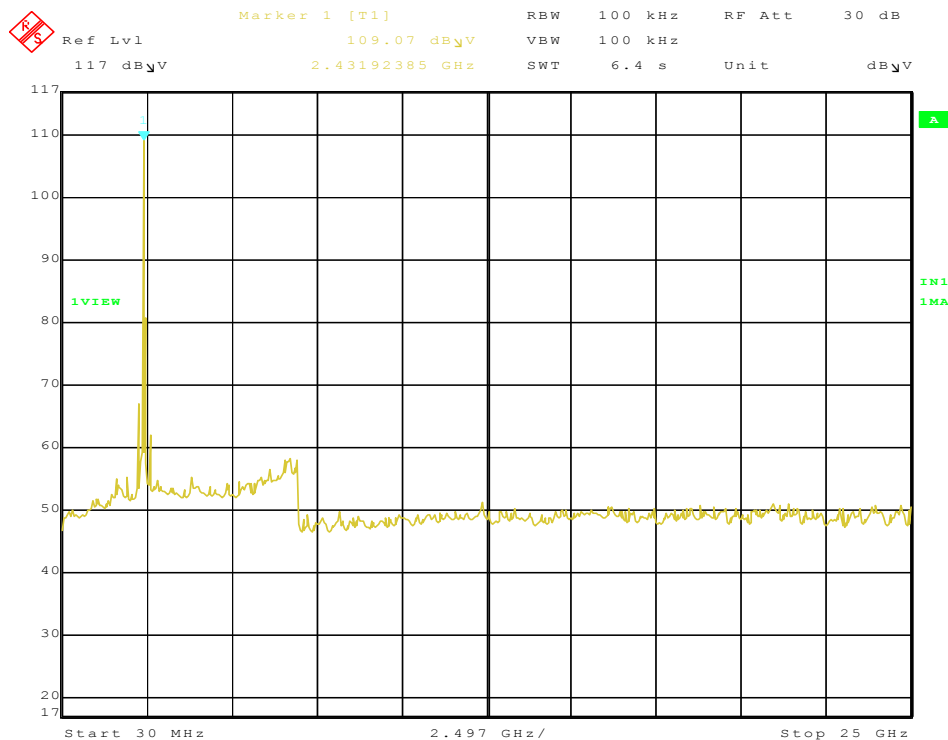

Date: 17.FEB.2009 15:08:17



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESi26	838786/013	Dec 23 2009

7.5 Spurious radiated emissions

Test Method

- 1 The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2 The turntable shall be rotated for 360 degrees to determine the position of maximum emission level
- 3 EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4 Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5 Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Limit

Frequency MHz	Field Strength uV/m	Field Strength dBμV/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Radiated Emission

DSSS mode QPSK modulation 11Mbps data rate CH1 2412MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
266.664	2.8	13.2	22.9	38.9	Horizontal	46.0	QP	Pass
750.008	4.6	20.2	15.1	39.9	Horizontal	46.0	QP	Pass
375.002	3.2	15.9	16.8	35.9	Vertical	46.0	QP	Pass
533.330	3.8	18.4	16.7	38.9	Vertical	46.0	QP	Pass
2288.002	5.5	28.5	15.5	49.5	Horizontal	74	PK	Pass
2288.002	5.5	28.5	11.4	45.4	Horizontal	54	AV	Pass
2640.004	5.9	29.9	12.0	47.8	Horizontal	74	PK	Pass
2640.004	5.9	29.9	8.6	44.4	Horizontal	54	AV	Pass
4824.865	4.2	33.3	11.8	49.3	Horizontal	74	PK	Pass
4824.865	4.2	33.3	10.2	47.7	Horizontal	54	AV	Pass
7236.334	5.2	36.4	8.3	49.9	Horizontal	74	PK	Pass
7236.334	5.2	36.4	6.0	47.6	Horizontal	54	AV	Pass
9648.543	6.0	37.5	5.7	49.2	Horizontal	74	PK	Pass
9648.543	6.0	37.5	0.9	44.4	Horizontal	54	AV	Pass
12060.609	7.0	38.4	----	----	Horizontal	74	PK	Pass
12060.609	7.0	38.4	----	----	Horizontal	54	AV	Pass
14472.467	7.6	42.6	----	----	Horizontal	74	PK	Pass
14472.467	7.6	42.6	----	----	Horizontal	54	AV	Pass

DSSS mode QPSK modulation 11Mbps data rate CH7 2442MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2133.316	5.3	28.5	15.3	49.1	Horizontal	74	PK	Pass
2133.316	5.3	28.5	5.8	39.6	Horizontal	54	AV	Pass
2288.003	5.5	28.5	13.3	47.3	Horizontal	74	PK	Pass
2288.003	5.5	28.5	9.1	43.1	Horizontal	54	AV	Pass
4884.368	4.3	33.3	13.9	51.5	Horizontal	74	PK	Pass
4884.368	4.3	33.3	12.7	50.3	Horizontal	54	AV	Pass
7326.334	5.2	36.4	9.2	50.8	Horizontal	74	PK	Pass
7326.334	5.2	36.4	5.4	47.0	Horizontal	54	AV	Pass
9768.609	6.0	37.5	4.3	47.8	Horizontal	74	PK	Pass
9768.609	6.0	37.5	1.1	44.6	Horizontal	54	AV	Pass
12210.375	7.0	38.4	----	----	Horizontal	74	PK	Pass
12210.375	7.0	38.4	----	----	Horizontal	54	AV	Pass
14652.187	7.6	41.1	----	----	Horizontal	74	PK	Pass
14652.187	7.6	41.1	----	----	Horizontal	54	AV	Pass

Radiated Emission

DSSS mode QPSK modulation 11Mbps data rate CH11 2462MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2288.003	5.5	28.5	14.1	48.1	Horizontal	74	PK	Pass
2288.003	5.5	28.5	9.4	43.4	Horizontal	54	AV	Pass
2640.006	5.9	29.9	10.8	46.6	Horizontal	74	PK	Pass
2640.006	5.9	29.9	5.3	41.1	Horizontal	54	AV	Pass
4924.660	4.3	33.3	15.8	53.4	Horizontal	74	PK	Pass
4924.660	4.3	33.3	12.0	49.6	Horizontal	54	AV	Pass
7386.431	5.2	36.4	10.3	51.9	Horizontal	74	PK	Pass
7386.431	5.2	36.4	7.5	49.1	Horizontal	54	AV	Pass
9848.221	6.0	37.5	7.4	50.9	Horizontal	74	PK	Pass
9848.221	6.0	37.5	0.3	43.8	Horizontal	54	AV	Pass
12310.869	6.9	38.4	----	----	Horizontal	74	PK	Pass
12310.869	6.9	38.4	----	----	Horizontal	54	AV	Pass
14772.432	7.6	41.1	----	----	Horizontal	74	PK	Pass
14772.432	7.6	41.1	----	----	Horizontal	54	AV	Pass

Remark:

- (1) Emission Level= Cable Loss(include amplifier factor) + Antenna Factor + Reading
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.

Radiated Emission

OFDM mode BPSK modulation 6Mbps data rate CH1 2412MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
263.332	2.8	13.7	19.8	36.3	Vertical	46.0	QP	Pass
775.987	4.7	20.2	15.3	40.2	Vertical	46.0	QP	Pass
88.098	1.6	10.7	17.6	29.9	Horizontal	43.5	QP	Pass
397.446	3.2	16.5	17.8	37.5	Horizontal	46.0	QP	Pass
2324.108	5.5	28.5	17.3	51.3	Horizontal	74	PK	Pass
2324.108	5.5	28.5	7.9	41.9	Horizontal	54	AV	Pass
2133.316	5.3	28.5	15.7	49.5	Horizontal	74	PK	Pass
2133.316	5.3	28.5	5.8	39.6	Horizontal	54	AV	Pass
4824.690	4.2	33.3	10.8	48.3	Horizontal	74	PK	Pass
4824.690	4.2	33.3	8.6	46.1	Horizontal	54	AV	Pass
7236.215	5.2	36.4	7.3	48.9	Horizontal	74	PK	Pass
7236.215	5.2	36.4	3.8	45.4	Horizontal	54	AV	Pass
9648.380	6.0	37.5	6.3	49.8	Horizontal	74	PK	Pass
9648.380	6.0	37.5	1.1	44.6	Horizontal	54	AV	Pass
12060.032	7.0	38.4	----	----	Horizontal	74	PK	Pass
12060.032	7.0	38.4	----	----	Horizontal	54	AV	Pass
14472.281	7.6	42.6	----	----	Horizontal	74	PK	Pass
14472.281	7.6	42.6	----	----	Horizontal	54	AV	Pass

OFDM mode BPSK modulation 6Mbps data rate CH7 2442MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2288.011	5.5	28.5	15.0	49	Horizontal	74	PK	Pass
2288.011	5.5	28.5	11.2	45.2	Horizontal	54	AV	Pass
2640.006	5.9	29.9	11.5	47.3	Horizontal	74	PK	Pass
2640.006	5.9	29.9	6.7	42.5	Horizontal	54	AV	Pass
4884.341	4.3	33.3	13.1	50.7	Horizontal	74	PK	Pass
4884.341	4.3	33.3	9.5	47.1	Horizontal	54	AV	Pass
7326.220	5.2	36.4	8.2	49.8	Horizontal	74	PK	Pass
7326.220	5.2	36.4	5.9	47.5	Horizontal	54	AV	Pass
9768.455	6.0	37.5	4.9	48.4	Horizontal	74	PK	Pass
9768.455	6.0	37.5	2.0	45.5	Horizontal	54	AV	Pass
12210.264	7.0	38.4	----	----	Horizontal	74	PK	Pass
12210.264	7.0	38.4	----	----	Horizontal	54	AV	Pass
14652.292	7.6	41.1	----	----	Horizontal	74	PK	Pass
14652.292	7.6	41.1	----	----	Horizontal	54	AV	Pass

Radiated Emission

OFDM mode BPSK modulation 6Mbps data rate CH11 2462MHz Test Result

Frequency MHz	Cable Loss dB	Antenna Factor dB/m	Reading dBuV	Emission Level dBuV/m	Polarization	Limit dBuV/m	Detector	Result
2288.003	5.5	28.5	17.0	51.0	Horizontal	74	PK	Pass
2288.003	5.5	28.5	13.0	47.0	Horizontal	54	AV	Pass
2640.006	5.9	29.9	14.3	50.1	Horizontal	74	PK	Pass
2640.006	5.9	29.9	9.2	45.0	Horizontal	54	AV	Pass
4924.333	4.3	33.3	10.6	48.2	Horizontal	74	PK	Pass
4924.333	4.3	33.3	8.4	46.0	Horizontal	54	AV	Pass
7386.187	5.2	36.4	6.9	48.5	Horizontal	74	PK	Pass
7386.187	5.2	36.4	4.1	45.7	Horizontal	54	AV	Pass
9848.543	6.0	37.5	4.6	47.0	Horizontal	74	PK	Pass
9848.543	6.0	37.5	2.2	45.7	Horizontal	54	AV	Pass
12310.789	6.9	38.4	----	----	Horizontal	74	PK	Pass
12310.789	6.9	38.4	----	----	Horizontal	54	AV	Pass
14772.116	7.6	41.1	----	----	Horizontal	74	PK	Pass
14772.116	7.6	41.1	----	----	Horizontal	54	AV	Pass

Remark:

- (1) Emission Level= Cable Loss(include amplifier factor) + Antenna Factor + Reading
- (2) Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.



Product Service

Test Equipment List

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ES126	838786/013	Dec 23 2009
Bilog Antenna	Chase	CBL6112B	2591	Dec 23 2009
Signal Generator	Rohde & Schwarz	SMR20	100047	Dec 23 2009
Antenna	Schwarzbeck	VUBA9117	115	Dec 23 2009
Horn Antenna	Rohde & Schwarz	HF906	100013	Dec 23 2009

7.6 6 dB bandwidth

Test Method

- 1 Place the EUT on the table and set it in the transmitting mode.
- 2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3 Mark the peak frequency and –6dB (upper and lower) frequency.

Limit


Limit [kHz]

≥ 500


6 dB bandwidth

DSSS mode QPSK modulation 11Mbps data rate Test Result

Frequency MHz	Bandwidth kHz	Limit kHz	Result
2412	12200	≥ 500	Pass
2442	12200	≥ 500	Pass
2462	11800	≥ 500	Pass

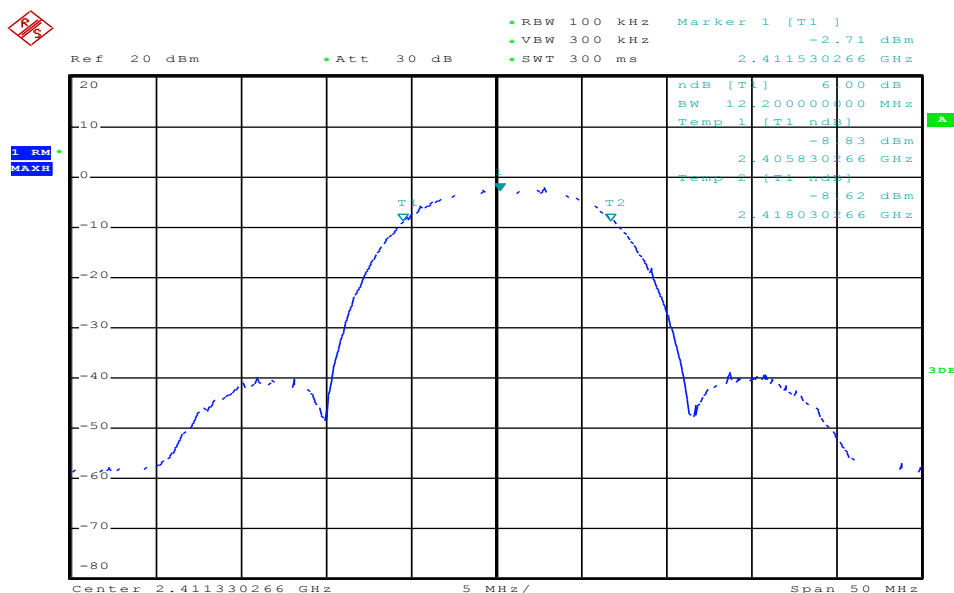


Date: 17.FEB.2009 00:34:56

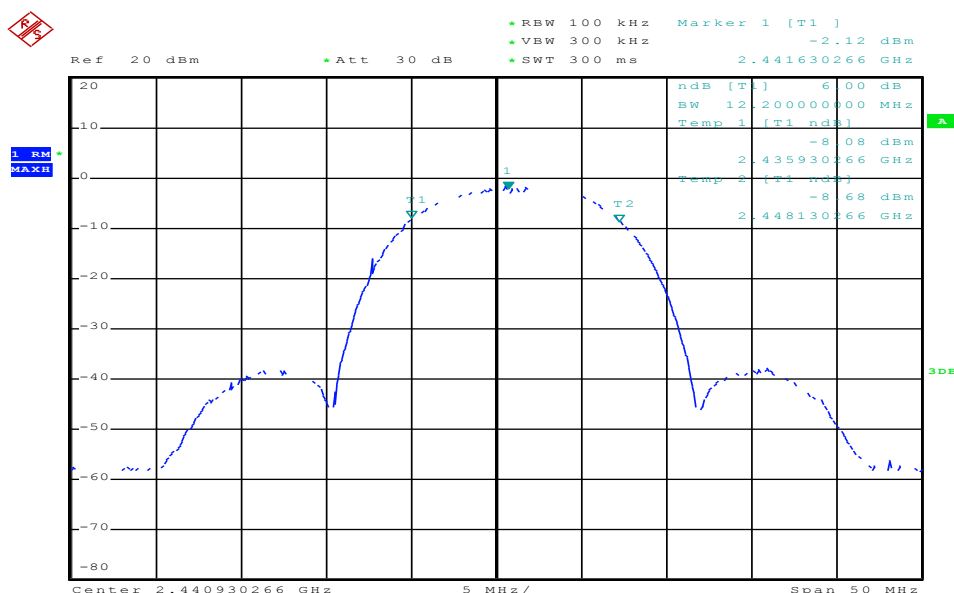

Date: 17.FEB.2009 00:33:45

6 dB bandwidth

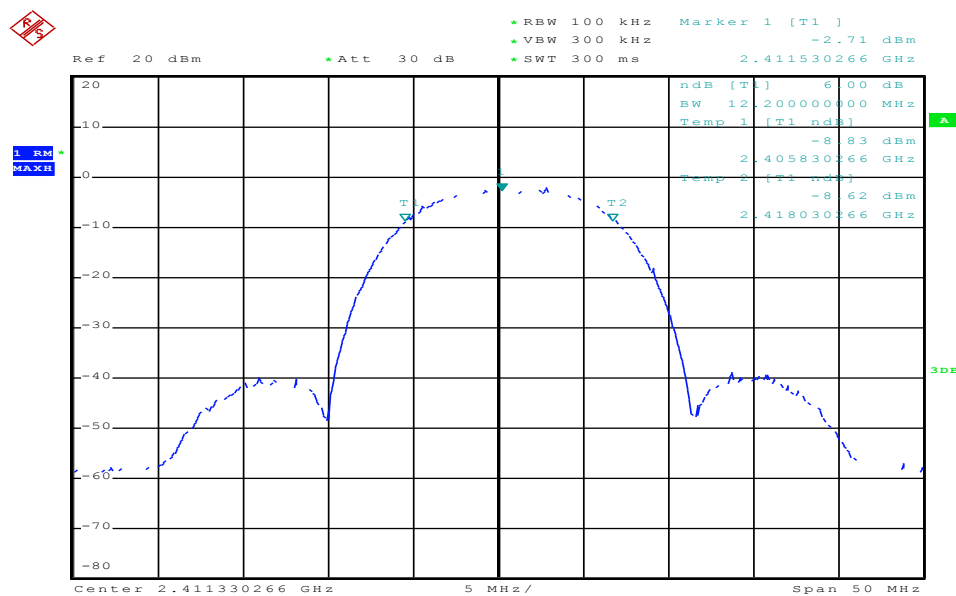


Date: 17.FEB.2009 00:34:56


6 dB bandwidth

OFDM mode BPSK modulation 6Mbps data rate Test Result

Frequency MHz	Bandwidth kHz	Limit kHz	Result
2412	16600	≥ 500	Pass
2442	16600	≥ 500	Pass
2462	16600	≥ 500	Pass

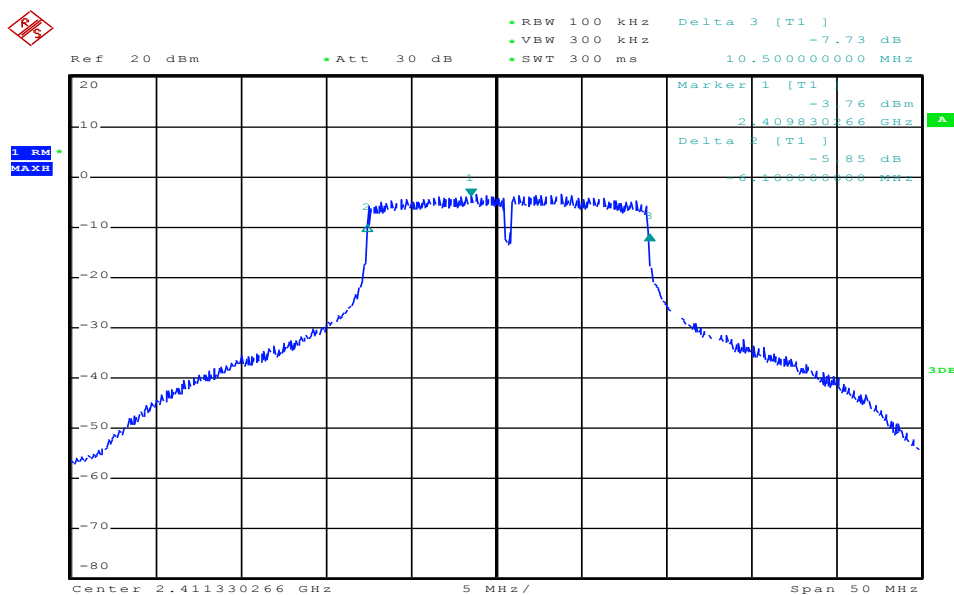


Date: 17.FEB.2009 00:37:22

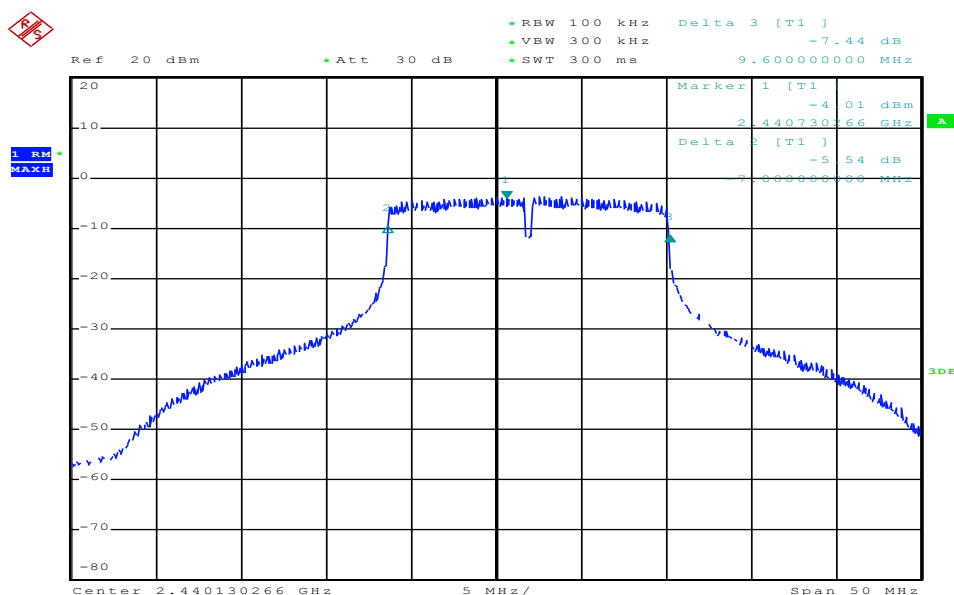

Date: 17.FEB.2009 00:39:07

6 dB bandwidth

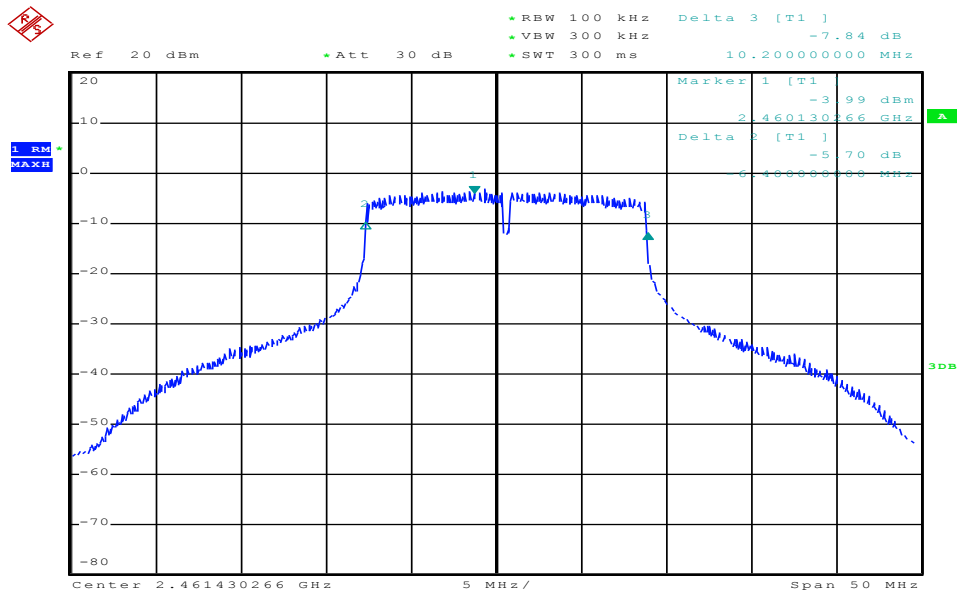

Date: 17.FEB.2009 00:41:42



Product Service

Test Equipment

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESPI3	100244	Dec 23 2009

7.7 Power spectral density

Test Method

- 1 Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2 Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300kHz, Sweep = 100 s
- 3 Record the max reading.

Limit


Limit
dBm / 3 kHz

8

Power spectral density


DSSS mode QPSK modulation 11Mbps data rate Test Result

Frequency MHz	P dBm	Result
2412	-16.25	Pass
2442	-14.79	Pass
2462	-14.61	Pass

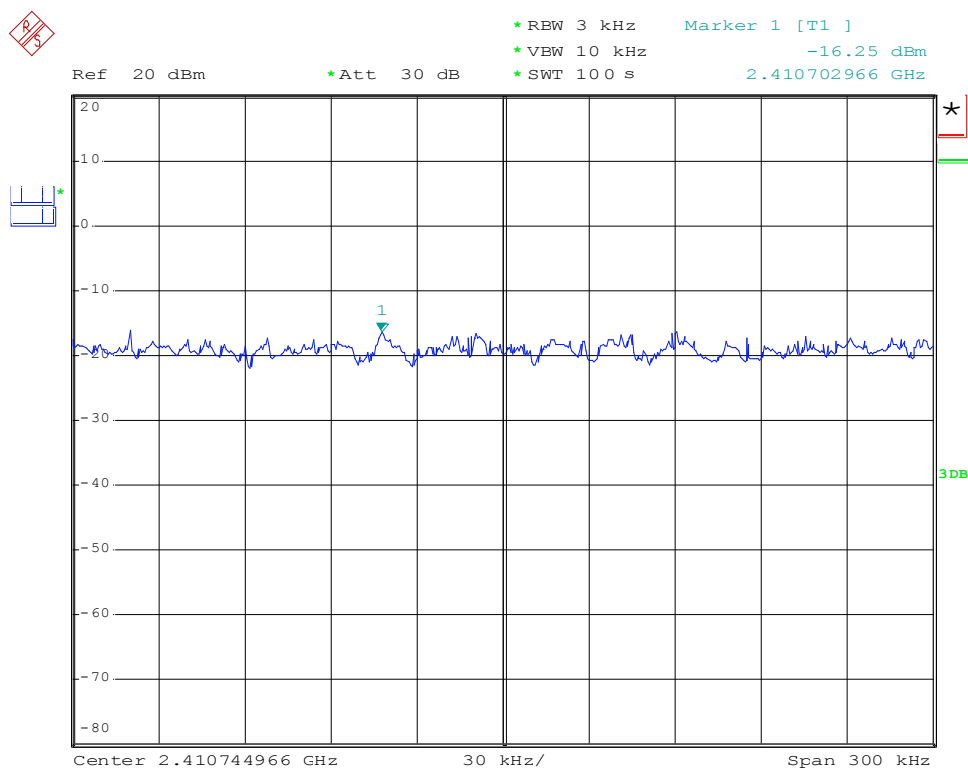


Date: 17.FEB.2009 01:08:33

Power spectral density

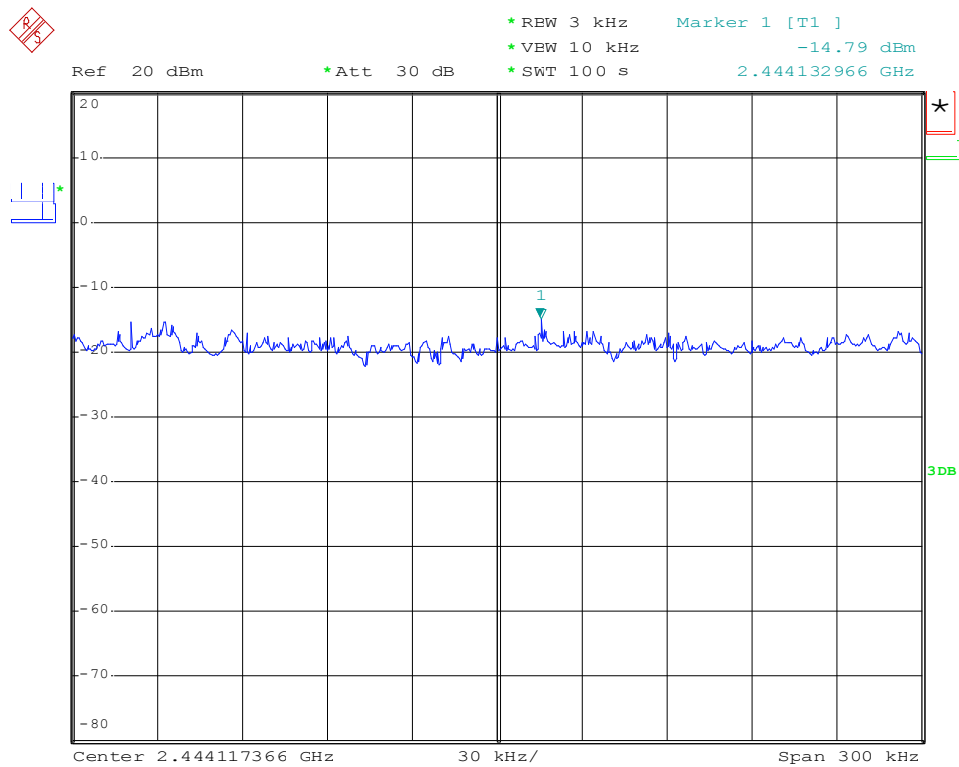

Date: 17.FEB.2009 01:04:04

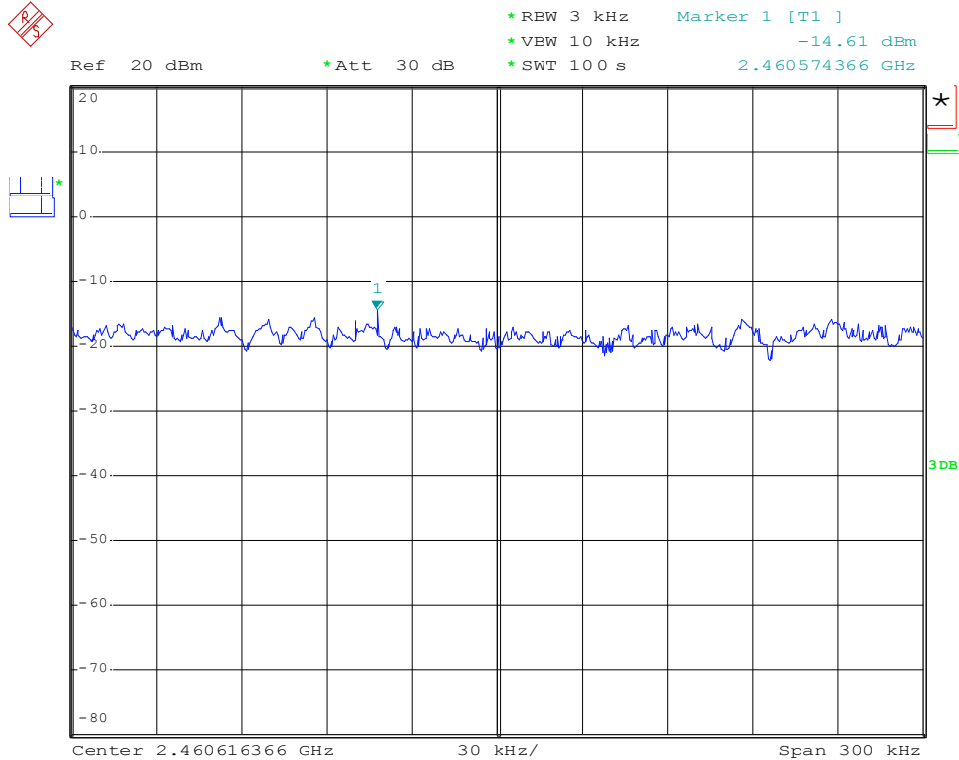


Date: 17.FEB.2009 01:02:00

Power spectral density


OFDM mode BPSK modulation 6Mbps data rate Test Result

Frequency MHz	P dBm	Result
2412	-18.67	Pass
2442	-17.70	Pass
2462	-17.42	Pass

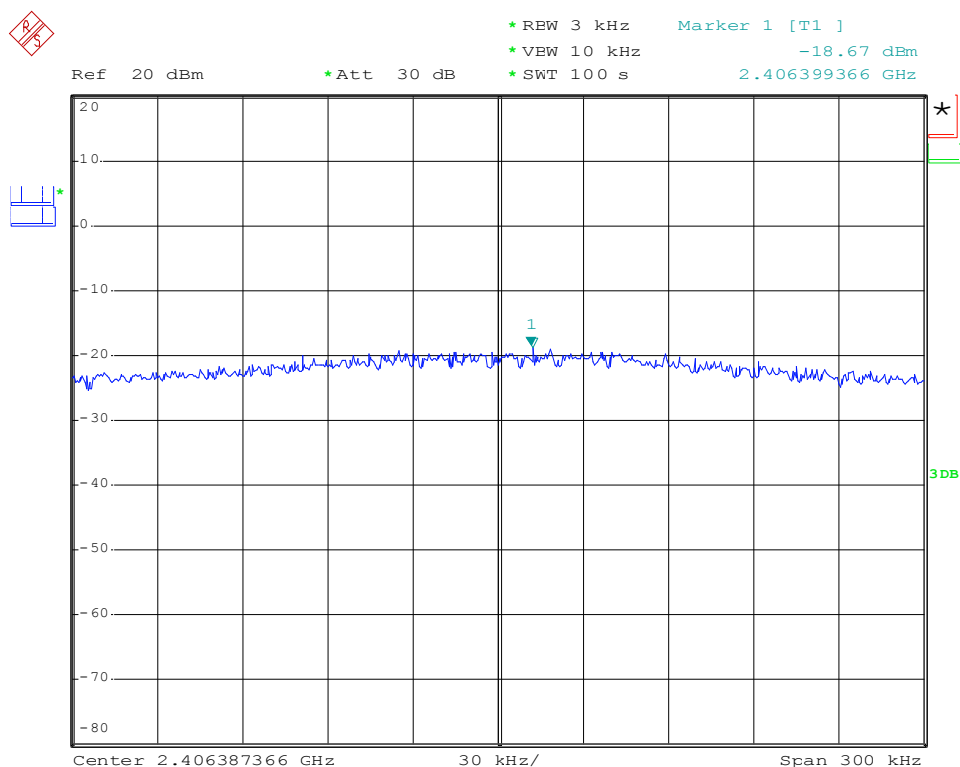


Date: 17.FEB.2009 01:07:29

Power spectral density

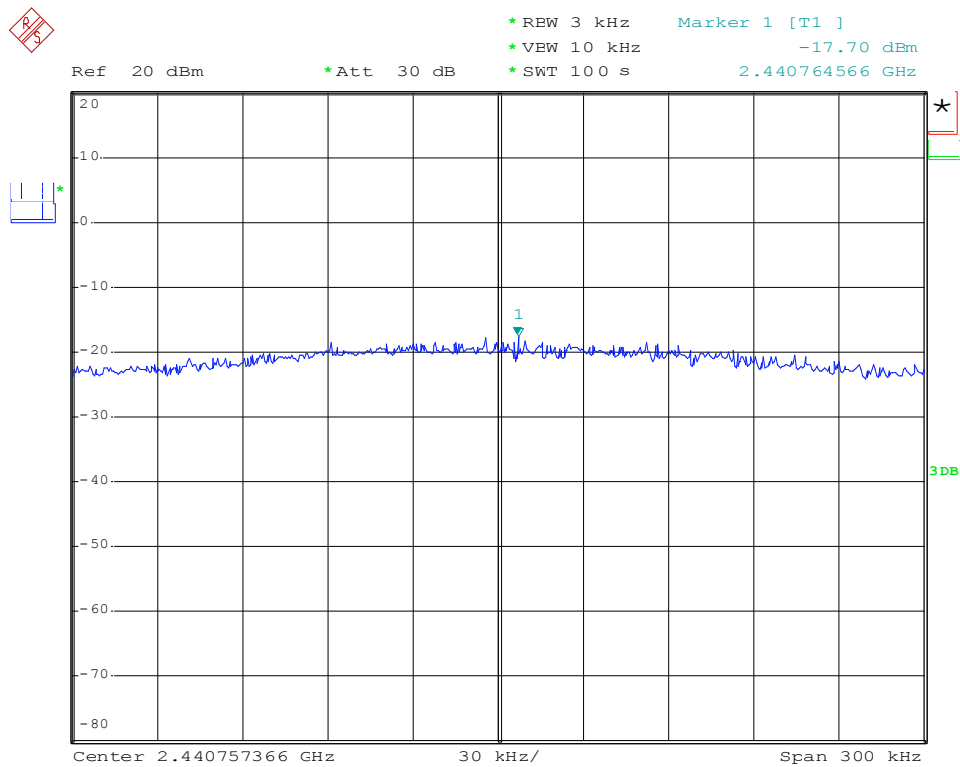

Date: 17.FEB.2009 01:05:56

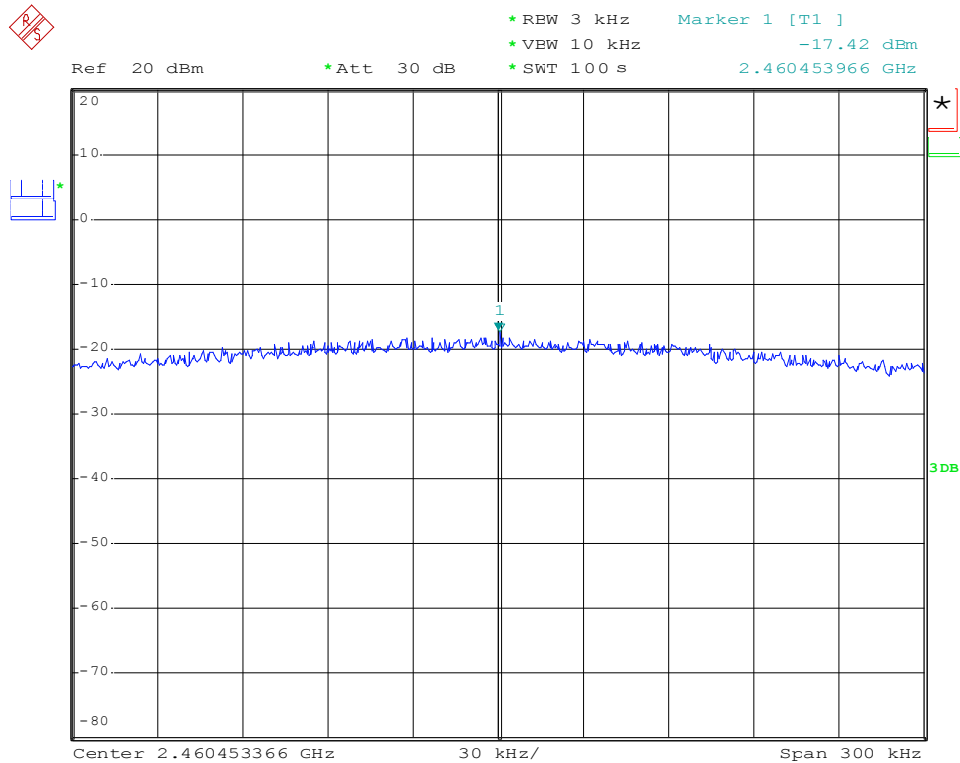

Date: 17.FEB.2009 00:57:56



Product Service

Test Equipment

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL DUE DATE
EMI Test Receiver	Rohde & Schwarz	ESPI3	100244	Dec 23 2009

8 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength (dB μ V/m)	U=4.6dB; k=2(30MHz-1GHz)
CE	Disturbance Voltage (dB μ V)	U=3.3dB; k=2