





ISO/IEC17025 Accredited Lab.

Report No: FCC0601032 File reference No: 2006-01-23

Applicant: WANLIDA GROUP CO., LTD

Product: Portable DVD Player with TFT-LCD

Model No: PDM-0742

Brand Name: Polaroid

Test Standards: FCC Part 15 Subpart C, Paragraph 15.239& Subpart B

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C, Paragraph 15.239 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: Jan, 23,2006

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

East 5/Block 4, Anhua Industrial Zone, No.8, Tairan Rd. CheGongMiao, FuTian District, Shenzhen, CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 0601032 Page 2 of 33

Date: 2006-01-23



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205.

Page 3 of 33

Report No: 0601032 Date: 2006-01-23



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	5
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test	14
6.1	Test Method and Test Procedure.	14
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	14
6.5	Test Result.	14
7.0	Band Edge	21
7.1	Test Method and Test Procedure.	21
7.2	Radiated Test Setup	21
7.3	Configuration of the EUT	21
7.4	EUT Operating Condition.	21
7.5	Band Edge Limit	22
7.6	Band Edge Test Result.	22
8.0	FCC ID Label.	26
9.0	Photo of Test Setup and EUT View.	27

Report No: 0601032 Page 4 of 33

Date: 2006-01-23



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: WANLIDA GROUP CO., LTD

Address: NO.618, JIAHE ROAD, WANLIDA INDUSTRY ZONE

Telephone: 596-7653680-8516

Fax: 596-7662886

1.3 Description of EUT

Product: DVD Player with TFT-LCD Manufacturer: Wanlida Group Co., Ltd

Brand Name: Polaroid
Model Number: PDM-0742
Additional Model Name PDM-0743

Additional Trade Name N/A

Rating: 9.5V or 12V DC input or Powered by battery Package

FM Mode Operation Frequency 107.1MHz, 107.3MHz, 107.5MHz, 107.7MHz, 107.9MHz,

Number of Channel 5

Antenna Designation A permanent fixed antenna, which is built-in, designed as an indispensable

part of the EUT.

1.4 Submitted Sample

1 Sample

1.5 Test Duration

2006-01-15 to 2006-01-23

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 33

Report No: 0601032 Date: 2006-01-23



1.6 Test Uncertainty

Conducted Emissions Uncertainty = ± 3.0 dB Radiated Emissions Uncertainty = ± 6.0 dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

2.0		Test Equ	ipments		
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESD Simulator	EM TEST	DITO	0404-24	2005-08-04	2006-08-03
Continuous Wave Simulator	EM TEST	CWS 500C	0407-05	2005-12-12	2006-12-11
Ultra Compact Simulator	EM TEST	UCS 500 M4	0304-42	2005-08-21	2006-08-20
Harmonic	California Instruments	PACS-1	72305	2005-08-21	2006-08-20
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2005-12-01	2006-11-30
Absorbing Clamp	ROHDE&SCHWARZ	MDS-21	100126	2005-12-01	2006-11-30
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2005-12-01	2006-11-30
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2005-12-01	2006-11-30
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2005-12-01	2006-11-30
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2005-03-31	2006-03-31
4-WIRE ISN	ROHDE&SCHWARZ	ENY 41	830663/044	2005-02-24	2006-02-24
GG ENY22 Double 2-Wire ISN	ROHDE&SCHWARZ	ENY22	83066/016	2005-02-24	2006-02-24
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2005-02-24	2006-02-24

Page 6 of 33

Report No: 0601032 Date: 2006-01-23

		12/			
System Controller	CT	SC100	-	-	-
Printer	EPSON	РНОТО ЕХЗ	CFNH234850	2005-02-24	2006-02-24
FM-AM Signal Generator	JUNGJIN	SG-150M	389911177	2005-02-24	2006-02-24
Color TV Pattern Generator	PHILIPS	PM5418	LO621747	2005-02-24	2006-02-24
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Oscillator	KENWOOD	AG-203D	3070002	2005-02-24	2006-02-24
Spectrum Analyzer	HAMEG	HM5012	-	-	-
Power Supply	LW	APS1502	-	-	-
5K VA AC Power Source	California Instruments	5001iX	56060	2005-02-24	2006-02-24
CDN	EM TEST	CDN M2/M3	-	2005-02-24	2006-02-24
Attenuation	EM TEST	ATT6/75	-	2005-02-24	2006-02-24
Resistance	EM TEST	R100	-	-	-
Electromagnetic Injection Clamp	LITTHI	EM101	35708	2005-02-24	2006-02-24
Inductive Components	EM TEST	MC2630	-	2005-02-24	2006-02-24
Antenna	EM TEST	MS100	-	2005-02-24	2006-02-24
Signal Generator	ROHDE&SCHWARZ	SMT03	100029	2005-02-01	2006-02-01
Power Amplifier	AR	150W1000	300999	2005-02-01	2006-02-01
Field probe	Holaday	HI-6005	105152	2005-02-01	2006-02-01
Bilog Antenna	Chase	CBL6111C	2576	2005-02-01	2006-02-01
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2005-02-01	2006-02-01
3m OATS			N/A	2005-02-01	2006-02-01

Page 7 of 33

Report No: 0601032 Date: 2006-01-23



3.0 Technical Details

3.1 Summary of test results

The EUT has be	een tested accor	rding to the follo	wing specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted	PASS	Complies
	Emission Test		
FCC Part 15 Subpart C Paragraph 15.239 Limit	Field Strength of Fundamental	PASS	Minimum passing margin is –9.20 dB at 107.1048 MHz Horizontal
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Meets Class B Limit
Attenuation below the general limits specified	Band Edge	PASS	The field strength of
in Section 15.209(a) is not required. In	Test		any Emissions,
addition, Radiated emissions which fall in the			which appear
restricted bands, as defined in Section			Outside of this band,
15.205(a), must also comply with the Radiated			shall not exceed the
emission limits specified in Section 15.209(a)			general Radiated
(see Section 15.205(c)).			emission limits in
			Section 15.209.

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.239


4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co.,Ltd



5. Power Line Conducted Emission Test

5.1 Schematics of the test

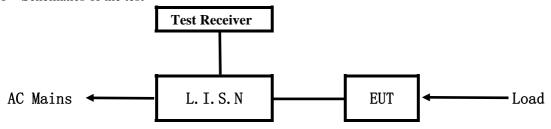


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2001. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2001.

Block diagram of Test setup

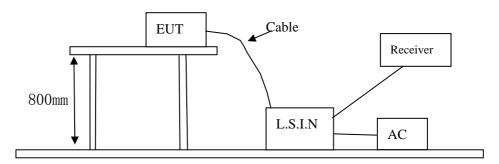

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2001. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Two channels are provided to the EUT

Channel	Frequency (MHz)
1	107.1
2	107.3
3	107.5
4	107.7
5	107.9

Note: EUT can be powered by adaptor and batteries. During radiated emission test, adaptor used because EUT produced more emission at this time.

The report refers only to the sample tested and does not apply to the bulk.

Page 9 of 33

Report No: 0601032 Date: 2006-01-23



A. EUT

Device	Manufacturer	Model	FCC ID
DVD Player	Wanlida Group Co., Ltd	PDM-0742	SMFPDM-0742
with TFT-LCD		PDM-0743	

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2001.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Eraguan ay (MHz)	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
Frequency(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.




A Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Normal operation on channel 1 position

Results: Pass

Please refer to following diagram for individual

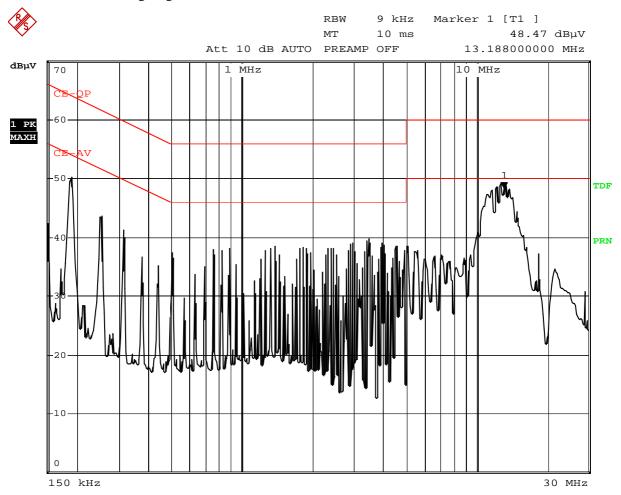

Date: 13.JAN.2006 15:56:03

Engavonov		Reading	Limit			
Frequency (MHz)	Line	;	Neutr	al	(dB µ	V)
(MHZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.190	47.72	34.52	-	-	64.00	54.00
0.254	40.47	32.93	-	-	56.00	46.00
1.328	36.07	36.02	-	-	56.00	46.00
12.748	47.21	41.72	-	-	60.00	50.00

The report refers only to the sample tested and does not apply to the bulk.




B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Normal operation on channel 1 position

Results: Pass

Please refer to following diagram for individual

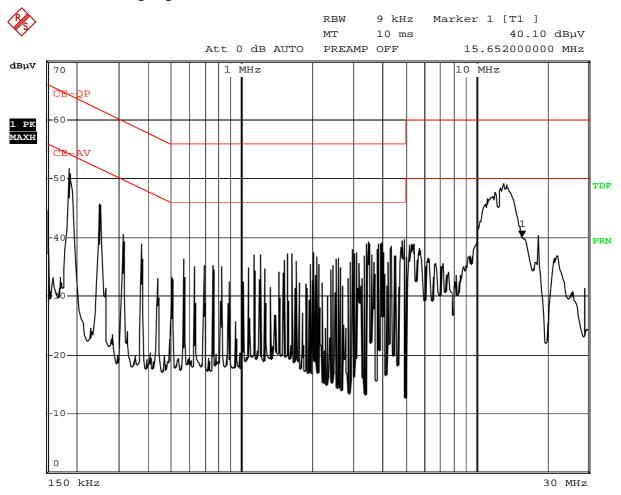

Date: 13.JAN.2006 15:53:44

Engguenov		Reading	Limit			
Frequency (MHz)	Live		Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.190	-	1	47.36	38.81	64.00	54.00
0.250	-	-	41.50	34.17	61.60	51.60
3.472	-	1	37.23	36.47	56.00	46.00
13.192	-	-	48.52	46.01	60.00	50.00

The report refers only to the sample tested and does not apply to the bulk.




C Conducted Emission on Line Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing DVD Disk

Results: Pass

Please refer to following diagram for individual

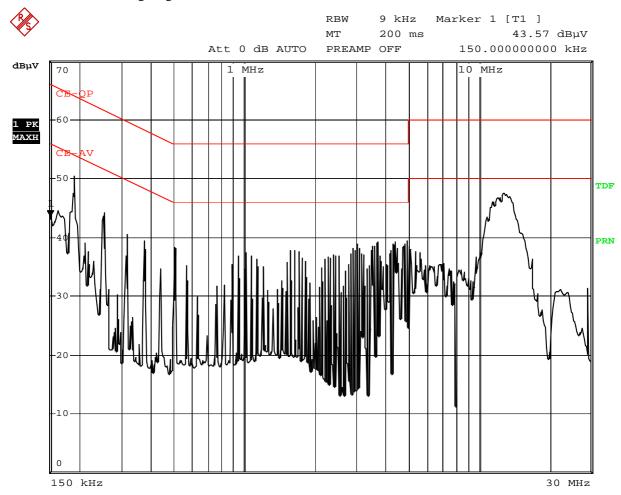

Date: 13.JAN.2006 15:20:13

Eroguanav	Reading(dB µ V)				Limit	
Frequency (MHz)	Line		Neutral		(dB µ V)	
(IVIIIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
0.190	47.76	39.01	-	-	64.00	54.00
1.012	35.92	35.87	-	-	56.00	46.00
3.032	38.34	38.18	-	-	56.00	46.00
12.764	45.81	43.47	-	-	60.00	50.00

The report refers only to the sample tested and does not apply to the bulk.

Report No: 0601032




Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT set Condition: Playing DVD Disk

Results: Pass

Please refer to following diagram for individual

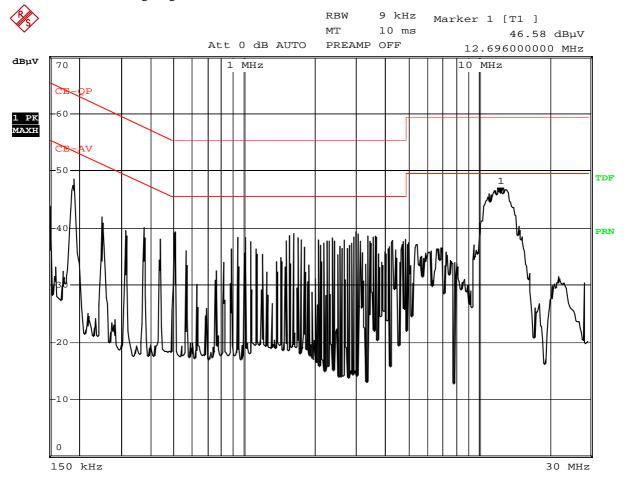

13.JAN.2006 15:22:15 Date:

Eraguanav	Reading(dB µ V)				Limit		
Frequency (MHz)	Live		Neutr	Neutral		(dB µ V)	
(WITIZ)	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average	
0.190	-	-	47.14	32.99	64.00	54.00	
1.012	-	-	37.00	36.96	56.00	46.00	
3.032	-	-	38.31	38.14	56.00	46.00	
12.636	-	-	45.35	43.16	60.00	50.00	

The report refers only to the sample tested and does not apply to the bulk.

Page 14 of 33

Report No: 0601032 Date: 2006-01-23



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2001. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2001.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization : Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Page 15 of 33

Report No: 0601032 Date: 2006-01-23



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.239 Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)		
	uV/m	dBuV/m	
88 to 108	250	47.96	

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

6.5 Test result

A Fundamental Radiated Emission Data

Product:	DVD Player with TFT-LCD	Test Mode:	Channel 1
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	9.5V from adaptor	Humidity:	56%
Test Result:	Pass		

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horiz / Vert	Limits PK/AV (dBuV/m)	Margin (dB)
107.1048	40.21/38.76	Horizontal	67.96/47.96	-27.75/-9.20
107.1048	37.89/36.54	Vertical	67.96/47.96	-30.07/-11.42

The report refers only to the sample tested and does not apply to the bulk.

Page 16 of 33

Report No: 0601032 Date: 2006-01-23

Product:	DVD Player with TFT-LCD	Test Mode:	Channel 3		
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃		
Test Voltage:	9.5V from adaptor	Humidity:	56%		
Test Result:	Pass				

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horiz / Vert	Limits PK/AV (dBuV/m)	Margin (dB)
107.5036	39.44/37.25	Horizontal	67.96/47.96	-28.52/-10.71
107.5036	37.12/35.47	Vertical	67.96/47.96	-30.84/-12.49

Product:	DVD Player with TFT-LCD	Test Mode:	Channel 5
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	9.5V from adaptor	Humidity:	56%
Test Result:	Pass		


Frequency	Emission PK/AV	Horiz /	Limits PK/AV	Margin
(MHz)	(dBuV/m)	Vert	(dBuV/m)	(dB)
107.9040	38.37/36.59	Horizontal	67.96/47.96	-29.59/-31.37
107.9040	36.75/35.89	Vertical	67.96/47.96	-31.21/-12.07

Note: (1) PK= Peak, AV= Average

(2) Emission Level = Reading Level + Probe Factor + Cable Loss.

(3)Margin=Emission-Limits

(4)According to section 15.35(b), the peak limit is 20dB higher than the average limit




A. General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Channel 1 (107.1MHz)


Results: Pass

Please refer to following diagram for individual

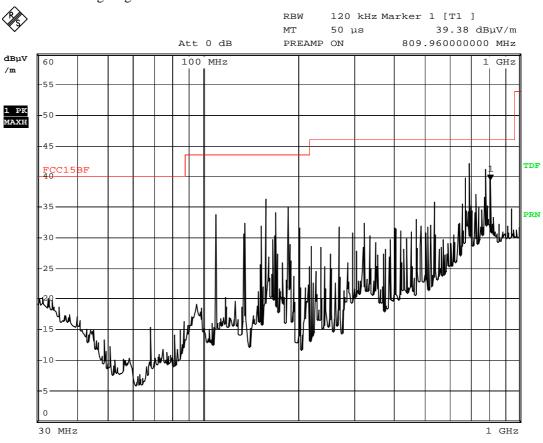

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
158.40	37.78	Н	43.50
186.28	35.50	Н	43.50
694.24	42.25	Н	46.00
779.84	41.13	Н	46.00

The report refers only to the sample tested and does not apply to the bulk.






B Radiated Emission In Vertical (30MHz----1000MHz

EUT set Condition: Channel 1 (107.1MHz)

Results: Pass


Please refer to following diagram for individual

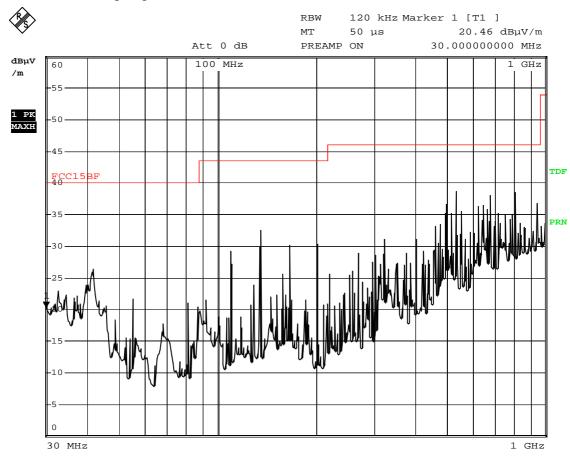

Date: 23.JAN.2006 21:51:46

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
135.00	35.68	V	43.50
165.92	31.16	V	43.50
202.52	30.52	V	43.50
534.60	38.04	V	46.00
681.96	38.78	V	46.00

The report refers only to the sample tested and does not apply to the bulk.






C Radiated Emission In Horizontal (30MHz---1000MHz

EUT set Condition: Playing DVD Disk


Results: Pass

Please refer to following diagram for individual

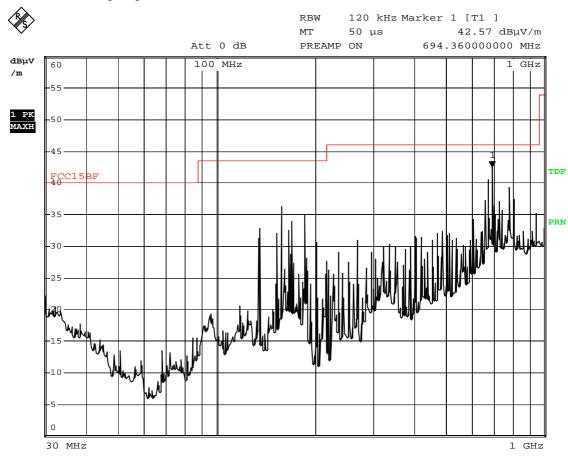

Date: 13.JAN.2006 16:55:47

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
135.00	32.85	Н	43.50
158.44	37.82	Н	43.50
186.28	34.56	Н	43.50
694.36	42.13	Н	46.00






D Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Playing DVD Disk

Results: Pass

Please refer to following diagram for individual

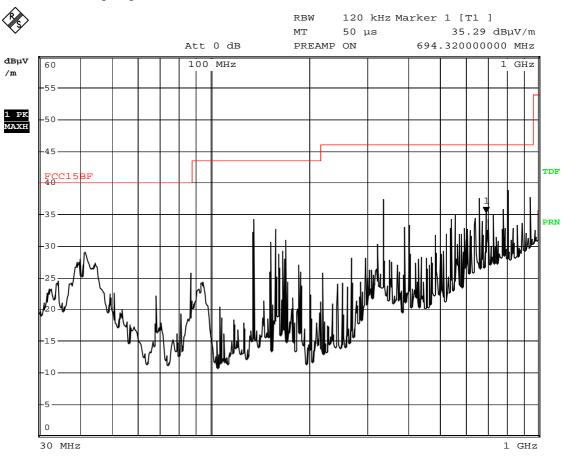

Date: 13.JAN.2006 17:02:38

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
41.24	25.02	V	43.50
135.00	33.72	V	43.50
158.40	34.68	V	43.50
337.48	37.53	V	46.00
809.96	39.91	V	46.00

The report refers only to the sample tested and does not apply to the bulk.




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.4 –2001. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz. Measurements were made at 3 meters.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (5) The antenna polarization : Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

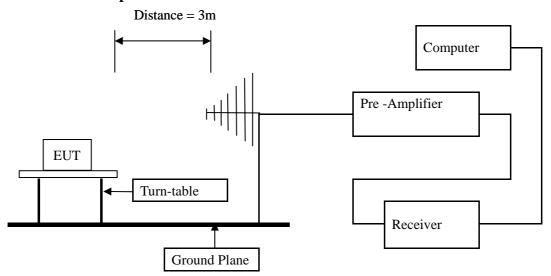

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.3 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: 0601032 Page 22 of 33

Date: 2006-01-23



7.5 Band Edge Limit

- (1) Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.
- (2) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.
- (3) Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Page 23 of 33

Report No: 0601032 Date: 2006-01-23



7.6 Band Edge Test Result

Product:	FM Emitter	Test Mode:	Channel 1
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	9.5V from adaptor	Humidity:	56%
Test Result:	Pass		

Test Figure:



RBW 10 kHz Marker 1 [T1] VBW 30 kHz 40.21 dBµV/m 87 dBµV/m Att 10 dB 107.104800000 MHz Ref SWT 2.5 ms -80 Α 1 PK MAXH 60 TDF 50 PRN -10 Center 107.1048 MHz 20 kHz/ Span 200 kHz

23.JAN.2006 14:45:29 Date:

Page 24 of 33

Span 200 kHz

Report No: 0601032 Date: 2006-01-23



7.6 Band Edge Test Result

Product:	FM Emitter	Test Mode:	Channel 3
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	9.5V from adaptor	Humidity:	56%
Test Result:	Pass		

Test Figure:



RBW 10 kHz Marker 1 [T1] VBW 30 kHz 39.44 dBµV/m 87 dBµV/m Att 10 dB 107.503600000 MHz Ref SWT 2.5 ms -80 Α 1 PK MAXH 60 TDF 50 PRN -10

20 kHz/

23.JAN.2006 15:00:13 Date:

Center 107.5036 MHz


Page 25 of 33

Report No: 0601032 Date: 2006-01-23

Product:	FM Emitter	Test Mode:	Channel 5
Test Item:	Fundamental Radiated Emission Data	Temperature:	25℃
Test Voltage:	9.5V from adaptor	Humidity:	56%
Test Result:	Pass		

Test Figure:



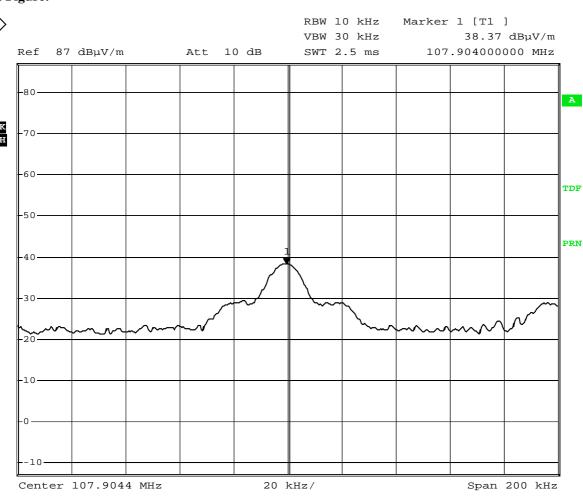

Date: 23.JAN.2006 15:11:57

Note:

- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
- (2) The average measurement was not performed when the peak measured data under the limit of average detection.
- (3) The Uncertainty of conducted emission= $\pm 20 \text{kHz}$

The report refers only to the sample tested and does not apply to the bulk.

Report No: 0601032 Page 26 of 33

Date: 2006-01-23




8.0 FCC ID Label

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 27 of 33

Report No: 0601032 Date: 2006-01-23



Photo of testing

Conducted test View--



Page 28 of 33

Report No: 0601032 Date: 2006-01-23



9.2 Radiated emission test view




Page 29 of 33

Report No: 0601032 Date: 2006-01-23



Photo for the EUT 9.3

Outside View

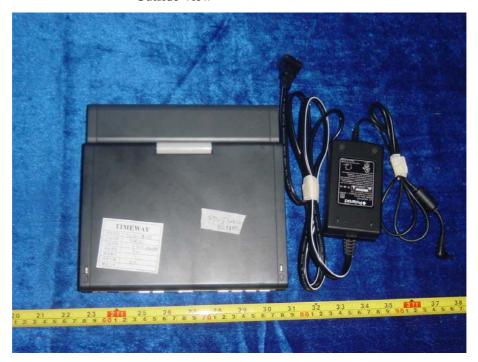



The report refers only to the sample tested and does not apply to the bulk.

Page 30 of 33

Report No: 0601032 Date: 2006-01-23





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 31 of 33

Report No: 0601032 Date: 2006-01-23







The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 32 of 33

Report No: 0601032 Date: 2006-01-23





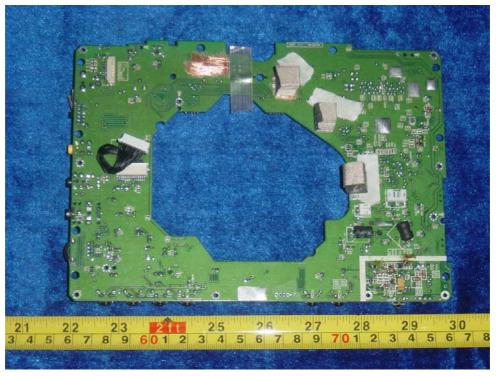


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to





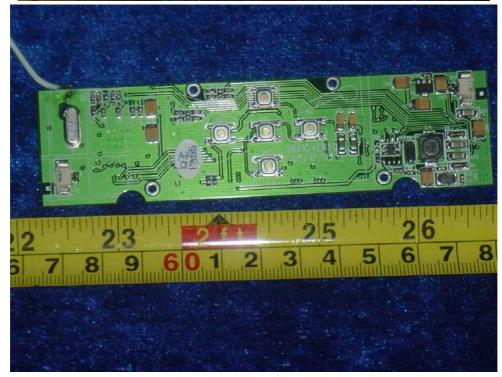

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to