





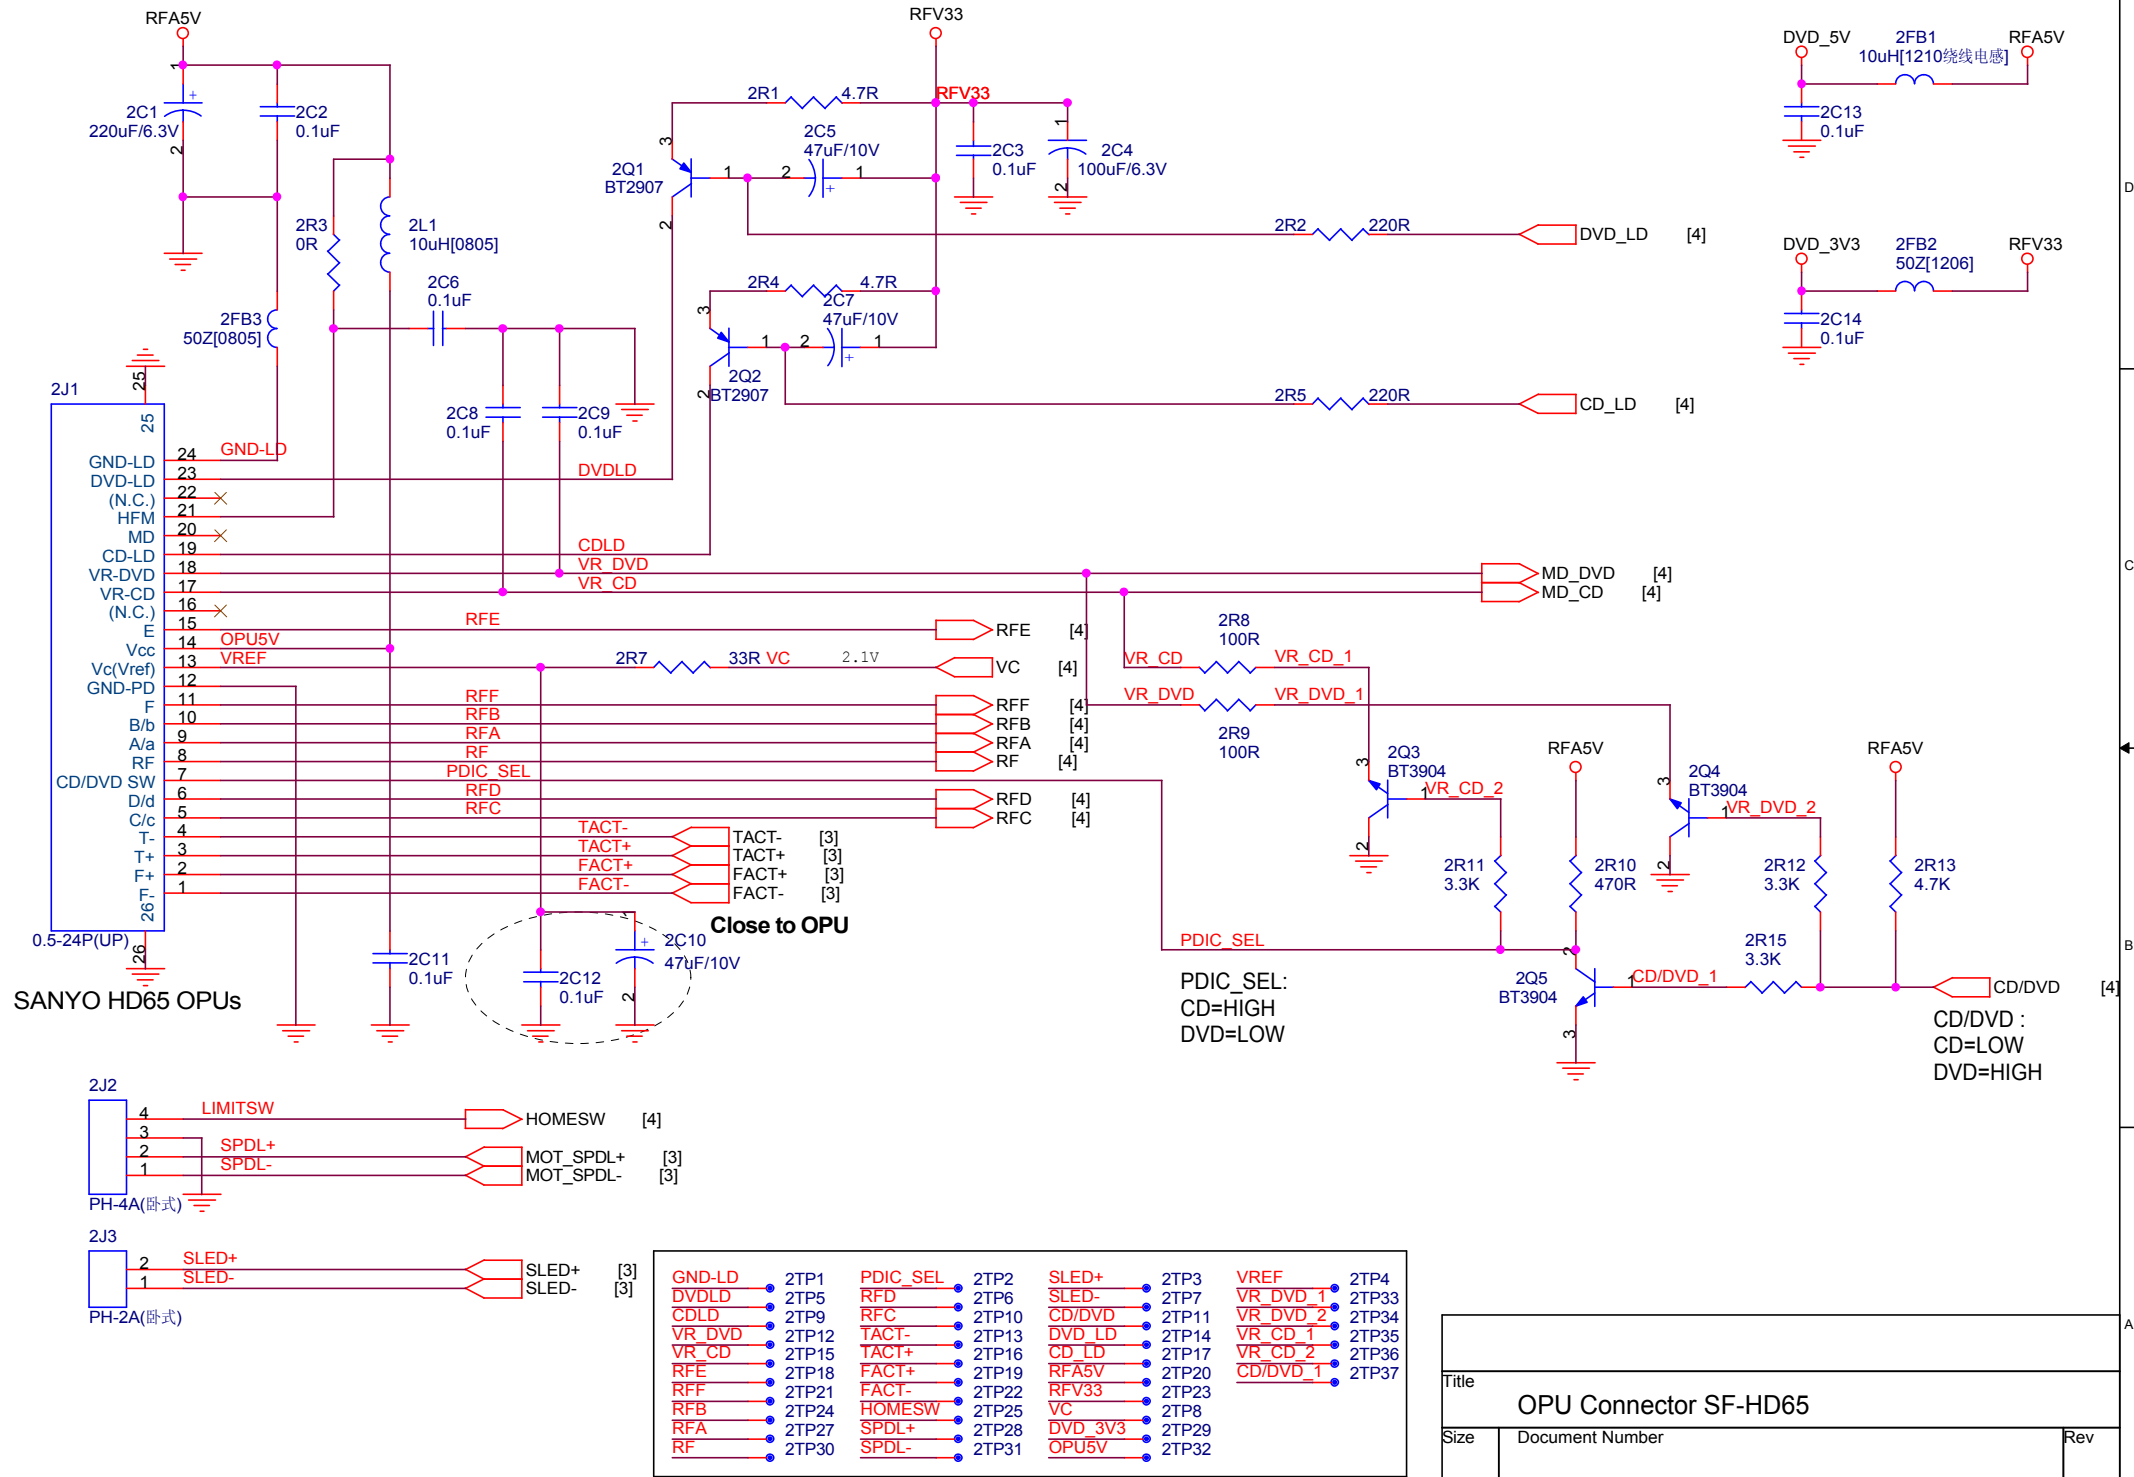

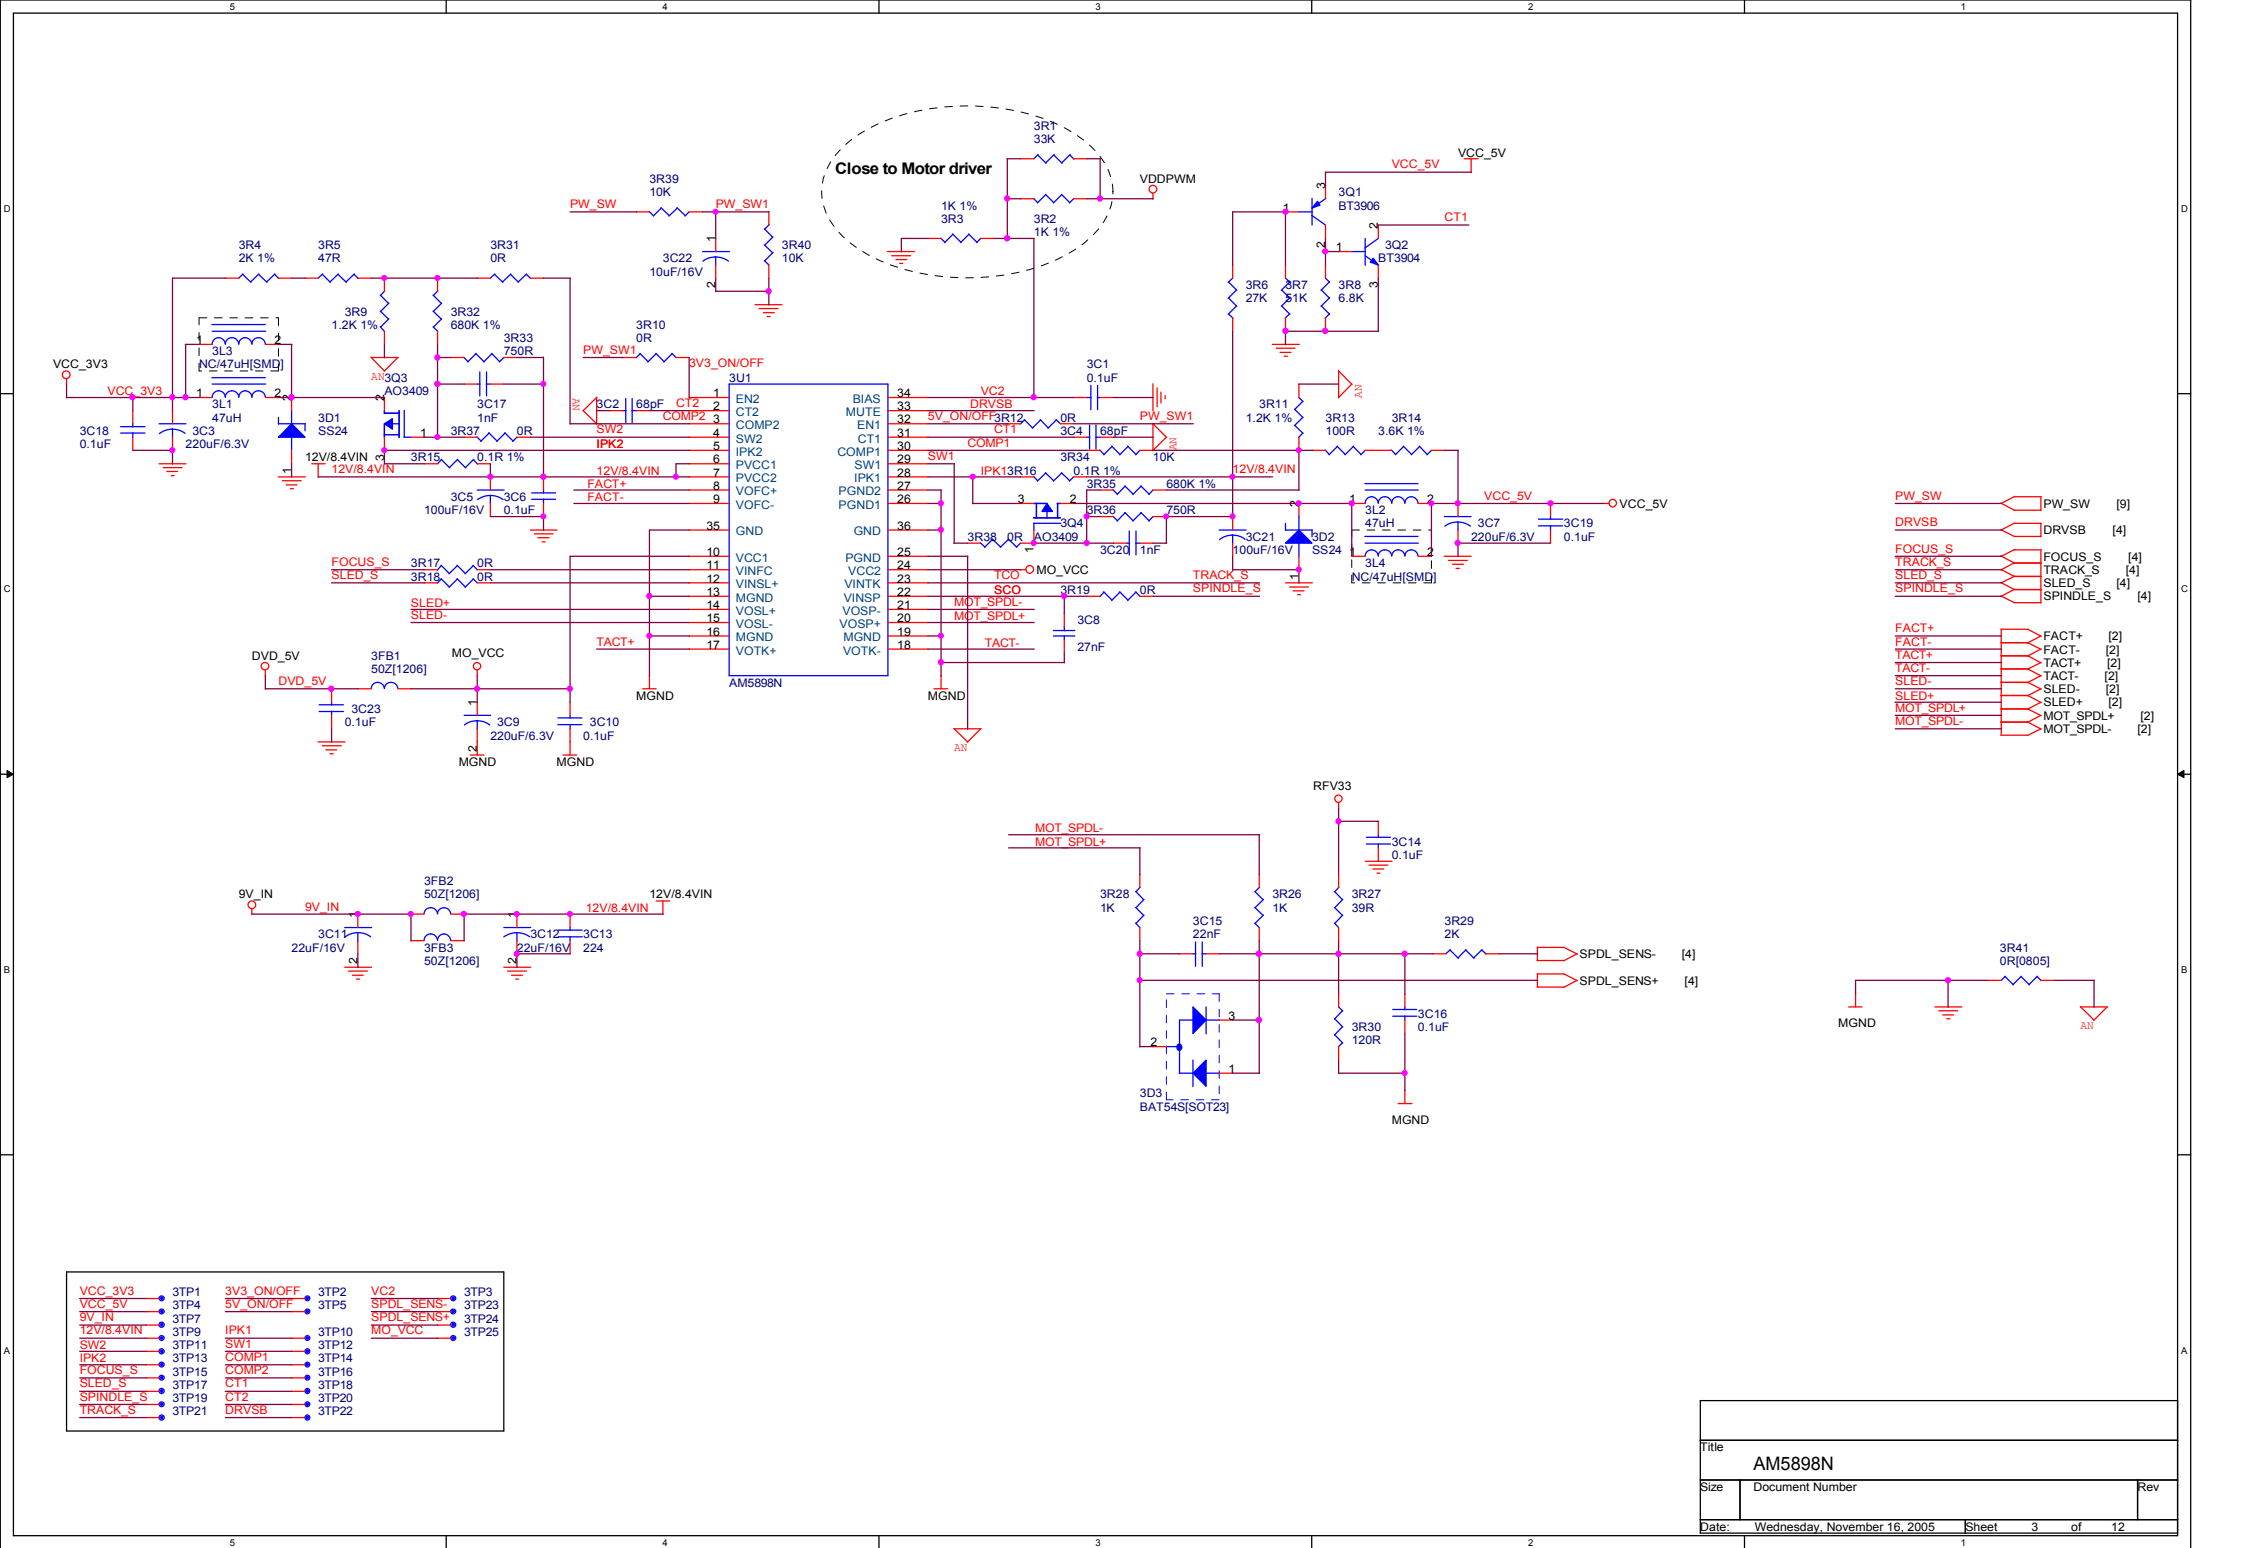


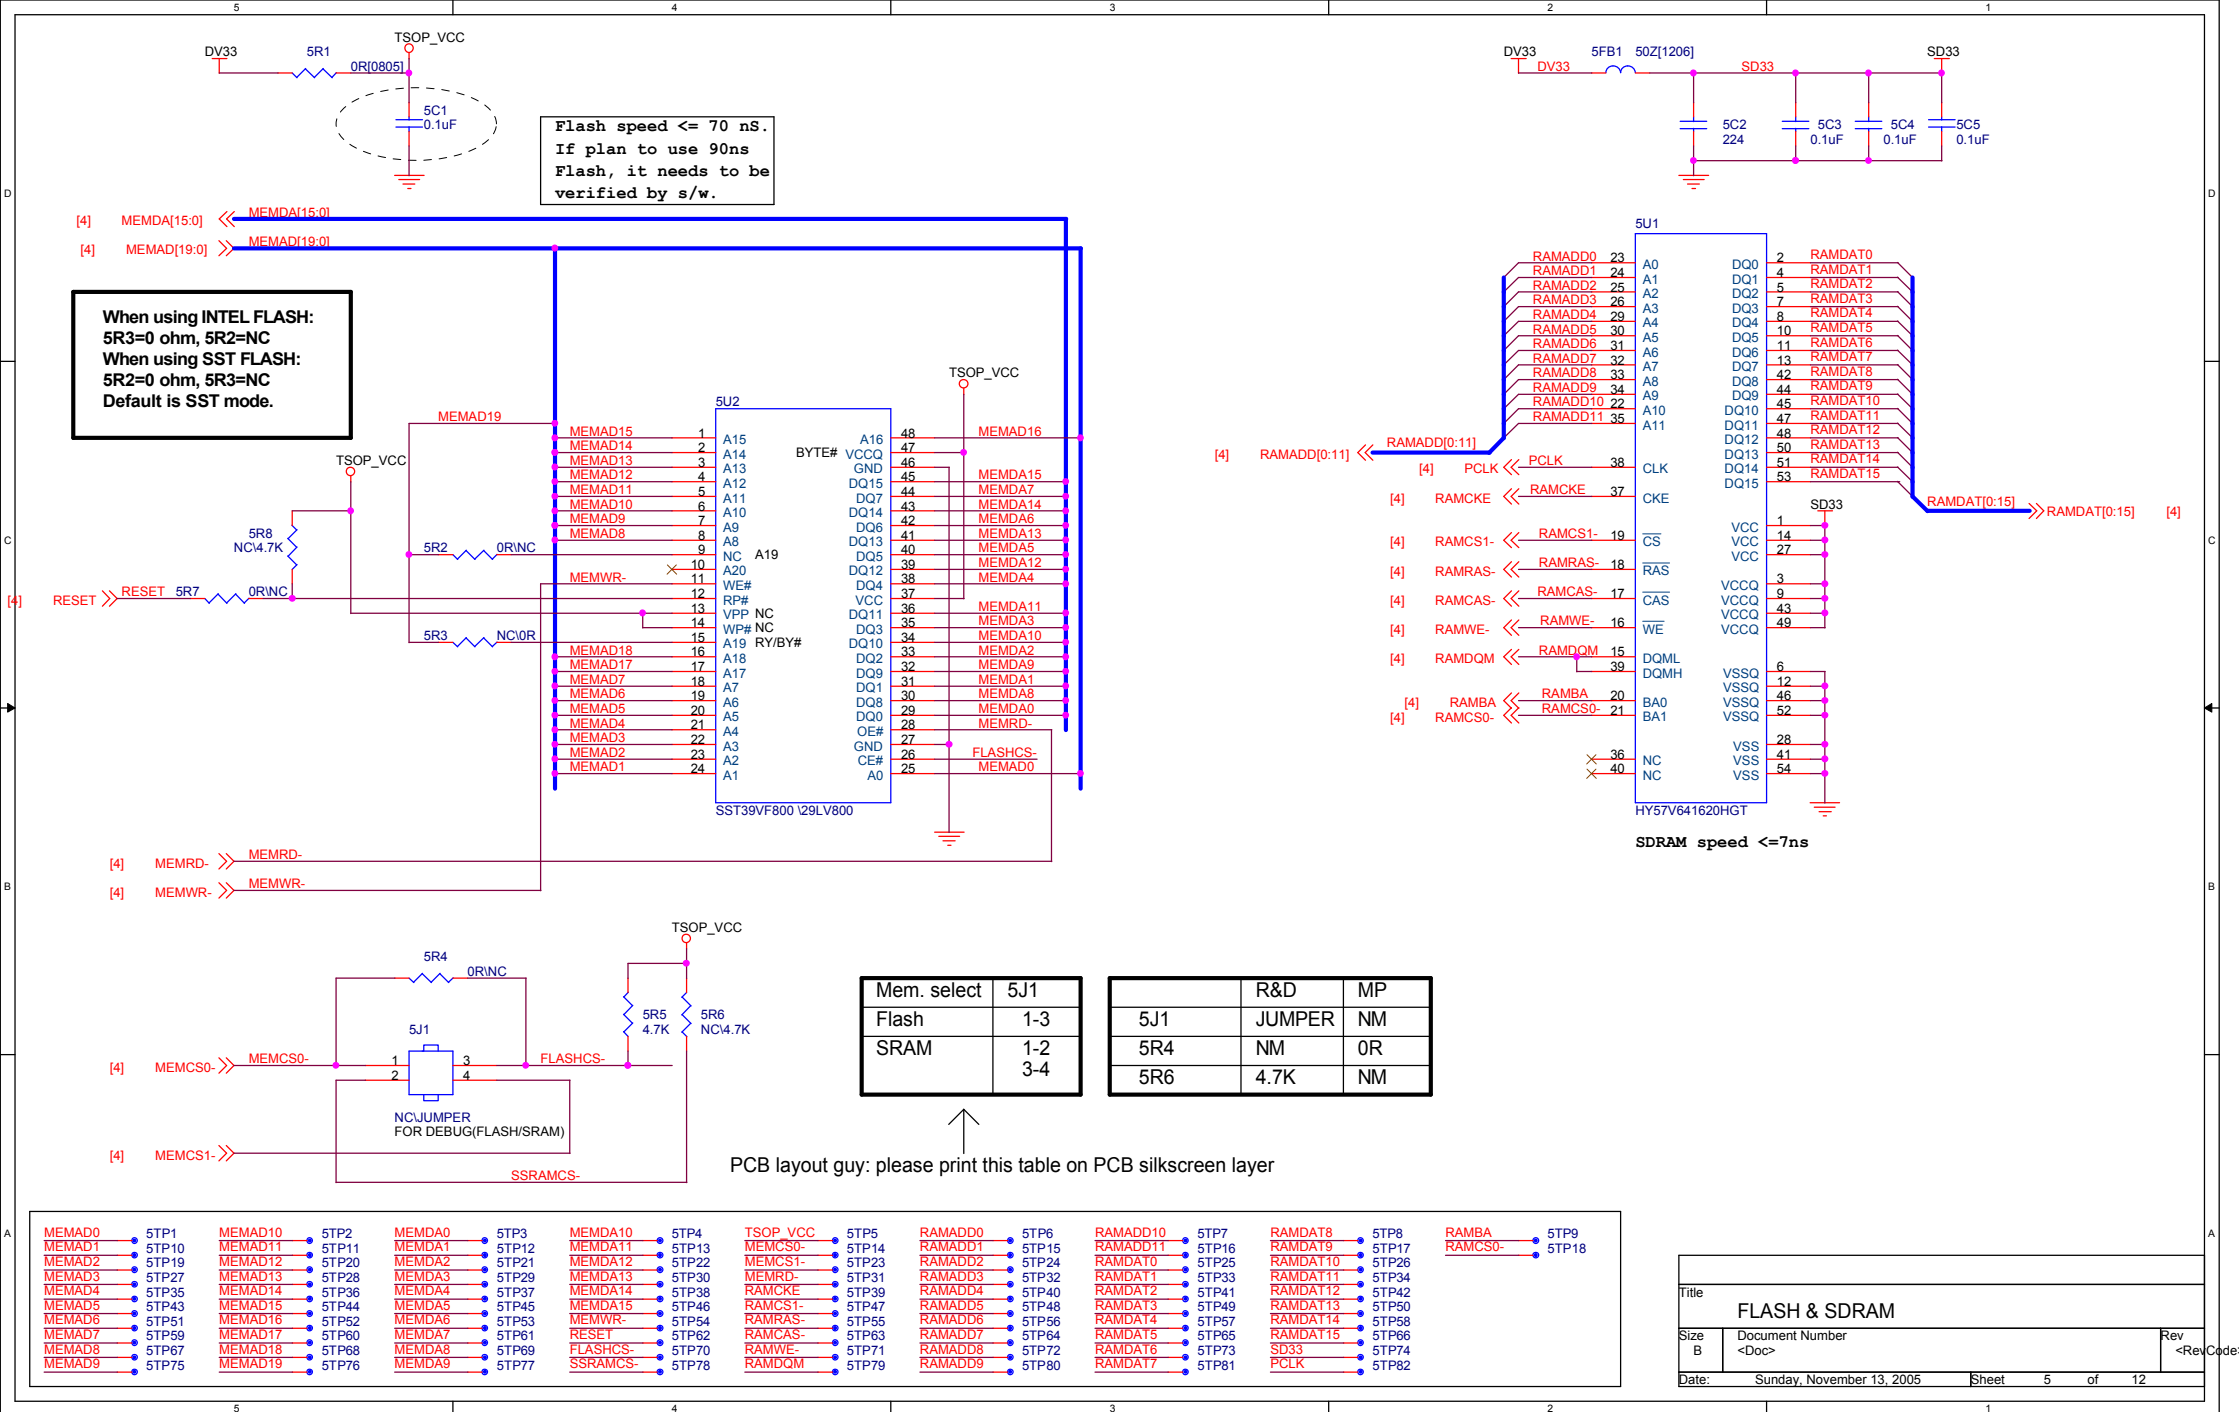

Title			
FLASH & SDRAM			
Size B	Document Number <Doc>		Rev <Rev Code>
Date:	Sunday, November 13, 2005	Sheet	5 of 12

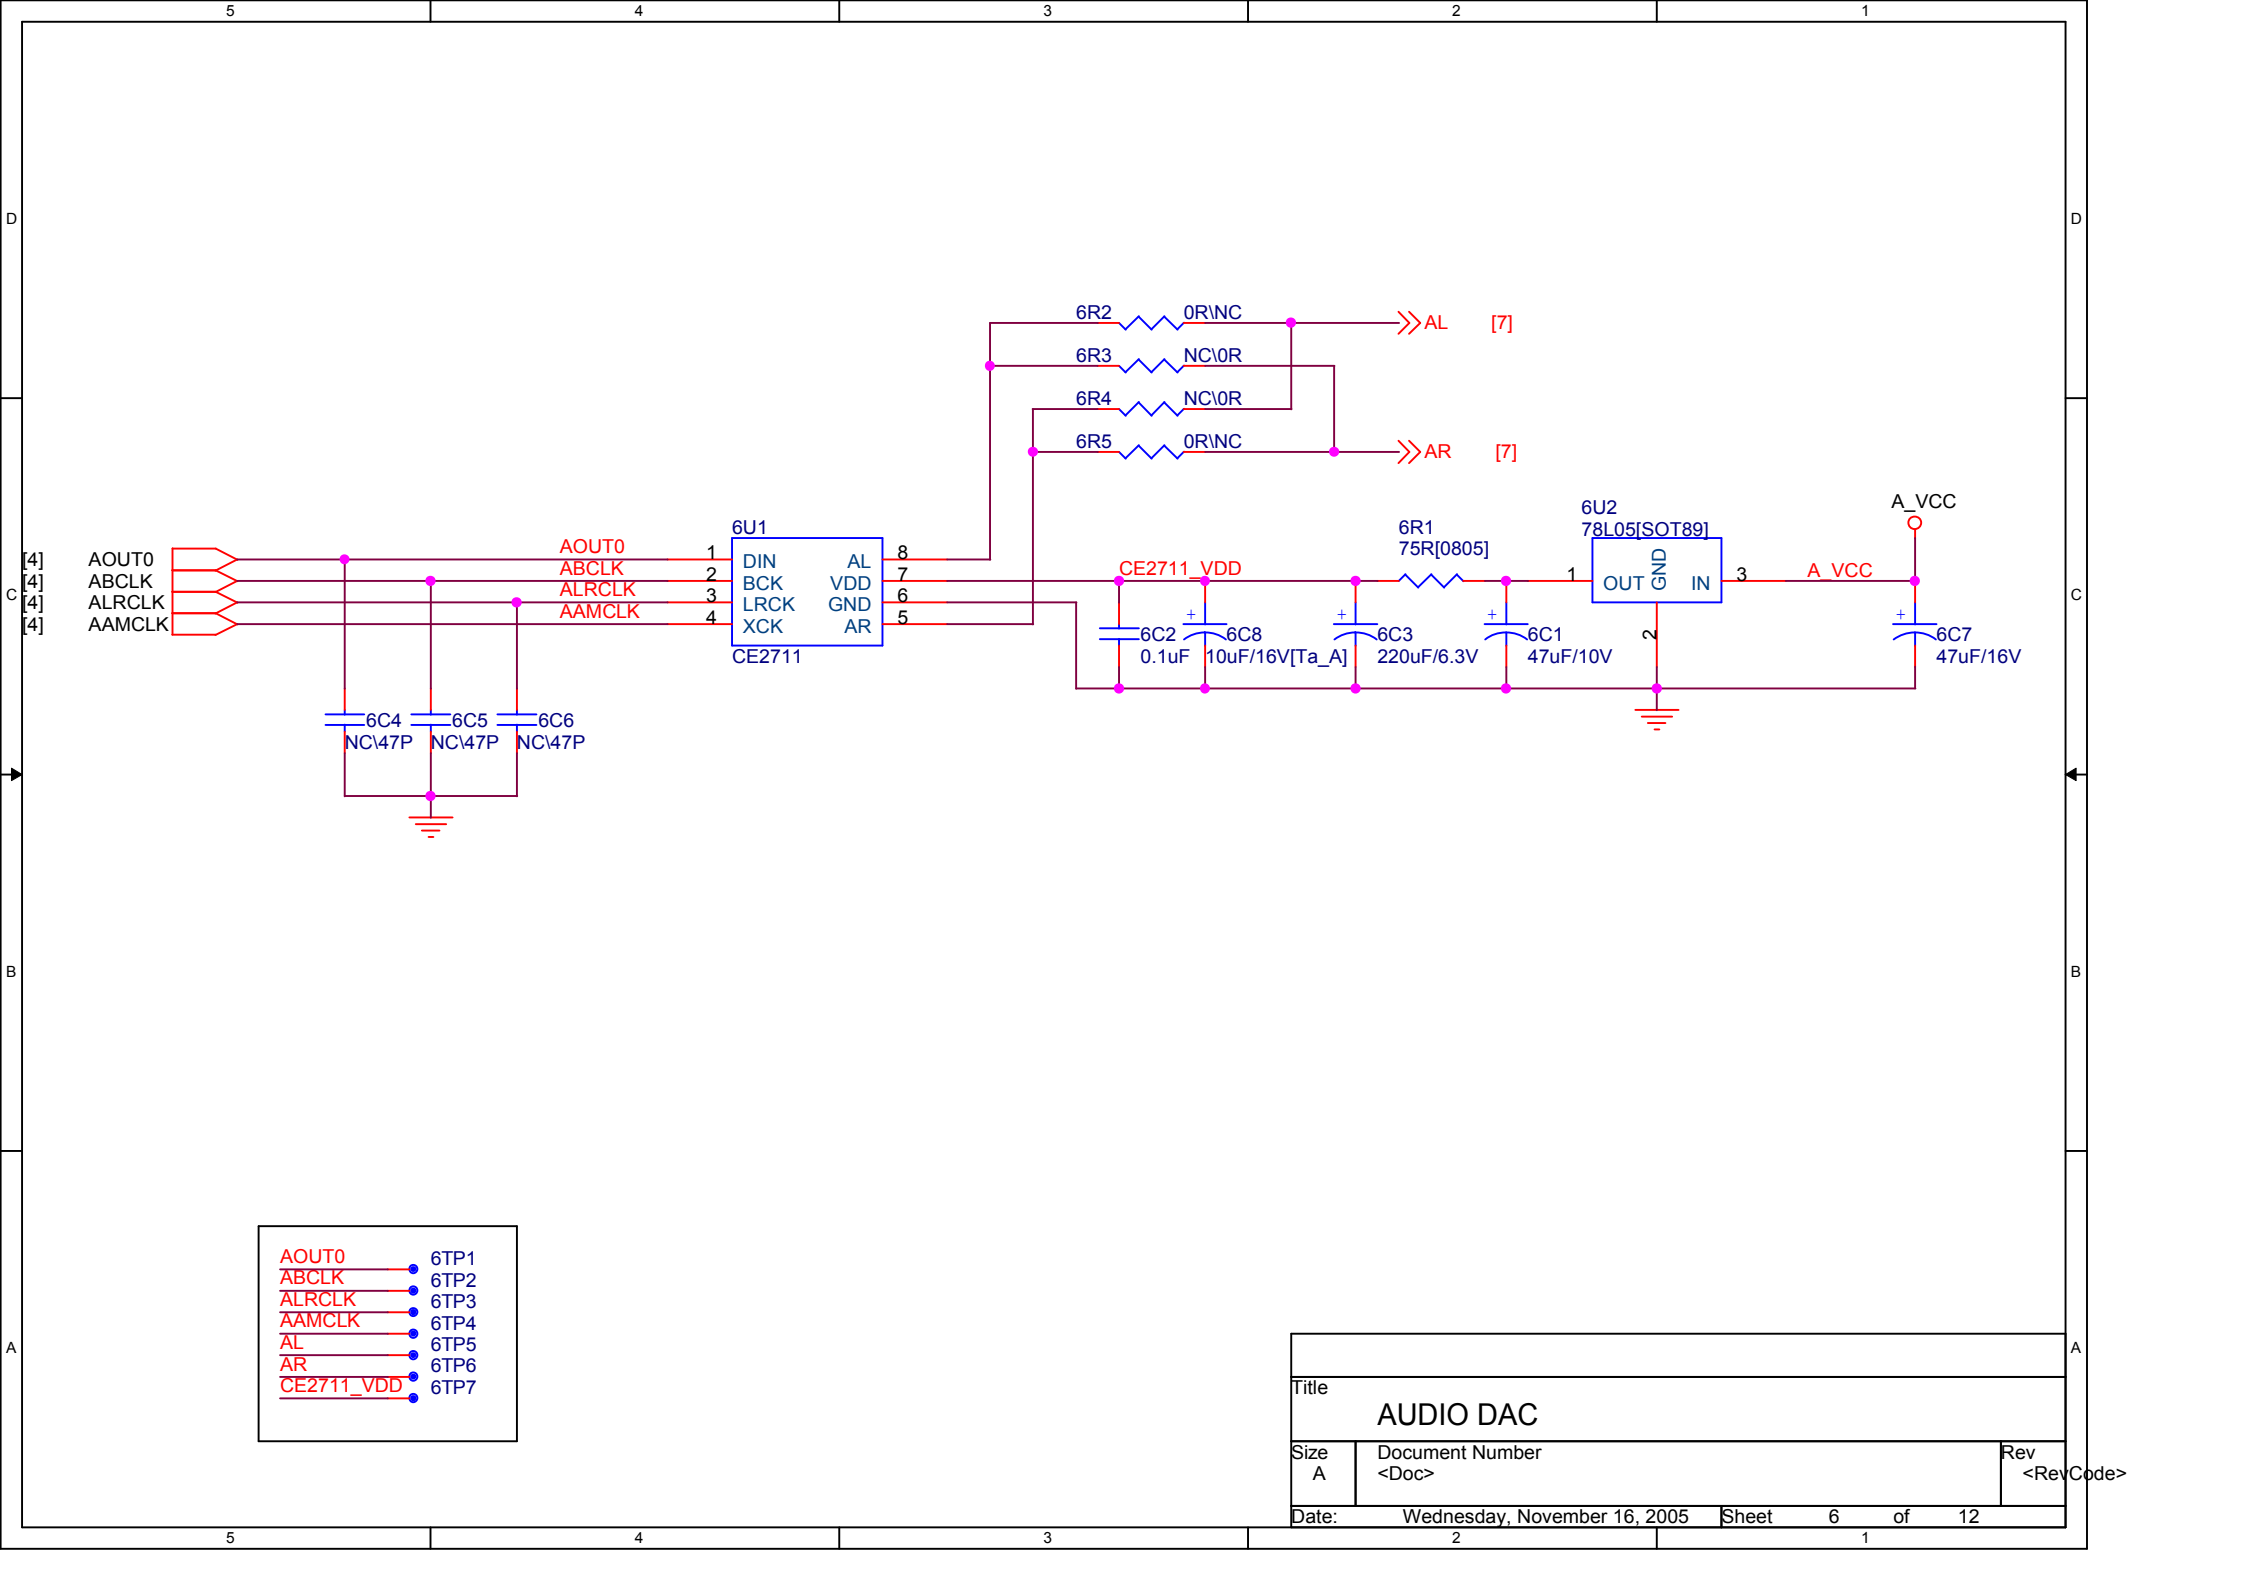

Choose the values in "{" when using V882 internal audio DAC

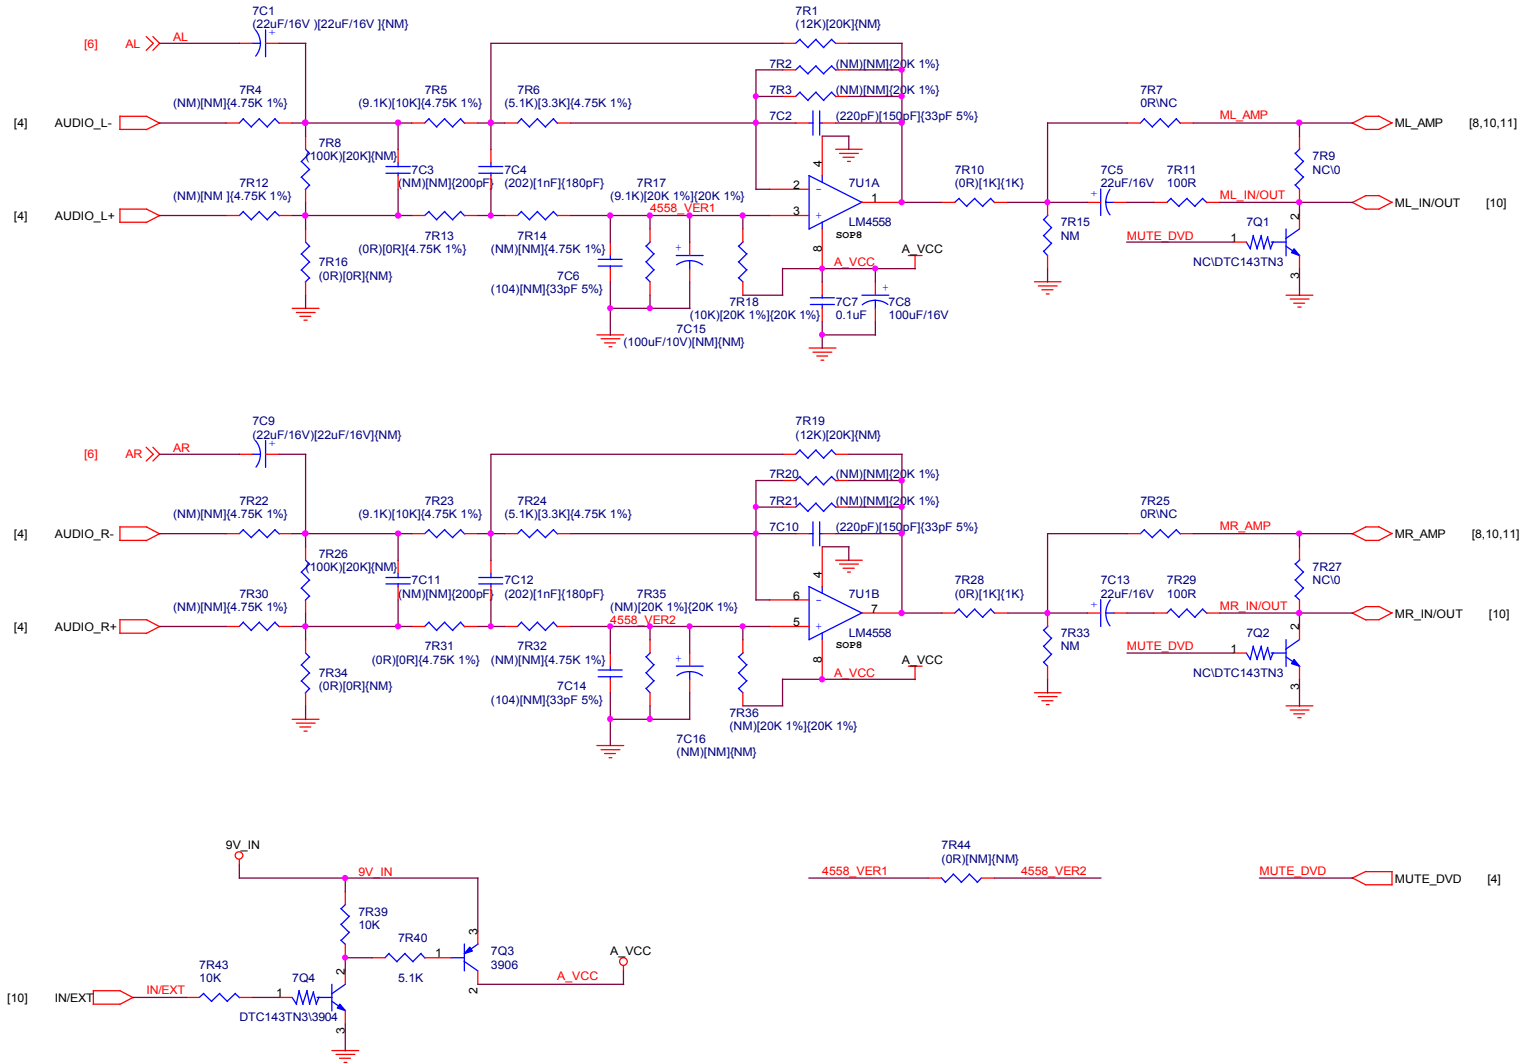






ML AMP 7TP1
ML IN/OUT 7TP3
4558 VER1 7TP4
4558 VER2 7TP5
MR AMP 7TP6
MR IN/OUT 7TP7
AUDIO L- 7TP8
AUDIO L+ 7TP9
AUDIO R- 7TP10
AUDIO R+ 7TP11

A_VCC 7TP2


备注:


- 1."()"内数值为ZR36862时使用--MALATA推荐值;
- 2."["]"内数值为ZR36862时使用--ZORAN推荐值;
- 3."{" }"内数值为ZR36882内部AUDIO DAC时使用--ZORAN推荐值;
- 4.无括号的数值为共用值。


Title		
LM4558		
Size	Document Number	Rev
A3	<Doc>	<RevCode>
Date:	Wednesday, November 16, 2005	Sheet 7 of 12

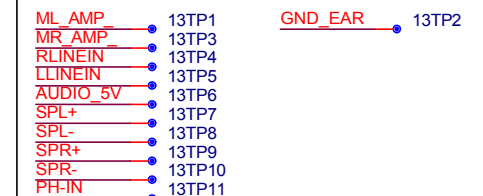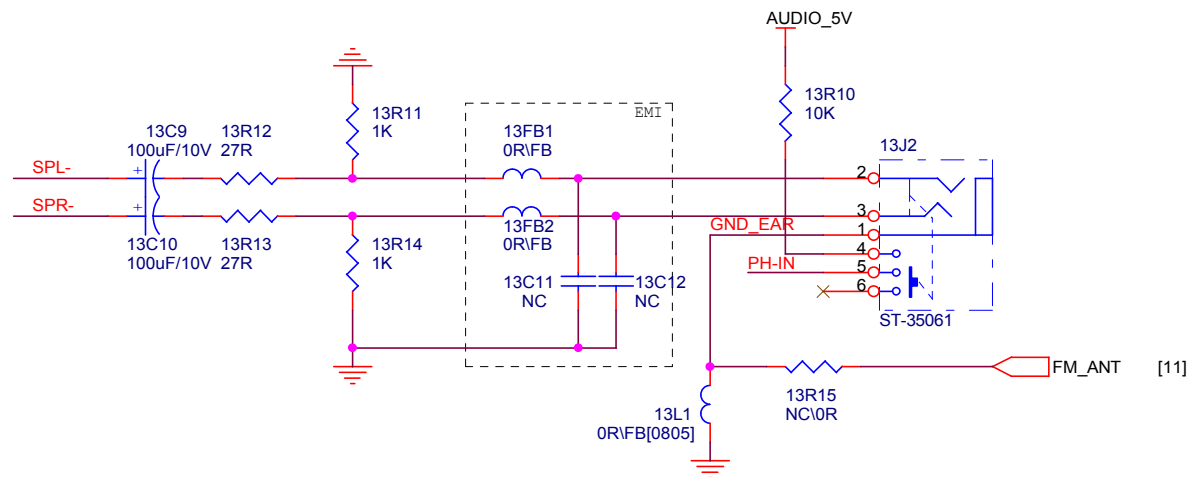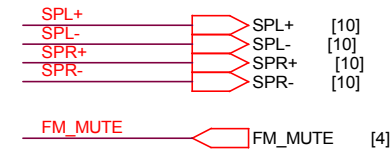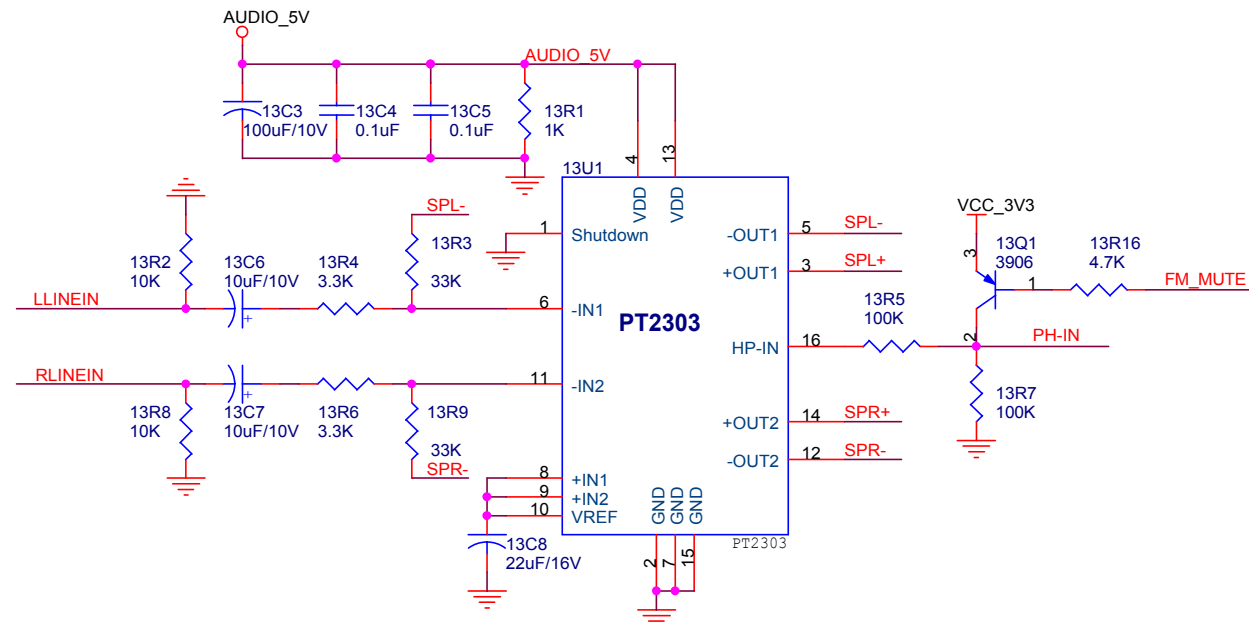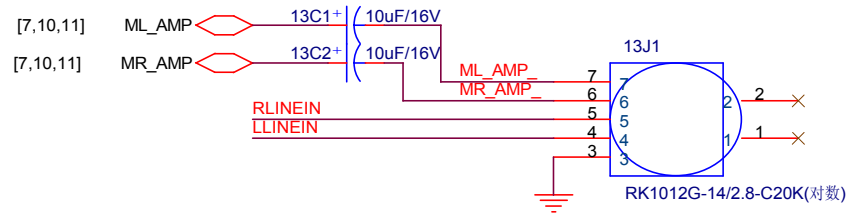

Title			
PT2303			
Size	Document Number	Rev	
A4	<Doc>	<RevCode>	
Date:	Thursday, November 17, 2005	Sheet	8 of 12

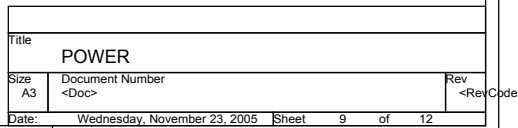

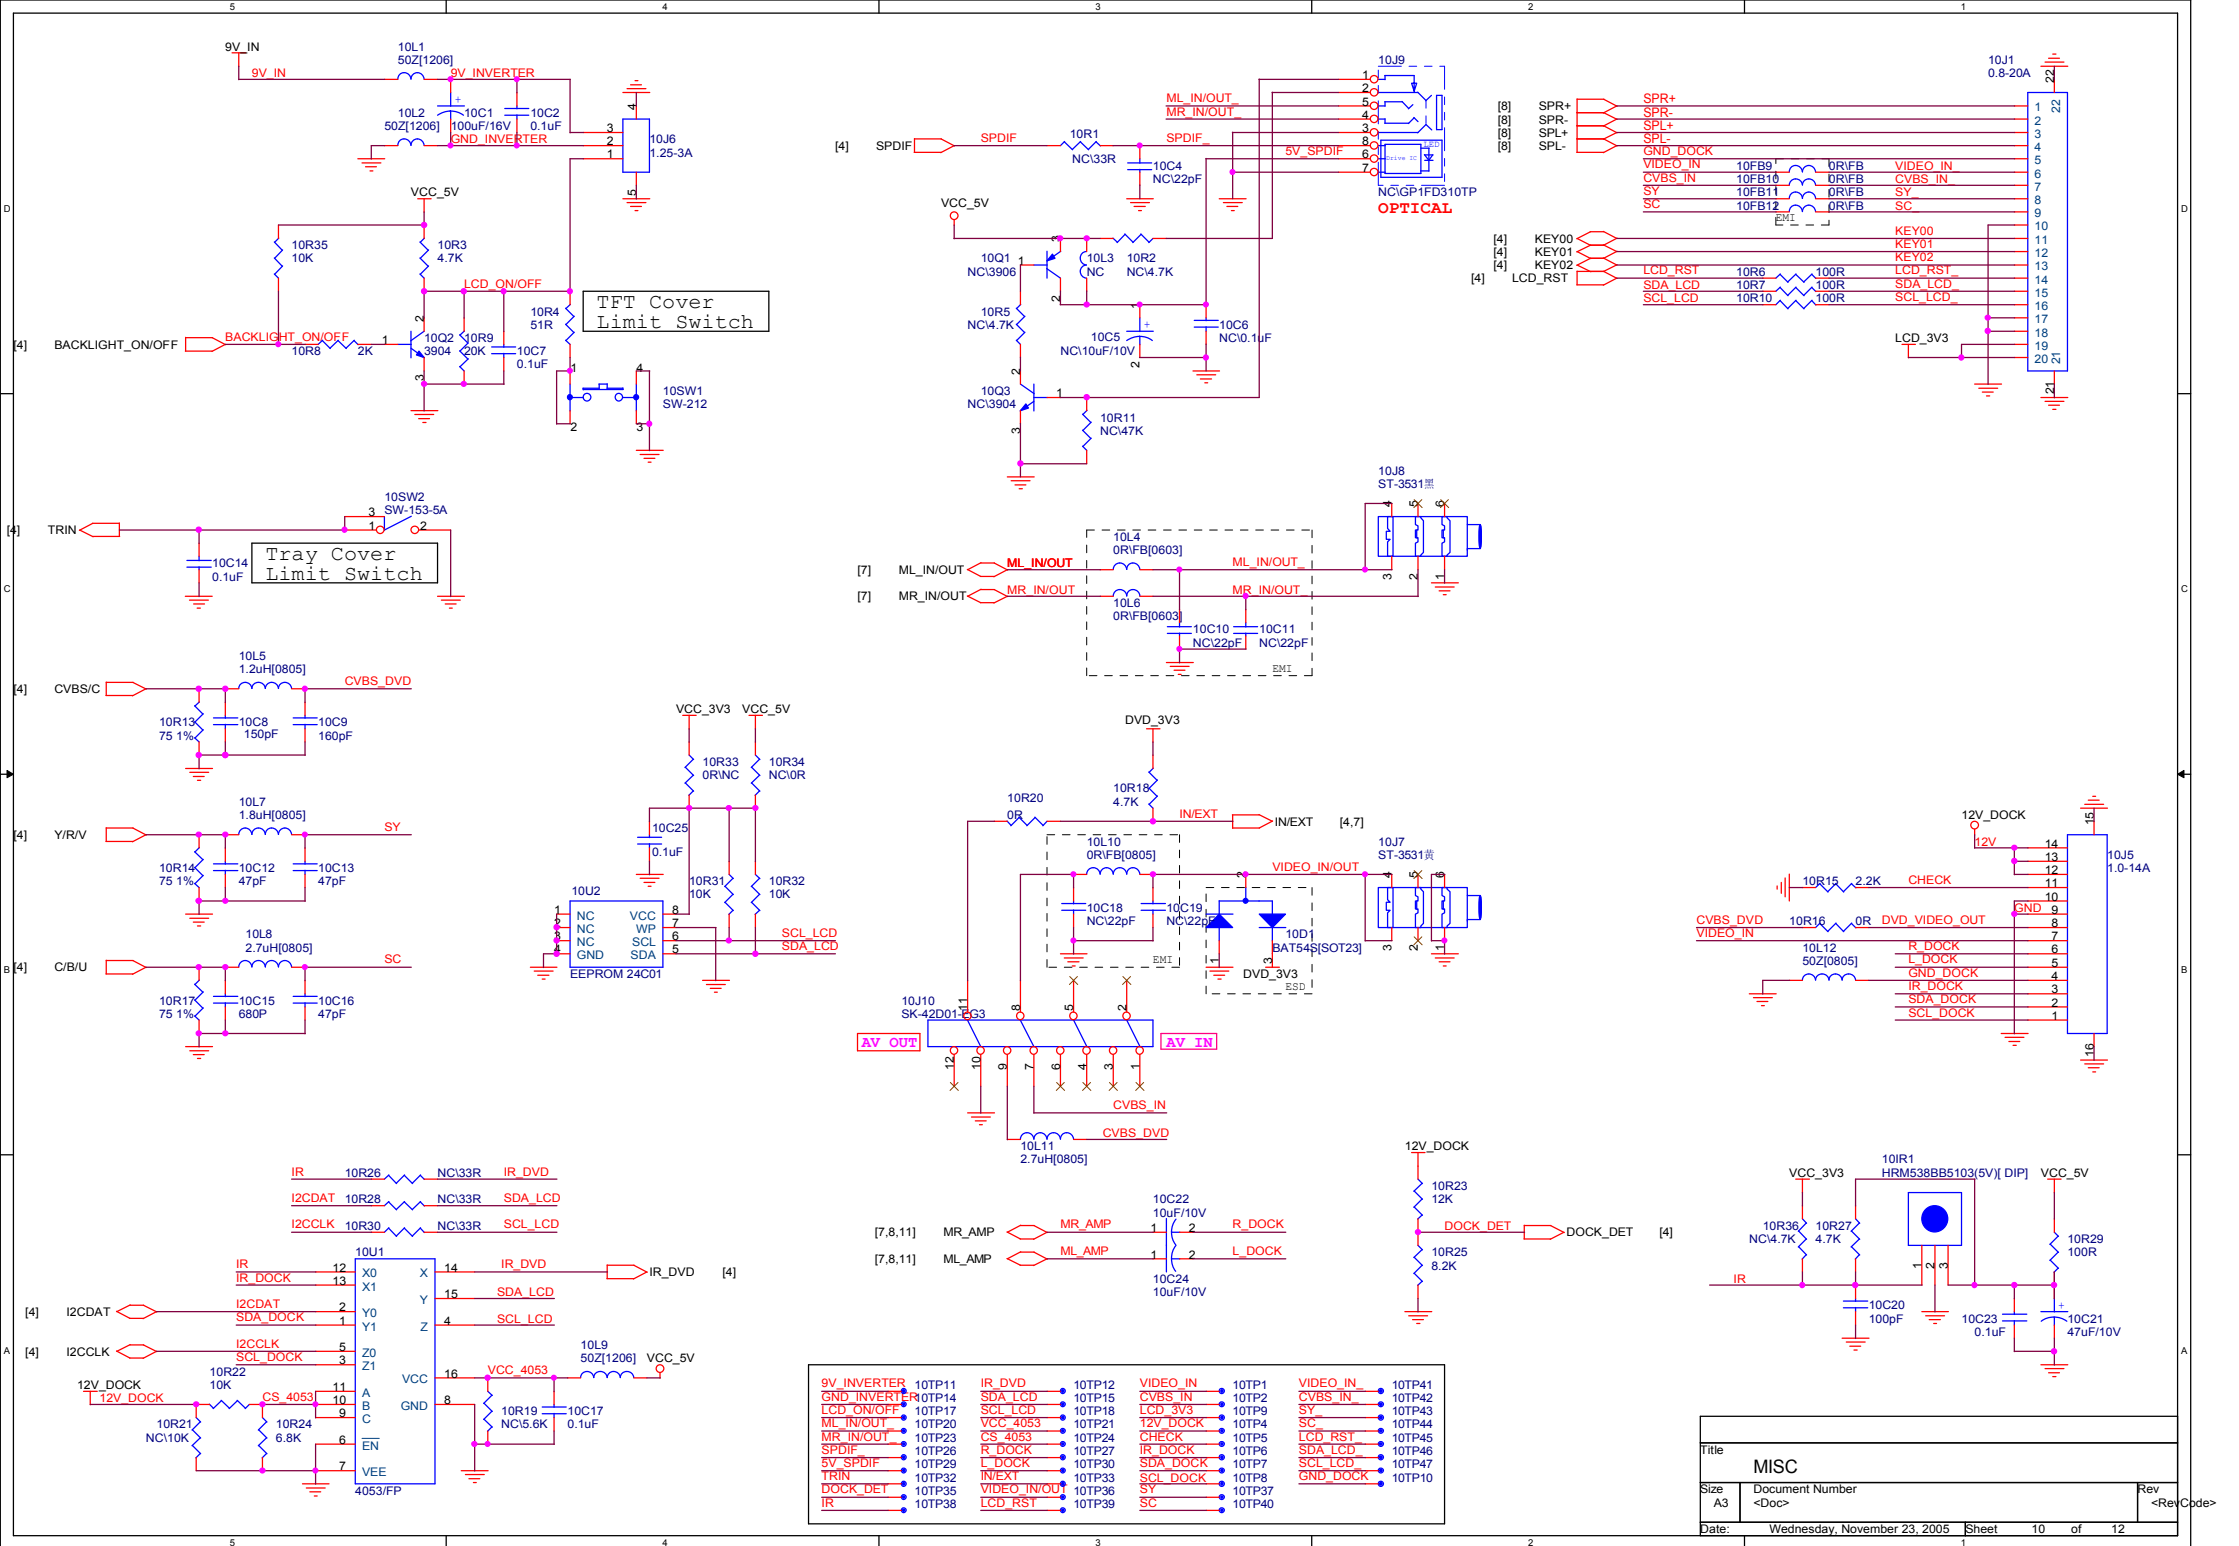

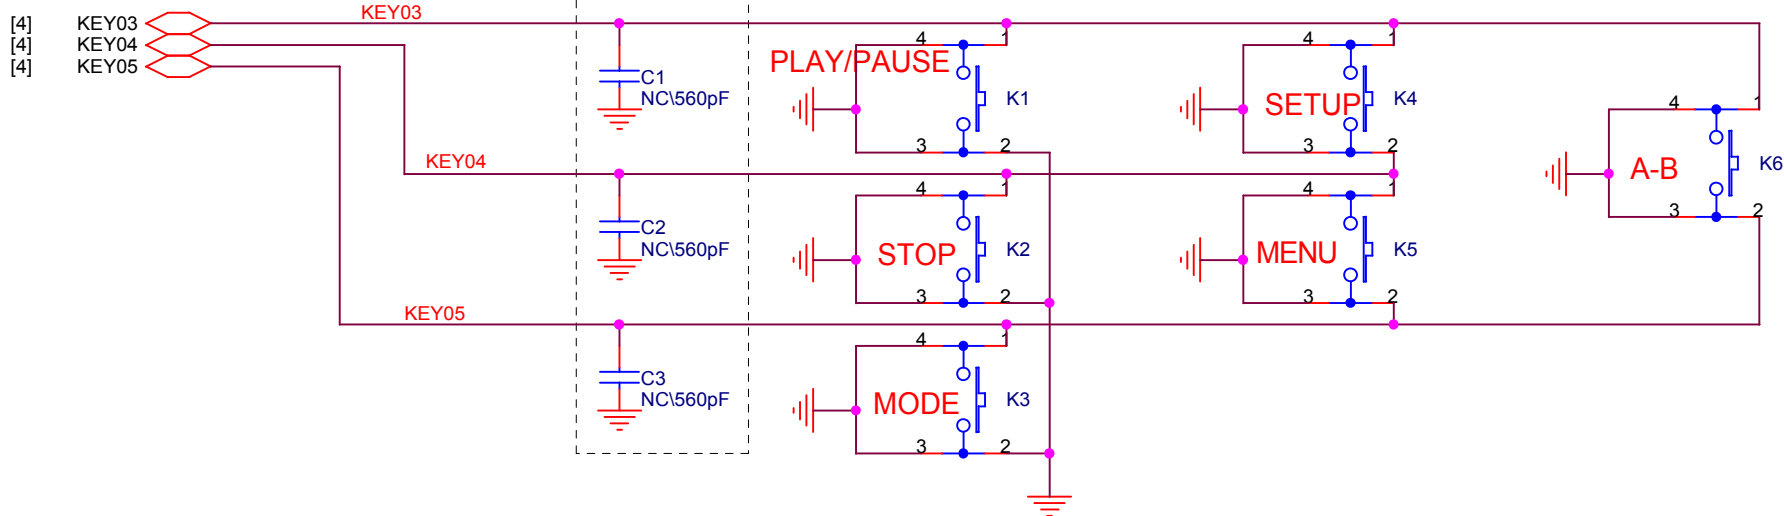

键扫方法：

1. 第一列省略。
2. 第二列：先将KEY0设置为输出低电平，KEY1~5再扫。
3. 第三列：先将KEY1设置为输出低电平，KEY2~5再扫。
4. 以下类推。

Title		
KEY		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Sunday, November 13, 2005	Sheet 12 of 12