



TEST REPORT

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Applicant: SVAT ELECTRONICS
4080 Montrose Road, Niagara Falls, ON, L2H1J9
Canada.

Description of Samples: Model name: Ovia™ Digital Baby Video Monitor
(Baby Unit)
Brand name: Levana
Model no.: Ovia™30024BU
FCCID: SMH-30024BU

Date Samples Received: 2013-05-07

Date Tested: 2013-05-08 to 2013-06-15

Investigation Requested: FCC Part 15 Subpart C, Section 15.247

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----

Checked by:

Approved by:-

Ray Cheung
Project Engineer
Wireless & Telecom Department

Jeff Pong
Operation Manager
Wireless & Telecom Department



CONTENT:

Cover	Page 1 of 30
Content	Page 2-3 of 30
<u>1.0</u> <u>General Details</u>	
1.1 Test Laboratory	Page 4 of 30
1.2 Applicant Details	Page 4 of 30
1.3 Equipment Under Test [EUT]	Page 5 of 30
1.4 Related Submittal(s) Grants	Page 5 of 30
<u>2.0</u> <u>Technical Details</u>	
2.1 Investigations Requested	Page 6 of 30
2.2 Test Standards and Results Summary	Page 6 of 30
<u>3.0</u> <u>Test Methodology</u>	
3.1 Radiated Emission	Page 7 of 30
3.2 Field Strength Calculation	Page 7 of 30
3.3 Conducted Emission	Page 7 of 30
<u>4.0</u> <u>Test Results</u>	
4.1 Number of Frequency Hopping	Page 8 of 30
4.2 20dB Bandwidth Measurement	Page 9-10 of 30
4.3 Hopping Channel Carrier Frequency Separation	Page 11 of 30
4.4 Average Time of Occupancy	Page 12-14 of 30
4.5 Pseudorandom Hopping Algorithm	Page 15 of 30
4.6 Band Edge Measurement	Page 16-17 of 30
4.7 Maximum Output Power	Page 18-20 of 30
4.8 Out of Band Emissions and Emissions in Restricted Bands	Page 20-25 of 30
4.9 Conducted Emission on AC Mains	Page 26-28 of 30



5.0 **RF Exposure Compliance Requirement**

Page 29 of 30

6.0 **List of Measurement Equipments**

Page 30 of 30

Appendix A

Photos of Test Setup

Appendix B

External EUT Photos

Appendix C

Internal EUT Photos



1.0 **General Details**

1.1 **Test Laboratory**

SEM. Test Compliance Service Co., Ltd
3/F, Jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen
Registration Number: 994117

Test By:

A handwritten signature in blue ink that reads 'John Zhi'.

John Zhi

1.2 **Applicant Details**
Applicant

SVAT ELECTRONICS

4080 Montrose Road, Niagara Falls, ON, L2H 1J9 Canada

Manufacturer

Alford Industries Ltd

Unit 02, 6th Floor, Yen Sheng Centre, 64 Hoi Yuen Road,
Kwun Tong, Kowloon, Hong Kong



1.3 Equipment Under Test [EUT]

Description of EUT

Product Description:	Ovia™ Digital Baby Video Monitor (Baby Unit)
Model No.:	Ovia™ 30024BU
Brand Name:	Levana
FCCID:	SMH-30024BU
Rating:	- DC 5.9V, 1000mA powered by AC/DC power adaptor
Operated Frequency:	2408.625 – 2473.875 MHz
No. of Operated Channel:	24
Accessories and Auxiliary Equipments:	- AC/DC power adaptor.

Antenna Type:	Integral
Manufacture of Antenna:	Alford Industries Ltd.
Antenna Gain:	0 dBi
Antenna Model:	N/A

General Operation of EUT

The Equipment Under Test (EUT) is a camera of wireless baby monitor system which operated at 2.4GHz.

FHSS Operation Principle:

This module is controlled by microchip to generate Pseudorandom Frequency Hopping Sequence, this module support 24 hopping channels. Refer to section 4.5 of this report to have more detail of Pseudorandom Hopping Algorithm.

1.4 Related Submittal(s) Grants

This is a signal application subjected to Certificate Authorization.



2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15 and ANSI C63.4: 2003

2.2 Test Standards and Results Summary Tables

Test Condition	Test Requirement	Test Result	
		Pass	N/A
Number of Frequency Hopping	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth Measurement	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Hopping Channel Carrier Frequency Separation	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Average Time of Occupancy	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurement	Section 15.247	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Maximum Output Power	Section 15.247 (b1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Emission	Section 15.247 (d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission in Restricted Band	Section 15.247 (d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Conducted Emission on AC Mains	Section 15.207	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RF Exposure	Section 15.247 (i)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	Section 15.203	<input checked="" type="checkbox"/> See note 1	<input type="checkbox"/>

Note 1 : The EUT uses a permanently attached antenna, which in accordance to Section 15.203, is considered sufficient to comply with the provisions of this section.

Remark: N/A - Not Applicable



3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$\begin{aligned} \text{FS} &= \text{R} + \text{System Factor} \\ \text{System Factor} &= \text{AF} + \text{CF} + \text{FA} - \text{PA} \end{aligned}$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The test was performed in accordance with ANSI C63.4: 2003, with the following: initial measurements were performed in peak and average detection modes on the live line of personal computer, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.



4.0 Test Results

4.1 Number of Hopping Frequency

Test Requirement: FCC part 15 section 15.247 (a1)(iii)
Test Date: 2013-05-08
Mode of Operation: Transmitting mode.
Detector Function: Max Hold

Result: PASS

Measured Result :


Operating Channel Frequency in sequence (MHz):

2408.625; 2412.000; 2414.250; 2417.625; 2422.125; 2425.500; 2427.750; 2430.000; 2432.250;
2434.500; 2436.750; 2439.000; 2442.375; 2444.625; 2448.000; 2450.250; 2453.625; 2457.000;
2459.50; 2461.500; 2464.875; 2467.125; 2470.500; 2473.875

Limit for Number of Hopping Channel [Section 15.247 (a1)(iii)]

At least 15 non-overlapping channels for 2400-2483.5MHz.

Result data graph shows the number of operation channels:

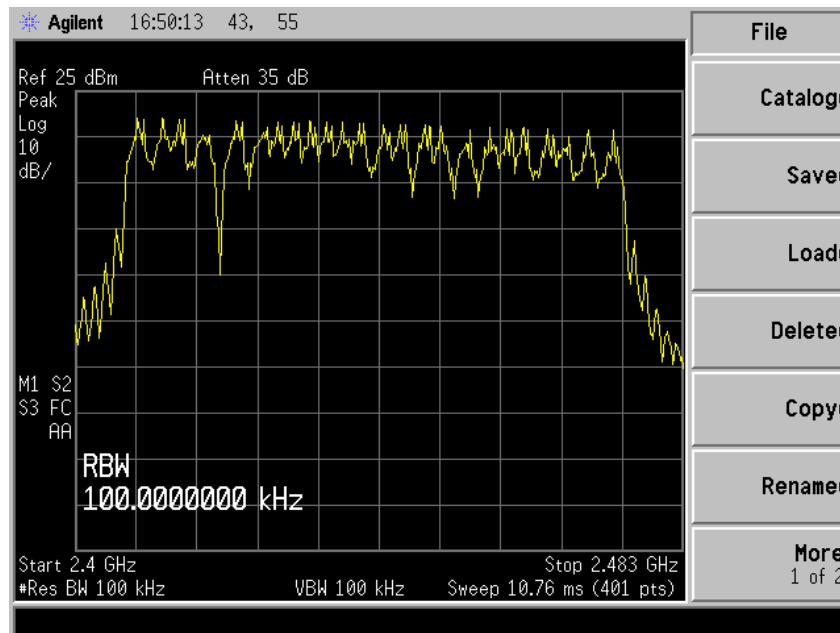



4.2 20dB Bandwidth Measurement

Test Requirement: FCC part 15 section 15.247 (a1)
 Test Date: 2013-05-08
 Mode of Operation: Transmitting mode.
 Detector Function: Max Hold


Test Setup:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Channel	Measured frequency (MHz)	20dB Bandwidth (MHz)
Lowest	2408.625	3.557
Middle	2442.375	3.556
Highest	2473.875	3.539


This result is used for checking the hopping channel carrier frequencies separation.

Result data graph shows 20 dB bandwidth of Lowest Channel, BW = 3.557MHz

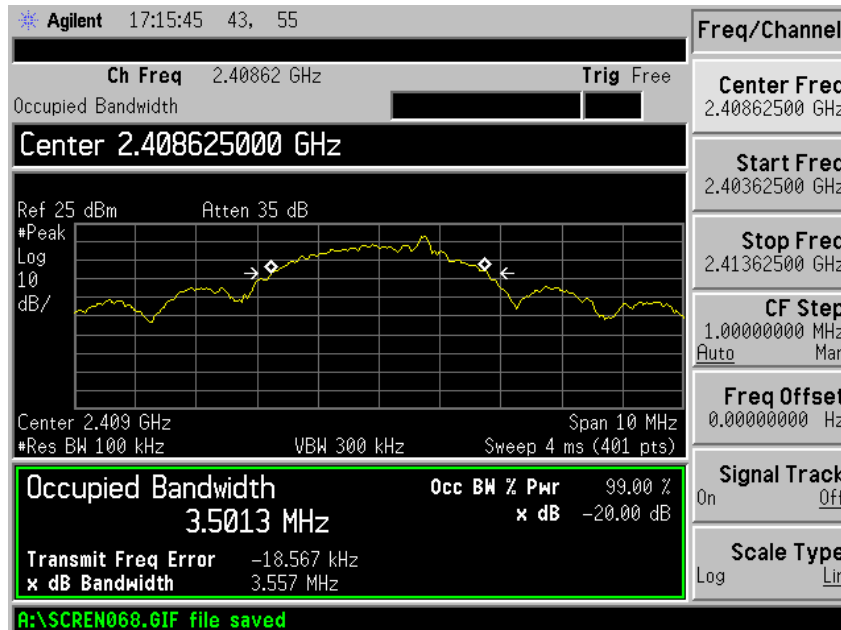




Result data graph shows 20 dB bandwidth of Middle Channel, BW = 3.556MHz

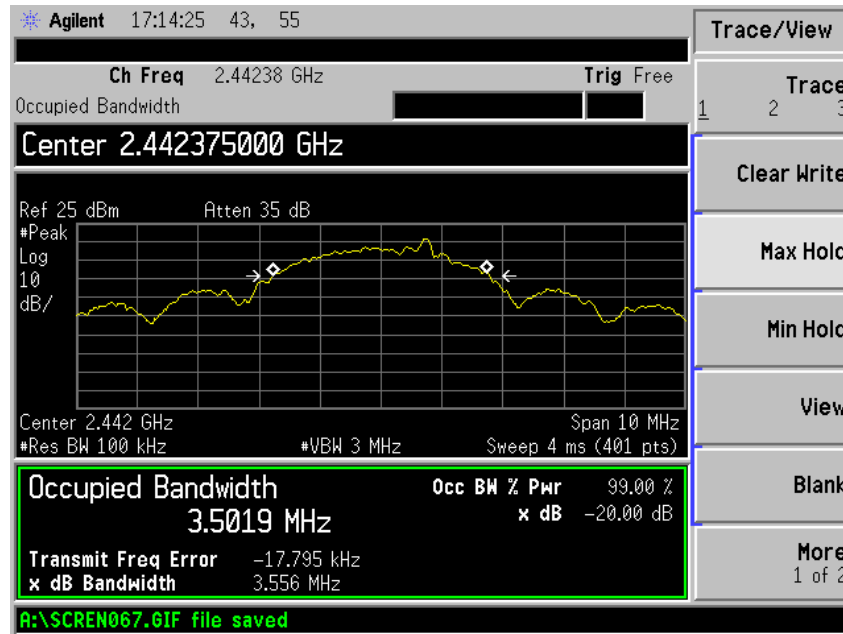

Result data graph shows 20 dB bandwidth of Highest Channel, BW = 3.539MHz

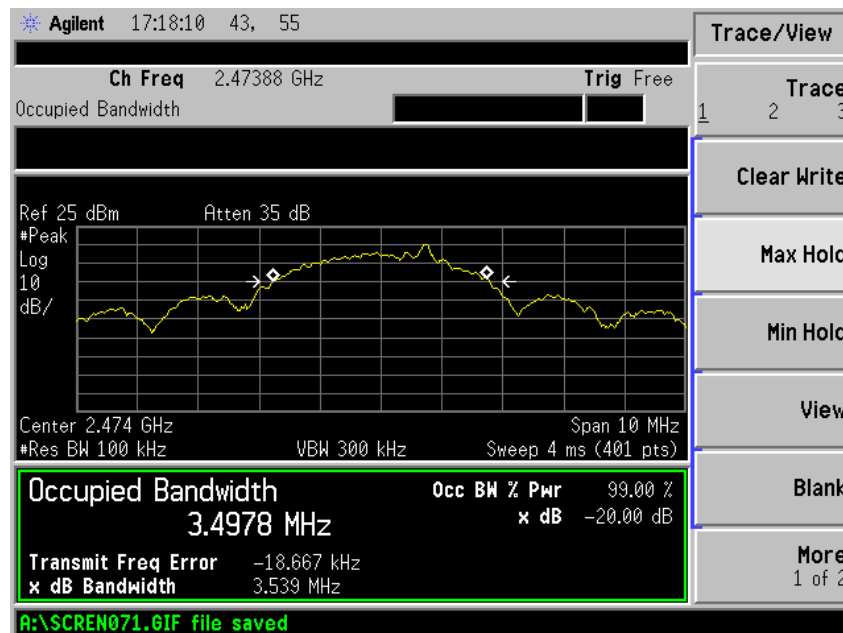



4.3 Hopping Channel Carrier Frequency Separation

Test Requirement: FCC part 15 section 15.247 (a1)
 Test Date: 2013-05-08
 Mode of Operation: Transmitting mode.
 Detector Function: Max Hold

Result: PASS


Measured Result :

Refer to the delta marker, the worst frequency separation between two adjacent channels is 2.250MHz, therefore, the requirement of channel separated by a minimum of 25kHz of the hopping channel is applied.

Limits for Hopping Channel Separation [Section 15.247 (a1)]:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25KHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Result data graph shows the channel separation:

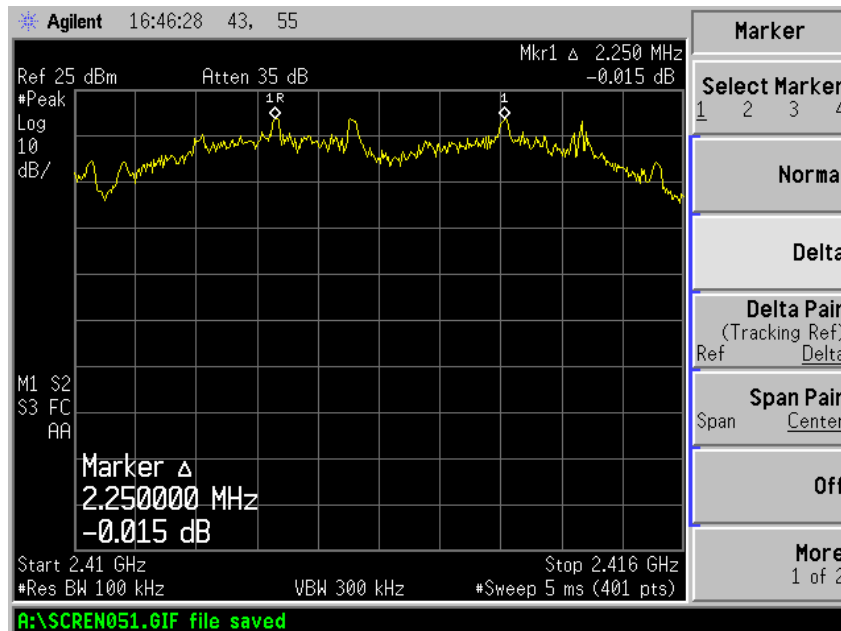



4.4 Average Time of Channel Occupancy

Test Requirement:	FCC part 15 section 15.247 (a1)(iii)
Test Date:	2013-05-08
Mode of Operation:	Transmitting mode.
Detector Function:	Zero span

Result : PASS

Measured Result :

Each transmission only 24 channels will be used.

Observe time = 24 channels x 0.4s = 9.6s

There are 17 pulses within 9.6s

And one set of pulses = 2.06ms

Therefore, the average channel occupancy times (ms)

= $2.06\text{ms} \times 17 \times 9.6\text{s} / 9.6\text{s}$


So, total transmitting time is 0.043s. (<0.4s).

Limits for Average Time of Occupancy [Section 15.247 (a1)(iii)]:


The average time of occupancy on any channel shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed.



Result data graph shows total 24 channels are used

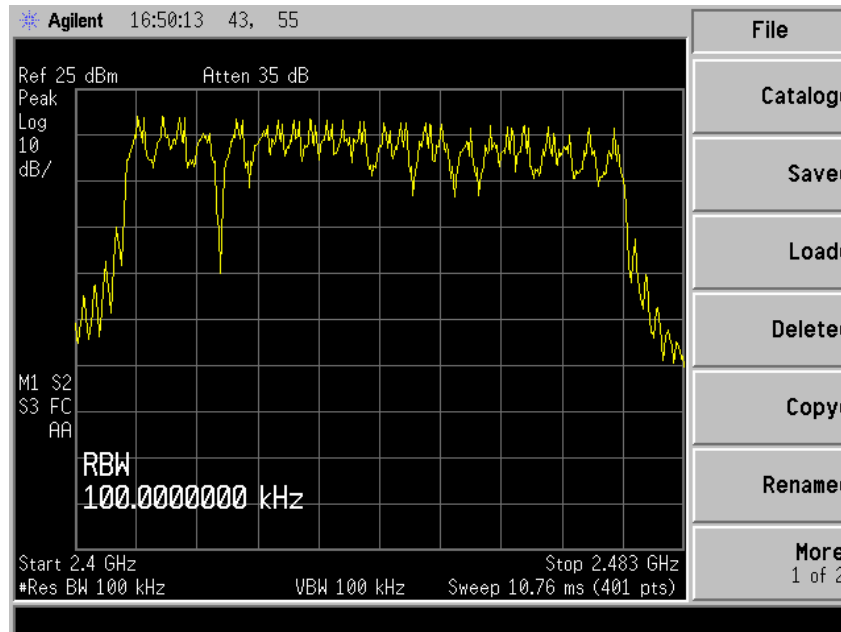


Result data graph shows total 17 pulses with 9.6s

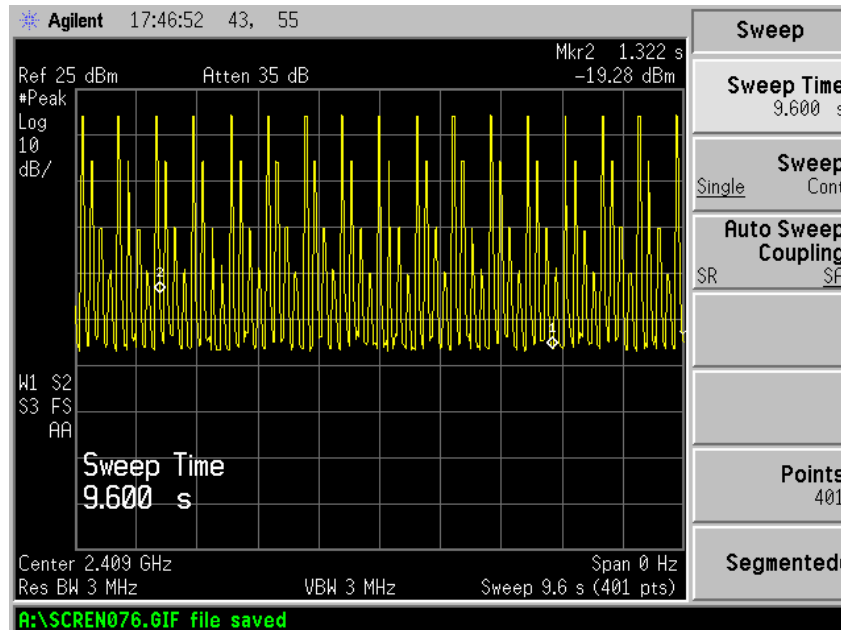



Result data graph zooms into detail, one pulse period is 2.06ms

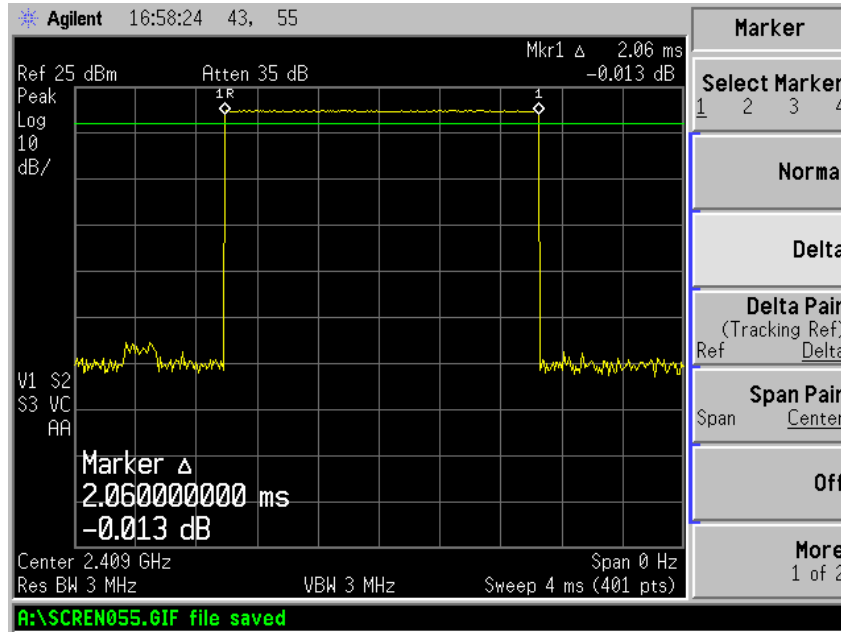



4.5 Pseudorandom Hopping Algorithm

Pseudorandom Frequency Hopping

Ovia™ 30024BU uses FHSS technology with 24 hopping frequencies. Each channel frequency is selected from a pseudorandom ordered list of hopping frequencies, from 2408.625MHz to 2473.875MHz. A single data frame is transmitted on each frequency location before skipping to the next hopping frequency in the list.

Pseudorandom Frequency Hopping Sequence

2408.625; 2412.000; 2414.250; 2417.625; 2422.125; 2425.500; 2427.750; 2430.000; 2432.250;
2434.500; 2436.750; 2439.000; 2442.375; 2444.625; 2448.000; 2450.250; 2453.625; 2457.000;
2459.250; 2461.500; 2464.875; 2467.125; 2470.500; 2473.875;

Requirement for Pseudorandom Hopping Algorithm [Section 15.247 (a1)]:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on average by the transmitter.



4.6 Band Edge Measurement

Test Requirement:	FCC part 15 section 15.247
Test Date:	2013-05-08
Mode of Operation:	Transmitting mode.
Detector Function:	Max Hold

Result: PASS


Measured Result :

Refer to the figure, it shows the frequency of lower band edge and upper band edge separately.

Limits of Band Edge for Carrier Frequencies Operated within the Bands [Section 15.247]:

The carrier frequencies should operate within 2400-2483.5MHz.


Result data graph shows the frequency of lowest channel.

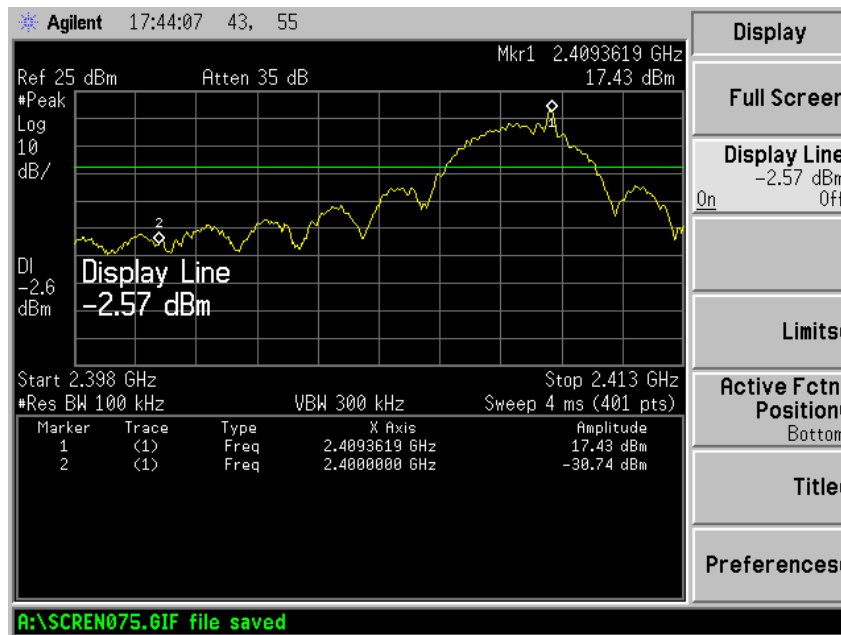

A:\SCREN075.GIF file saved



Result data graph shows the frequency of highest channel.

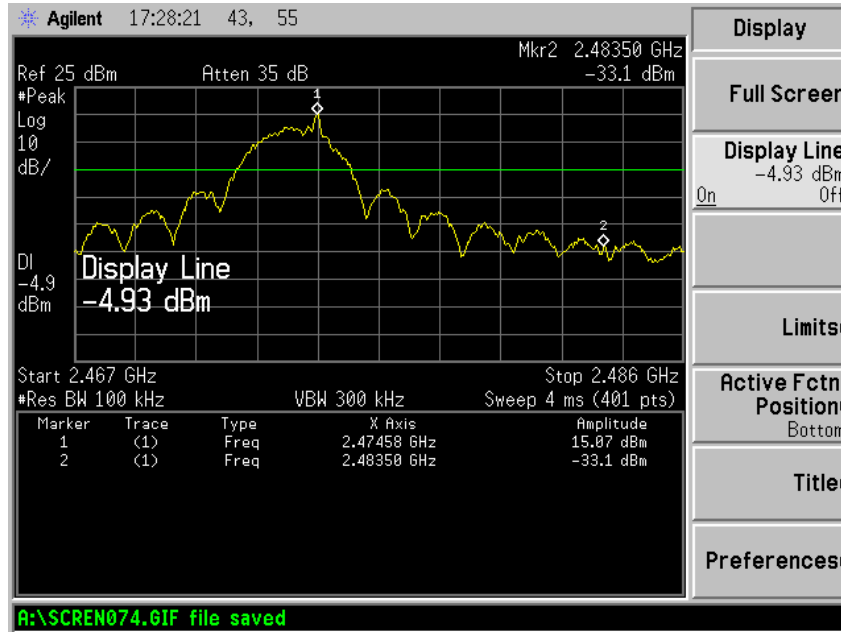



4.7 Maximum Output Power

Test Requirement:	FCC part 15 section 15.247 (a1)
Test Method:	ANSI C63.4:2003
Test Date:	2013-05-08
Mode of Operation:	Transmitting mode.
Detector Function:	Peak
Measurement BW:	RBW 1MHz ; VBW 1MHz

Test Setup:



Result : PASS


Frequency (MHz)	Peak Output Power		Limit	
	(dBm)	(W)	(dBm)	(W)
Lowest Channel : 2408.625	17.34	0.054	21	0.125
Middle Channel : 2442.375	17.75	0.060	21	0.125
Highest Channel : 2473.875	16.40	0.044	21	0.125

Limits for Maximum Output Power [Section 15.247 (a1)(iii)]:


For frequency hopping systems employing at least 75 hopping channels: 1 Watt
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts



Result data graph shows the frequency of lowest channel

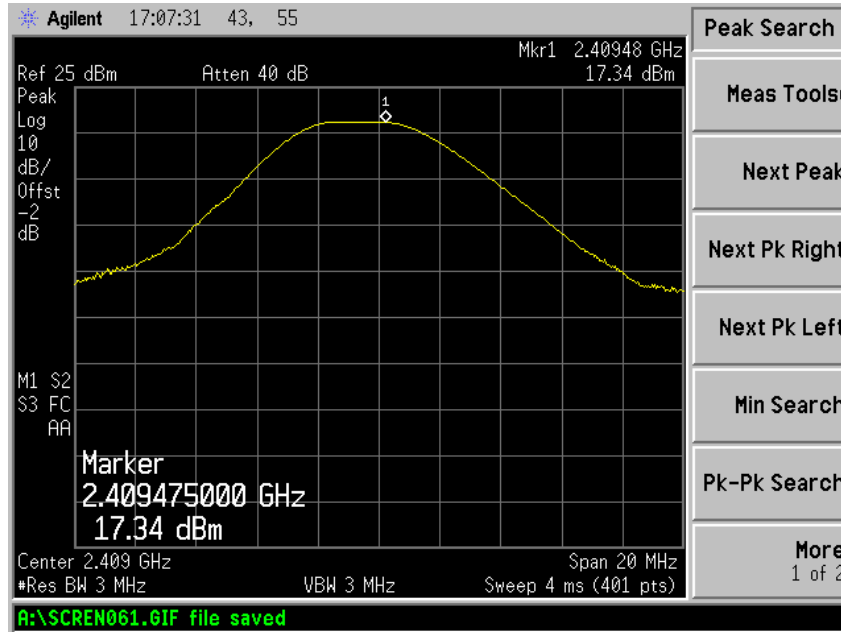


Result data graph shows the frequency of middle channel

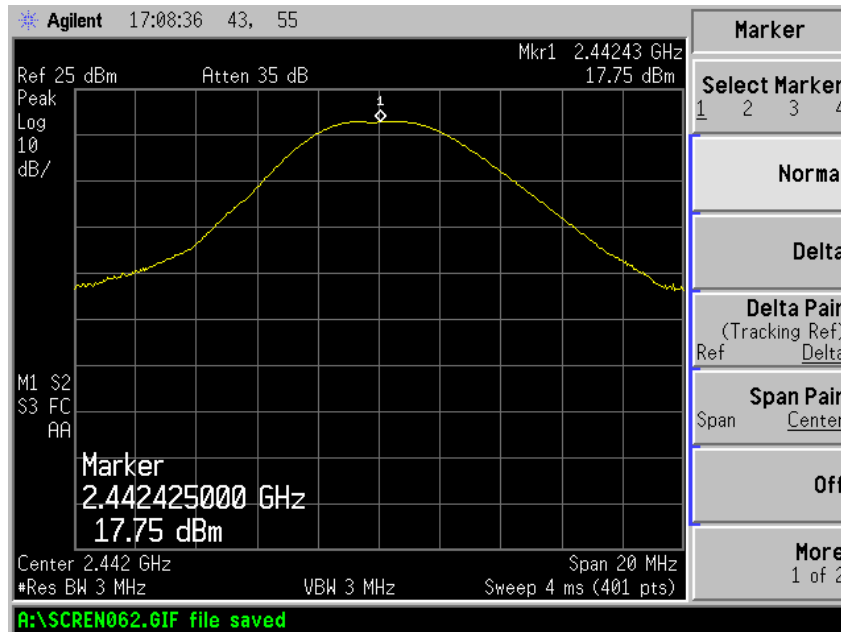



Result data graph shows the frequency of highest channel

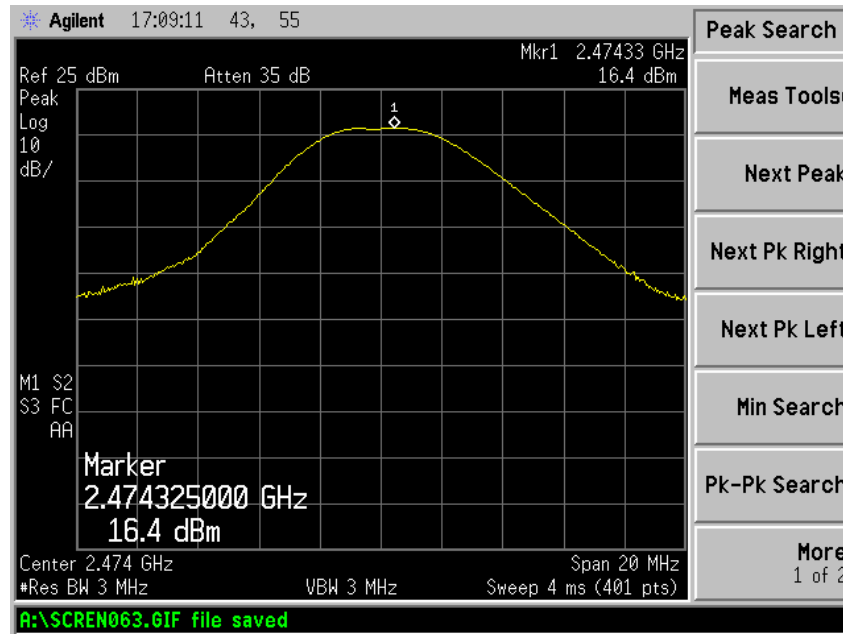




4.8 Out of Band Emissions and Emissions in Restricted Bands

Test Requirement:	FCC part 15 section 15.247 (d)
Test Method:	ANSI C63.4:2003
Test Date:	2013-05-08
Mode of Operation:	Transmitting mode.
Detector Function:	Peak
Measurement BW:	RBW 100KHz ; VBW 300KHz

Test Setup:

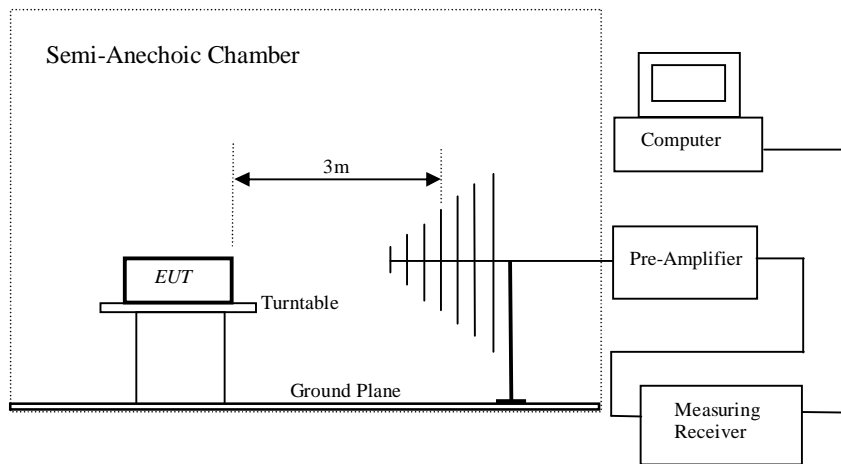



Result : PASS

Out of Frequency Band Emissions:

For out of band emissions that are close to or exceed 20dB attenuation requirement, and emission falls into restricted band, radiated emission was performed in order to show compliance with the general radiated emission requirement.

Result Summary:

Refer to the emission data graph, result shows that the significant emissions detected are with more than 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Limits for Out of Frequency Band Emission [Section 15.247 (d)]:

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in Section 15.209(a) is not required.

Limit for Radiated Emission Falling in Restricted Bands [Section 15.209]:

Frequency (MHz)	Field Strength [$\mu\text{V}/\text{m}$]	Field Strength [dB $\mu\text{V}/\text{m}$]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.



Result : PASS

All Emission and Emissions Fall into Restricted Band were recorded as below:

Radiated Emissions							
	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field strength at 3m	Limit	Delta to Limit
	MHz		dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m
Lowest Channel							
PK	4830.60	V	43.54	0.57	44.11	74.00	-29.89
PK	7580.00	V	42.40	4.00	46.40	74.00	-27.60
PK	4830.50	H	44.16	0.57	44.73	74.00	-29.27
PK	6546.00	H	42.56	3.15	45.71	74.00	-28.29
Middle Channel							
PK	4877.50	V	44.87	0.64	45.51	74.00	-28.49
PK	6170.00	V	42.70	2.65	45.35	74.00	-28.65
PK	5277.00	H	43.71	1.80	45.51	74.00	-28.49
PK	7321.50	H	43.25	3.76	47.01	74.00	-26.99
Highest Channel							
PK	5394.50	V	43.05	2.20	45.25	74.00	-28.75
PK	7415.50	V	30.02	2.53	32.55	74.00	-41.45
PK	5065.50	H	43.31	1.05	44.36	74.00	-29.64
PK	7415.50	H	45.06	3.83	48.89	74.00	-25.11
Spurious Emissions							
QP	32.41	V	20.64	8.44	29.08	40.00	-10.92
QP	54.07	V	26.38	6.24	32.62	40.00	-7.38
QP	113.71	V	26.93	5.48	32.41	43.50	-11.09
QP	126.33	V	29.02	4.39	33.41	43.50	-10.09
QP	385.28	V	19.02	10.87	29.89	46.00	-16.11
QP	771.45	V	19.18	16.37	35.55	46.00	-10.45
QP	100.23	H	15.44	6.81	22.25	43.50	-21.25
QP	120.28	H	19.21	4.85	24.06	43.50	-19.44
QP	192.42	H	20.87	4.31	25.18	43.50	-18.32
QP	323.32	H	19.60	10.41	30.01	46.00	-15.99
QP	771.45	H	21.34	16.37	37.71	46.00	-8.29
QP	965.54	H	22.39	18.37	40.76	54.00	-13.24

Refer to Figures shows the worst case channel's emission data graph from 30MHz-26GHz.



Result Summary:


- 1) Communication mode: All other emissions are more than 20dB below FCC part 15.209 limit.
- 2) No further spurious emissions found between 30 MHz and lowest internal used/generated frequency and from 30MHz to 1GHz.

Remarks:

1. “ * ” Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).
2. Emission level with more than 20dB below the FCC required limit is not mentioned in table.
3. Delta to Limit = Field strength (dB μ V/m) – Limit (dB μ V/m).
4. Calculated measurement uncertainty: 9kHz -30MHz: 1.8dB.
30MHz -1GHz: 5.2dB.
1GHz -18GHz: 5.1dB.




Radiated emission data graph (Vertical polarization, 30MHz-1GHz)

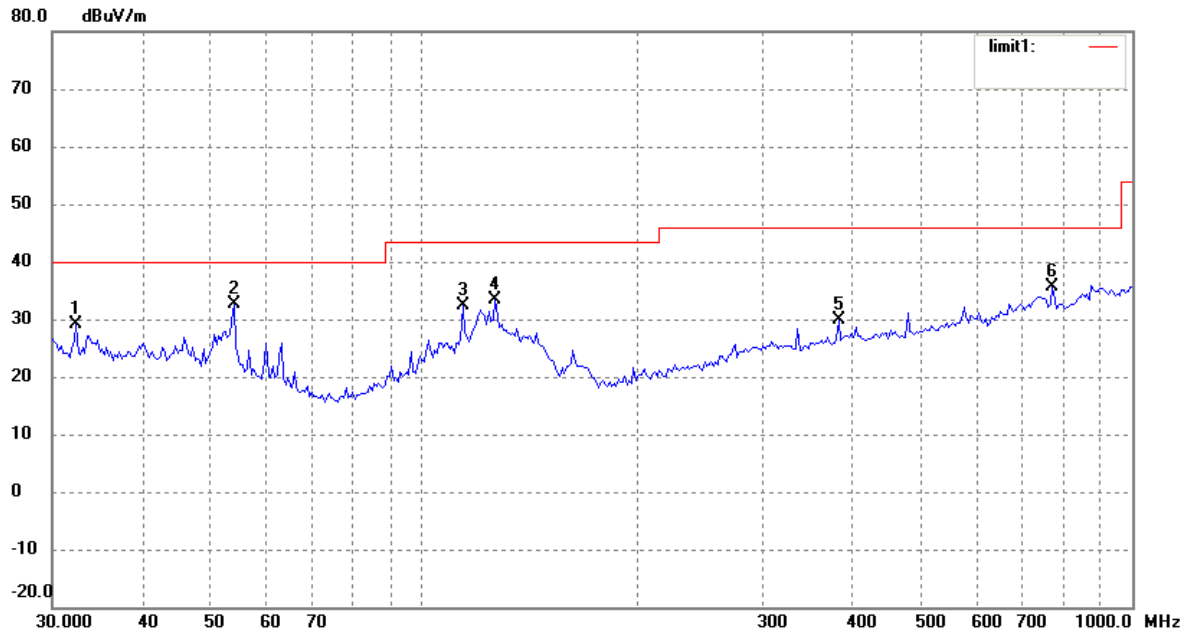

Remark: Only background noise was measured from 1GHz-26GHz excluding the operation frequency relational.

Radiated emission data graph (Horizontal polarization, 30MHz-1GHz)

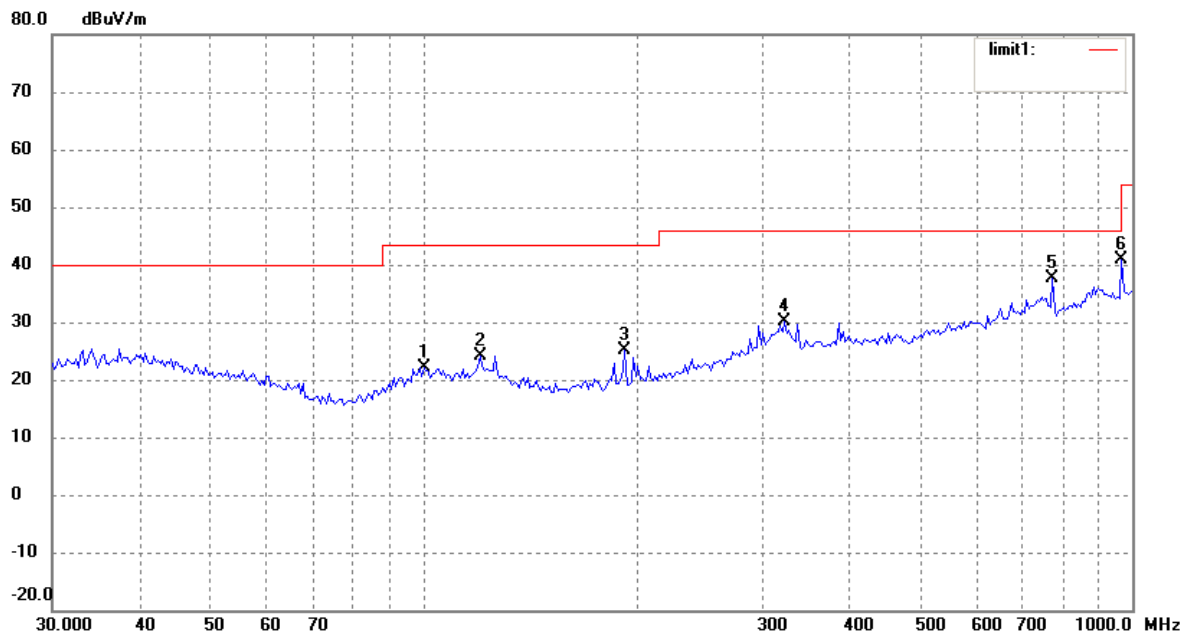


Remark: Only background noise was measured from 1GHz-26GHz excluding the operation frequency relational.

4.9 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC part 15 Section 15.207 Class B
Test Method:	ANSI C63.4:2003
Test Date:	2013-05-08
Mode of Operation:	-Transmitting mode
Detector Function:	CISPR Quasi Peak
Measurement BW:	100 kHz
Worst Case Channel:	1

Test Setup:

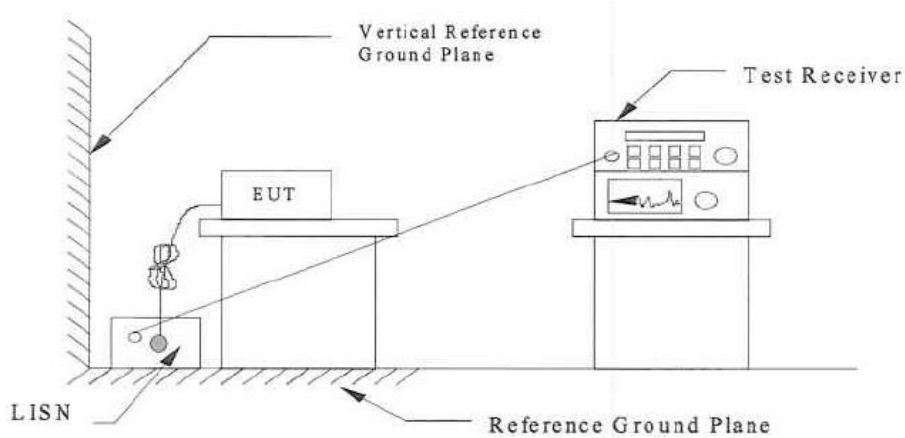

Results: PASS

- Refer Figure and tables the result.

Limits for Conducted Emission [Section 15.207]:

Frequency Range [MHz]	Quasi-Peak Limit [dB μ V]	Average Limit [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50


* Decreases with the logarithm of the frequency.

Remarks:

Calculated measurement uncertainty: ± 2.8 dB



Result data graph shows the conducted emission (Live).

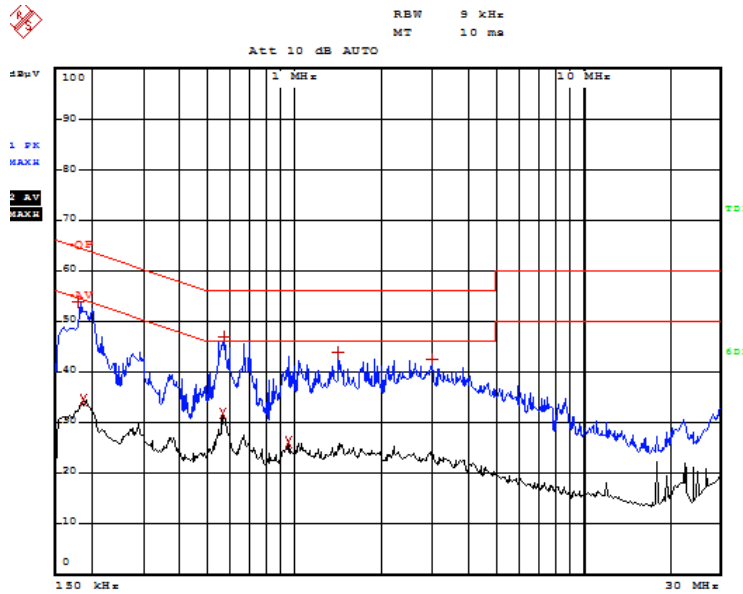


Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dBµV)	Limit (dBµV)	Margin
0.182	QP	L	54.03	64.38	-10.35
0.190	AV	L	34.44	54.03	-19.59
0.566	AV	L	31.95	46.00	-14.05
0.570	QP	L	47.09	56.00	-8.91
0.950	AV	L	26.21	46.00	-19.79
1.414	QP	L	43.87	56.00	-12.13
3.014	QP	L	42.75	56.00	-13.25



Result data graph shows the conducted emission (Neutral).

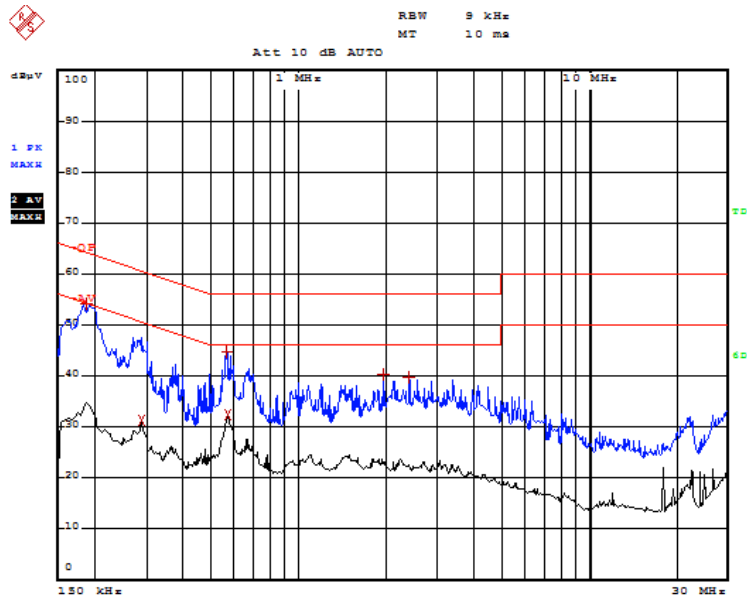

Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dBµV)	Limit (dBµV)	Margin
0.190	QP	N	54.28	64.03	-9.75
0.286	AV	N	31.28	50.63	-19.35
0.566	QP	N	44.66	56.00	-11.34
0.574	AV	N	32.49	46.00	-13.51
1.974	QP	N	40.41	56.00	-15.59
2.402	QP	N	39.84	56.00	-16.16



5.0 RF Exposure Compliance Requirement

Test Requirement: FCC part 15 section 15.247 (i)
 Test Method: FCC part 15 section 1.1307 (b1)
 OET Bulletin 65, Edition 01-01

Results: PASS

Systems operation under the provision of this section shall be operated in a manner that ensures the public is not exposed to radio frequency energy levels in excess of the Commission’s guideline,

The EUT is considered as a mobile device according to OET Bulletin 65, Edition 01-01, therefore distance to human body of min. 20cm is determined.

Frequency Band:	2408.625 MHz ~2473.875MHz
Device Category:	<input type="checkbox"/> Portable (< 20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others :
Exposure Classification:	<input type="checkbox"/> Occupational/ Controlled exposure <input checked="" type="checkbox"/> General Population / Uncontrolled exposure
Max. Output Power	59.57mW
Antenna Gain	0 dBi (Numeric gain:1)
Evaluation Applied:	<input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation

MPE calculation:

The radiated (EIRP) = 59.57 mW

The power density at 20cm from the antenna : = $EIRP / 4\pi R^2$
 = 0.0119mW / cm²

Limits for General Population/Uncontrolled Exposure [OET Bulletin 65, Edition 01-01]:

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30



6.0 List of Measurement Equipment

Radiated Emission and Bandwidth Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
Spectrum Analyzer	Agilent	E4402B	US41192821	27 Mar 2014
Test Receiver	R & S	ESI26	838786/013	27 Mar 2014
DC Power Supply	LW	APR-3003	N/A	15 Jul 2013
Spectrum Analyzer	R & S	FSP30	836079/035	27 Mar 2014
Positioning Controller	C&C	CC-C-1F	N/A	19 Dec 2013
RF Switch	EM	EMSW18	SW060023	19 Dec 2013
Pre-amplifier	Agilent	8447F	3113A06717	27 Mar 2014
Pre-amplifier	Compliance Direction	PAP-1G18	24002	27 Mar 2014
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	24 Feb 2014
Horn Antenna	ETS	3117	00086197	24 Feb 2014
Anechoic chamber	Albatross Projects	MCDC	SW060023	19 Mar 2014

Conducted Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
Test Receiver	Rohde & Schwarz	ESPI	101611	27 Mar 2014
L.I.S.N	Schwarzbeck	NSLK8126	8126-224	27 Mar 2014
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	27 Mar 2014
AMN	EMCO	3825/2	11967C	27 Mar 2014

N/A Not Applicable or Not Available

Appendix A


Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of Test Setup:

Radiated Emissions

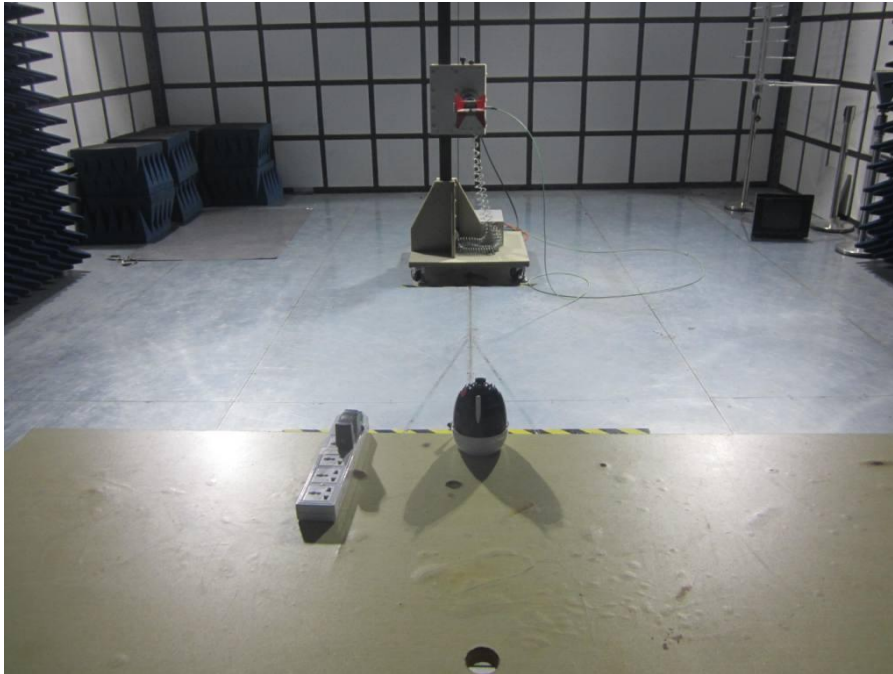

Appendix A

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of Test Setup:

Conducted Emissions




Appendix B

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – External EUT Photos

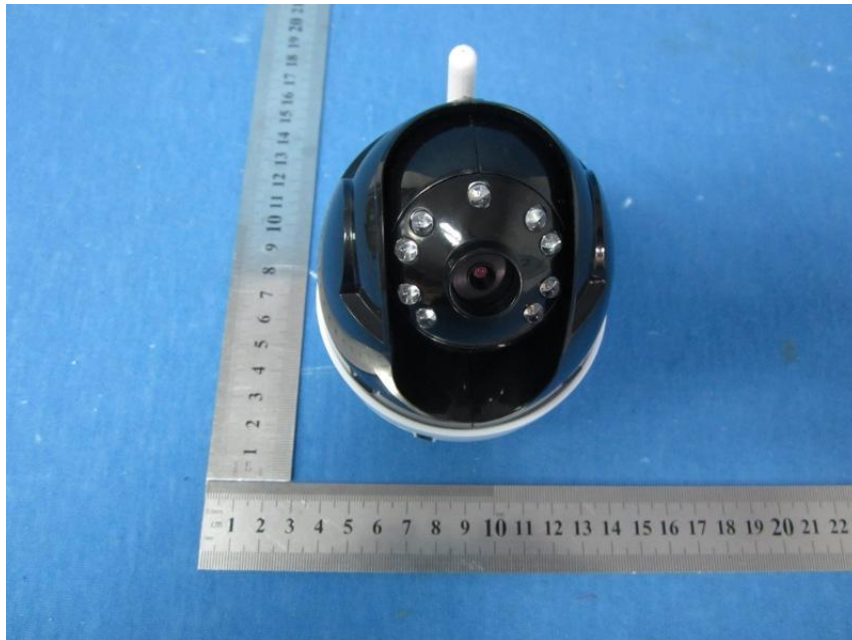

Appendix B

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – External EUT Photos



Appendix B

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – External EUT Photos



Appendix B

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – External EUT Photos



AC/DC Adaptor

Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos





Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

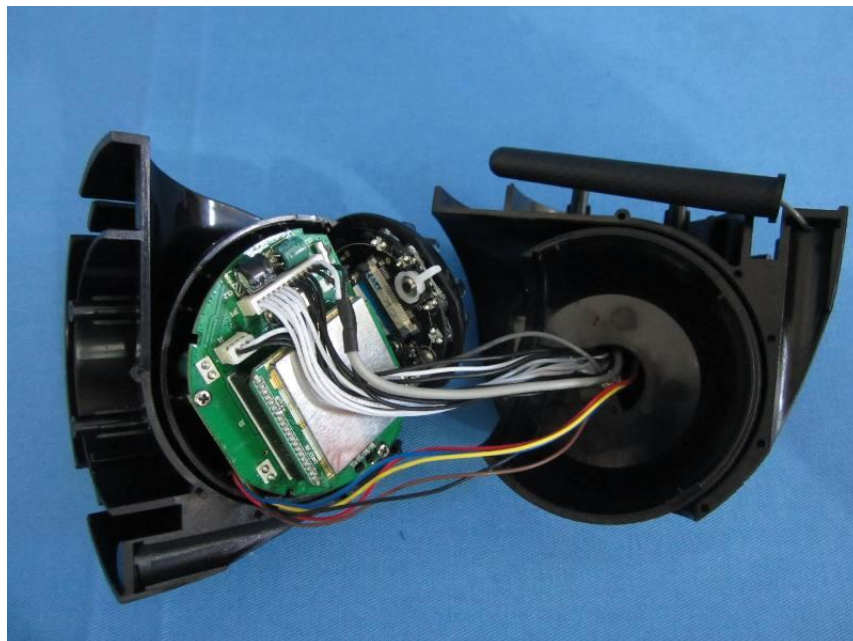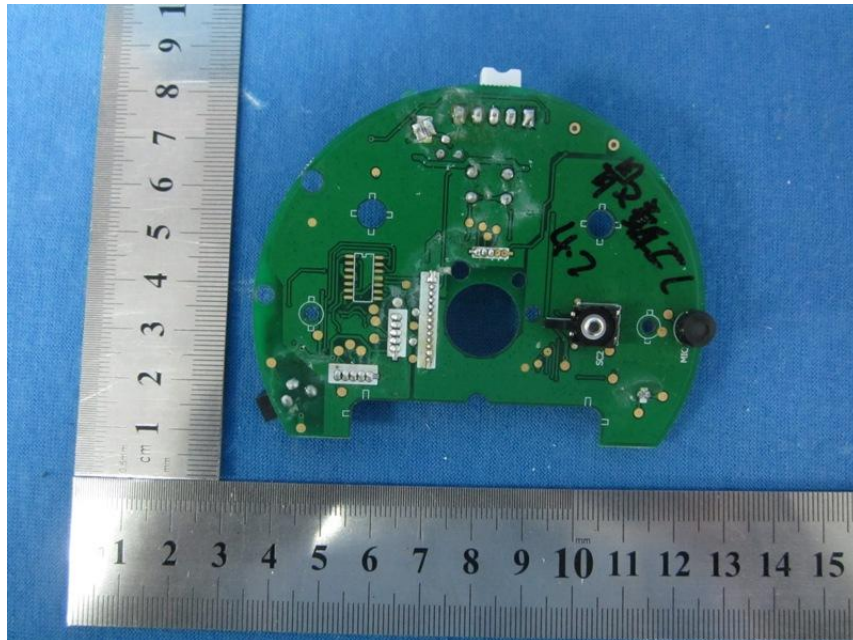



Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

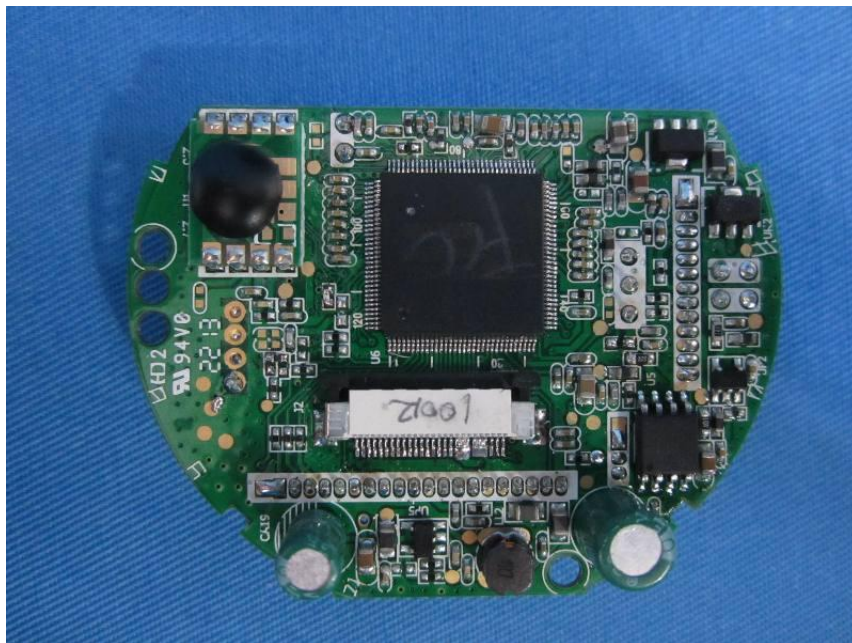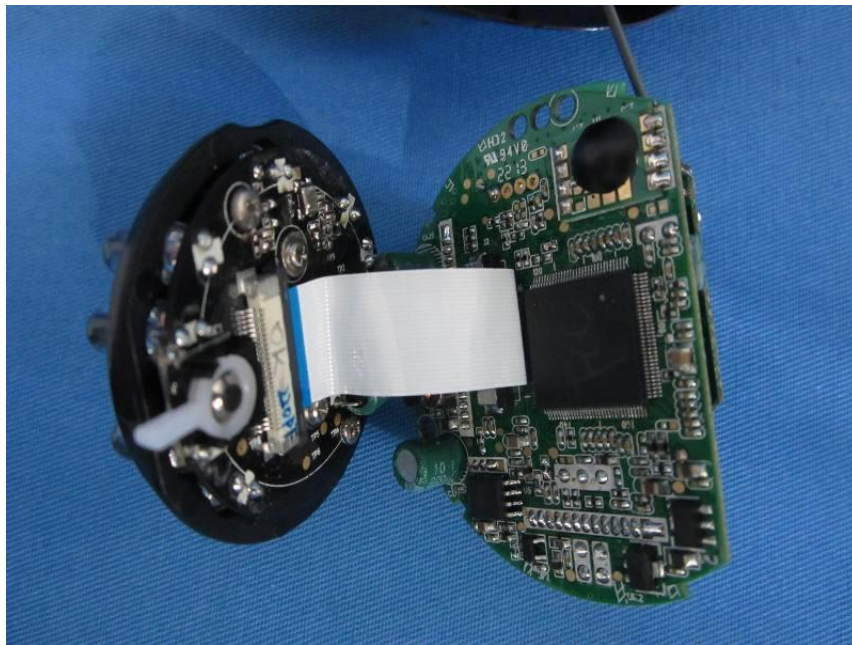


Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

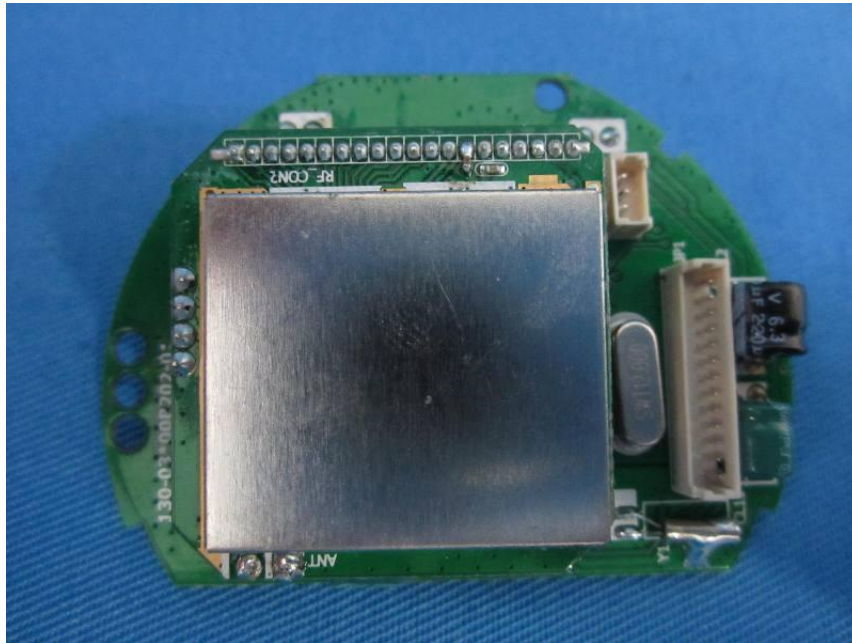


Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

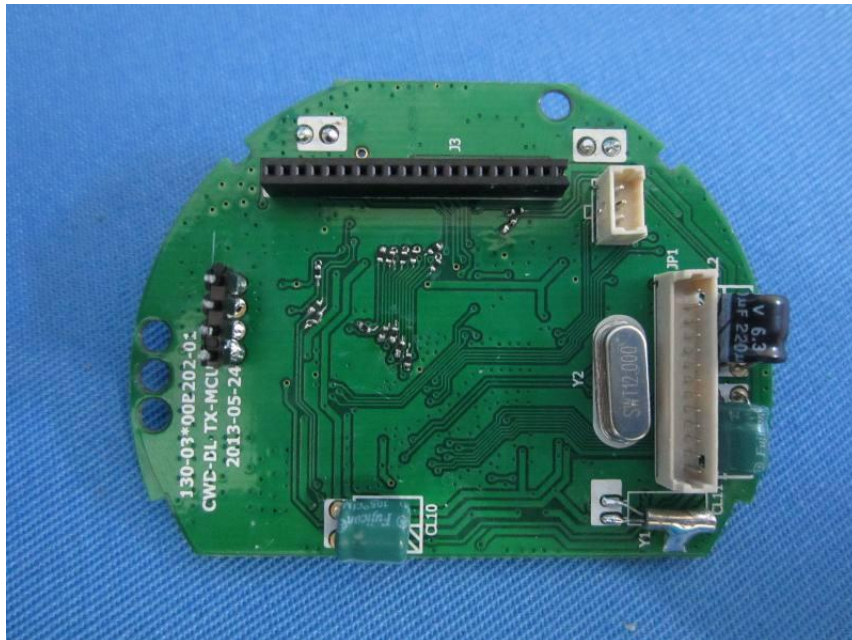


Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

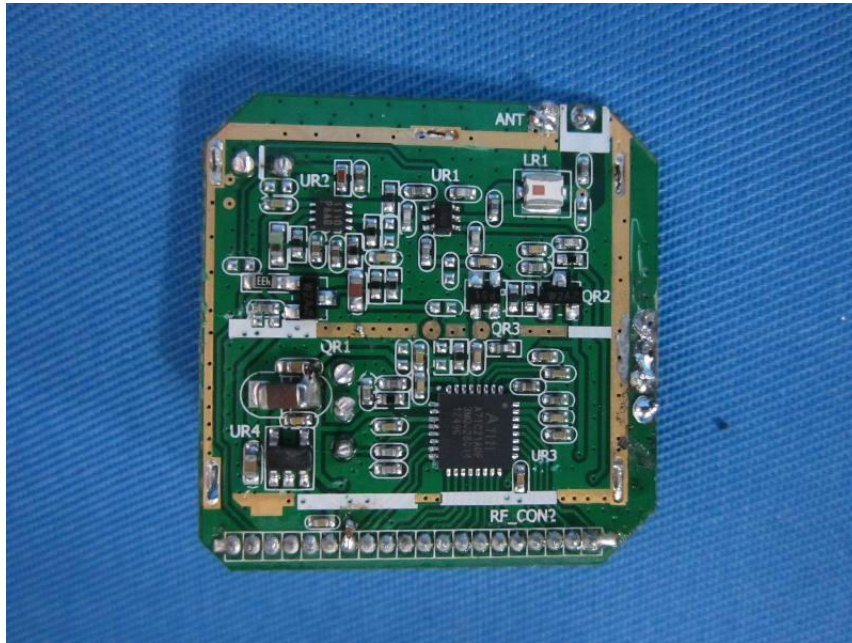

Appendix C

Date: 2013-06-15

Report No.: 60.870.12.047.01F

Model No.: Ovia™ 30024BU

Photo of EUT – Internal EUT Photos

