



FCC TEST REPORT

REPORT NO.: 070623FIA01

MODEL NO.: 5125G

RECEIVED: Jun. 26, 2007

TESTED: Jun. 26 ~ Jul. 11, 2007

ISSUED: Jul. 11, 2007

APPLICANT: Woodstream Corporation

ADDRESS: Room 2106-2110, East Qiu Shi Building, Shen Nan Road, Fu Tian, Shen Zhen, G.D, China

ISSUED BY: ADT (Shanghai) Corporation

ADDRESS: 2F, Building C, No. 1618, Yishan Rd., 201103, Shanghai, China

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards. This report contains data that were produced under Laboratory ADT (Shanghai) Corporation.

ADT (Shanghai) Corporation.



V 2.1.0



Table of Contents


- 1 CERTIFICATION 3
- 2 SUMMARY OF TEST RESULTS 4
 - 2.1 MEASUREMENT UNCERTAINTY 4
- 3 GENERAL INFORMATION..... 5
 - 3.1 GENERAL DESCRIPTION OF EUT 5
 - 3.2 DESCRIPTION OF TEST MODES 5
 - 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 7
 - 3.4 DESCRIPTION OF SUPPORT UNITS 7
- 4 EMISSION TEST..... 8
 - 4.1 CONDUCTED EMISSION MEASUREMENT..... 8
 - 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 8
 - 4.1.2 TEST RESULTS 8
 - 4.2 RADIATED EMISSION MEASUREMENT..... 9
 - 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 9
 - 4.2.2 TEST INSTRUMENTS..... 10
 - 4.2.3 TEST PROCEDURE..... 11
 - 4.2.4 DEVIATION FROM TEST STANDARD..... 11
 - 4.2.5 TEST SETUP..... 12
 - 4.2.6 EUT OPERATING CONDITIONS 12
 - 4.2.7 TEST RESULTS 13
 - 4.3 BAND EDGES MEASUREMENT 17
 - 4.3.1 LIMITS OF BAND EDGES MEASUREMENT 17
 - 4.3.2 TEST INSTRUMENTS..... 17
 - 4.3.3 TEST PROCEDURE..... 17
 - 4.3.4 DEVIATION FROM TEST STANDARD..... 17
 - 4.3.5 EUT OPERATING CONDITION..... 17
 - 4.3.6 TEST RESULTS 17
- 5 PHOTOGRAPHS OF THE TEST CONFIGURATION..... 18
- 6 PHOTOGRAPHS OF THE EUT 19
- 7 APPENDIX A- INFORMATION ON THE TESTING LABORATORY 20
- 8 APPENDIX B – UNCERTAINTY IN EMC MEASUREMENT 21



1 CERTIFICATION

PRODUCT: Pet Training Electronic Products
MODEL NO.: 5125G
APPLICANT: Woodstream Corporation
TESTED: Jun. 26 ~ Jul. 11, 2007
TEST ITEM: Engineering Sample
STANDARDS: FCC Part 15:2007, Subpart C (Section 15.249),
ANSI C63.4-2003

The above equipment has been tested by **ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

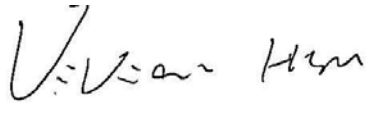TECHNICAL ACCEPTANCE :  , **DATE:** Jul. 11, 2007
Vivian Hsu
Engineering Supervisor

APPROVED BY :  , **DATE:** Jul. 11, 2007
Wallace Pan
Director of Operations



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Paragraph	Test Type	Result	Remark
15.207	Conducted Emission Test	N/A	Refer to 4.1.2
15.249	Radiated Emission Test	PASS	Minimum passing margin is -3.95 dB at 2440.50 MHz
15.249 (d)	Band Edge Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	3.04 dB
Radiated emissions	30MHz ~ 200MHz (Horizontal)	4.42 dB
	30MHz ~ 200MHz (Vertical)	4.62 dB
	200MHz ~ 1000MHz (Horizontal)	4.06 dB
	200MHz ~ 1000MHz (Vertical)	4.16 dB

Note: The measurement uncertainty is factored into the compliance determination. The additional information is listed on APPENDIX B of this report.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Pet Training Electronic Products
MODEL NO.	5125G
POWER SUPPLY	3Vdc from batteries
MODULATION TYPE	O-QPSK
FREQUENCY RANGE	2405 ~ 2480 MHz
CHANNEL SEPARATION	5 MHz
NUMBER OF CHANNEL	16
RF OUTPUT POWER	0.057mW
ANTENNA TYPE	Printed
DATA CABLE	N/A
I/O PORTS	Refer to User's Manual

NOTE: The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

16 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)
1	2405
2	2410
3	2415
4	2420
5	2425
6	2430
7	2435
8	2440
9	2445
10	2450
11	2455
12	2460
13	2465
14	2470
15	2475
16	2480



Test Mode Applicability AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to					Description
	PLC	RE<1G	RE≥1G	APM	BE	
A	-	√	√	-	√	Working normally.

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APM: Antenna Port Measurement
 BE: Band Edge Measurement

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Test Mode	Available Channel	Tested Channel	Modulation Type	Axis
A	1 ~ 16	1	O-QPSK	X

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Test Mode	Available Channel	Tested Channel	Modulation Type	Axis
A	1 ~ 16	1, 8, 16	O-QPSK	X

Band Edge Measurement

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, and X.Y.Z. axis.
- Following channel(s) was (were) selected for the final test as listed below.

Test Mode	Available Channel	Tested Channel	Modulation Type	Axis
A	1 ~ 16	1, 16	O-QPSK	X



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Pet Training Electronic Products. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


47 CFR Part 15, Subpart C (Section 15.249)
ANSI C63.4: 2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

For test mode A

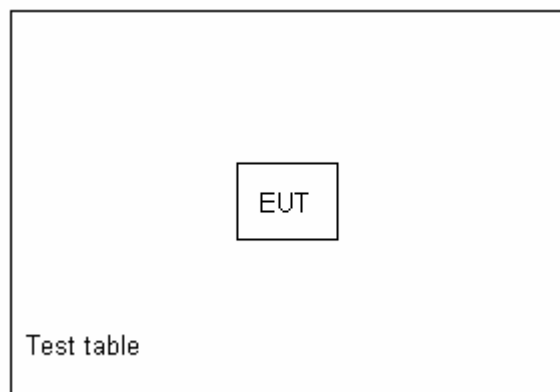



4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST RESULTS

Since the EUT does not have AC port, the test item is not applicable.



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

According to 15.249 the field strength of emissions from intentional radiators operated under these frequencies bands shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)	
	Peak	Average
2400 ~ 2483.5	113.98	93.98

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Apr. 19, 2008
BILOG Antenna SCHWARZBECK	VULB9168	E1A1001	Sept. 26, 2007
Preamplifier Agilent	8447D	E1A2001	Jan. 27, 2008
Preamplifier Agilent	8449B	E1A2002	Jan. 27, 2008
Double Ridged Broadband Horn Antenna Schwarzbeck	BBHA 9120D	E1A1002	Feb. 15, 2008
Spectrum Analyzer Agilent	E4403B	E1S1001	Jan. 13, 2008
*Spectrum Analyzer ROHDE & SCHWARZ	FSP	E1S1002	May. 15, 2008
RF signal cable Woken	RG-402	E1CBH01	May. 30, 2008
RF signal cable Woken	RG-402	E1CBH16	May. 30, 2008
RF signal cable Woken	RG-402	E1CBH20	May. 30, 2008
RF signal cable Woken	RG-412	E1CBL02	May. 30, 2008
RF signal cable Woken	RG-412	E1CBL03	May. 30, 2008
RF signal cable Woken	RG-412	E1CBL04	May. 30, 2008
Software ADT	ADT_Radiated_V7.5	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months.
 2. "*" = These equipment are used for the final measurement.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The Spectrum Analyzer (model: FSP) and RF signal cable (SERIAL: E1CBH05&E1CBH07) are used only for the measurement of emission frequency above 1GHz if tested.



4.2.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection & Average detection at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

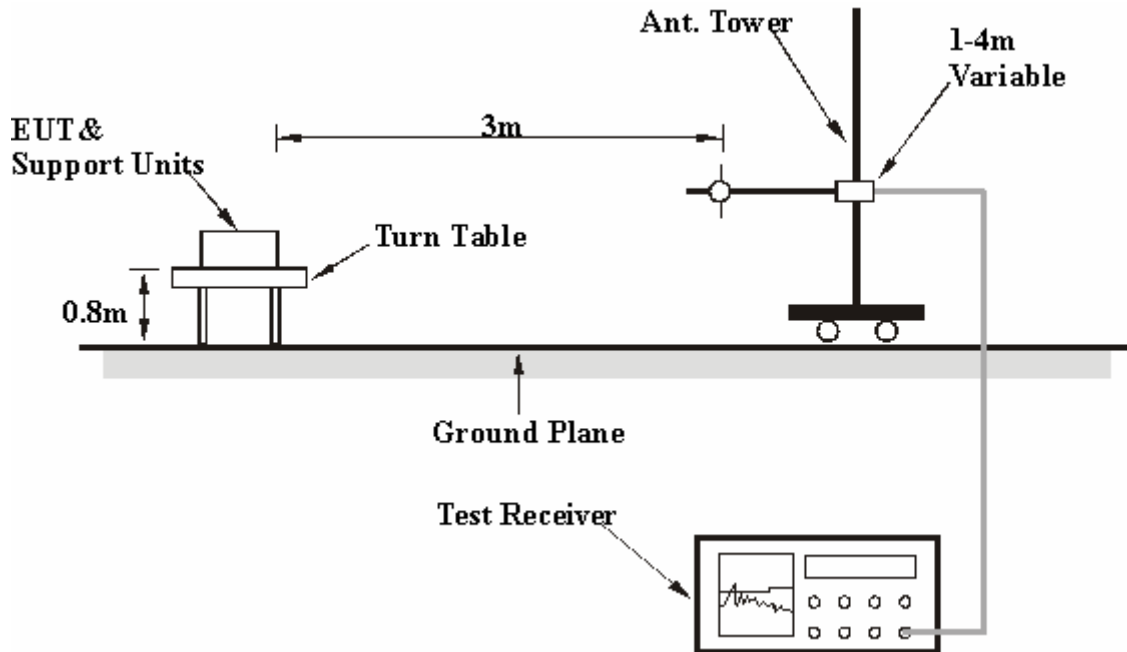

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.



4.2.7 TEST RESULTS

Below 1 GHz Worst Case

EUT	Pet Training Electronic Products	MEASUREMENT DETAIL	
MODEL	5125G	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001mbar
TEST MODE	A	INPUT POWER	3Vdc from batteries
TESTED BY	REBECCA		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	49.40	15.47	-6.54	8.93	40.00	-31.07	197.00	293.00
2	156.10	17.03	-7.16	9.87	43.50	-33.63	100.00	130.00
3	352.52	17.54	-6.33	11.22	46.00	-34.78	279.00	217.00
4	580.48	22.73	-5.83	16.90	46.00	-29.10	171.00	199.00
5	728.40	25.12	-6.11	19.01	46.00	-26.99	184.00	292.00
6	864.20	26.36	4.69	31.05	46.00	-14.95	271.00	148.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	49.40	15.47	-7.02	8.45	40.00	-31.55	100.00	63.00
2	156.10	17.03	-7.37	9.66	43.50	-33.84	100.00	344.00
3	367.07	17.95	-6.44	11.51	46.00	-34.49	100.00	201.00
4	561.08	22.31	-5.95	16.36	46.00	-29.64	100.00	123.00
5	776.90	25.64	-5.96	19.67	46.00	-26.33	100.00	133.00
6	932.10	27.72	-2.31	25.41	46.00	-20.59	100.00	200.00

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



Above 1 GHz

EUT	Pet Training Electronic Products	MEASUREMENT DETAIL	
MODEL	5125G	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001mbar
TEST MODE	A	INPUT POWER	3Vdc from batteries
TESTED BY	REBECCA		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2400 PK	32.59	15.46	48.05	74.00	-18.31	120	0
1	2400 AV	32.59	6.36	38.95	54.00	-15.05	120	0
2*	2404.50 PK	32.60	56.05	88.65	114.00	-25.35	199	19
2*	2404.50 AV	32.60	56.05	84.21	94.00	-9.79	199	19
3	4810 PK	38.07	8.86	46.93	74.00	-27.07	99	0
3	4810 AV	38.07	0.19	38.26	54.00	-15.74	99	0
4	7215 PK	45.19	9.92	55.11	74.00	-18.89	99	0
4	7215 AV	45.19	-1.18	44.01	54.00	-9.99	99	0
5	9620 PK	47.94	7.28	55.22	74.00	-18.78	99	0
5	9620 AV	47.94	-2.93	45.01	54.00	-8.99	99	0
6	12025 PK	49.05	8.66	57.71	74.00	-16.29	99	0
6	12025 AV	49.05	-1.80	47.25	54.00	-6.75	99	0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
1	2400 PK	32.59	23.10	55.69	74.00	-18.31	120	0
1	2400 AV	32.59	7.12	39.71	54.00	-14.29	120	0
2*	2405.34 PK	32.60	61.97	94.58	114.00	-19.42	199	19
2*	2405.34 AV	32.60	61.97	89.24	94.00	-4.76	199	19
3	4810 PK	38.07	10.46	48.53	74.00	-25.47	99	0
3	4810 AV	38.07	-0.07	38.00	54.00	-16.00	99	0
4	7215 PK	45.19	7.95	53.15	74.00	-20.85	99	0
4	7215 AV	45.19	-0.84	44.36	54.00	-9.64	99	0
5	9620 PK	47.94	6.52	54.46	74.00	-19.54	99	0
5	9620 AV	47.94	-2.68	45.26	54.00	-8.74	99	0
6	12025 PK	49.05	7.50	56.56	74.00	-17.44	99	0
6	12025 AV	49.05	-1.87	47.19	54.00	-6.81	99	0

- NOTE:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The other emission levels were very low against the limit.



EUT	Pet Training Electronic Products	MEASUREMENT DETAIL	
MODEL	5125G	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 8	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001mbar
TEST MODE	A	INPUT POWER	3Vdc from batteries
TESTED BY	REBECCA		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
*1	2440.38 PK	32.67	52.28	84.95	114.00	-29.05	199	19
*1	2440.38 AV	32.67	52.28	80.47	94.00	-13.53	199	19
2	4880 PK	38.03	12.04	50.06	74.00	-23.94	99	0
2	4880 AV	38.03	0.60	38.62	54.00	-15.38	99	0
3	7320 PK	44.65	10.66	55.31	74.00	-18.69	99	0
3	7320 AV	44.65	-0.84	43.82	54.00	-10.18	99	0
4	9760 PK	47.51	8.65	56.17	74.00	-17.83	99	0
4	9760 AV	47.51	-2.66	44.85	54.00	-9.15	99	0
5	12200 PK	48.28	9.96	58.24	74.00	-15.76	99	0
5	12200 AV	48.28	-2.57	45.71	54.00	-8.29	99	0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
*1	2440.50 PK	32.67	61.65	94.32	114.00	-19.68	199	19
*1	2440.50 AV	32.67	61.65	90.05	94.00	-3.95	199	19
2	4880 PK	38.03	12.99	51.02	74.00	-22.98	99	0
2	4880 AV	38.03	0.78	38.80	54.00	-15.20	99	0
3	7320 PK	44.65	10.41	55.07	74.00	-18.93	99	0
3	7320 AV	44.65	-0.76	43.89	54.00	-10.11	99	0
4	9760 PK	47.51	9.21	56.72	74.00	-17.28	99	0
4	9760 AV	47.51	-2.57	44.94	54.00	-9.06	99	0
5	12200 PK	48.28	9.58	57.86	74.00	-16.14	99	0
5	12200 AV	48.28	-2.39	45.89	54.00	-8.11	99	0

- NOTE:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*” = Fundamental frequency
 6. The other emission levels were very low against the limit.



EUT	Pet Training Electronic Products	MEASUREMENT DETAIL	
MODEL	5125G	FREQUENCY RANGE	Above 1GHz
CHANNEL	Channel 16	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	O-QPSK	ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 1001mbar
TEST MODE	A	INPUT POWER	3Vdc from batteries
TESTED BY	REBECCA		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
*1	2480.28 PK	32.75	50.86	83.61	114.00	-30.39	199	19
*1	2480.28 AV	32.75	50.86	79.59	94.00	-14.41	199	19
2	2483.5 PK	32.76	17.34	50.10	74.00	-23.90	99	0
2	2483.5AV	32.76	5.91	38.66	54.00	-15.34	99	0
3	4960 PK	38.32	12.16	50.47	74.00	-23.53	99	0
3	4960 AV	38.32	0.42	38.74	54.00	-15.26	99	0
4	7440 PK	44.58	10.05	54.63	74.00	-19.37	99	0
4	7440 AV	44.58	-1.38	43.19	54.00	-10.81	99	0
5	9920 PK	47.73	9.42	57.14	74.00	-16.86	99	0
5	9920 AV	47.73	-1.91	45.82	54.00	-8.18	99	0
6	12400 PK	48.39	9.60	57.98	74.00	-16.02	99	0
6	12400 AV	48.39	-2.47	45.91	54.00	-8.09	99	0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Frequency MHz	Factor dB	Reading dBuV/m	Emission dBuV/m	Limit dBuV/m	Margin dB	Tower cm	Table deg
*1	2480.28 PK	32.75	50.86	83.61	114.00	-30.39	199	19
*1	2480.28 AV	32.75	50.86	80.19	94.00	-13.81	199	19
2	2483.5 PK	32.76	17.34	50.10	74.00	-23.90	99	0
2	2483.5AV	32.76	9.22	41.98	54.00	-12.02	99	0
3	4960 PK	38.32	10.80	49.11	74.00	-24.89	99	0
3	4960 AV	38.32	0.33	38.64	54.00	-15.36	99	0
4	7440 PK	44.58	7.77	52.35	74.00	-21.65	99	0
4	7440 AV	44.58	-1.60	42.97	54.00	-11.03	99	0
5	9920 PK	47.73	8.14	55.86	74.00	-18.14	99	0
5	9920 AV	47.73	-1.83	45.89	54.00	-8.11	99	0
6	12400 PK	48.39	8.48	56.87	74.00	-17.13	99	0
6	12400 AV	48.39	-2.14	46.24	54.00	-7.76	99	0

- NOTE:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) = Antenna Factor (dB) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. "*" = Fundamental frequency
 6. The other emission levels were very low against the limit.



4.3 BAND EDGES MEASUREMENT

4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below – 50dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SIGNAL ANALYZER Rohde & Schwarz	FSP30	E1S1002	May. 16. 2008

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 EUT OPERATING CONDITION

Enable the EUT to transmit data at lowest and highest channel frequencies individually.

4.3.6 TEST RESULTS

For Emissions outside of the specified frequency bands (Radiated), please refer to report section 4.2.7 which met the requirement of the general radiated emission limits in § 15.209.



5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RE



6 PHOTOGRAPHS OF THE EUT



7 APPENDIX A- INFORMATION ON THE TESTING LABORATORY

We, ADT (Shanghai) Corp., was founded in 2003 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratory is accredited and approved by the following approval agencies according to ISO / IEC 17025 (2005).

The client should not use it to claim product endorsement by CNAS, A2LA, or any government agency.

Japan	VCCI
USA	FCC, A2LA
Norway	DNV
China	CNAS



Copies of accreditation certificates of our laboratory obtained from approval agencies can be downloaded from our web site: www.cnadt.com

If you have any comments, please feel free to contact us at the following:

ADT (Shanghai) Corporation

TEL :86-21-6465-9091

Fax : 86-21-6465-9092

Email: service@adt-sh.com

Web Site: www.cnadt.com



8 APPENDIX B – UNCERTAINTY IN EMC MEASUREMENT

As specified in CISPR 16-4-2, measurement instrumentation uncertainty shall be taken into account when determining compliance or non-compliance with a disturbance limit. A disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} in table 1, then:

- ✘ Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- ✘ Non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.

If U_{lab} is greater than or equal to U_{cispr} in table 1, then:

- ✘ Compliance is deemed to occur if no measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- ✘ Non-compliance is deemed to occur if any measured disturbance, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Table 1 – Values of U_{cispr}

Measurement		U_{cispr}
Conducted disturbance (mains port)	(9kHz – 150kHz) (150kHz – 30MHz)	4,0 dB 3,6 dB
Disturbance power	(30MHz – 300MHz)	4,5 dB
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30MHz – 1000MHz)	5,2 dB
Other		Under consideration

ADT Shanghai hereby declare the U lab value are as the following:

Conducted test performed at SR1 shielded room with U_{lab} values: +/- 3.04 dB

Radiated test performed at SAC Chamber with U_{lab} values: +/- 4.62 dB

Based on the above specification, the U_{lab} values of our sites are less than U_{cispr} in table 1 and compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.