

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>60362205 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	<b>238484596</b>	Seite 1 von 33 Page 1 of 33
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	<b>N/A</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>2020.02.25</b>	
<b>Auftraggeber:</b> <i>Client:</i>	Eve Systems LLC 100 Pine St., Suite 1250, San Francisco CA 94111 USA			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Eve Door & Window			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	20EBN9901			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C / ISED RSS-247 Test report (Thread)			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247 ISED RSS-247 (02-2017)			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2020.03.25			
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A002810618-001, A002810618-003			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	2020.04.17 - 2020.05.04			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC/RF Laboratory Taipei			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	Taipei Testing laboratories			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>überprüft von:</b> <i>reviewed by:</i>		<b>genehmigt von:</b> <i>authorized by:</i>		
<b>atum: 2020.06.04</b> <i>Date:</i>	Mars Y.J. Lin	<b>Datum: 2020.06.04</b> <i>Date:</i>	Ryan W.T. Chen	
<b>Stellung / Position:</b>	<b>Project Engineer</b>	<b>Stellung / Position:</b>	<b>Vice General Manager</b>	
<b>Sonstiges / Other:</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

## TEST SUMMARY

### 5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

### 5.1.2 MAXIMUM CONDUCTED PEAK OUTPUT POWER

RESULT: *Passed*

### 5.1.3 6dB BANDWIDTH AND 99% BANDWIDTH

RESULT: *Passed*

### 5.1.4 POWER DENSITY

RESULT: *Passed*

### 5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100KHZ BANDWIDTH

RESULT: *Passed*

### 5.1.6 SPURIOUS EMISSION

RESULT: *Passed*

### 6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Passed*

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS.....</b>	<b>5</b>
<b>1.2</b>	<b>DECISION RULE OF CONFORMITY.....</b>	<b>5</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>6</b>
<b>2.1</b>	<b>TEST LABORATORY .....</b>	<b>6</b>
<b>2.2</b>	<b>TEST FACILITY.....</b>	<b>6</b>
<b>2.3</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>7</b>
<b>2.4</b>	<b>TRACEABILITY .....</b>	<b>8</b>
<b>2.5</b>	<b>CALIBRATION .....</b>	<b>8</b>
<b>2.6</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>9</b>
<b>3.2</b>	<b>SYSTEM DETAILS AND RATINGS.....</b>	<b>9</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES.....</b>	<b>10</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES.....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>12</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>12</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>12</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>14</b>
<b>5.1.1</b>	<i>Antenna Requirement.....</i>	<i>14</i>
<b>5.1.2</b>	<i>Maximum conducted Peak output power.....</i>	<i>15</i>
<b>5.1.3</b>	<i>6dB Bandwidth and 99% Bandwidth.....</i>	<i>16</i>
<b>5.1.4</b>	<i>Power Density.....</i>	<i>20</i>
<b>5.1.5</b>	<i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth.....</i>	<i>23</i>
<b>5.1.6</b>	<i>Spurious Emission .....</i>	<i>27</i>
<b>6.</b>	<b>SAFETY HUMAN EXPOSURE .....</b>	<b>28</b>
<b>6.1</b>	<b>RADIO FREQUENCY EXPOSURE COMPLIANCE .....</b>	<b>28</b>
<b>6.1.1</b>	<i>Electromagnetic Fields.....</i>	<i>28</i>

<b>7.</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>29</b>
<b>8.</b>	<b>LIST OF TABLES .....</b>	<b>33</b>
<b>9.</b>	<b>LIST OF PHOTOGRAPHS.....</b>	<b>33</b>

## 1. General Remarks

### 1.1 Complementary Materials

The following attachments are integral parts of this test report:

**Appendix P: Photo Documentation internal view**  
(File Name: 60262204 001, 60362205 001 APPENDIX P)

**Appendix D: Test Result of Radiated Emissions**  
(File Name: 60362205 001 APPENDIX D)

#### Test Specifications

The following standards were applied.

**Table 1: Applied Standard and Test Levels**

<b>Radio</b>
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1091
ISED RSS-247 Issue 2, Feb 2017
ISED RSS-102 Issue 5, March 2015
ISED RSS-Gen, Issue 5, March 2019
ANSI C63.10:2013
KDB558074 D01 DTS Meas Guidance v05r02
KDB447498 D01 General RF Exposure Guidance v06

### 1.2 Decision Rule of conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

## 2. Test Sites

### 2.1 Test Laboratory

Taipei Testing laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

### 2.2 Test Facility

Taipei Testing laboratories

No. 458-18, Sec 2, Fenliao., Linkou Dist.  
New Taipei City 244  
Taiwan (R.O.C.)

FCC Registration No.: 226631  
IC Canada Registration No.: 25563  
TAF Accredited NCC Test Lab. No.:3567  
TAF ISO17025 Certification effective period: 6<sup>th</sup>-May-2019 to 05<sup>th</sup>-May-2022



**Testing Laboratory**  
**3567**

## 2.3 List of Test and Measurement Instruments

**Table 2: List of Test and Measurement Equipment**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. Due Date</b>
EMI Test Receiver	R&S	ESR7	102109	2020/3/30	2021/3/29
Spectrum Analyzer	R&S	FSV40	101508	2020/3/16	2021/3/15
Pre-Amplifier	Agilent	8447D	2727A05146	2020/2/17	2021/2/16
Pre-Amplifier	EMCI	EMC051845SE	980635	2020/2/11	2021/2/10
Pre-Amplifier	EMCI	EMC184045SE	980656	2020/2/11	2021/2/10
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2020/1/20	2021/1/19
Horn Antenna	ETS-Lindgren	3117	00218929	2019/11/27	2020/11/26
Horn Antenna	SCHWARZBECK	BBHA 9170	00896	2020/1/17	2021/1/16
Loop Antenna	EMCI	LPA600	287	2019/12/20	2020/12/19
Test Software	Audix	e3	Ver. 9	N/A	N/A
Test Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2020/3/25	2021/3/24
Test Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2020/3/25	2021/3/24
Thermo Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-010	2020/2/1	2021/2/1
Signal Generator	R&S	SMB100A03	181335	2020/1/23	2021/1/23
Power Meter	Anritsu	ML2495A	1901008	2020/4/06	2021/4/05
Power Sensor	Anritsu	MA2411B	1725269	2020/4/06	2021/4/05

## 2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.5 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular schedule using in house standards or comparisons.

## 2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements .

**Table 3: Emission Measurement Uncertainty**

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1.5$ dB
RF power density, conducted	$\pm 3$ dB
spurious emissions, conducted	$\pm 3$ dB
all emissions, radiated	$\pm 6$ dB
Temperature	$\pm 1$ °C
Humidity	$\pm 5$ %

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is an Eve Door & Window. It contains a thread compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

#### 3.2 System Details and Ratings

**Table 4: Basic Information of EUT**

Item	EUT information
Kind of Equipment/Test Item	Eve Door & Window
Type Designation	20EBN9901
FCC ID	SNE-DOOR-003
IC	11192A-DOOR003
HVIN	20EBN9901

**Table 5: Technical Specification of EUT**

Technical Specification	Value
Operating Frequencies	2405~2480MHz
Channel number	16
Operation Voltage	3Vdc
Modulation	OQPSK
Antenna gain	3.02dBi

### **3.3 Independent Operation Modes**

Basic operation modes are:

- A. Transmitting
- B. Receiving
- C. Normal

### **3.4 Noise Generating and Noise Suppressing Parts**

Refer to the Circuit Diagram.

### **3.5 Submitted Documents**

- Circuit Diagram
- Block Diagram
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**Table 6: Table for Parameters of Test Software Setting**

Mode	Channel Frequency		
	2405 MHz	2440 MHz	2480 MHz
Thread	8	8	8

### 4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate. After finishing the setup command, the setup computer can be removed.

The samples were used as follows:  
 Conducted sample: A002810618-001  
 Radiation sample: A002810618-003

Full test was applied on all test modes, but only worst case was shown

<b>Test Software</b>	Putty.exe
----------------------	-----------

### 4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Kind of Equipment	Manufacturer	Model Name	S/N
HP Laptop	HP	15-da1046TX	CND9111RJ2

### 4.4 Countermeasures to achieve EMC Compliance



The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

### 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

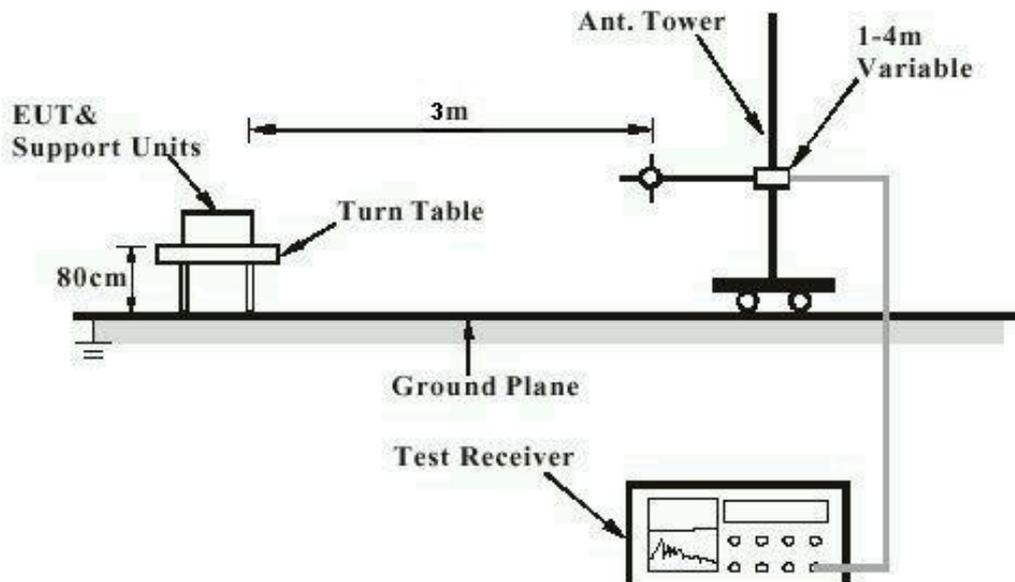

Note: Measurements above 1 GHz are done with a table height of 1.5m

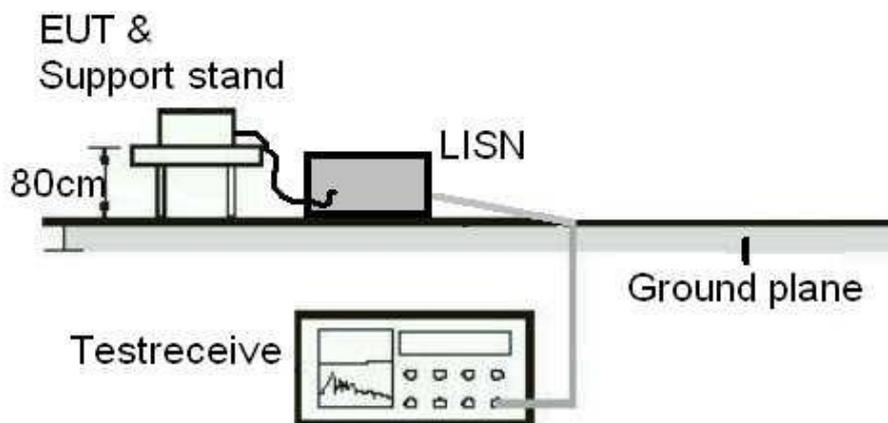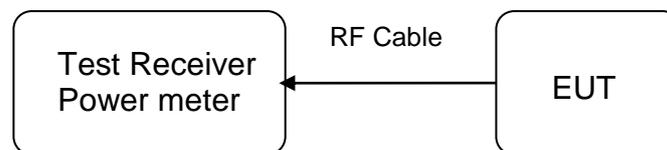**Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)**

**Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement**


Note: The output power is measured by power meter according to 8.3.1.3 KDB558074 D01 Meas Guidance v05r02 8.3.1.3.

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:** **Passed**

Test standard : FCC Part 15.247(b)(4), Part 15.203 and ISED  
RSS-Gen 6.8

Requirement : use of approved antennas only with directional gains that  
do not exceed 6 dBi

According to the manufacturer declaration, the EUT has an antenna with maximum directional gain of 3.02dBi. The antenna is a printed PCB trace with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

### 5.1.2 Maximum conducted Peak output power

**RESULT:**
**Passed**

Test standard : FCC Part 15.247(b)(3), ISED RSS-247 5.4(b)  
 Basic standard : ANSI C63.10:2013, KDB558074(8.3.1.3)  
 Limit : 1 Watt  
 Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 20-24 °C  
 Relative humidity : 50-65 %  
 Atmospheric pressure : 100-103 kPa

**Table 7: Test result of Maximum conducted Peak output power**


Channel	Channel Frequency (MHz)	Output Power		Limit
		(dBm)	(W)	(W)
Low Channel	2405	7.51	0.00564	1
Middle Channel	2440	7.85	0.00610	1
High Channel	2480	8.09	0.00644	1

Pmax: 6.4417 mW




## Test Plot of 6dB Bandwidth

### Low Channel


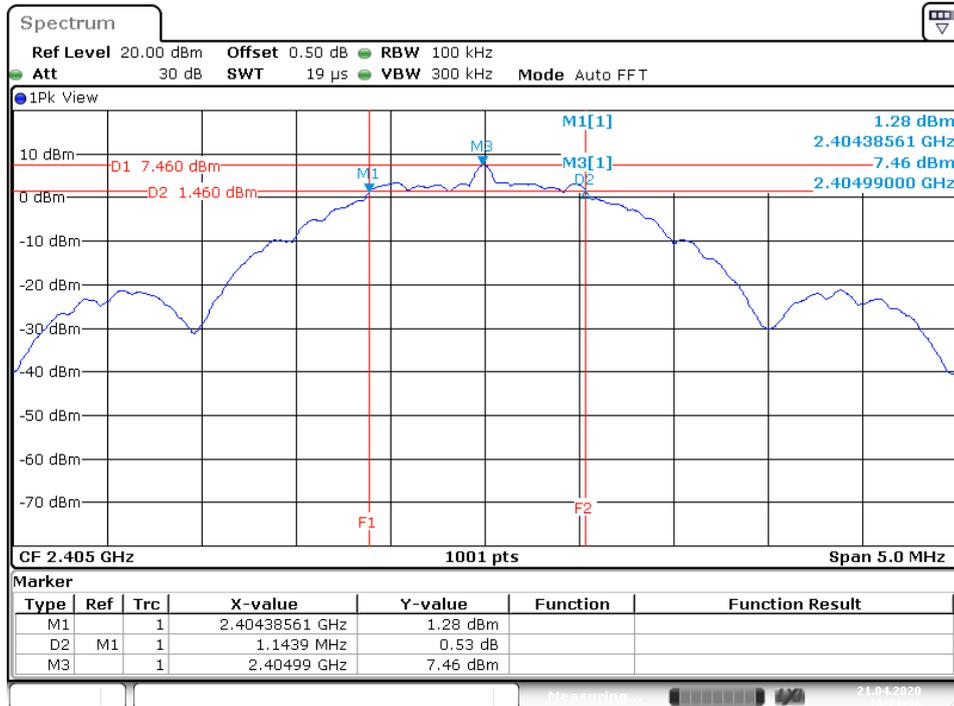



Date: 21.APR.2020 16:21:36

### Middle Channel

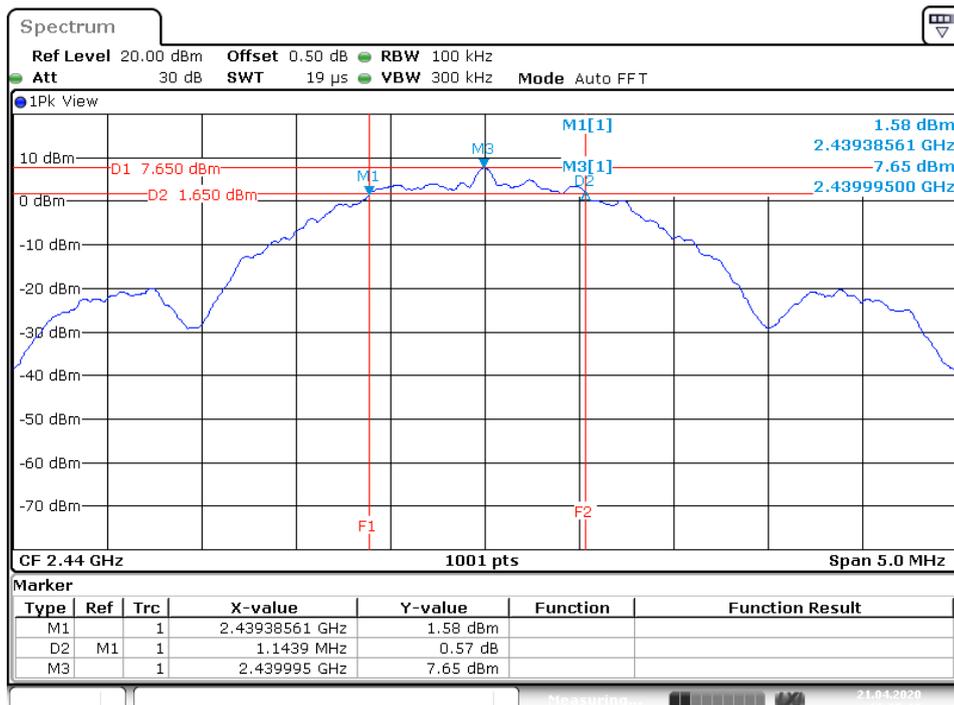


Date: 21.APR.2020 16:25:14

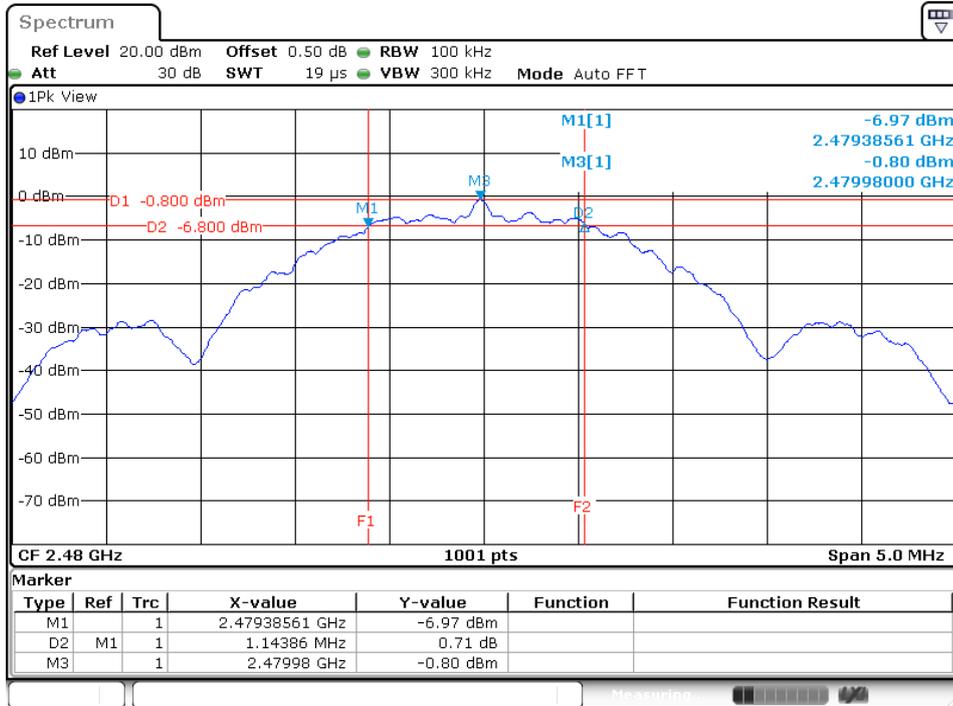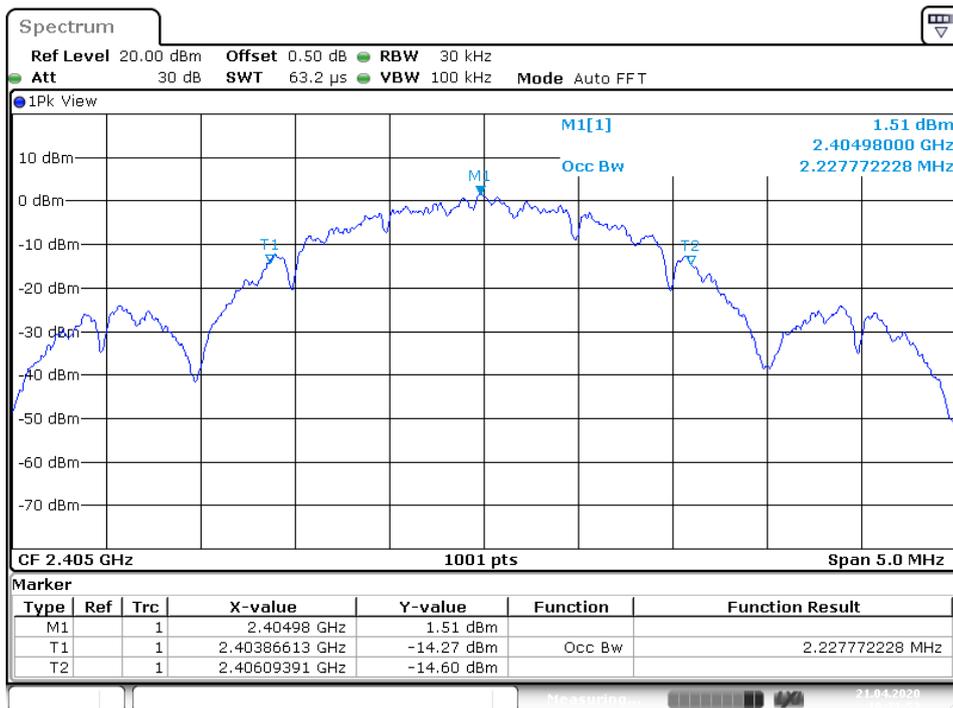**High Channel**

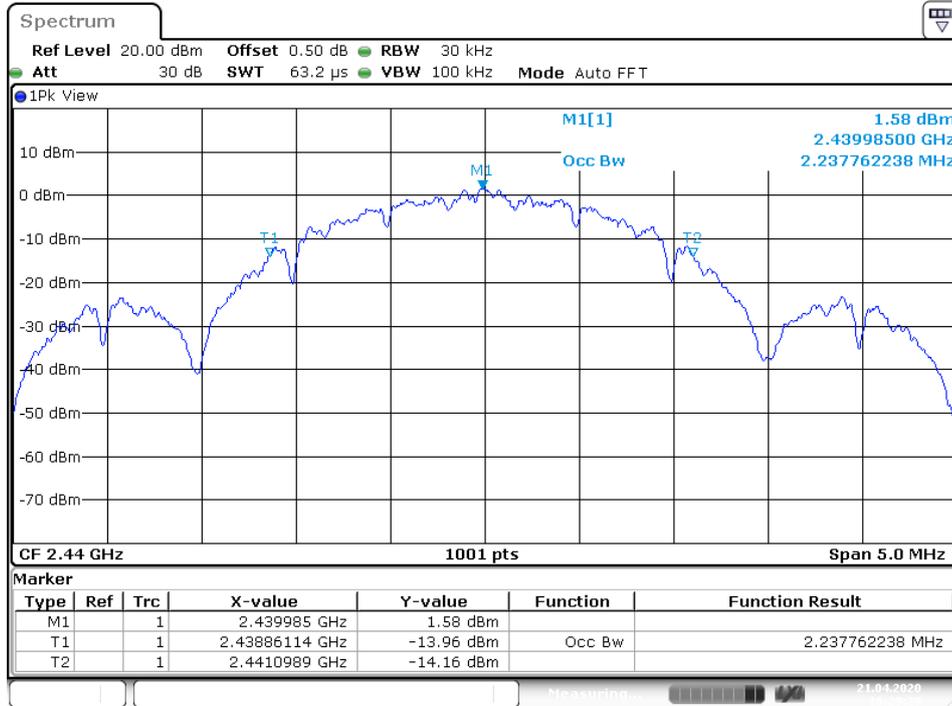**Test Plot of 99% Bandwidth**
**Low Channel**


**Middle Channel**

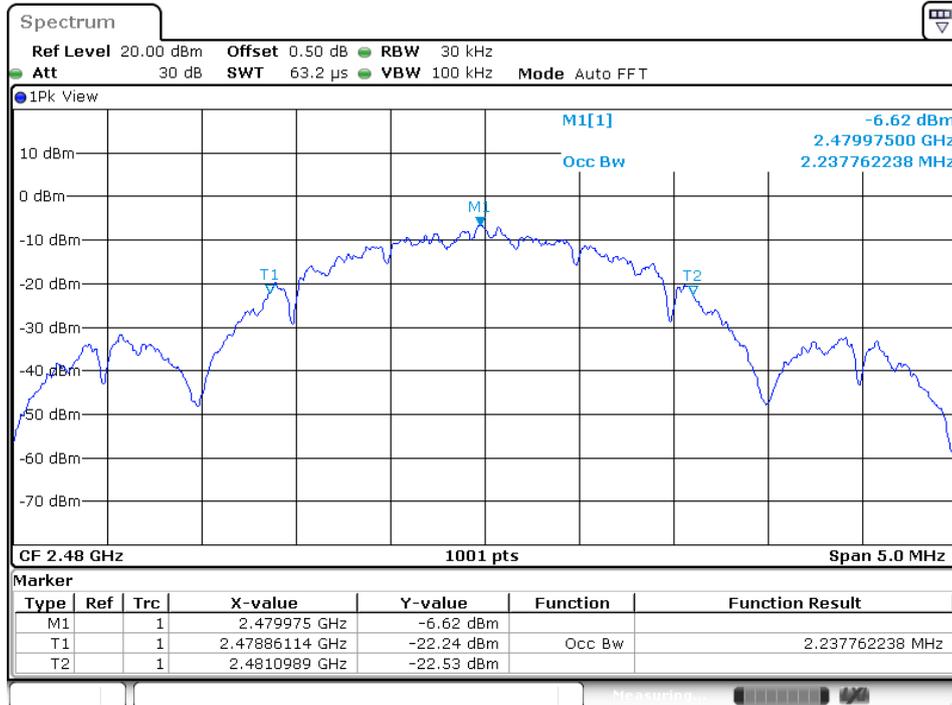
Date: 21.APR.2020 16:29:29

**High Channel**


Date: 27.APR.2020 09:05:21

### 5.1.4 Power Density

**RESULT:**
**Passed**

Test standard : FCC Part 15.247(e) , ISED RSS-247 5.2(b)  
 Basic standard : ANSI C63.10:2013, KDB558074  
 Kind of test site : Shielded room

**Test setup**


Test Channel : Low/ Middle/ High  
 Operation Mode : A  
 Ambient temperature : 20-24 °C  
 Relative humidity : 50-65 %  
 Atmospheric pressure : 100-103 kPa

**Table 10: Test result of Power Density**

Channel	Channel Frequency (MHz)	Power Density	Limit
		(dBm)	(dBm)
Low Channel	2405	-1.62	8
Middle Channel	2440	-1.47	8
High Channel	2480	-10.04	8


## Test Plot of Power Density

### Low Channel

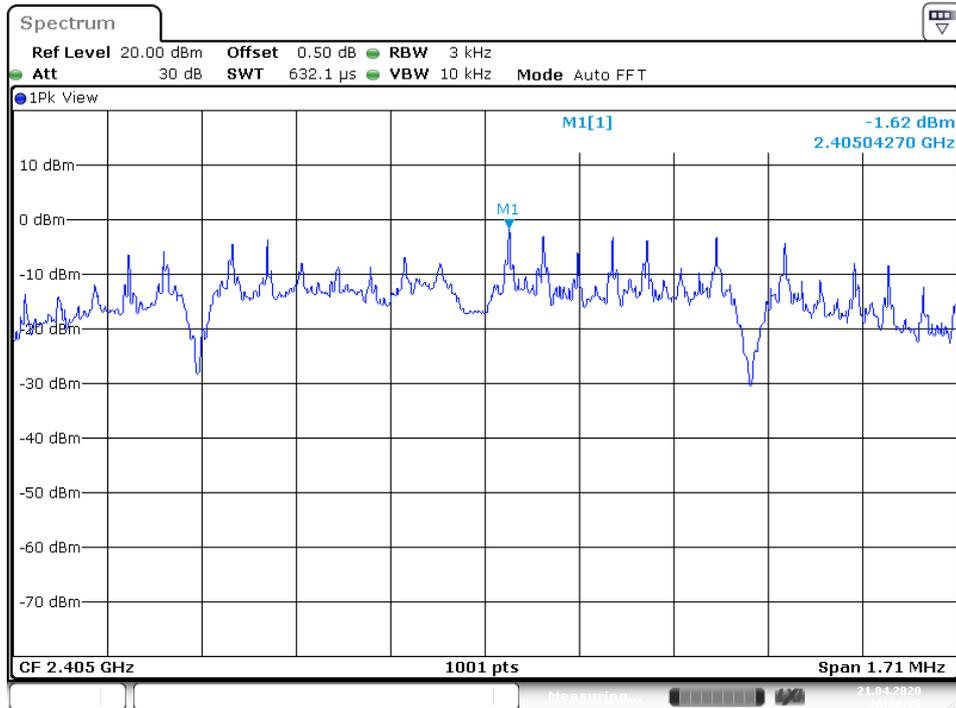


Date: 21.APR.2020 16:28:26

### Middle Channel

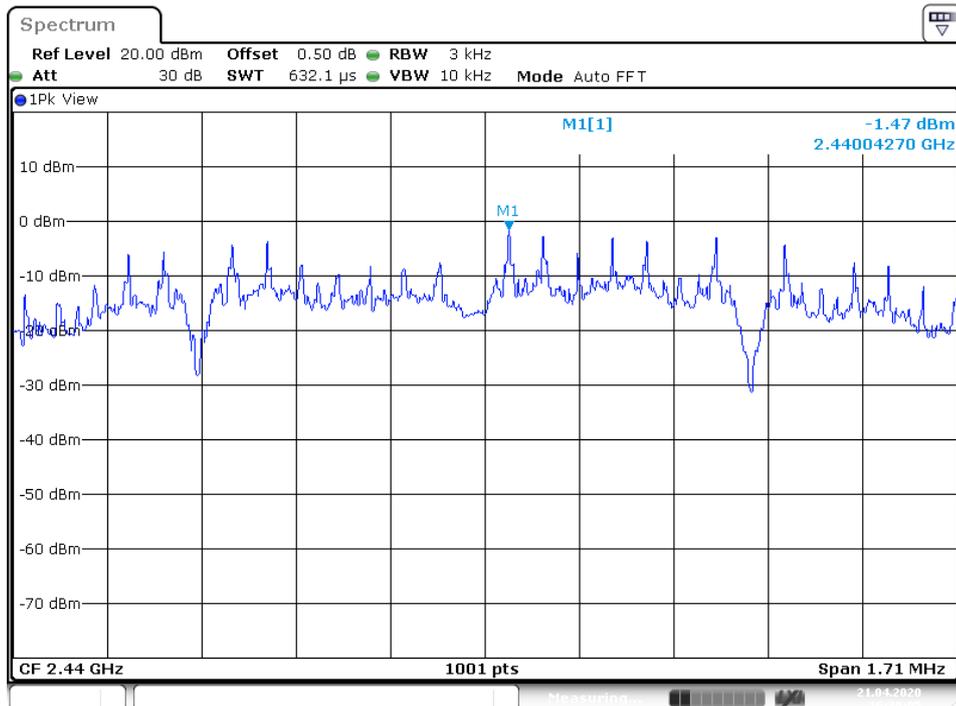

Date: 21.APR.2020 16:30:05

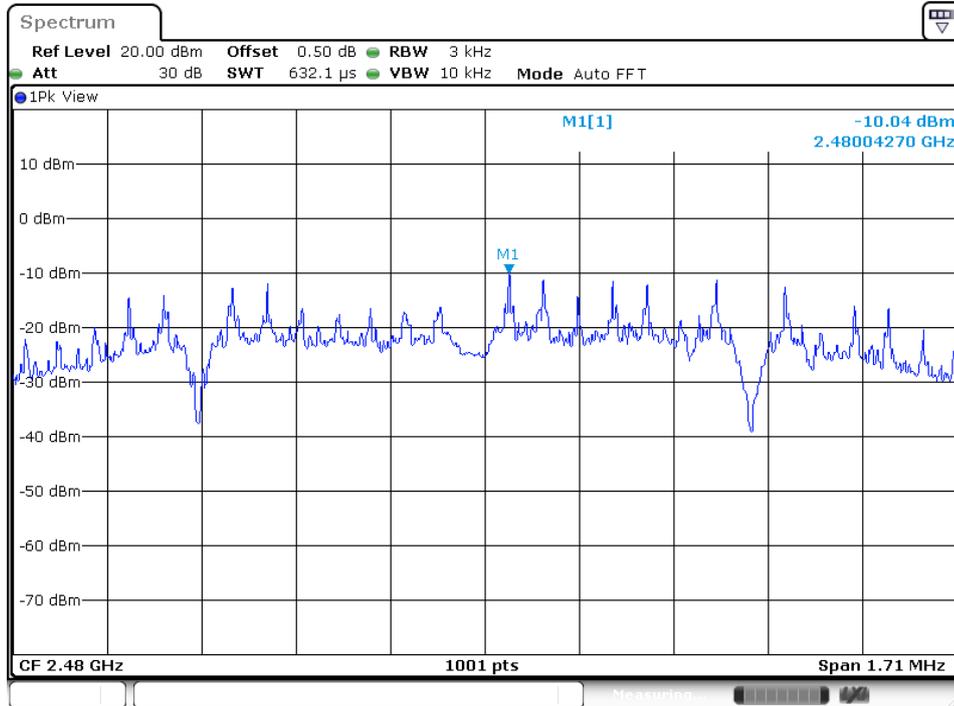**High Channel**


Date: 27.APR.2020 09:05:44

### 5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

**RESULT:****Passed**

Test standard : FCC part 15.247(d), ISED RSS-247 5.5  
Basic standard : ANSI C63.10:2013, KDB558074  
Limit : 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)  
Kind of test site : Shielded room

**Test setup**


Test Channel : Low/ Mid/ High for spurious, Low/ High for Band Edge  
Operation mode : A  
Ambient temperature : 20-24°C  
Relative humidity : 50-65%  
Atmospheric pressure : 100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.


Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.



## Test Plot 100kHz Conducted Emissions


### Low Channel

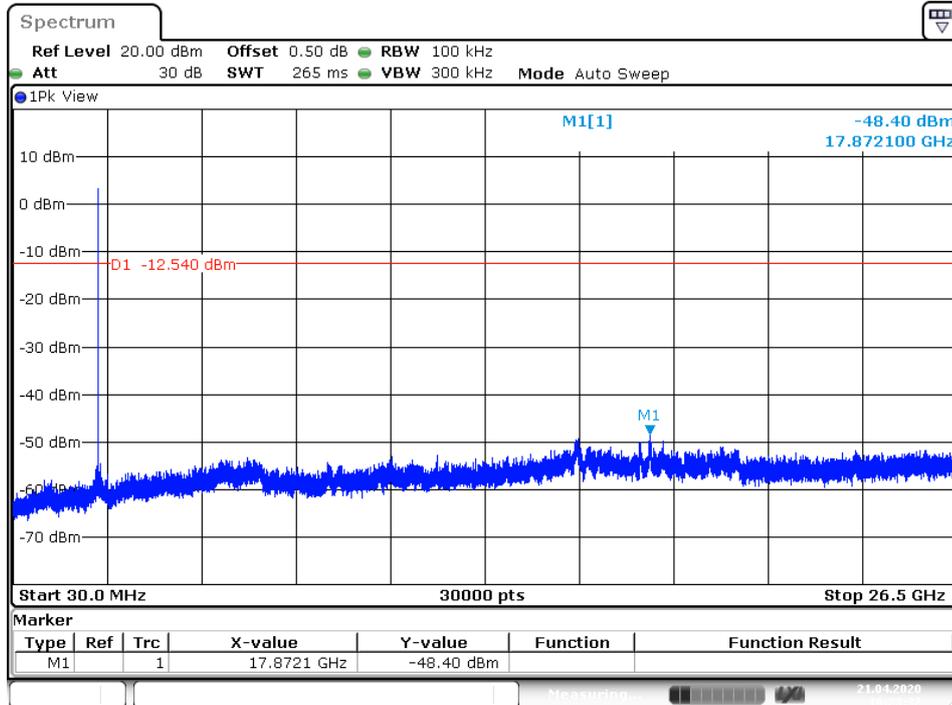

### Middle Channel

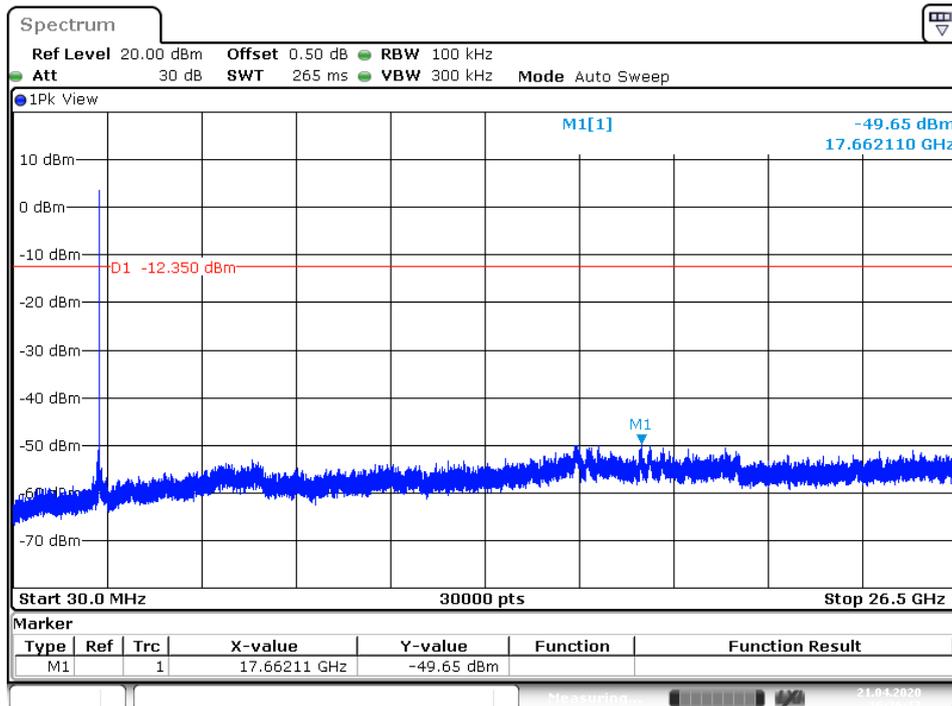

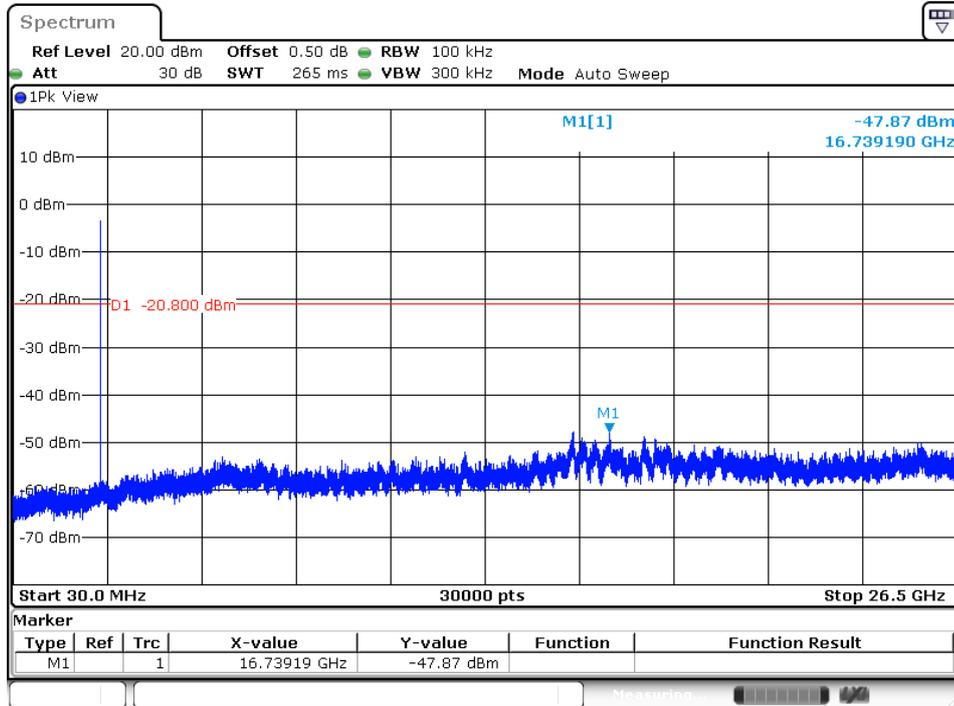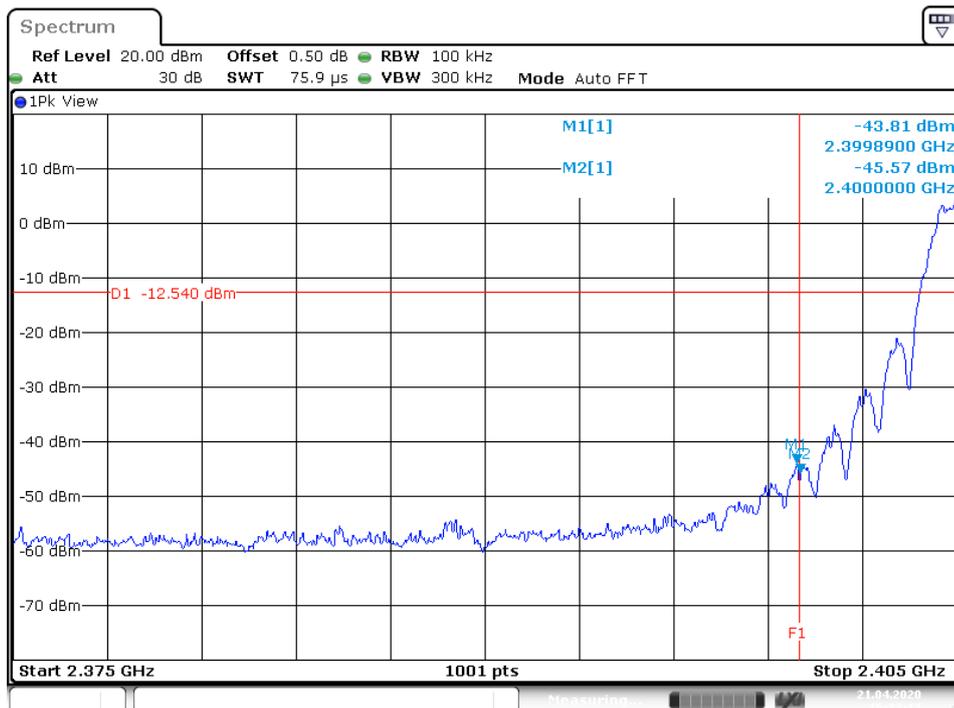**High Channel**

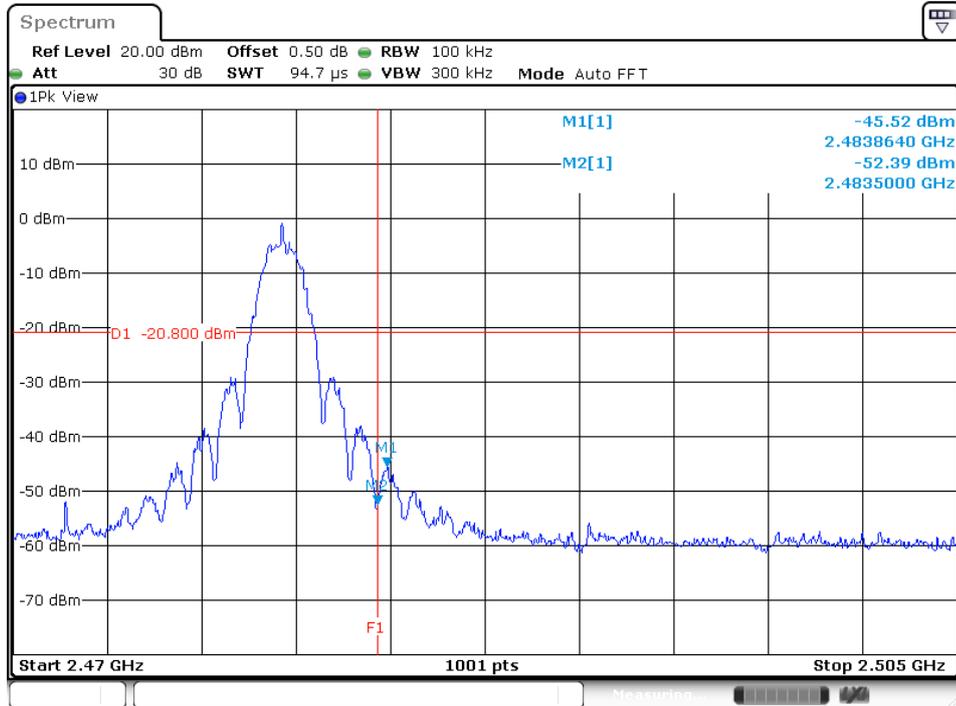**Test Plot 100kHz RBW of Band Edge**
**Low Channel**


**High Channel**


Date: 27.APR.2020 09:06:05

## 5.1.6 Spurious Emission

**RESULT:****Passed**

Test standard : FCC part 15.247(d), FCC 15.205, FCC 15.209, ISED RSS-247 5.5 and ISED RSS-Gen issue 5

Basic standard : ANSI C63.10: 2013

Limits : Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-Gen i5, 8.10 (Table 7), must comply with the radiated emission limits specified in FCC 15.209(a) and ISED RSS-Gen i5, 8.9 (Table 5 and 6).  
Emission radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in FCC15.247(d) and ISED RSS-247 i2, 5.5

Kind of test site : 3m Semi-Anechoic Chamber

**Test setup**

Test Channel : Low/ Middle/ High

Operation mode : A

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report.

Factor (dB/m)=Antenna Factor(dB/m)+Cable loss (dB)  
Level(dBuV/m)=Reading(dBuV)+ Factor(dB/m)

## 6. Safety Human exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:** **Passed**

Test standard : FCC KDB Publication 447498 D01 v06  
 FCC CFR 47 Part 2 Subpart J Section 2.1091  
 ISED RSS-102 issue 5, 2.5.2

Separation distance is more than 20 cm, thus mobile device exposure limits can be applied.

**FCC Maximum Exposure:**

Mode	Frequency (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	Maximum Output Power (dBm)	Output Power (mW)	Power Density (S)(mW/cm <sup>2</sup> )	Test Result
Thread	2480	3.02	2.0045	8.09	6.4417	0.002570	Pass

**Limit FCC: 1500-100,000 MHz 1.0 mW/cm<sup>2</sup>**

**ISED:**

**Exemption Limits for Routine Evaluation – RF Exposure Evaluation**

At or above 300MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W, where f is in MHz;

f= 2480MHz

$$1.31 \times 10^{-2} \times 2480^{0.6834} = 2.74W$$

After evaluation the 2480MHz e.i.r.p 11.11dBm calculated result is closer to its limit.


11.11dBm = 0.01291W, it is well below the limit of Exemption Limits for Routine Evaluation, so RF exposure assessment meets its standards.

## 7. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (Front View)




Photograph 2: Set-up for Spurious Emissions (Front View 2)

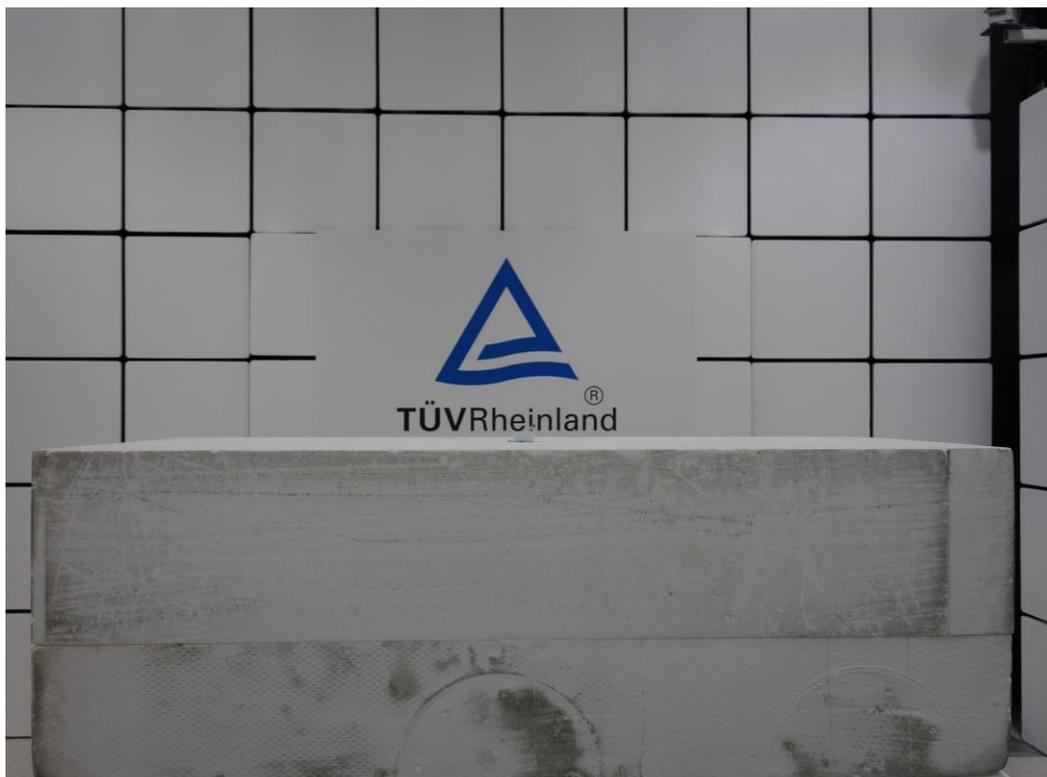


**Photograph 3: Set-up for Spurious Emissions (Back View 1)**

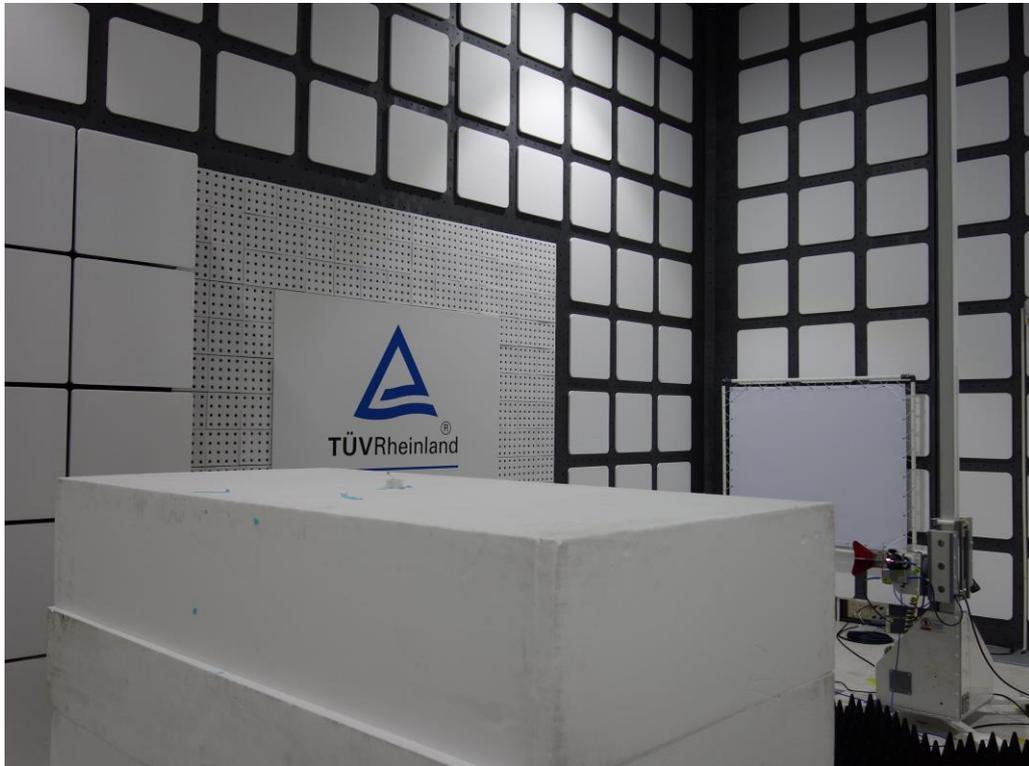


**Photograph 4: Set-up for Spurious Emissions (Back View 2)**

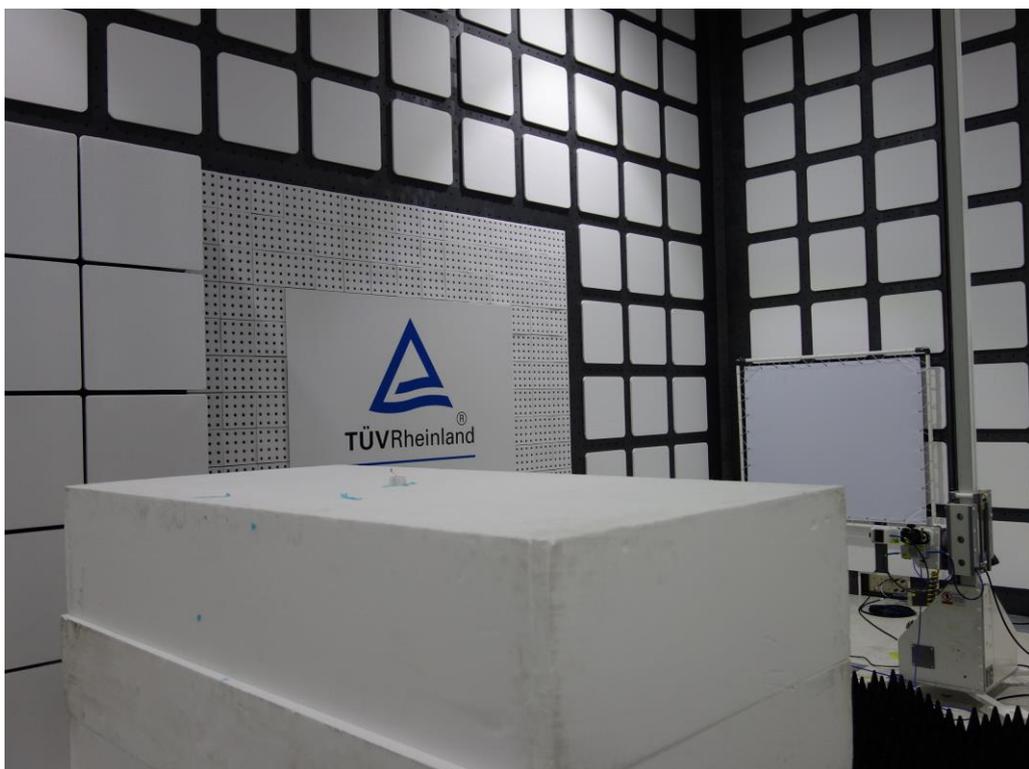


**Photograph 5: Set-up for Spurious Emissions (Back View 3)**

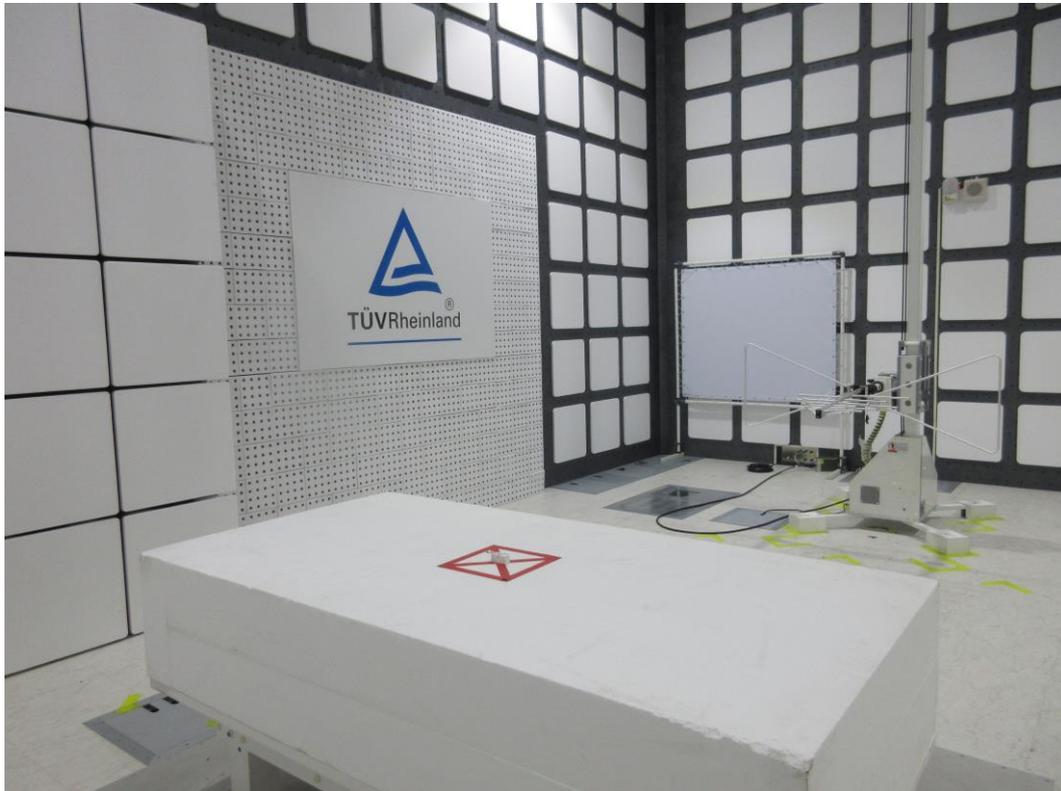


**Photograph 6: Set-up for Spurious Emissions (Back View 4)**

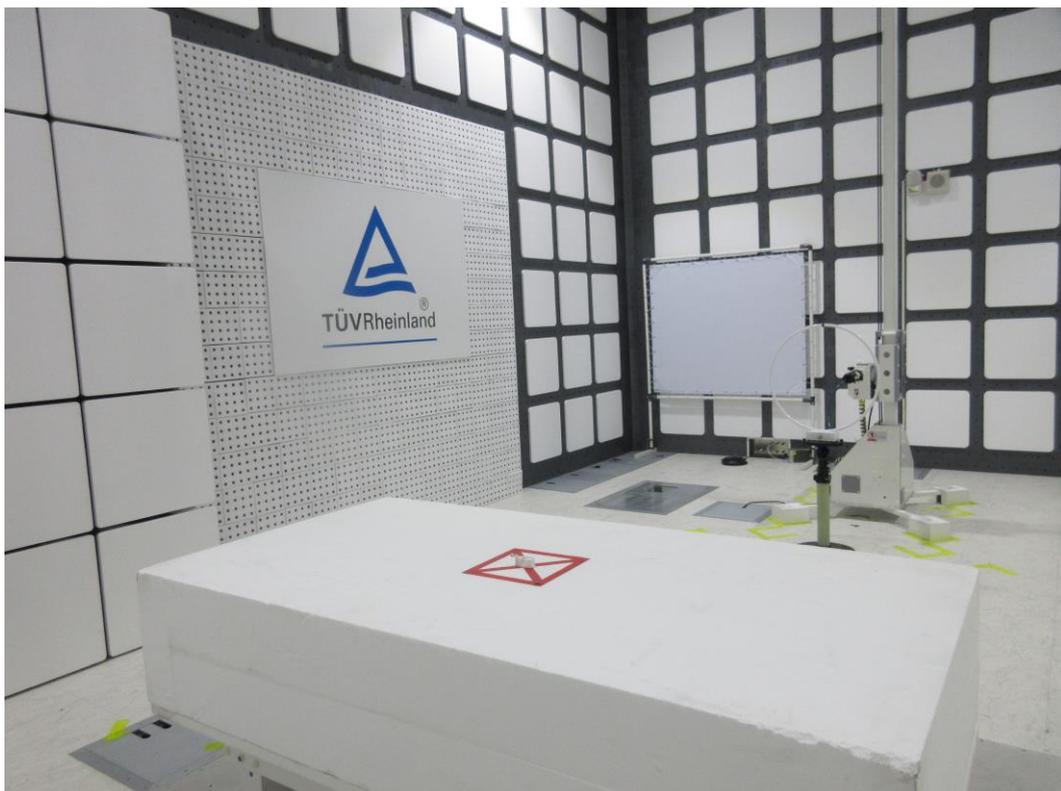

Photograph 7: Set-up for Conducted Testing (View 1)

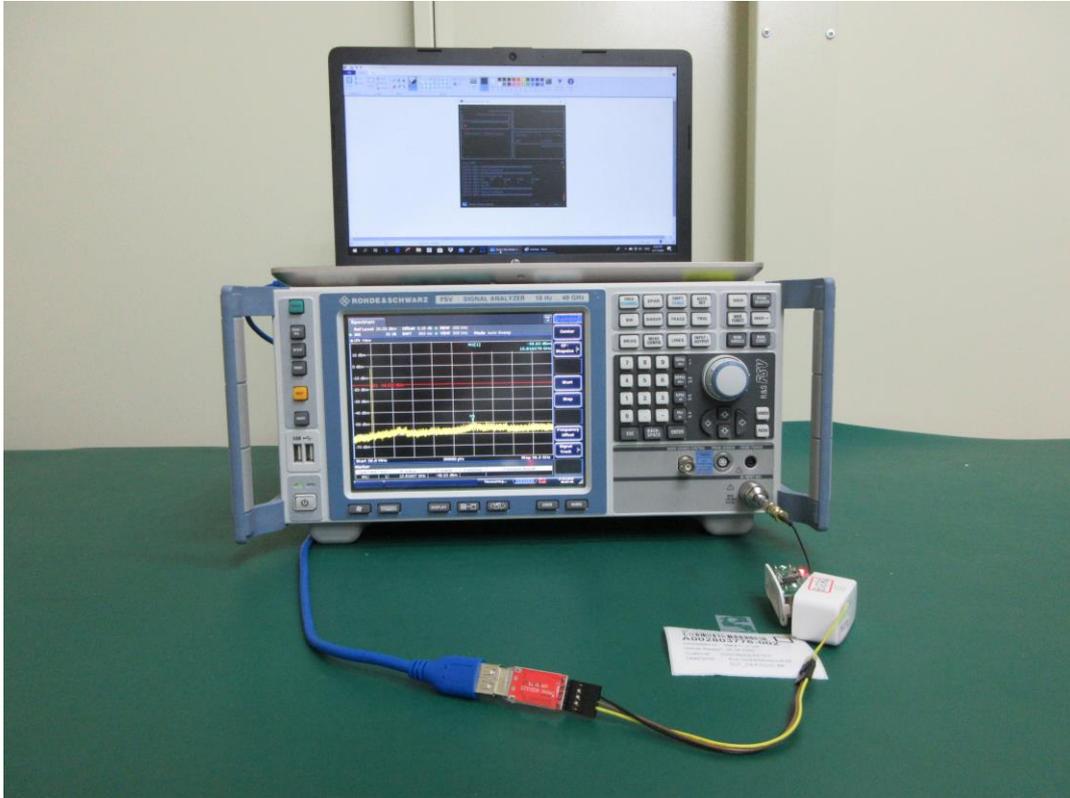

Photograph 8: Set-up for Conducted Testing (View 2)

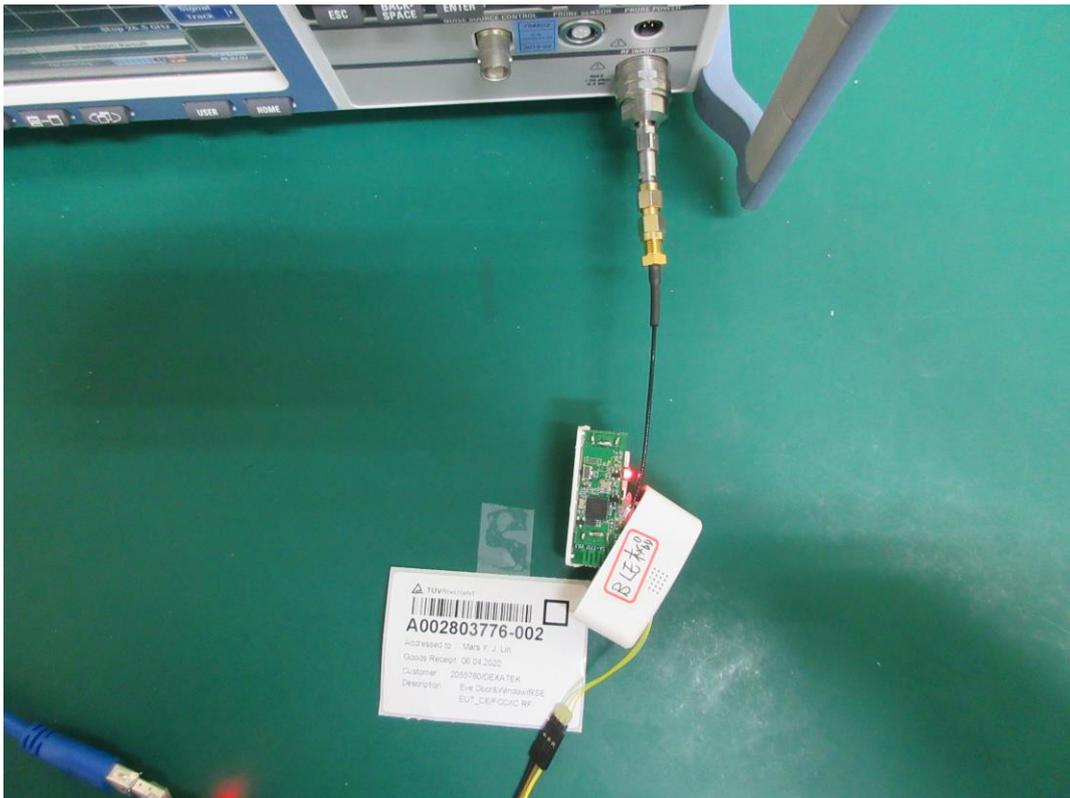

## 8. List of Tables

Table 1: Applied Standard and Test Levels .....	5
Table 2: List of Test and Measurement Equipment .....	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT .....	9
Table 5: Technical Specification of EUT .....	9
Table 6: Table for Parameters of Test Software Setting .....	11
Table 7: Test result of Maximum conducted Peak output power .....	15
Table 8: Test result of 6dB Bandwidth .....	16
Table 9: Test result of 99% Bandwidth.....	16
Table 10: Test result of Power Density .....	20

## 9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	29
Photograph 2: Set-up for Spurious Emissions (Front View 2).....	29
Photograph 3: Set-up for Spurious Emissions (Back View 1) .....	30
Photograph 4: Set-up for Spurious Emissions (Back View 2) .....	30
Photograph 5: Set-up for Spurious Emissions (Back View 3) .....	31
Photograph 6: Set-up for Spurious Emissions (Back View 4) .....	31
Photograph 7: Set-up for Conducted Testing (View 1) .....	32
Photograph 8: Set-up for Conducted Testing (View 2) .....	32