

**FCC RF Exposure Exemption report**

**for**

**EVE Energy**

**Model No.: 20ECN4101**

**FCC ID: SNE-DOUS-001**

**of**

**Applicant: Eve Systems LLC**

**Address: 100 Pine St., Suite 1250, San Francisco CA 94111 USA**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: TW1477, TW1072**

**Industry Canada filed test laboratory Reg. No.: 20037, 5107A**



**Report No.: W6M22308-22900-EE**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



Registration number: W6M22308-22900-EE  
FCC ID: SNE-DOUS-001

**TABLE OF CONTENTS**

**1 GENERAL INFORMATION.....2**

1.1 NOTES.....2

1.2 TESTING LABORATORY .....3

1.3 APPLICATION DETAILS .....3

1.4 GENERAL INFORMATION OF TEST ITEM.....4

1.5 DUTY CYCLE AND FACTOR .....5

1.6 TEST STANDARDS.....8

**2 TEST CONFIGURATION .....9**

2.1 TEST ENVIRONMENT .....9

2.2 MEASUREMENT UNCERTAINTY .....9

2.3 TEST EQUIPMENT LIST.....9

**3 EQUIVALENT ISOTROPIC RADIATED POWER (EIRP).....10**

3.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION.....10



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22308-22900-EE  
FCC ID: SNE-DOUS-001

## 1 General Information

### 1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

### **Tester:**

November 13, 2023

Brian Ng

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

November 13, 2023

Kevin Wang

Date

WTS

Name

Signature



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

## **1.2 Testing laboratory**

### **1.2.1 Location**

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,  
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,  
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,  
Taipei City 114, Taiwan (R.O.C.)

Tel: 886-2-6606-8877

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.

Accredited no.: ./.

Street: ./.

Town: ./.

Country: ./.

## **1.3 Application details**

### **Approval holder**

Name: Eve Systems LLC

Street: 100 Pine St., Suite 1250, San Francisco

Town: CA 94111

Country: USA

### **Manufacturer: (if applicable)**

Name: Dexatek Technology Ltd.

Street: 16F., No.81, Sec. 1, Xintai 5th Rd., Xizhi Dist.,

Town: New Taipei City 221,

Country: Taiwan (R.O.C.)



Registration number: W6M22308-22900-EE  
FCC ID: SNE-DOUS-001

Date of receipt of test item: October 03, 2023

Date of test: from October 04, 2023 to October 11, 2023

## 1.4 General information of Test item

Type of test item: EVE Energy  
Model no.: 20ECN4101  
Multi-listing model no.: ./.  
Brand name: Eve  
Power supply: 100-110Va.c./60Hz, 15A  
Type of antenna: PIFA antenna  
Antenna gain: 0.31 dBi

### Technical data

Mode	Channel	Conducted Power (dBm)
BLE 1M	Ch 0 : 2402 MHz	4.55
	Ch 19 : 2440 MHz	4.18
	Ch 39 : 2480 MHz	3.89

Mode	Channel	Conducted Power (dBm)
BLE 2M	Ch 0 : 2402 MHz	4.60
	Ch 19 : 2440 MHz	4.23
	Ch 39 : 2480 MHz	3.93

Mode	Channel	Conducted Power (dBm)
THREAD	Ch 11 : 2405 MHz	7.72
	Ch 18 : 2440 MHz	7.55
	Ch 26 : 2480 MHz	7.45

Operation modes: Duplex  
Modulation type: GFSK  
Sample no.: #01  
Special statement: ./.



Registration number: W6M22308-22900-EE  
 FCC ID: SNE-DOUS-001

Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input checked="" type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>

**1.5 Duty cycle and factor**

BLE

Mode	T <sub>on</sub> (ms)	T <sub>on</sub> +T <sub>off</sub> (ms)	Duty cycle (%)	1/T - VBW (kHz)
BLE 1M	0.401	0.625	64.10%	2.50
BLE 2M	0.216	0.625	34.62%	4.62

THREAD

Mode	T <sub>on</sub> (ms)	T <sub>on</sub> +T <sub>off</sub> (ms)	Duty cycle (%)	1/T - VBW (kHz)
THREAD	0.86138	1.00561	85.66%	1.16



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001


Duty cycle plot

BLE

1M

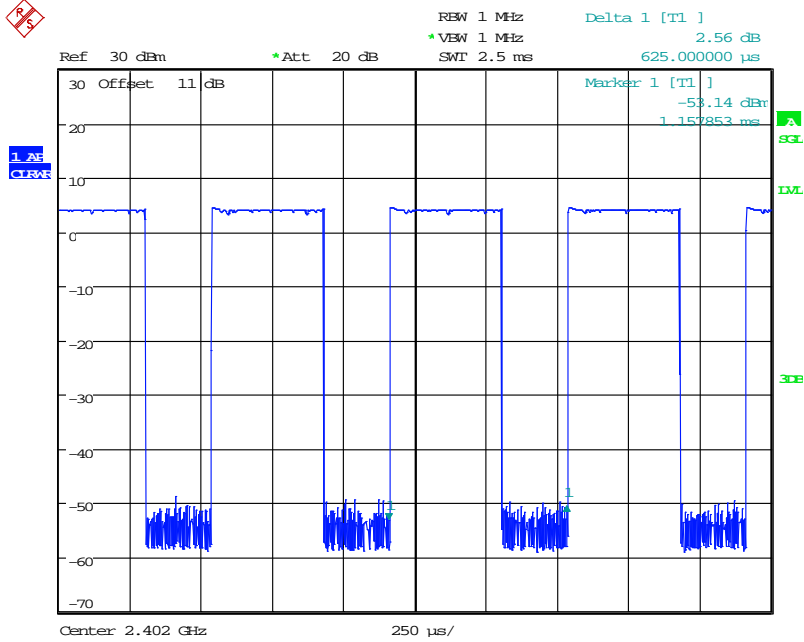

Date: 5.OCT.2023 11:05:35

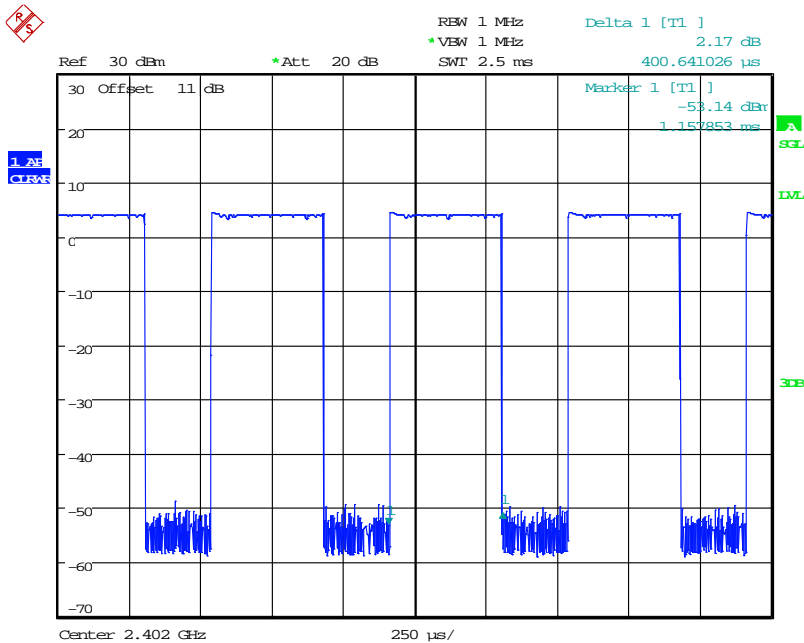


Date: 5.OCT.2023 11:05:44




Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

2M

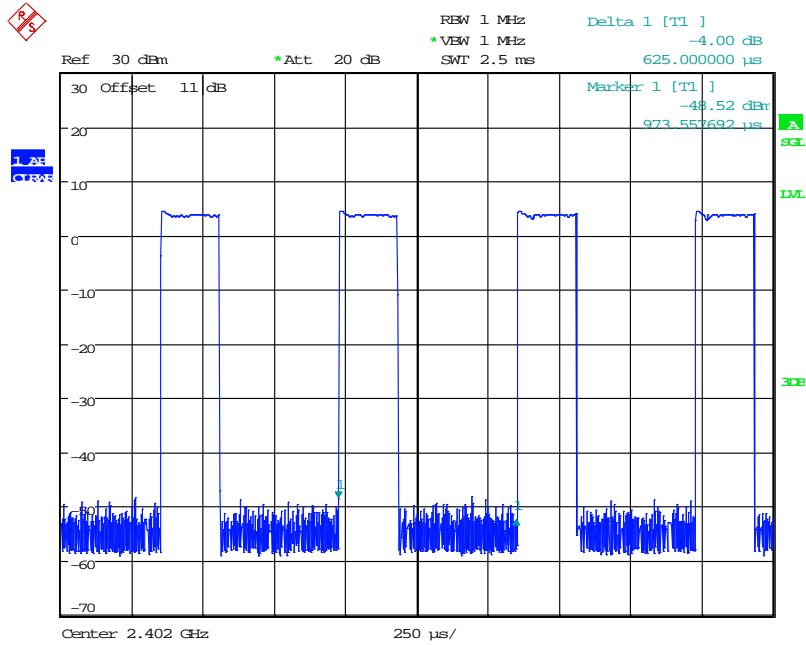


Date: 5.OCT.2023 11:06:20

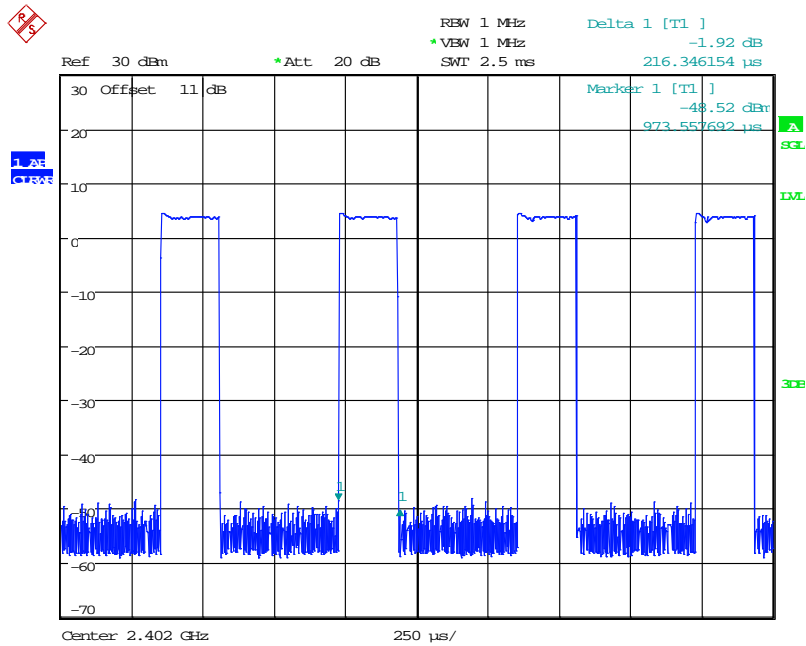

Date: 5.OCT.2023 11:06:29







Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

THREAD

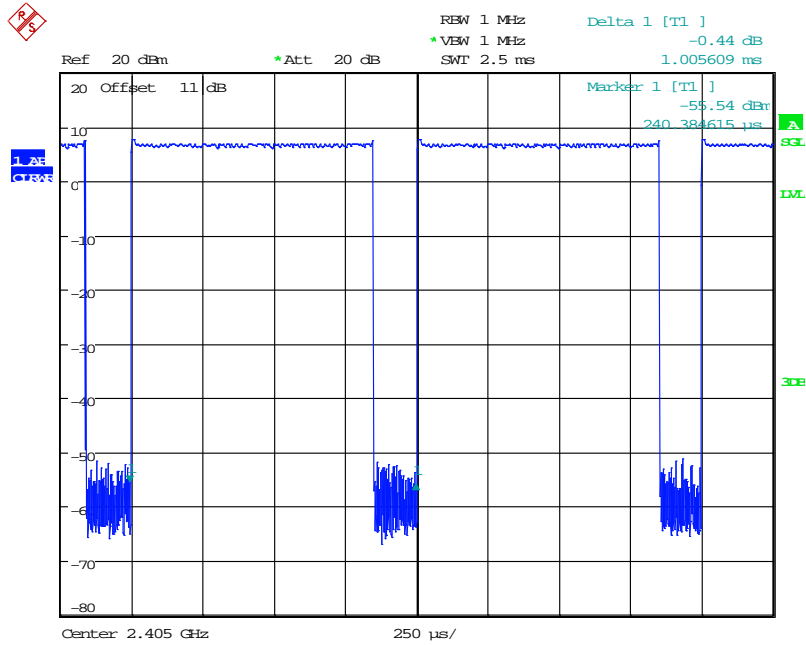

Date: 4.OCT.2023 17:45:49

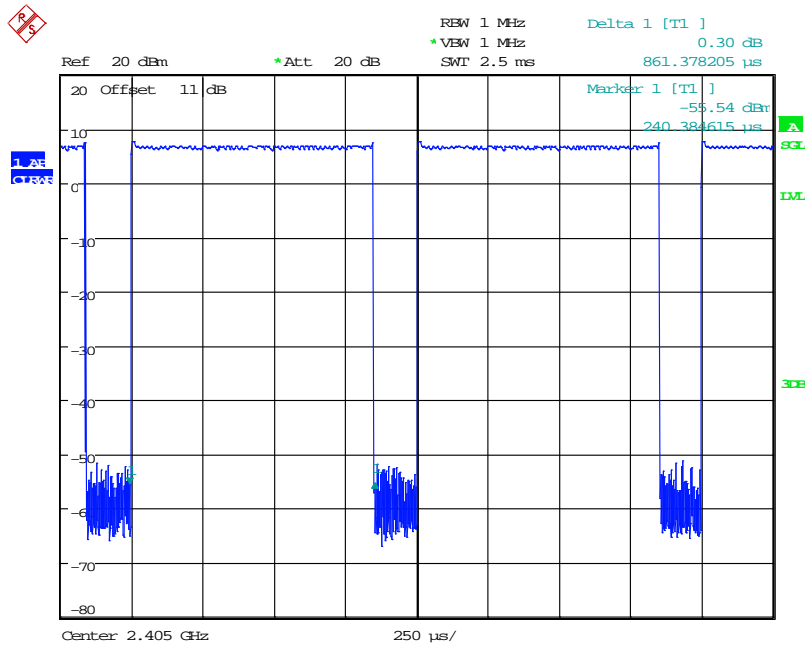

Date: 4.OCT.2023 17:45:57

## 1.7 Test standards

47 CFR PART 15 SUBPART C § 15.247 (2021-10)



Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

## 2 Test configuration

### 2.1 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Extreme conditions parameters: ./.

### 2.2 Measurement uncertainty


Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.48 dB

The decision rule is: Measurement uncertainty is not included in the calculation of test results.

### 2.3 Test Equipment List

#### RF Conducted

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2023/7/24	2024/7/23
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2023/9/20	2024/9/19
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2023/8/28	2024/8/27
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2023/4/27	2024/4/26
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16
ETSTW-Cable 045	Microwave Cable	SUCOFLEX 104	325536	HUBER+SUHNER	2022/10/21	2023/10/20
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2023/5/26	2024/5/25
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	



Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

## **3 Equivalent Isotropic Radiated Power (EIRP)**

### **3.1 Exemption Limits for Routine Evaluation**

**according to 47 CFR FCC Part 2 Subpart J, section 2.1091**

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 20 cm normally can be maintained between the user and the device.

### **MPE Calculation Method**

#### **(A) Limits for Occupational/Controlled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

#### **(B) Limits for General Population/Uncontrolled Exposure**

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz

\*Plane-wave equivalent power density

E = Electric field (V/m) P = output power (W) G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2} \text{ mW/cm}^2.$$



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22308-22900-EE

FCC ID: SNE-DOUS-001

Established separation distance is 20 cm.

## BLE

Operating frequency band: 2402-2480 MHz

## THREAD

Operating frequency band: 2405-2480 MHz

Mode	Channel/Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Power density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
BLE 1M	Ch 0 : 2402 MHz	4.55	0.31	0.0006	1
	Ch 19 : 2440 MHz	4.18	0.31	--	--
	Ch 39 : 2480 MHz	3.89	0.31	--	--
BLE 2M	Ch 0 : 2402 MHz	4.60	0.31	0.0006	1
	Ch 19 : 2440 MHz	4.23	0.31	--	--
	Ch 39 : 2480 MHz	3.93	0.31	--	--

Mode	Channel/Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Power density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )
THREAD	Ch 11 : 2405 MHz	7.72	0.31	0.0013	1
	Ch 18 : 2440 MHz	7.55	0.31	--	--
	Ch 26 : 2480 MHz	7.45	0.31	--	--