

Test Report No.50246753 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50246753 001AppendixD)


Contents

Spurious Emissions, Band Edges	2
Spurious Emissions, TX Mode, 1GHz-18GHz.....	35
Spurious Emissions, TX Mode, 18GHz-40GHz.....	101
Spurious Emissions, TX Mode, 30MHz-1GHz.....	167
Spurious Emissions, TX Mode, 9kHz-30MHz.....	169
Spurious Emissions, AC Mains	171


Spurious Emissions, Band Edges

802.11a


Channel 36(Horizontal)

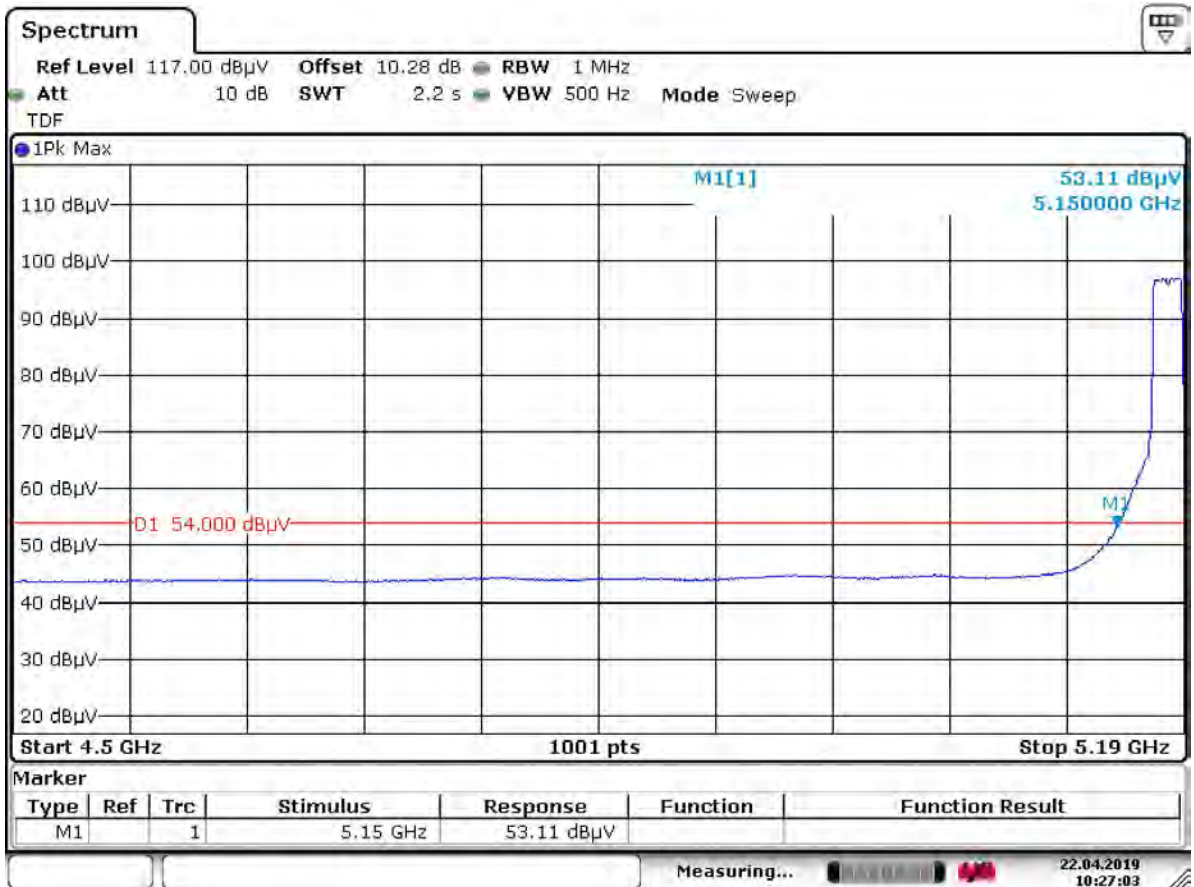


Date: 22.APR.2019 10:27:03

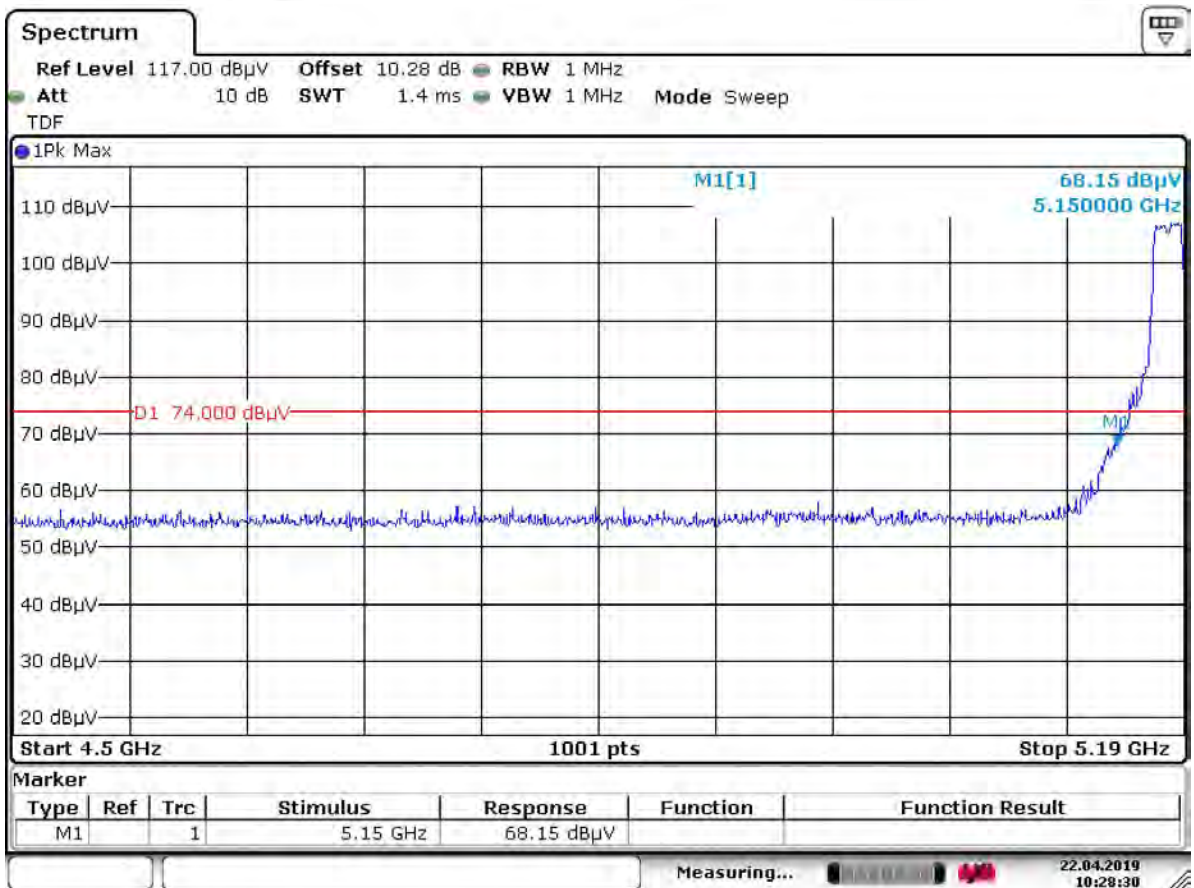

Date: 22.APR.2019 10:28:30

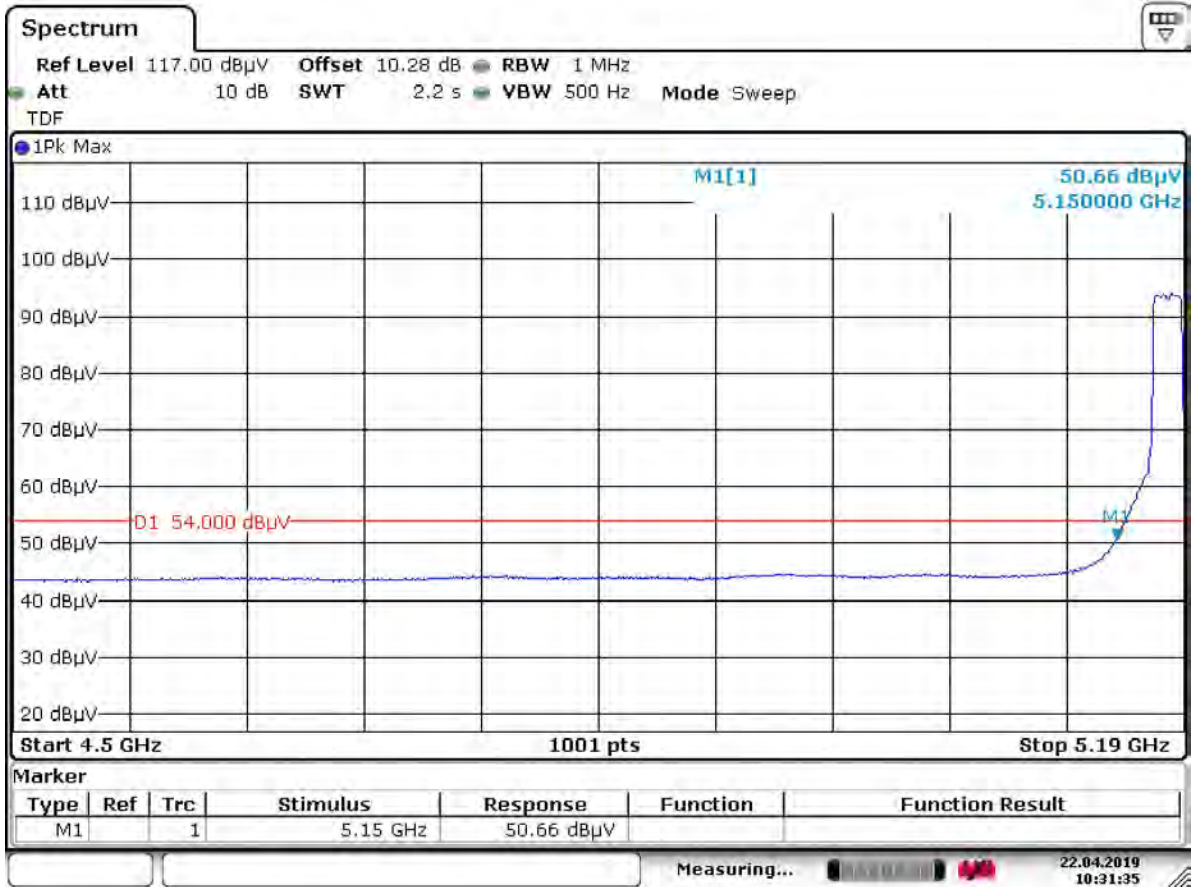


Date: 22.APR.2019 10:31:35

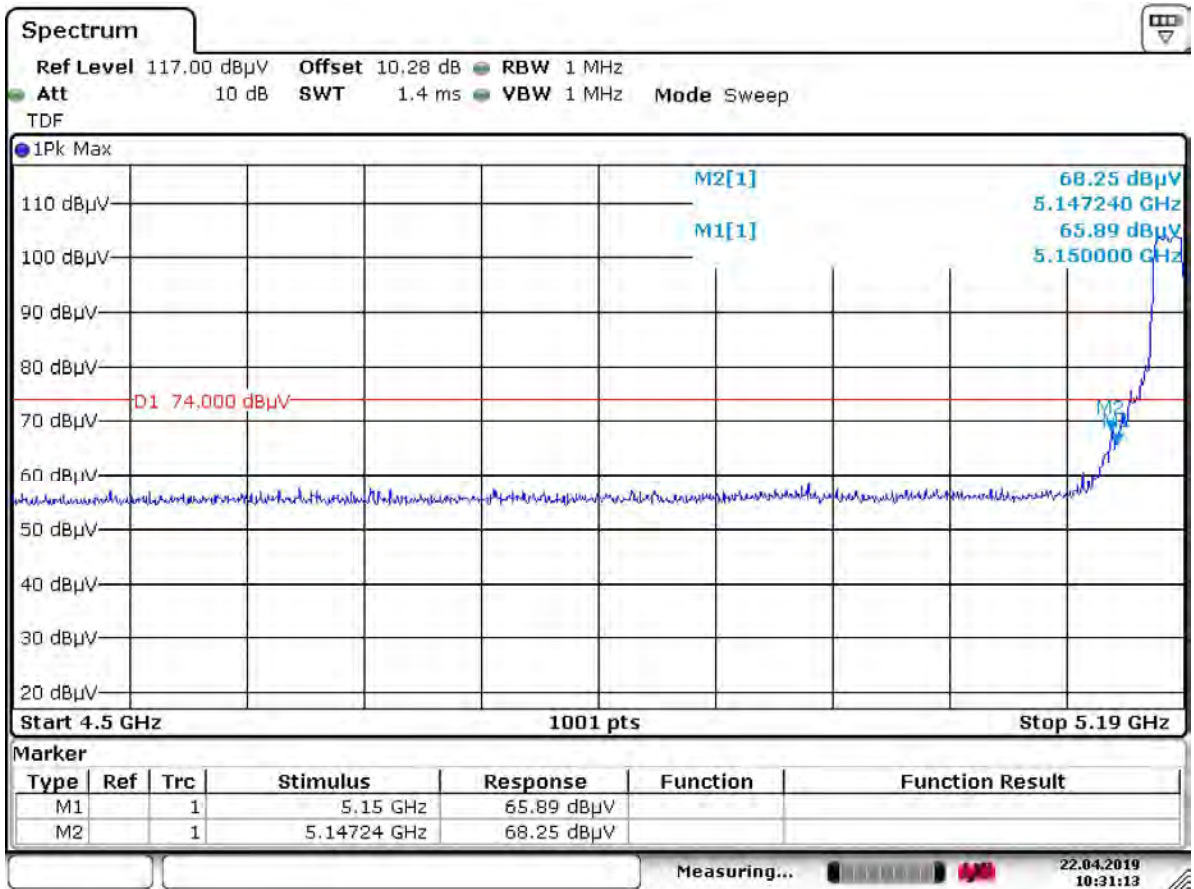


Date: 22.APR.2019 10:31:13


Channel 48(Horizontal)

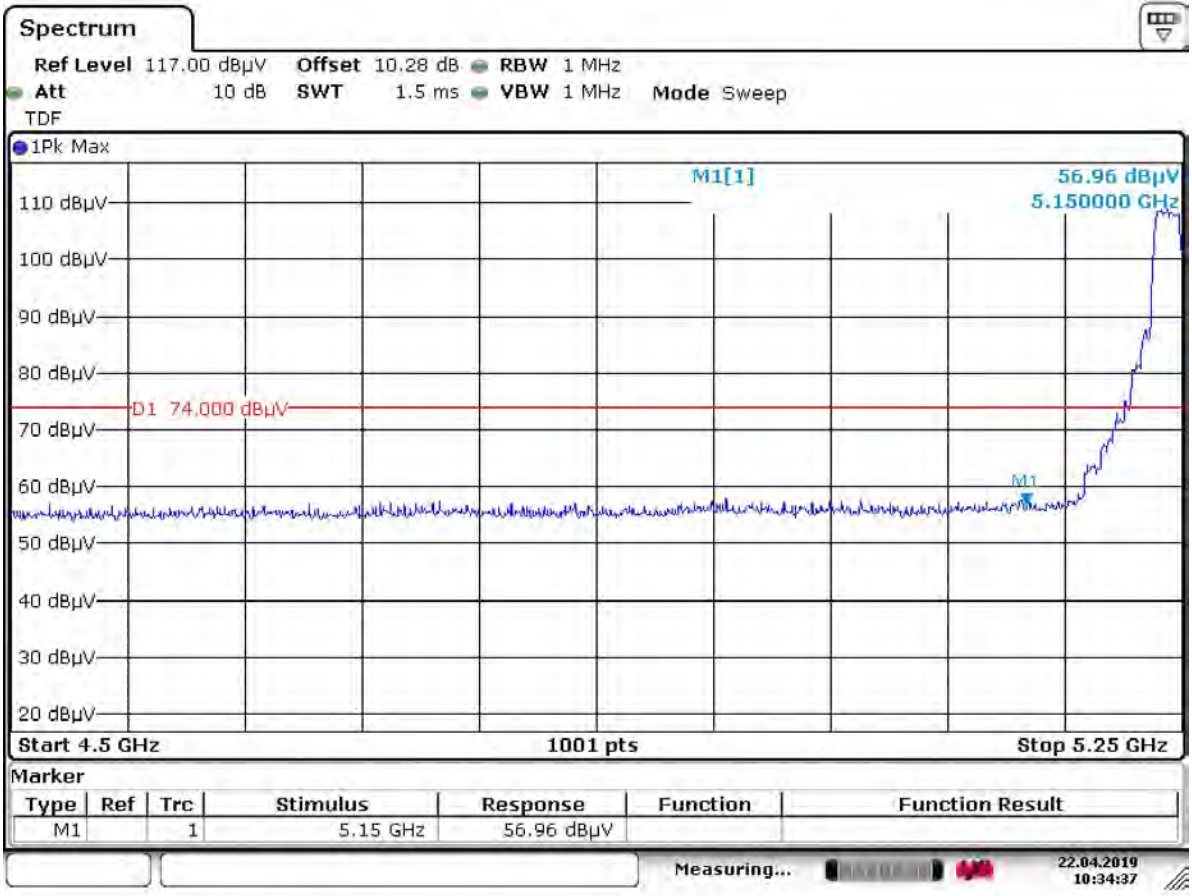


Date: 22.APR.2019 10:34:37

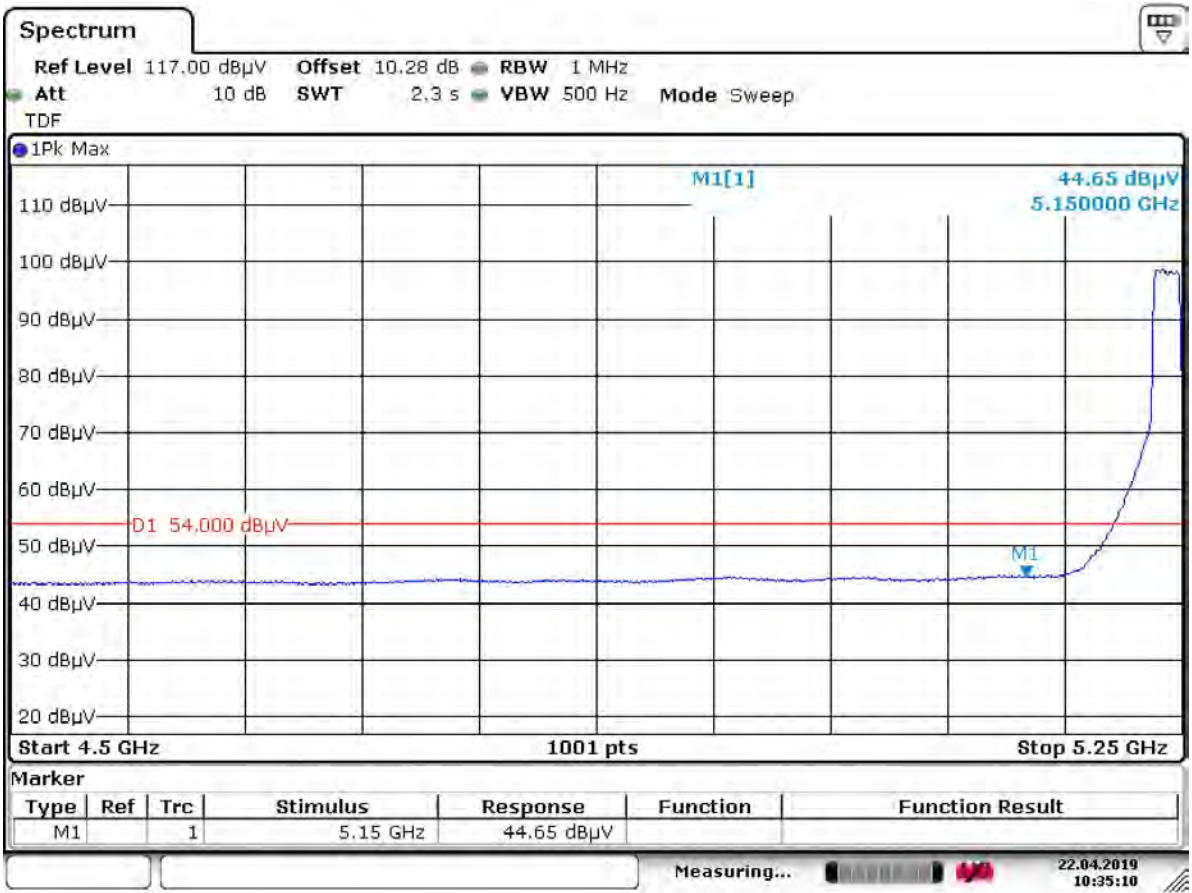

Date: 22.APR.2019 10:35:10

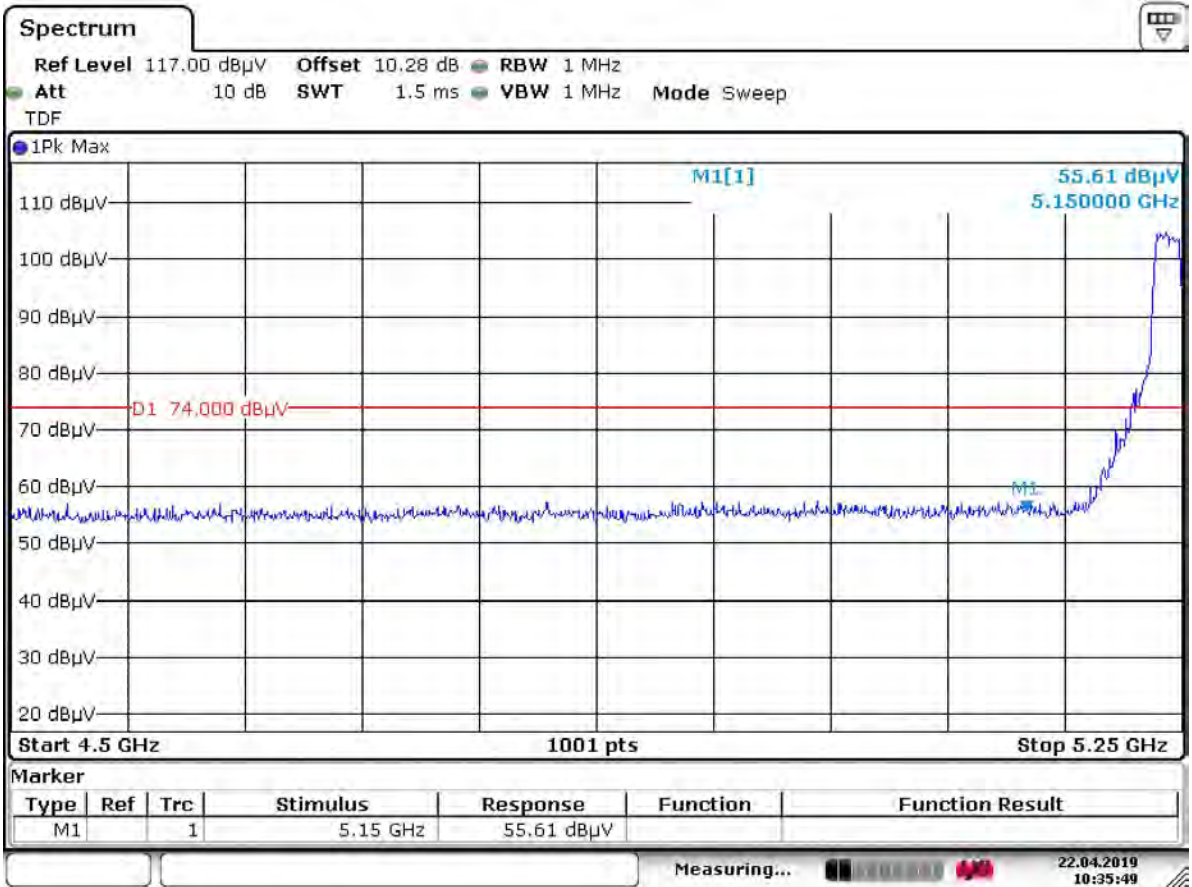


Date: 22.APR.2019 10:35:49

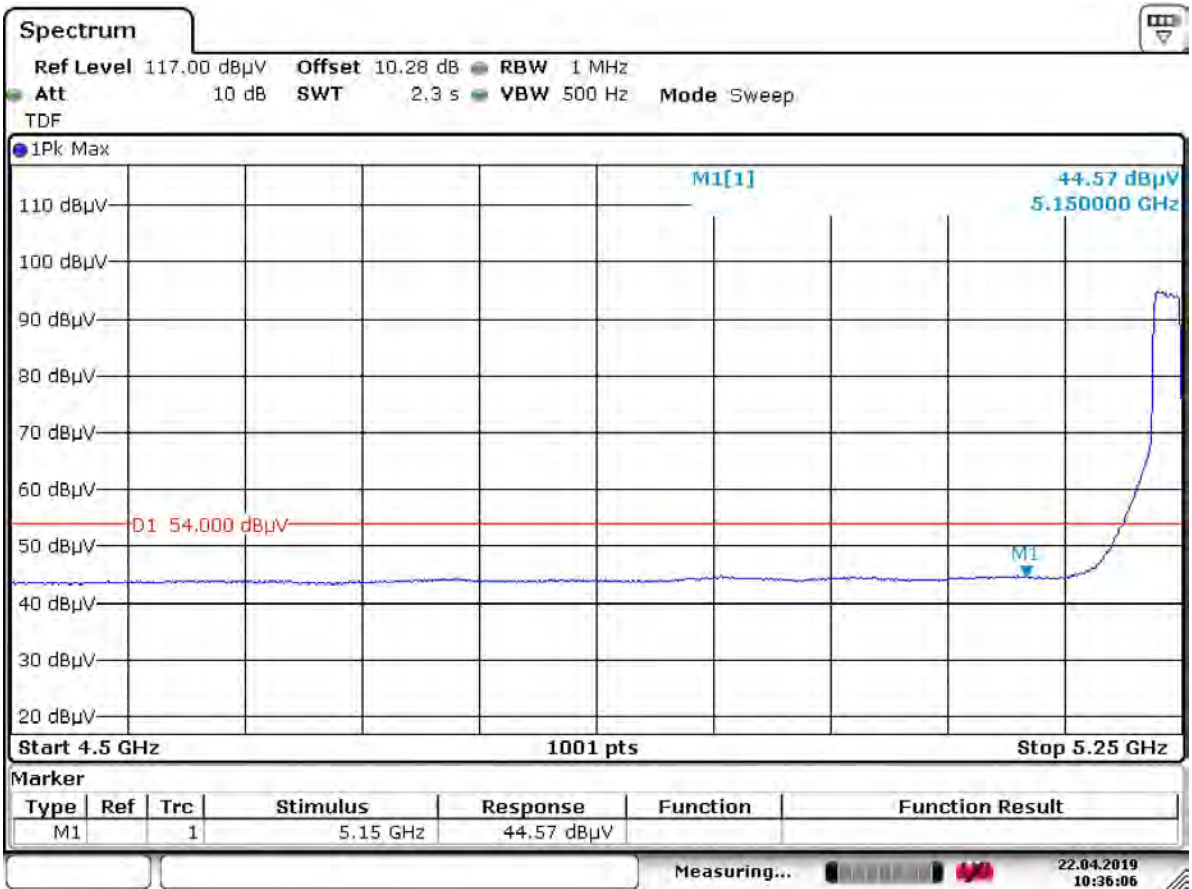


Date: 22.APR.2019 10:36:06




Date: 22.APR.2019 10:38:53

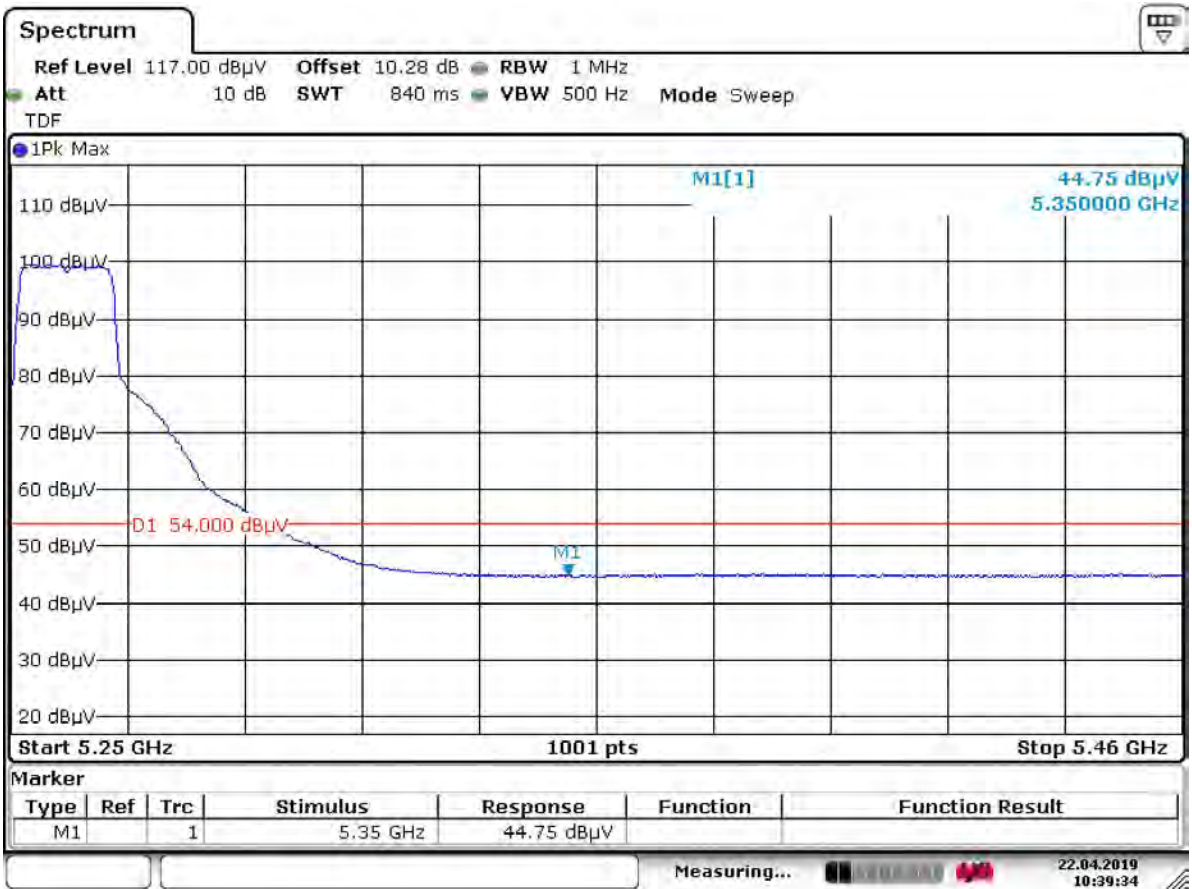


Date: 22.APR.2019 10:39:34

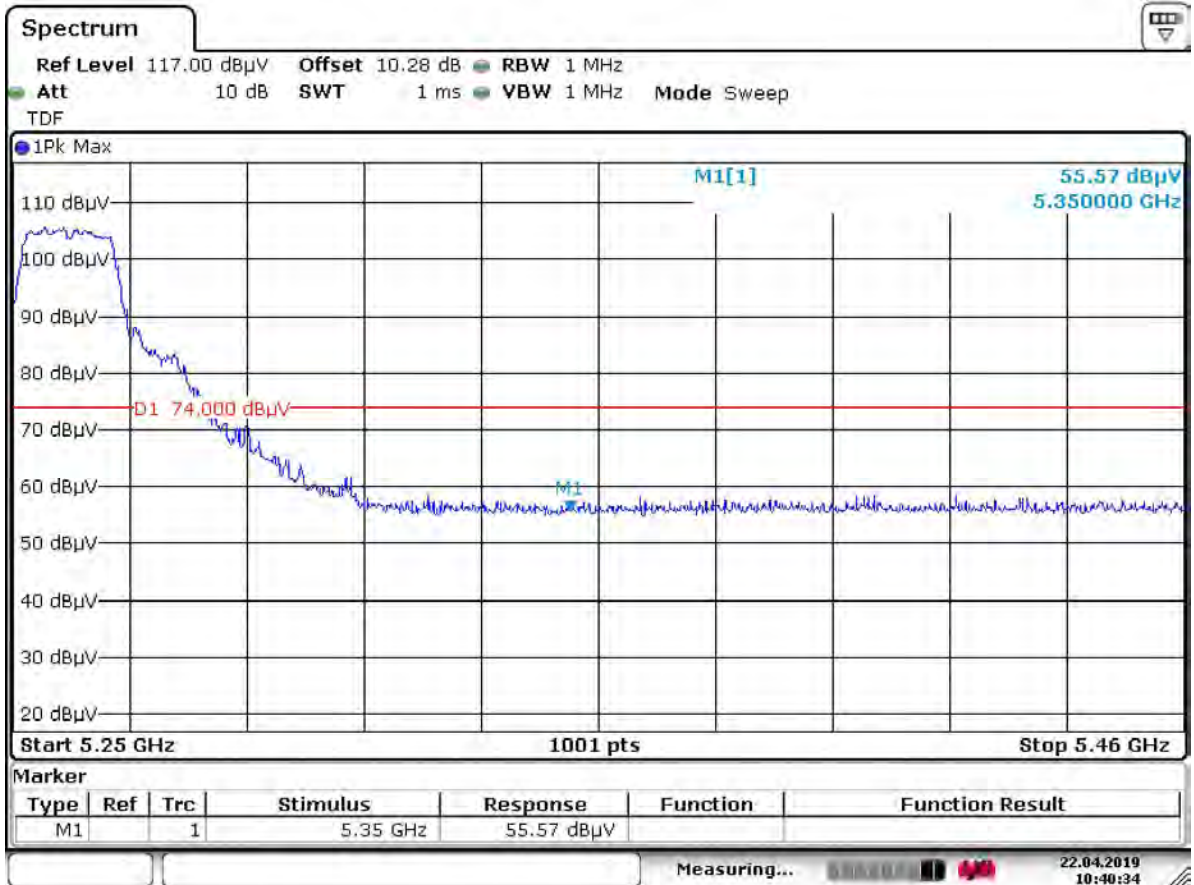

Date: 22.APR.2019 10:40:33

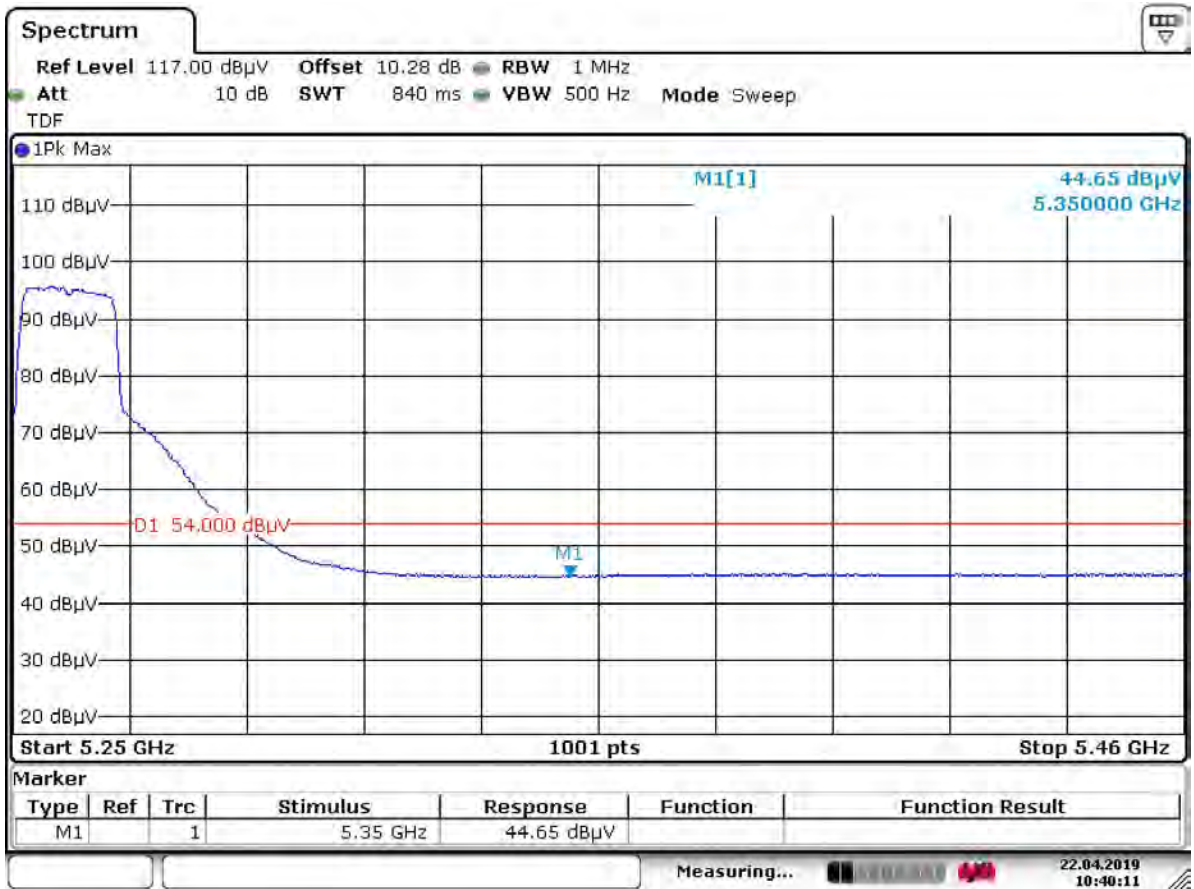


Date: 22.APR.2019 10:40:11

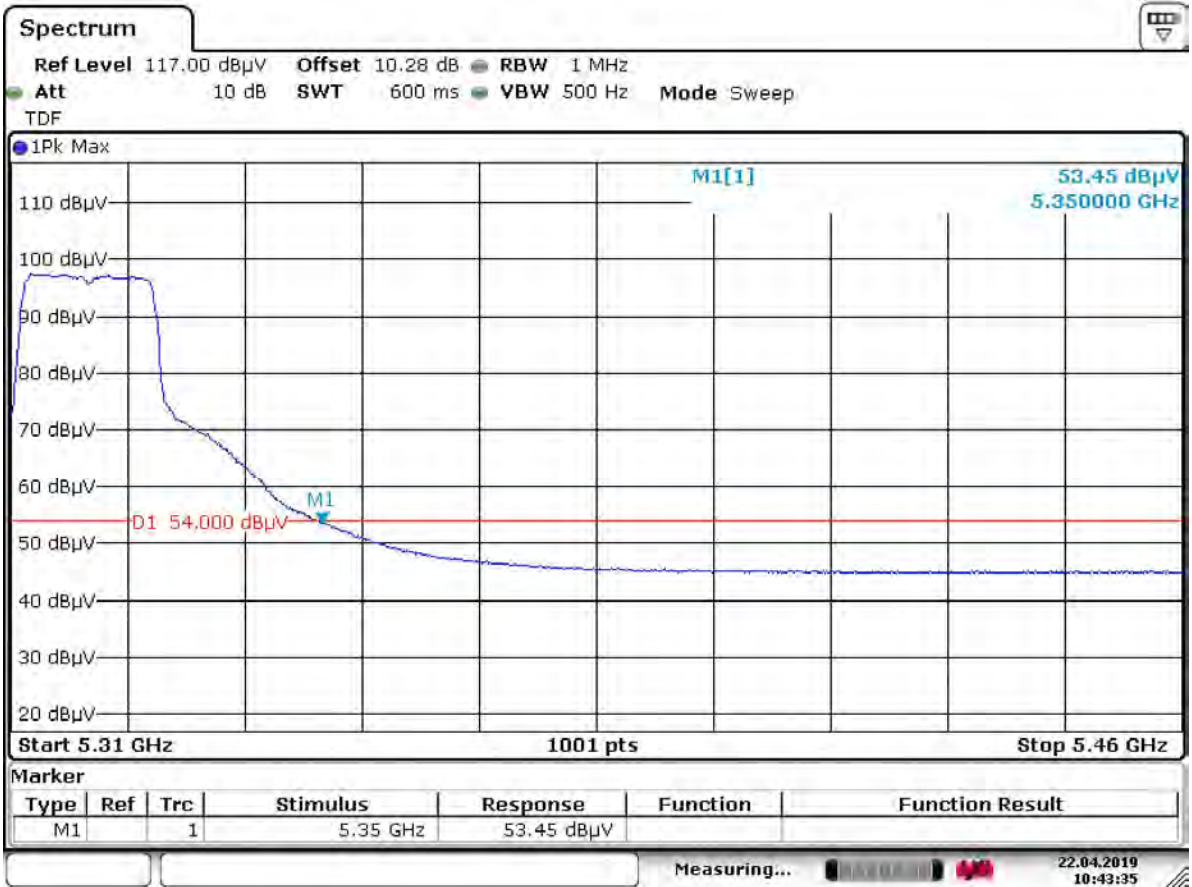


Date: 22.APR.2019 10:43:34




Date: 22.APR.2019 10:45:28

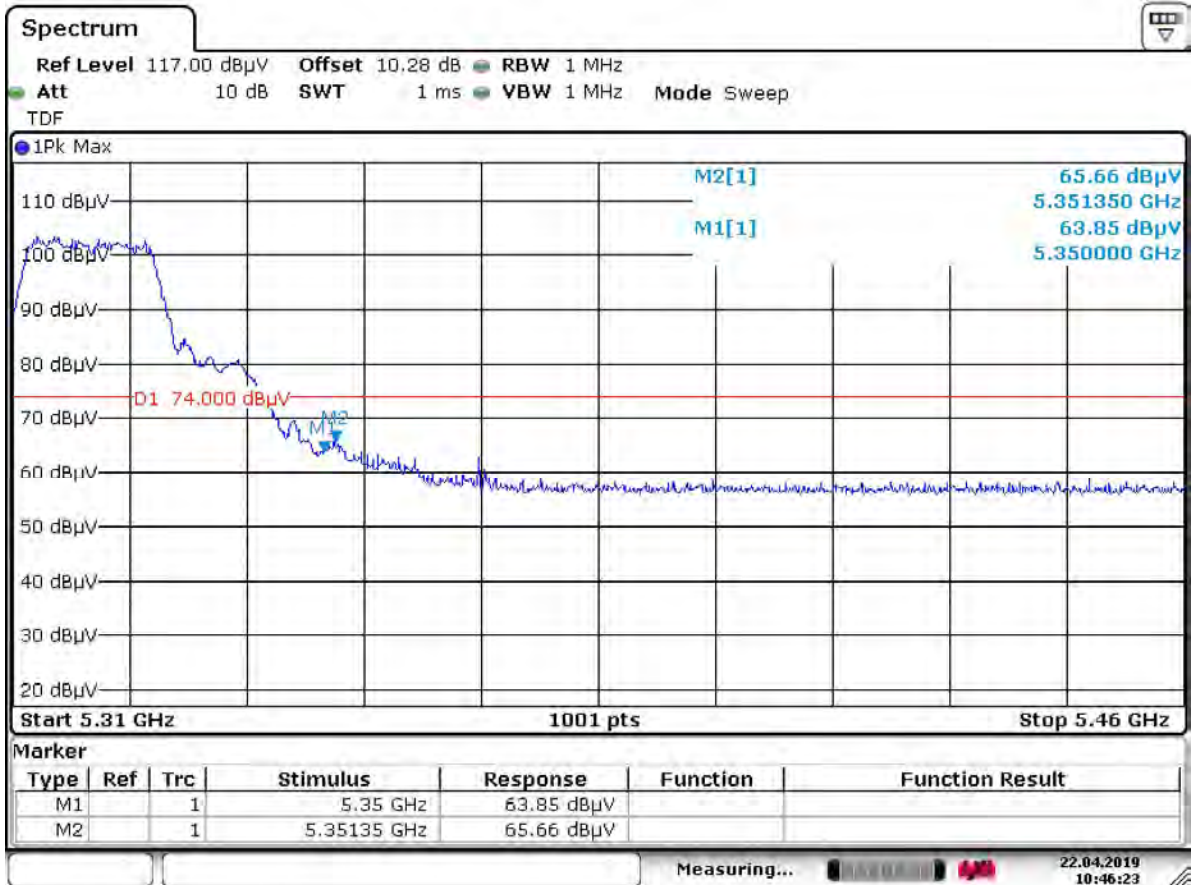


Date: 22.APR.2019 10:46:22

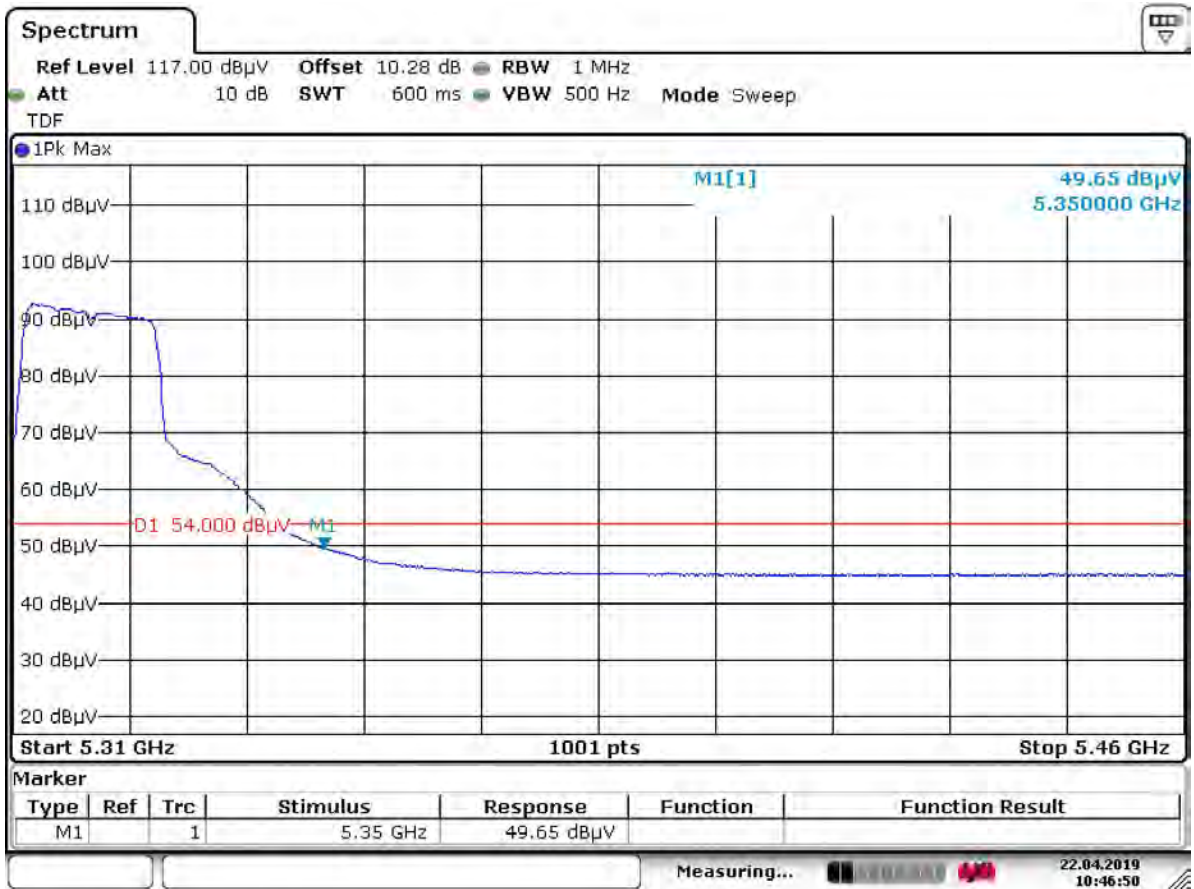

Date: 22.APR.2019 10:46:50

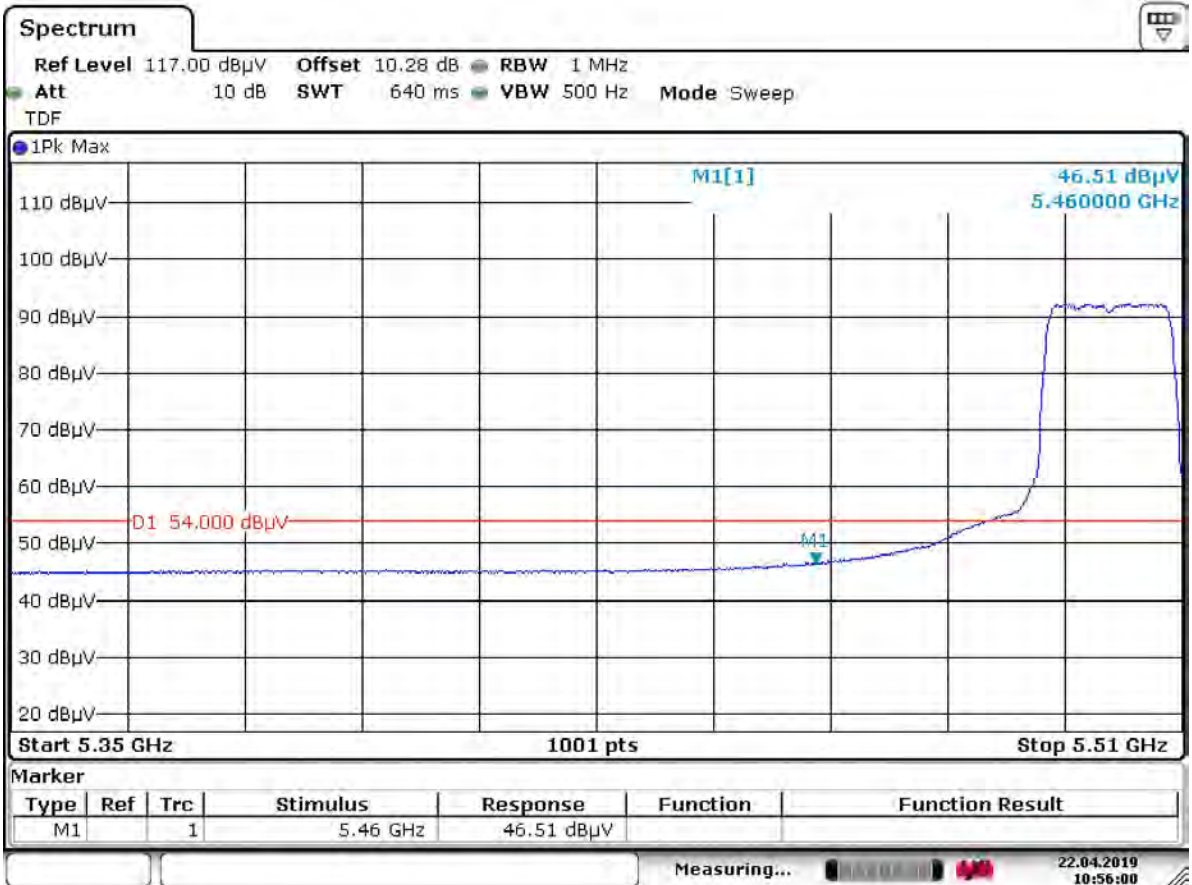


Date: 22.APR.2019 10:56:00

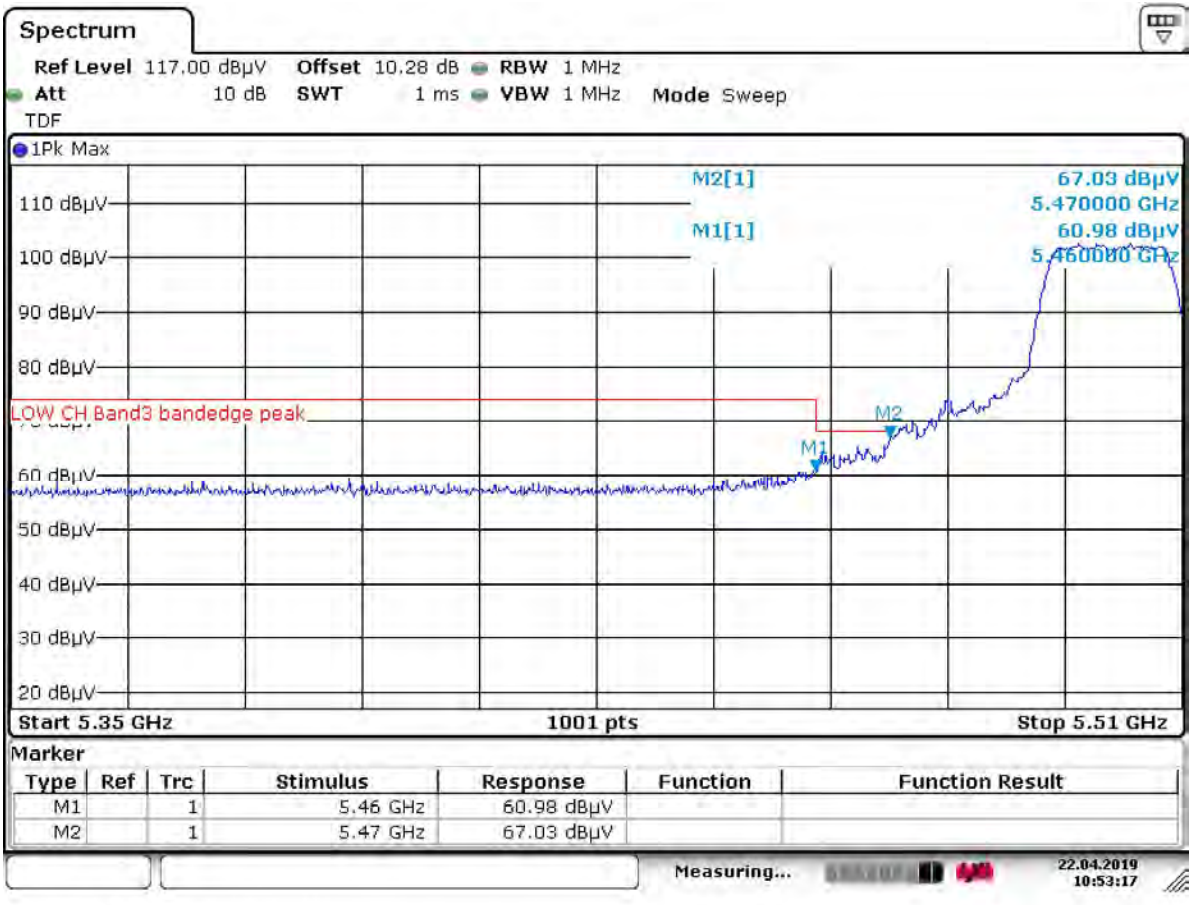

Date: 22.APR.2019 10:53:16




Date: 22.APR.2019 10:54:32

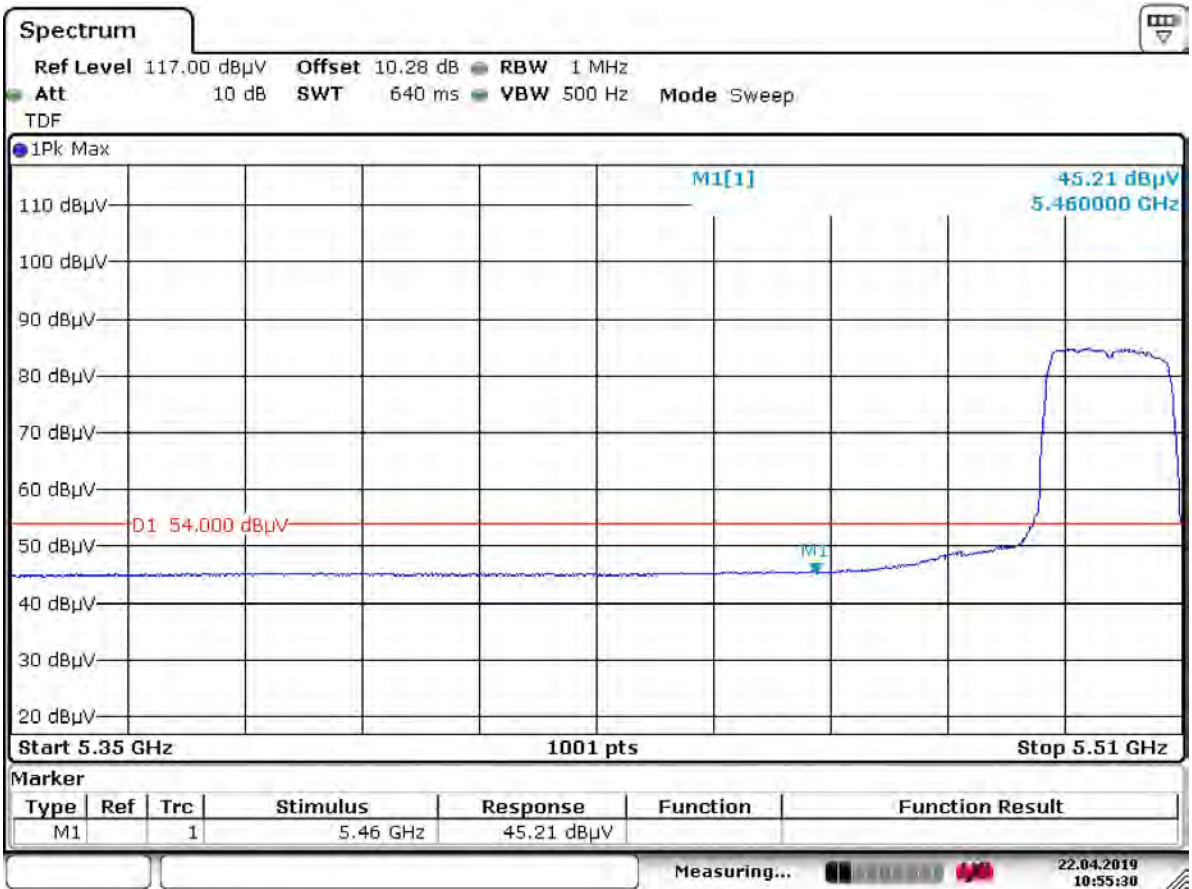


Date: 22.APR.2019 10:55:29

Channel 140(Horizontal)

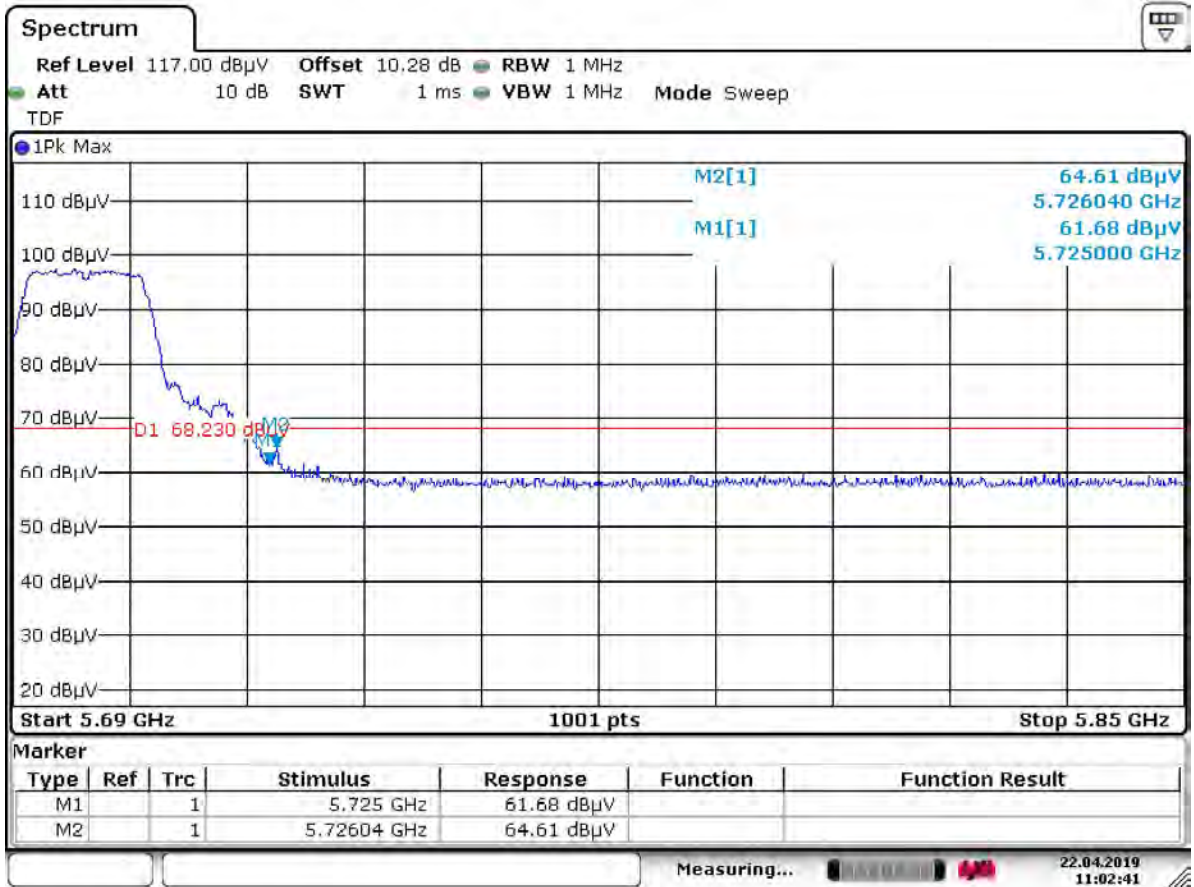


Date: 22.APR.2019 11:02:40


Channel 140(Vertical)

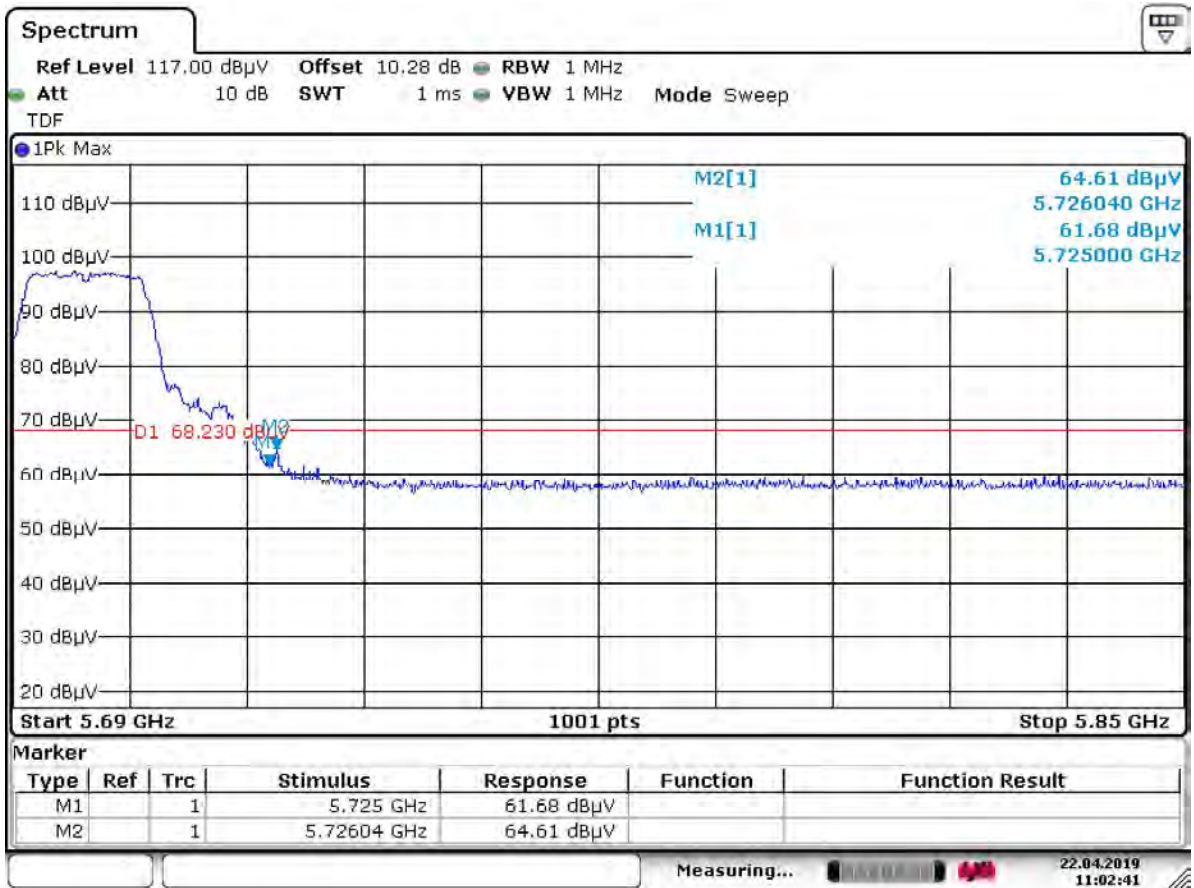


Date: 22.APR.2019 11:02:40

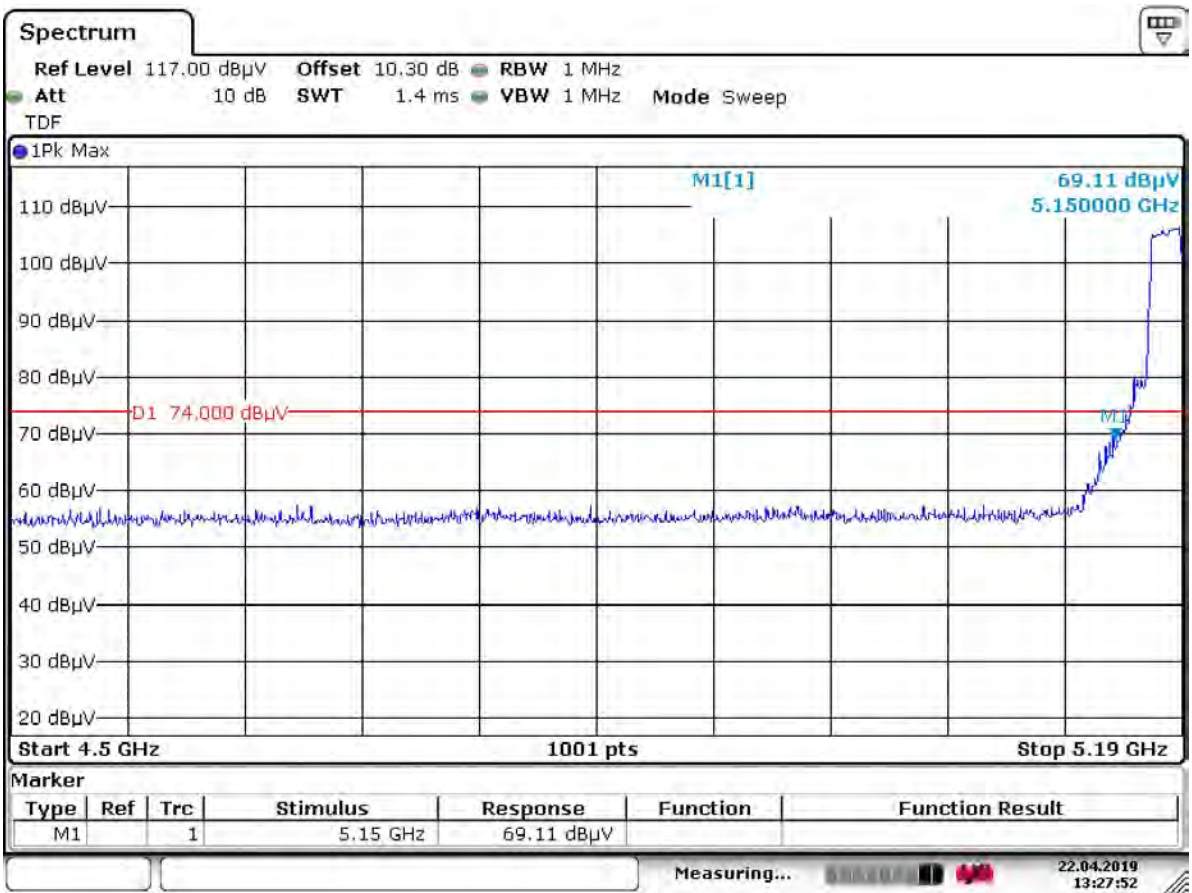


Date: 22.APR.2019 13:27:52

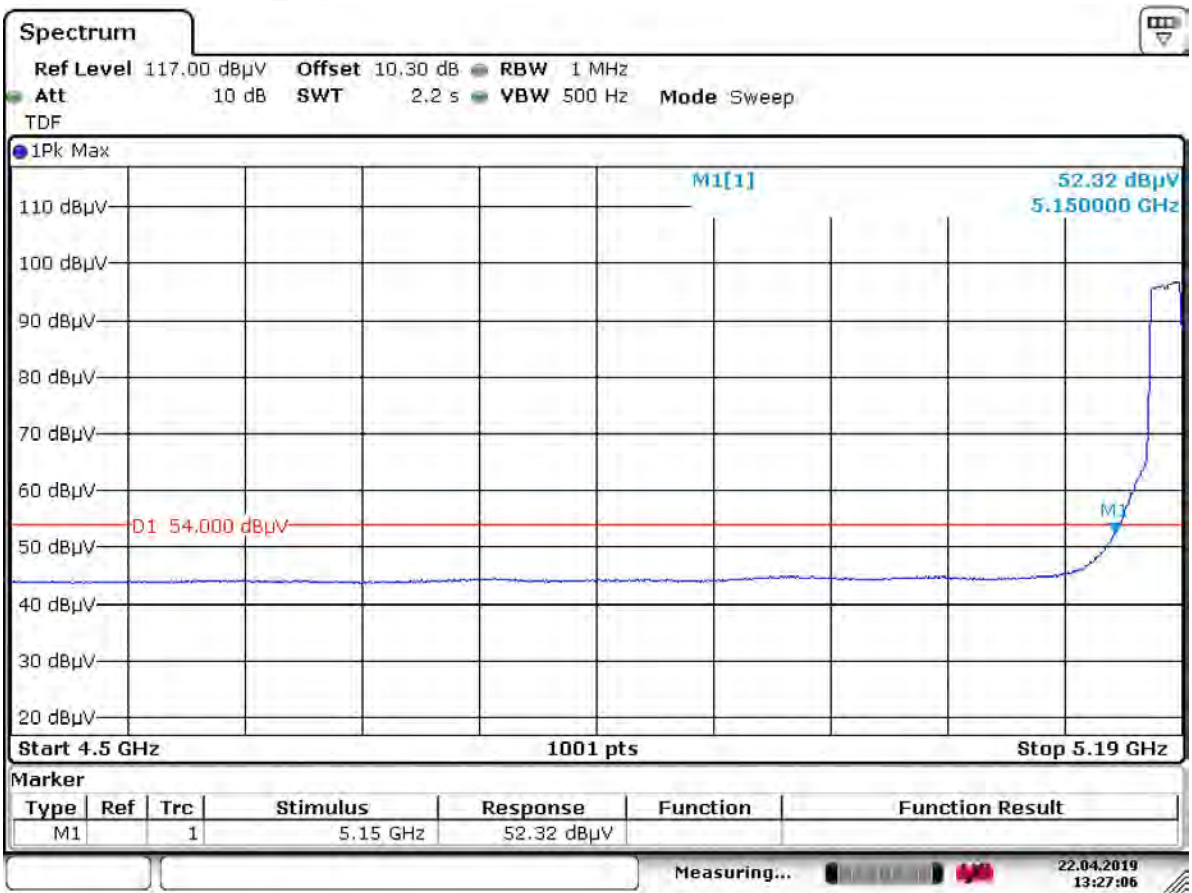

Date: 22.APR.2019 13:27:06

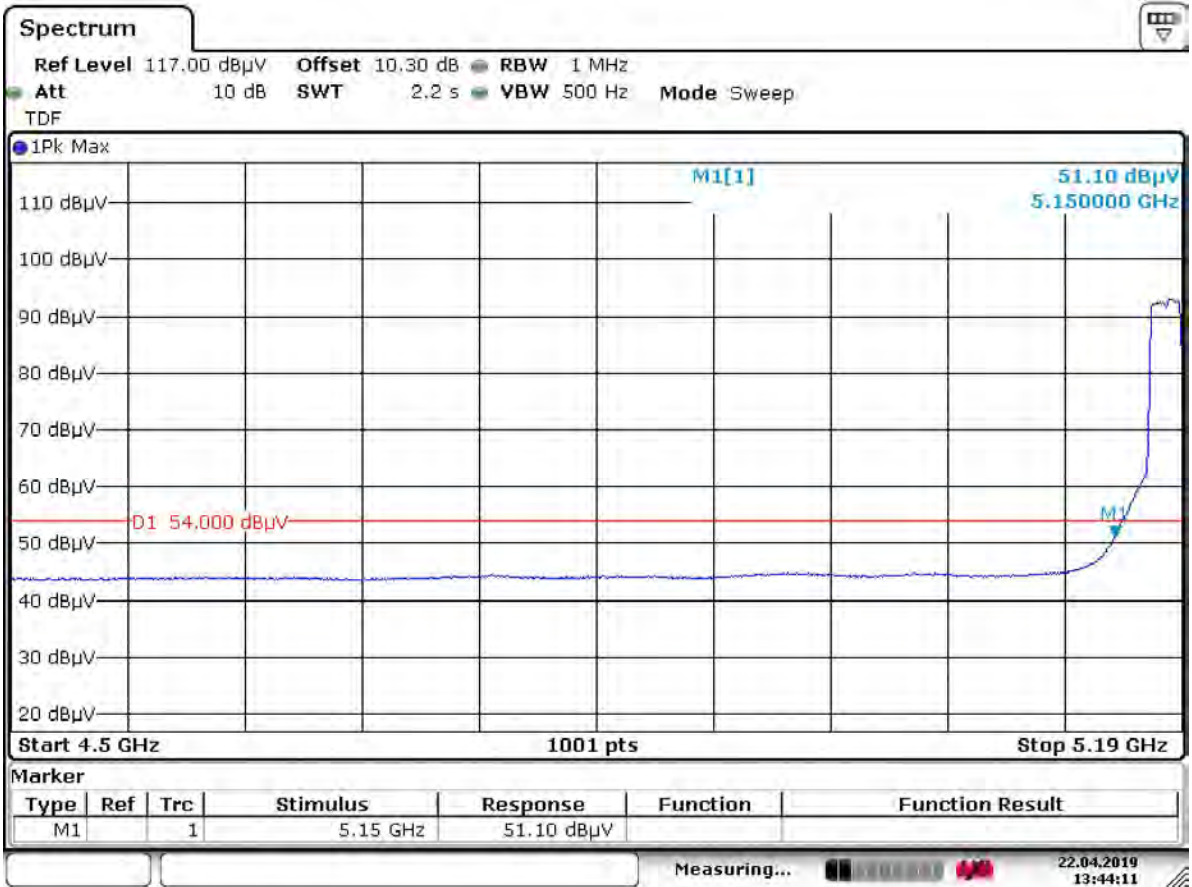


Date: 22.APR.2019 13:44:11

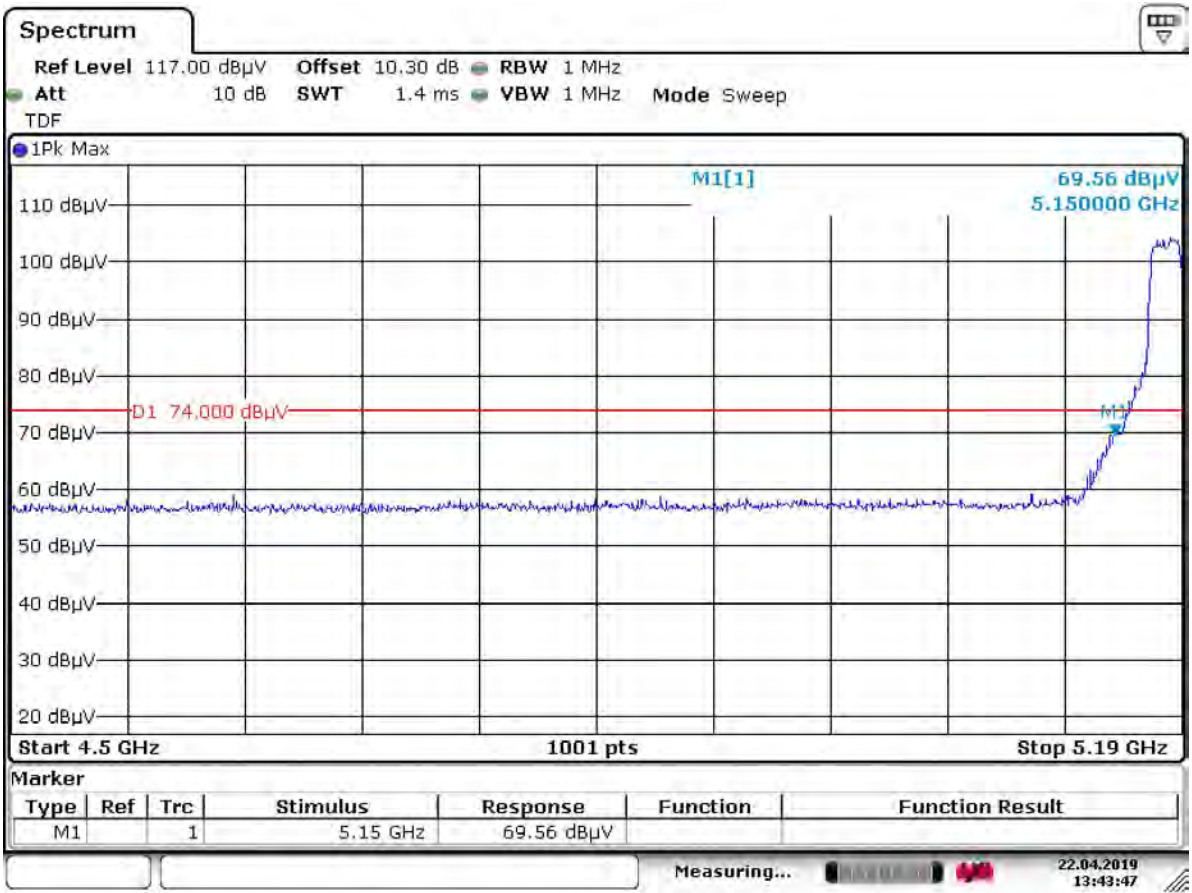


Date: 22.APR.2019 13:43:47


Channel 48(Horizontal)

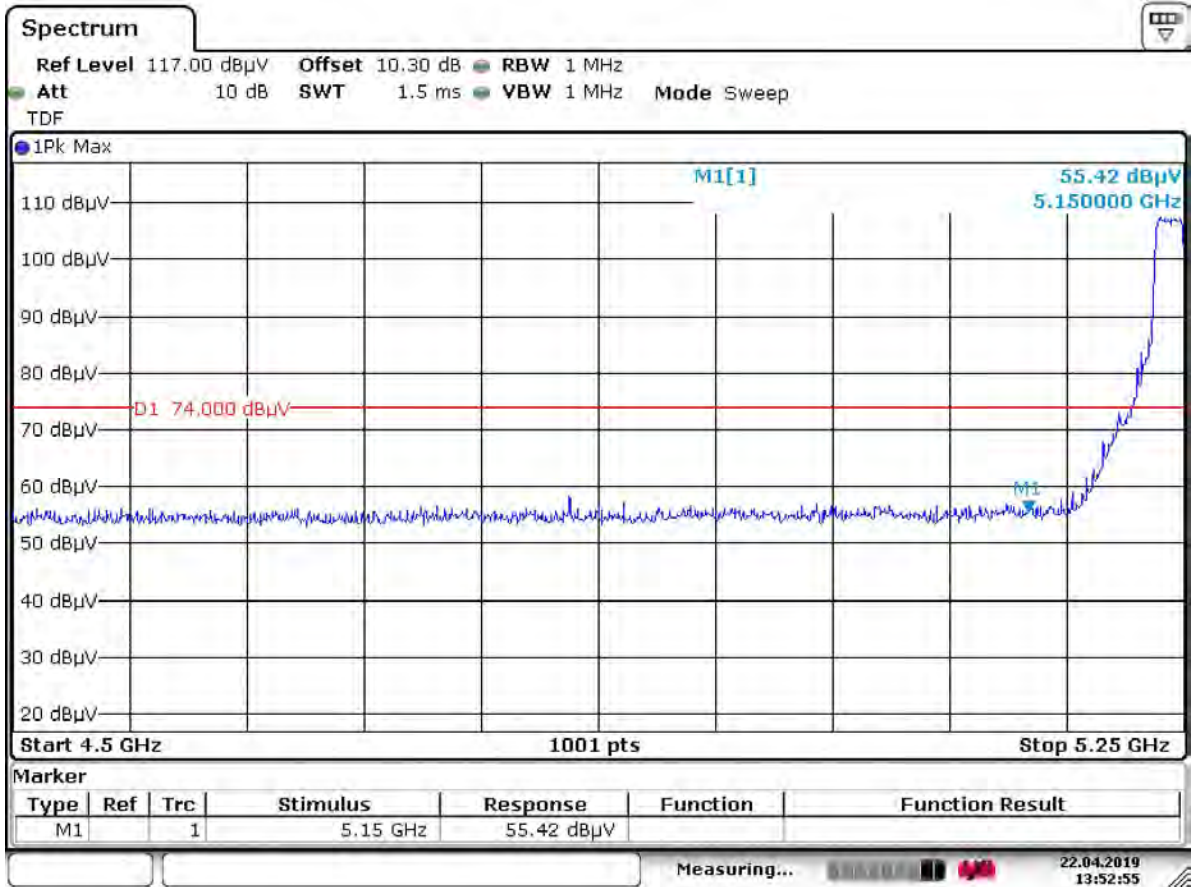


Date: 22.APR.2019 13:52:54

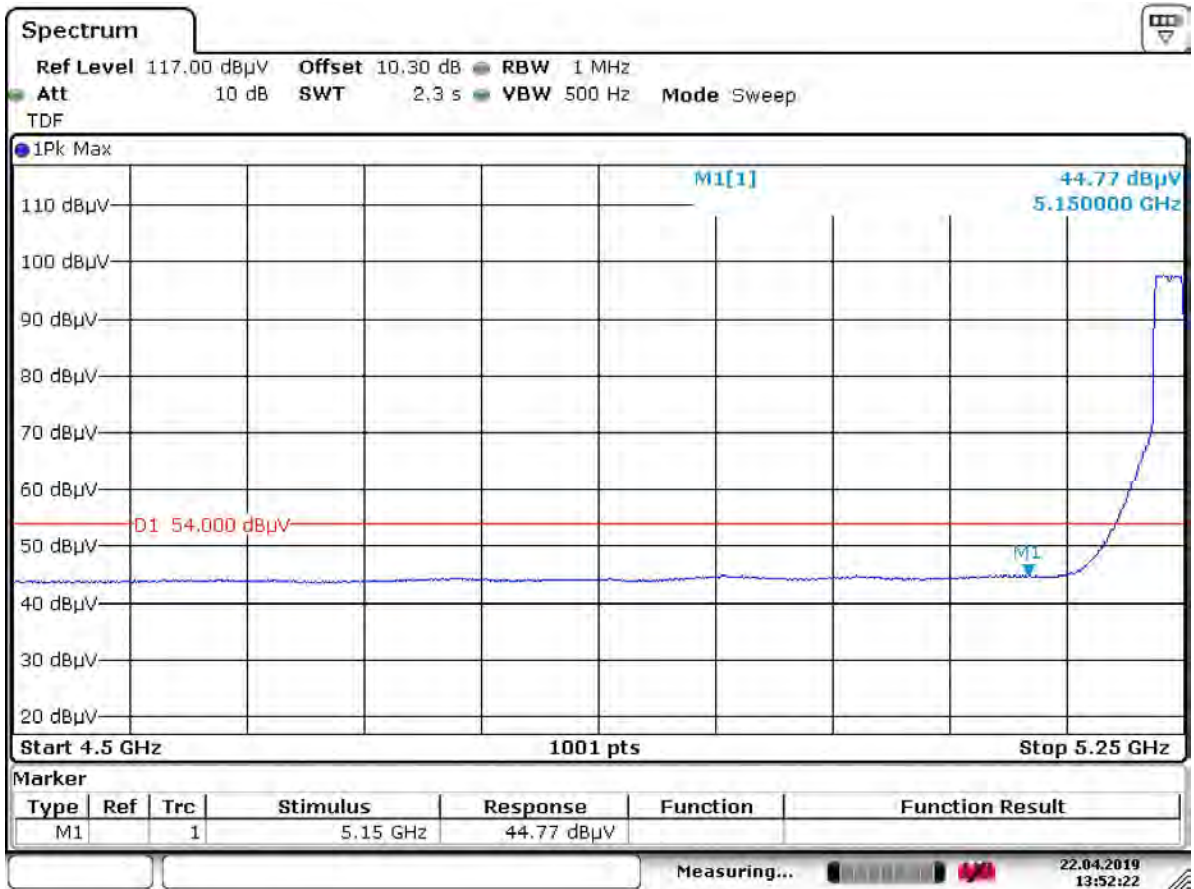


Date: 22.APR.2019 13:52:22

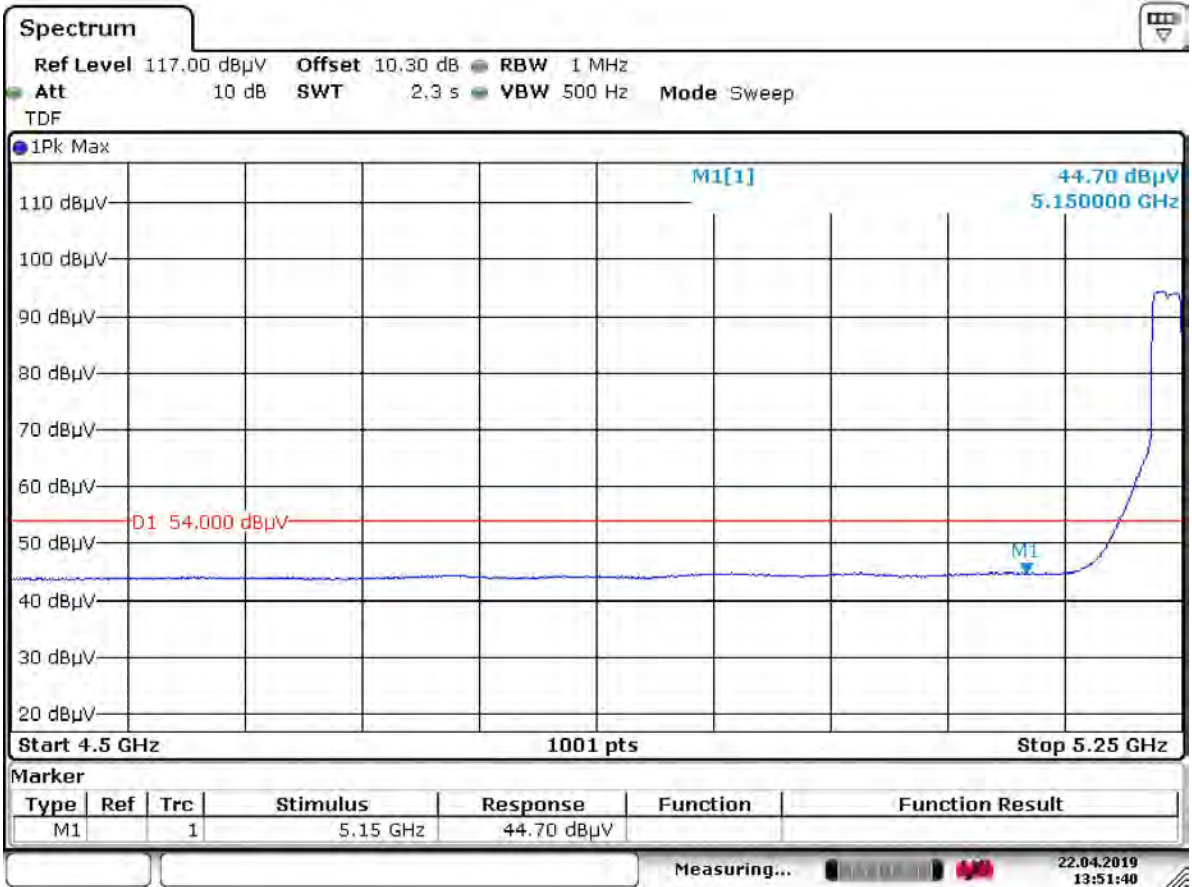


Date: 22.APR.2019 13:51:40

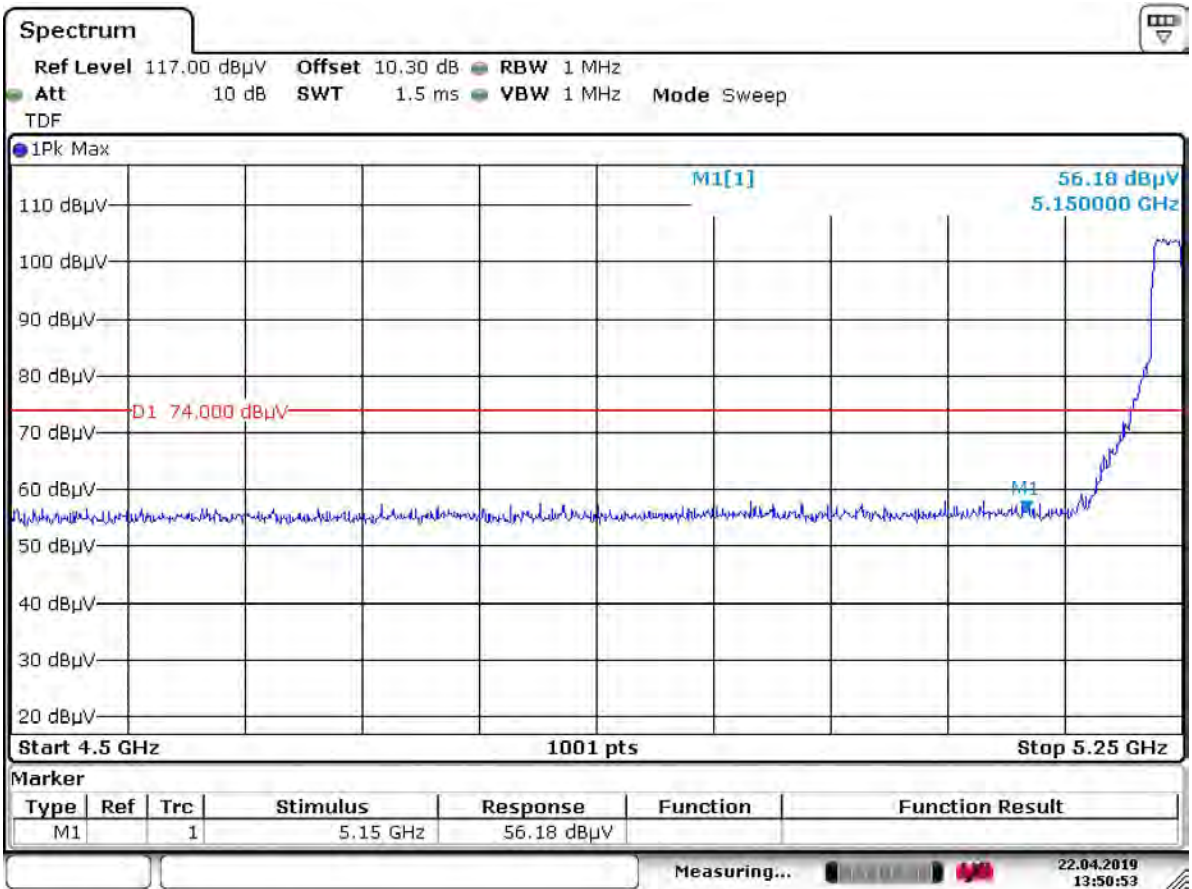


Date: 22.APR.2019 13:50:52

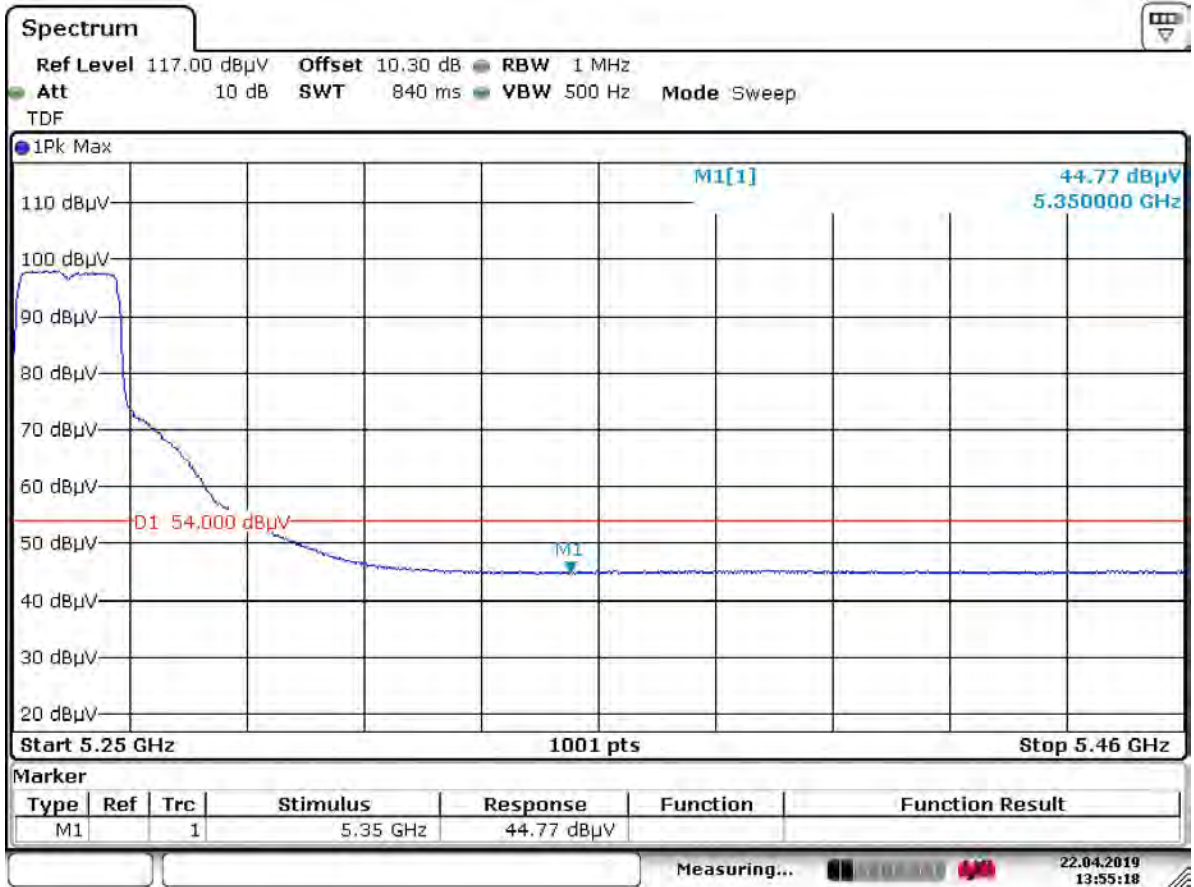


Date: 22.APR.2019 13:55:18

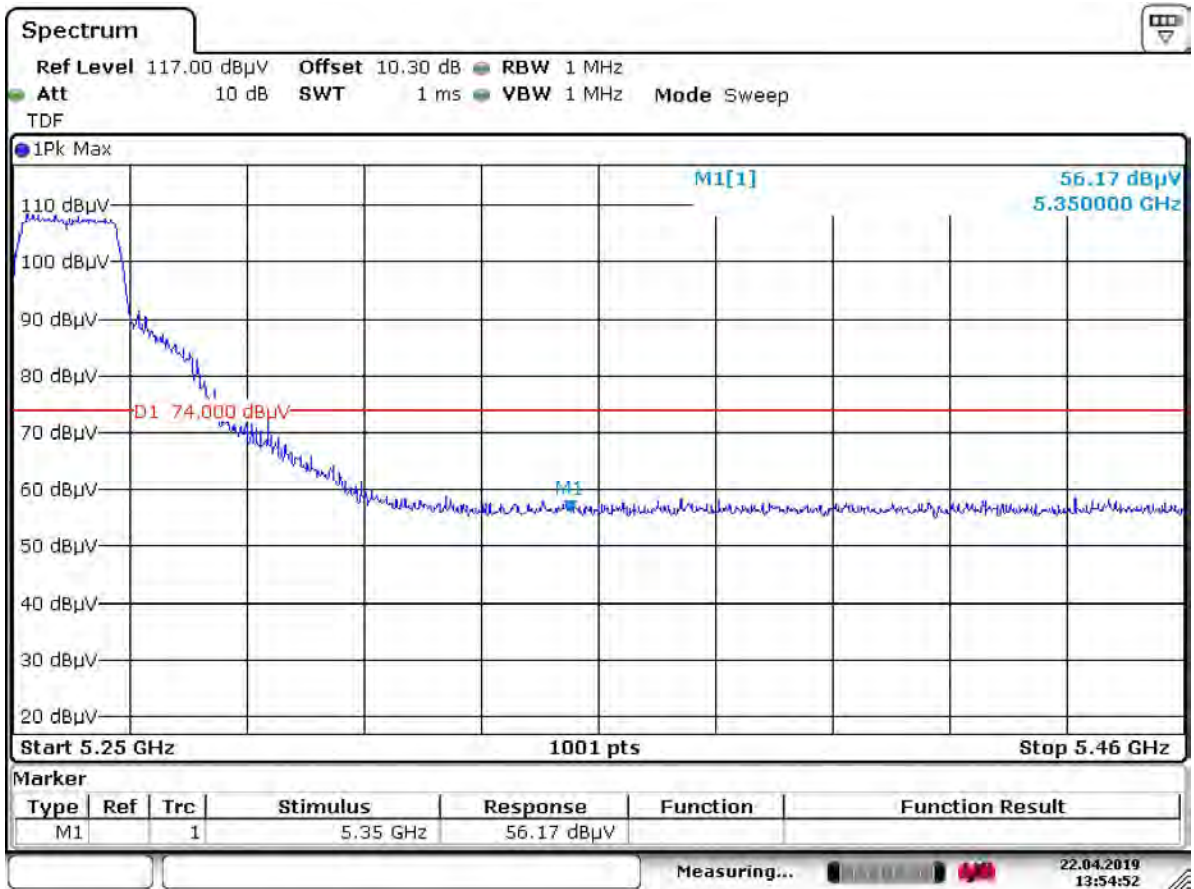


Date: 22.APR.2019 13:54:52

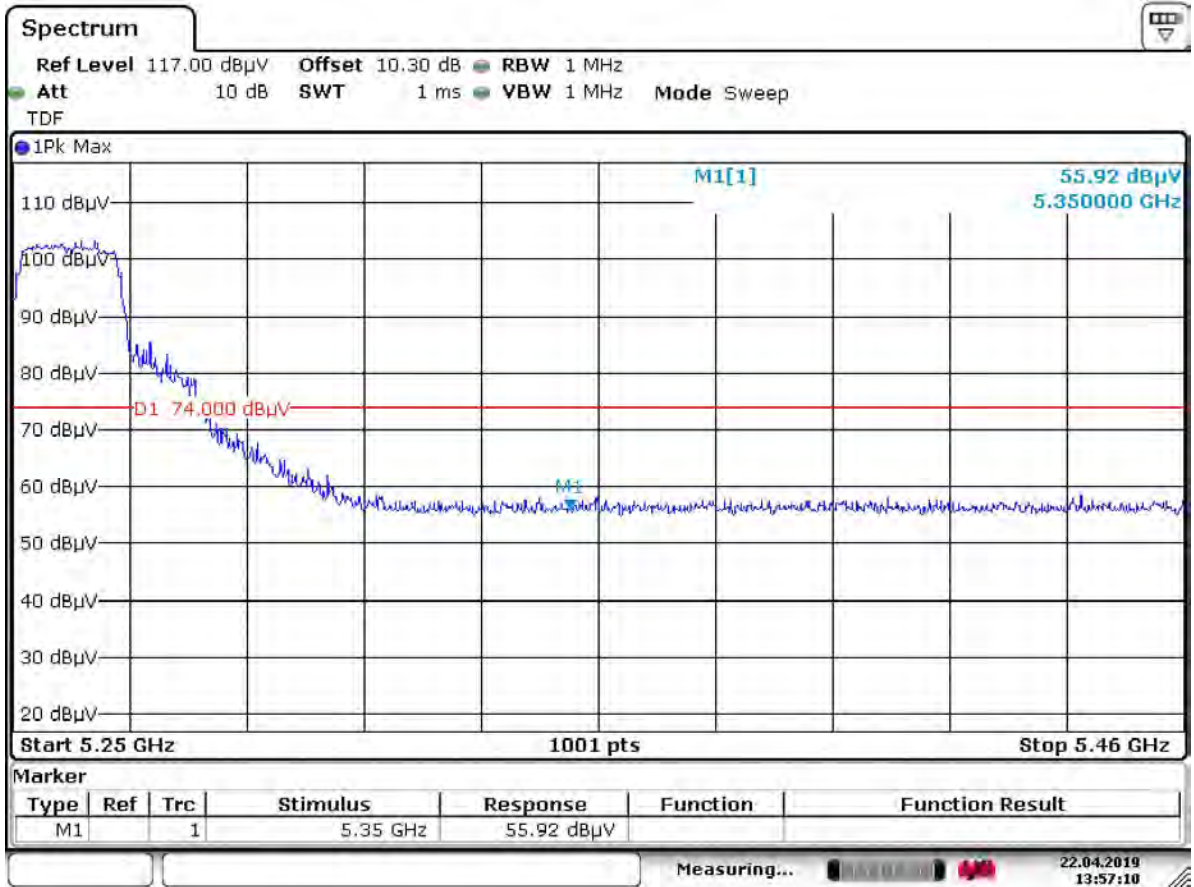


Date: 22.APR.2019 13:57:10

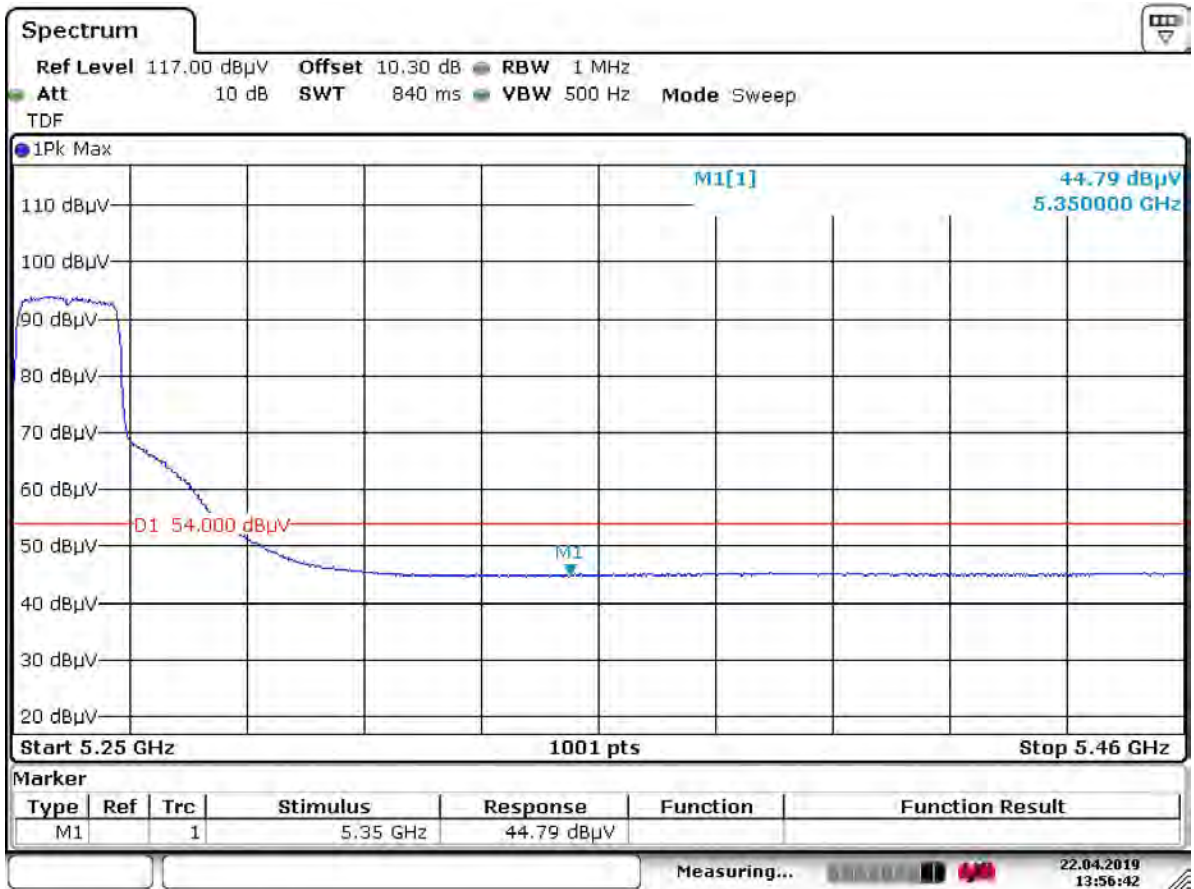


Date: 22.APR.2019 13:56:42

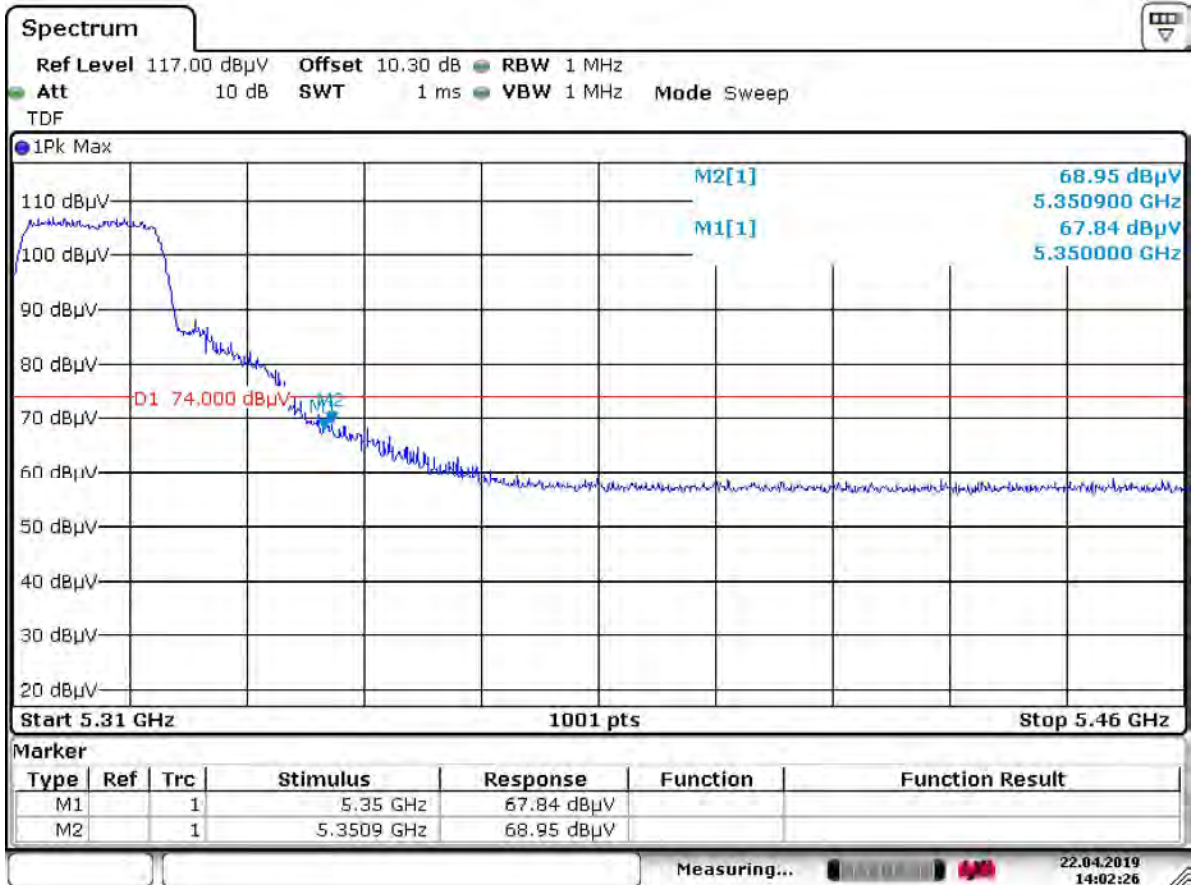


Date: 22.APR.2019 14:02:26

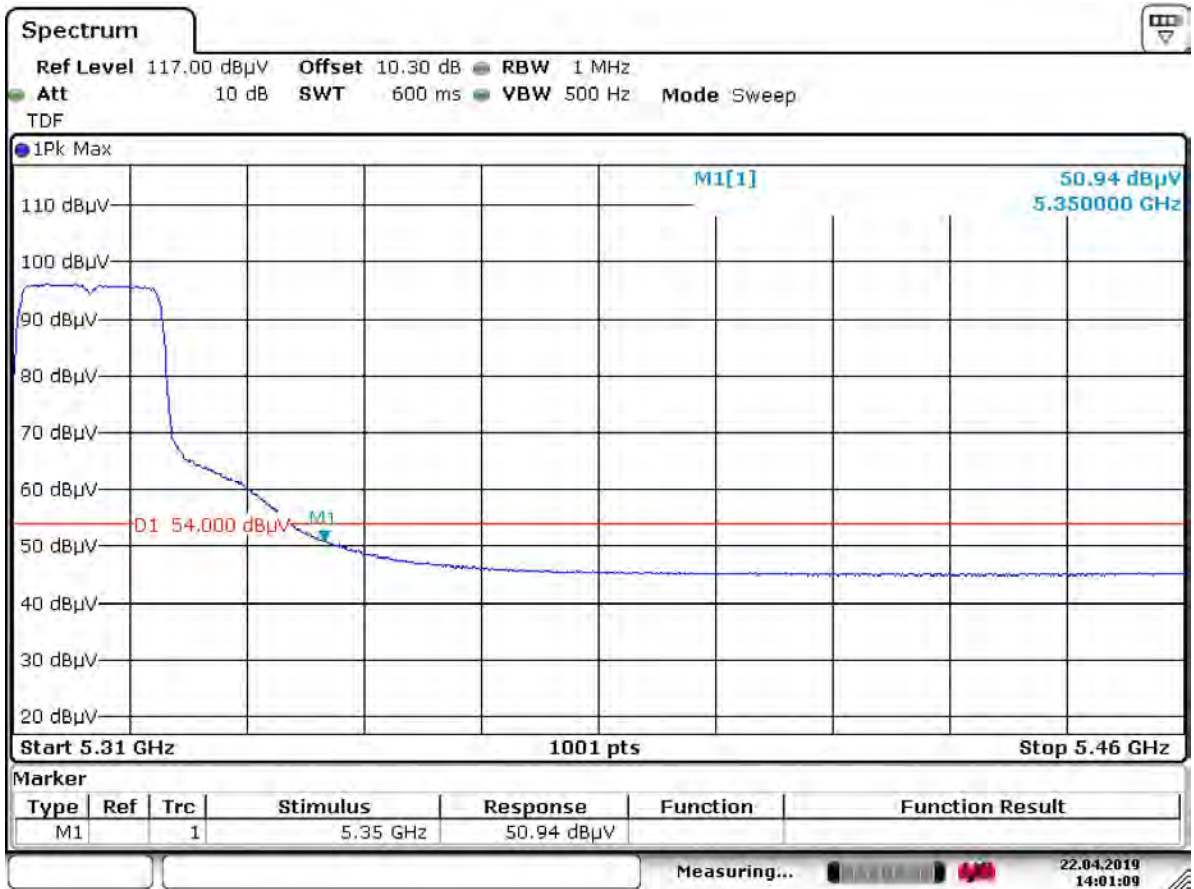


Date: 22.APR.2019 14:01:09

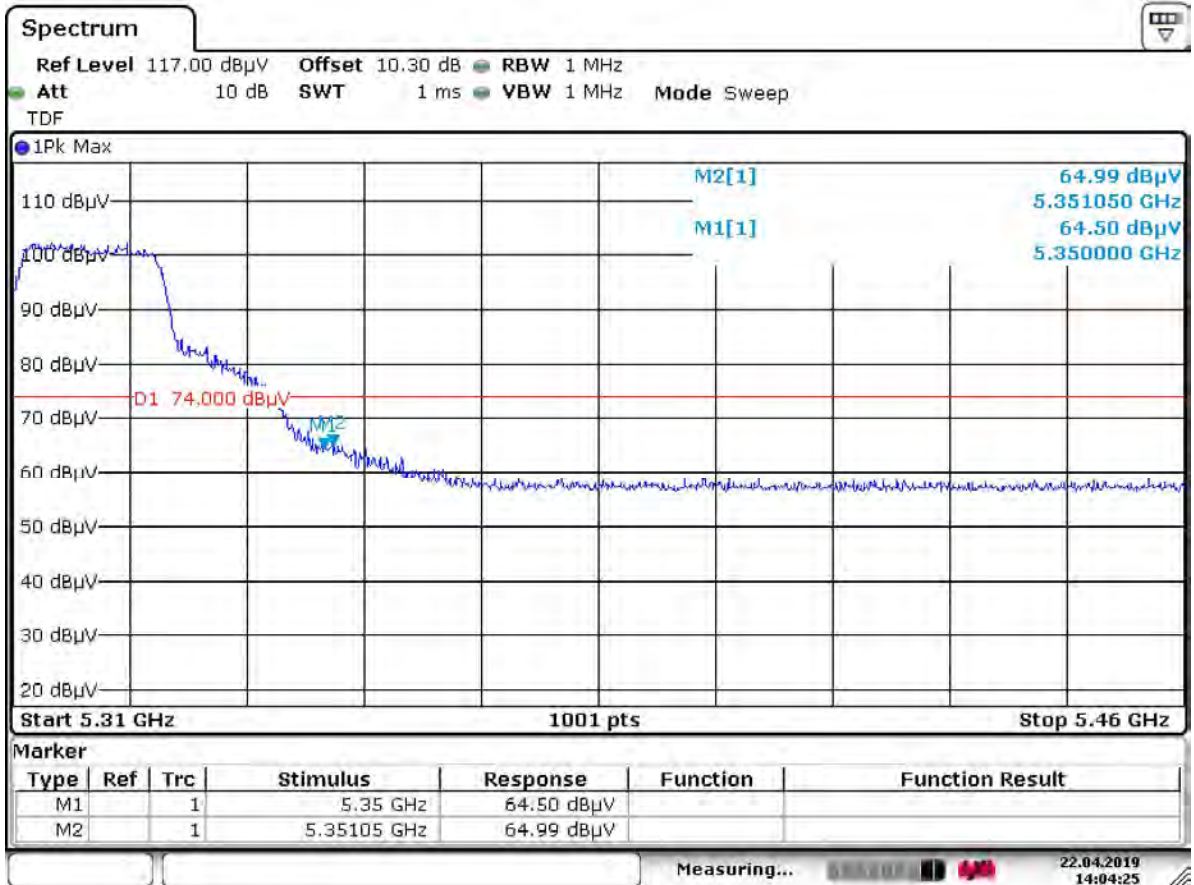


Date: 22.APR.2019 14:04:24

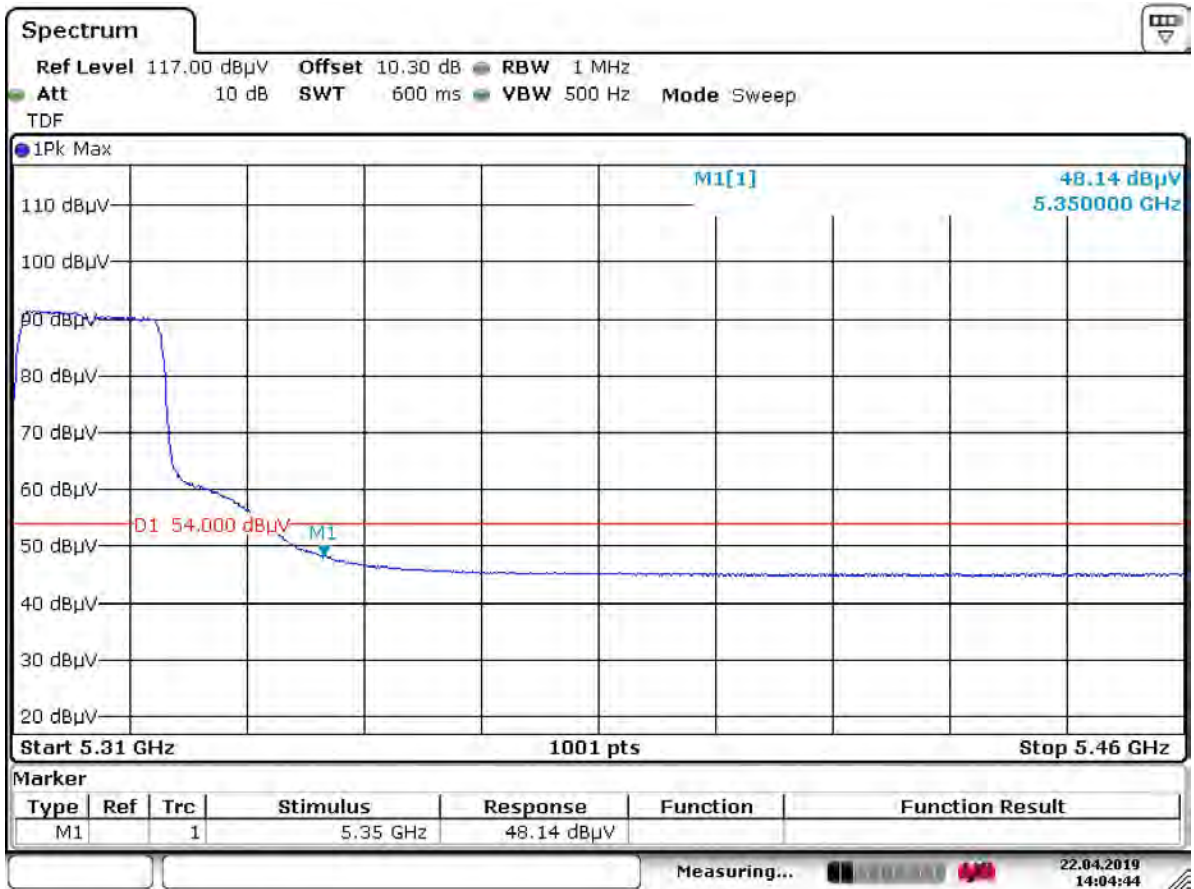


Date: 22.APR.2019 14:04:43

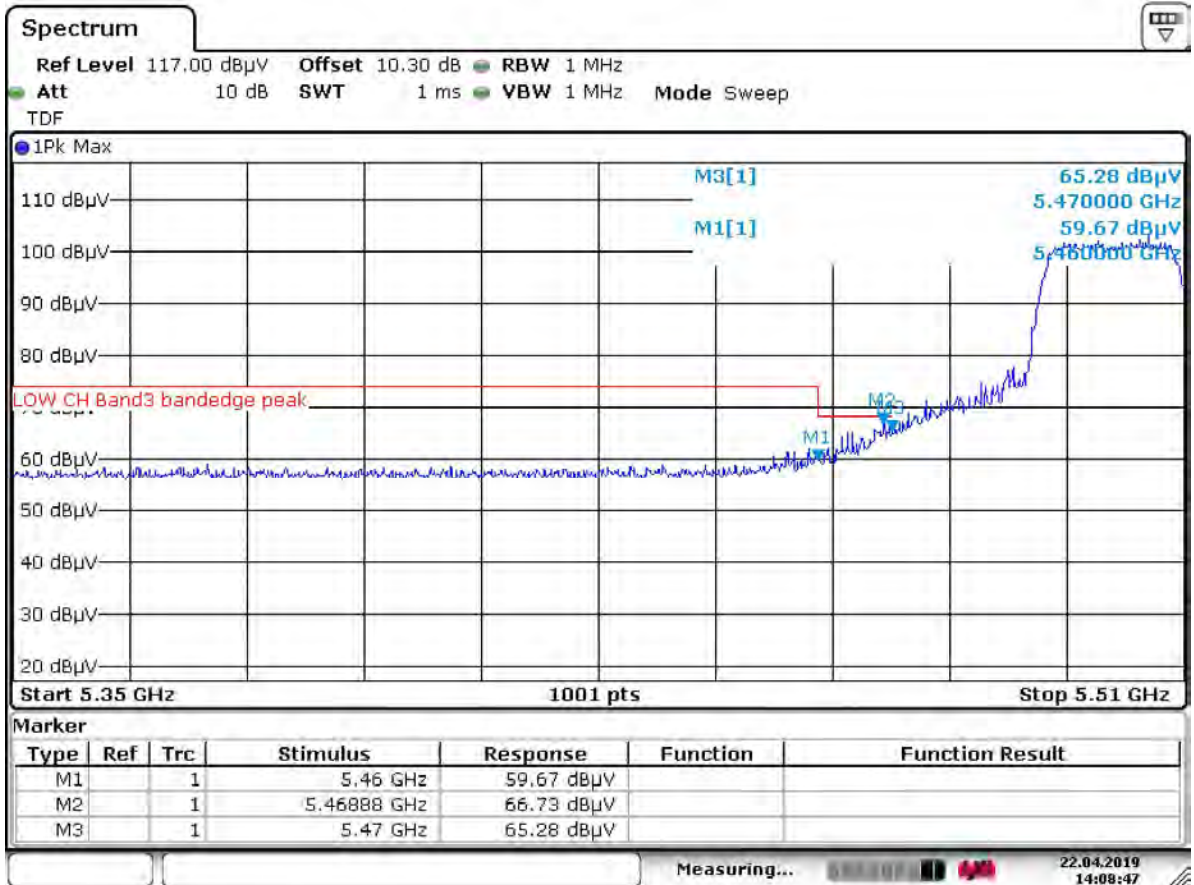

Date: 22.APR.2019 14:08:47

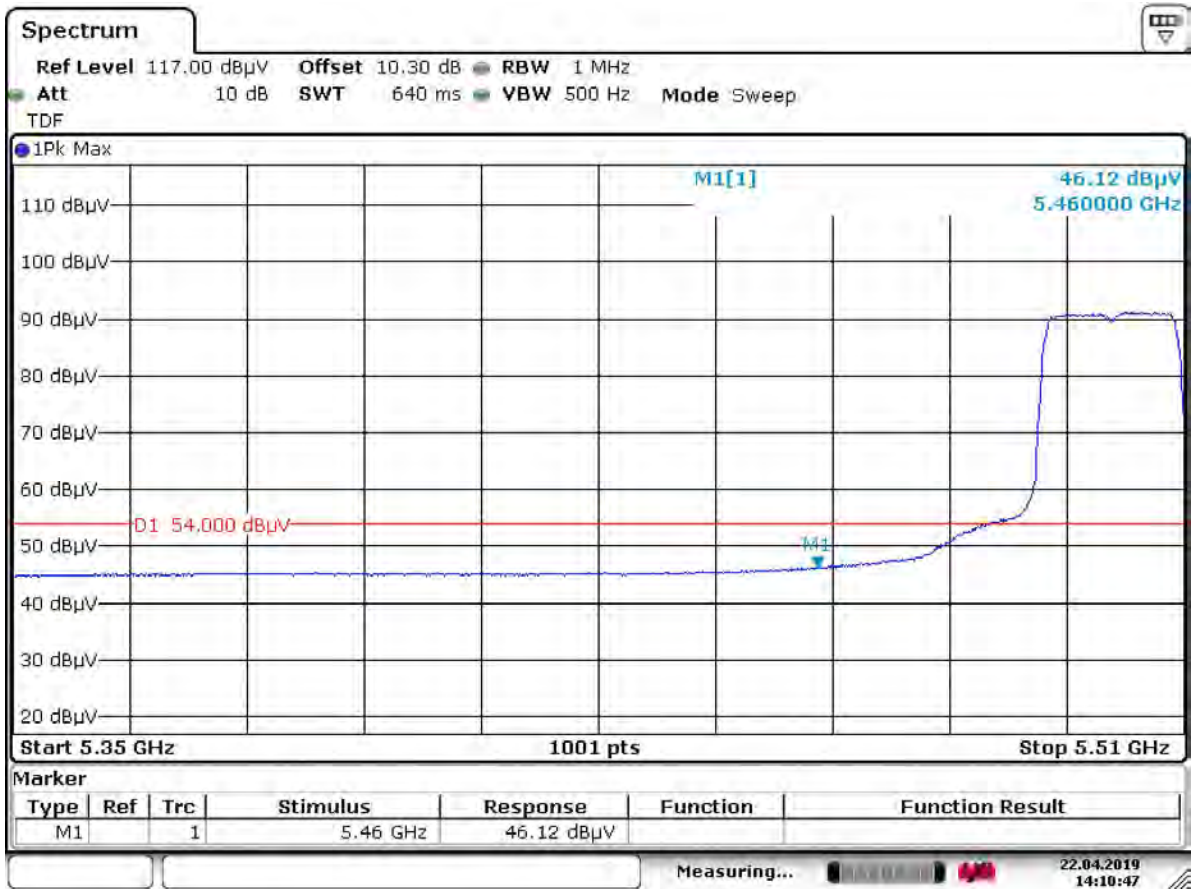

Date: 22.APR.2019 14:10:46

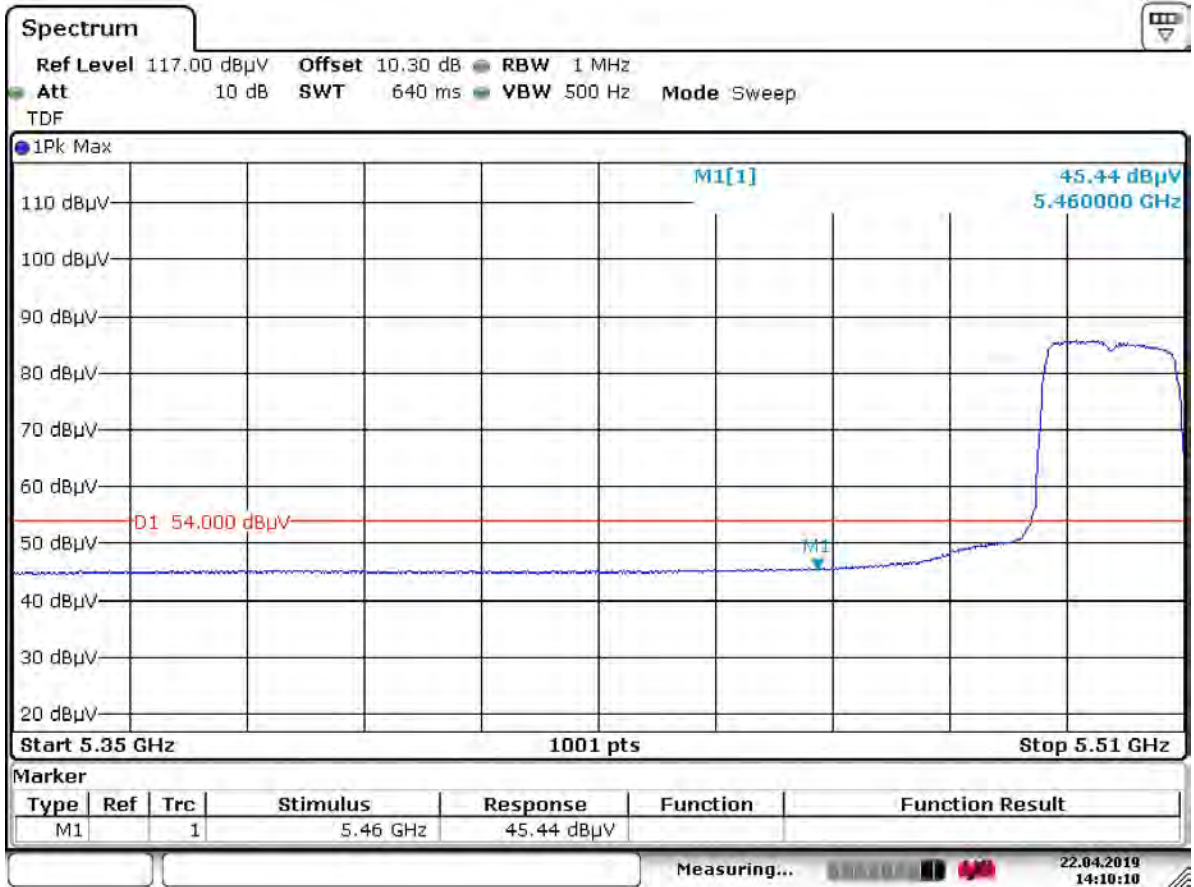


Date: 22.APR.2019 14:10:10




Date: 22.APR.2019 14:09:34

Channel 140(Horizontal)

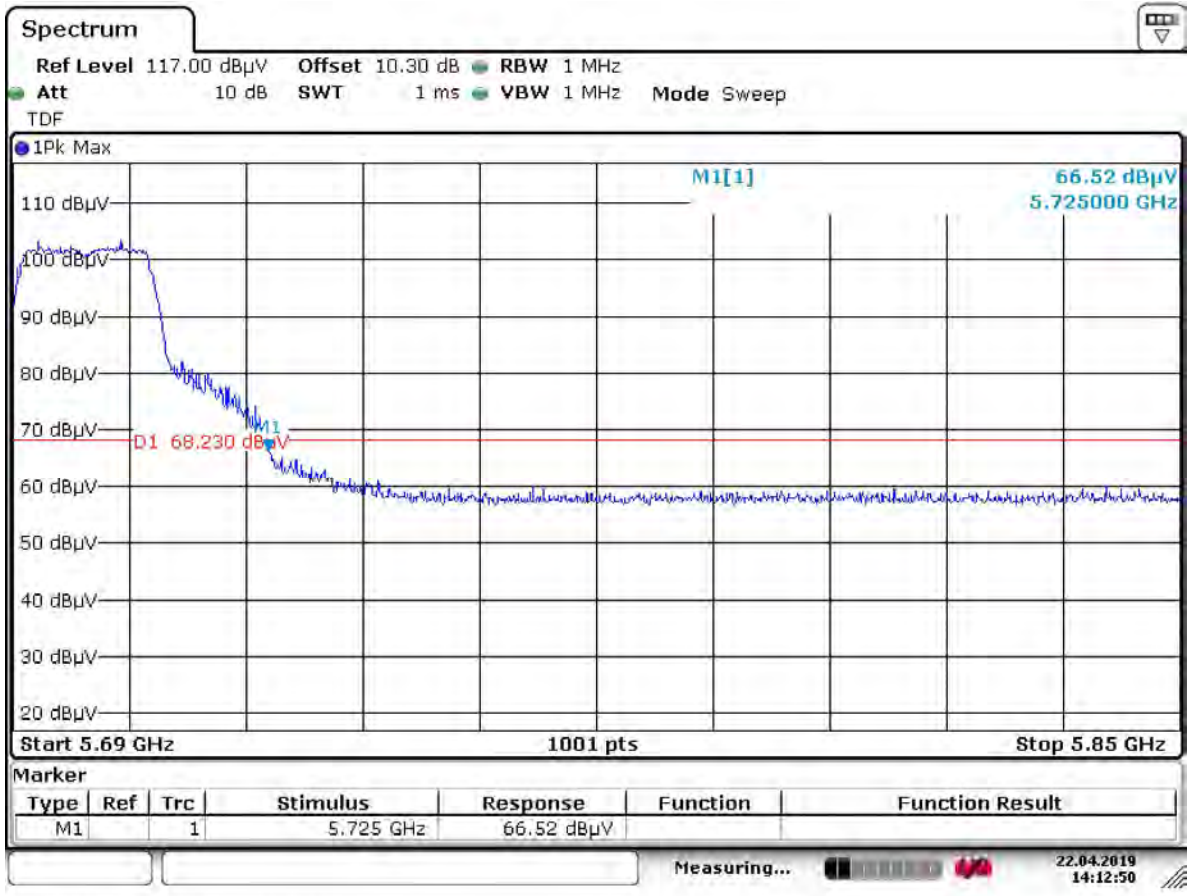


Date: 22.APR.2019 14:12:50


Channel 140(Vertical)

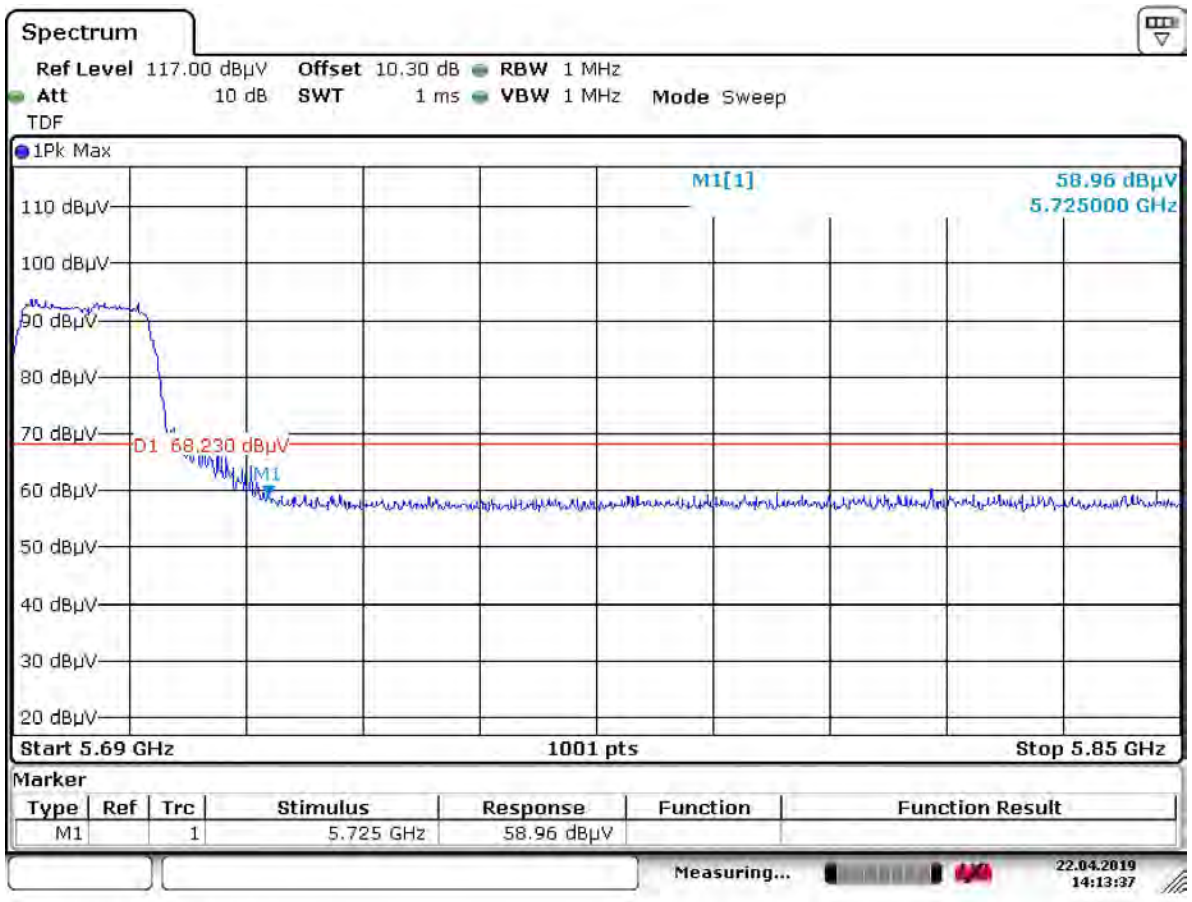


Date: 22.APR.2019 14:13:37

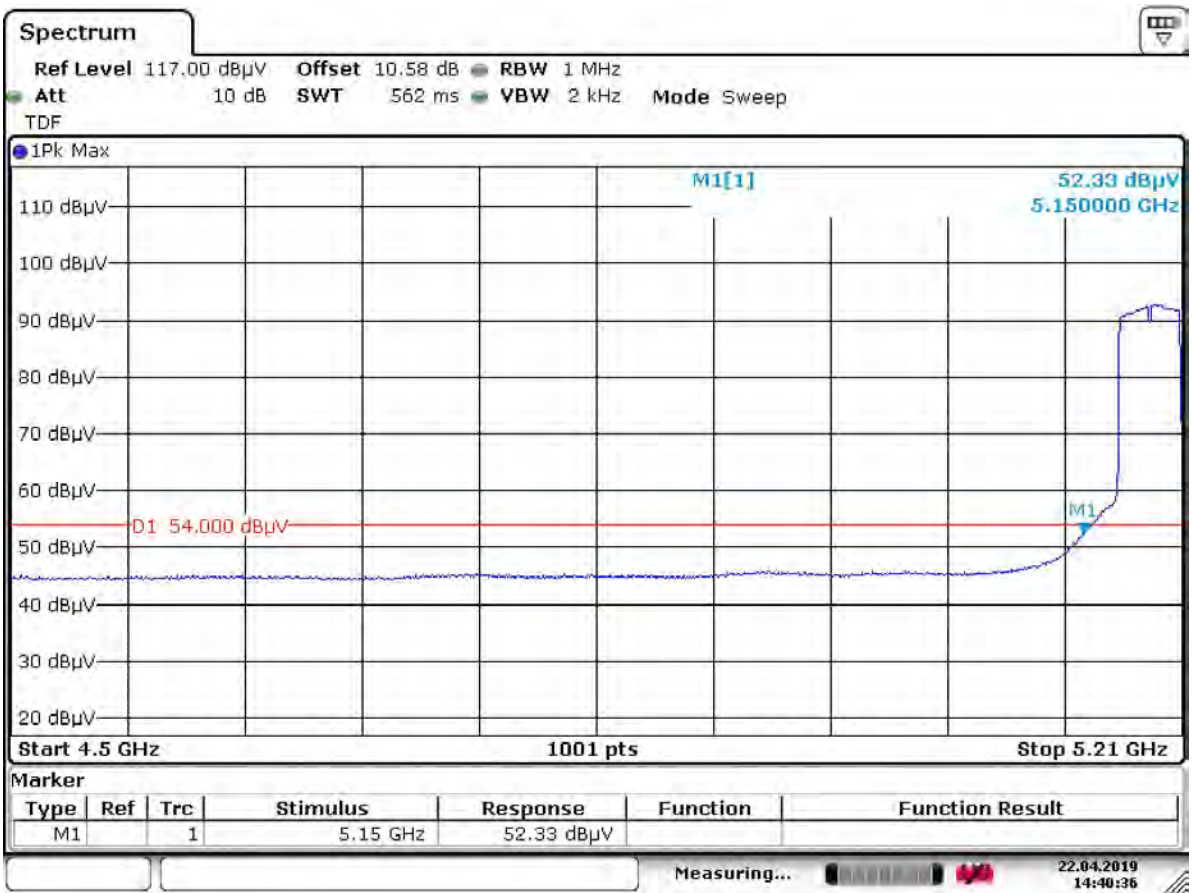


Date: 22.APR.2019 14:40:35

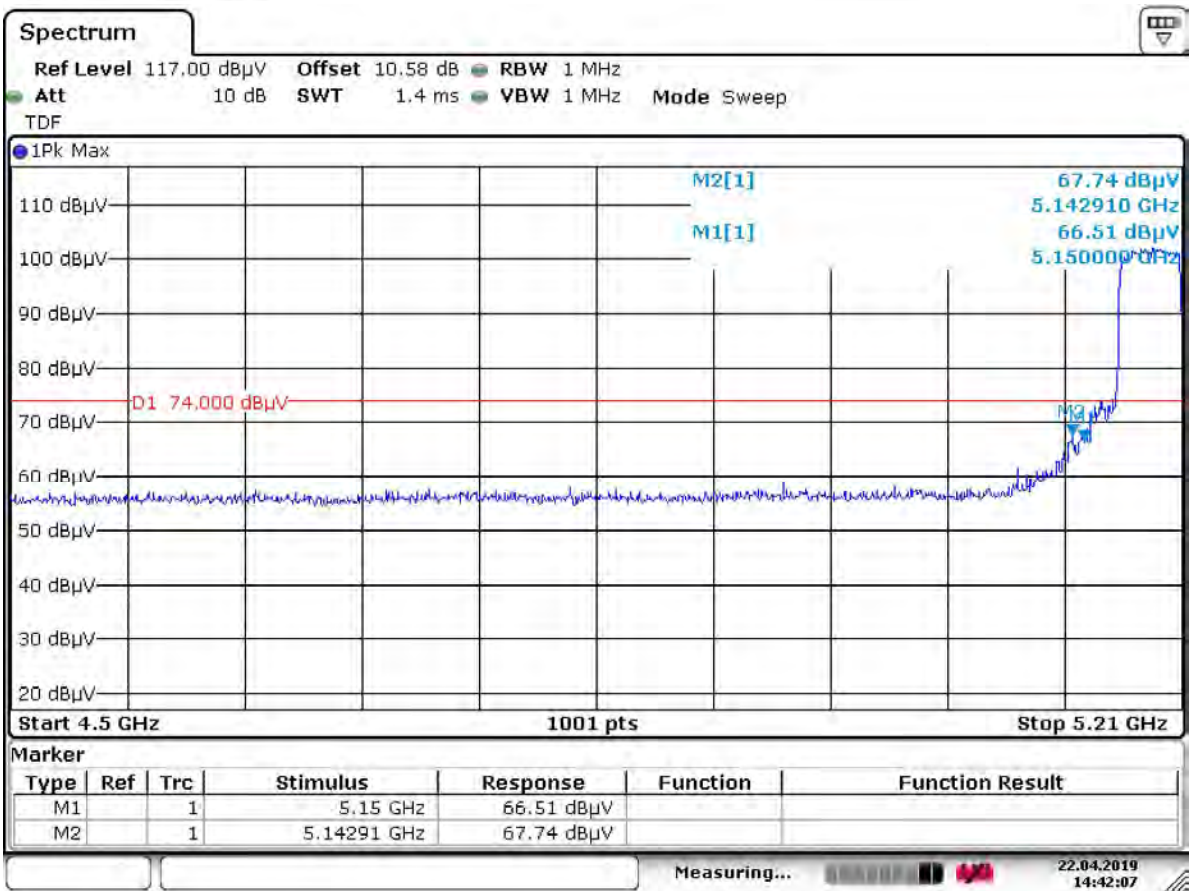


Date: 22.APR.2019 14:42:06

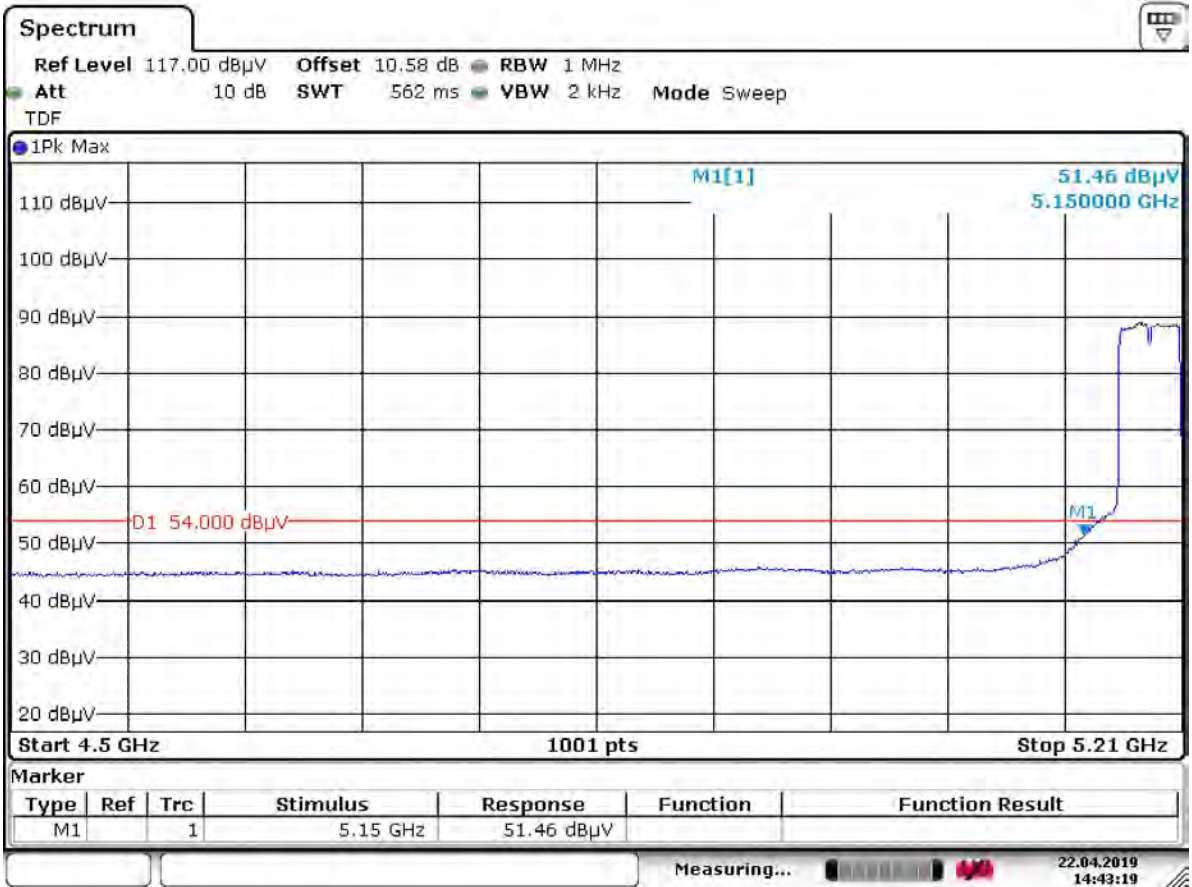


Date: 22.APR.2019 14:43:19

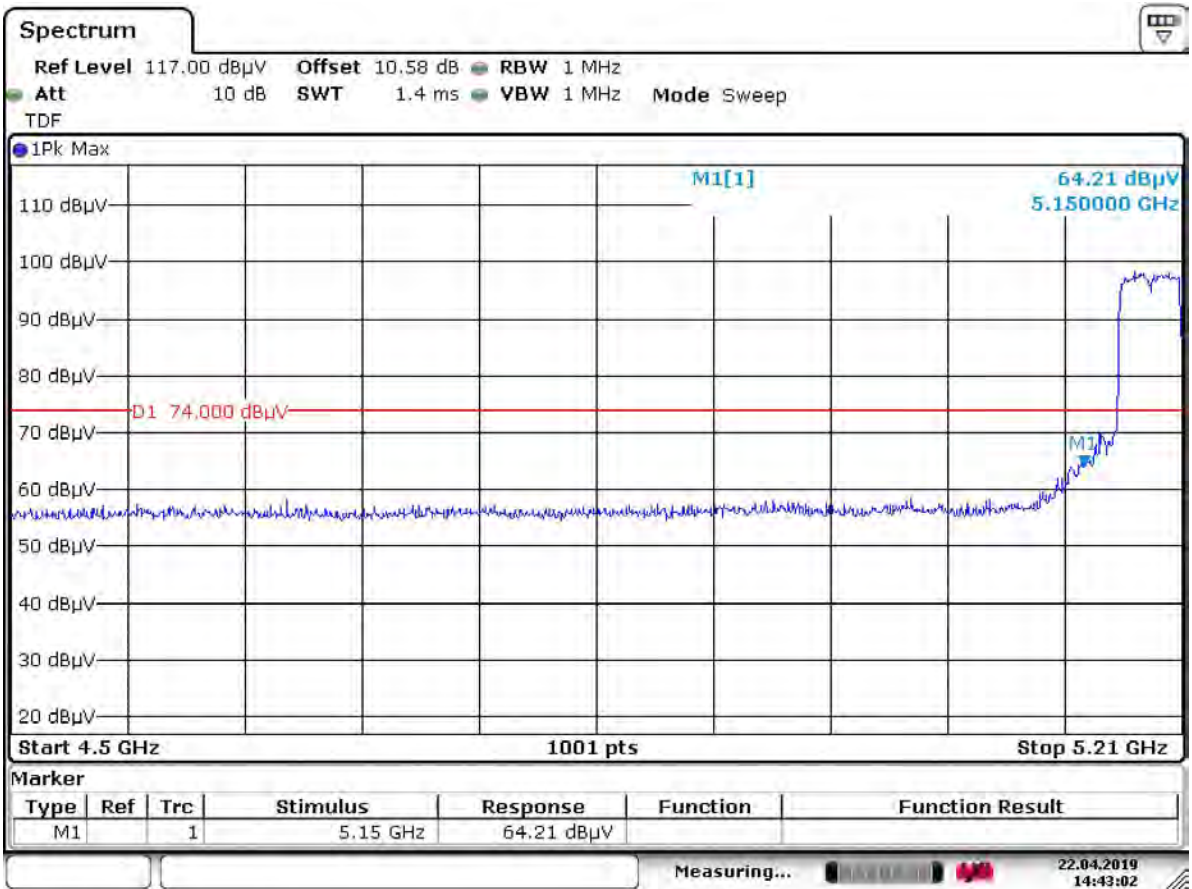


Date: 22.APR.2019 14:43:02

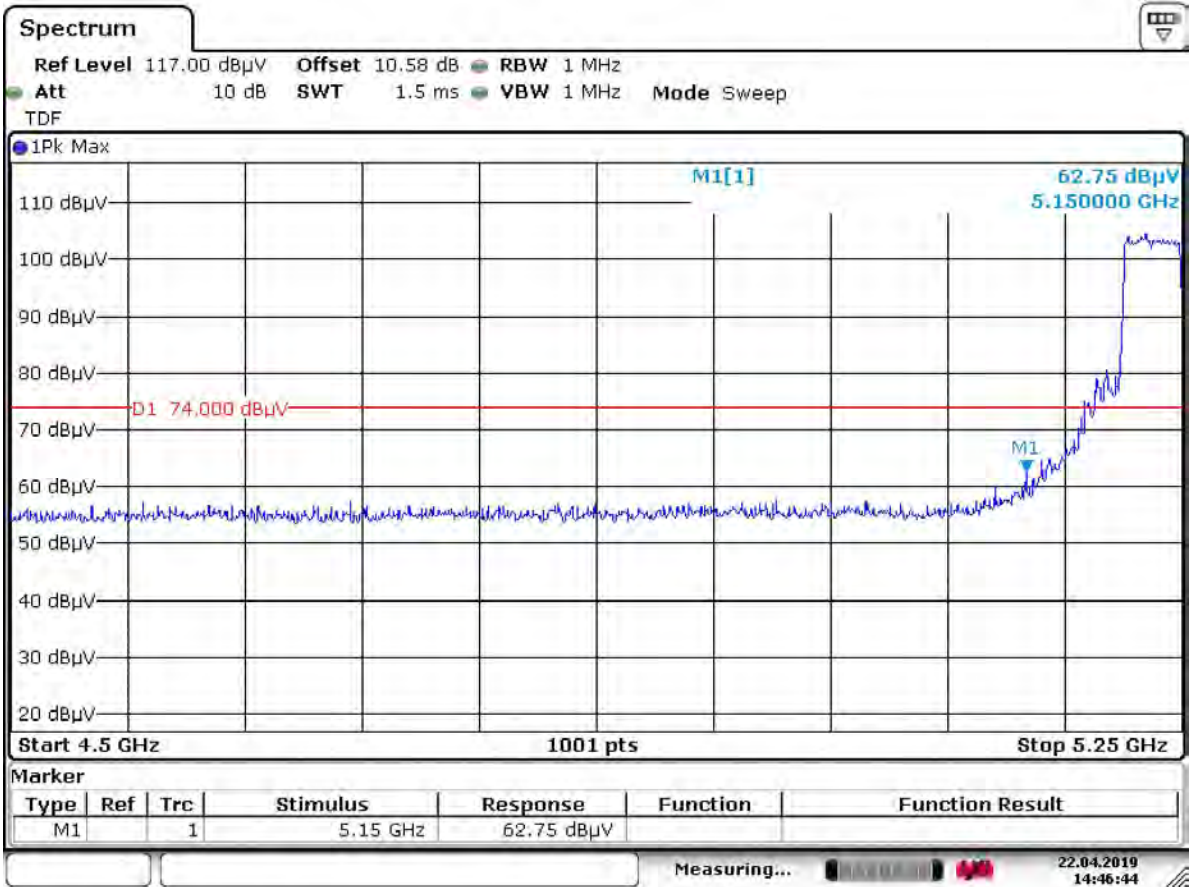


Date: 22.APR.2019 14:46:44

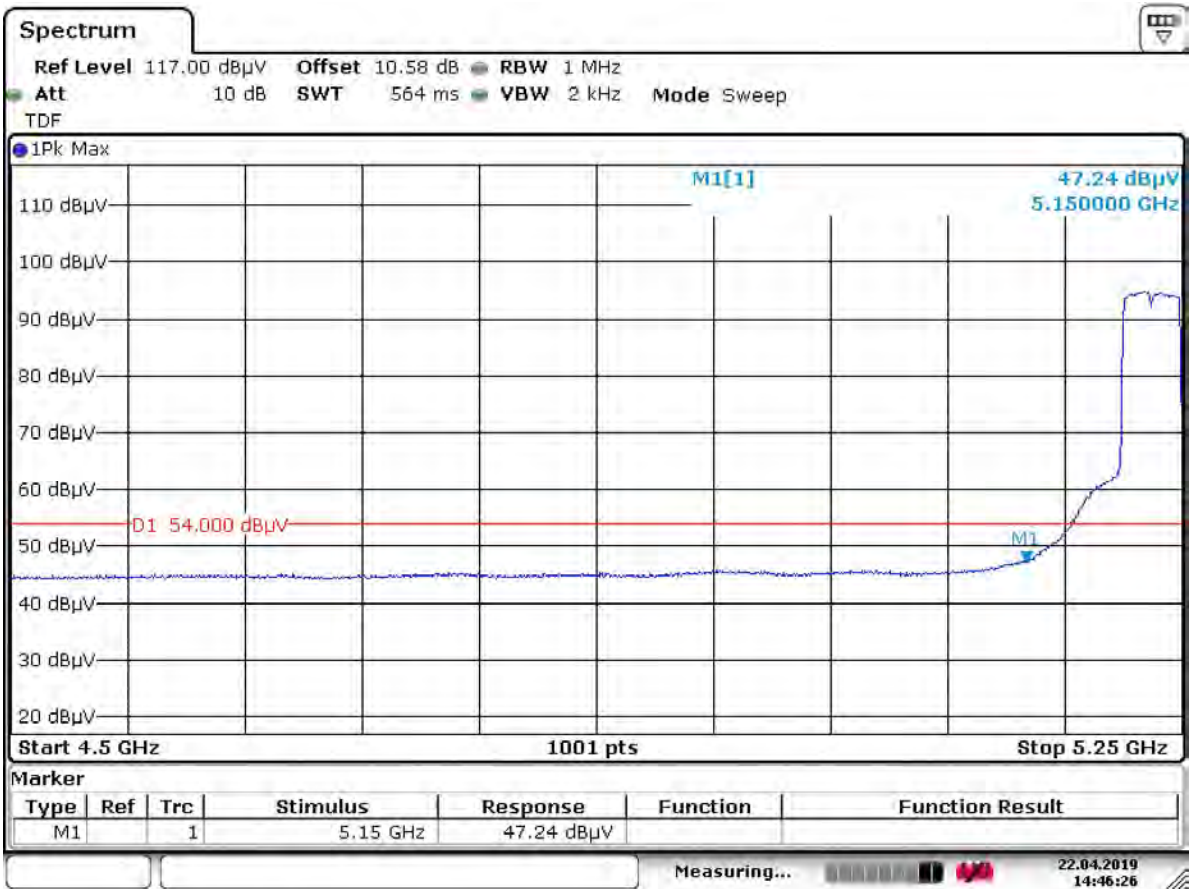

Date: 22.APR.2019 14:46:26

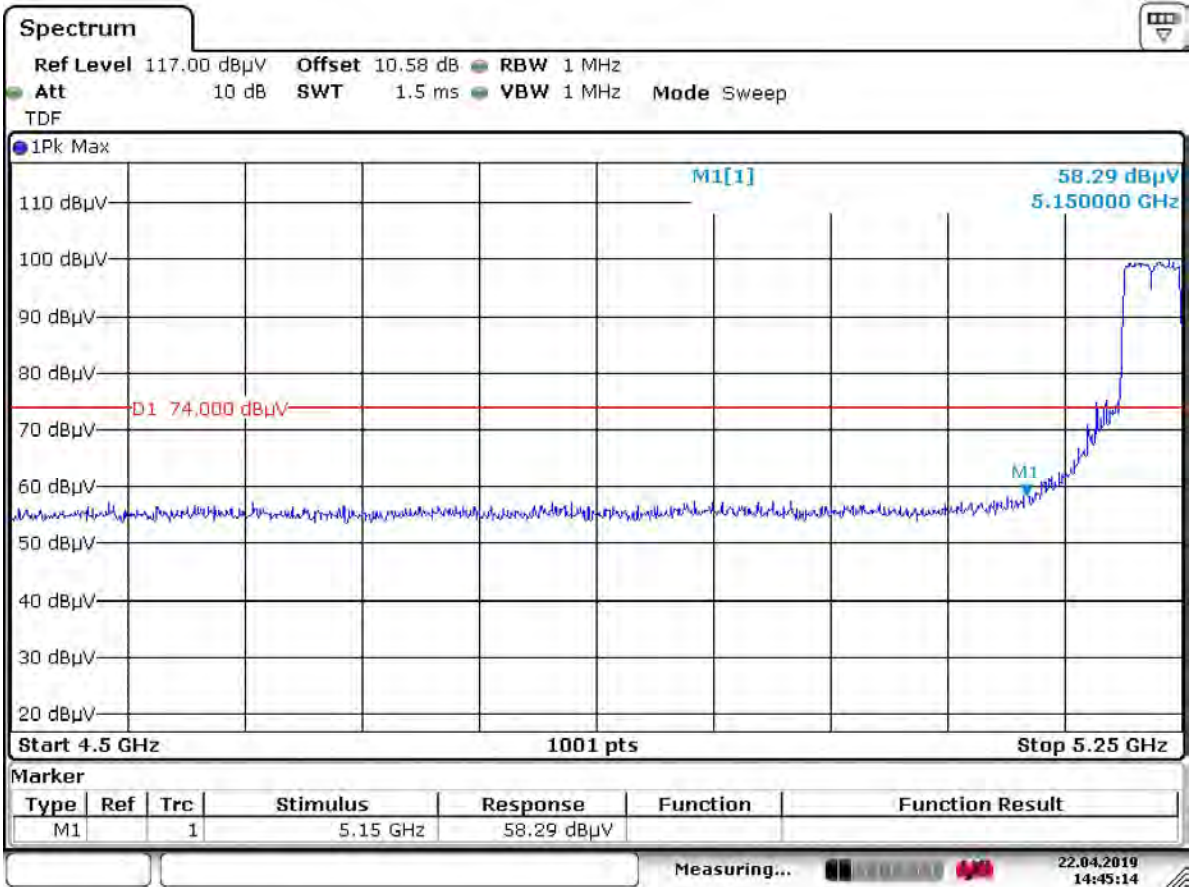


Date: 22.APR.2019 14:45:14

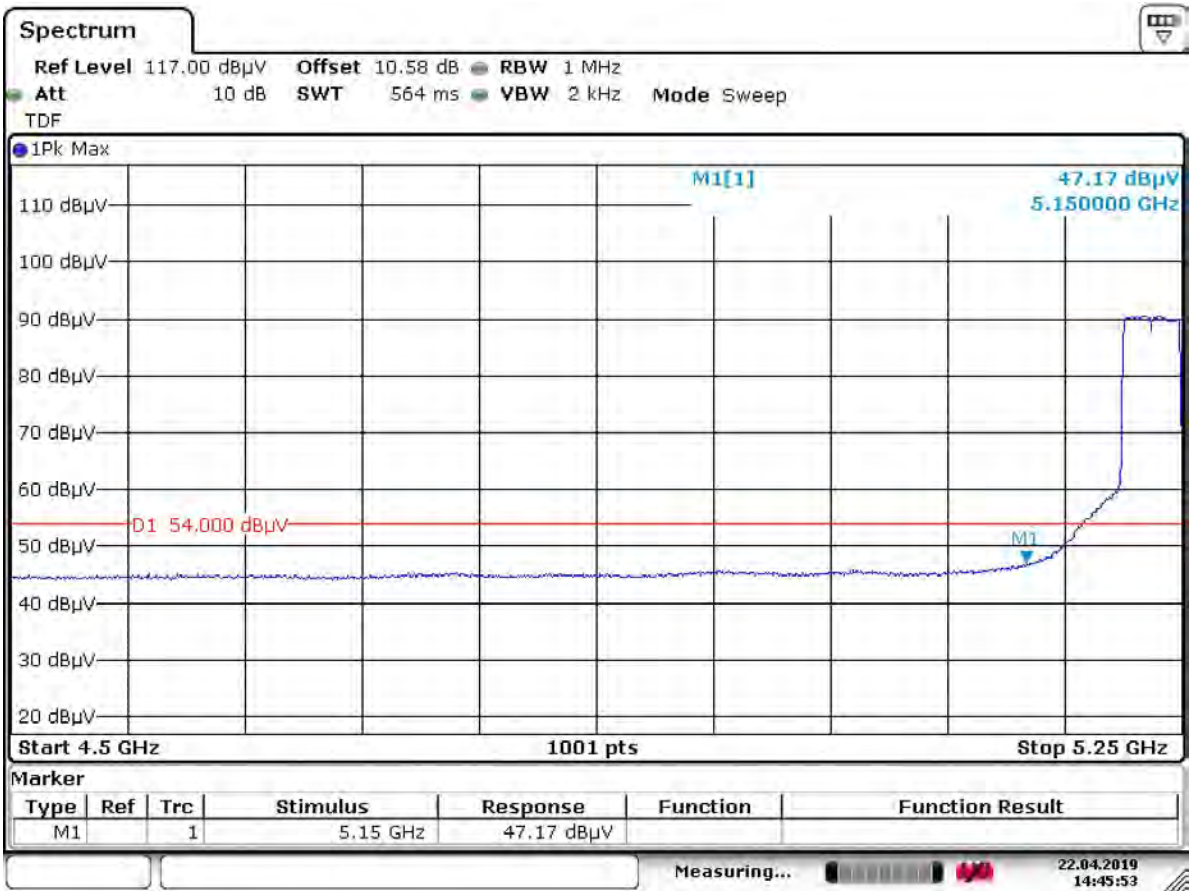


Date: 22.APR.2019 14:45:53

Channel 54(Horizontal)

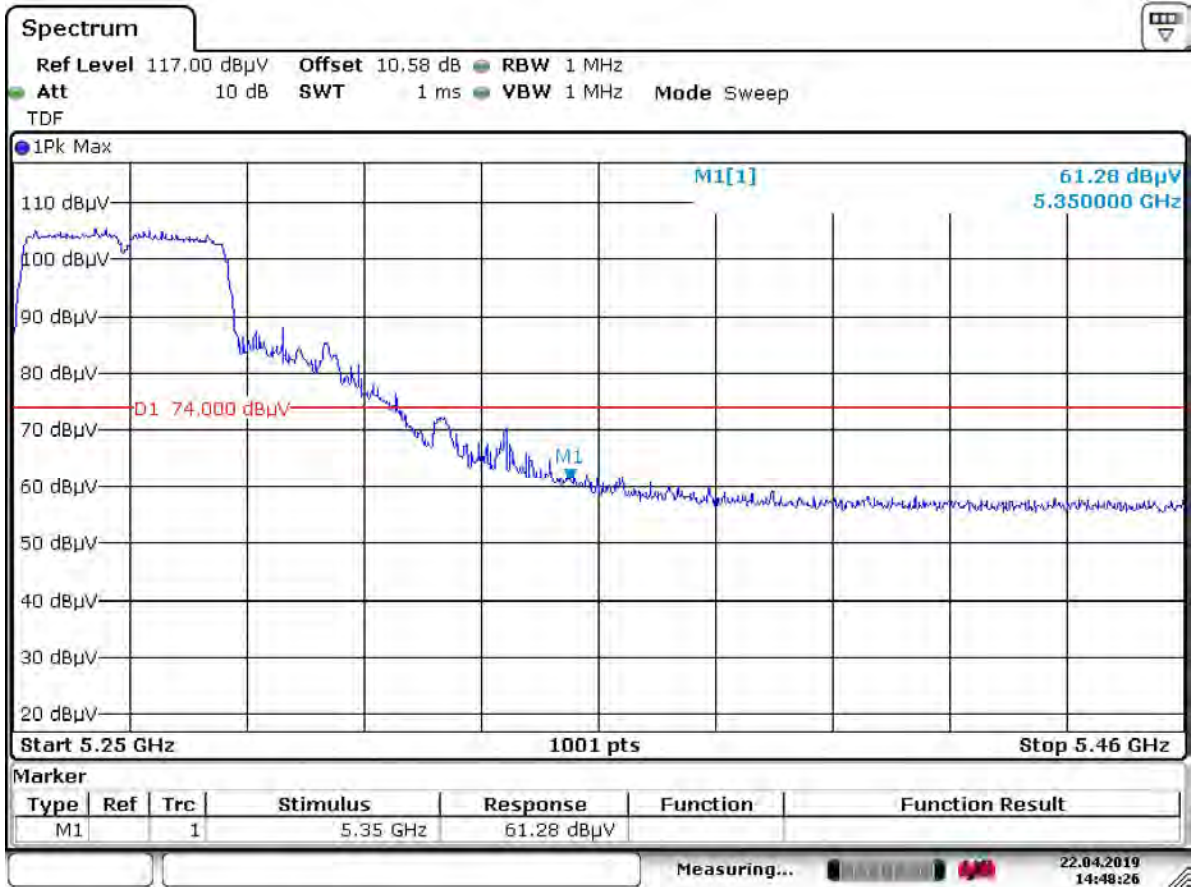


Date: 22.APR.2019 14:48:26

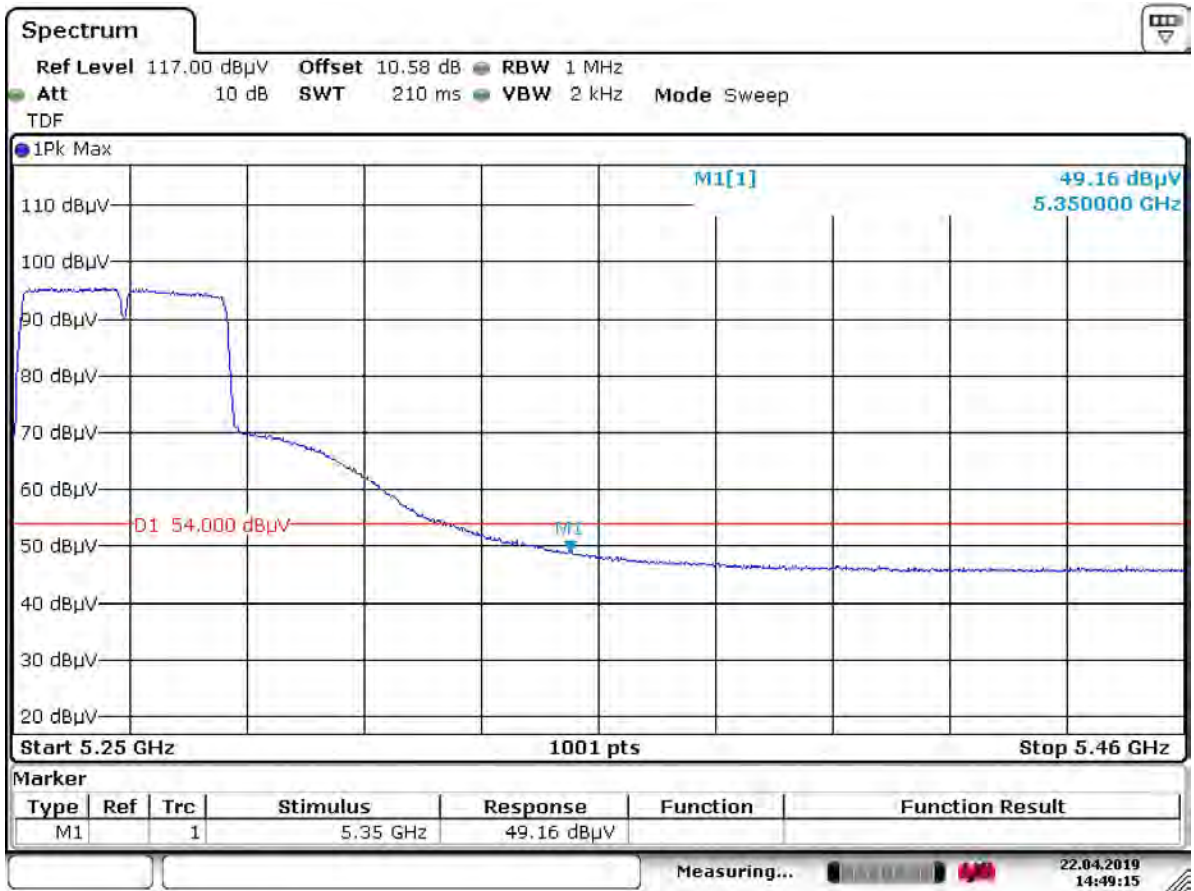

Date: 22.APR.2019 14:49:15



Date: 22.APR.2019 14:51:11

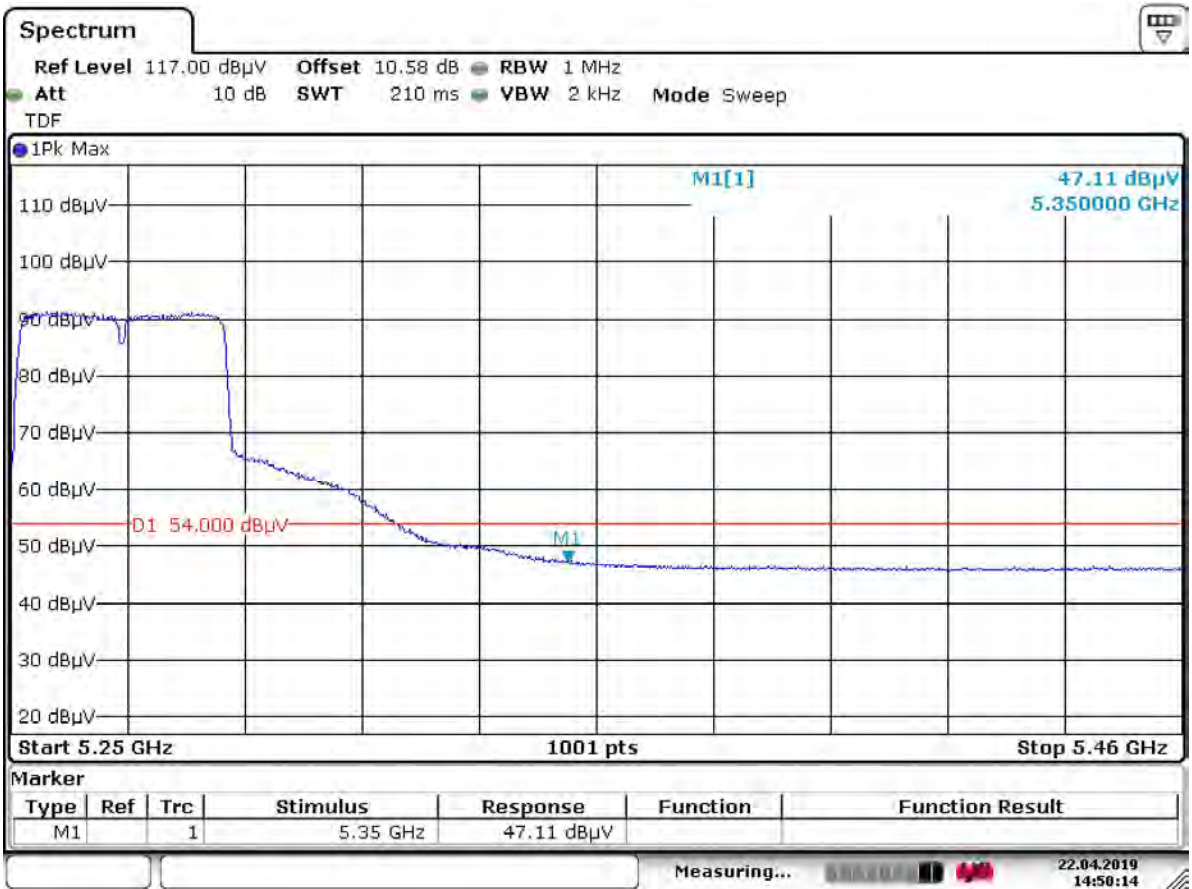


Date: 22.APR.2019 14:50:14

Channel 62(Horizontal)




Date: 22.APR.2019 14:55:02

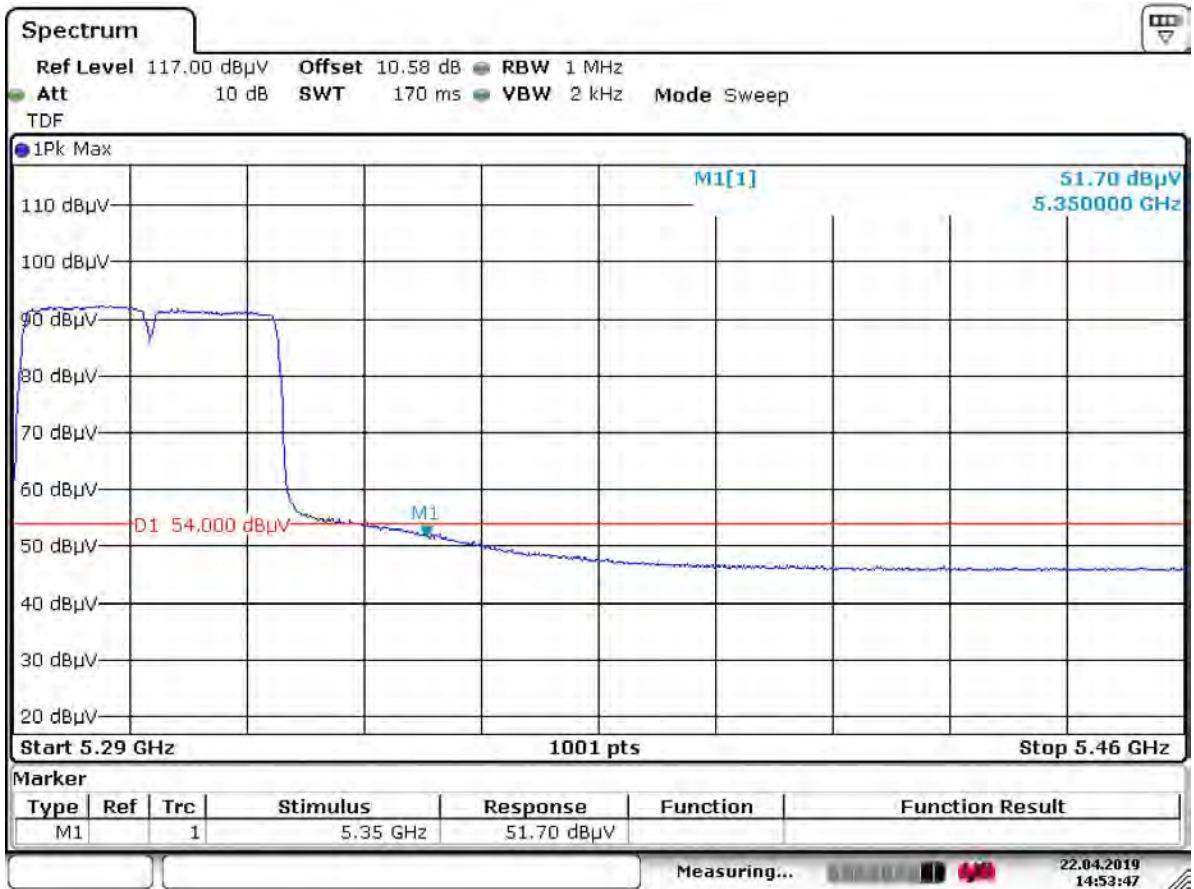


Date: 22.APR.2019 14:53:47




Date: 22.APR.2019 14:55:55

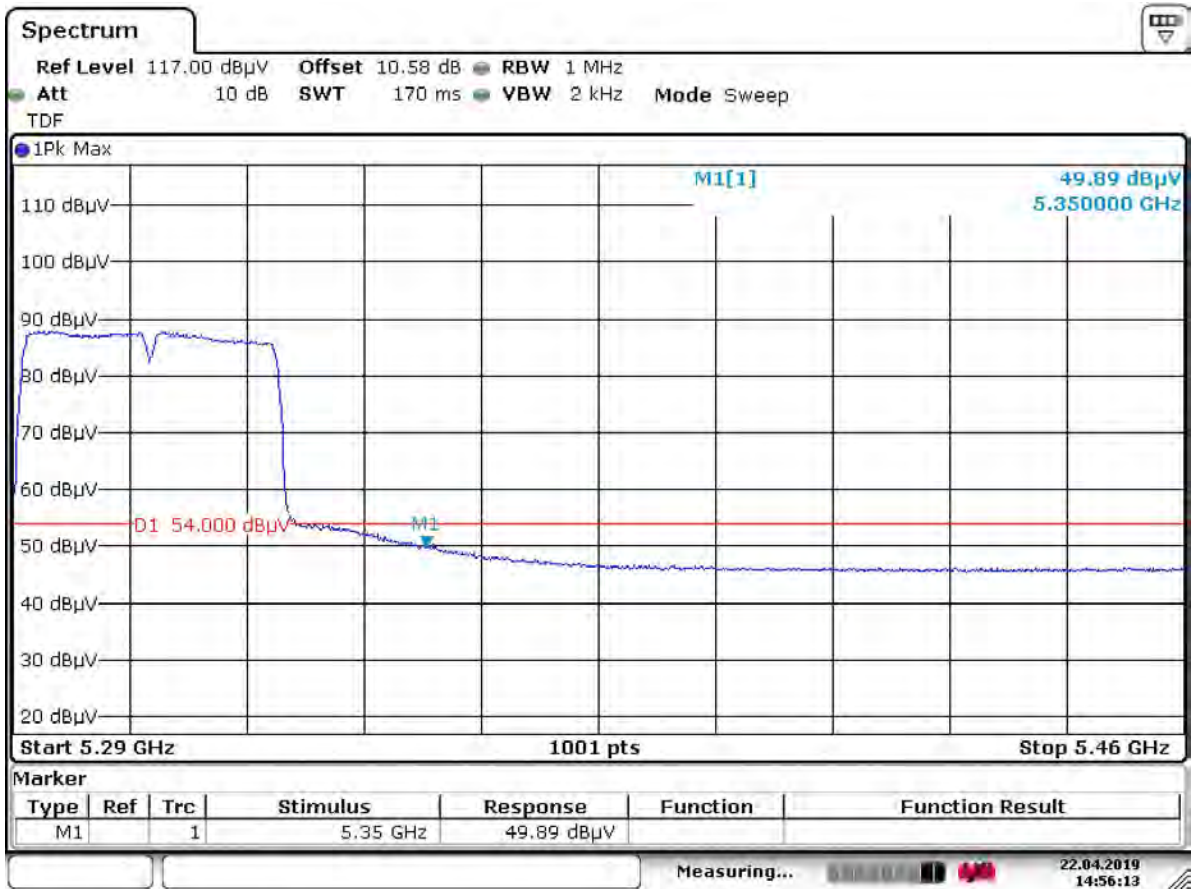


Date: 22.APR.2019 14:56:13

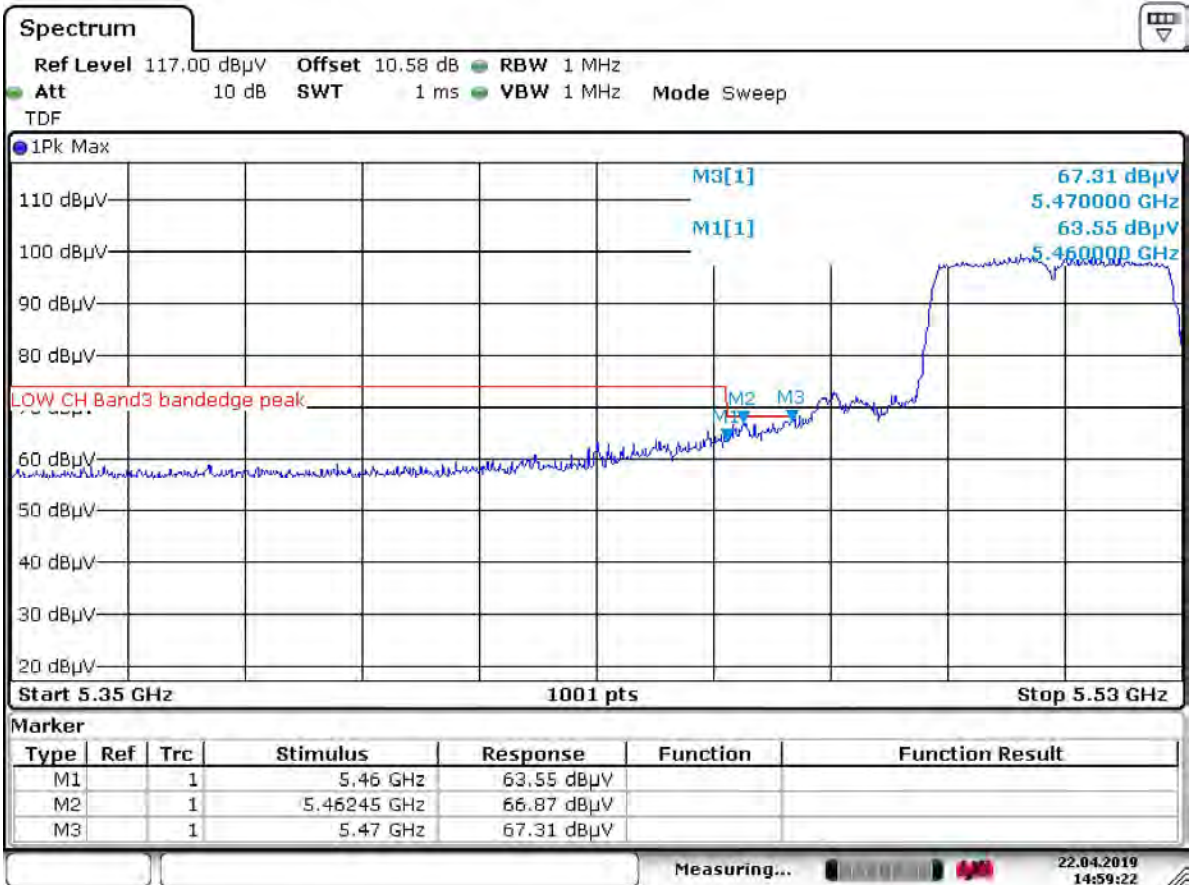


Date: 22.APR.2019 14:59:21

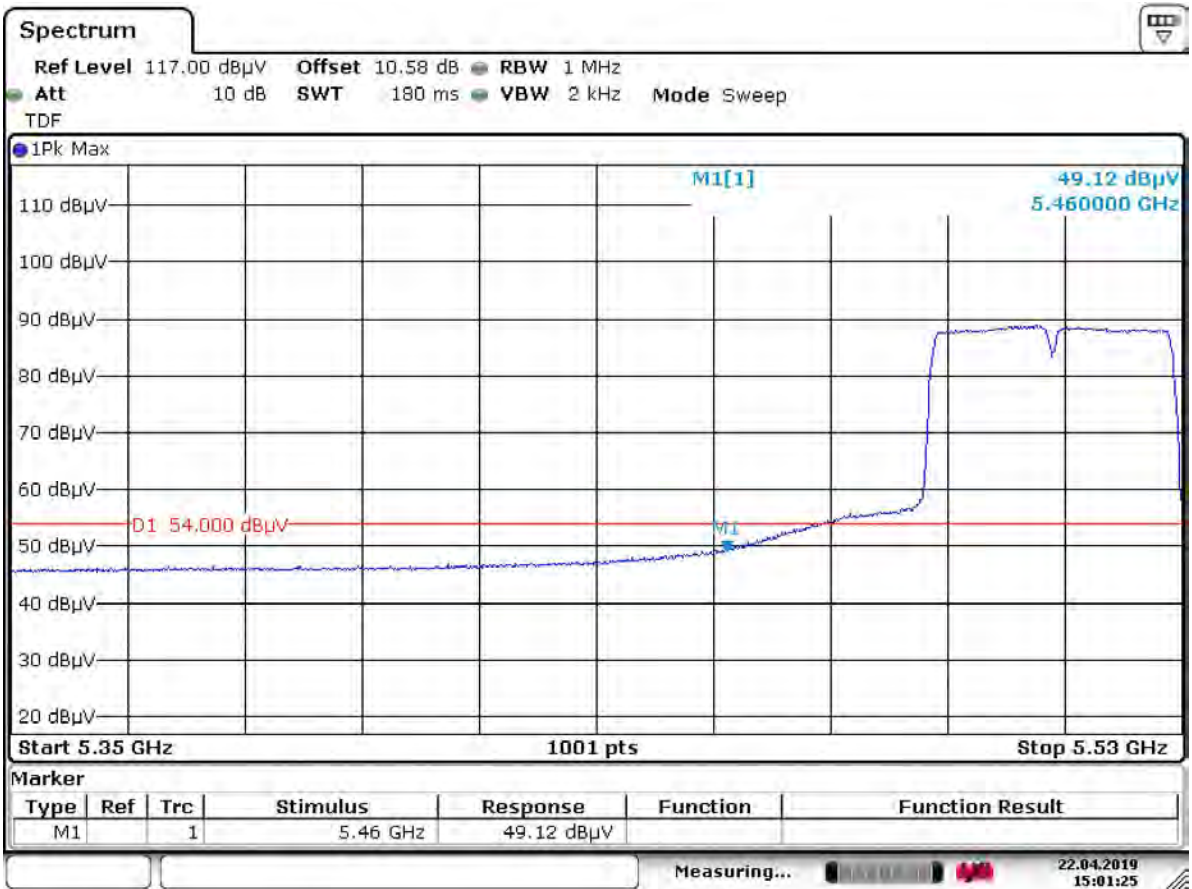

Date: 22.APR.2019 15:01:25

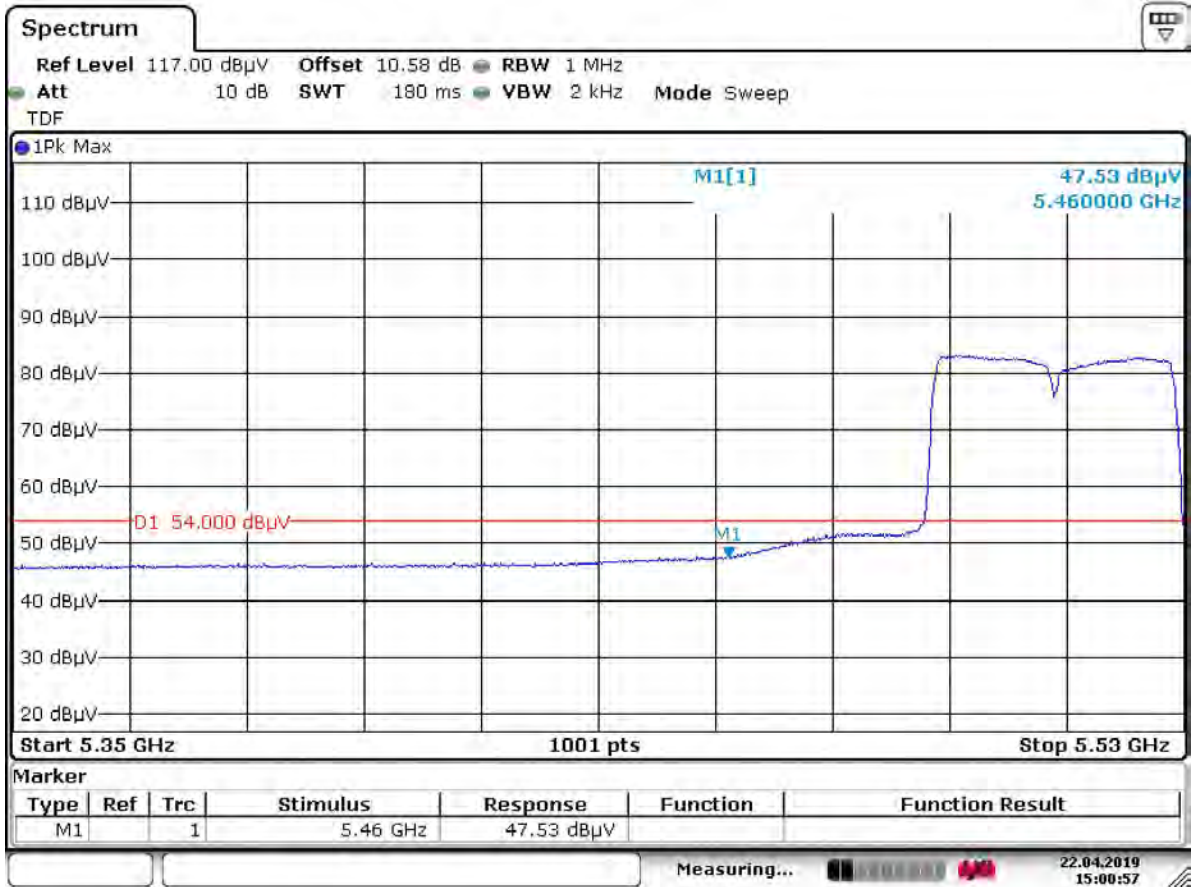

Date: 22.APR.2019 15:00:57

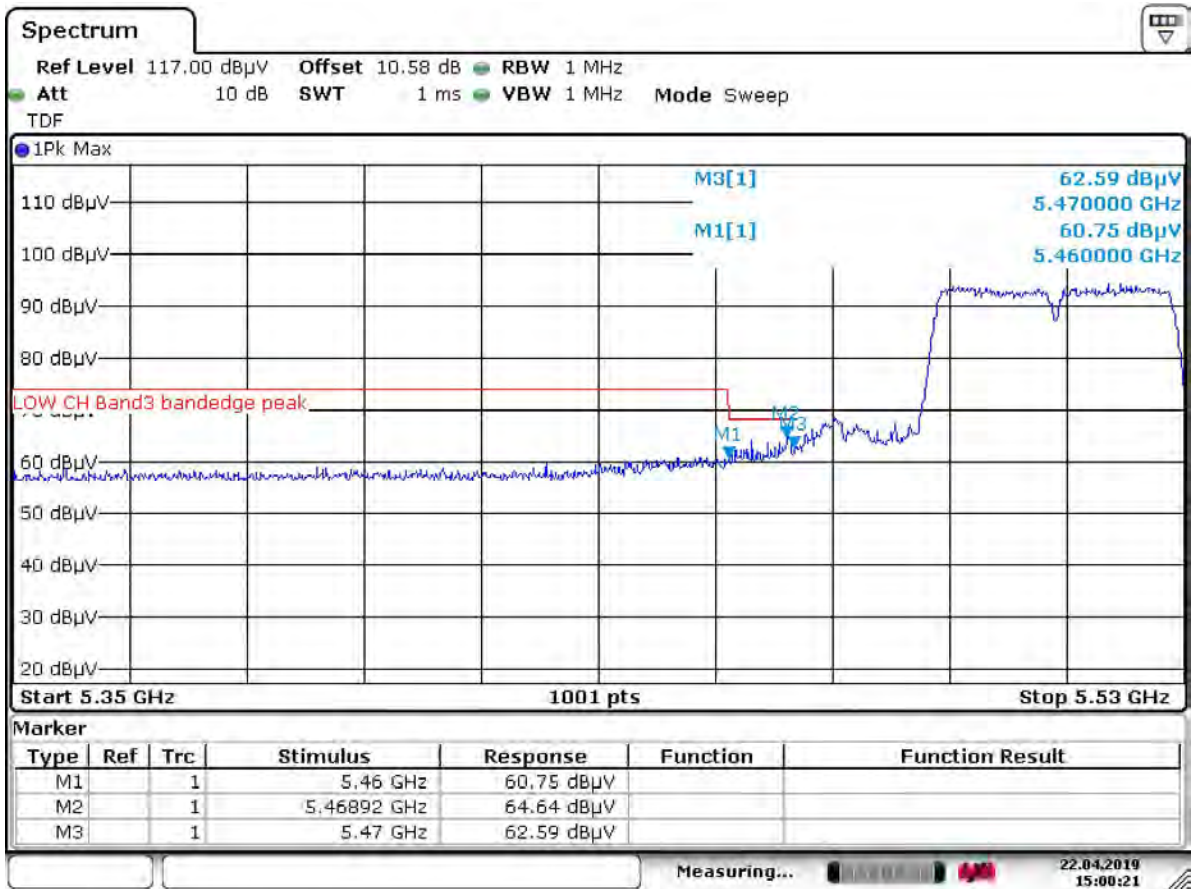


Date: 22.APR.2019 15:00:21

Channel 134(Horizontal)



Date: 22.APR.2019 15:03:30

Channel 134(Vertical)

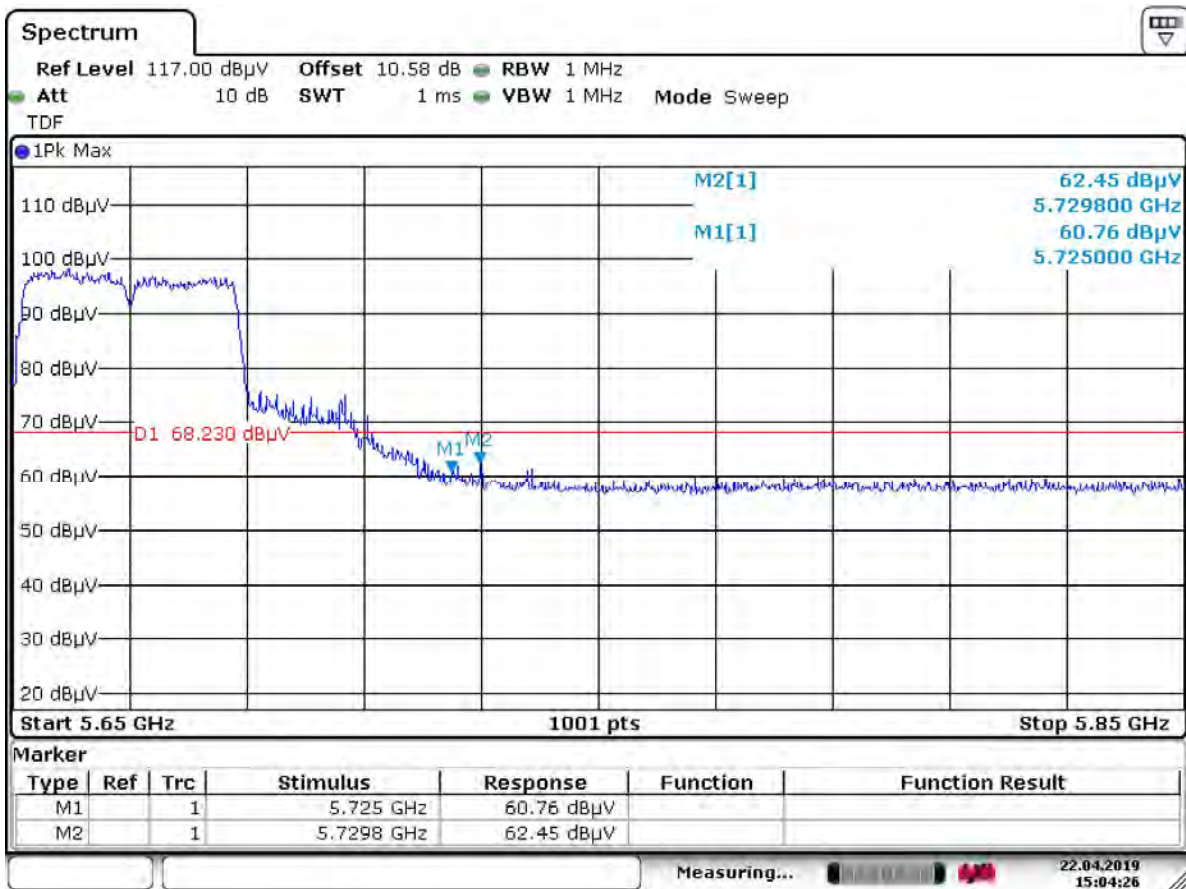


Date: 22.APR.2019 15:04:26

Spurious Emissions, TX Mode, 1GHz-18GHz




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

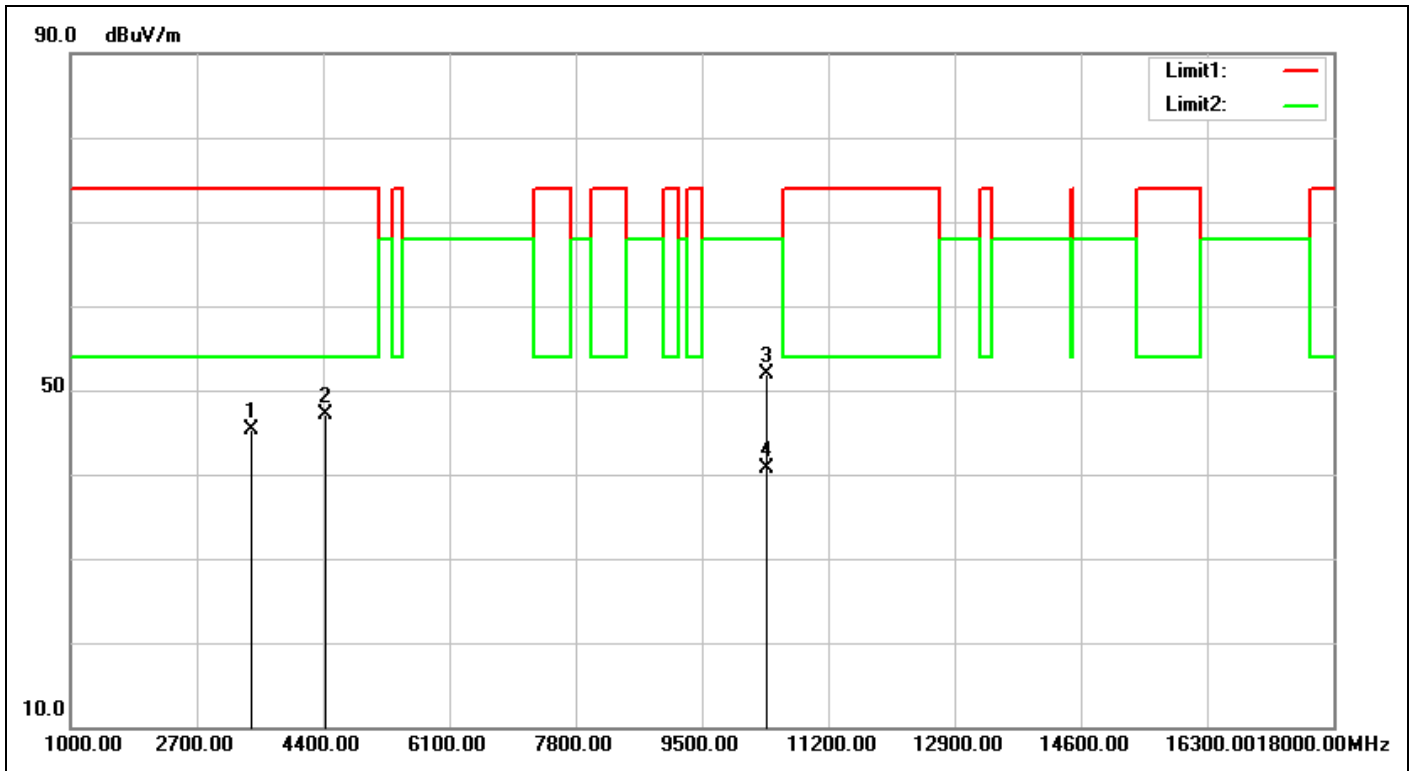


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:31:42
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3431.000	-5.12	50.40	45.28	74.00	-28.72	peak	100	198	
2	4434.000	-2.32	49.44	47.12	74.00	-26.88	peak	100	99	
3	10360.000	5.69	46.25	51.94	68.00	-16.06	peak	100	103	
4	10360.000	5.69	34.98	40.67	68.00	-27.33	AVG	100	103	

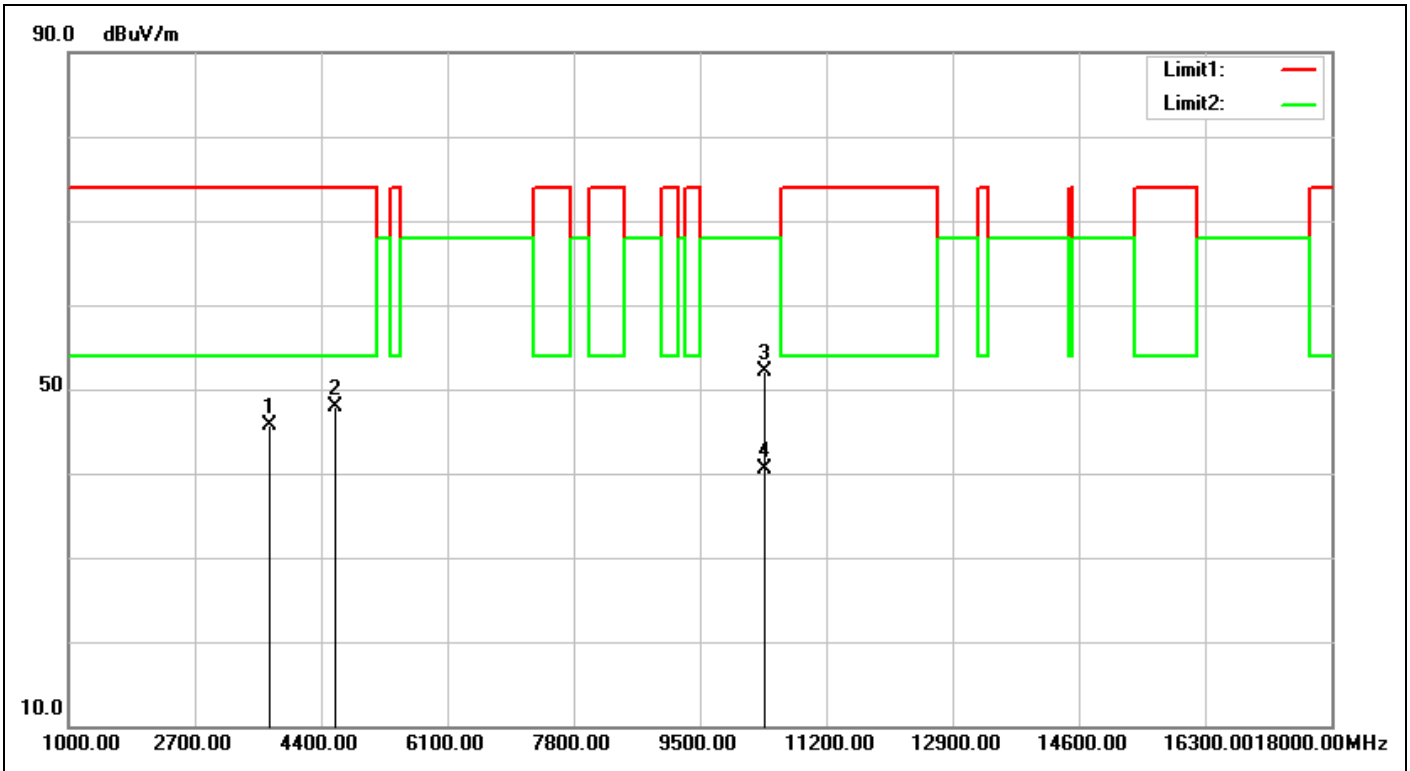


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:32:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3703.000	-4.62	50.27	45.65	74.00	-28.35	peak	100	5	
2	4587.000	-1.96	49.90	47.94	74.00	-26.06	peak	100	343	
3	10360.000	5.69	46.32	52.01	68.00	-15.99	peak	100	343	
4	10360.000	5.69	34.76	40.45	68.00	-27.55	AVG	100	343	

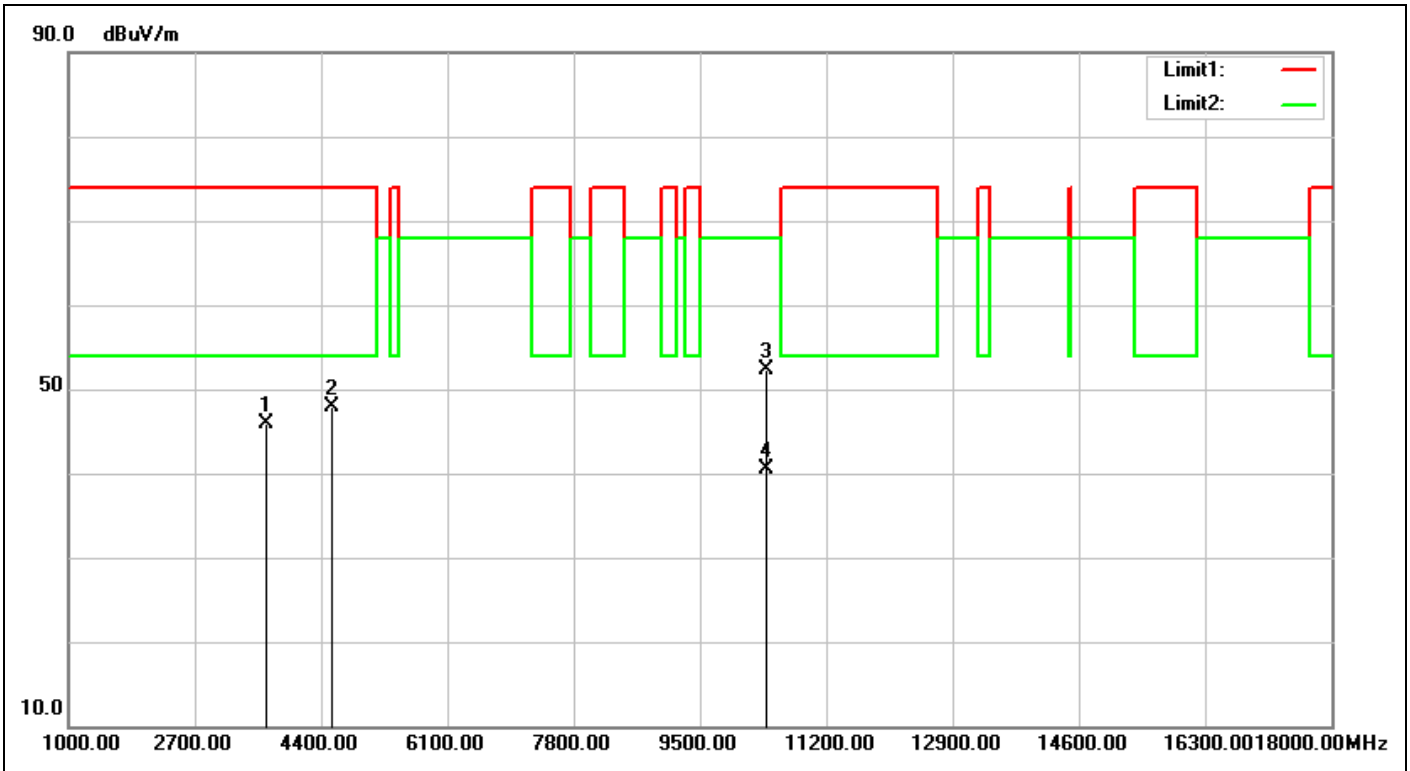


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:41:24
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3669.000	-4.68	50.63	45.95	74.00	-28.05	peak	100	2	
2	4553.000	-2.01	49.86	47.85	74.00	-26.15	peak	100	323	
3	10400.000	5.60	46.74	52.34	68.00	-15.66	peak	100	2	
4	10400.000	5.60	34.95	40.55	68.00	-27.45	AVG	100	2	

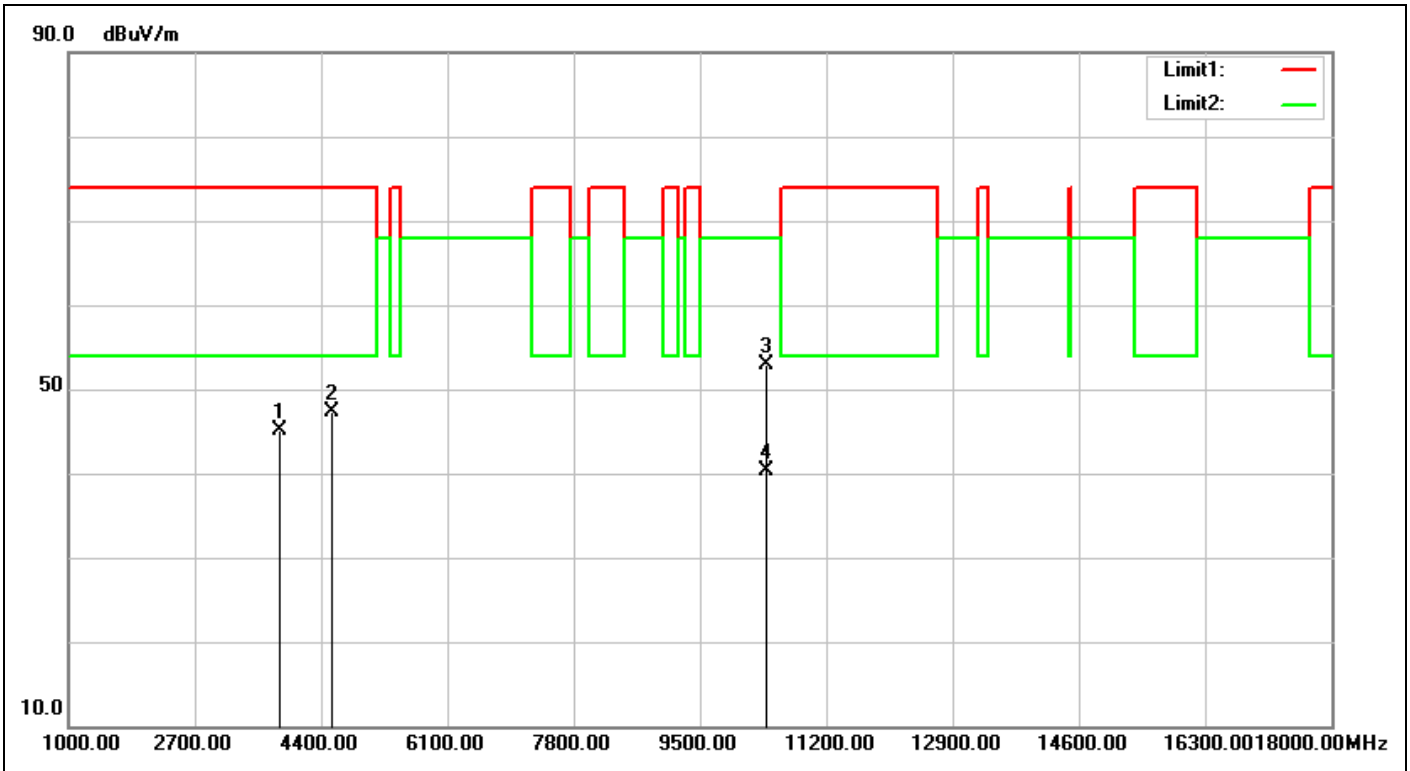


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:42:17
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	49.50	45.19	74.00	-28.81	peak	100	95	
2	4553.000	-2.01	49.39	47.38	74.00	-26.62	peak	100	89	
3	10400.000	5.60	47.36	52.96	68.00	-15.04	peak	100	317	
4	10400.000	5.60	34.63	40.23	68.00	-27.77	AVG	100	317	

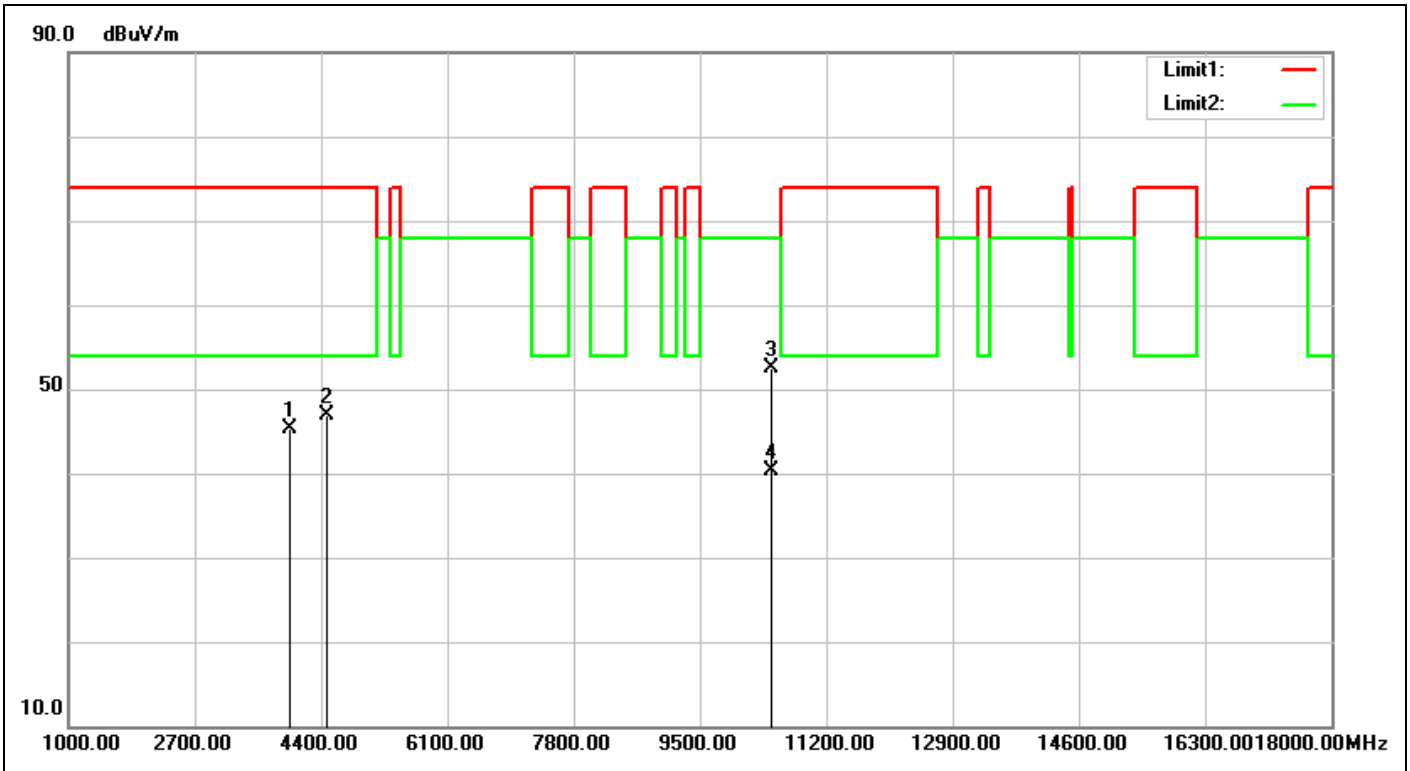


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:46:01
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3975.000	-3.99	49.28	45.29	74.00	-28.71	peak	100	114	
2	4485.000	-2.13	49.08	46.95	74.00	-27.05	peak	100	353	
3	10480.000	5.42	47.06	52.48	68.00	-15.52	peak	100	285	
4	10480.000	5.42	34.95	40.37	68.00	-27.63	AVG	100	285	

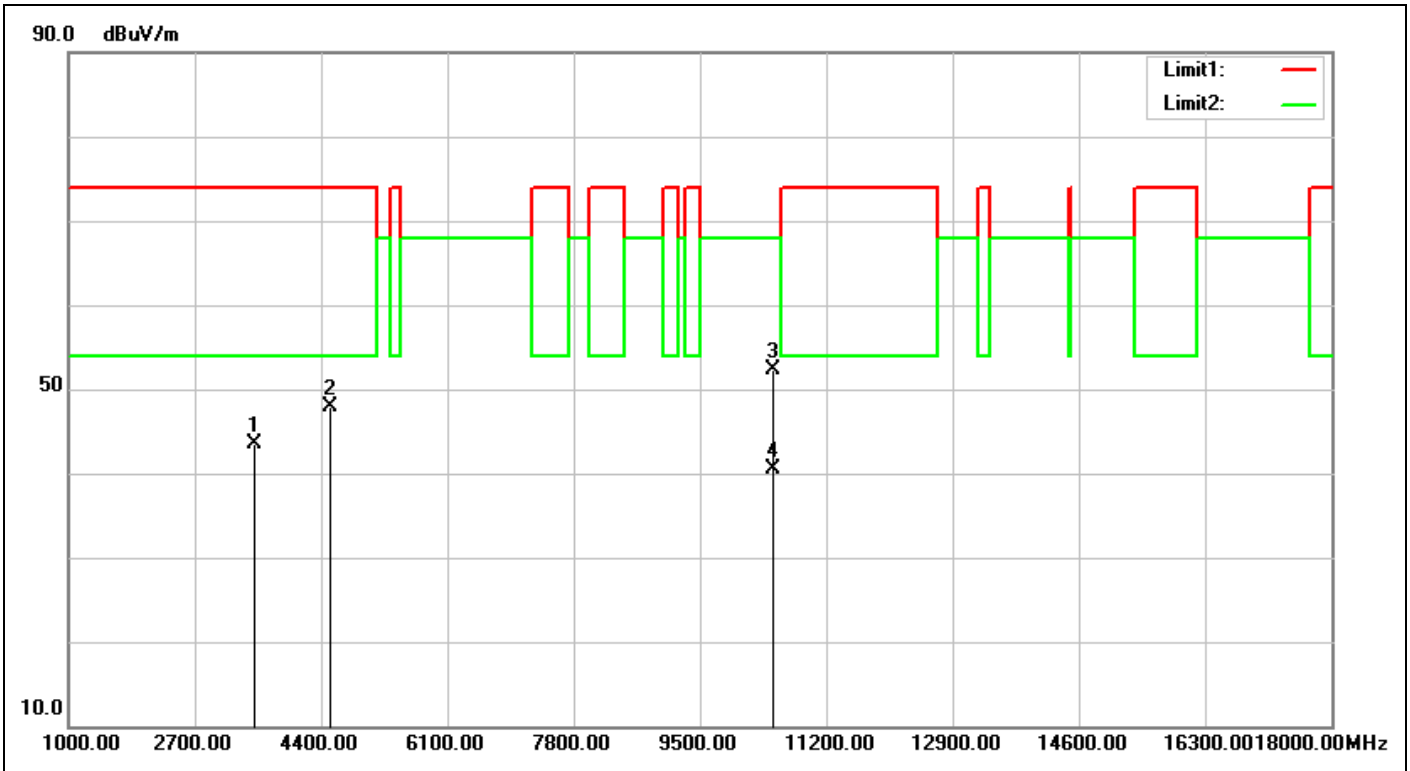


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:46:54
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3499.000	-5.07	48.50	43.43	74.00	-30.57	peak	100	105	
2	4519.000	-2.05	49.96	47.91	74.00	-26.09	peak	100	20	
3	10480.000	5.42	46.79	52.21	68.00	-15.79	peak	100	171	
4	10480.000	5.42	35.12	40.54	68.00	-27.46	AVG	100	171	

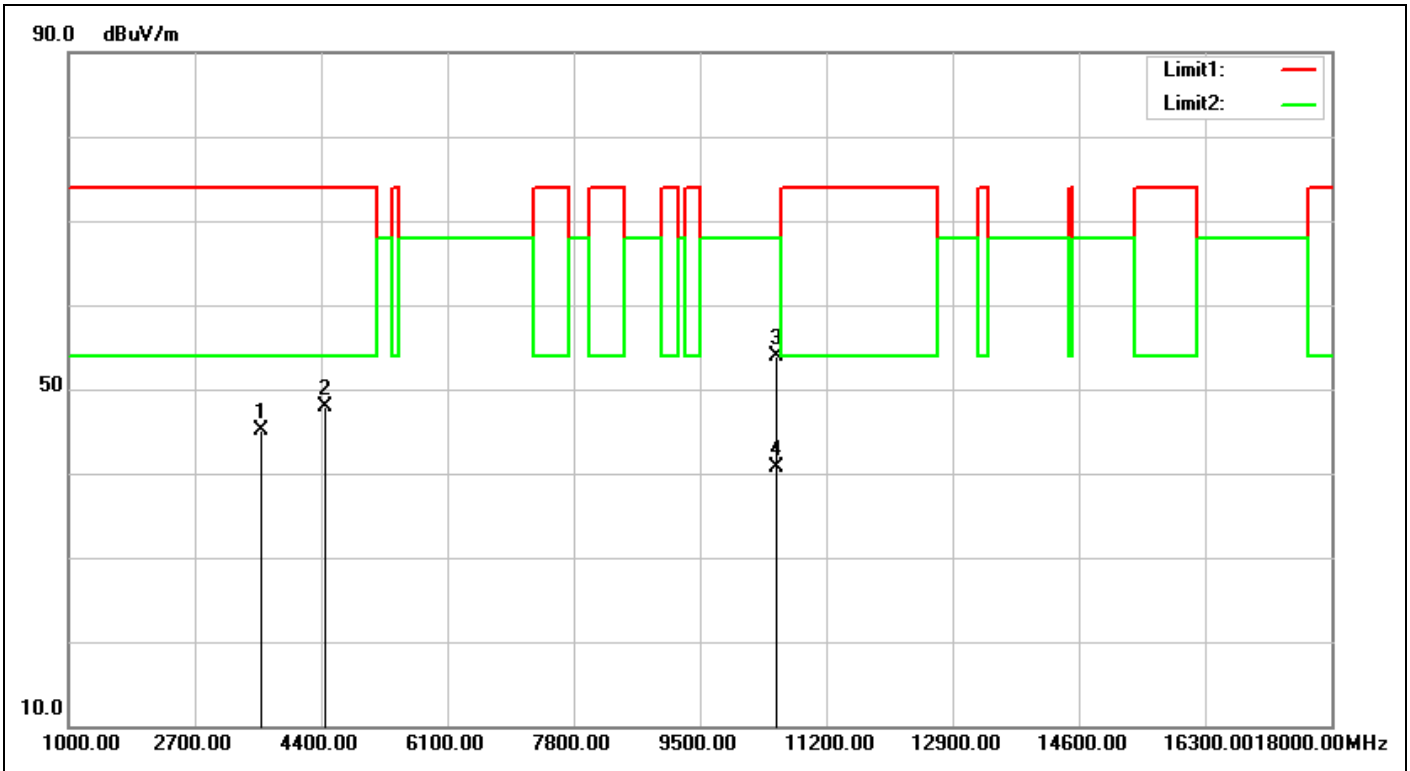


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:32:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3601.000	-4.84	49.97	45.13	74.00	-28.87	peak	100	306	
2	4451.000	-2.26	50.22	47.96	74.00	-26.04	peak	100	237	
3	10520.000	5.37	48.45	53.82	68.00	-14.18	peak	100	213	
4	10520.000	5.37	35.38	40.75	68.00	-27.25	AVG	100	213	

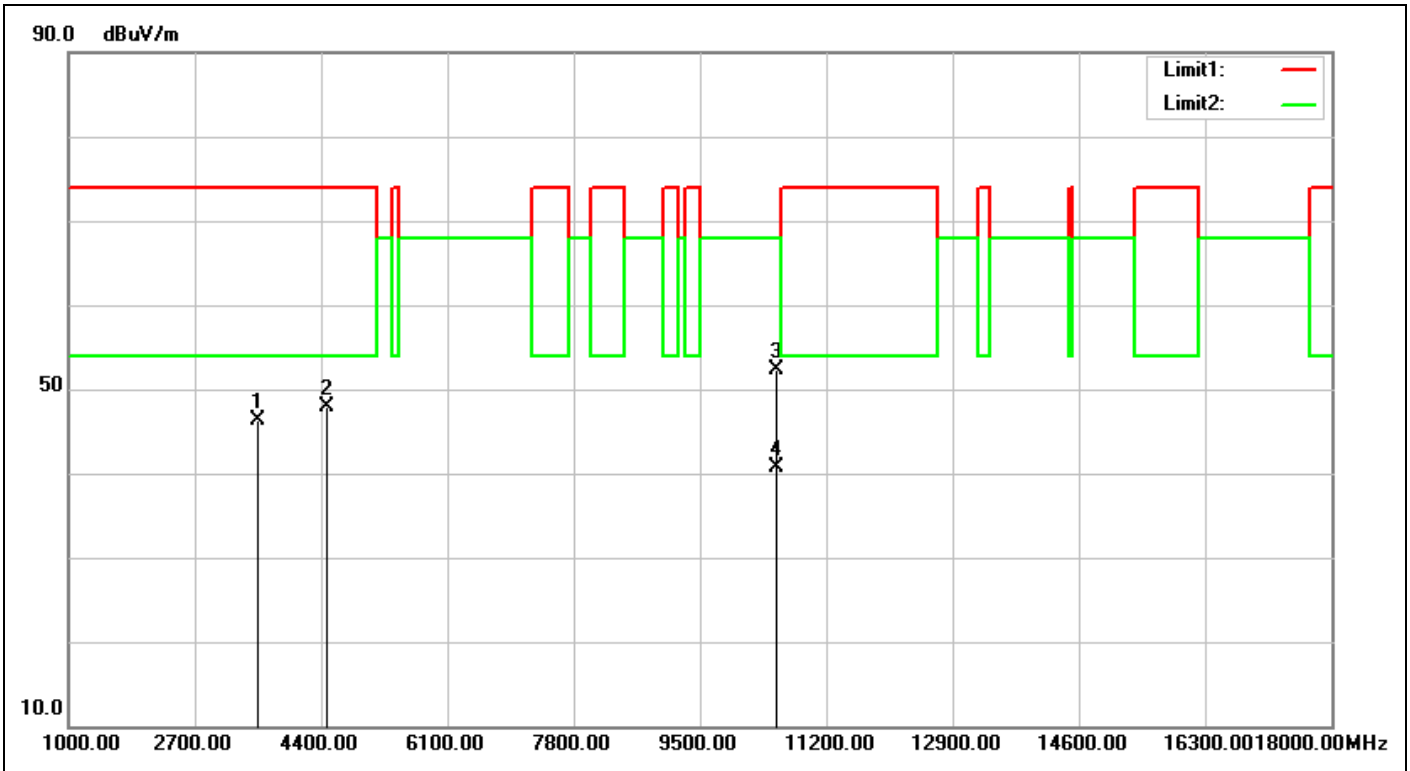


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:33:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3550.000	-4.96	51.31	46.35	74.00	-27.65	peak	100	318	
2	4485.000	-2.13	50.09	47.96	74.00	-26.04	peak	100	232	
3	10520.000	5.37	46.85	52.22	68.00	-15.78	peak	100	68	
4	10520.000	5.37	35.40	40.77	68.00	-27.23	AVG	100	68	

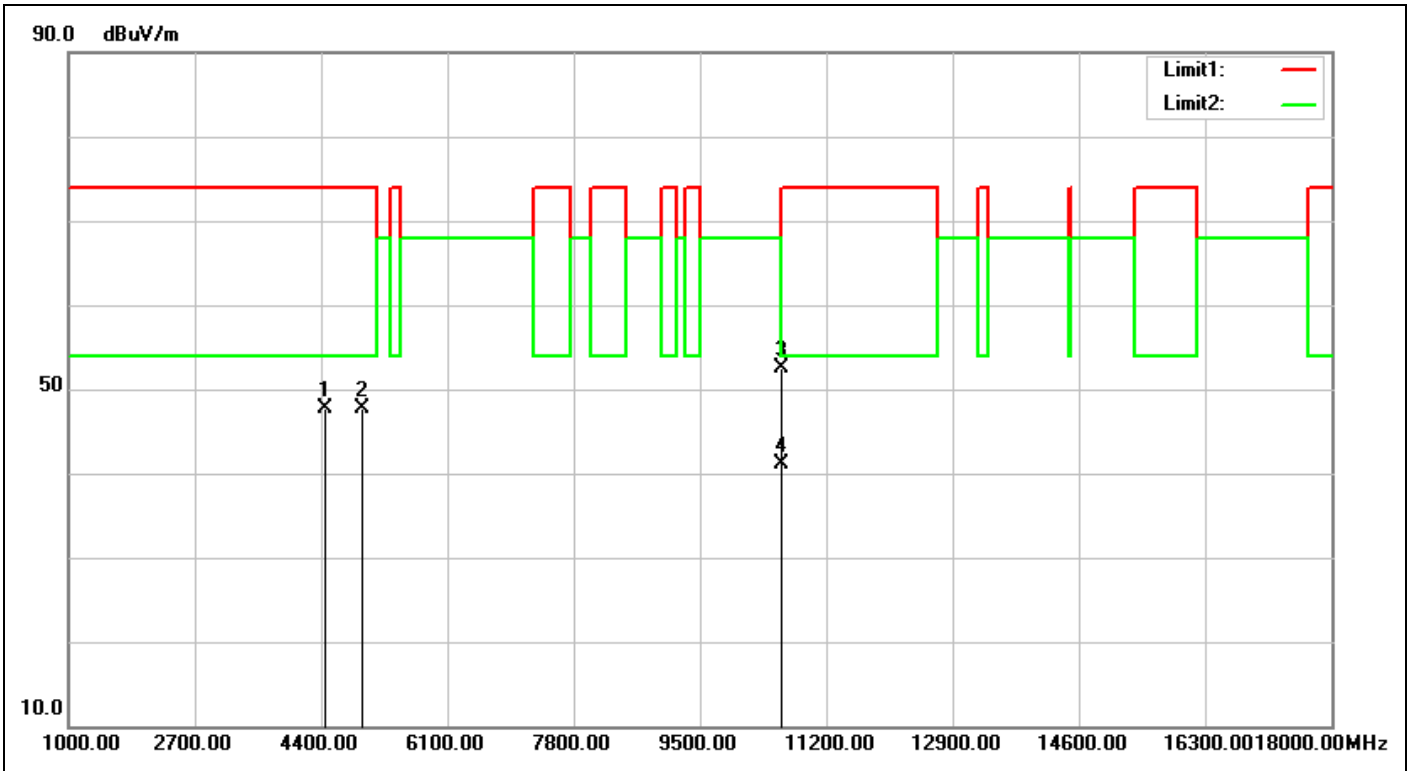


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:45:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4451.000	-2.26	49.96	47.70	74.00	-26.30	peak	100	207	
2	4961.000	-1.44	49.10	47.66	74.00	-26.34	peak	100	343	
3	10600.000	5.28	47.20	52.48	68.00	-15.52	peak	100	360	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	360	

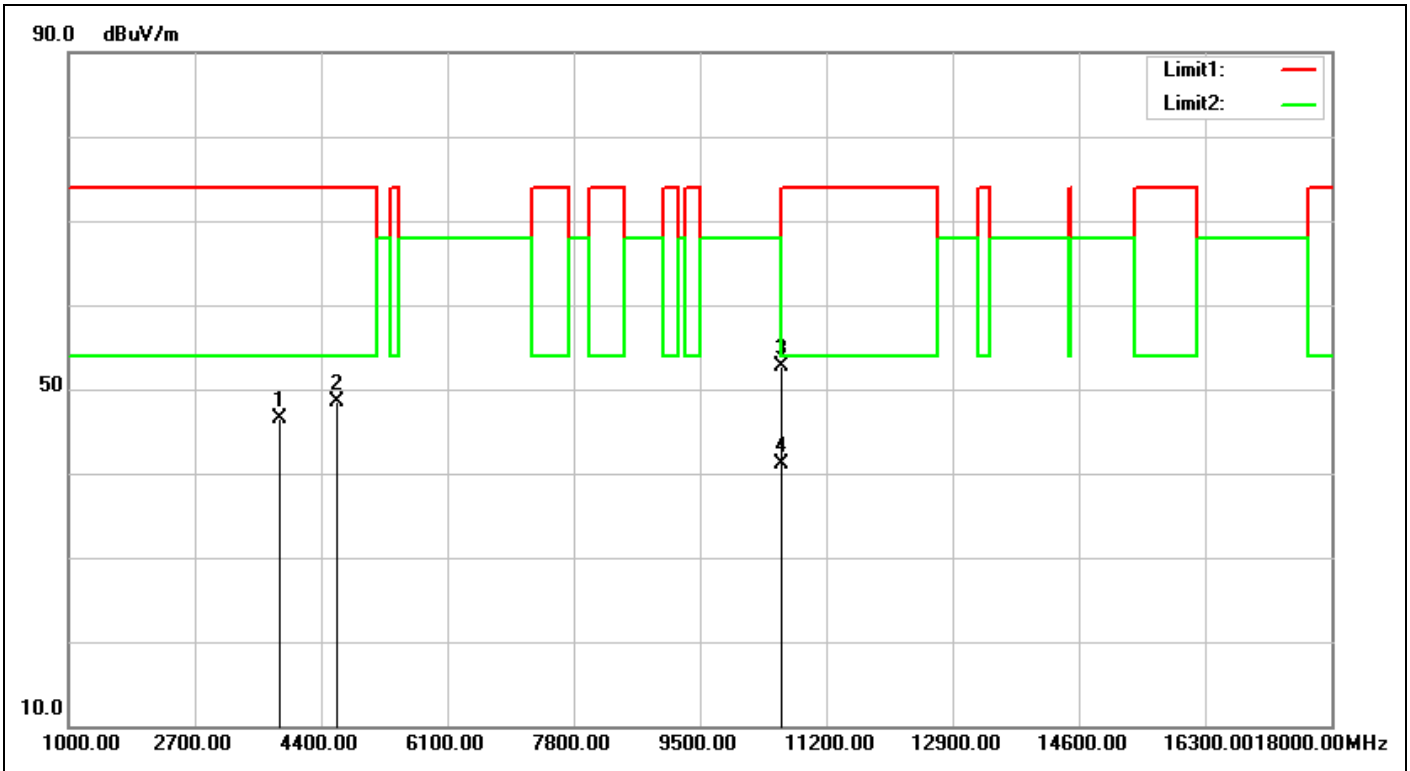


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:46:45
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	50.77	46.46	74.00	-27.54	peak	100	85	
2	4621.000	-1.91	50.43	48.52	74.00	-25.48	peak	100	96	
3	10600.000	5.28	47.33	52.61	68.00	-15.39	peak	100	205	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	205	

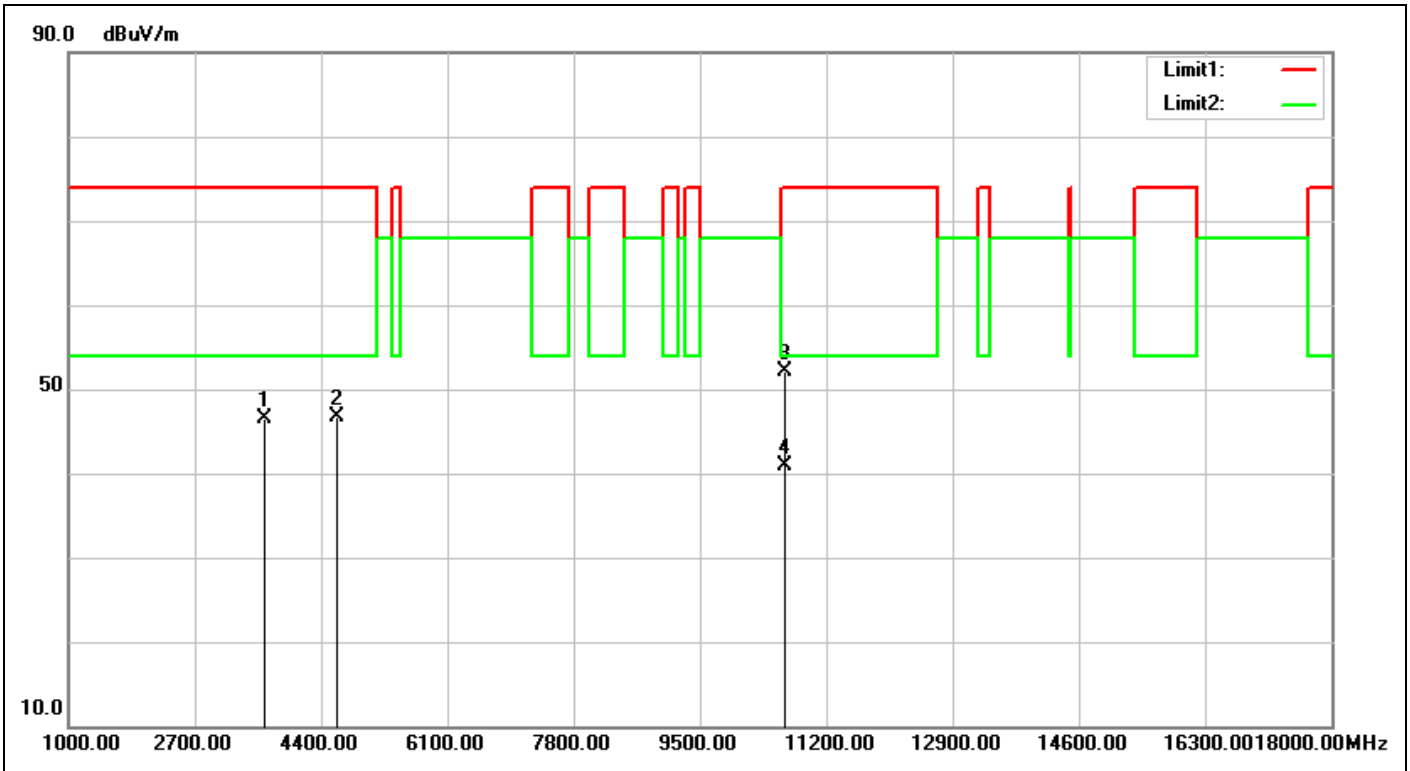


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:03:01
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3635.000	-4.76	51.19	46.43	74.00	-27.57	peak	100	8	
2	4621.000	-1.91	48.53	46.62	74.00	-27.38	peak	100	343	
3	10640.000	5.24	46.96	52.20	74.00	-21.80	peak	100	340	
4	10640.000	5.24	35.74	40.98	54.00	-13.02	AVG	100	340	

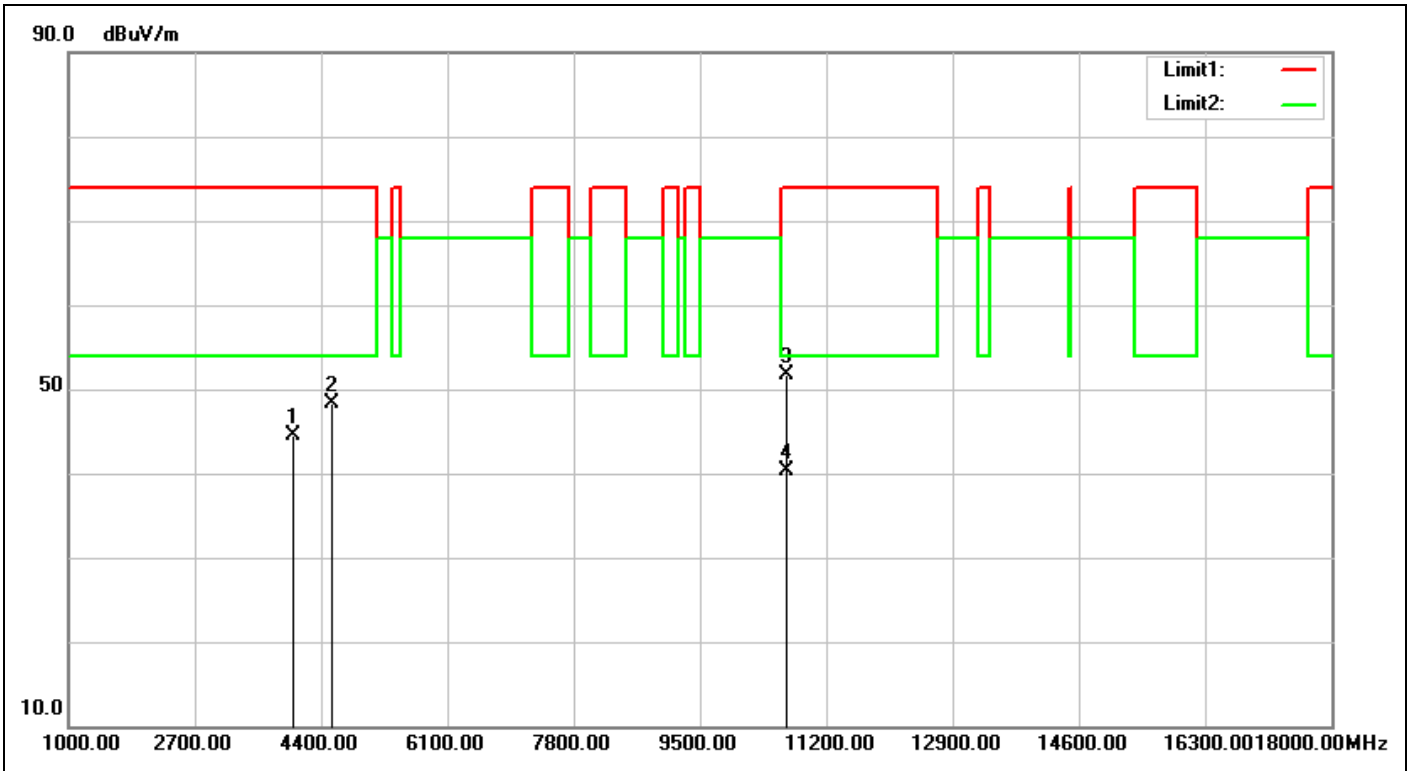


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:03:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4026.000	-3.83	48.35	44.52	74.00	-29.48	peak	100	55	
2	4553.000	-2.01	50.22	48.21	74.00	-25.79	peak	100	58	
3	10640.000	5.24	46.46	51.70	74.00	-22.30	peak	100	304	
4	10640.000	5.24	35.07	40.31	54.00	-13.69	AVG	100	304	

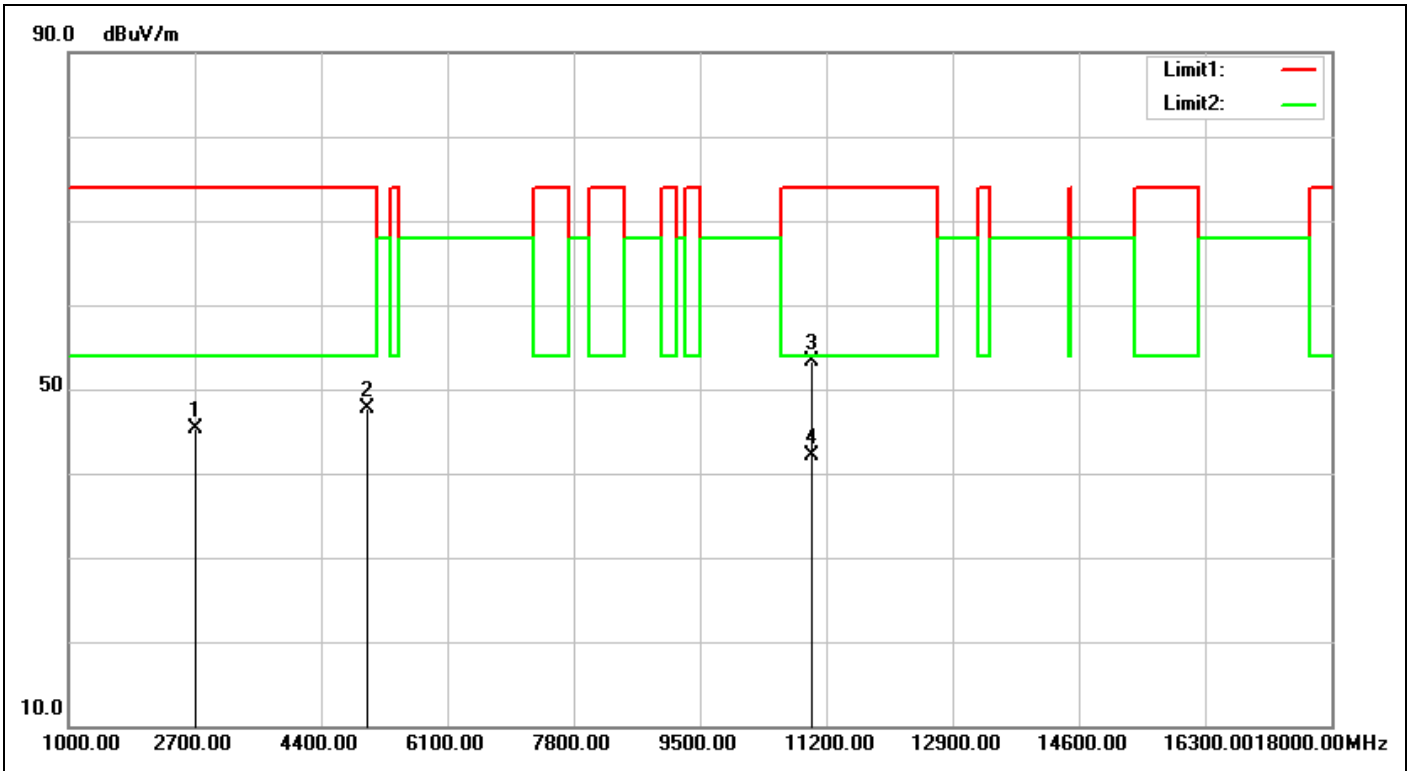


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:01:00
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	51.20	45.24	74.00	-28.76	peak	100	269	
2	5029.000	-1.25	48.90	47.65	74.00	-26.35	peak	112	173	
3	11000.000	4.87	48.35	53.22	74.00	-20.78	peak	100	248	
4	11000.000	4.87	37.14	42.01	54.00	-11.99	AVG	100	248	

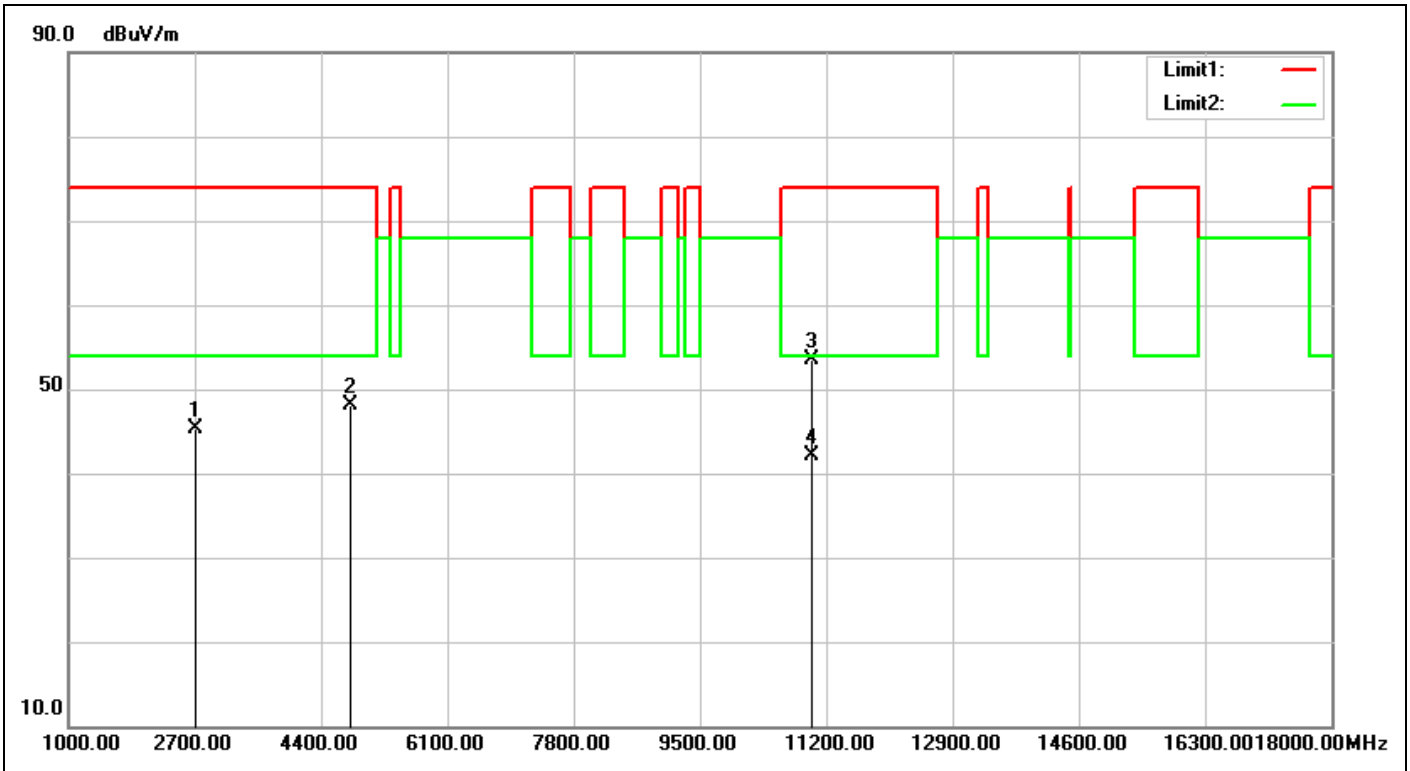


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:01:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2717.000	-5.93	51.23	45.30	74.00	-28.70	peak	100	219	
2	4791.000	-1.67	49.75	48.08	74.00	-25.92	peak	102	260	
3	11000.000	4.87	48.60	53.47	74.00	-20.53	peak	100	154	
4	11000.000	4.87	37.24	42.11	54.00	-11.89	AVG	100	154	

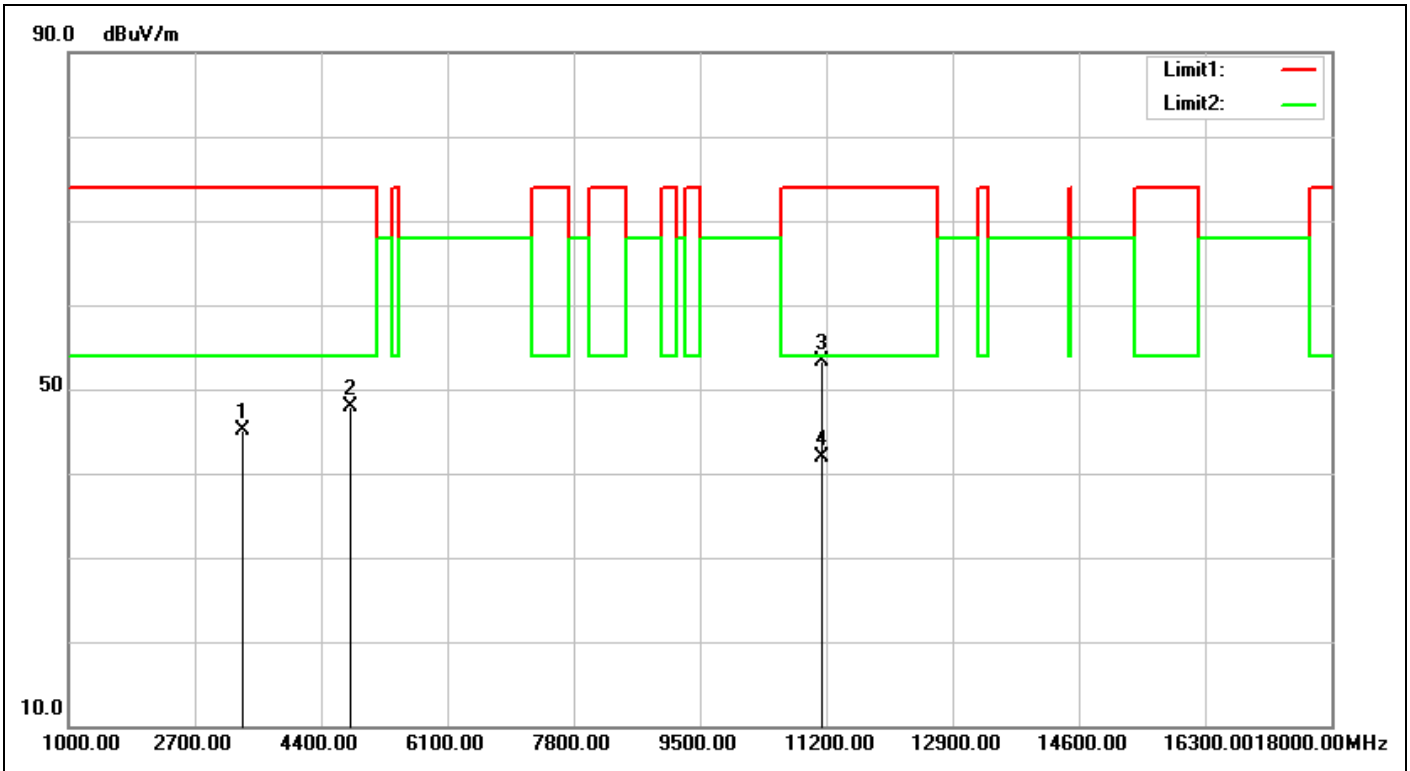


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:07:32
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3346.000	-5.19	50.36	45.17	74.00	-28.83	peak	100	26	
2	4791.000	-1.67	49.61	47.94	74.00	-26.06	peak	100	303	
3	11160.000	5.01	48.26	53.27	74.00	-20.73	peak	100	343	
4	11160.000	5.01	36.91	41.92	54.00	-12.08	AVG	100	343	

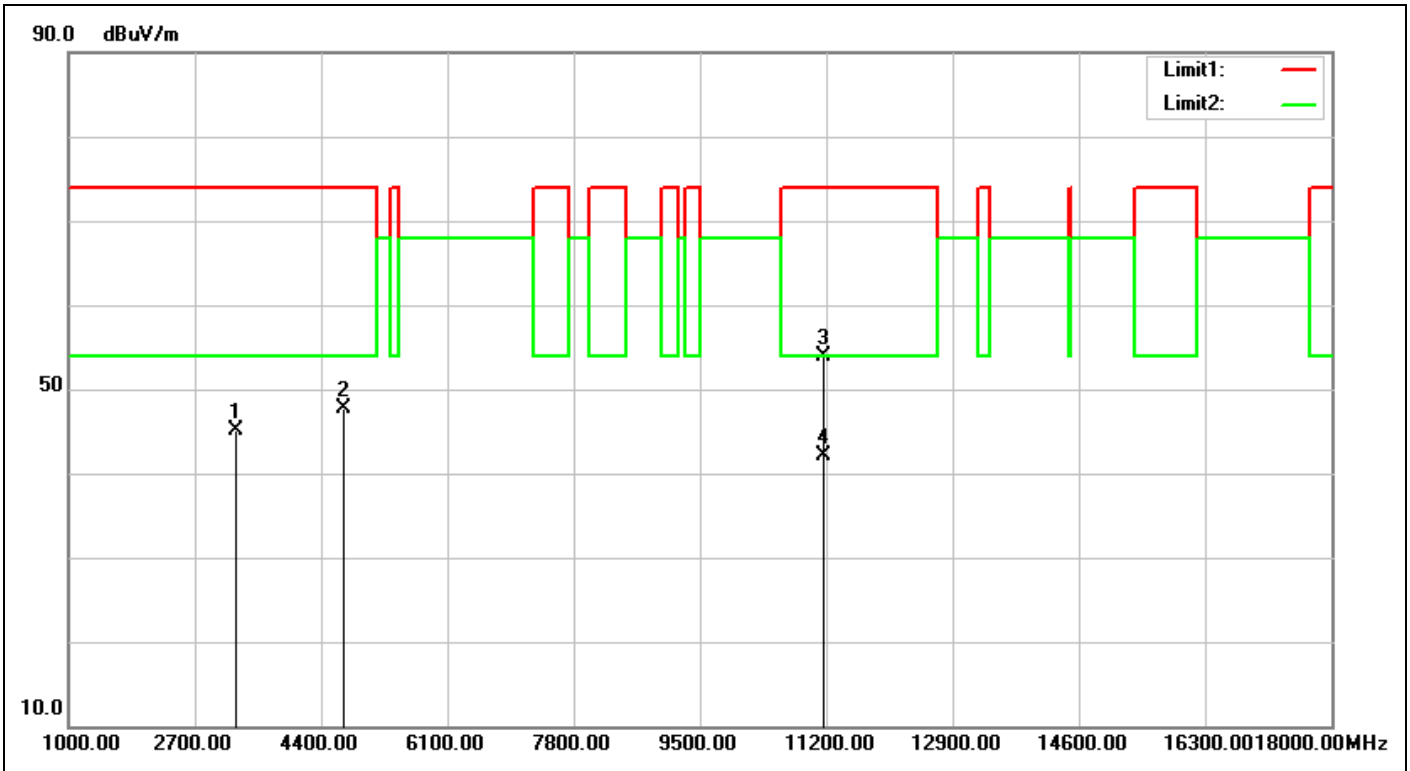


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:08:25
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3261.000	-5.25	50.38	45.13	74.00	-28.87	peak	125	30	
2	4706.000	-1.79	49.51	47.72	74.00	-26.28	peak	100	345	
3	11160.000	5.01	48.95	53.96	74.00	-20.04	peak	100	92	
4	11160.000	5.01	37.17	42.18	54.00	-11.82	AVG	100	92	

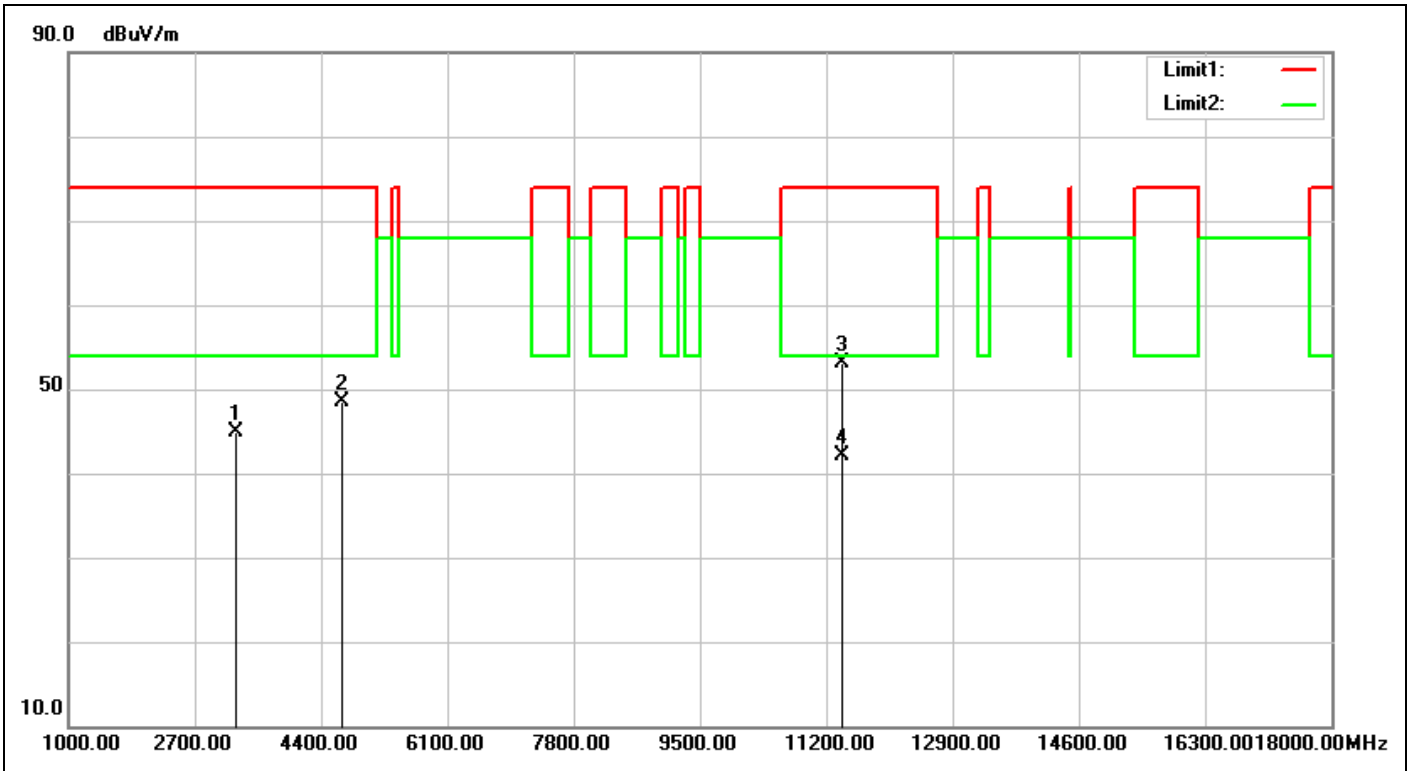


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:14:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3261.000	-5.25	50.20	44.95	74.00	-29.05	peak	100	73	
2	4689.000	-1.81	50.28	48.47	74.00	-25.53	peak	200	15	
3	11400.000	5.23	47.82	53.05	74.00	-20.95	peak	100	168	
4	11400.000	5.23	36.86	42.09	54.00	-11.91	AVG	100	168	

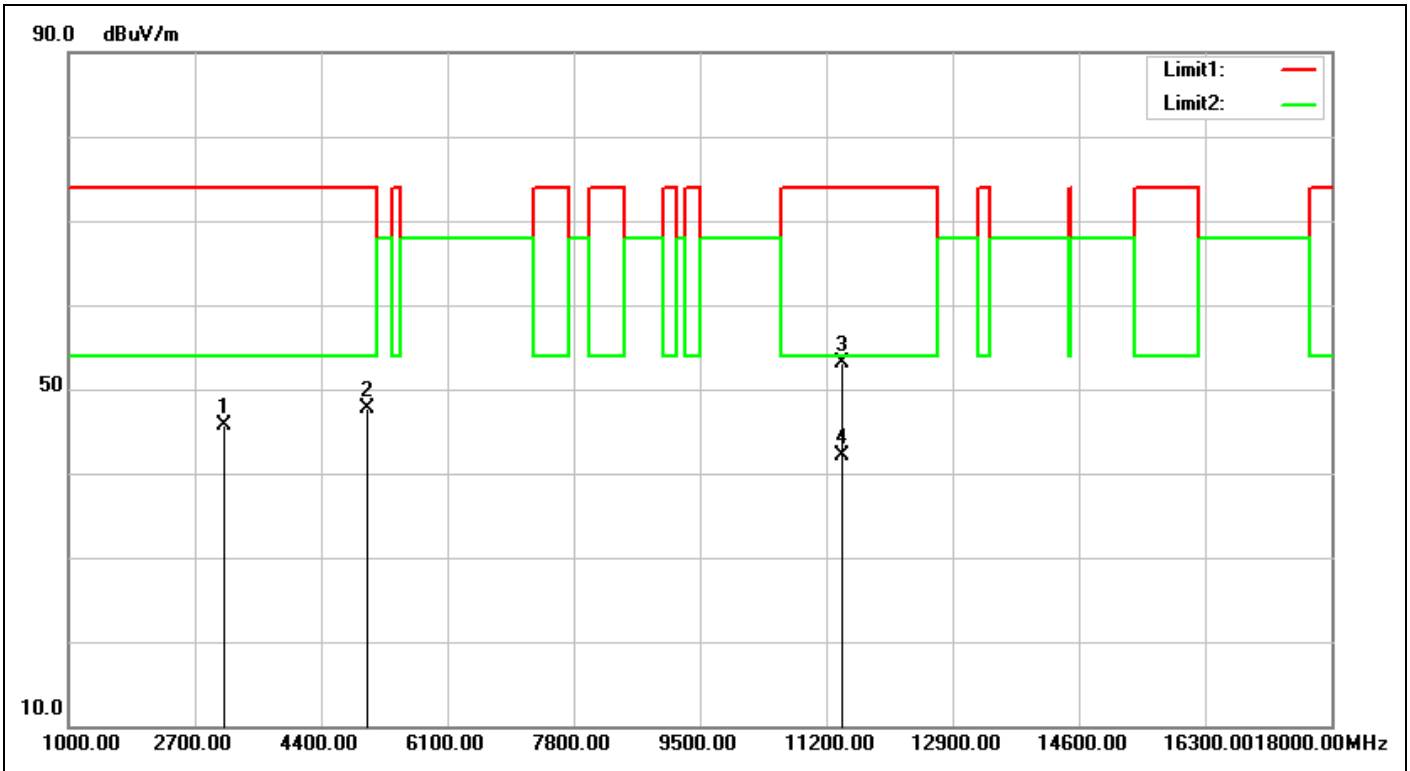


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:15:07
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3091.000	-5.39	51.11	45.72	74.00	-28.28	peak	108	55	
2	5029.000	-1.25	48.97	47.72	74.00	-26.28	peak	100	225	
3	11400.000	5.23	47.92	53.15	74.00	-20.85	peak	100	126	
4	11400.000	5.23	36.97	42.20	54.00	-11.80	AVG	100	126	

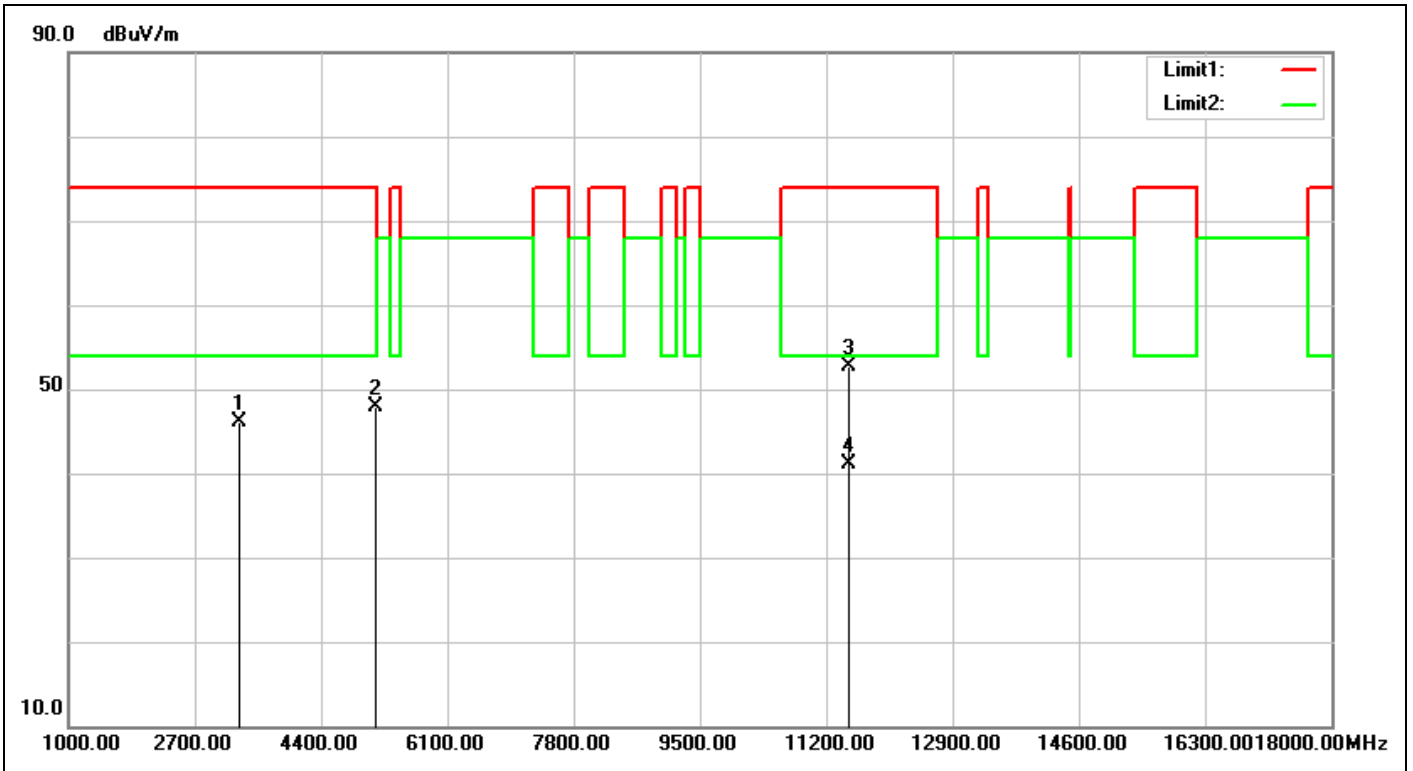


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:17:59
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3295.000	-5.23	51.29	46.06	74.00	-27.94	peak	190	4	
2	5131.000	-0.79	48.72	47.93	74.00	-26.07	peak	108	45	
3	11490.000	5.33	47.32	52.65	74.00	-21.35	peak	100	229	
4	11490.000	5.33	35.68	41.01	54.00	-12.99	AVG	100	229	

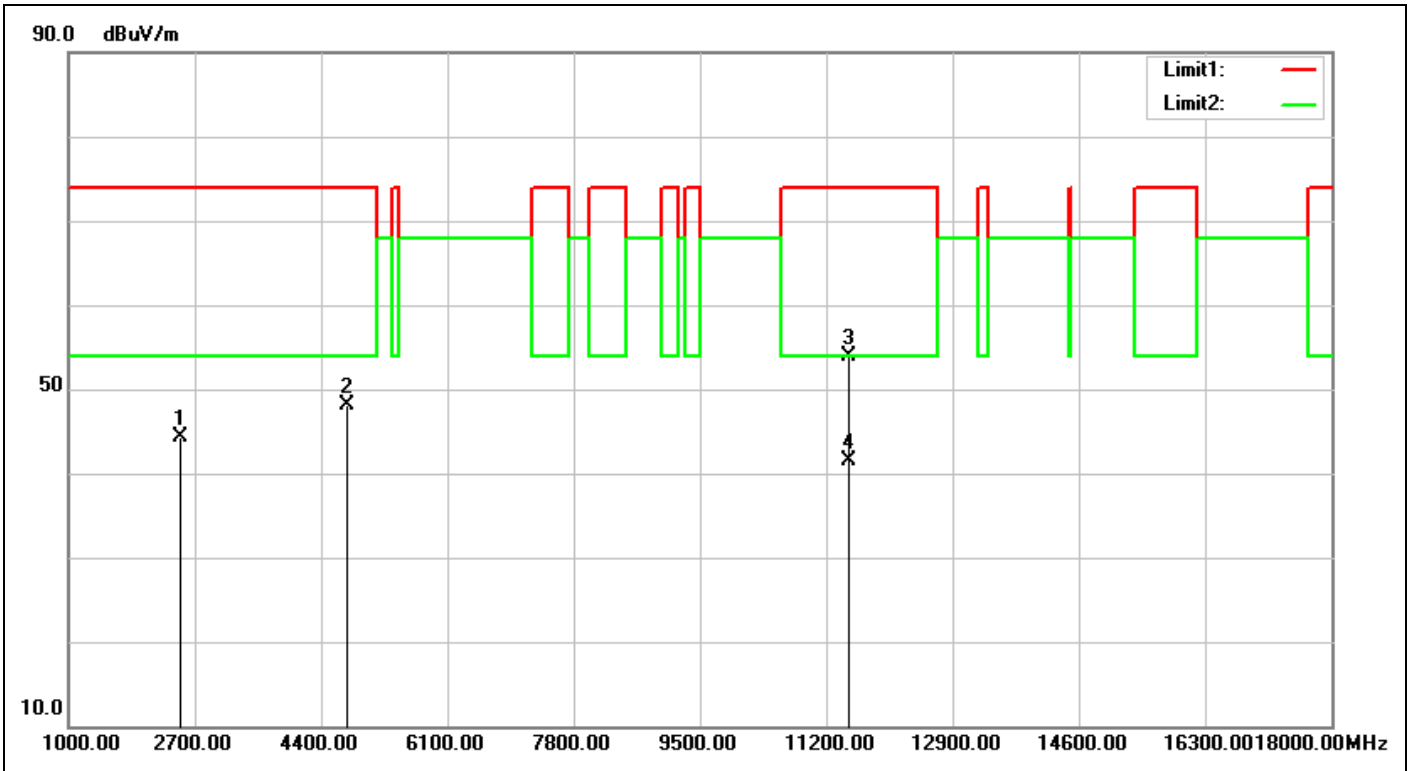


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:18:51
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2513.000	-6.27	50.59	44.32	74.00	-29.68	peak	100	268	
2	4757.000	-1.72	49.79	48.07	74.00	-25.93	peak	100	148	
3	11490.000	5.33	48.48	53.81	74.00	-20.19	peak	102	309	
4	11490.000	5.33	36.17	41.50	54.00	-12.50	AVG	102	309	

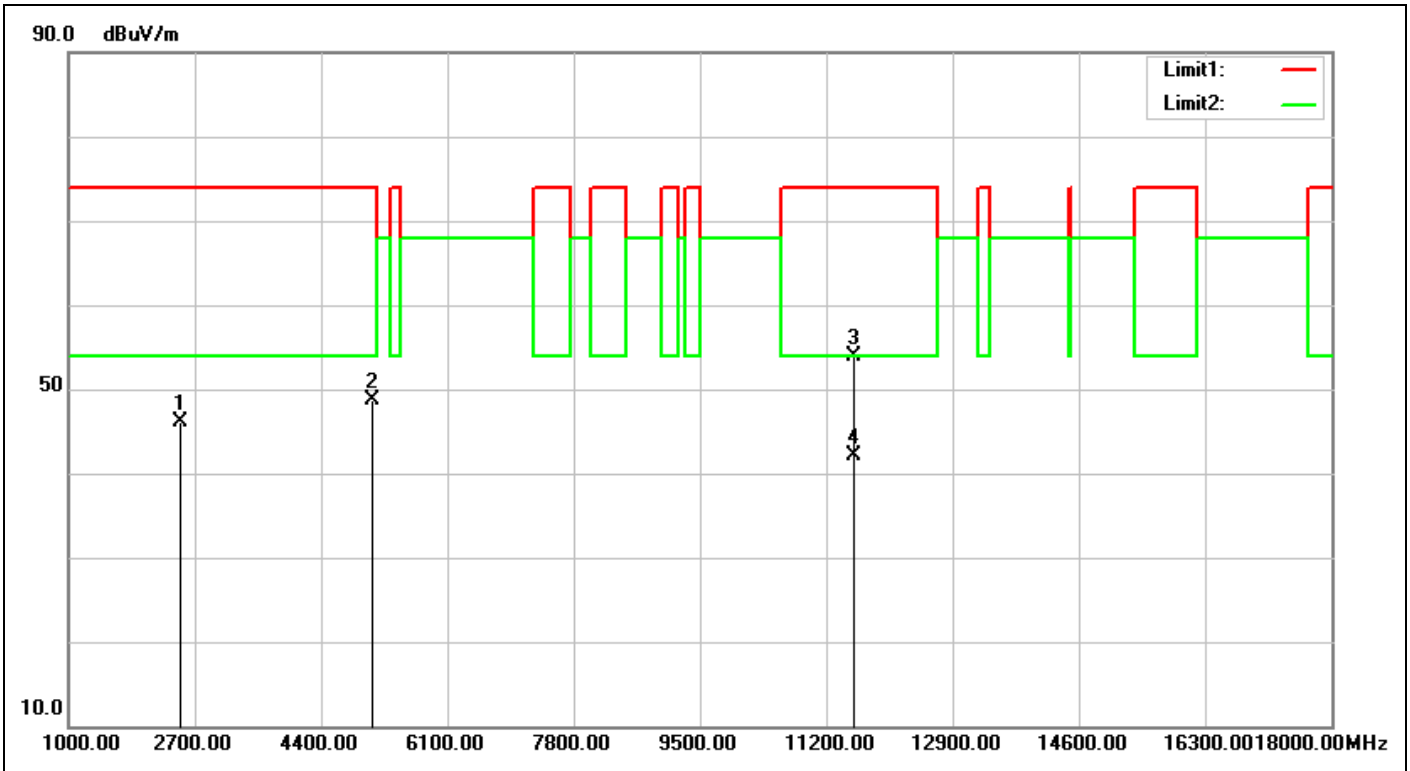


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:25:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	52.39	46.10	74.00	-27.90	peak	100	207	
2	5080.000	-1.02	49.67	48.65	74.00	-25.35	peak	200	139	
3	11570.000	5.59	48.25	53.84	74.00	-20.16	peak	100	39	
4	11570.000	5.59	36.50	42.09	54.00	-11.91	AVG	100	39	

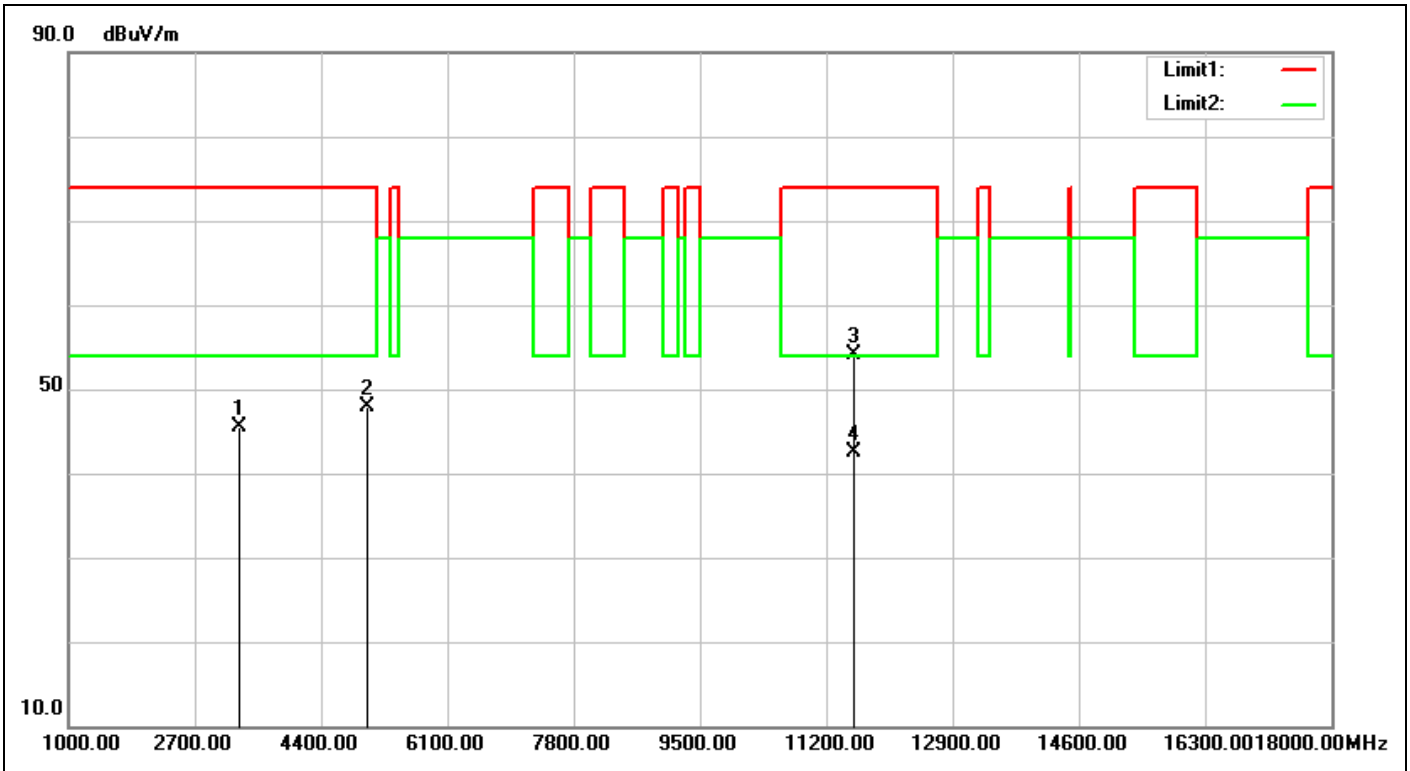


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:25:55
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3295.000	-5.23	50.66	45.43	74.00	-28.57	peak	100	143	
2	5012.000	-1.33	49.20	47.87	74.00	-26.13	peak	100	222	
3	11570.000	5.59	48.44	54.03	74.00	-19.97	peak	100	178	
4	11570.000	5.59	36.92	42.51	54.00	-11.49	AVG	100	178	

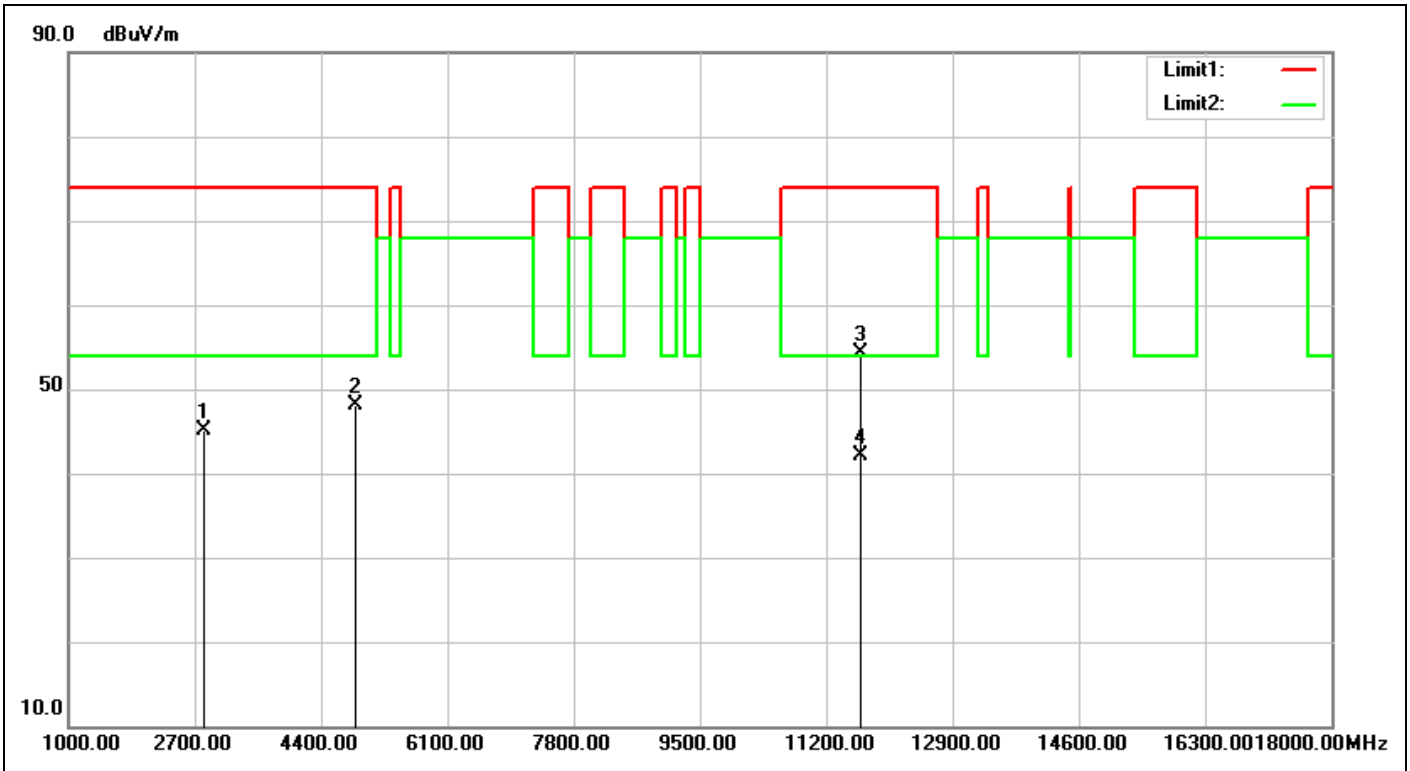


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:33:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2819.000	-5.77	50.97	45.20	74.00	-28.80	peak	120	287	
2	4859.000	-1.58	49.59	48.01	74.00	-25.99	peak	141	45	
3	11650.000	5.90	48.39	54.29	74.00	-19.71	peak	100	99	
4	11650.000	5.90	36.21	42.11	54.00	-11.89	AVG	100	99	

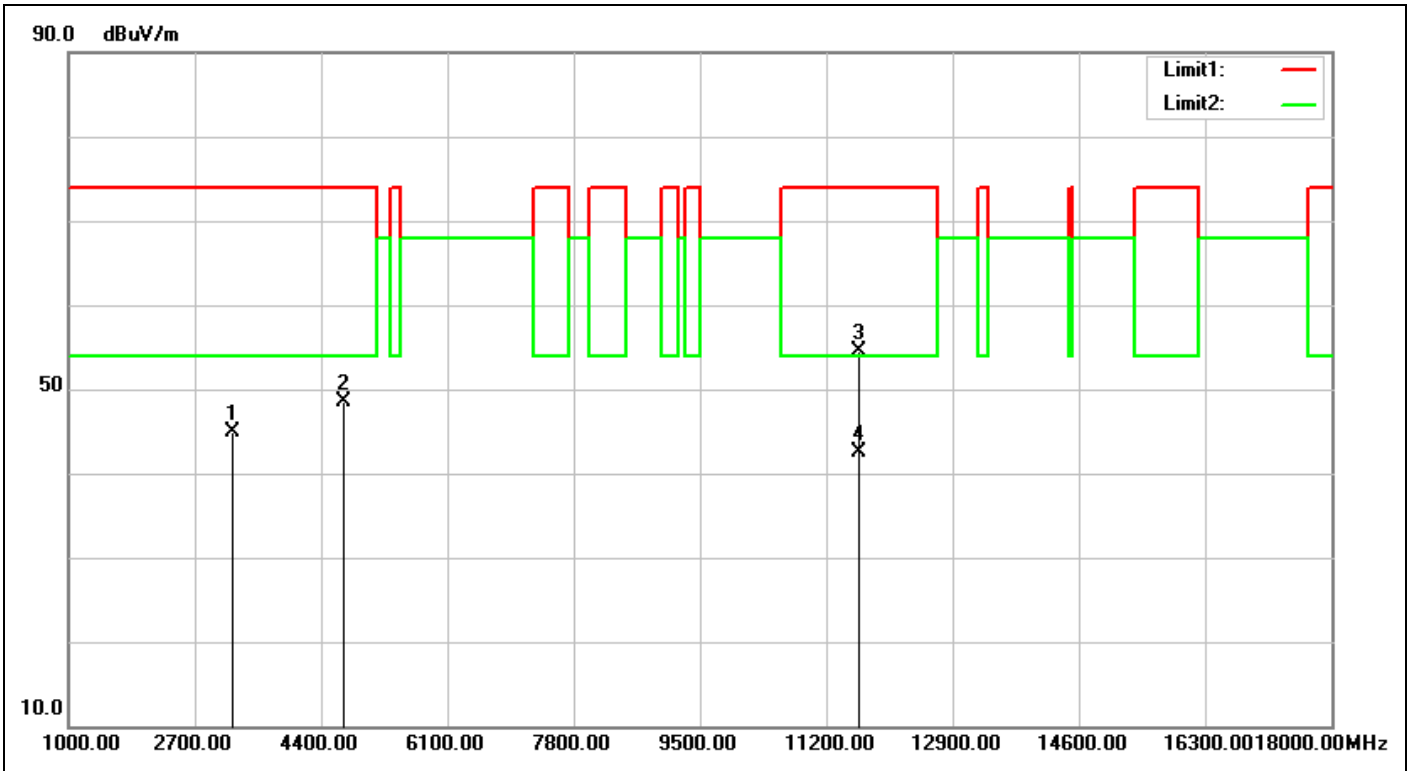


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:34:56
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3210.000	-5.29	50.27	44.98	74.00	-29.02	peak	100	49	
2	4706.000	-1.79	50.37	48.58	74.00	-25.42	peak	100	360	
3	11650.000	5.90	48.68	54.58	74.00	-19.42	peak	105	70	
4	11650.000	5.90	36.55	42.45	54.00	-11.55	AVG	105	70	

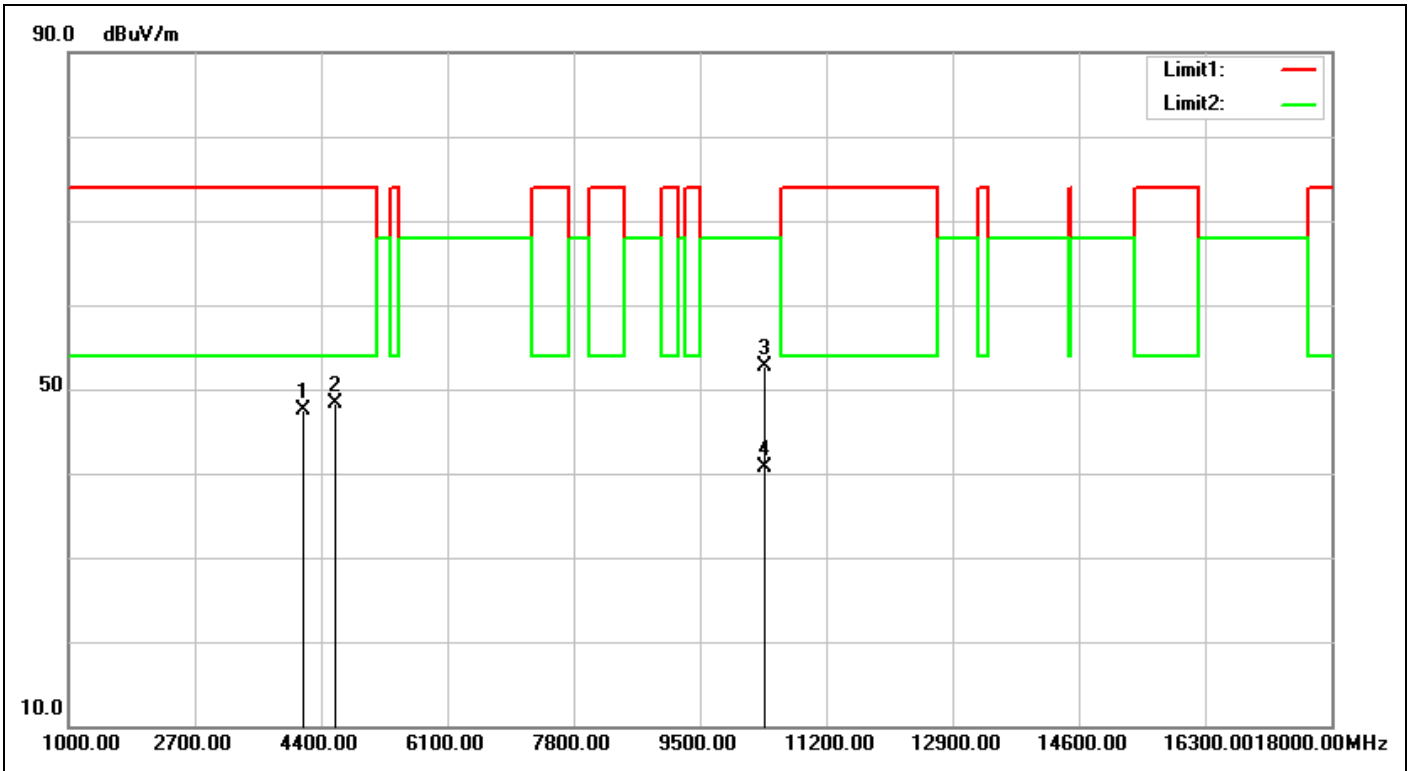


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:51:10
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4162.000	-3.33	50.82	47.49	74.00	-26.51	peak	100	87	
2	4587.000	-1.96	50.23	48.27	74.00	-25.73	peak	100	320	
3	10360.000	5.69	47.09	52.78	68.00	-15.22	peak	100	12	
4	10360.000	5.69	35.03	40.72	68.00	-27.28	AVG	100	12	

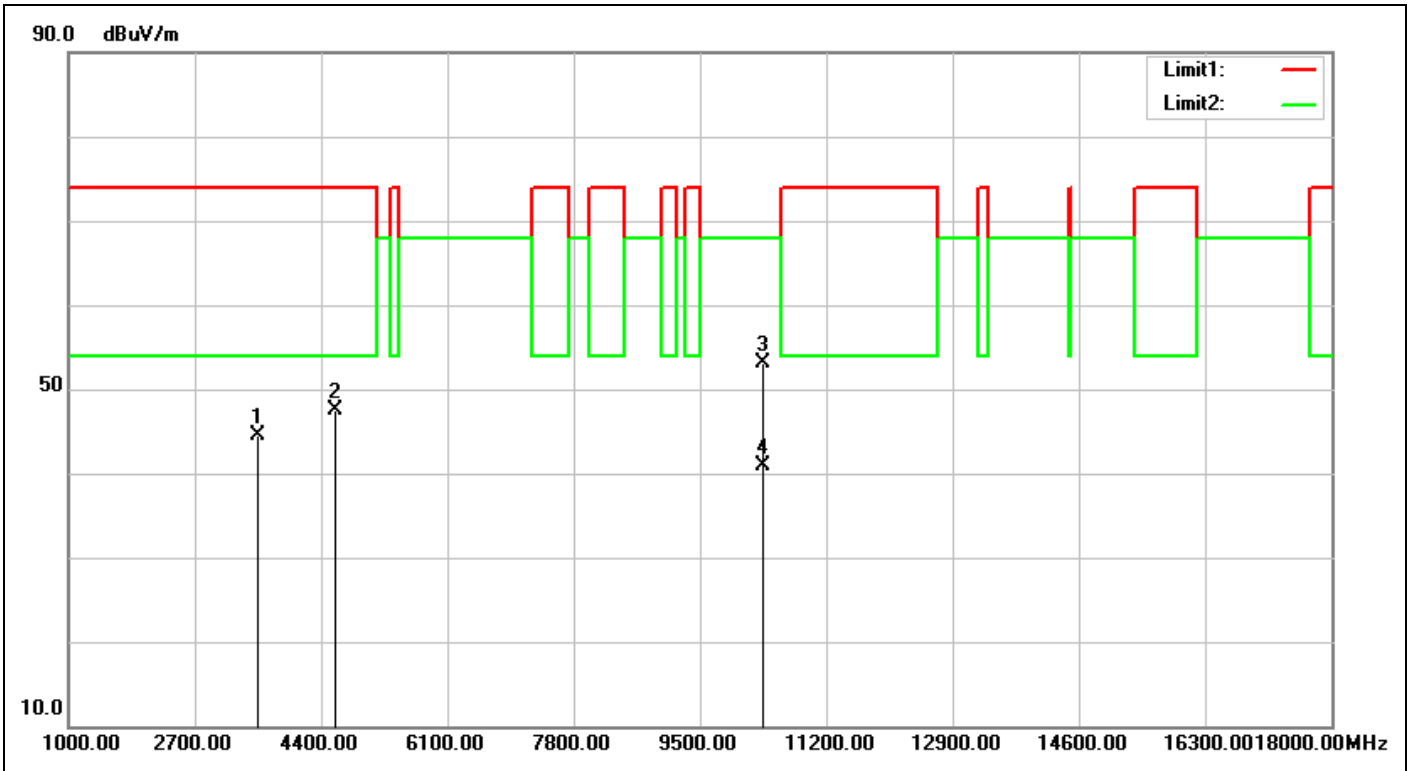


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:52:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3550.000	-4.96	49.42	44.46	74.00	-29.54	peak	100	304	
2	4587.000	-1.96	49.39	47.43	74.00	-26.57	peak	100	311	
3	10360.000	5.69	47.49	53.18	68.00	-14.82	peak	100	171	
4	10360.000	5.69	35.19	40.88	68.00	-27.12	AVG	100	171	

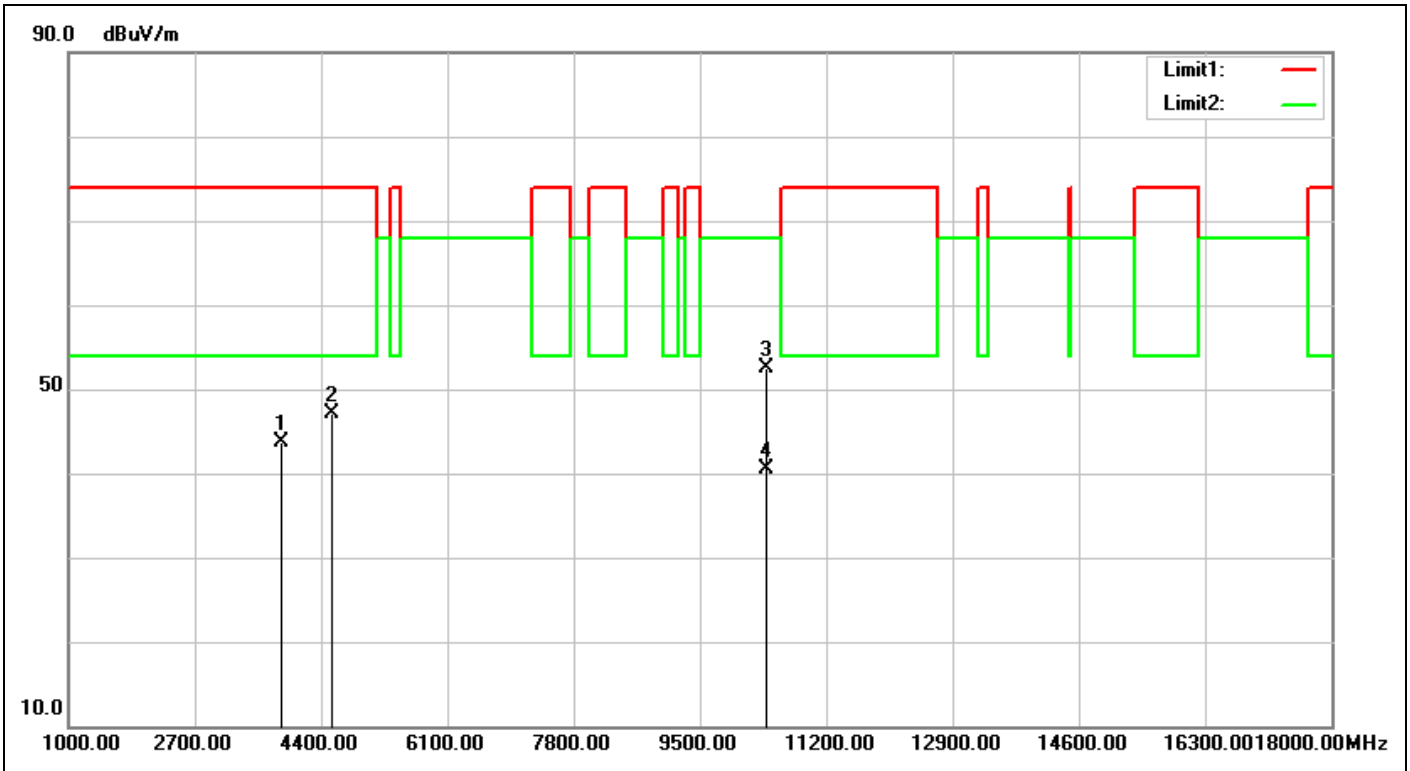


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:55:58
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3873.000	-4.22	47.86	43.64	74.00	-30.36	peak	100	1	
2	4553.000	-2.01	49.17	47.16	74.00	-26.84	peak	100	90	
3	10400.000	5.60	46.85	52.45	68.00	-15.55	peak	100	359	
4	10400.000	5.60	34.98	40.58	68.00	-27.42	AVG	100	359	

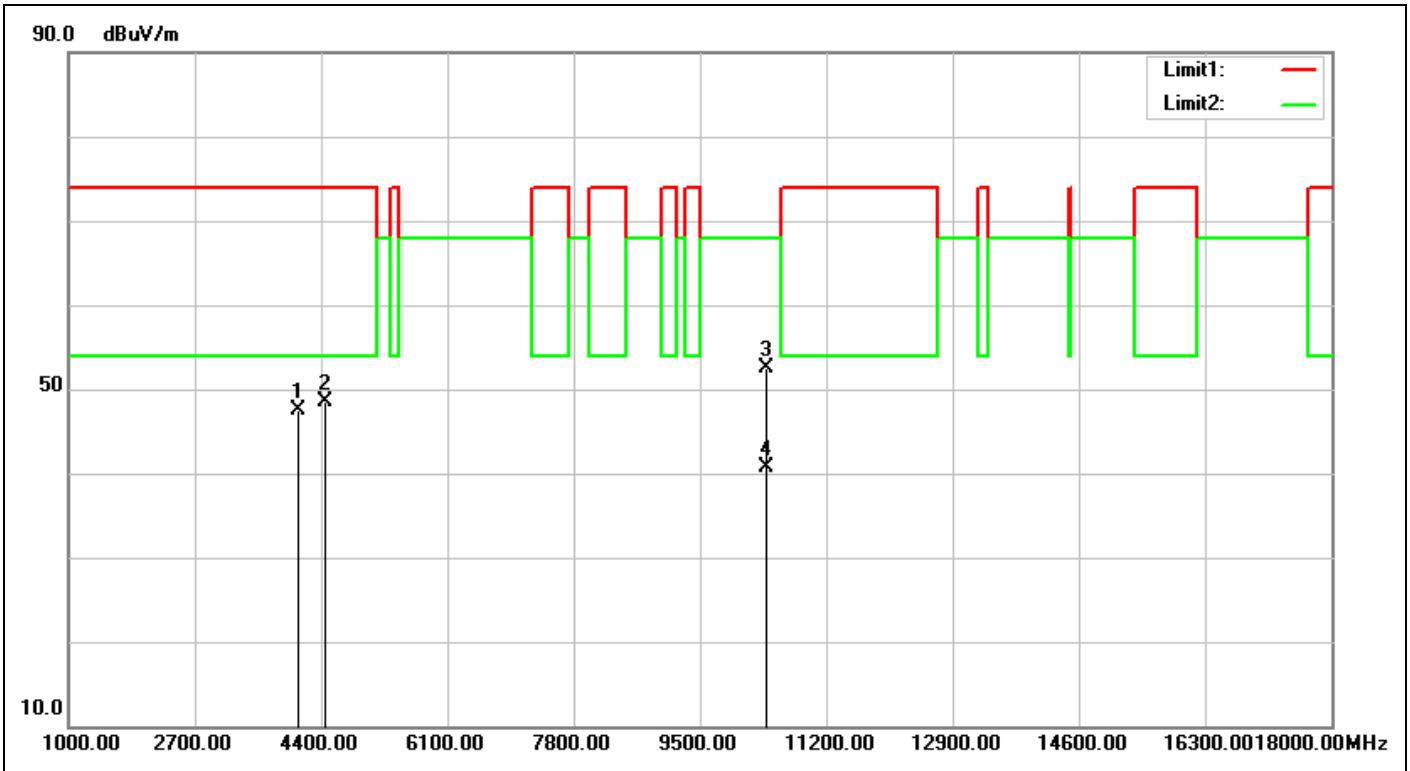


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:56:50
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4094.000	-3.59	51.16	47.57	74.00	-26.43	peak	100	311	
2	4451.000	-2.26	50.75	48.49	74.00	-25.51	peak	100	109	
3	10400.000	5.60	46.97	52.57	68.00	-15.43	peak	100	75	
4	10400.000	5.60	35.03	40.63	68.00	-27.37	AVG	100	75	

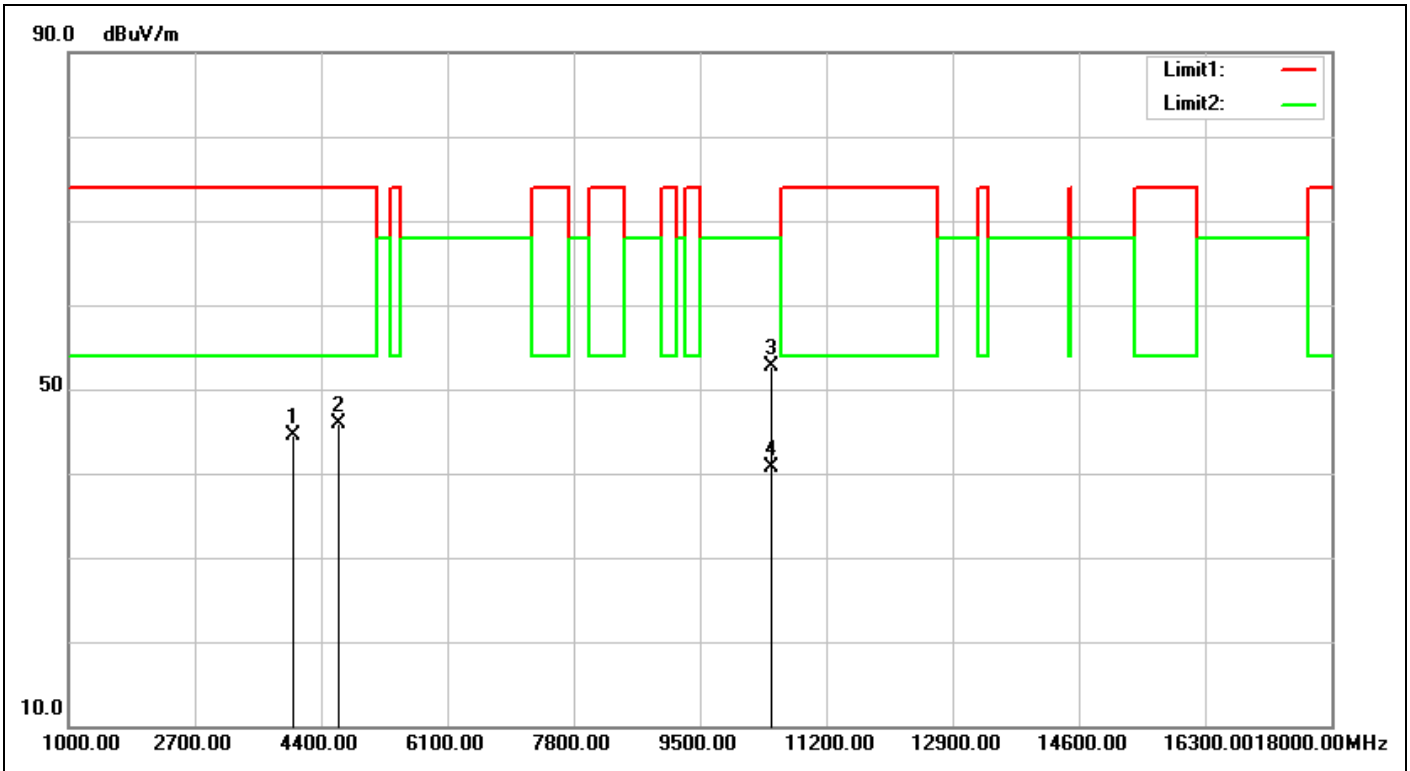


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:01:27
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4026.000	-3.83	48.35	44.52	74.00	-29.48	peak	100	340	
2	4638.000	-1.88	47.78	45.90	74.00	-28.10	peak	100	360	
3	10480.000	5.42	47.36	52.78	68.00	-15.22	peak	100	29	
4	10480.000	5.42	35.23	40.65	68.00	-27.35	AVG	100	29	

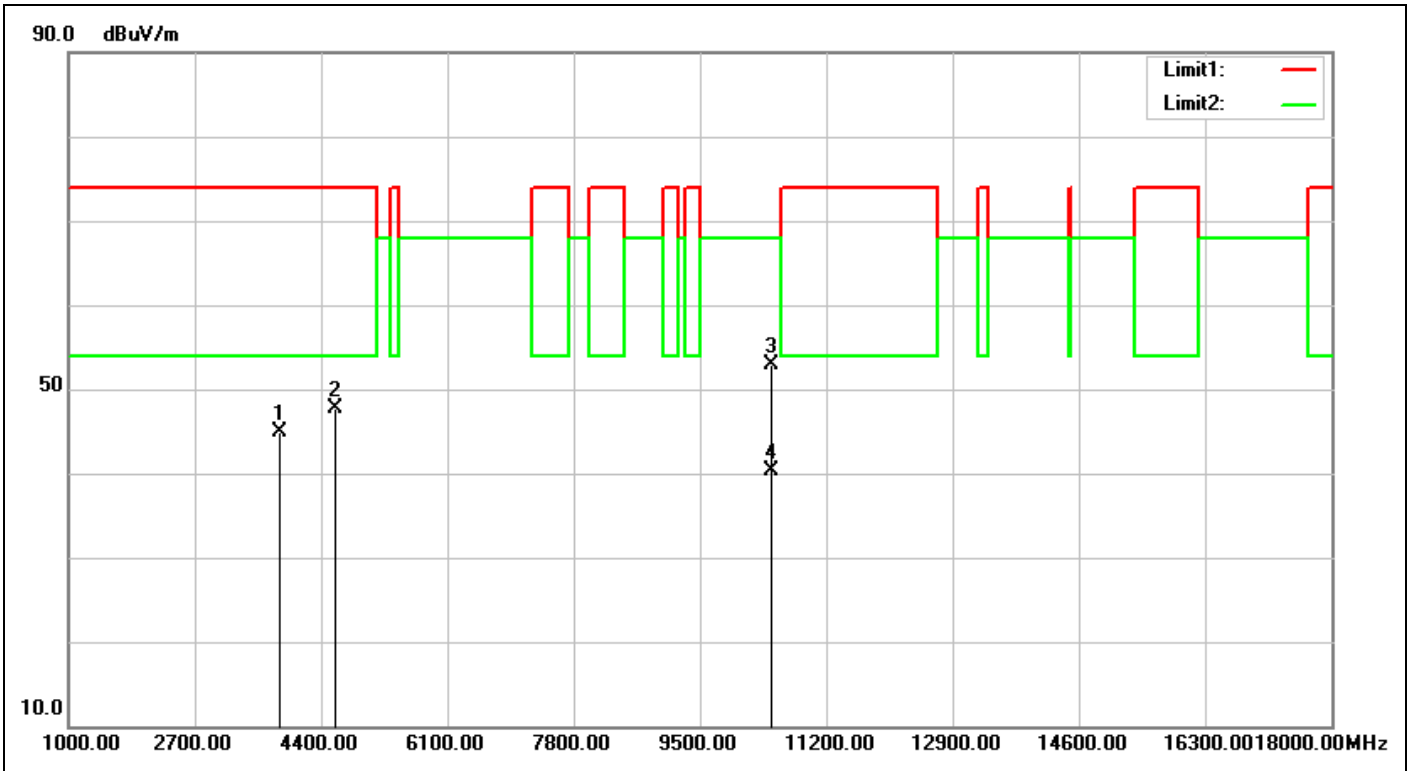


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:02:19
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	49.26	44.95	74.00	-29.05	peak	100	243	
2	4587.000	-1.96	49.58	47.62	74.00	-26.38	peak	100	294	
3	10480.000	5.42	47.47	52.89	68.00	-15.11	peak	100	349	
4	10480.000	5.42	34.93	40.35	68.00	-27.65	AVG	100	349	

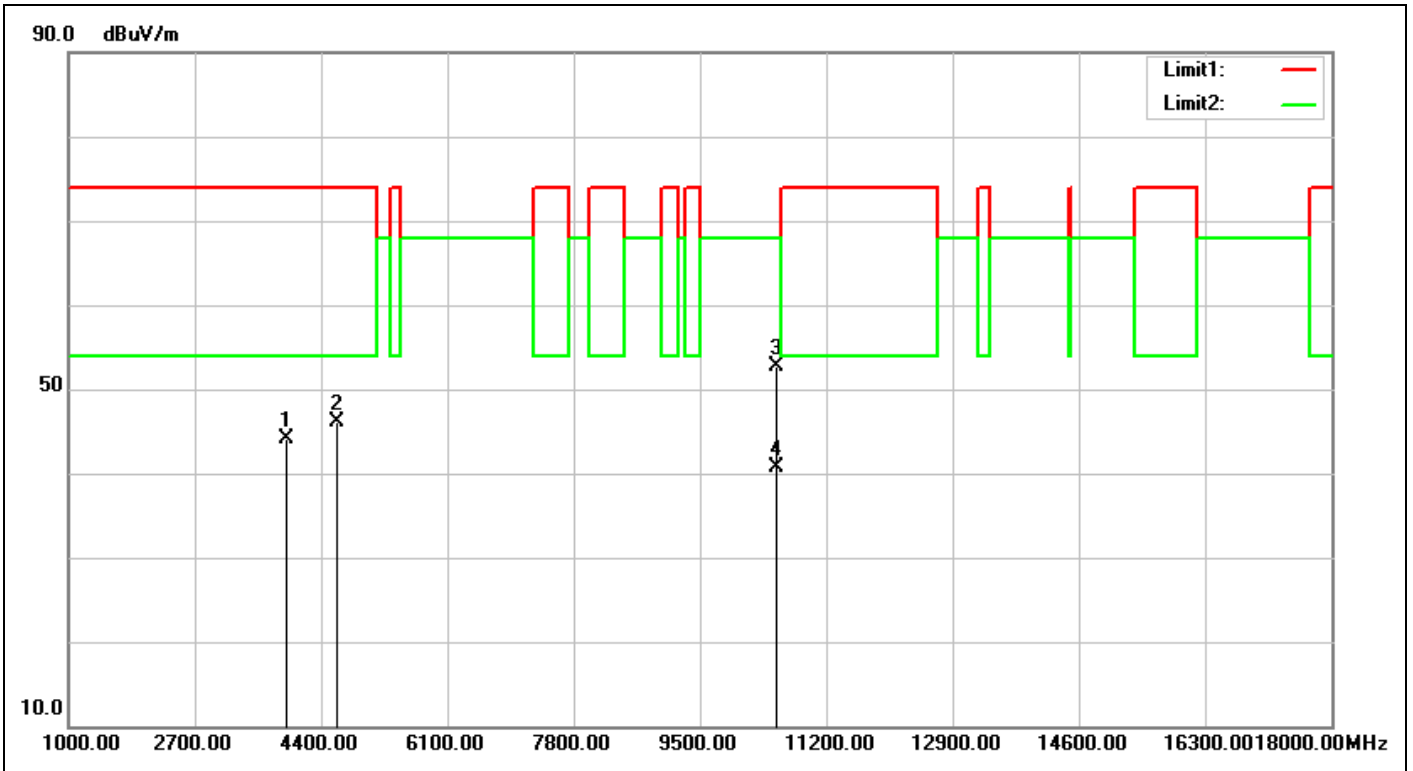


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:08:49
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3941.000	-4.06	48.16	44.10	74.00	-29.90	peak	100	173	
2	4621.000	-1.91	48.03	46.12	74.00	-27.88	peak	100	320	
3	10520.000	5.37	47.26	52.63	68.00	-15.37	peak	100	359	
4	10520.000	5.37	35.39	40.76	68.00	-27.24	AVG	100	359	

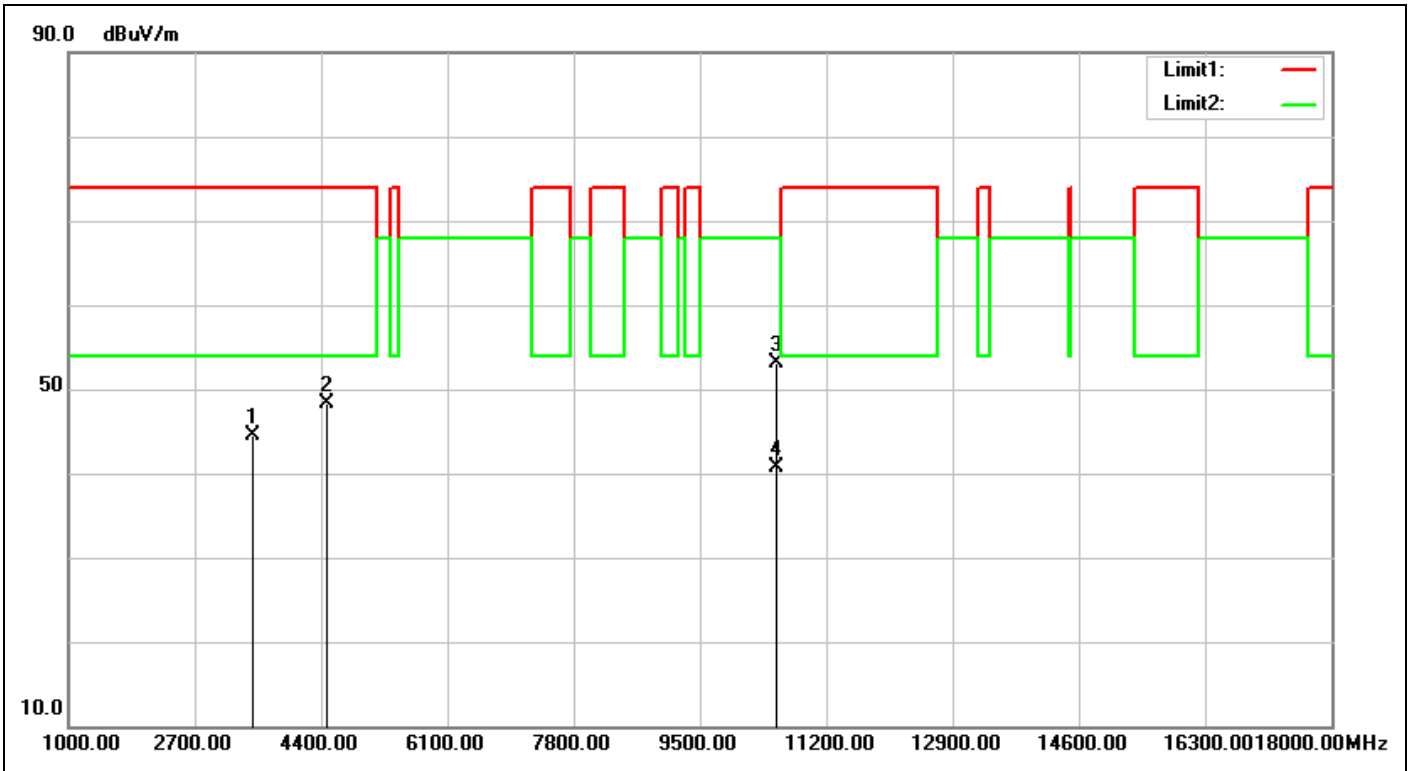


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:09:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3482.000	-5.08	49.49	44.41	74.00	-29.59	peak	100	55	
2	4485.000	-2.13	50.46	48.33	74.00	-25.67	peak	100	95	
3	10520.000	5.37	47.71	53.08	68.00	-14.92	peak	100	358	
4	10520.000	5.37	35.40	40.77	68.00	-27.23	AVG	100	358	

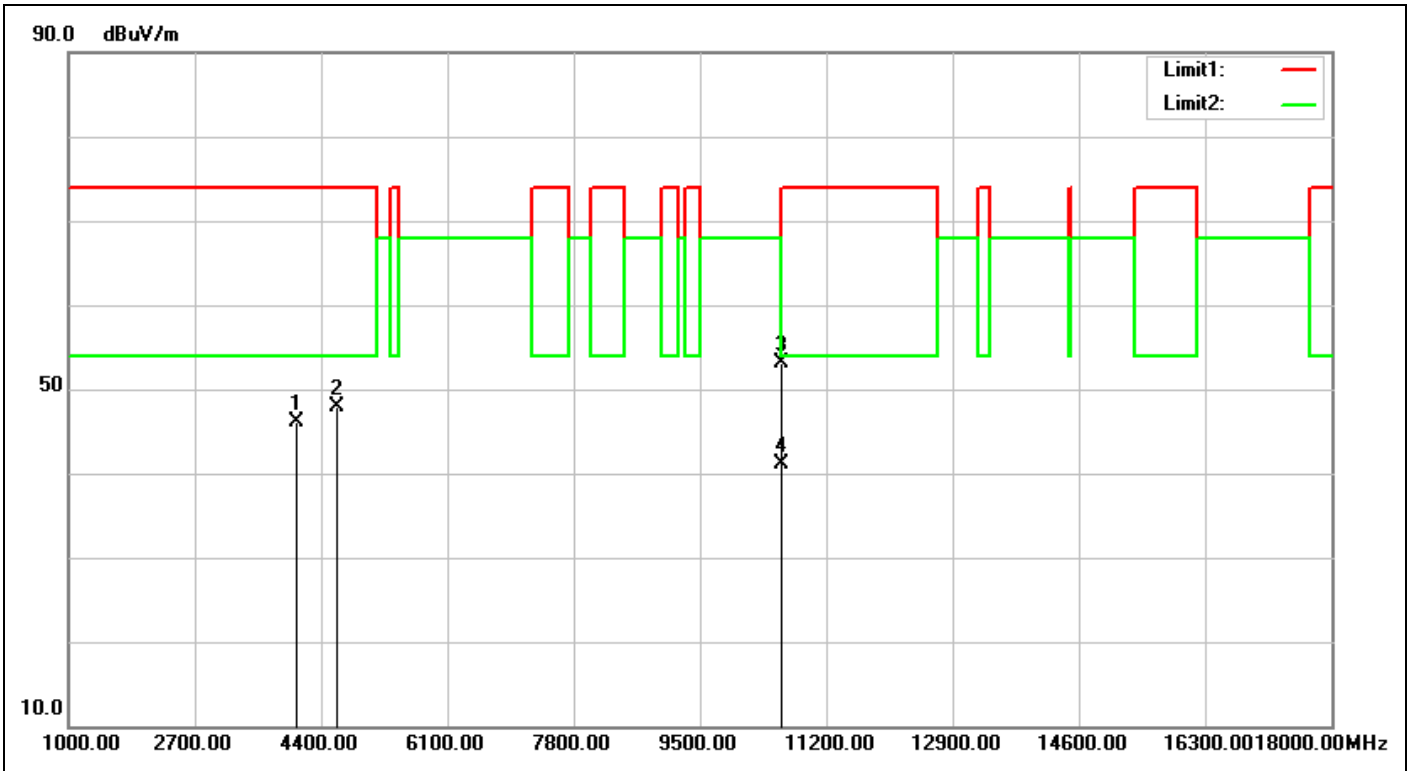


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:12:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4060.000	-3.70	49.87	46.17	74.00	-27.83	peak	100	66	
2	4604.000	-1.94	49.92	47.98	74.00	-26.02	peak	100	110	
3	10600.000	5.28	47.78	53.06	68.00	-14.94	peak	100	360	
4	10600.000	5.28	35.80	41.08	54.00	-12.92	AVG	100	360	

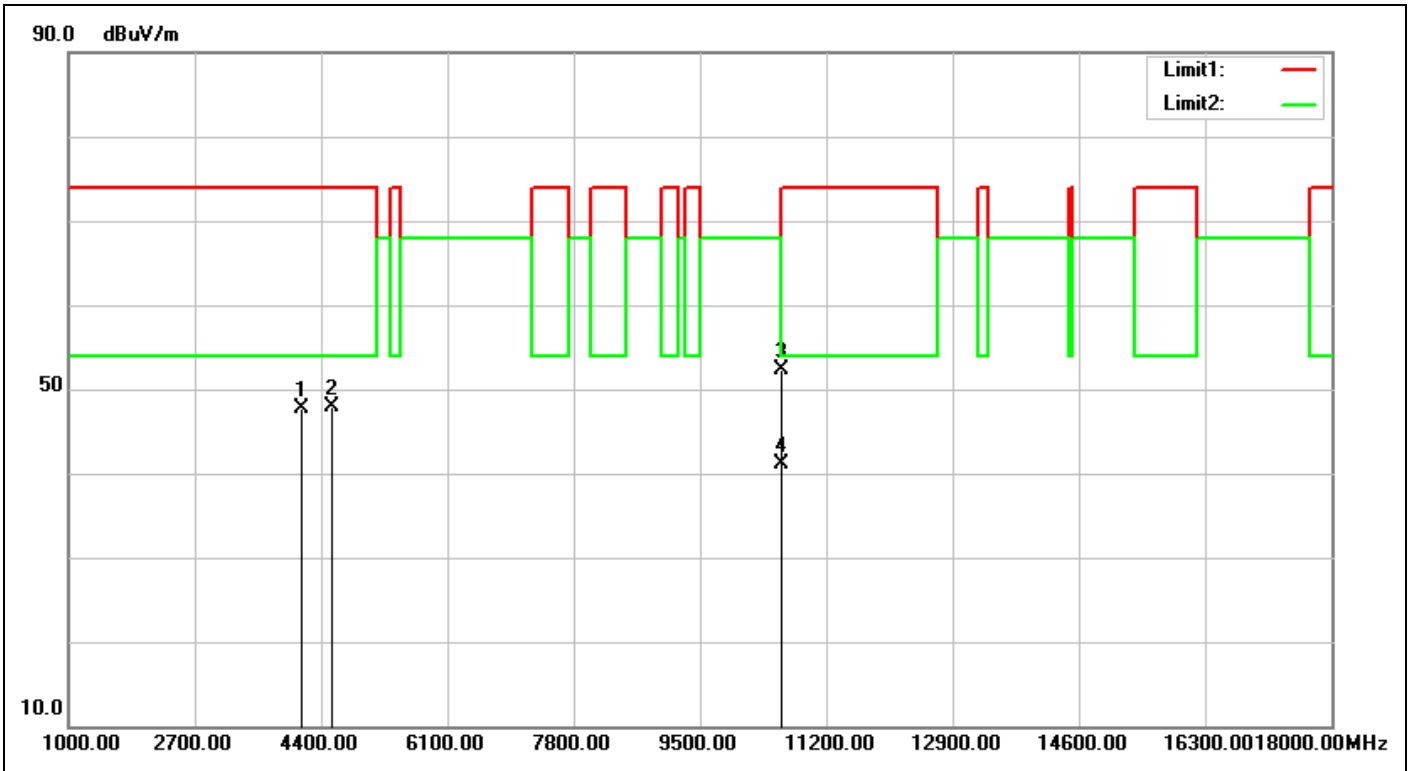


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:13:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4145.000	-3.39	51.08	47.69	74.00	-26.31	peak	100	78	
2	4553.000	-2.01	49.88	47.87	74.00	-26.13	peak	100	0	
3	10600.000	5.28	46.93	52.21	68.00	-15.79	peak	100	188	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	188	

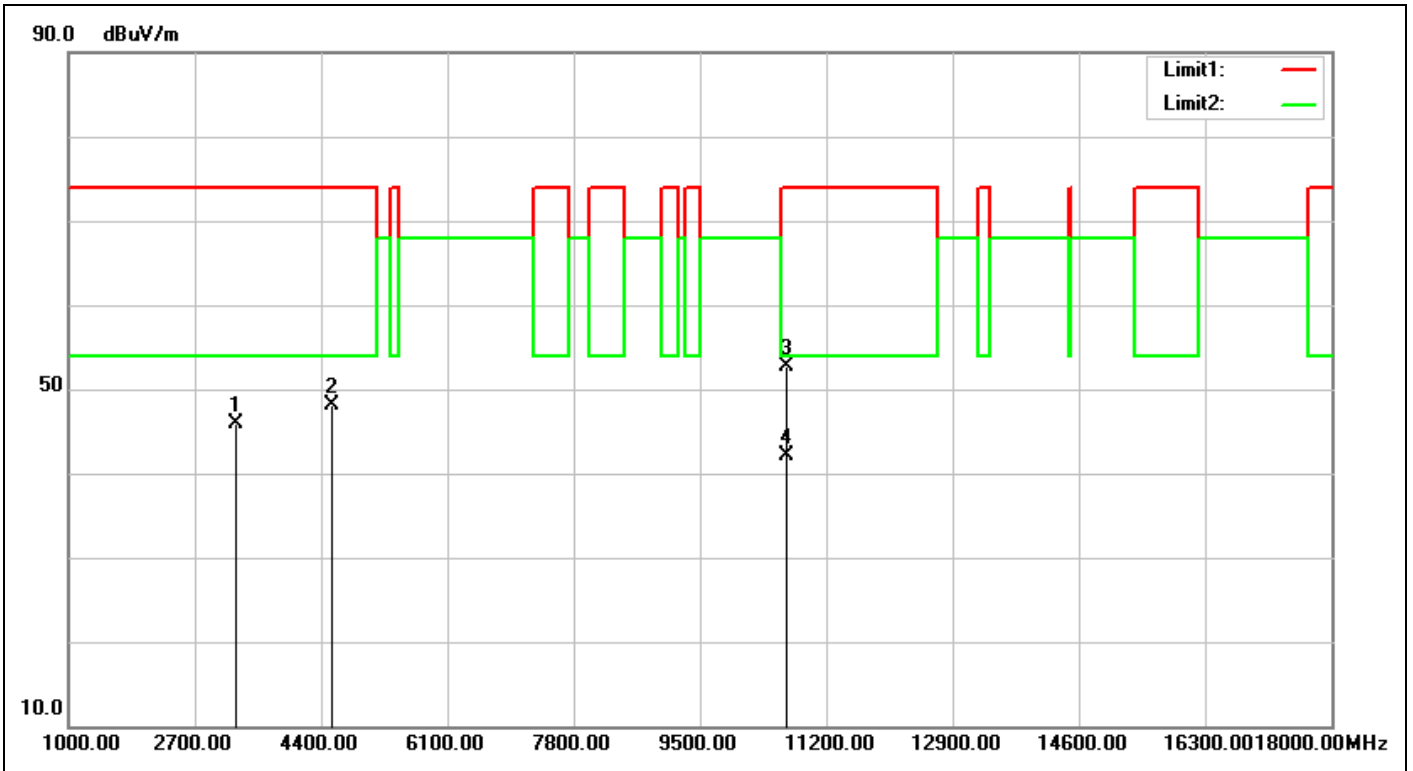


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:33:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3244.000	-5.27	51.13	45.86	74.00	-28.14	peak	105	49	
2	4553.000	-2.01	50.05	48.04	74.00	-25.96	peak	100	7	
3	10640.000	5.24	47.56	52.80	74.00	-21.20	peak	100	336	
4	10640.000	5.24	36.84	42.08	54.00	-11.92	AVG	100	336	

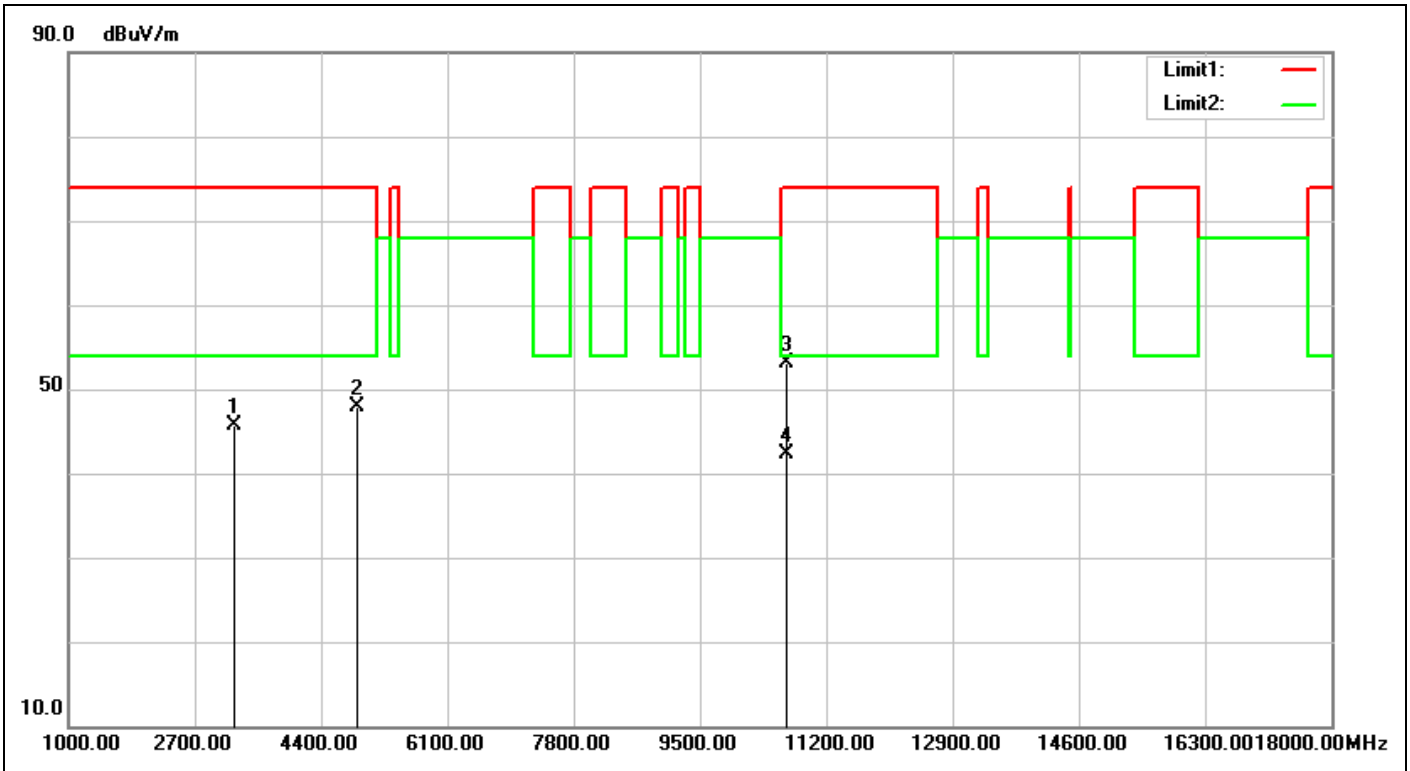


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:34:40
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3227.000	-5.29	51.01	45.72	74.00	-28.28	peak	195	167	
2	4893.000	-1.52	49.36	47.84	74.00	-26.16	peak	100	99	
3	10640.000	5.24	47.82	53.06	74.00	-20.94	peak	100	113	
4	10640.000	5.24	37.11	42.35	54.00	-11.65	AVG	100	113	

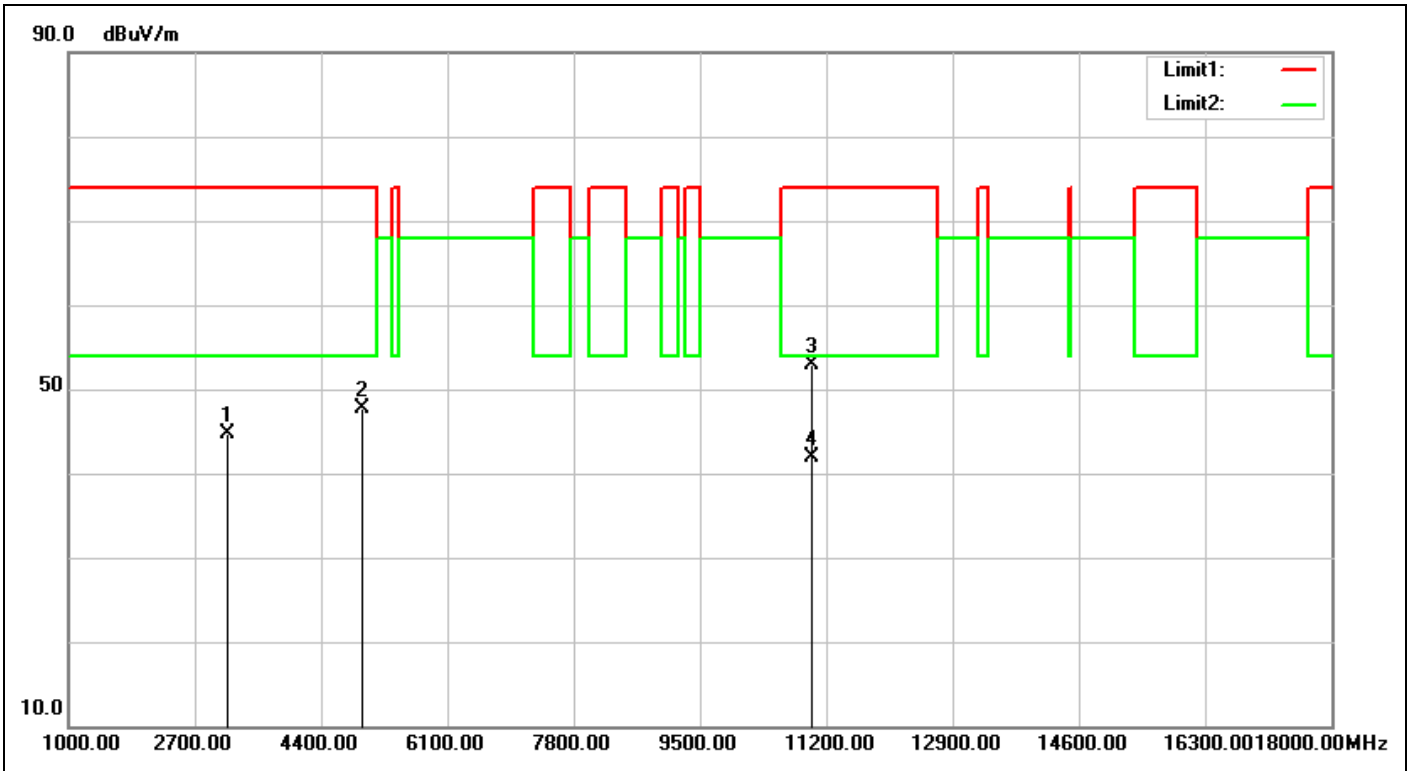


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:22:17
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3142.000	-5.35	49.97	44.62	74.00	-29.38	peak	100	189	
2	4961.000	-1.44	49.15	47.71	74.00	-26.29	peak	100	360	
3	11000.000	4.87	48.13	53.00	74.00	-21.00	peak	100	219	
4	11000.000	4.87	36.99	41.86	54.00	-12.14	AVG	100	219	

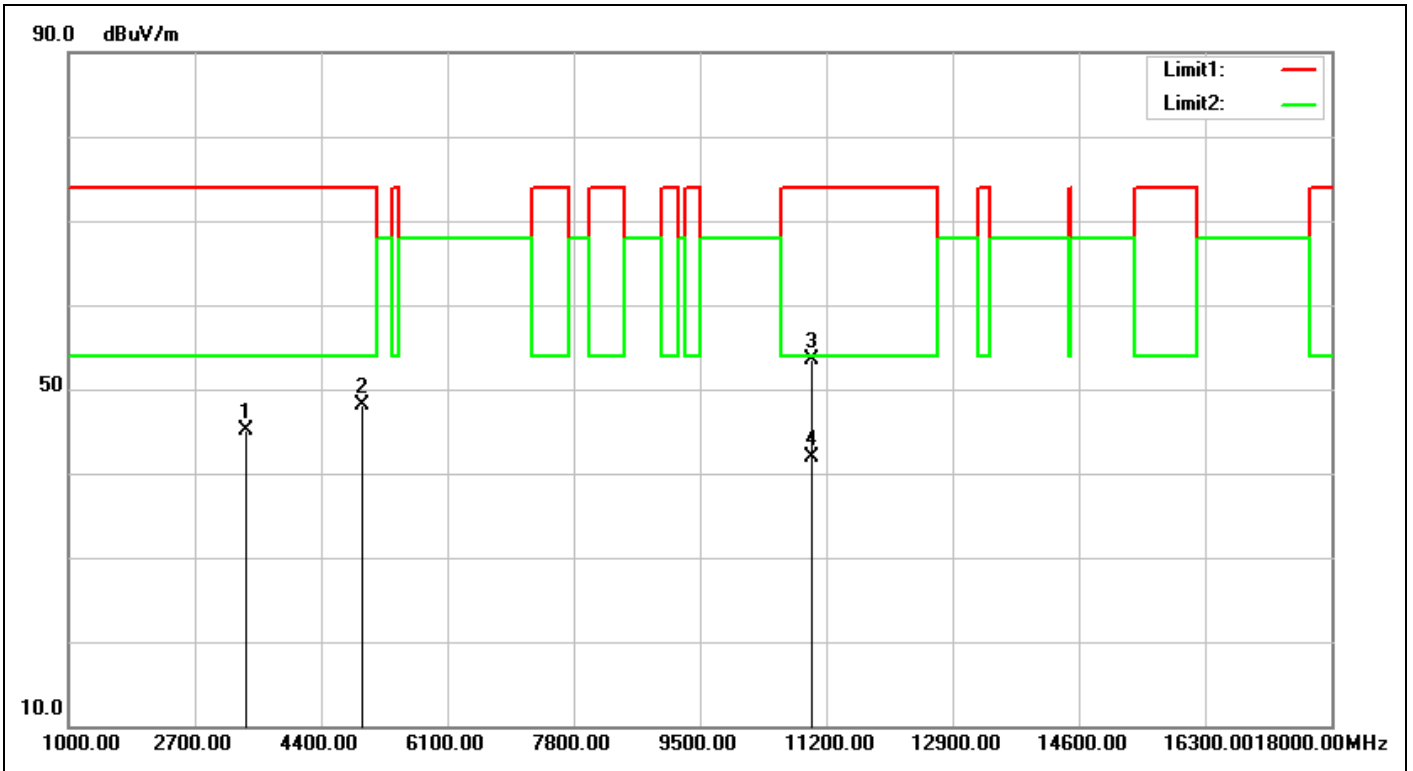


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:23:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	50.24	45.08	74.00	-28.92	peak	145	215	
2	4961.000	-1.44	49.63	48.19	74.00	-25.81	peak	100	287	
3	11000.000	4.87	48.69	53.56	74.00	-20.44	peak	102	254	
4	11000.000	4.87	37.12	41.99	54.00	-12.01	AVG	102	254	

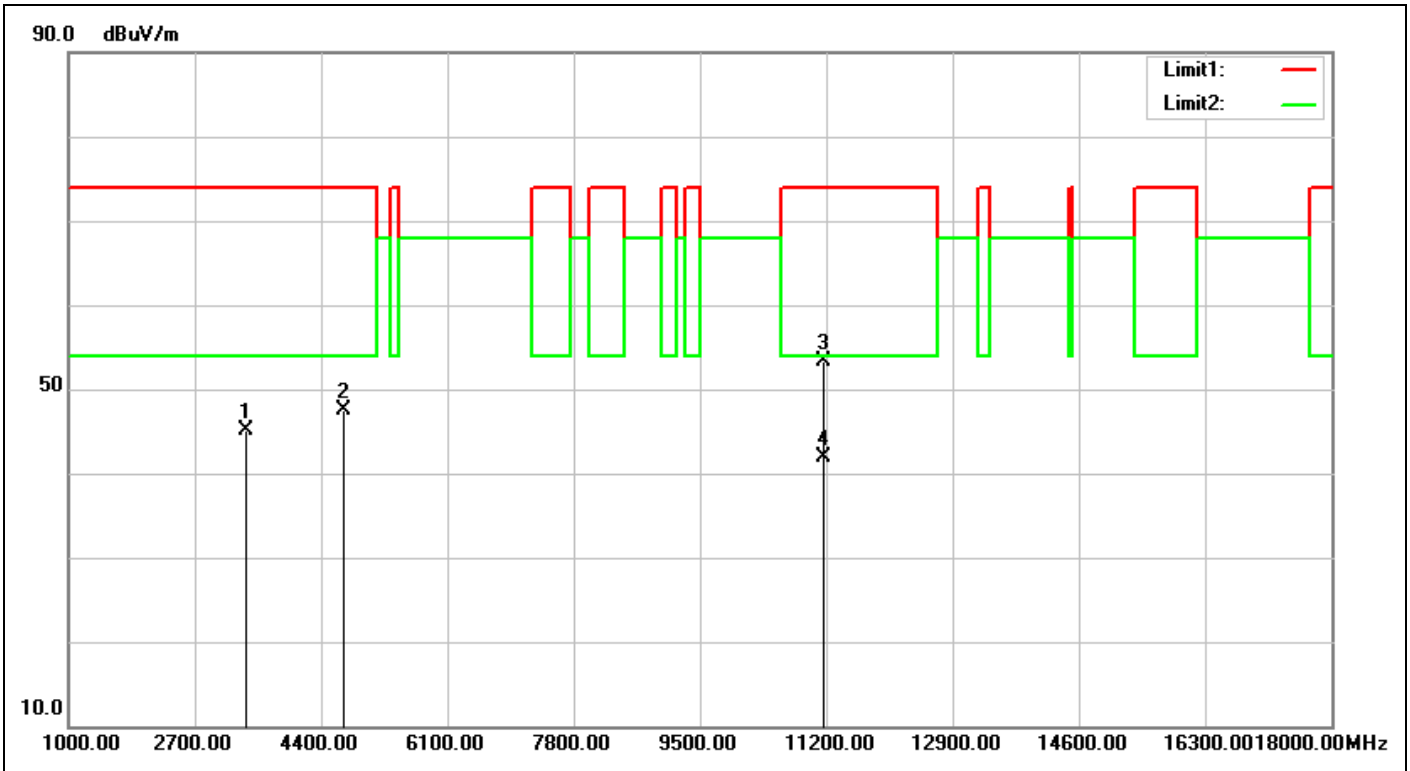


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:30:57
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3397.000	-5.15	50.35	45.20	74.00	-28.80	peak	100	182	
2	4706.000	-1.79	49.27	47.48	74.00	-26.52	peak	158	261	
3	11160.000	5.01	48.25	53.26	74.00	-20.74	peak	100	38	
4	11160.000	5.01	36.90	41.91	54.00	-12.09	AVG	100	38	

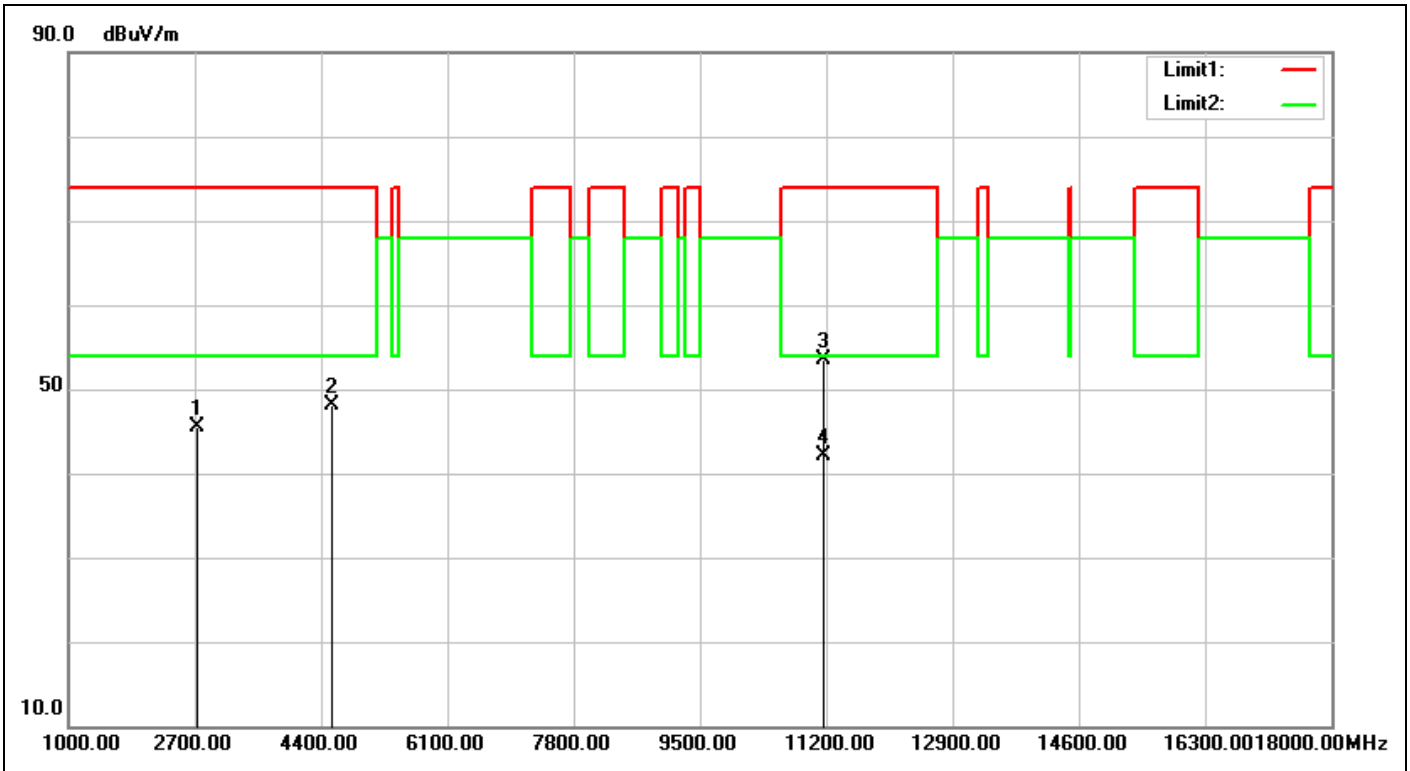


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:31:49
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2734.000	-5.90	51.39	45.49	74.00	-28.51	peak	100	61	
2	4553.000	-2.01	50.21	48.20	74.00	-25.80	peak	112	133	
3	11160.000	5.01	48.49	53.50	74.00	-20.50	peak	100	359	
4	11160.000	5.01	37.10	42.11	54.00	-11.89	AVG	100	359	

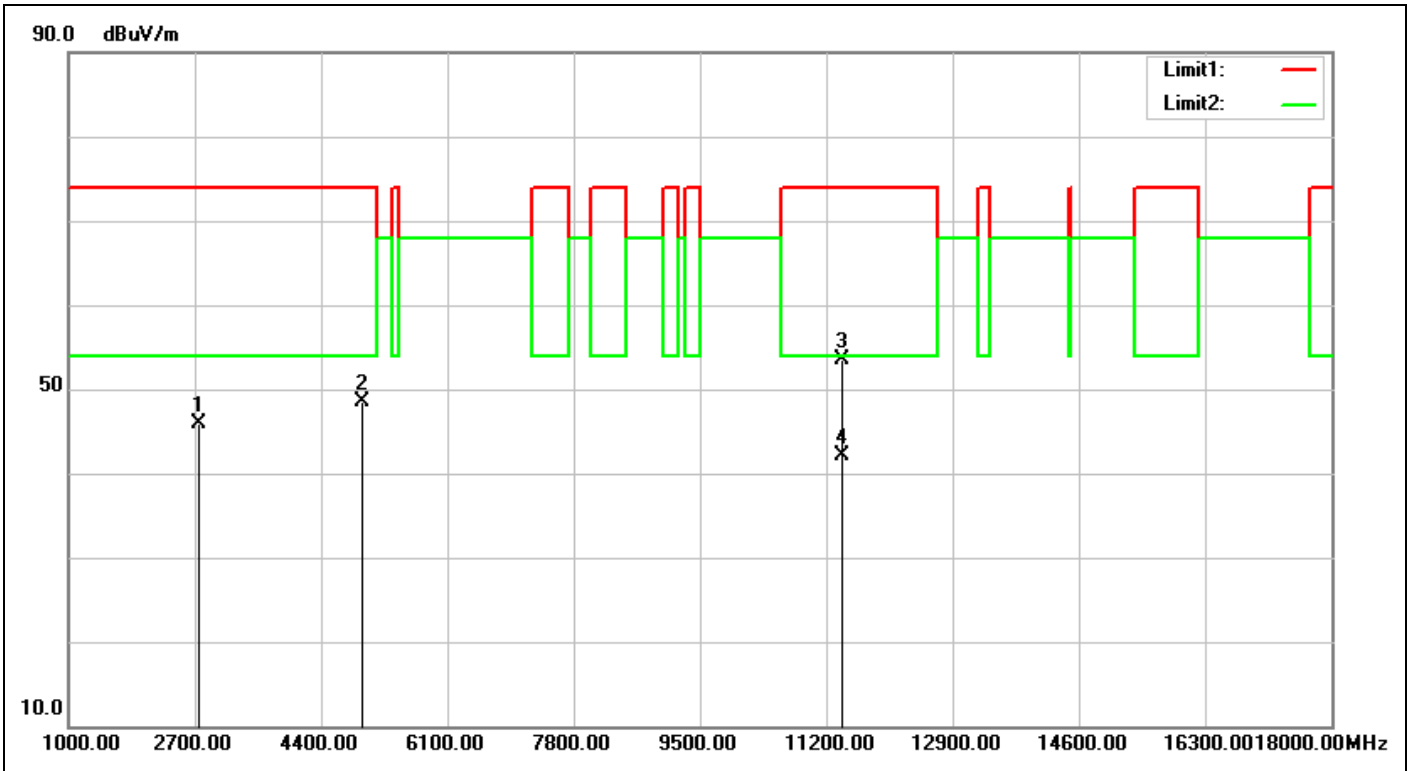


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:38:22
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2751.000	-5.87	51.75	45.88	74.00	-28.12	peak	100	299	
2	4944.000	-1.45	49.89	48.44	74.00	-25.56	peak	100	203	
3	11400.000	5.23	48.24	53.47	74.00	-20.53	peak	100	237	
4	11400.000	5.23	36.82	42.05	54.00	-11.95	AVG	100	237	

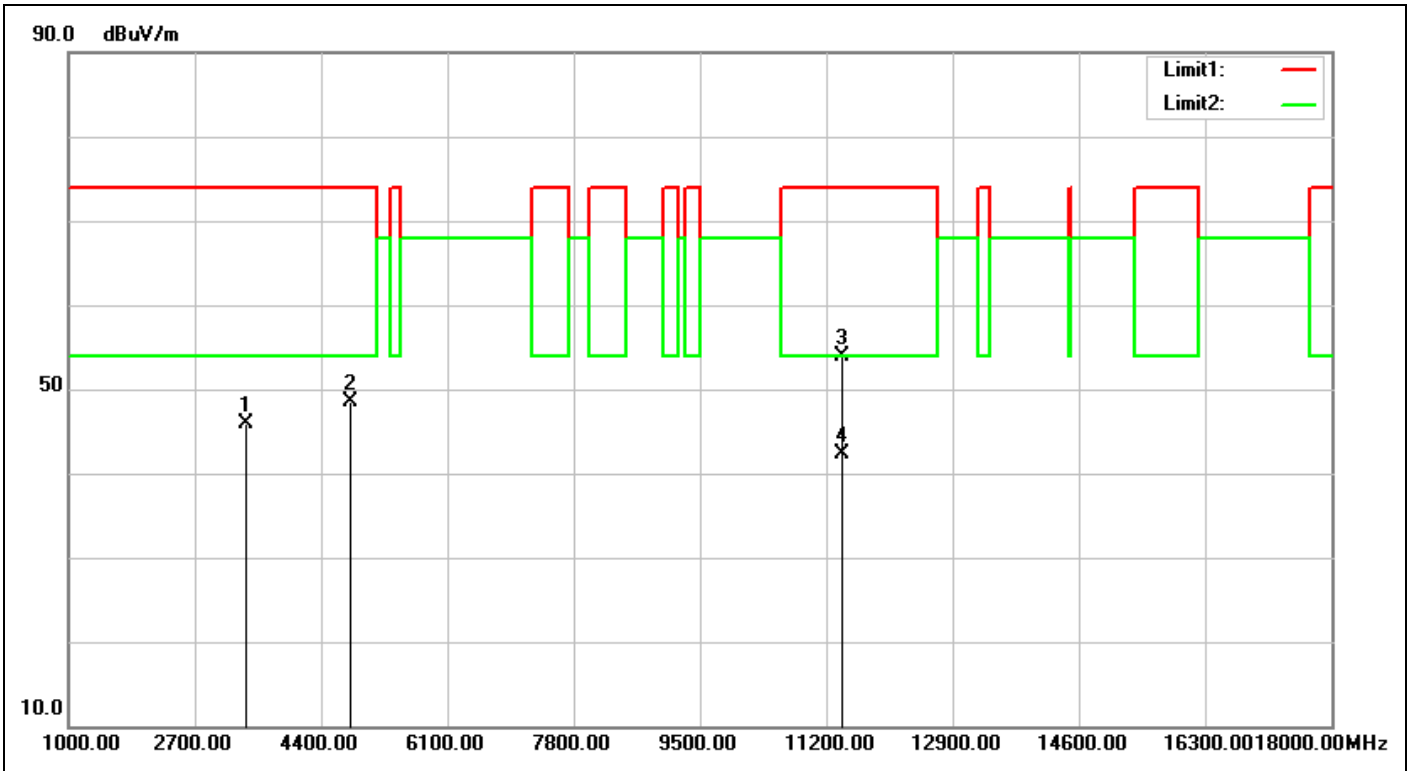


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:39:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	51.13	45.97	74.00	-28.03	peak	100	76	
2	4791.000	-1.67	50.22	48.55	74.00	-25.45	peak	130	259	
3	11400.000	5.23	48.72	53.95	74.00	-20.05	peak	100	315	
4	11400.000	5.23	36.99	42.22	54.00	-11.78	AVG	100	315	

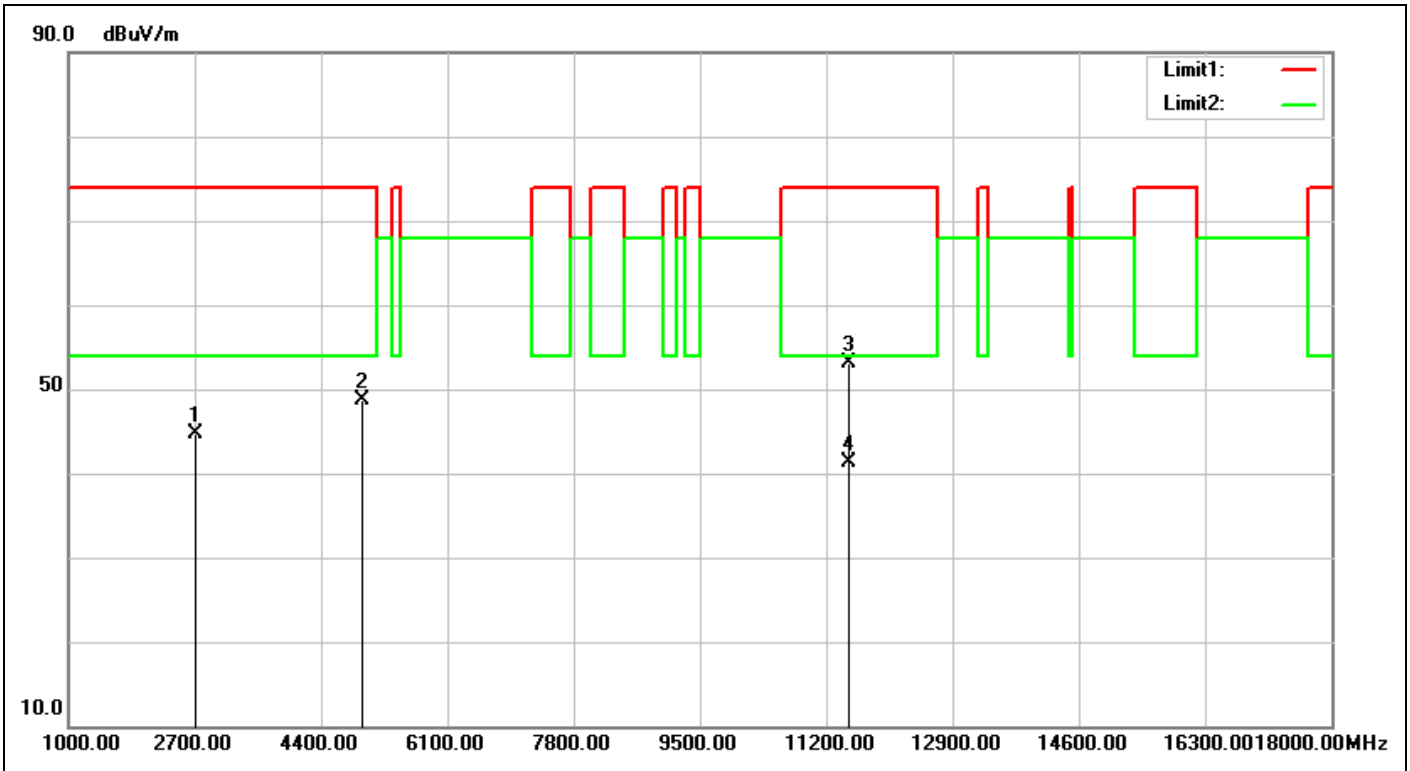


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:42:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	50.59	44.63	74.00	-29.37	peak	200	155	
2	4961.000	-1.44	50.22	48.78	74.00	-25.22	peak	100	306	
3	11490.000	5.33	47.73	53.06	74.00	-20.94	peak	100	264	
4	11490.000	5.33	35.95	41.28	54.00	-12.72	AVG	100	264	

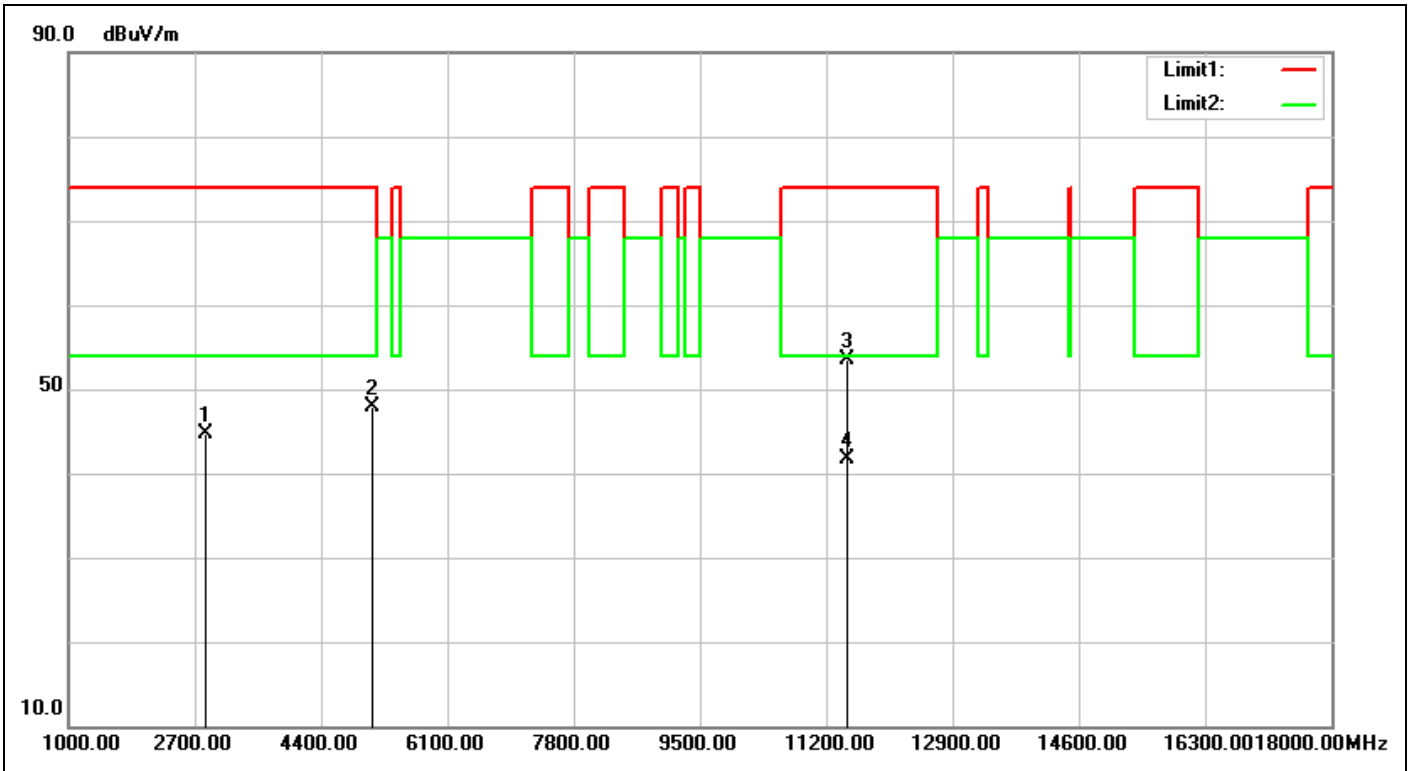


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:43:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2853.000	-5.71	50.37	44.66	74.00	-29.34	peak	160	85	
2	5097.000	-0.94	48.91	47.97	74.00	-26.03	peak	110	297	
3	11490.000	5.33	48.15	53.48	74.00	-20.52	peak	100	143	
4	11490.000	5.33	36.39	41.72	54.00	-12.28	AVG	100	143	

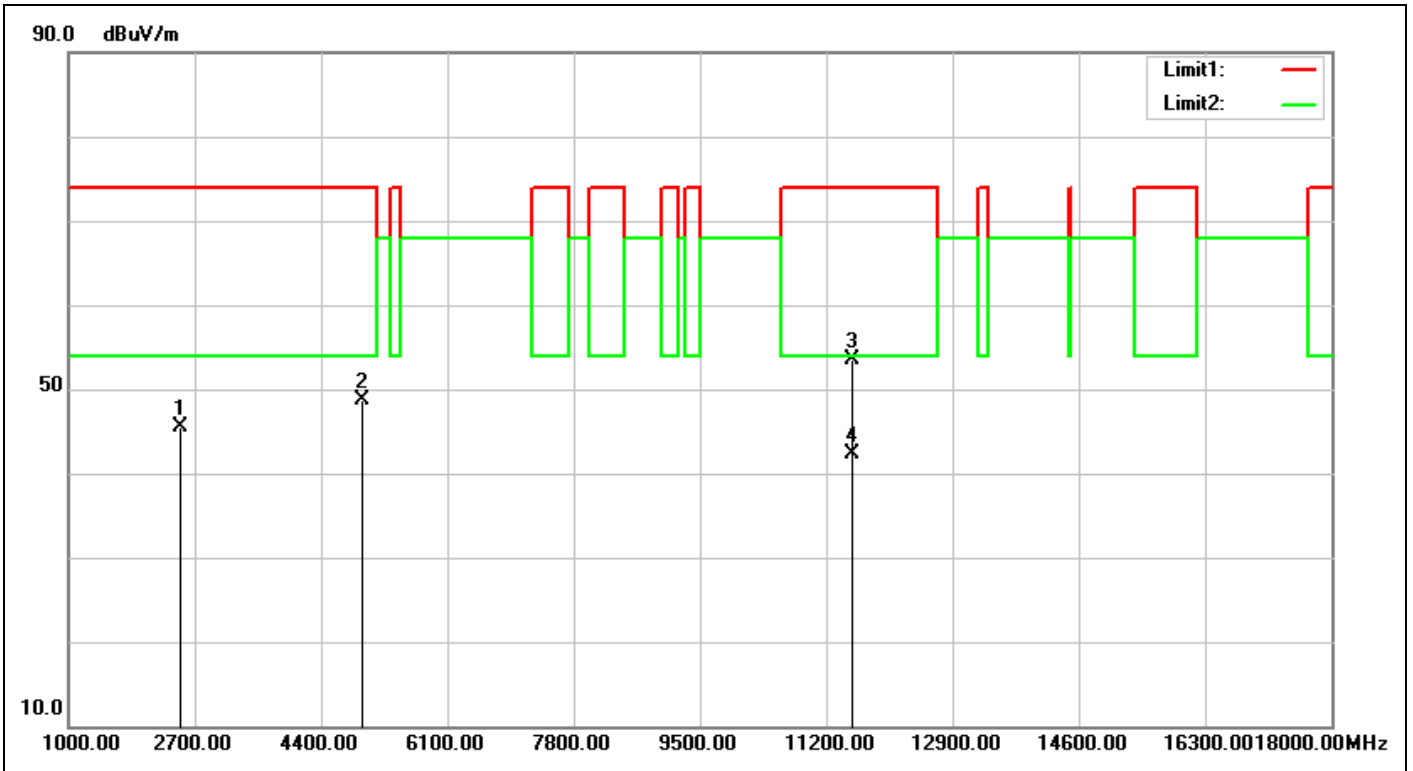


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:50:36
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	51.79	45.50	74.00	-28.50	peak	115	321	
2	4961.000	-1.44	50.18	48.74	74.00	-25.26	peak	170	57	
3	11570.000	5.59	47.89	53.48	74.00	-20.52	peak	100	133	
4	11570.000	5.59	36.68	42.27	54.00	-11.73	AVG	100	133	

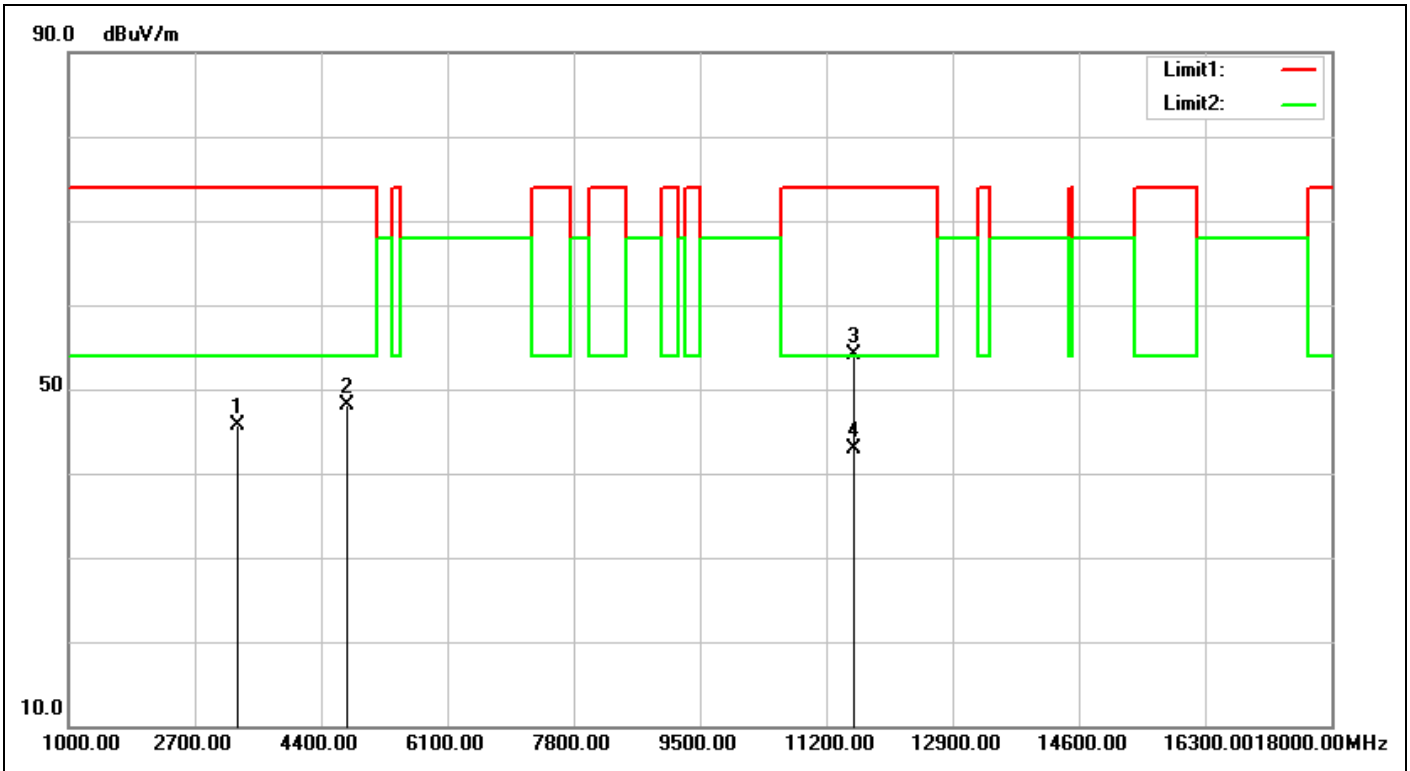


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:51:28
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3278.000	-5.24	50.85	45.61	74.00	-28.39	peak	100	148	
2	4740.000	-1.74	49.91	48.17	74.00	-25.83	peak	100	169	
3	11570.000	5.59	48.54	54.13	74.00	-19.87	peak	100	121	
4	11570.000	5.59	37.26	42.85	54.00	-11.15	AVG	100	121	

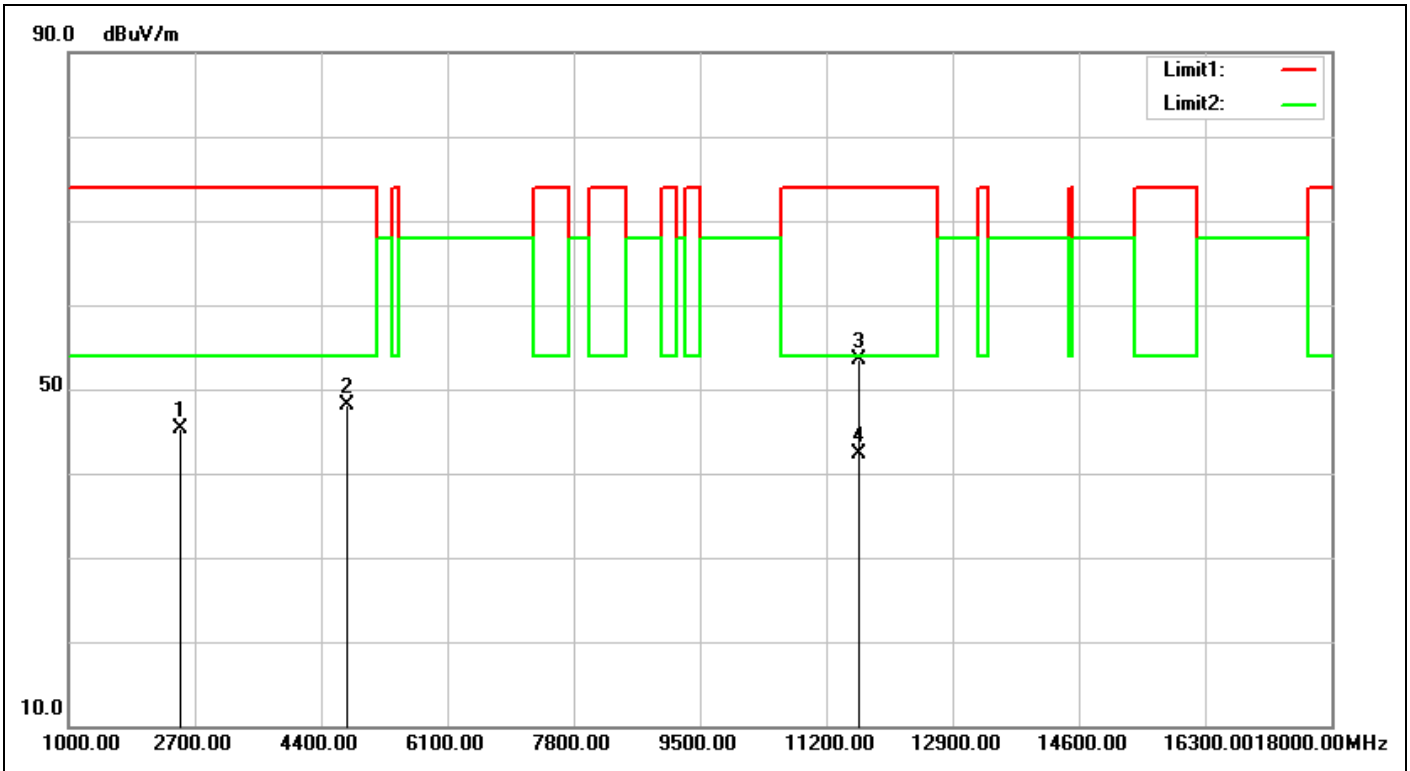


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:58:05
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	51.55	45.26	74.00	-28.74	peak	188	135	
2	4757.000	-1.72	49.87	48.15	74.00	-25.85	peak	200	360	
3	11650.000	5.90	47.67	53.57	74.00	-20.43	peak	100	125	
4	11650.000	5.90	36.31	42.21	54.00	-11.79	AVG	100	125	

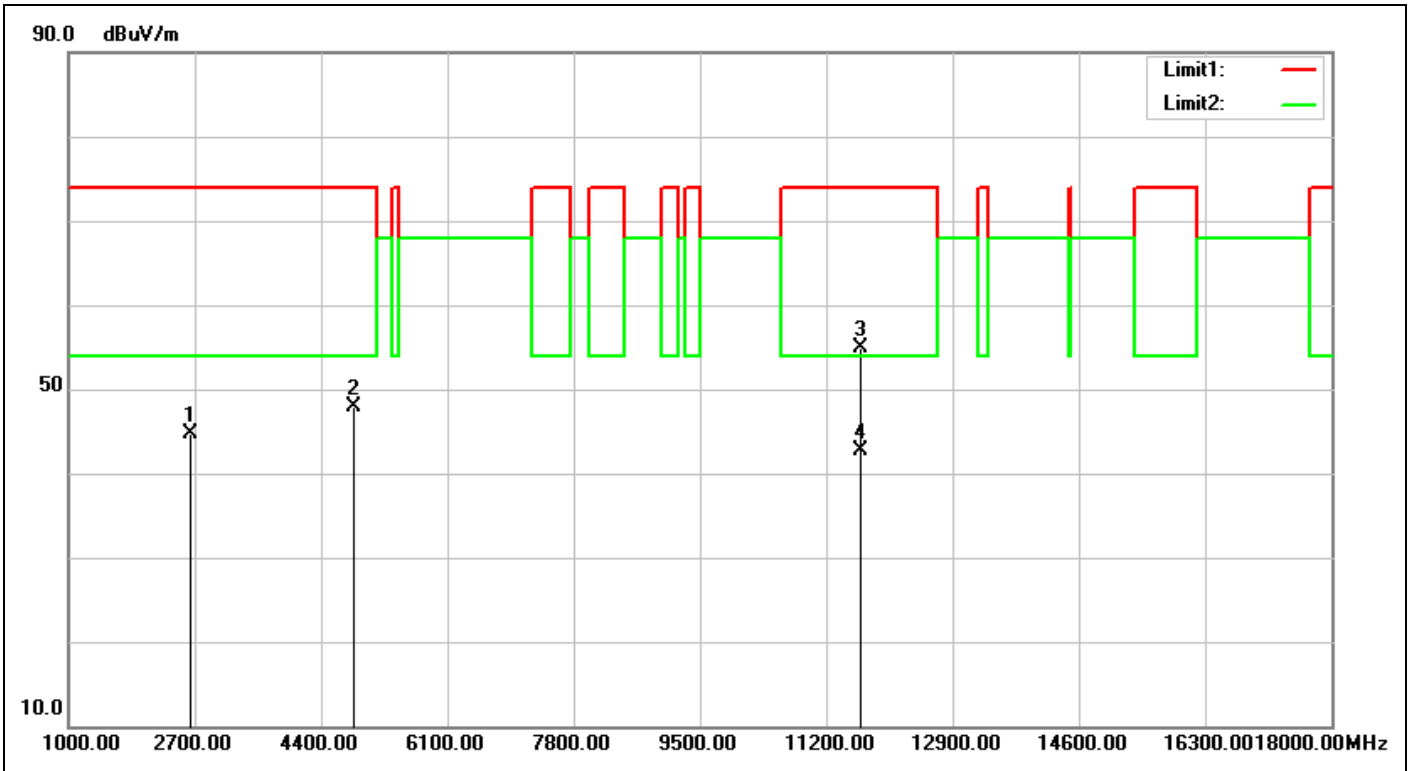


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:58:57
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2649.000	-6.04	50.82	44.78	74.00	-29.22	peak	100	96	
2	4842.000	-1.60	49.53	47.93	74.00	-26.07	peak	100	168	
3	11650.000	5.90	48.93	54.83	74.00	-19.17	peak	101	335	
4	11650.000	5.90	36.79	42.69	54.00	-11.31	AVG	101	335	

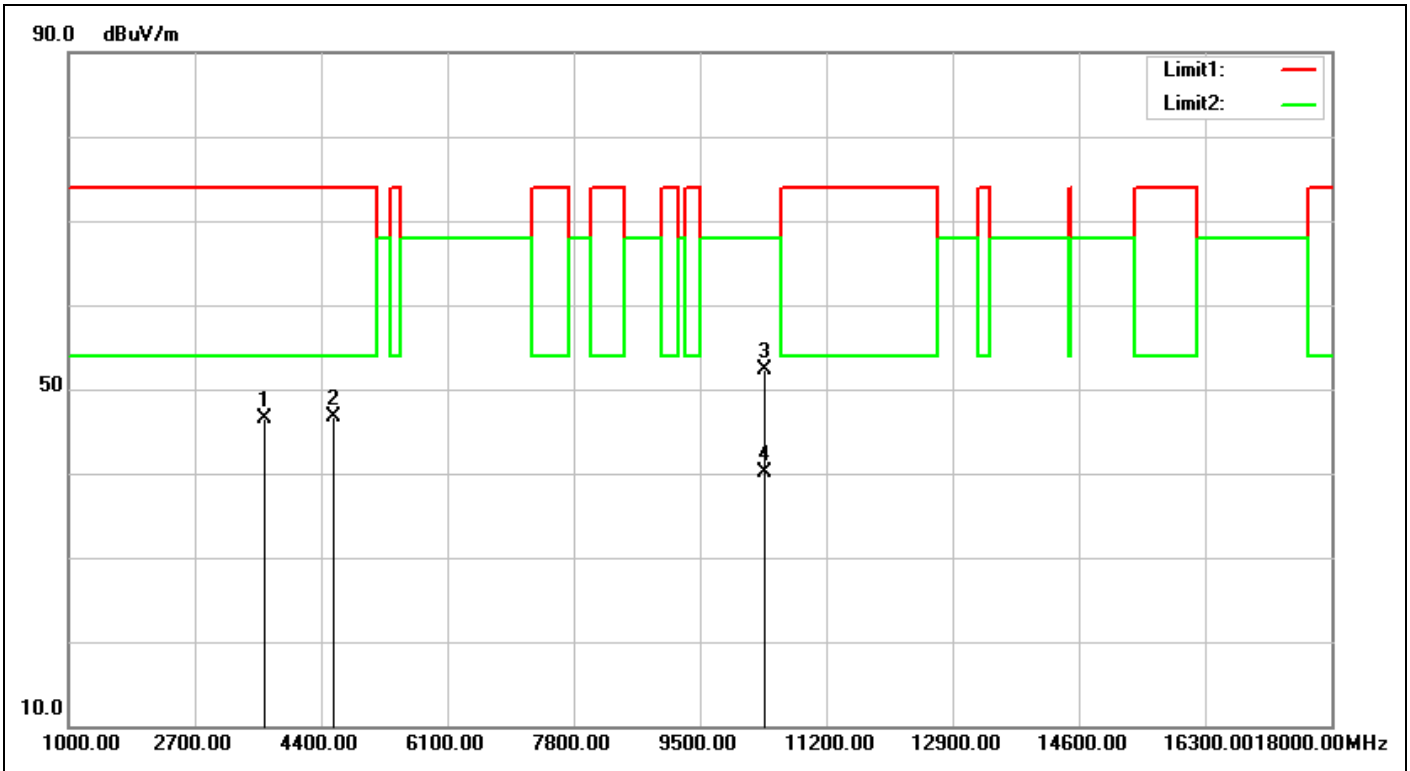


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:10:00
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5190-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3635.000	-4.76	51.20	46.44	74.00	-27.56	peak	100	271	
2	4570.000	-1.98	48.78	46.80	74.00	-27.20	peak	100	148	
3	10380.000	5.64	46.70	52.34	68.00	-15.66	peak	100	172	
4	10380.000	5.64	34.44	40.08	68.00	-27.92	AVG	100	172	

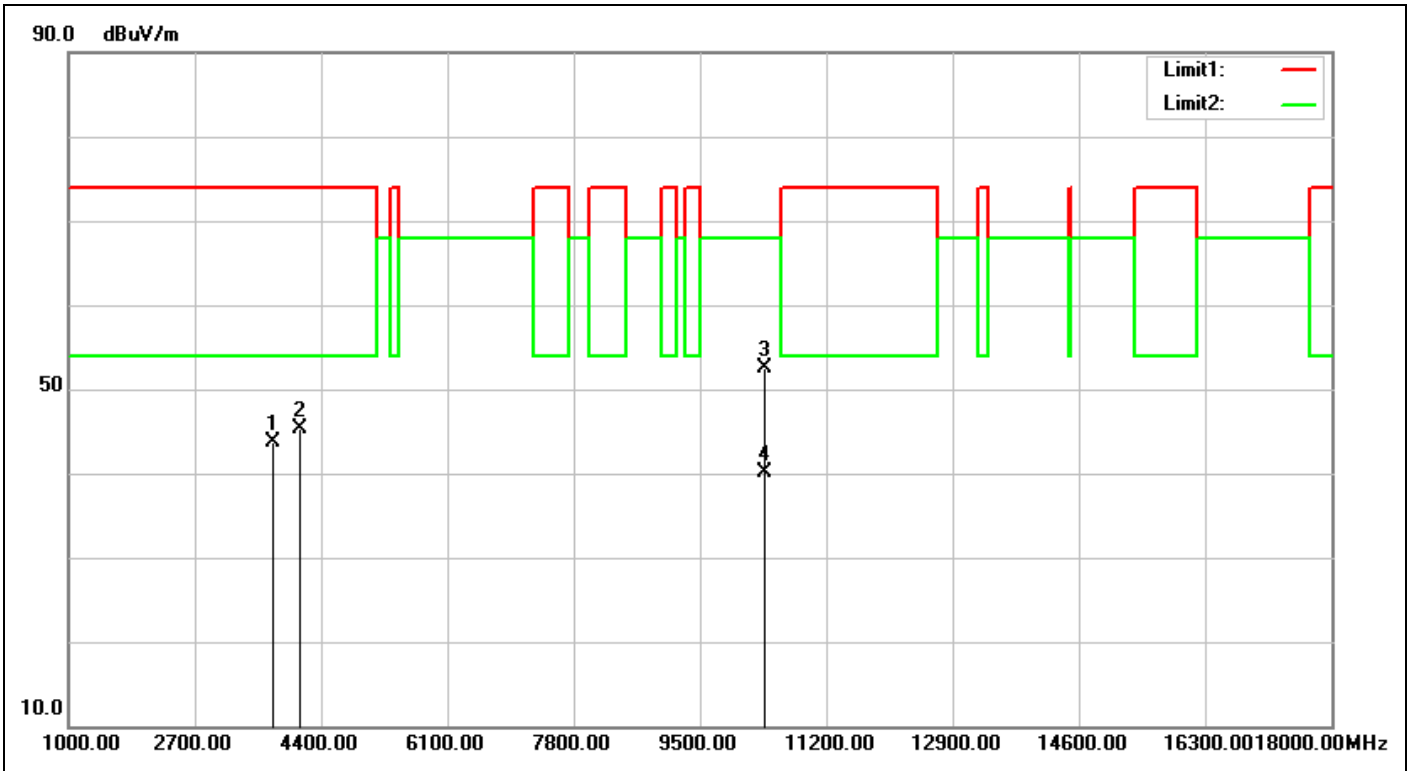


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:10:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5190-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3754.000	-4.48	48.11	43.63	74.00	-30.37	peak	100	355	
2	4111.000	-3.51	48.89	45.38	74.00	-28.62	peak	100	321	
3	10380.000	5.64	46.83	52.47	68.00	-15.53	peak	100	178	
4	10380.000	5.64	34.46	40.10	68.00	-27.90	AVG	100	178	

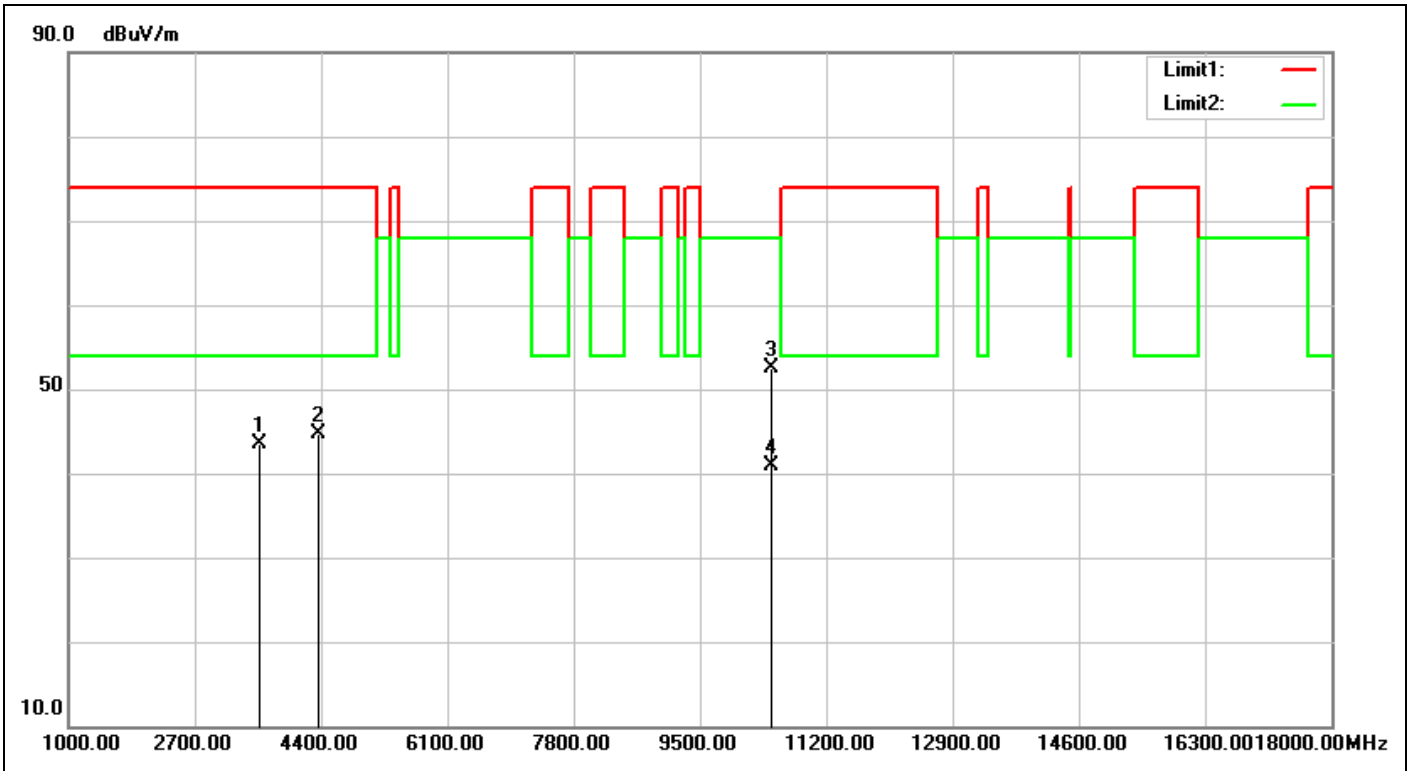


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:17:43
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5230-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3567.000	-4.93	48.46	43.53	74.00	-30.47	peak	100	203	
2	4366.000	-2.57	47.32	44.75	74.00	-29.25	peak	100	360	
3	10460.000	5.47	47.05	52.52	68.00	-15.48	peak	100	295	
4	10460.000	5.47	35.40	40.87	68.00	-27.13	AVG	100	295	

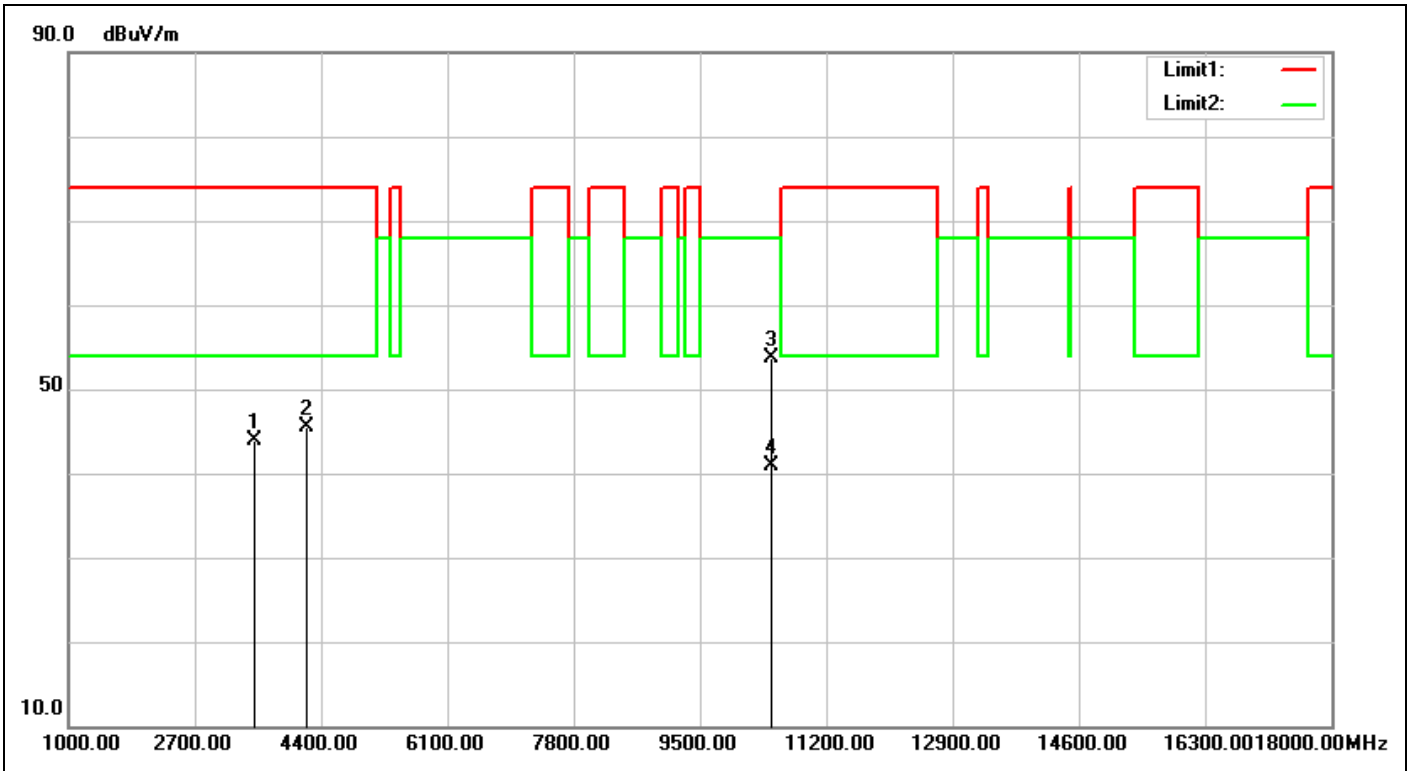


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:18:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5230-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3499.000	-5.07	48.93	43.86	74.00	-30.14	peak	100	109	
2	4213.000	-3.15	48.64	45.49	74.00	-28.51	peak	100	160	
3	10460.000	5.47	48.21	53.68	68.00	-14.32	peak	100	109	
4	10460.000	5.47	35.42	40.89	68.00	-27.11	AVG	100	109	

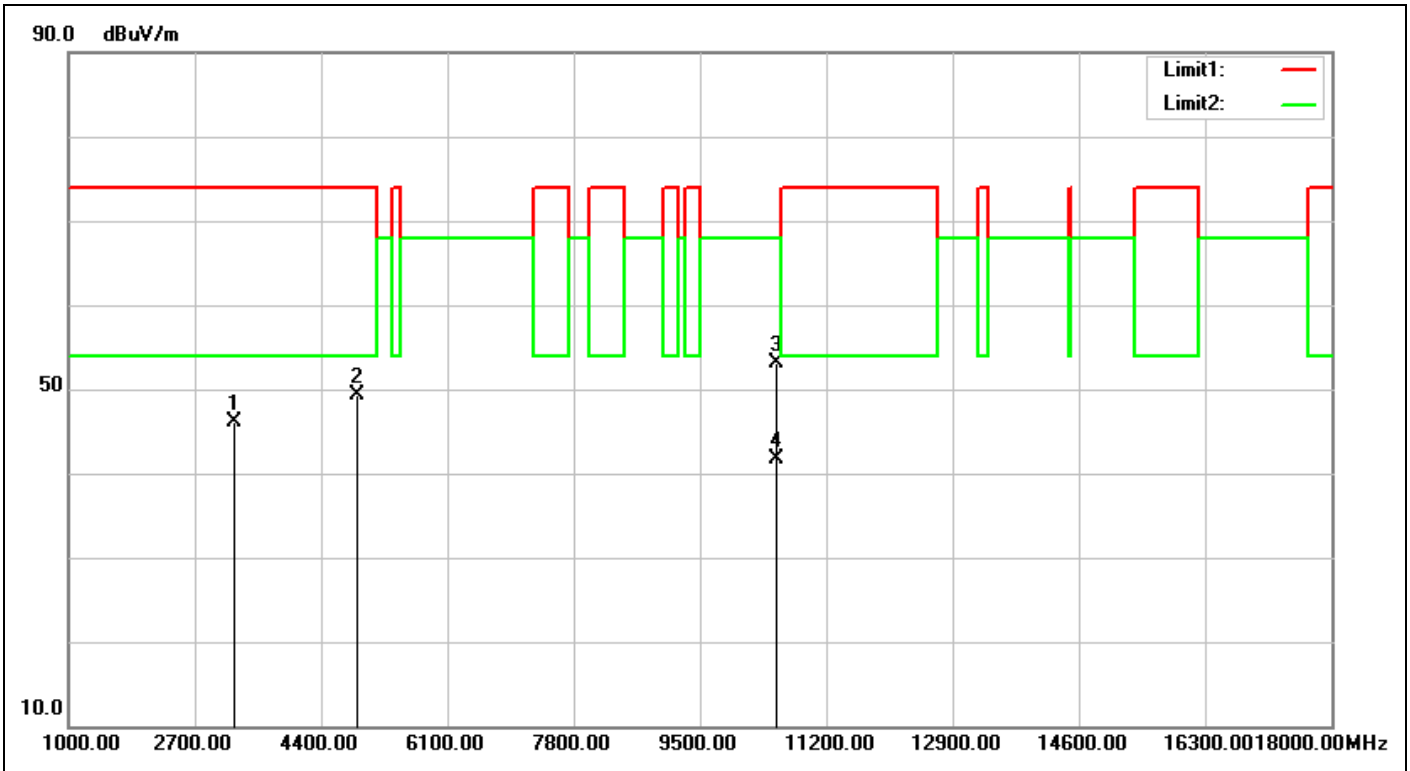


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:41:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5270-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3227.000	-5.29	51.45	46.16	74.00	-27.84	peak	100	178	
2	4893.000	-1.52	50.89	49.37	74.00	-24.63	peak	108	191	
3	10540.000	5.34	47.73	53.07	68.00	-14.93	peak	100	307	
4	10540.000	5.34	36.28	41.62	68.00	-26.38	AVG	100	307	

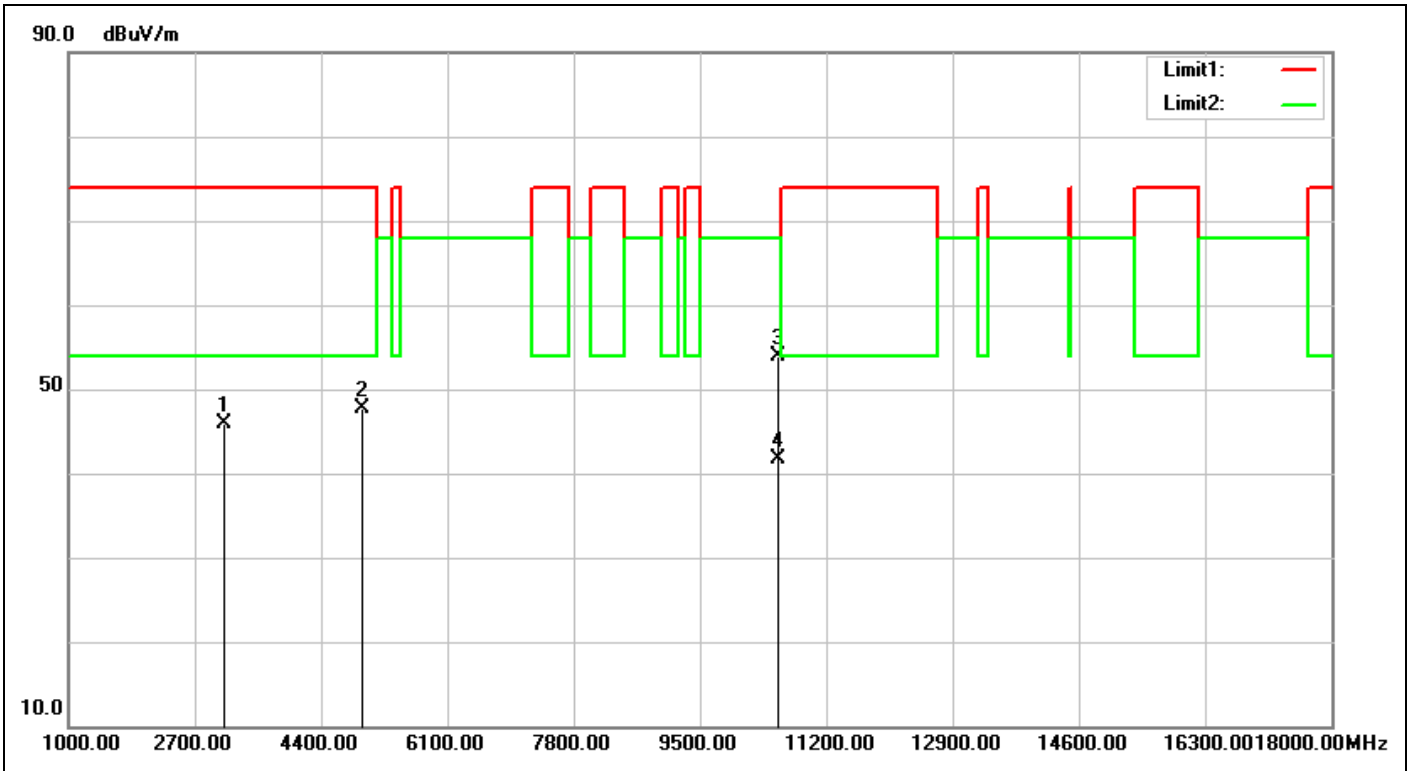


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:42:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5270-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3091.000	-5.39	51.22	45.83	74.00	-28.17	peak	200	199	
2	4944.000	-1.45	49.16	47.71	74.00	-26.29	peak	100	158	
3	10540.000	5.34	48.53	53.87	68.00	-14.13	peak	100	45	
4	10540.000	5.34	36.45	41.79	68.00	-26.21	AVG	100	45	

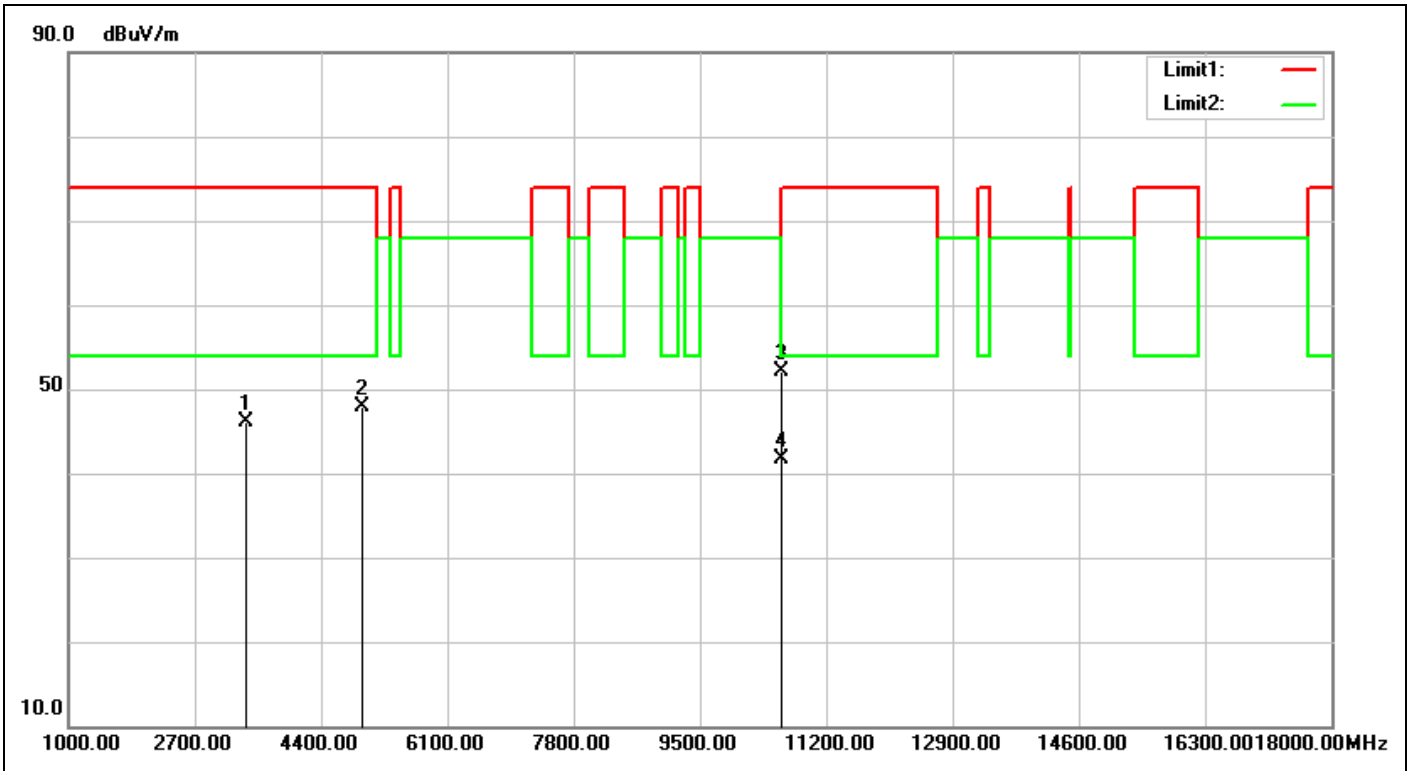


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:49:28
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5310-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	51.17	46.01	74.00	-27.99	peak	100	148	
2	4944.000	-1.45	49.34	47.89	74.00	-26.11	peak	130	248	
3	10620.000	5.26	46.87	52.13	74.00	-21.87	peak	100	205	
4	10620.000	5.26	36.40	41.66	54.00	-12.34	AVG	100	205	

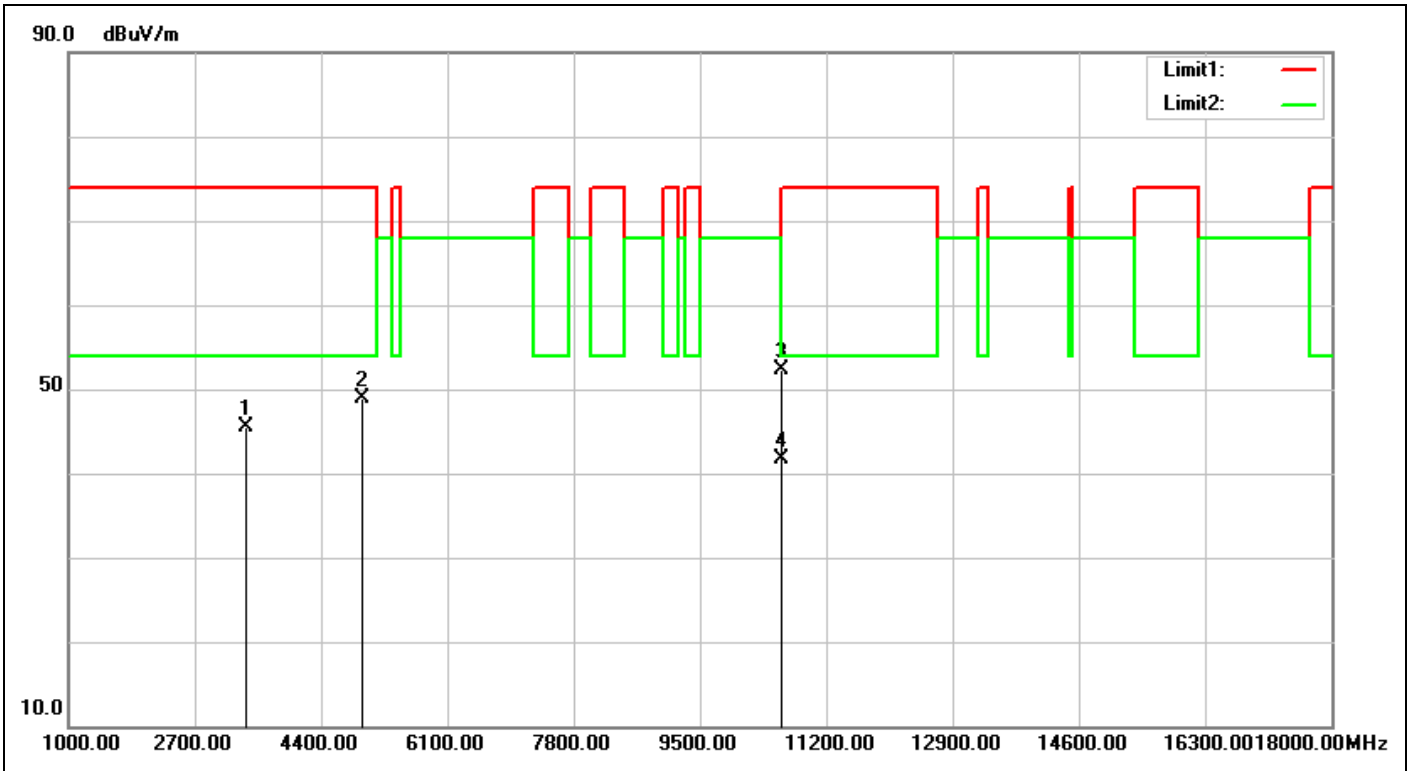


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:50:20
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5310-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	50.76	45.60	74.00	-28.40	peak	100	335	
2	4961.000	-1.44	50.26	48.82	74.00	-25.18	peak	100	82	
3	10620.000	5.26	47.09	52.35	74.00	-21.65	peak	100	301	
4	10620.000	5.26	36.52	41.78	54.00	-12.22	AVG	100	301	

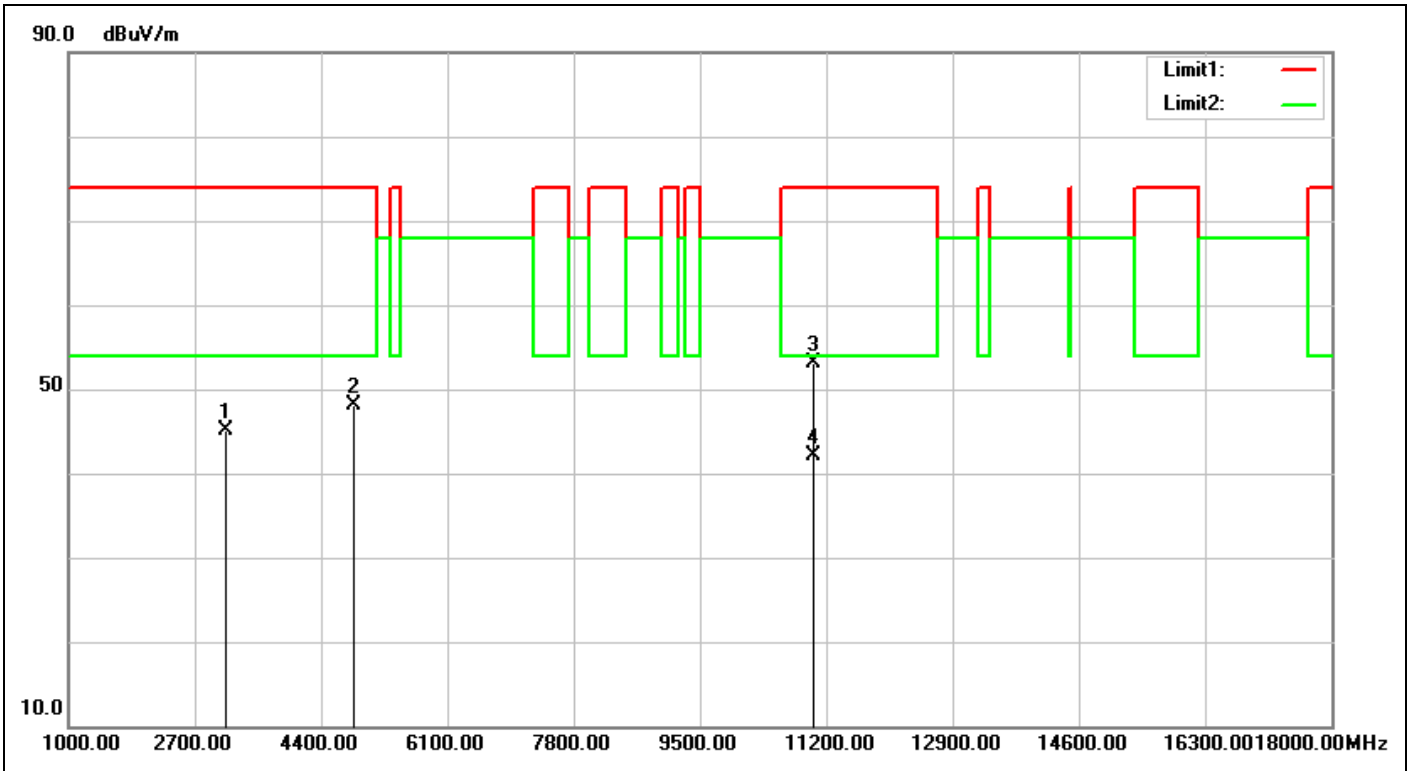


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:47:19
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5510-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-5.36	50.41	45.05	74.00	-28.95	peak	190	145	
2	4842.000	-1.60	49.63	48.03	74.00	-25.97	peak	200	121	
3	11020.000	4.89	48.31	53.20	74.00	-20.80	peak	100	275	
4	11020.000	4.89	37.27	42.16	54.00	-11.84	AVG	100	275	

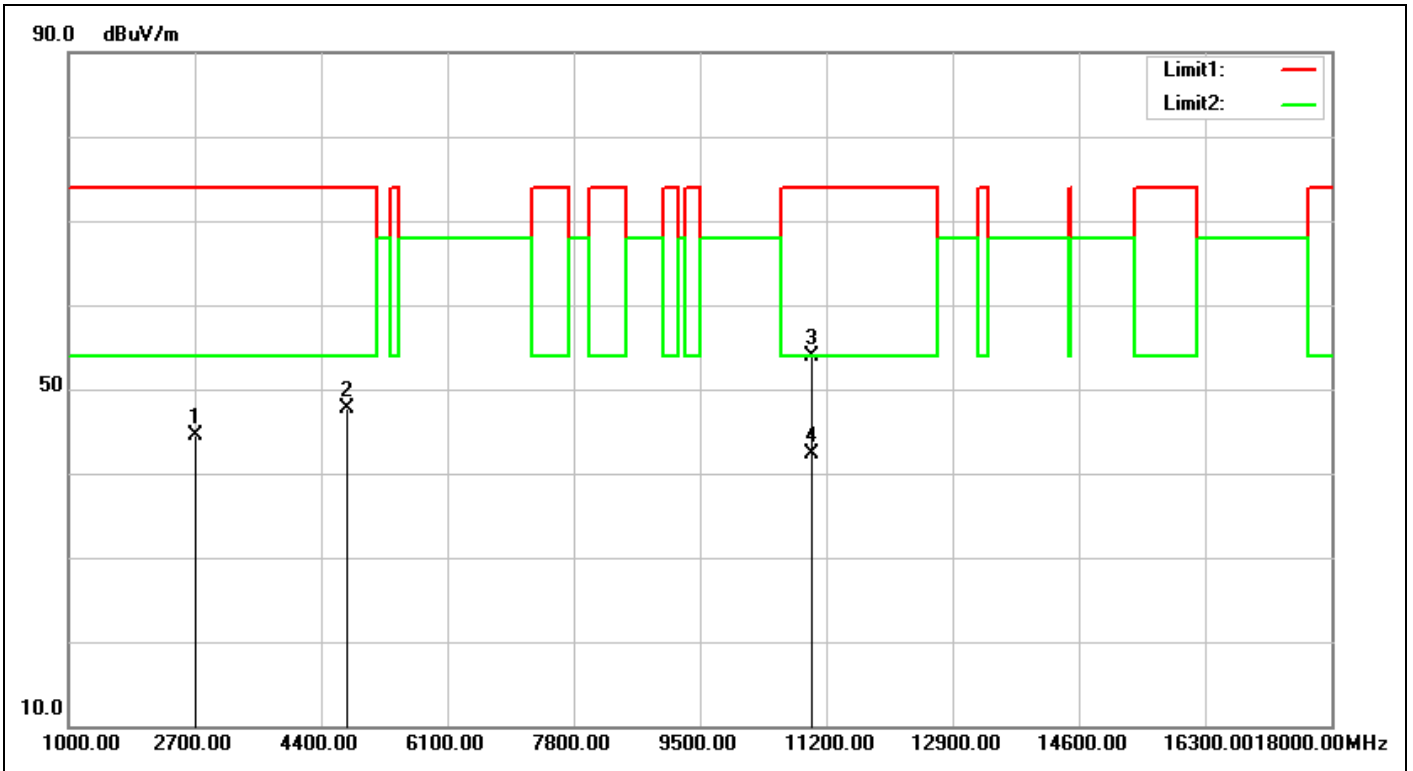


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:48:12
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5510-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	50.38	44.42	74.00	-29.58	peak	100	338	
2	4740.000	-1.74	49.53	47.79	74.00	-26.21	peak	100	294	
3	11020.000	4.89	48.95	53.84	74.00	-20.16	peak	100	68	
4	11020.000	4.89	37.48	42.37	54.00	-11.63	AVG	100	68	

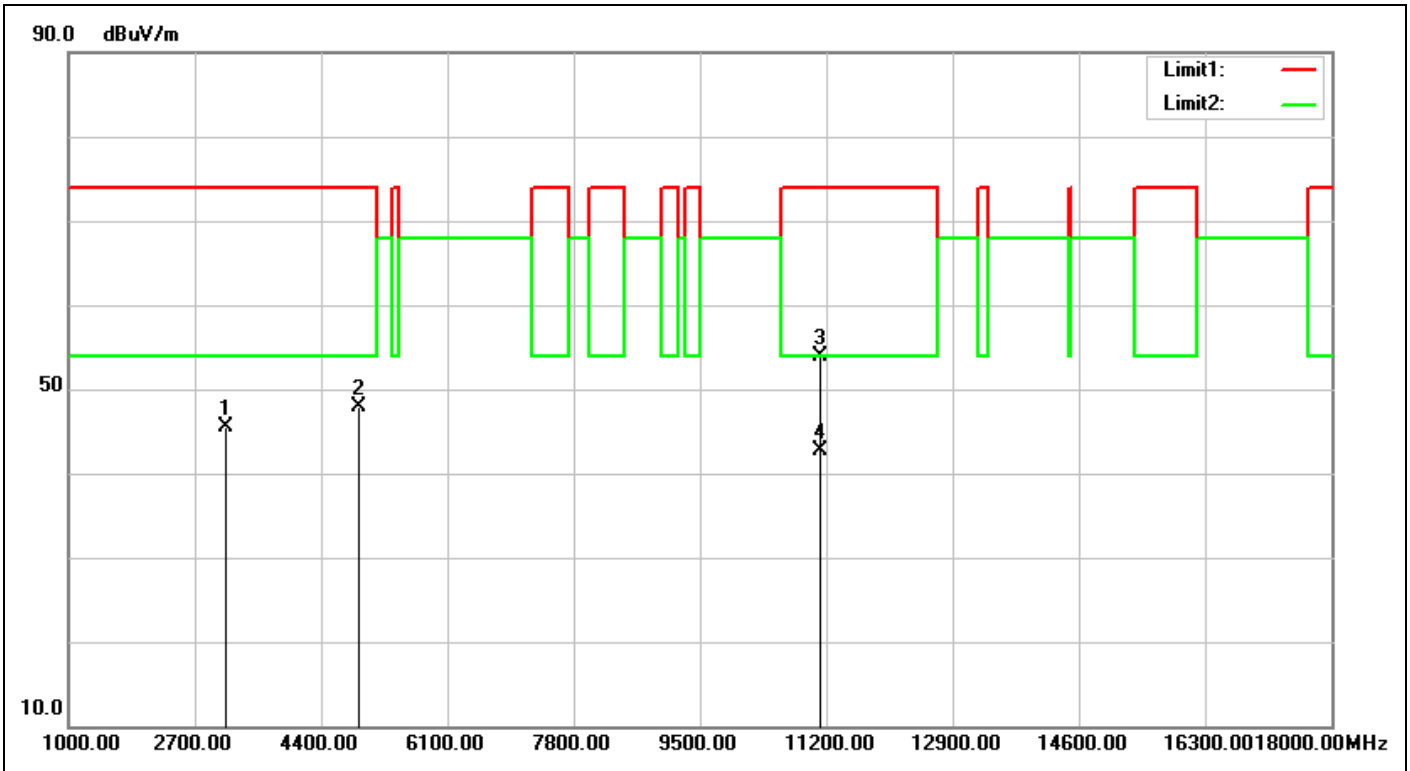


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:56:11
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5550-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-5.36	50.82	45.46	74.00	-28.54	peak	115	188	
2	4910.000	-1.51	49.49	47.98	74.00	-26.02	peak	200	251	
3	11100.000	4.97	48.99	53.96	74.00	-20.04	peak	100	239	
4	11100.000	4.97	37.76	42.73	54.00	-11.27	AVG	100	239	

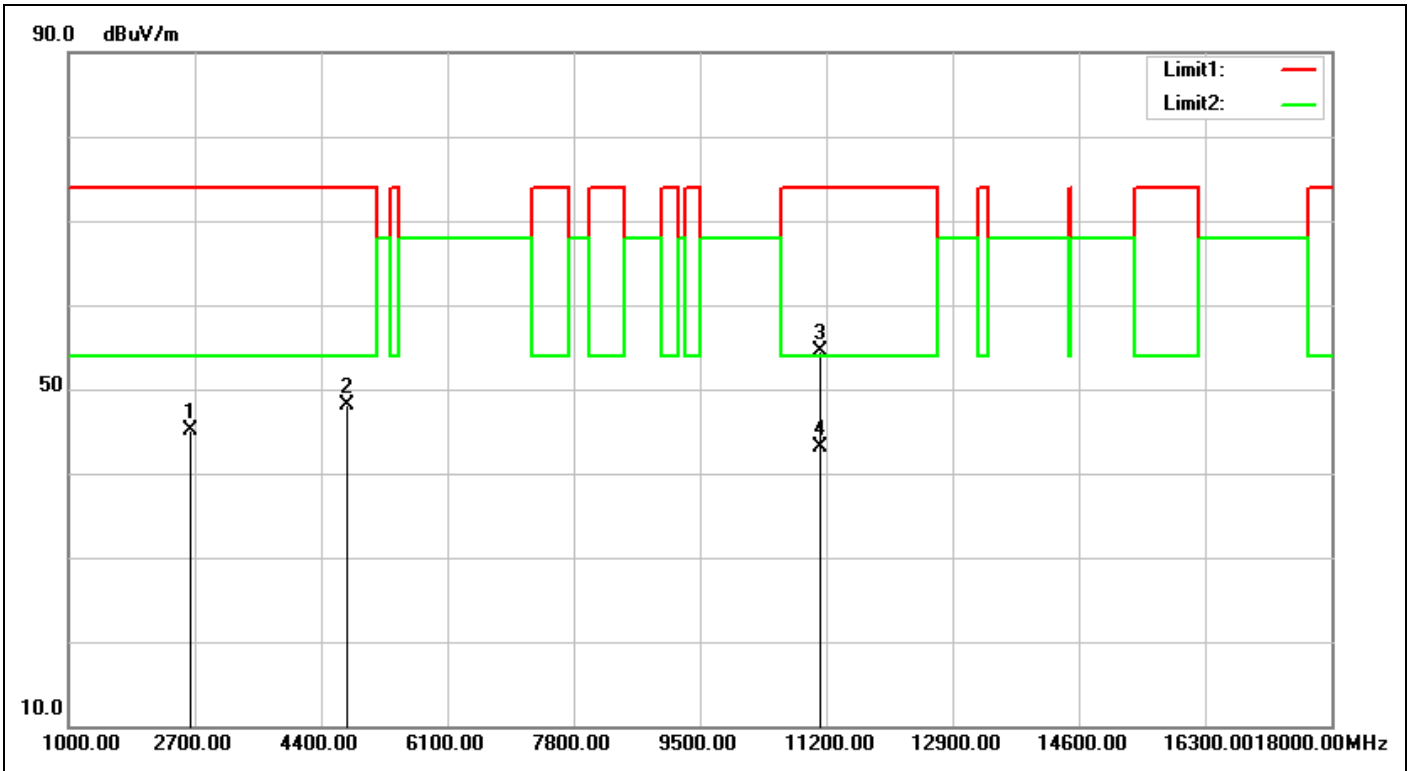


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:57:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5550-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2632.000	-6.07	51.24	45.17	74.00	-28.83	peak	100	323	
2	4740.000	-1.74	49.89	48.15	74.00	-25.85	peak	100	63	
3	11100.000	4.97	49.59	54.56	74.00	-19.44	peak	100	32	
4	11100.000	4.97	38.13	43.10	54.00	-10.90	AVG	100	32	

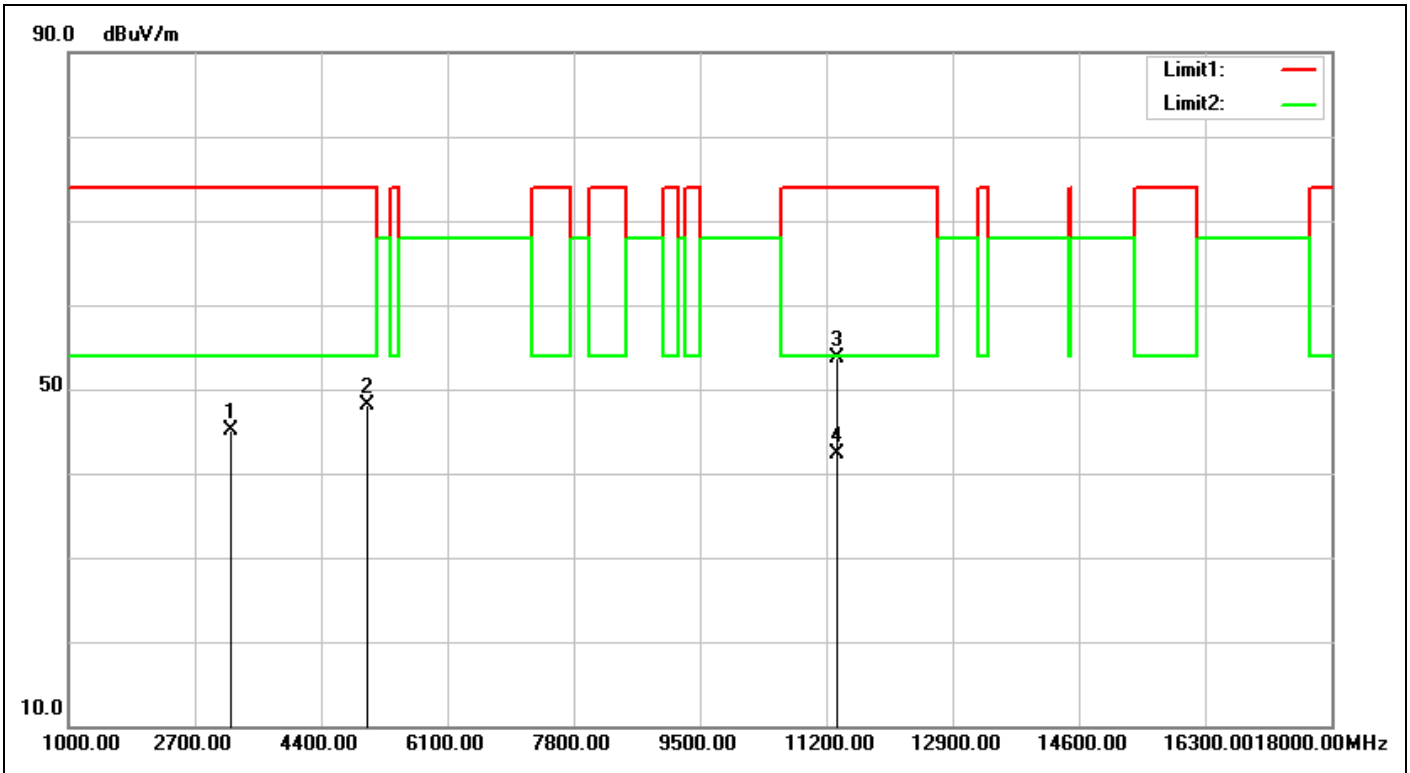


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:04:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5670-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3176.000	-5.32	50.35	45.03	74.00	-28.97	peak	180	155	
2	5029.000	-1.25	49.37	48.12	74.00	-25.88	peak	200	360	
3	11340.000	5.19	48.46	53.65	74.00	-20.35	peak	100	165	
4	11340.000	5.19	37.12	42.31	54.00	-11.69	AVG	100	165	

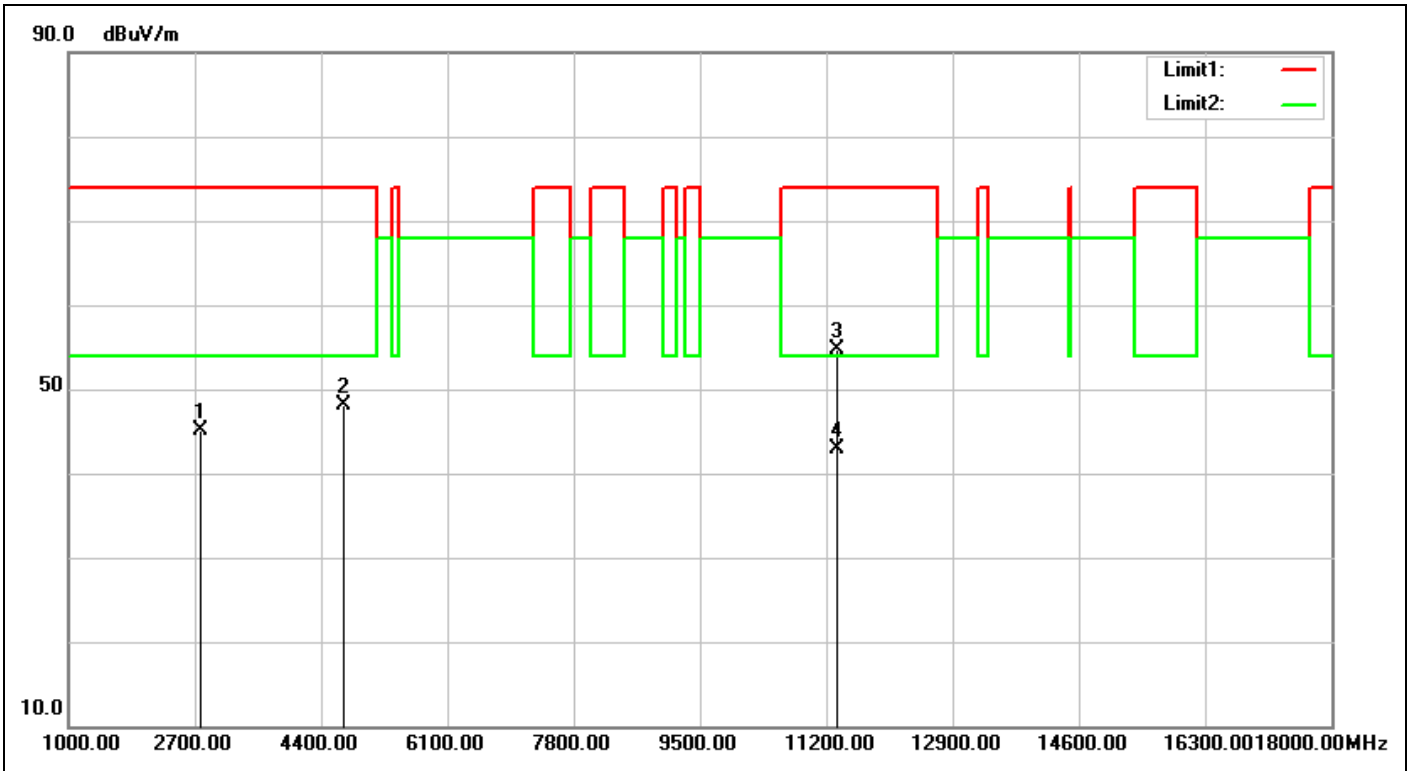


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:05:27
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5670-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2768.000	-5.85	50.86	45.01	74.00	-28.99	peak	100	78	
2	4706.000	-1.79	49.80	48.01	74.00	-25.99	peak	100	232	
3	11340.000	5.19	49.61	54.80	74.00	-19.20	peak	100	171	
4	11340.000	5.19	37.69	42.88	54.00	-11.12	AVG	100	171	

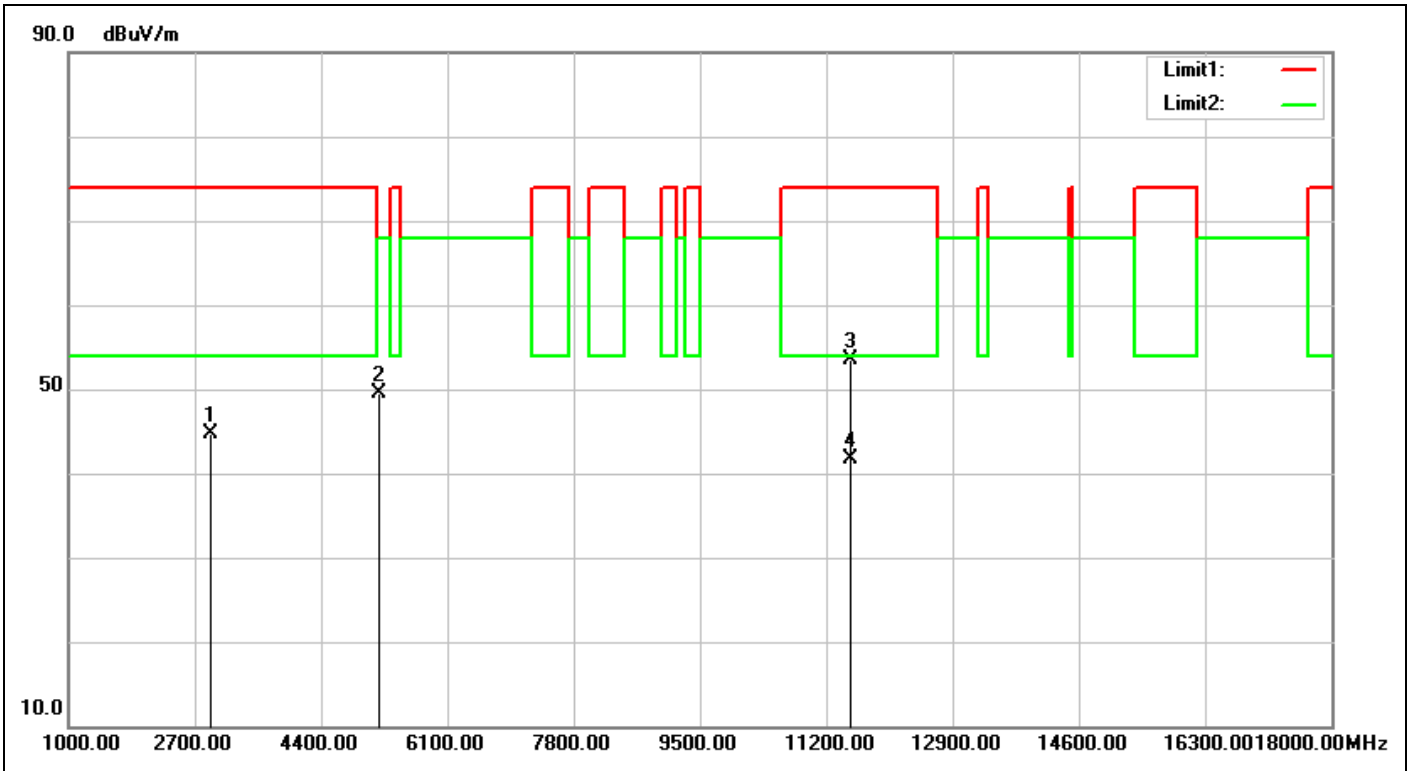


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 21:06:55
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5755-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2904.000	-5.62	50.24	44.62	74.00	-29.38	peak	150	109	
2	5182.000	-0.56	50.09	49.53	68.00	-18.47	peak	137	143	
3	11510.000	5.37	48.13	53.50	74.00	-20.50	peak	100	242	
4	11510.000	5.37	36.32	41.69	54.00	-12.31	AVG	100	242	

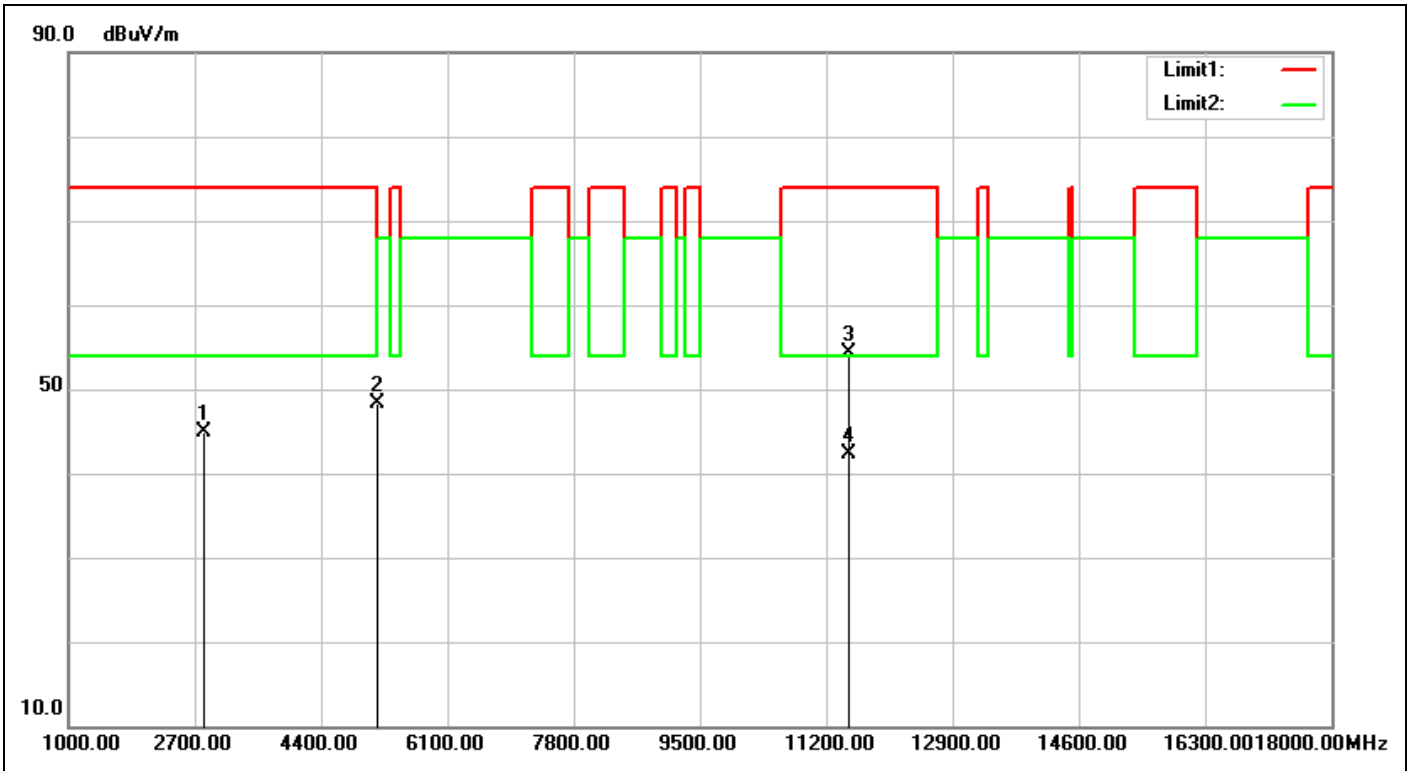


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 21:07:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5755-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2819.000	-5.77	50.64	44.87	74.00	-29.13	peak	200	248	
2	5148.000	-0.71	48.98	48.27	74.00	-25.73	peak	190	132	
3	11510.000	5.37	48.90	54.27	74.00	-19.73	peak	100	313	
4	11510.000	5.37	36.91	42.28	54.00	-11.72	AVG	100	312	

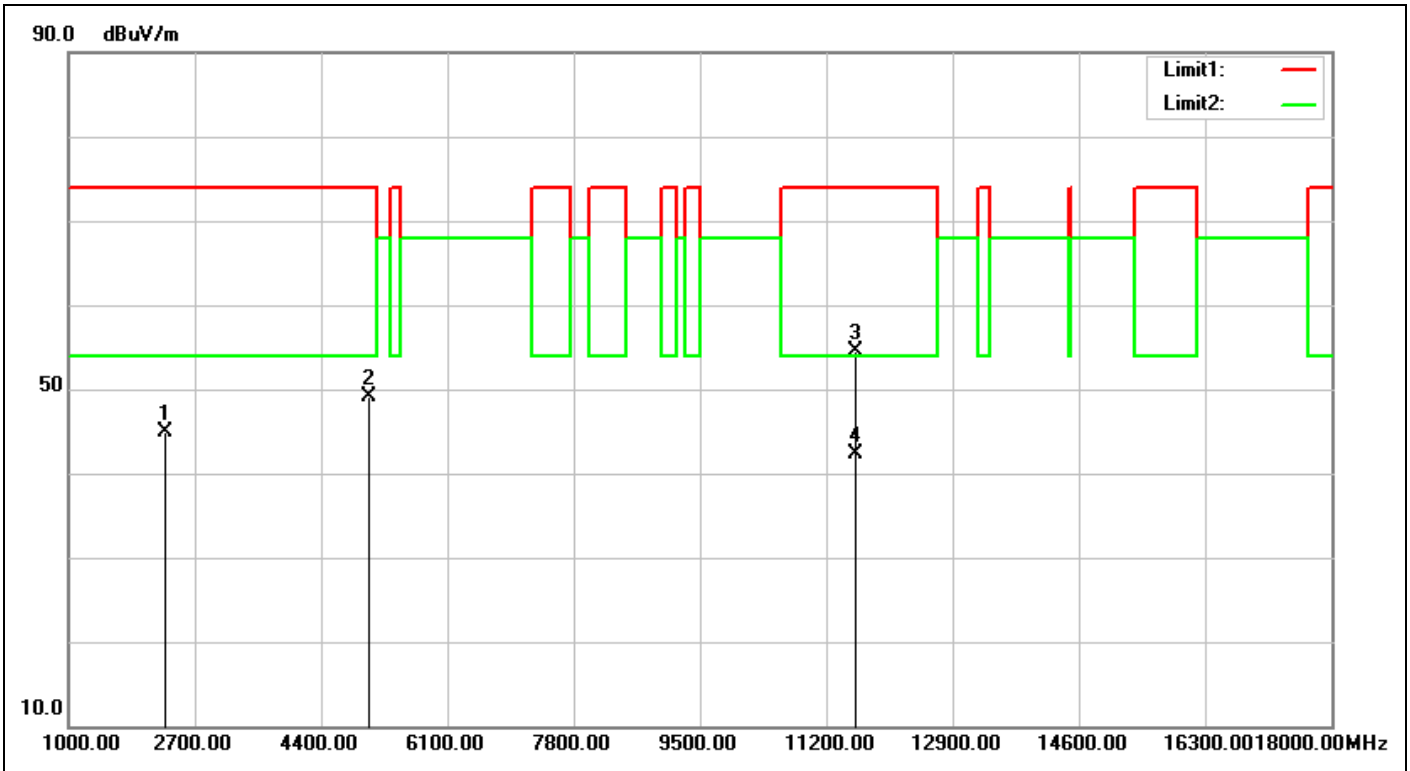

Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 21:14:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5795-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2292.000	-6.33	51.30	44.97	74.00	-29.03	peak	100	39	
2	5046.000	-1.17	50.25	49.08	74.00	-24.92	peak	160	125	
3	11590.000	5.67	48.86	54.53	74.00	-19.47	peak	100	108	
4	11590.000	5.67	36.63	42.30	54.00	-11.70	AVG	100	108	

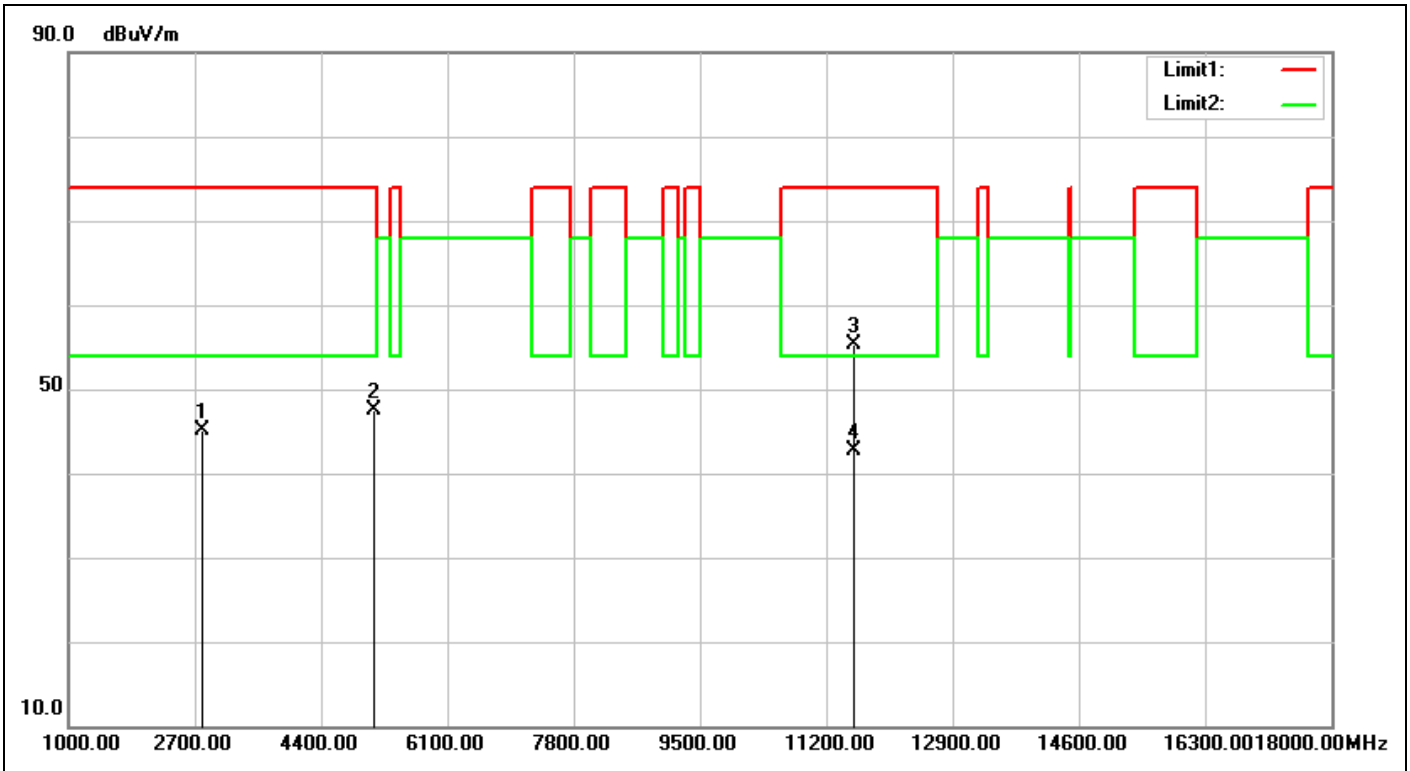

Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 21:15:08
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5795-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2802.000	-5.79	50.84	45.05	74.00	-28.95	peak	198	10	
2	5114.000	-0.86	48.41	47.55	74.00	-26.45	peak	100	13	
3	11590.000	5.67	49.70	55.37	74.00	-18.63	peak	112	229	
4	11590.000	5.67	37.02	42.69	54.00	-11.31	AVG	112	229	


Spurious Emissions, TX Mode, 18GHz-40GHz



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

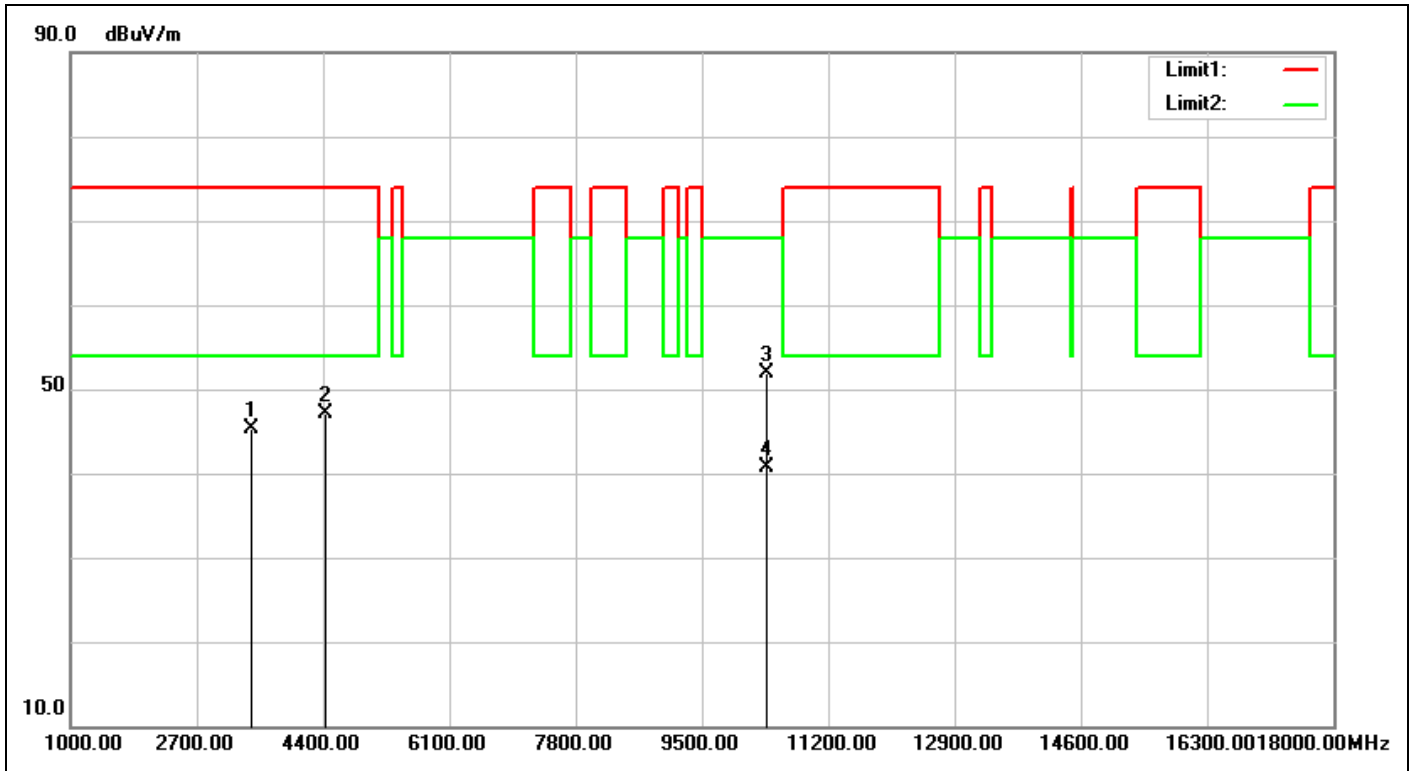


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:31:42
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3431.000	-5.12	50.40	45.28	74.00	-28.72	peak	100	198	
2	4434.000	-2.32	49.44	47.12	74.00	-26.88	peak	100	99	
3	10360.000	5.69	46.25	51.94	68.00	-16.06	peak	100	103	
4	10360.000	5.69	34.98	40.67	68.00	-27.33	AVG	100	103	

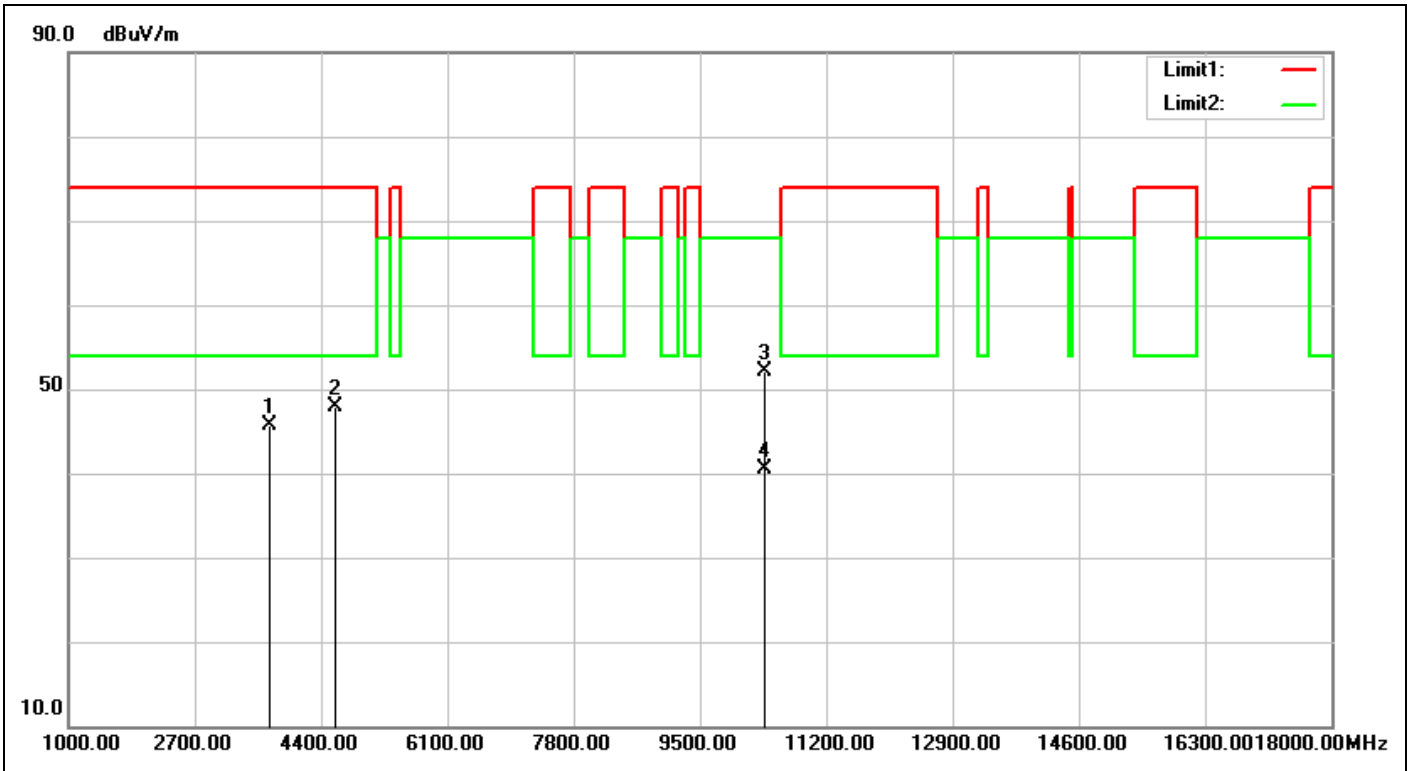


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:32:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3703.000	-4.62	50.27	45.65	74.00	-28.35	peak	100	5	
2	4587.000	-1.96	49.90	47.94	74.00	-26.06	peak	100	343	
3	10360.000	5.69	46.32	52.01	68.00	-15.99	peak	100	343	
4	10360.000	5.69	34.76	40.45	68.00	-27.55	AVG	100	343	

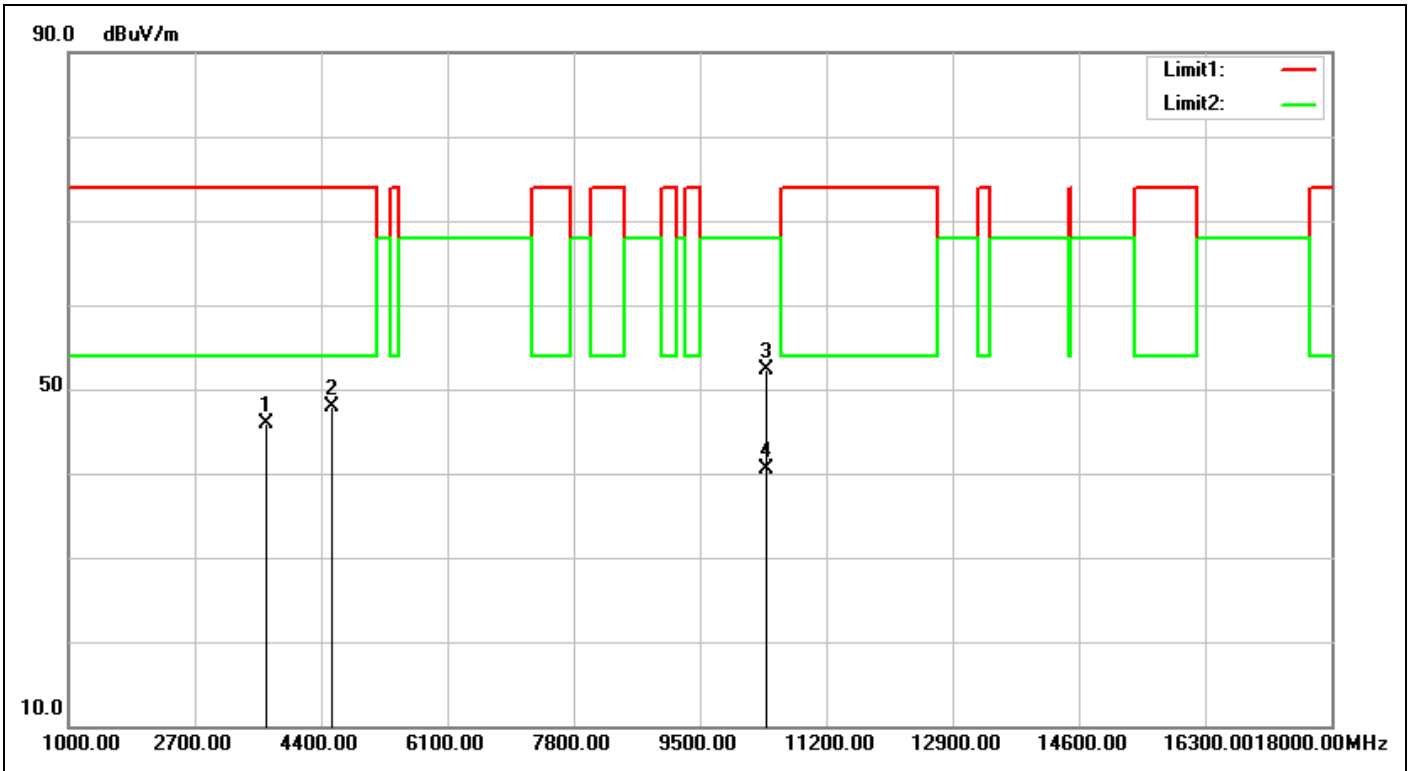


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:41:24
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3669.000	-4.68	50.63	45.95	74.00	-28.05	peak	100	2	
2	4553.000	-2.01	49.86	47.85	74.00	-26.15	peak	100	323	
3	10400.000	5.60	46.74	52.34	68.00	-15.66	peak	100	2	
4	10400.000	5.60	34.95	40.55	68.00	-27.45	AVG	100	2	

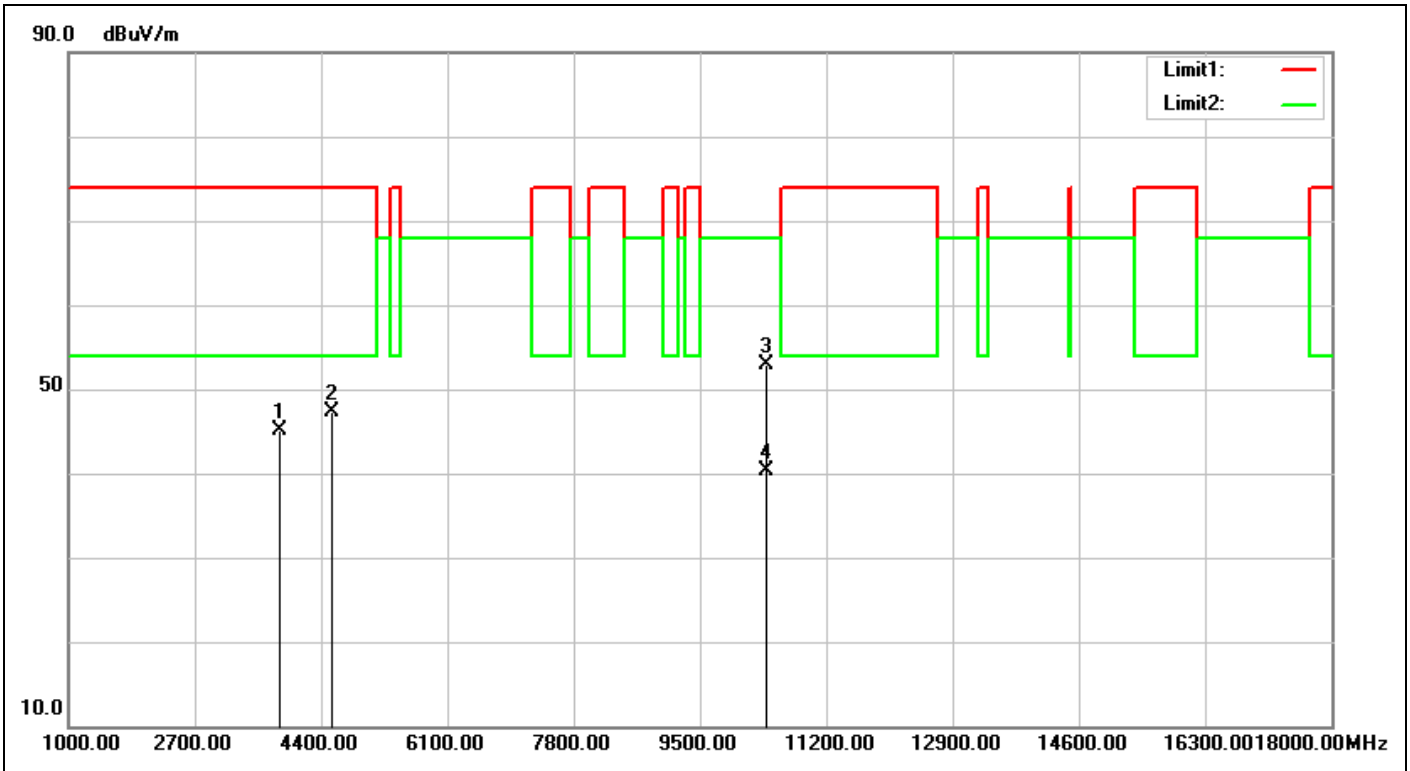


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:42:17
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	49.50	45.19	74.00	-28.81	peak	100	95	
2	4553.000	-2.01	49.39	47.38	74.00	-26.62	peak	100	89	
3	10400.000	5.60	47.36	52.96	68.00	-15.04	peak	100	317	
4	10400.000	5.60	34.63	40.23	68.00	-27.77	AVG	100	317	

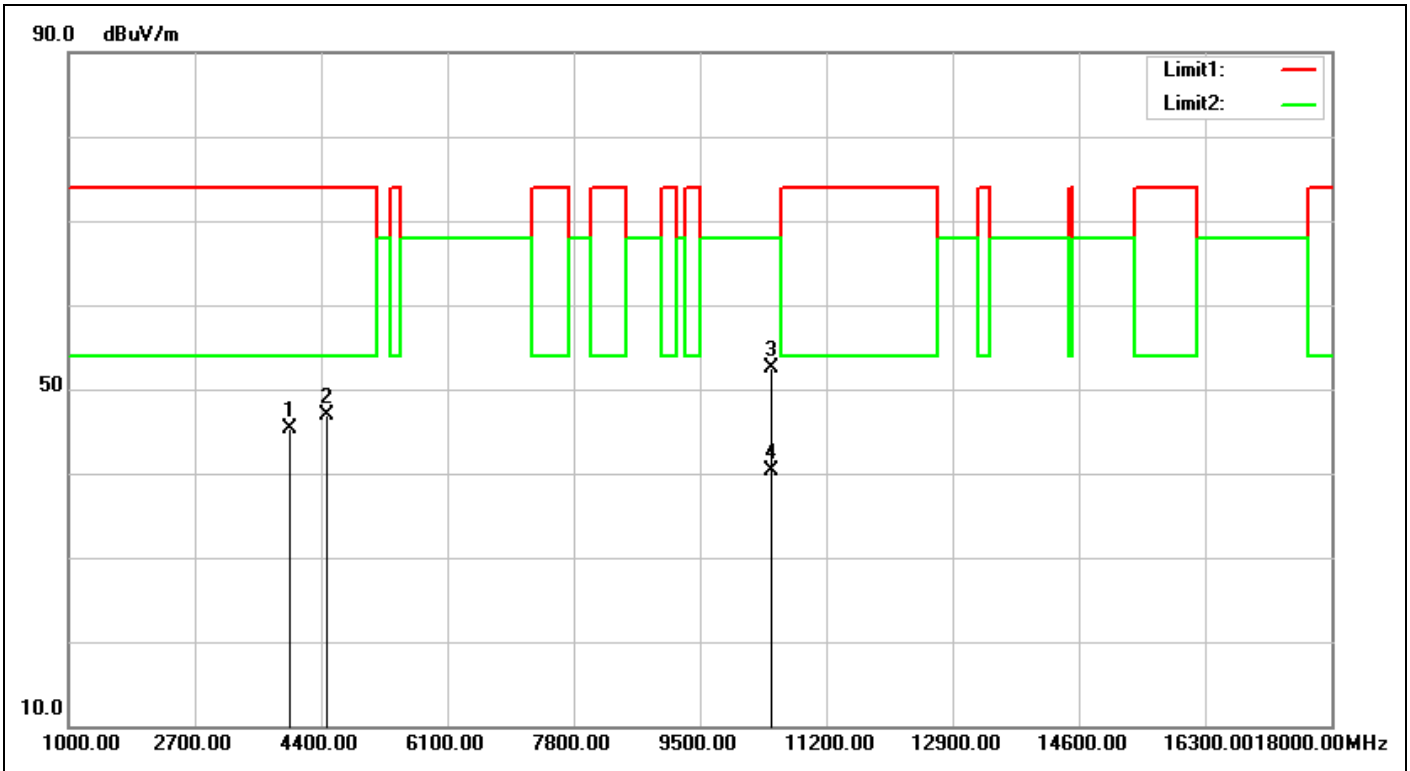


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:46:01
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3975.000	-3.99	49.28	45.29	74.00	-28.71	peak	100	114	
2	4485.000	-2.13	49.08	46.95	74.00	-27.05	peak	100	353	
3	10480.000	5.42	47.06	52.48	68.00	-15.52	peak	100	285	
4	10480.000	5.42	34.95	40.37	68.00	-27.63	AVG	100	285	

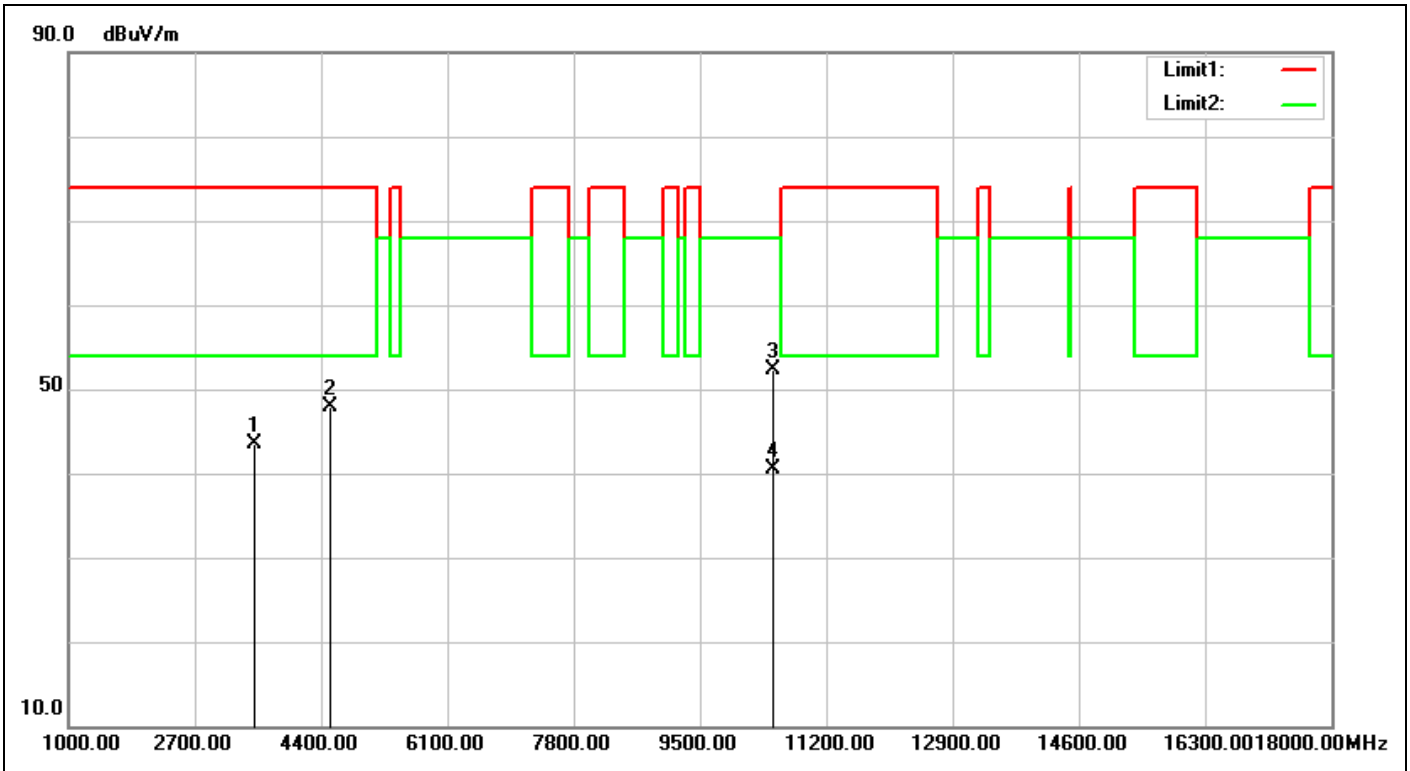


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:46:54
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3499.000	-5.07	48.50	43.43	74.00	-30.57	peak	100	105	
2	4519.000	-2.05	49.96	47.91	74.00	-26.09	peak	100	20	
3	10480.000	5.42	46.79	52.21	68.00	-15.79	peak	100	171	
4	10480.000	5.42	35.12	40.54	68.00	-27.46	AVG	100	171	

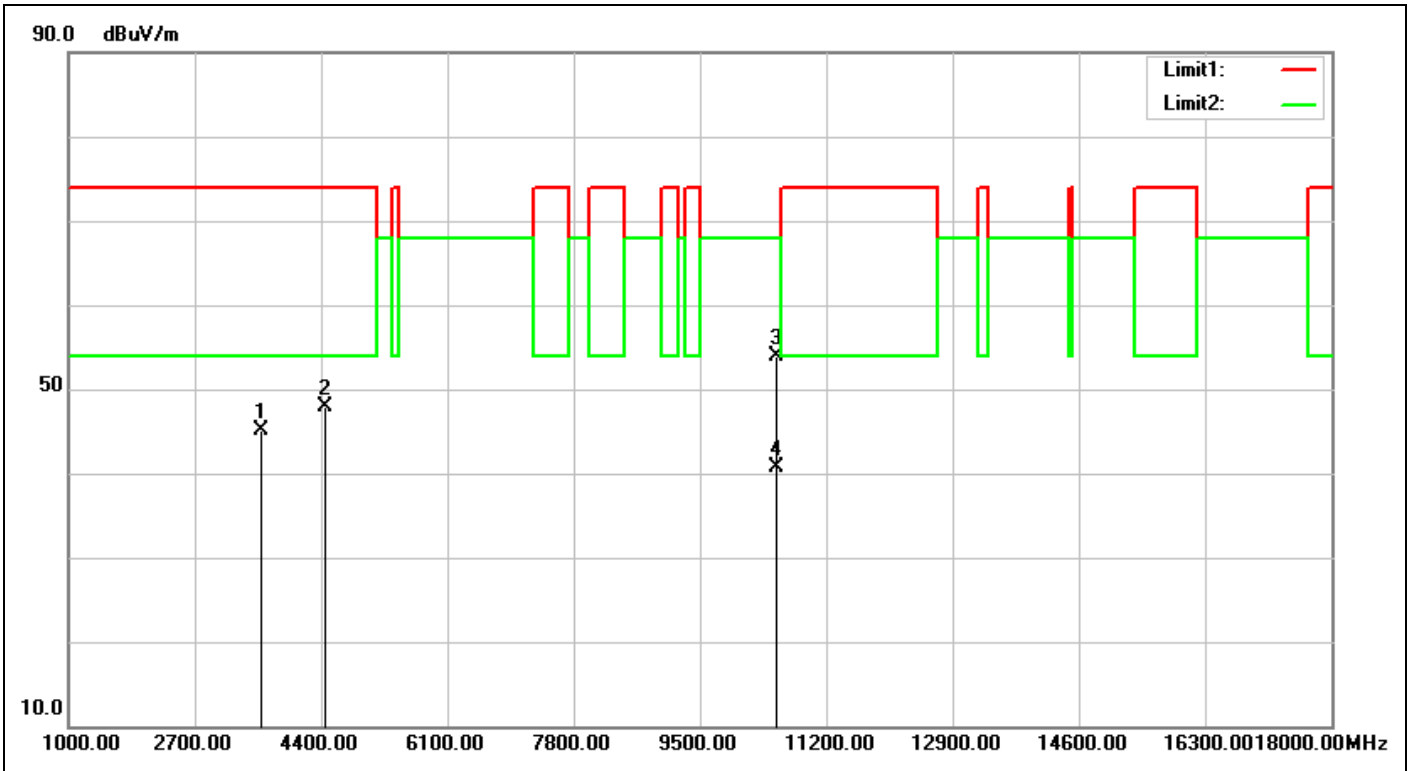


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:32:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3601.000	-4.84	49.97	45.13	74.00	-28.87	peak	100	306	
2	4451.000	-2.26	50.22	47.96	74.00	-26.04	peak	100	237	
3	10520.000	5.37	48.45	53.82	68.00	-14.18	peak	100	213	
4	10520.000	5.37	35.38	40.75	68.00	-27.25	AVG	100	213	

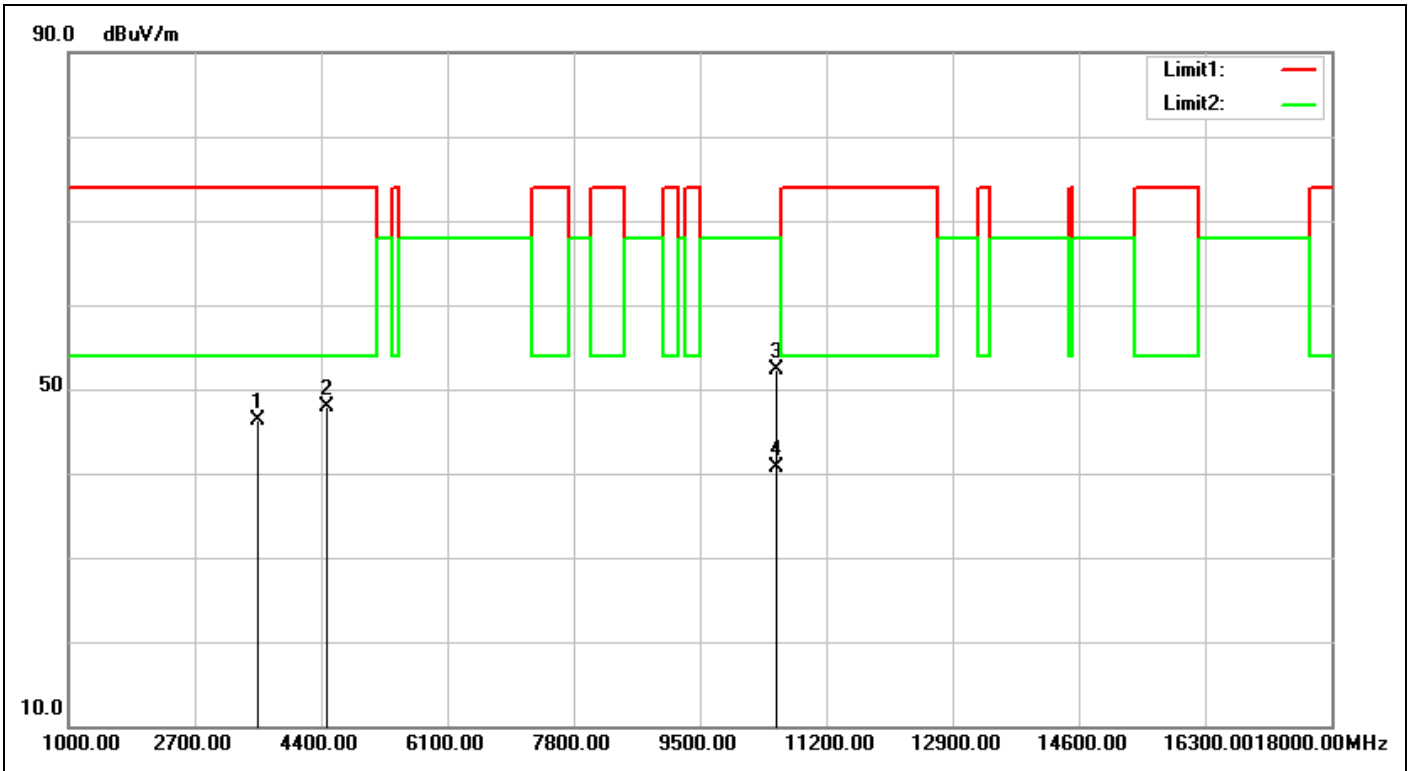


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:33:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3550.000	-4.96	51.31	46.35	74.00	-27.65	peak	100	318	
2	4485.000	-2.13	50.09	47.96	74.00	-26.04	peak	100	232	
3	10520.000	5.37	46.85	52.22	68.00	-15.78	peak	100	68	
4	10520.000	5.37	35.40	40.77	68.00	-27.23	AVG	100	68	

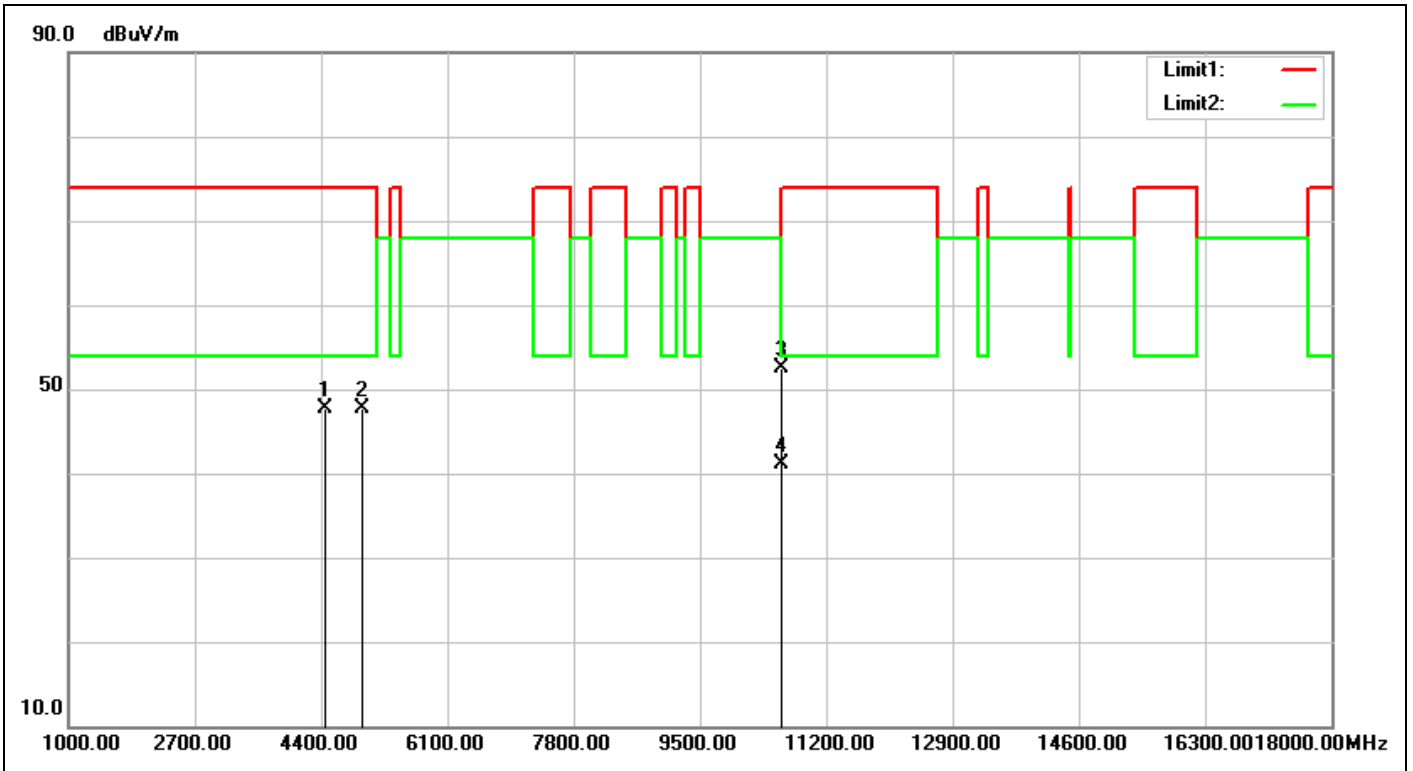


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:45:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4451.000	-2.26	49.96	47.70	74.00	-26.30	peak	100	207	
2	4961.000	-1.44	49.10	47.66	74.00	-26.34	peak	100	343	
3	10600.000	5.28	47.20	52.48	68.00	-15.52	peak	100	360	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	360	

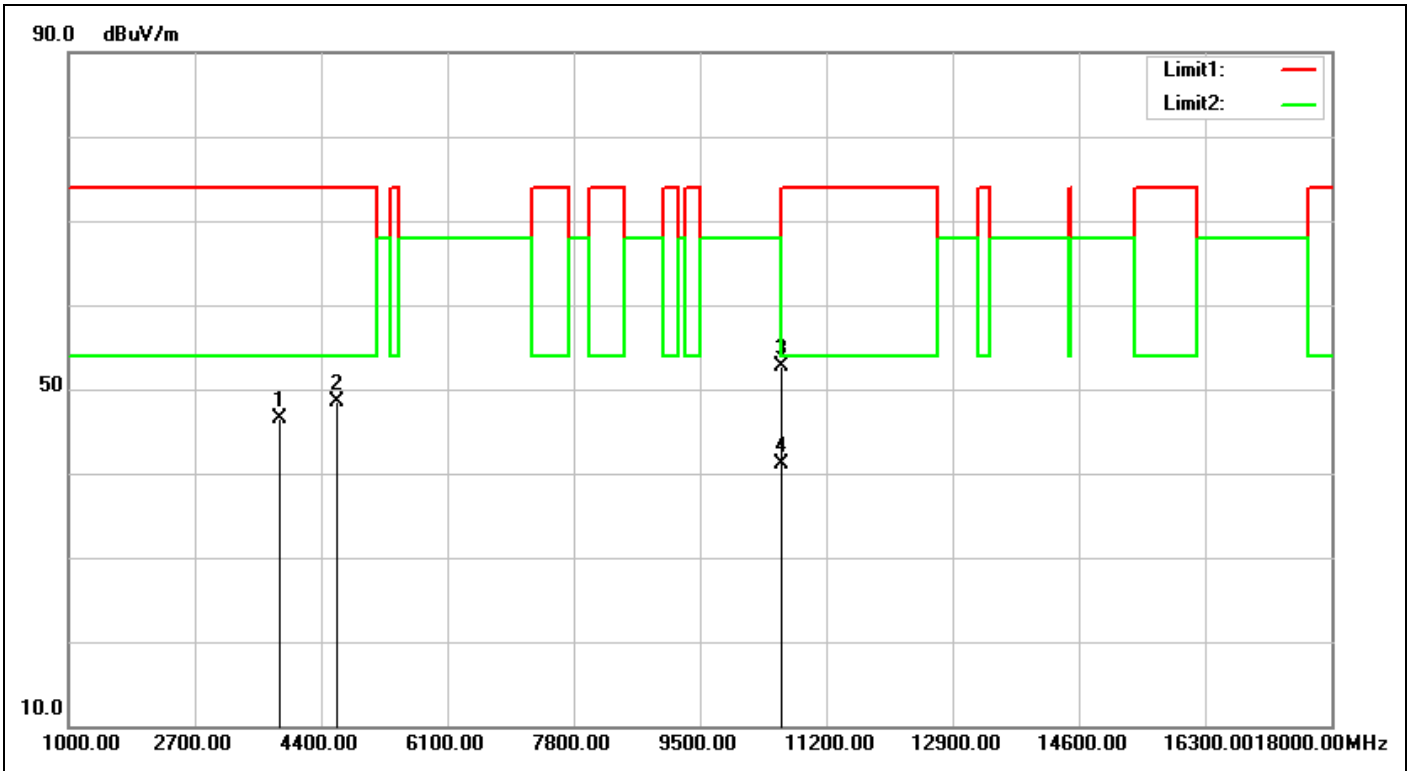


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:46:45
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	50.77	46.46	74.00	-27.54	peak	100	85	
2	4621.000	-1.91	50.43	48.52	74.00	-25.48	peak	100	96	
3	10600.000	5.28	47.33	52.61	68.00	-15.39	peak	100	205	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	205	

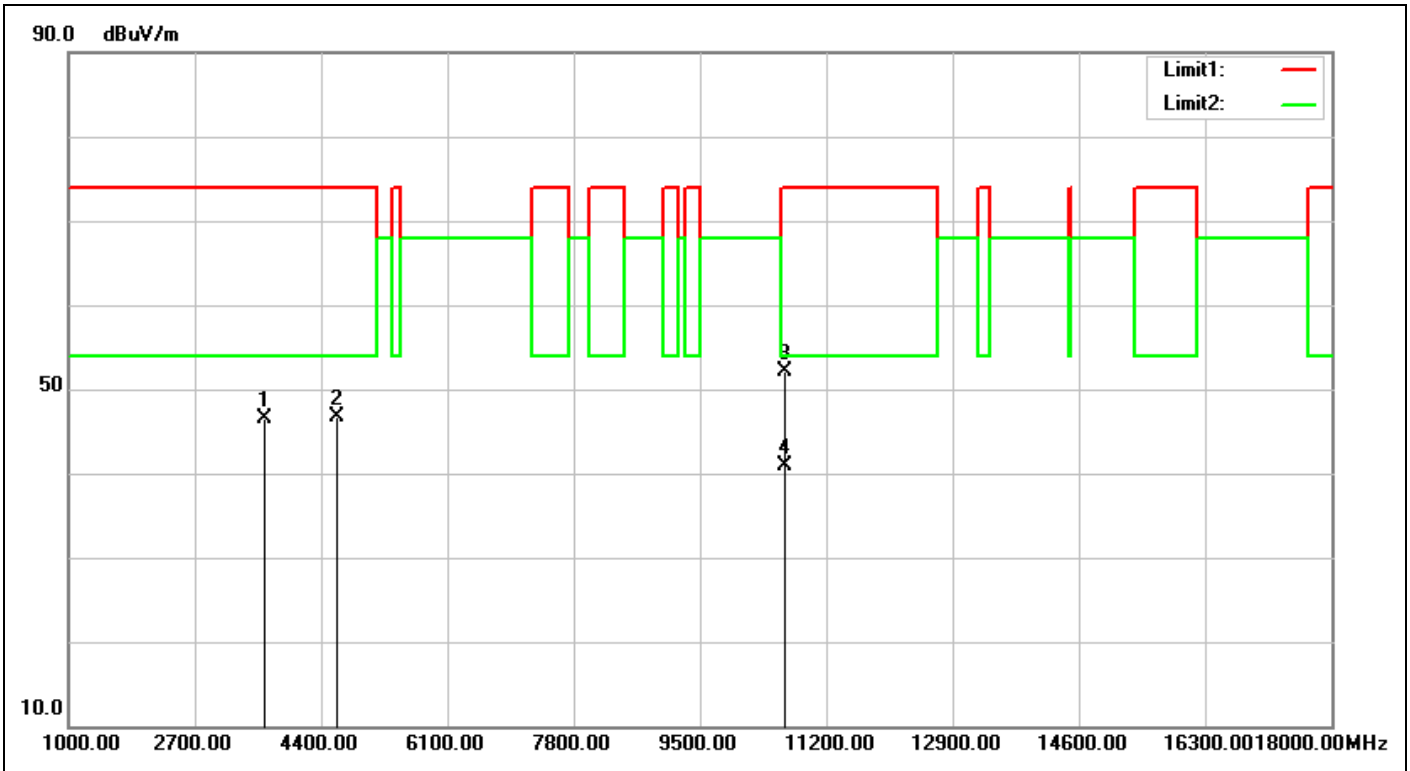


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:03:01
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3635.000	-4.76	51.19	46.43	74.00	-27.57	peak	100	8	
2	4621.000	-1.91	48.53	46.62	74.00	-27.38	peak	100	343	
3	10640.000	5.24	46.96	52.20	74.00	-21.80	peak	100	340	
4	10640.000	5.24	35.74	40.98	54.00	-13.02	AVG	100	340	

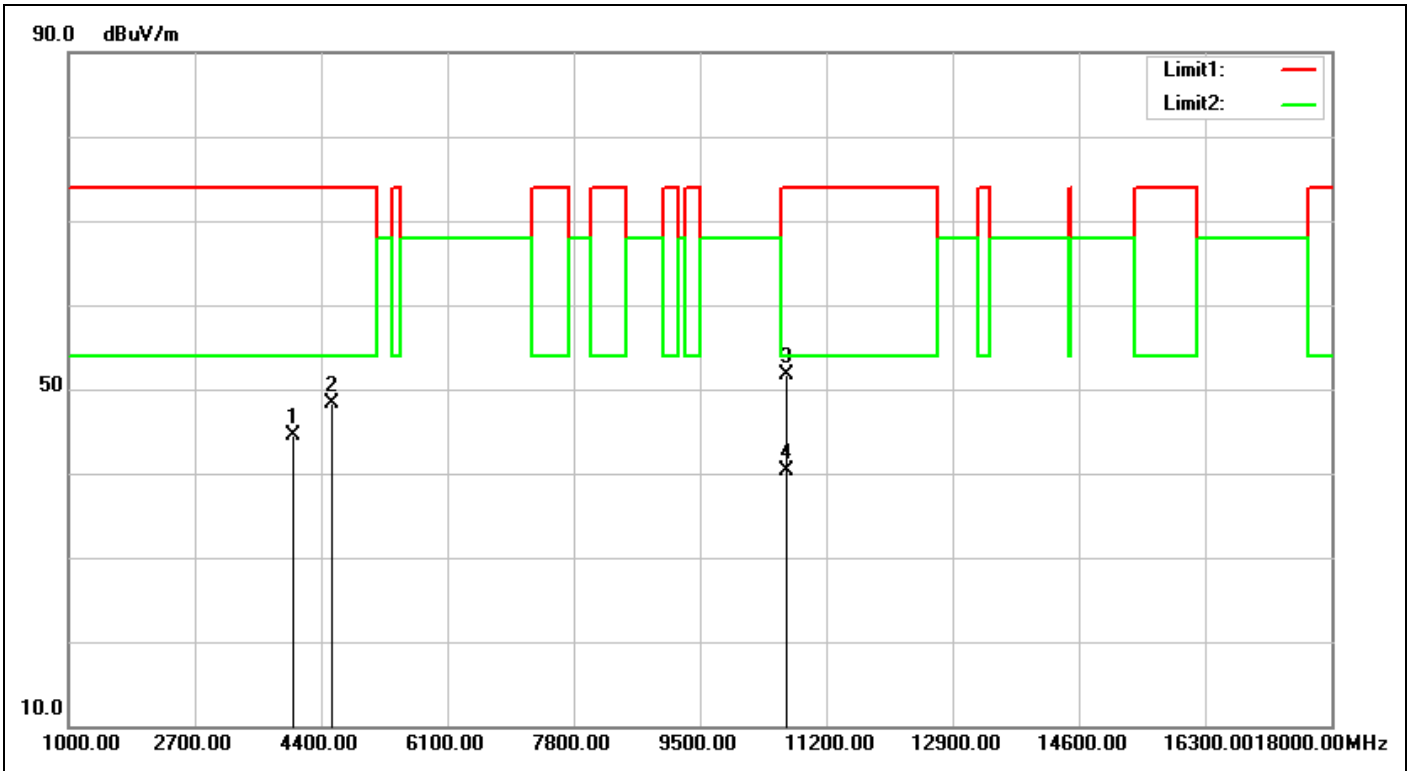


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:03:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4026.000	-3.83	48.35	44.52	74.00	-29.48	peak	100	55	
2	4553.000	-2.01	50.22	48.21	74.00	-25.79	peak	100	58	
3	10640.000	5.24	46.46	51.70	74.00	-22.30	peak	100	304	
4	10640.000	5.24	35.07	40.31	54.00	-13.69	AVG	100	304	

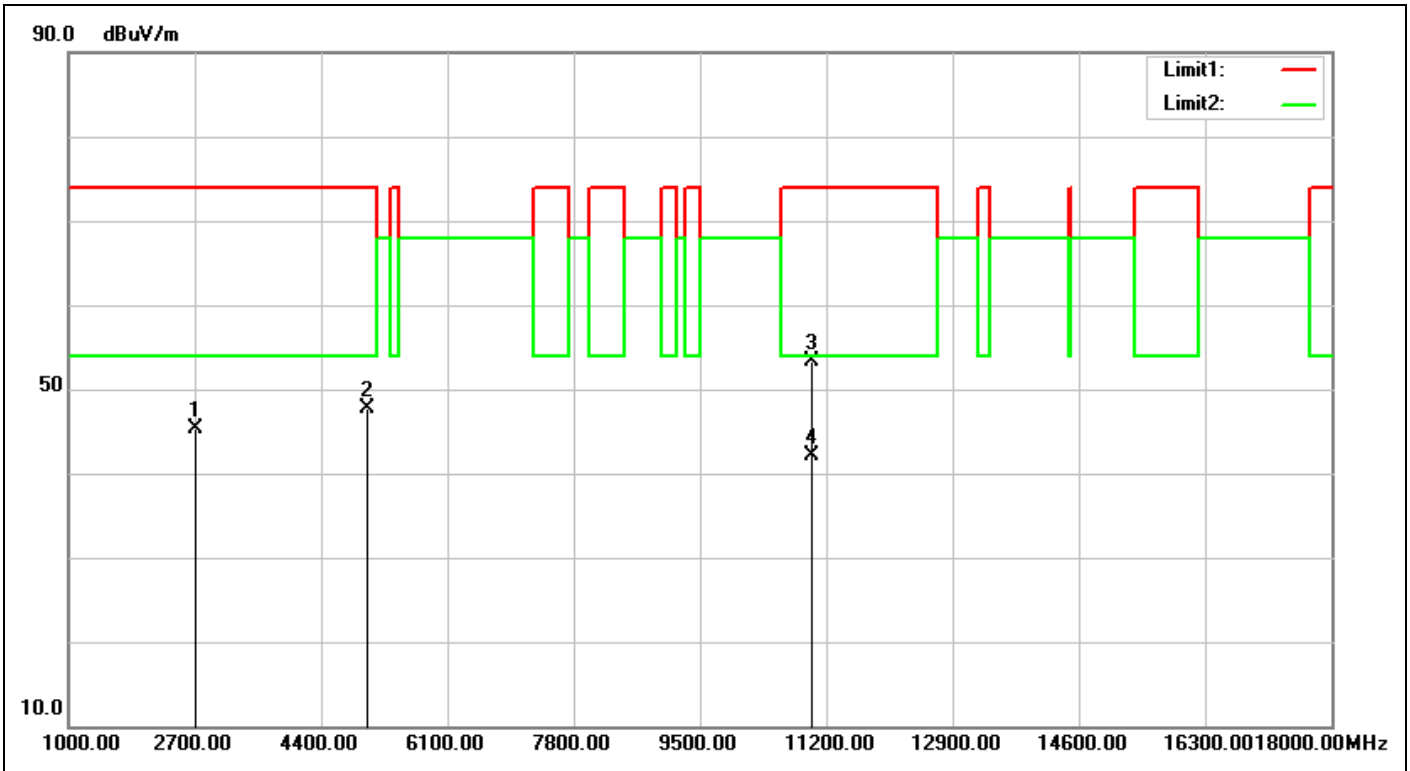


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:01:00
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	51.20	45.24	74.00	-28.76	peak	100	269	
2	5029.000	-1.25	48.90	47.65	74.00	-26.35	peak	112	173	
3	11000.000	4.87	48.35	53.22	74.00	-20.78	peak	100	248	
4	11000.000	4.87	37.14	42.01	54.00	-11.99	AVG	100	248	

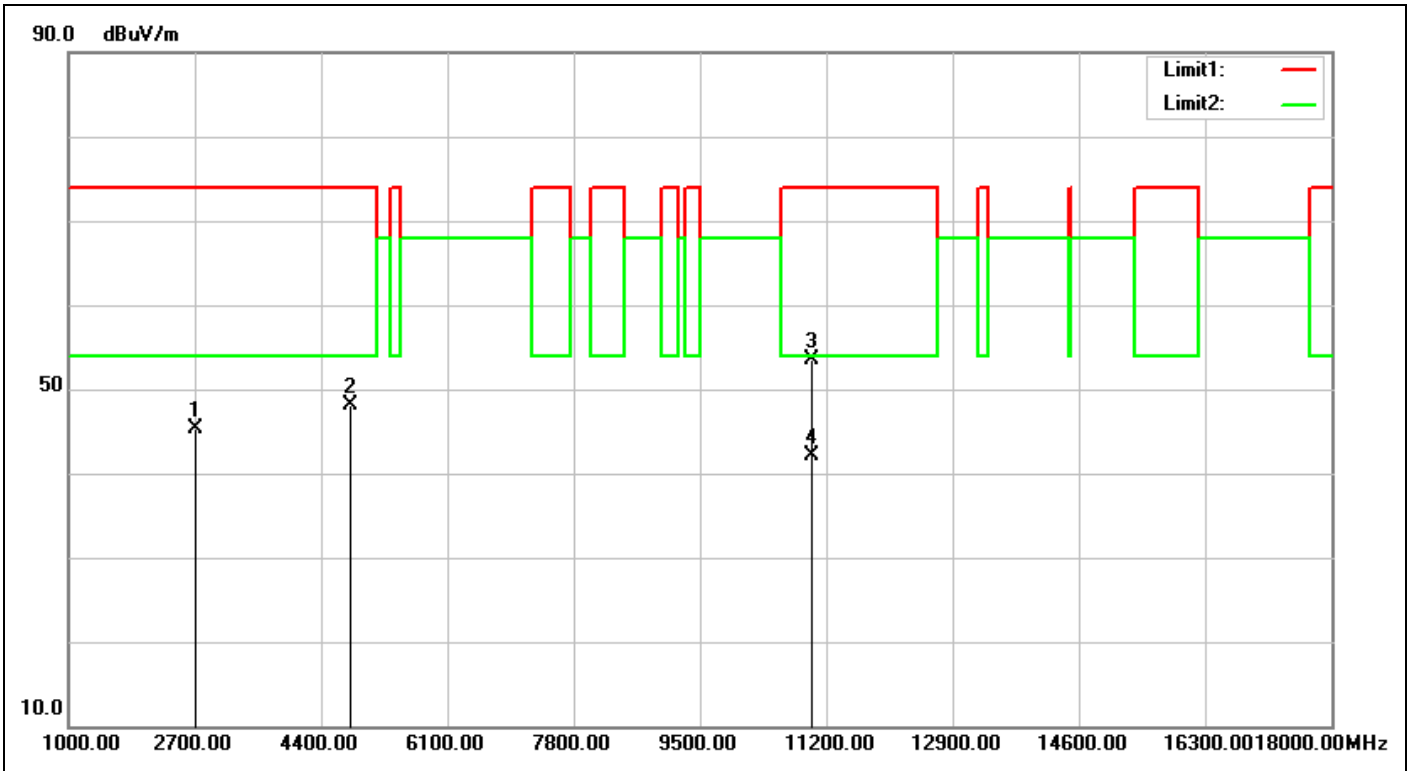


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:01:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2717.000	-5.93	51.23	45.30	74.00	-28.70	peak	100	219	
2	4791.000	-1.67	49.75	48.08	74.00	-25.92	peak	102	260	
3	11000.000	4.87	48.60	53.47	74.00	-20.53	peak	100	154	
4	11000.000	4.87	37.24	42.11	54.00	-11.89	AVG	100	154	

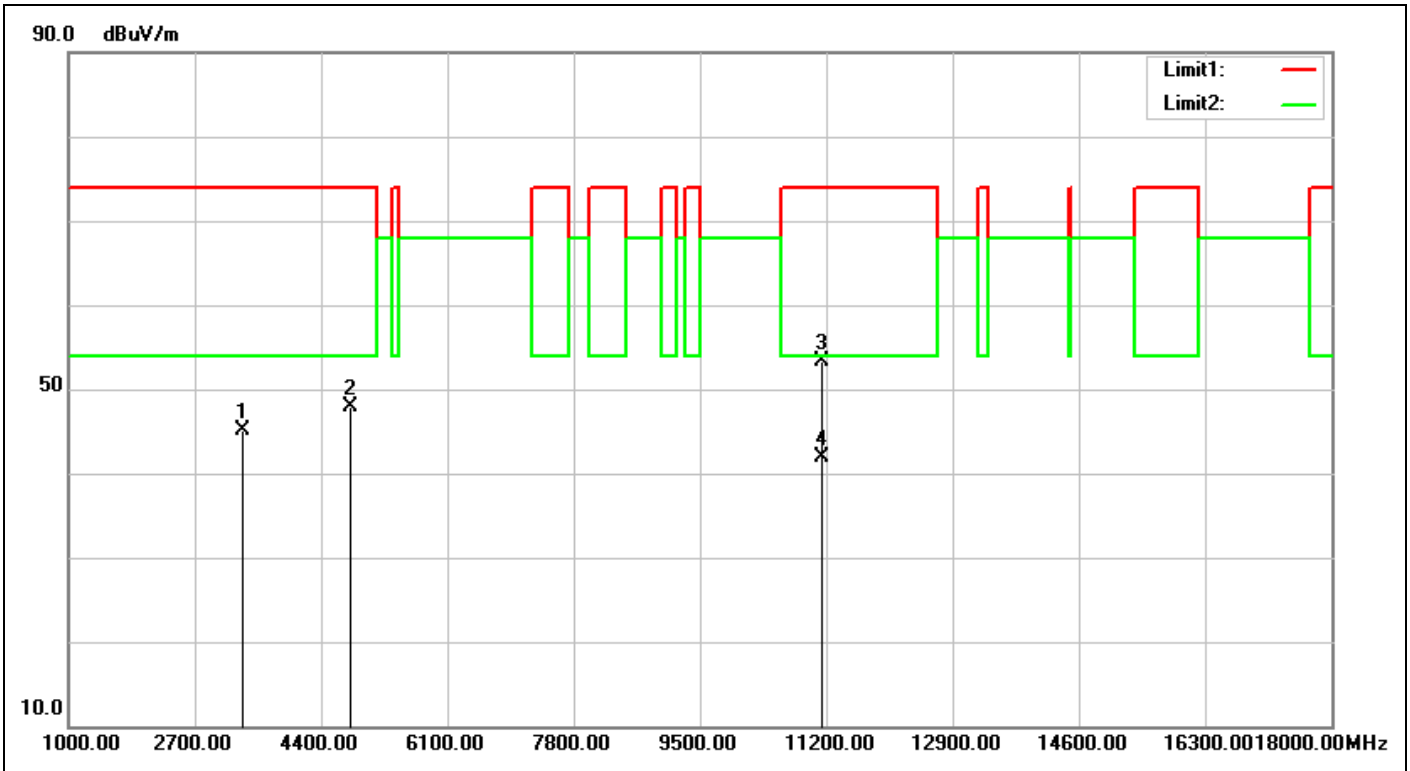


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:07:32
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3346.000	-5.19	50.36	45.17	74.00	-28.83	peak	100	26	
2	4791.000	-1.67	49.61	47.94	74.00	-26.06	peak	100	303	
3	11160.000	5.01	48.26	53.27	74.00	-20.73	peak	100	343	
4	11160.000	5.01	36.91	41.92	54.00	-12.08	AVG	100	343	

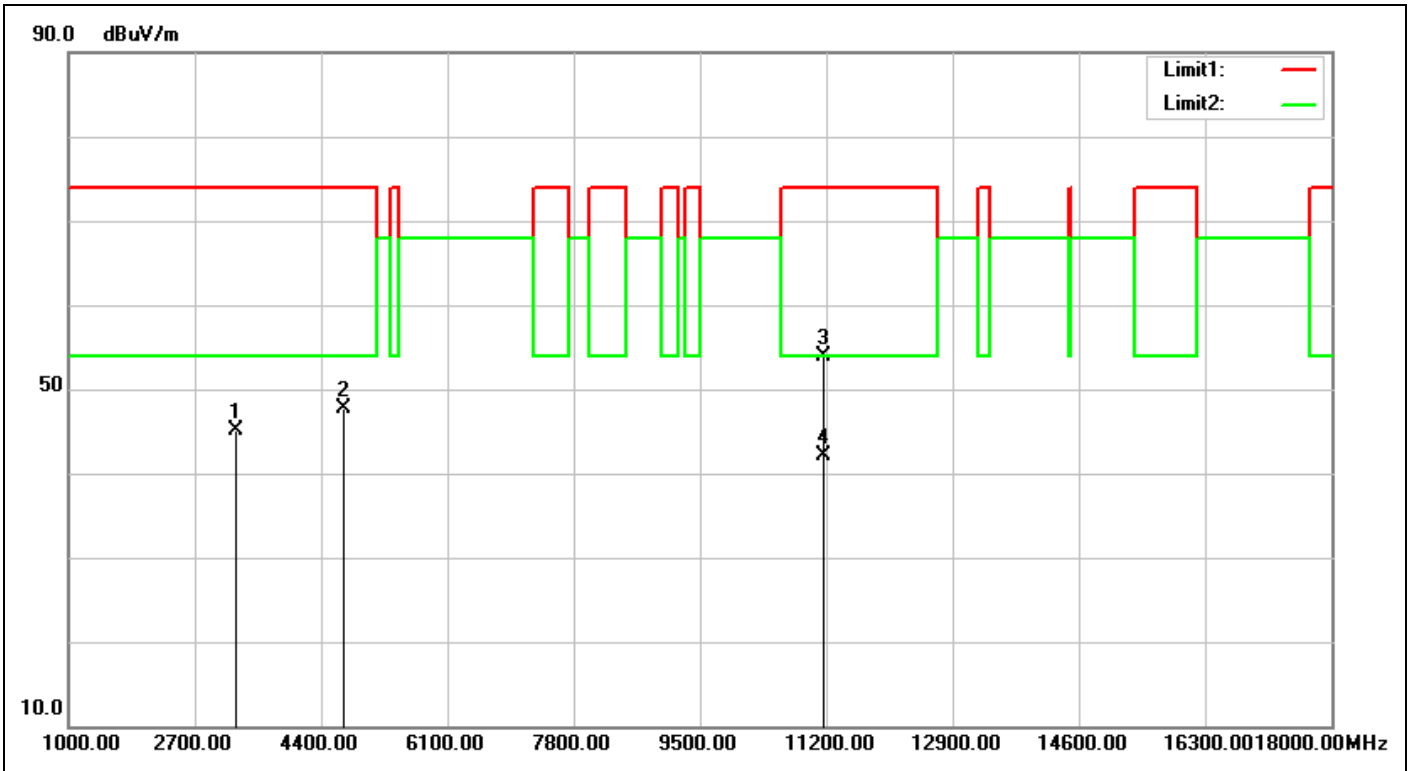


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:08:25
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3261.000	-5.25	50.38	45.13	74.00	-28.87	peak	125	30	
2	4706.000	-1.79	49.51	47.72	74.00	-26.28	peak	100	345	
3	11160.000	5.01	48.95	53.96	74.00	-20.04	peak	100	92	
4	11160.000	5.01	37.17	42.18	54.00	-11.82	AVG	100	92	

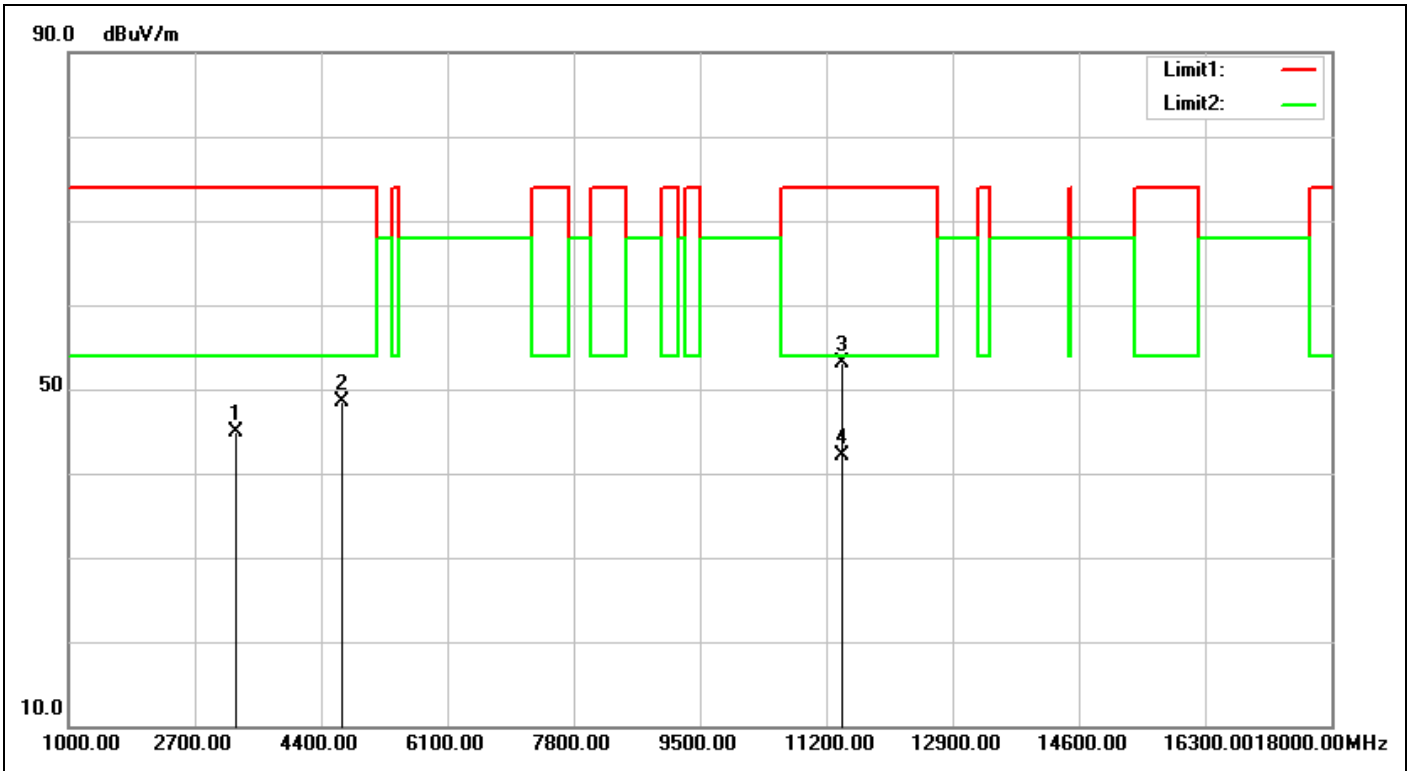


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:14:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3261.000	-5.25	50.20	44.95	74.00	-29.05	peak	100	73	
2	4689.000	-1.81	50.28	48.47	74.00	-25.53	peak	200	15	
3	11400.000	5.23	47.82	53.05	74.00	-20.95	peak	100	168	
4	11400.000	5.23	36.86	42.09	54.00	-11.91	AVG	100	168	

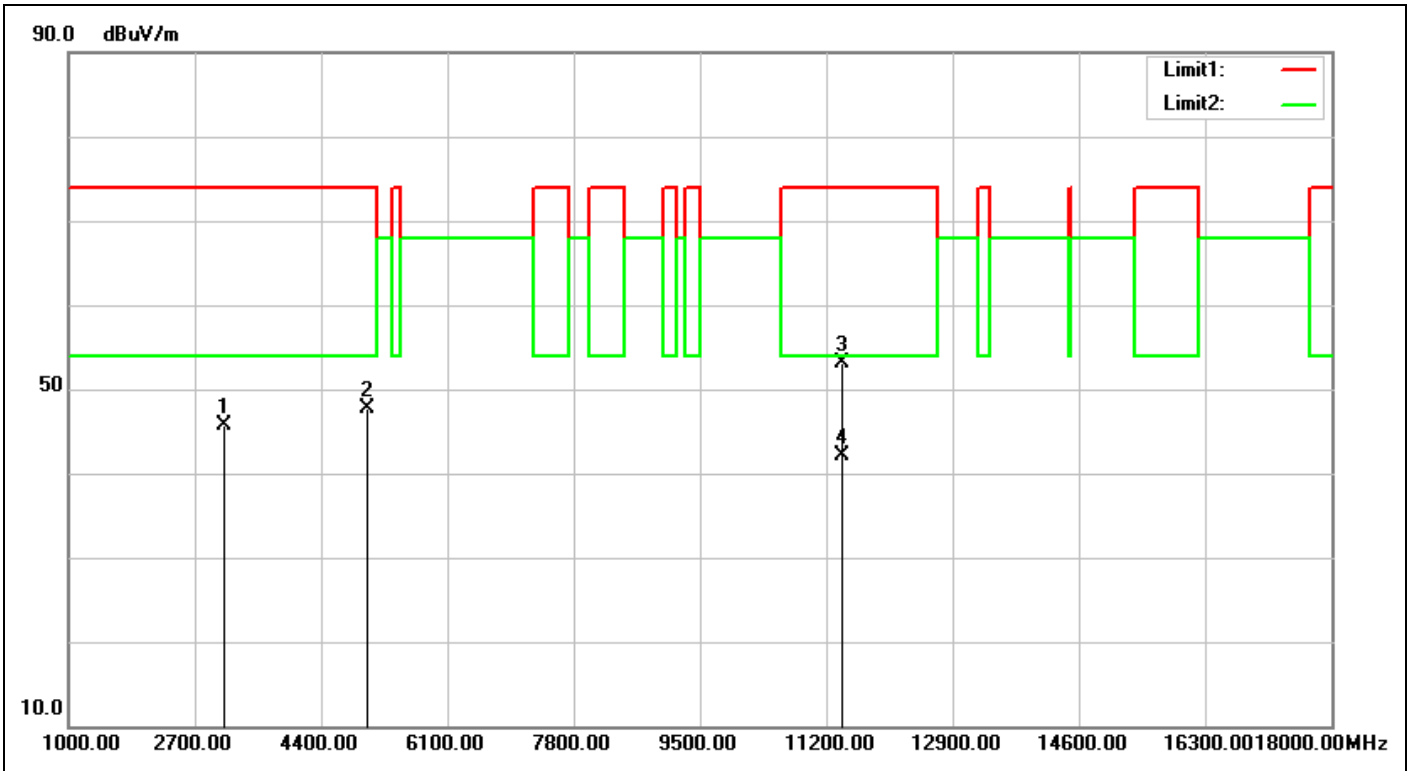


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:15:07
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3091.000	-5.39	51.11	45.72	74.00	-28.28	peak	108	55	
2	5029.000	-1.25	48.97	47.72	74.00	-26.28	peak	100	225	
3	11400.000	5.23	47.92	53.15	74.00	-20.85	peak	100	126	
4	11400.000	5.23	36.97	42.20	54.00	-11.80	AVG	100	126	

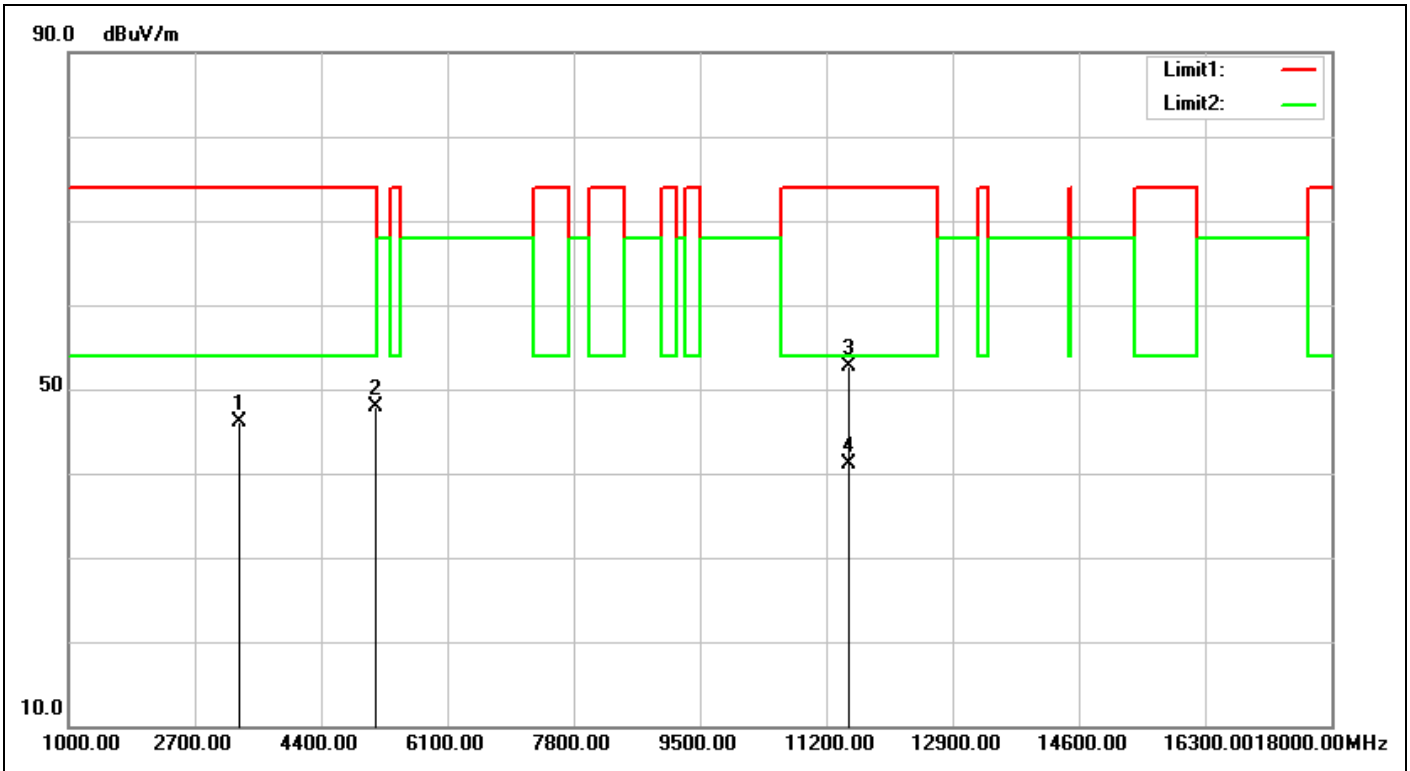


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:17:59
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3295.000	-5.23	51.29	46.06	74.00	-27.94	peak	190	4	
2	5131.000	-0.79	48.72	47.93	74.00	-26.07	peak	108	45	
3	11490.000	5.33	47.32	52.65	74.00	-21.35	peak	100	229	
4	11490.000	5.33	35.68	41.01	54.00	-12.99	AVG	100	229	

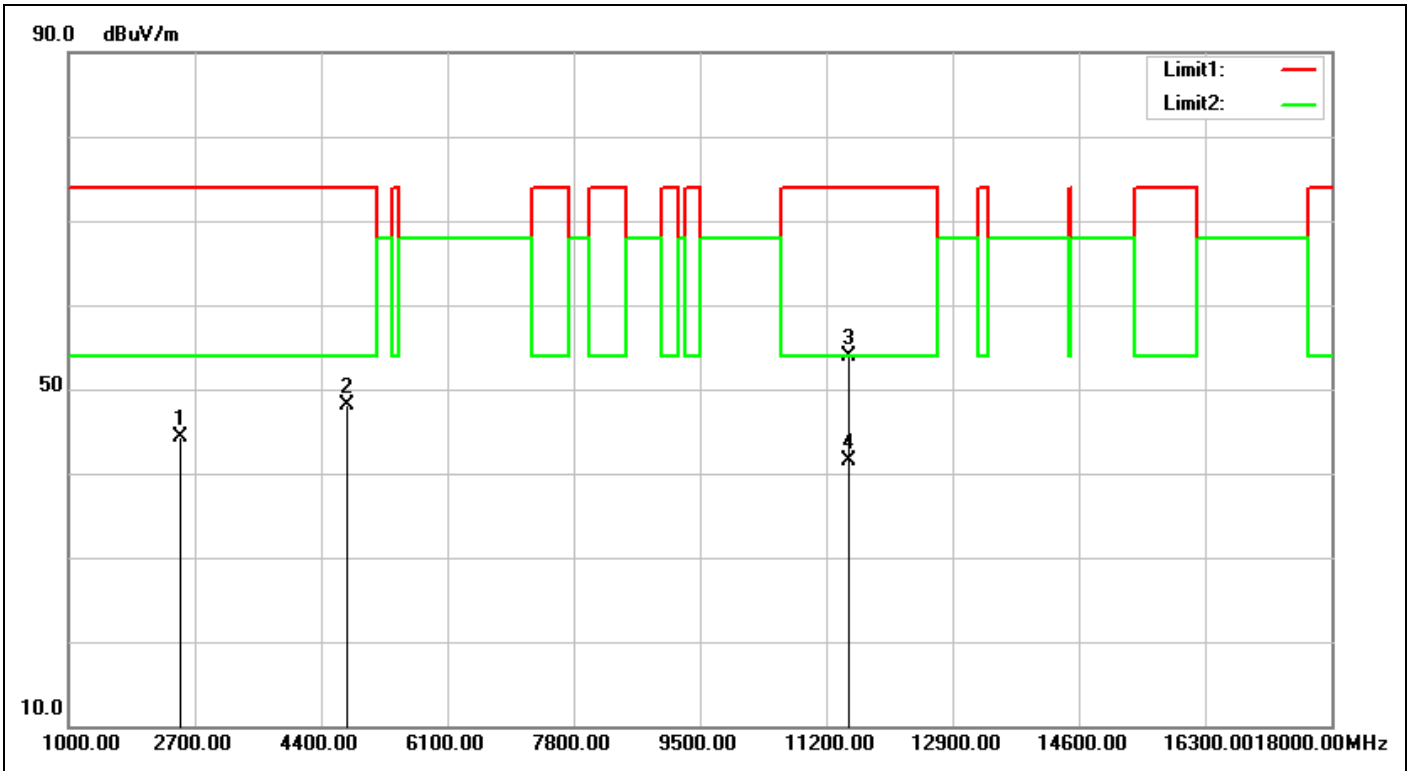


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:18:51
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2513.000	-6.27	50.59	44.32	74.00	-29.68	peak	100	268	
2	4757.000	-1.72	49.79	48.07	74.00	-25.93	peak	100	148	
3	11490.000	5.33	48.48	53.81	74.00	-20.19	peak	102	309	
4	11490.000	5.33	36.17	41.50	54.00	-12.50	AVG	102	309	

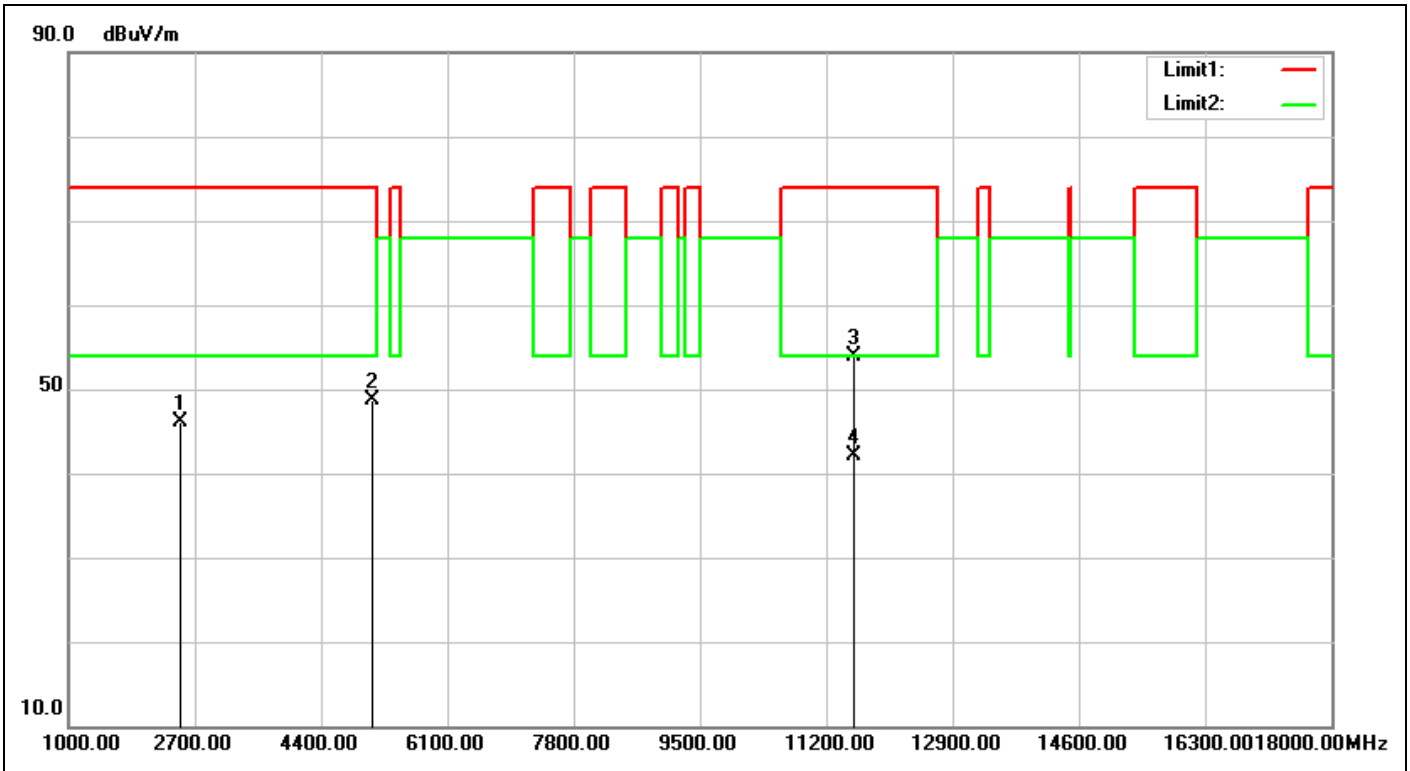


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:25:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	52.39	46.10	74.00	-27.90	peak	100	207	
2	5080.000	-1.02	49.67	48.65	74.00	-25.35	peak	200	139	
3	11570.000	5.59	48.25	53.84	74.00	-20.16	peak	100	39	
4	11570.000	5.59	36.50	42.09	54.00	-11.91	AVG	100	39	

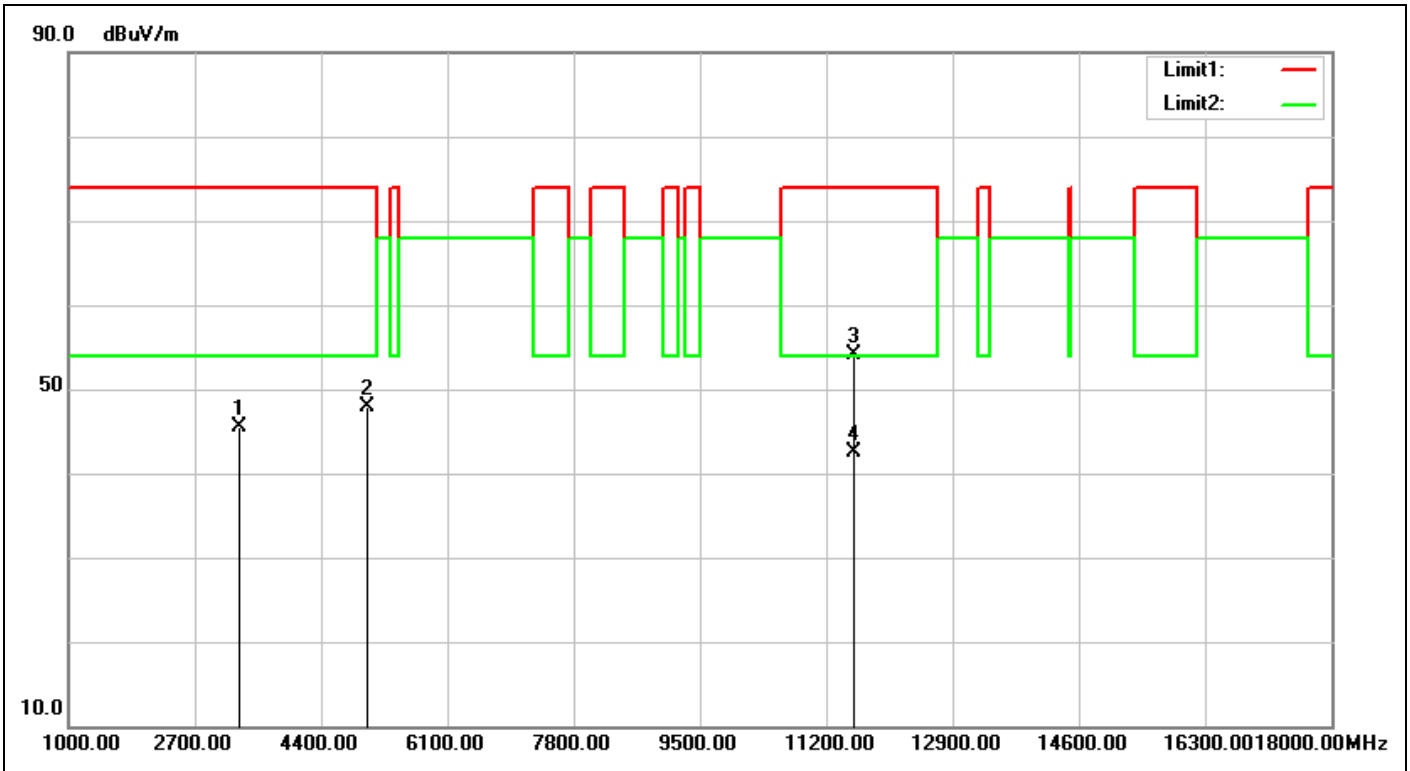


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:25:55
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3295.000	-5.23	50.66	45.43	74.00	-28.57	peak	100	143	
2	5012.000	-1.33	49.20	47.87	74.00	-26.13	peak	100	222	
3	11570.000	5.59	48.44	54.03	74.00	-19.97	peak	100	178	
4	11570.000	5.59	36.92	42.51	54.00	-11.49	AVG	100	178	

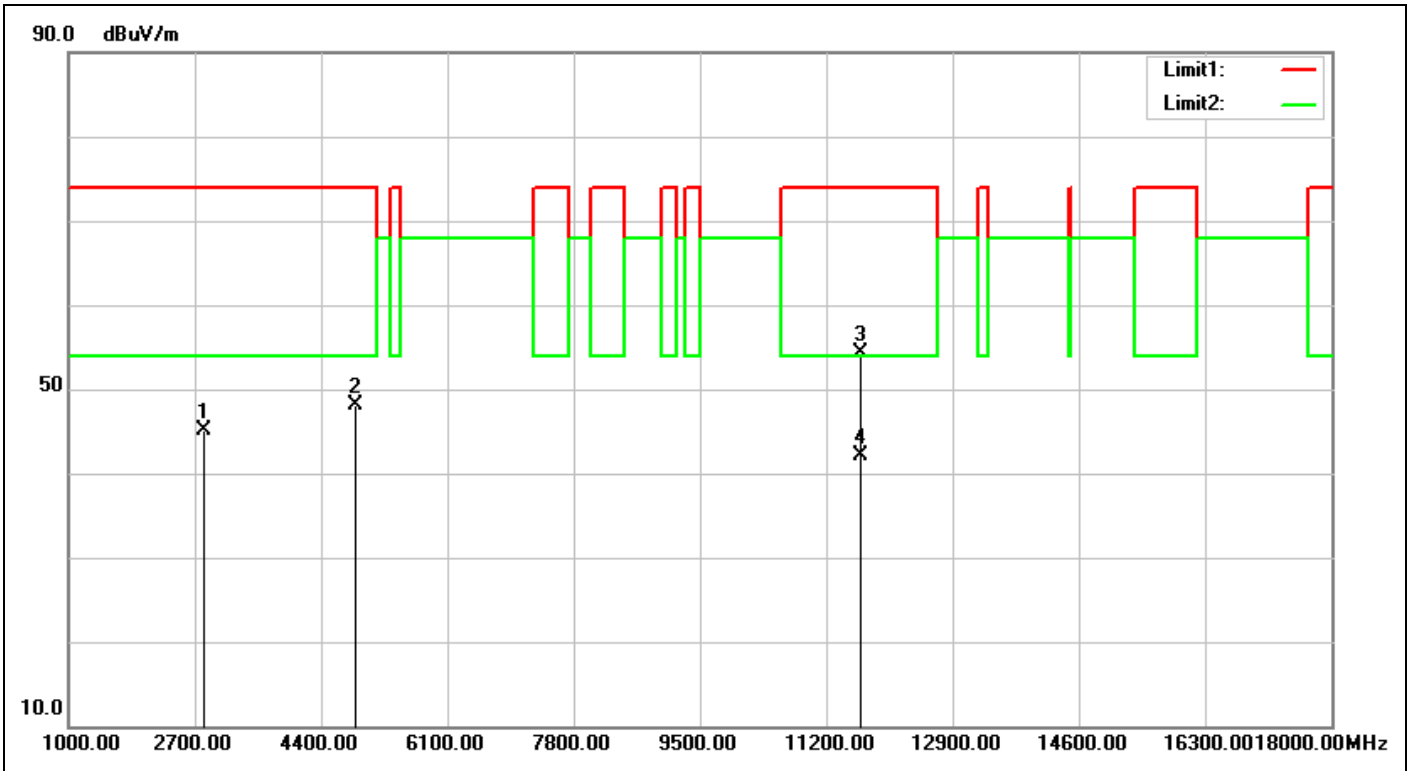


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:33:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2819.000	-5.77	50.97	45.20	74.00	-28.80	peak	120	287	
2	4859.000	-1.58	49.59	48.01	74.00	-25.99	peak	141	45	
3	11650.000	5.90	48.39	54.29	74.00	-19.71	peak	100	99	
4	11650.000	5.90	36.21	42.11	54.00	-11.89	AVG	100	99	

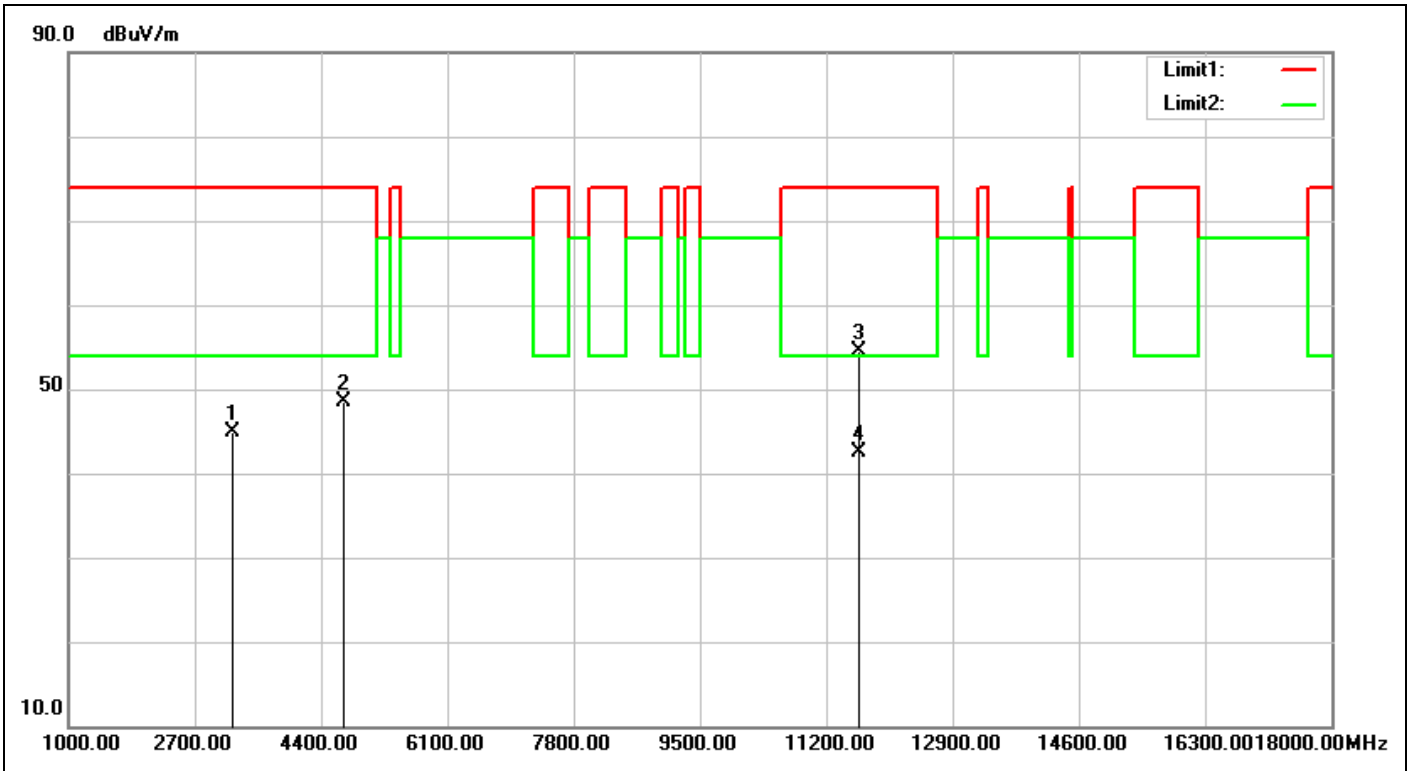


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:34:56
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3210.000	-5.29	50.27	44.98	74.00	-29.02	peak	100	49	
2	4706.000	-1.79	50.37	48.58	74.00	-25.42	peak	100	360	
3	11650.000	5.90	48.68	54.58	74.00	-19.42	peak	105	70	
4	11650.000	5.90	36.55	42.45	54.00	-11.55	AVG	105	70	

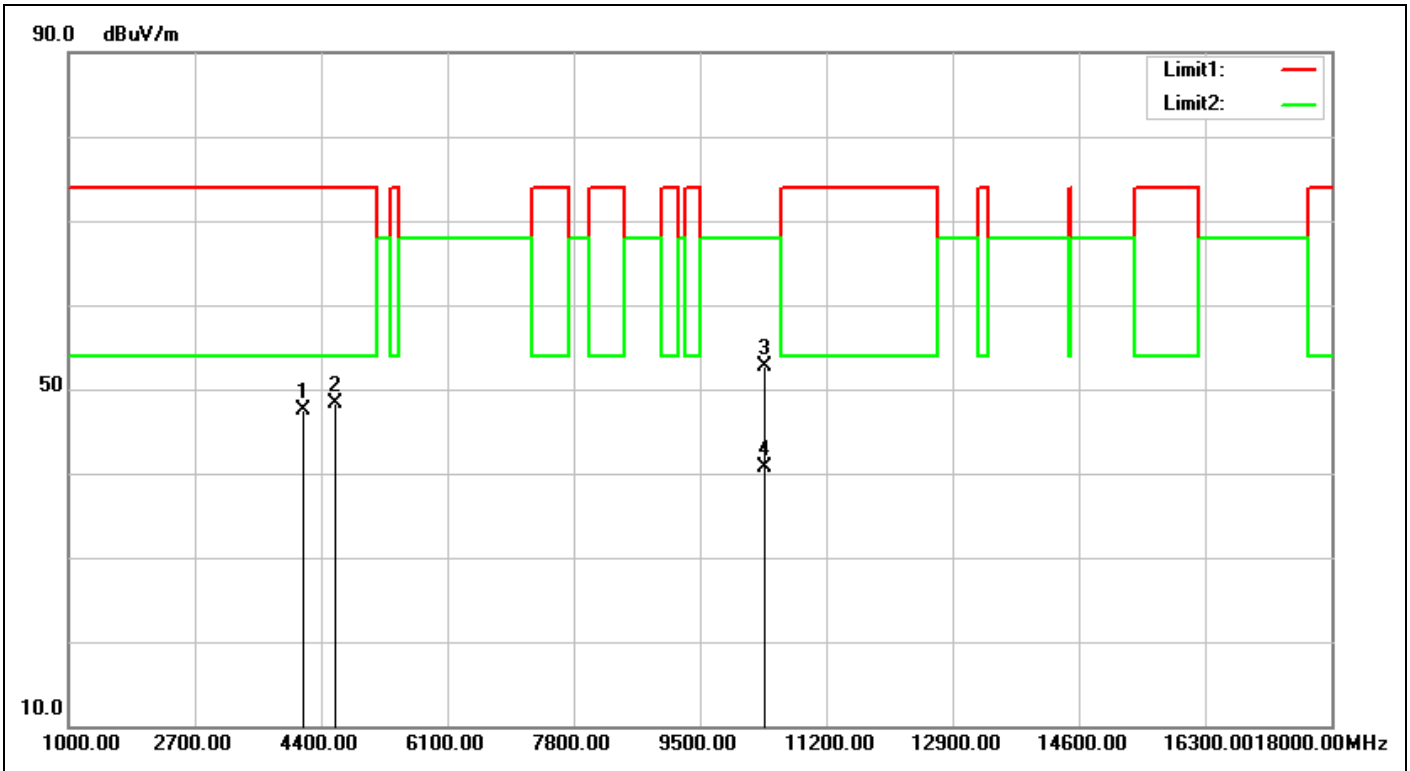


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:51:10
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4162.000	-3.33	50.82	47.49	74.00	-26.51	peak	100	87	
2	4587.000	-1.96	50.23	48.27	74.00	-25.73	peak	100	320	
3	10360.000	5.69	47.09	52.78	68.00	-15.22	peak	100	12	
4	10360.000	5.69	35.03	40.72	68.00	-27.28	AVG	100	12	

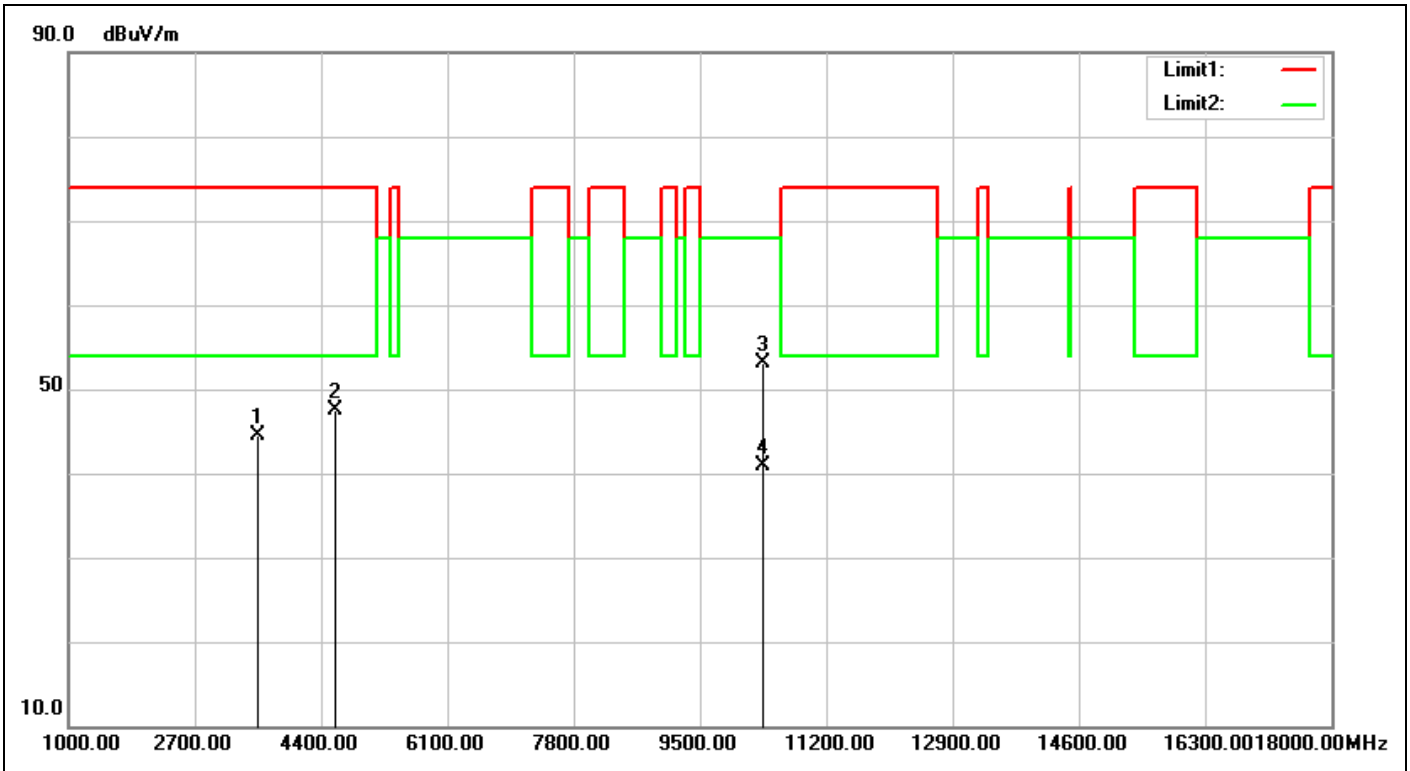


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:52:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5180-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3550.000	-4.96	49.42	44.46	74.00	-29.54	peak	100	304	
2	4587.000	-1.96	49.39	47.43	74.00	-26.57	peak	100	311	
3	10360.000	5.69	47.49	53.18	68.00	-14.82	peak	100	171	
4	10360.000	5.69	35.19	40.88	68.00	-27.12	AVG	100	171	

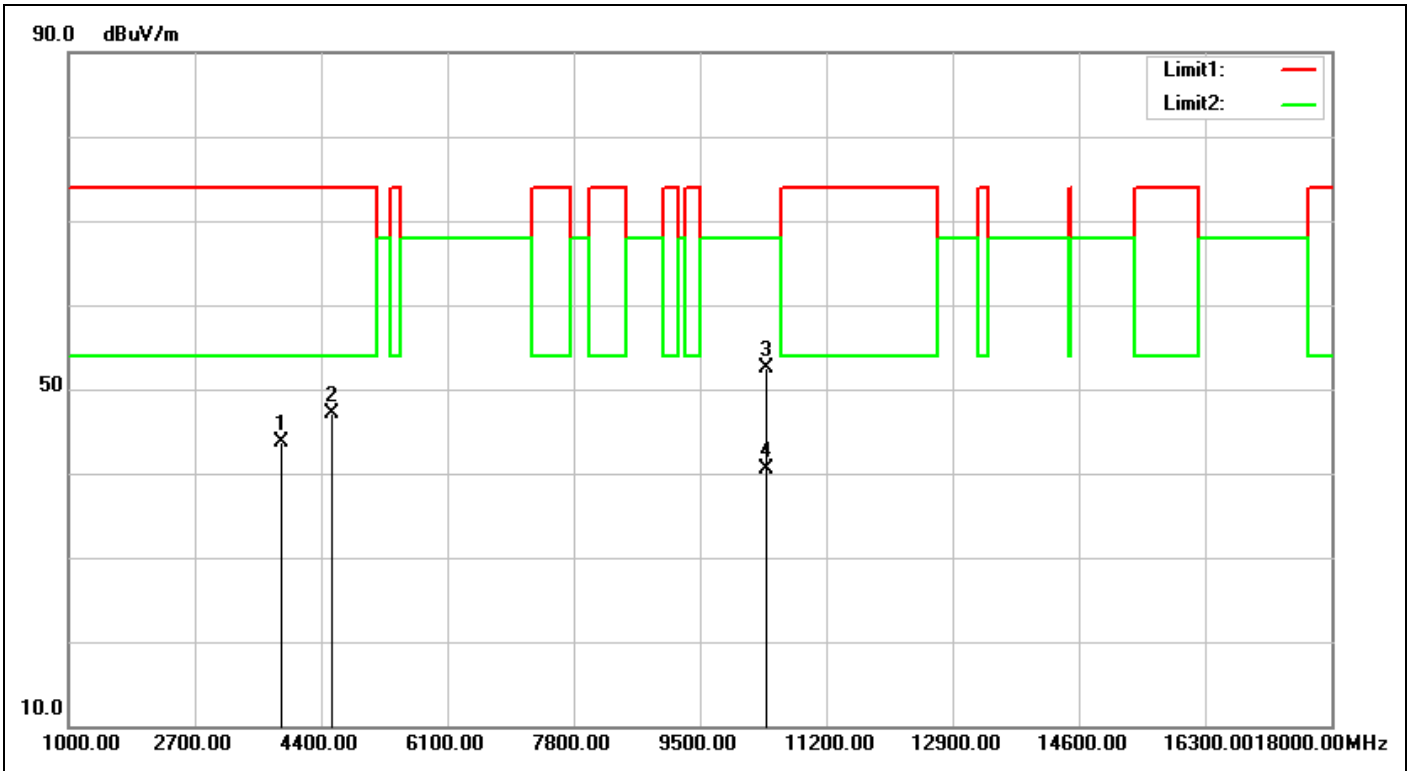


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 15:55:58
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3873.000	-4.22	47.86	43.64	74.00	-30.36	peak	100	1	
2	4553.000	-2.01	49.17	47.16	74.00	-26.84	peak	100	90	
3	10400.000	5.60	46.85	52.45	68.00	-15.55	peak	100	359	
4	10400.000	5.60	34.98	40.58	68.00	-27.42	AVG	100	359	

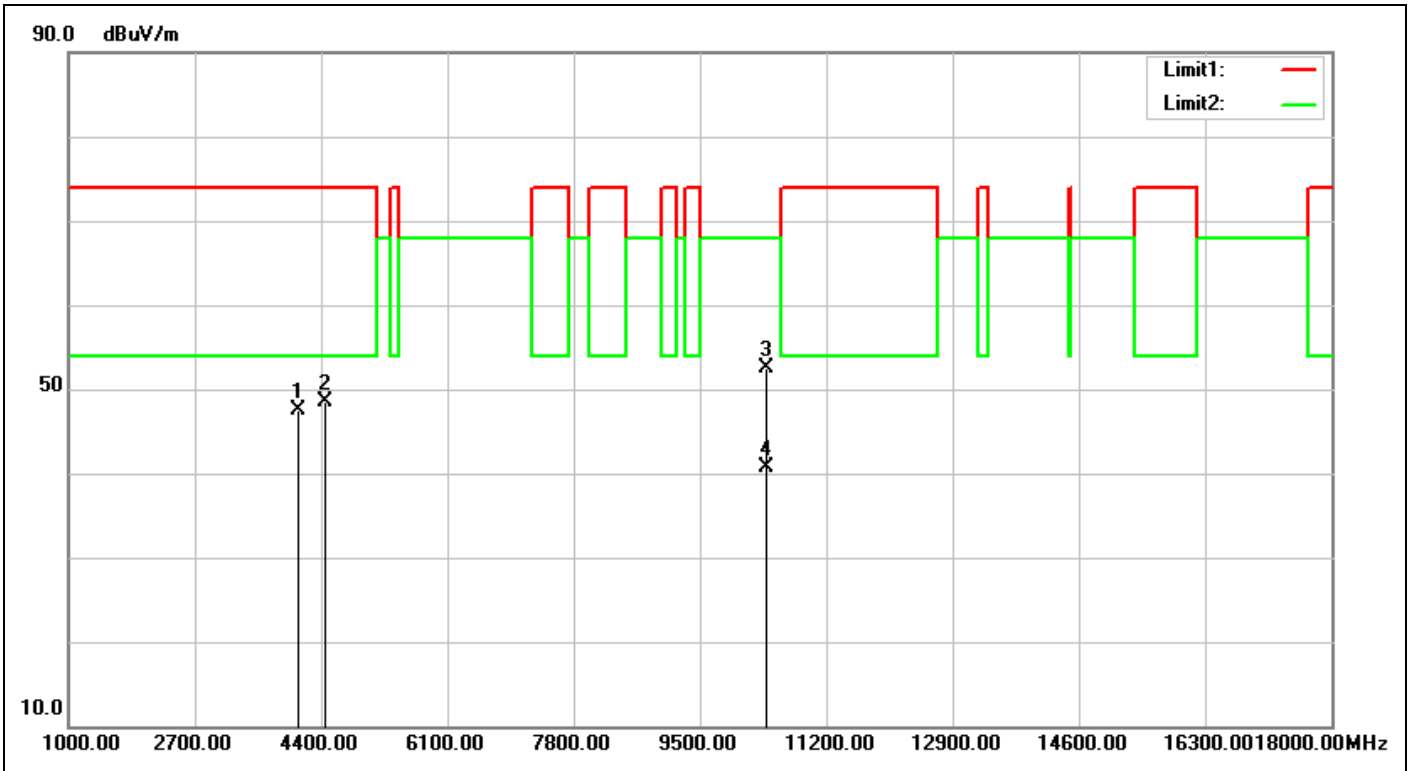


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 15:56:50
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5200-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4094.000	-3.59	51.16	47.57	74.00	-26.43	peak	100	311	
2	4451.000	-2.26	50.75	48.49	74.00	-25.51	peak	100	109	
3	10400.000	5.60	46.97	52.57	68.00	-15.43	peak	100	75	
4	10400.000	5.60	35.03	40.63	68.00	-27.37	AVG	100	75	

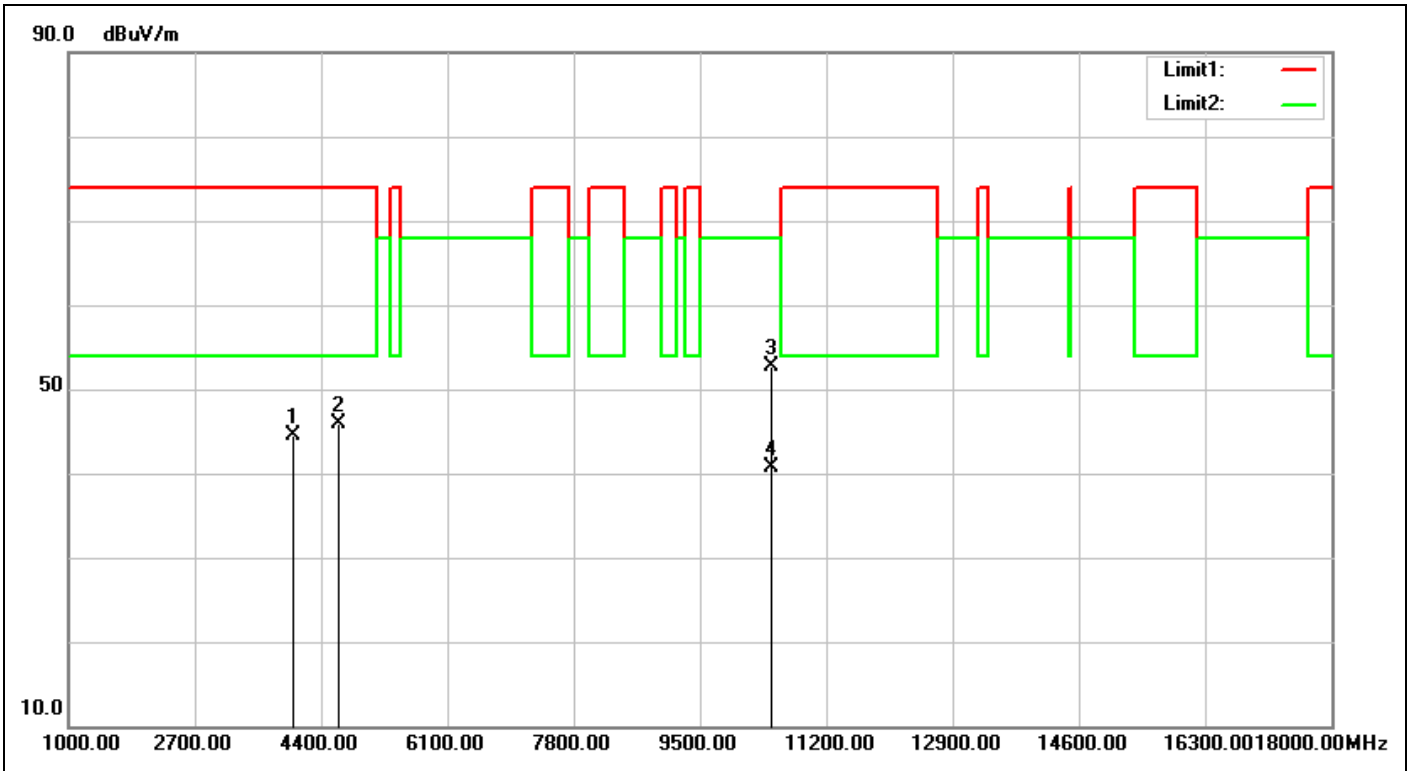


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:01:27
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4026.000	-3.83	48.35	44.52	74.00	-29.48	peak	100	340	
2	4638.000	-1.88	47.78	45.90	74.00	-28.10	peak	100	360	
3	10480.000	5.42	47.36	52.78	68.00	-15.22	peak	100	29	
4	10480.000	5.42	35.23	40.65	68.00	-27.35	AVG	100	29	

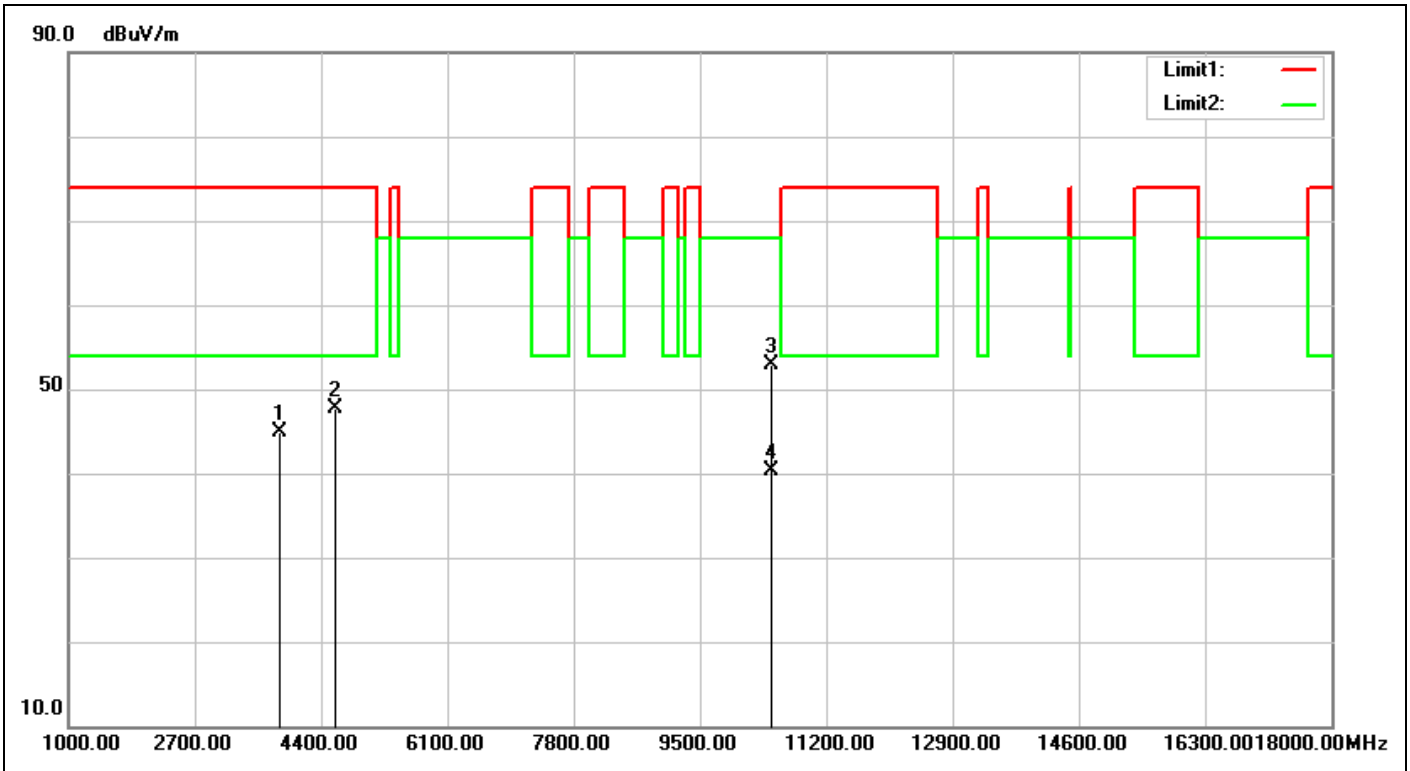


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:02:19
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5240-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3839.000	-4.31	49.26	44.95	74.00	-29.05	peak	100	243	
2	4587.000	-1.96	49.58	47.62	74.00	-26.38	peak	100	294	
3	10480.000	5.42	47.47	52.89	68.00	-15.11	peak	100	349	
4	10480.000	5.42	34.93	40.35	68.00	-27.65	AVG	100	349	

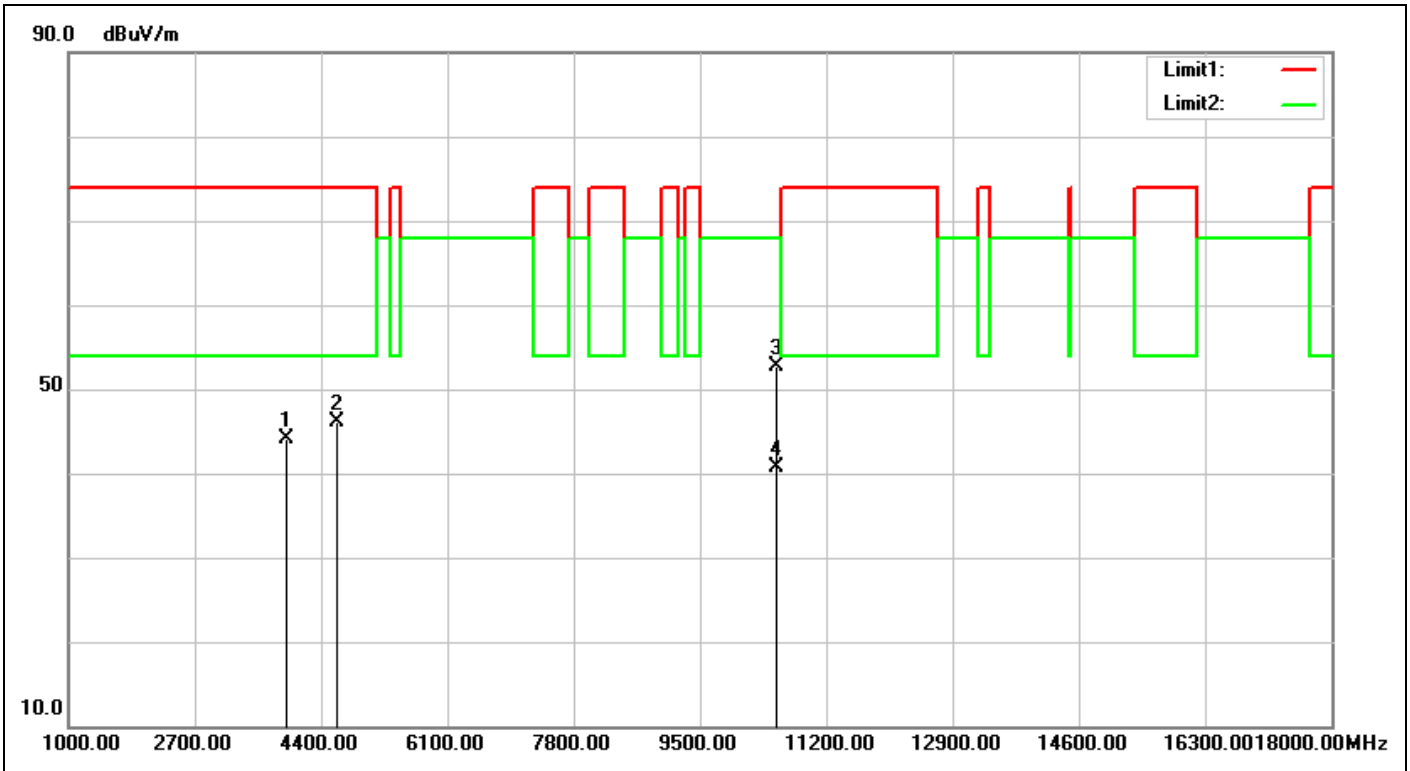


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:08:49
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3941.000	-4.06	48.16	44.10	74.00	-29.90	peak	100	173	
2	4621.000	-1.91	48.03	46.12	74.00	-27.88	peak	100	320	
3	10520.000	5.37	47.26	52.63	68.00	-15.37	peak	100	359	
4	10520.000	5.37	35.39	40.76	68.00	-27.24	AVG	100	359	

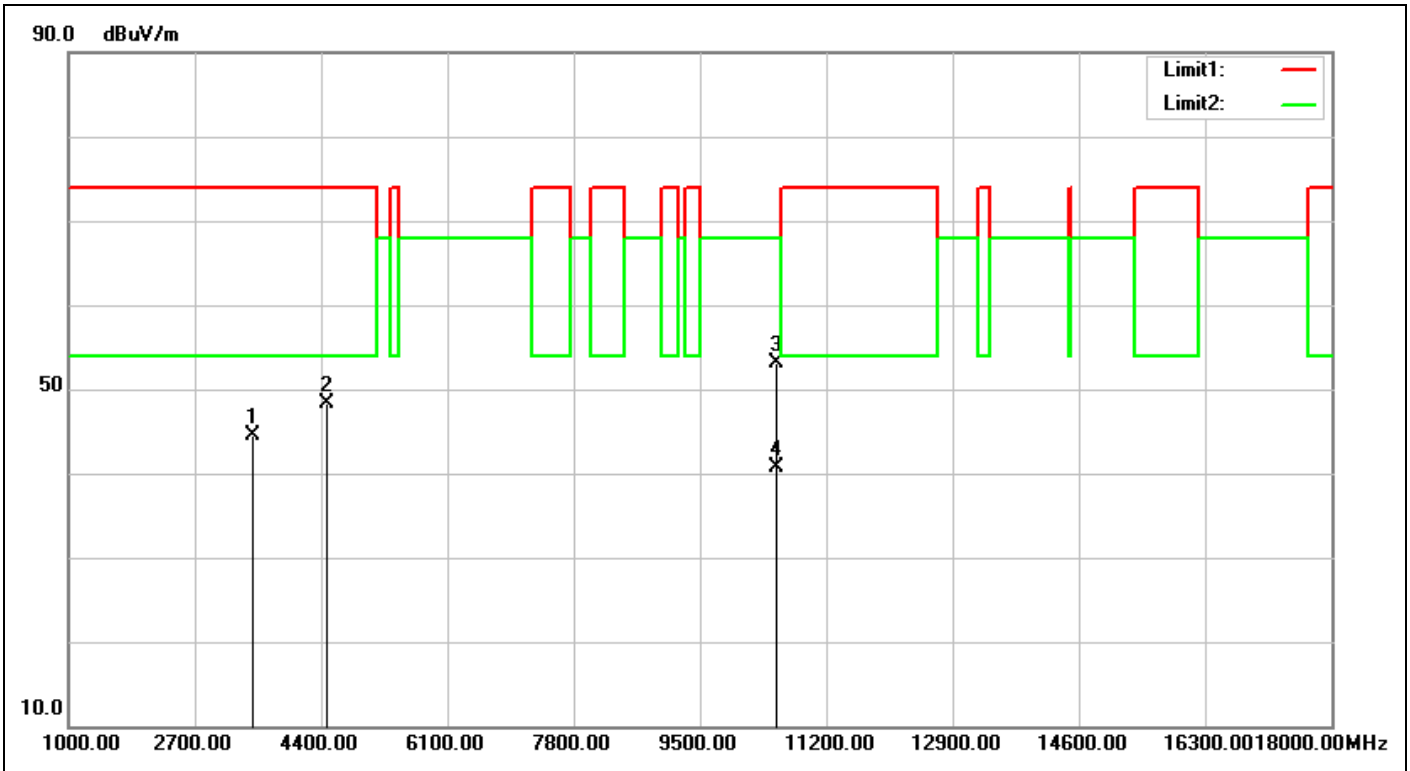


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:09:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5260-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3482.000	-5.08	49.49	44.41	74.00	-29.59	peak	100	55	
2	4485.000	-2.13	50.46	48.33	74.00	-25.67	peak	100	95	
3	10520.000	5.37	47.71	53.08	68.00	-14.92	peak	100	358	
4	10520.000	5.37	35.40	40.77	68.00	-27.23	AVG	100	358	

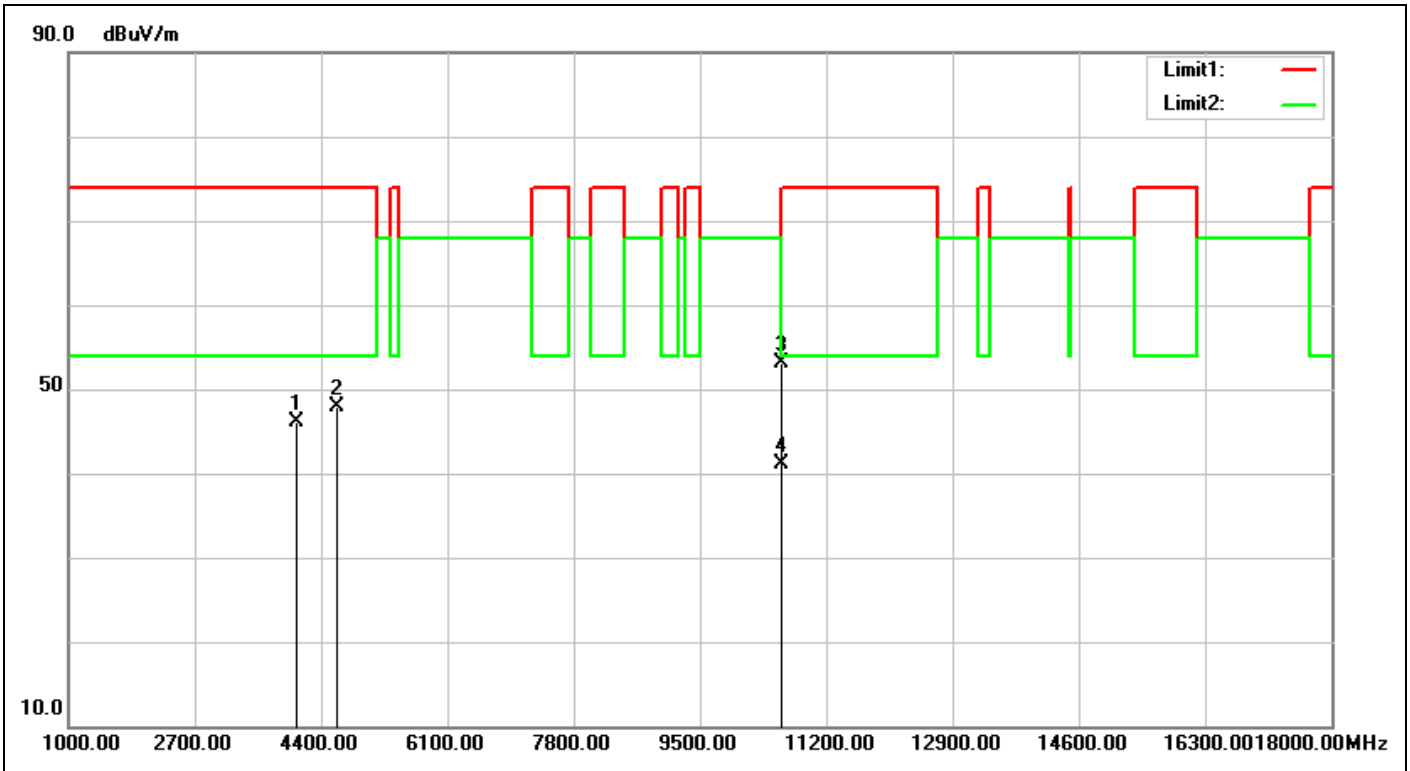


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 17:12:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4060.000	-3.70	49.87	46.17	74.00	-27.83	peak	100	66	
2	4604.000	-1.94	49.92	47.98	74.00	-26.02	peak	100	110	
3	10600.000	5.28	47.78	53.06	68.00	-14.94	peak	100	360	
4	10600.000	5.28	35.80	41.08	54.00	-12.92	AVG	100	360	

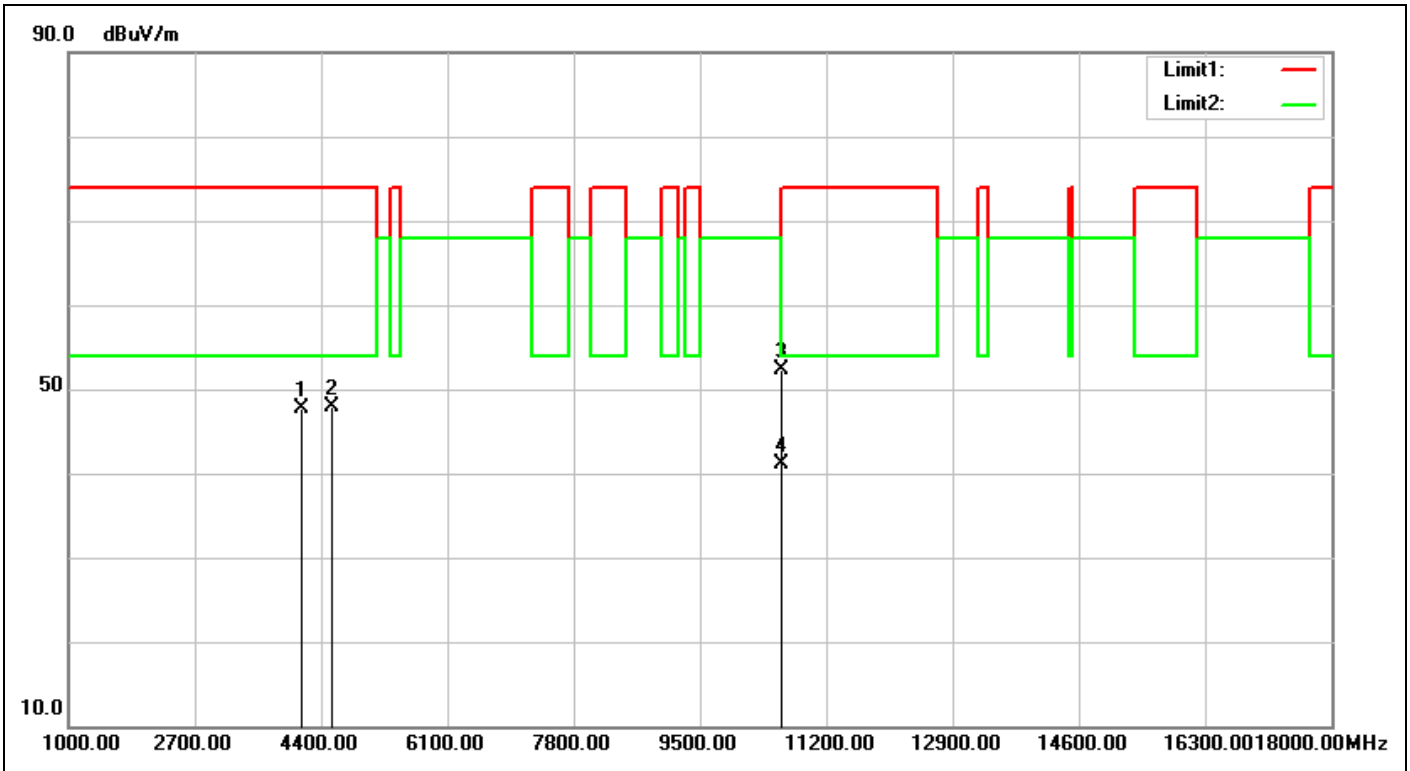


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 17:13:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A20-5300-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	4145.000	-3.39	51.08	47.69	74.00	-26.31	peak	100	78	
2	4553.000	-2.01	49.88	47.87	74.00	-26.13	peak	100	0	
3	10600.000	5.28	46.93	52.21	68.00	-15.79	peak	100	188	
4	10600.000	5.28	35.82	41.10	54.00	-12.90	AVG	100	188	

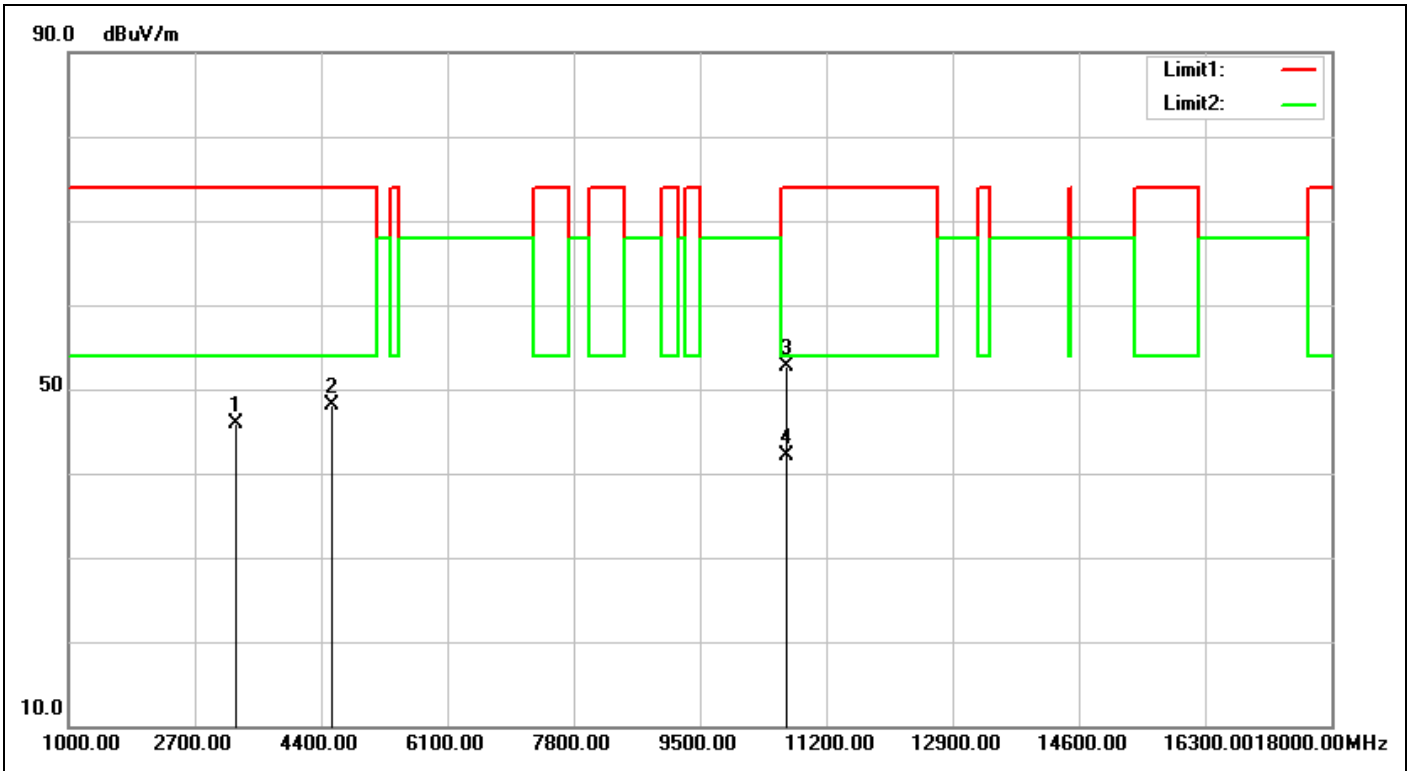


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:33:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3244.000	-5.27	51.13	45.86	74.00	-28.14	peak	105	49	
2	4553.000	-2.01	50.05	48.04	74.00	-25.96	peak	100	7	
3	10640.000	5.24	47.56	52.80	74.00	-21.20	peak	100	336	
4	10640.000	5.24	36.84	42.08	54.00	-11.92	AVG	100	336	

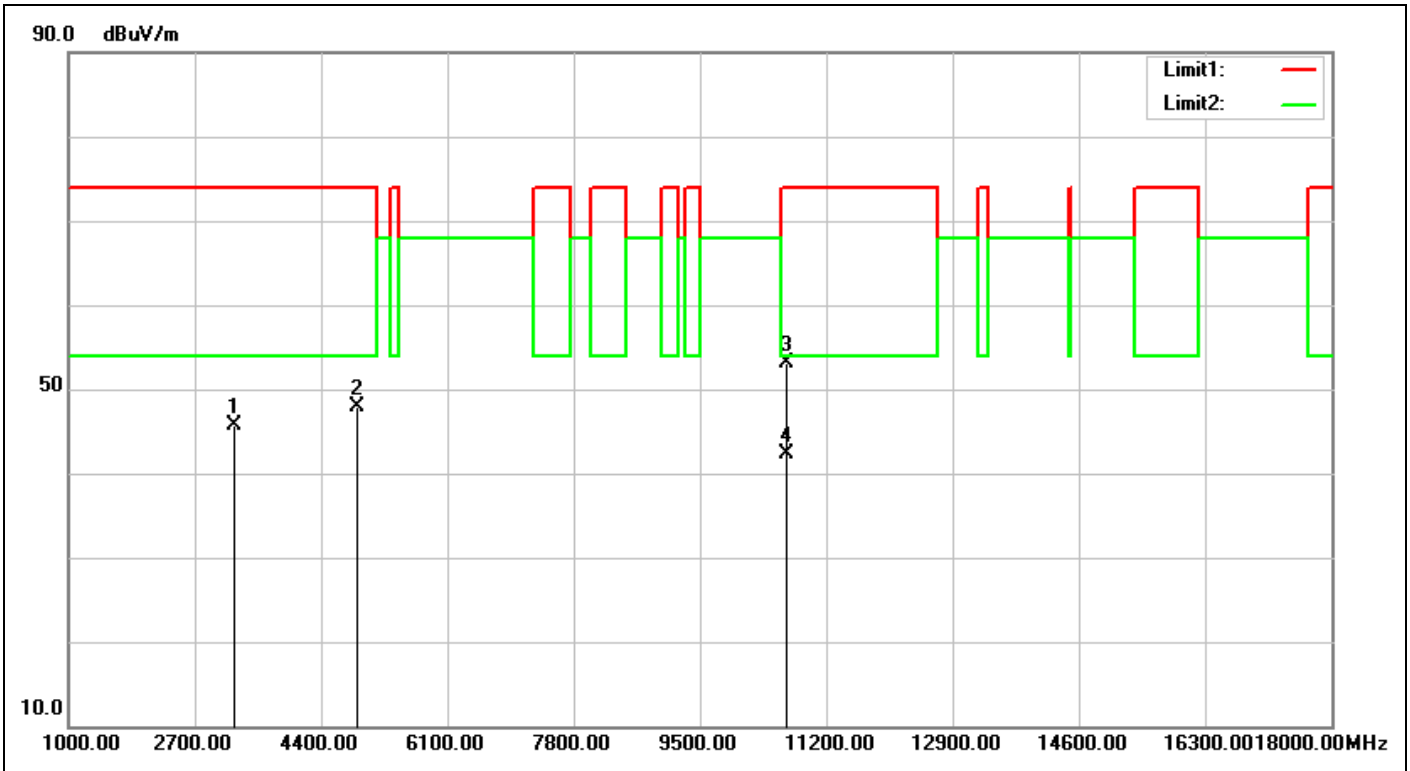


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:34:40
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5320-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3227.000	-5.29	51.01	45.72	74.00	-28.28	peak	195	167	
2	4893.000	-1.52	49.36	47.84	74.00	-26.16	peak	100	99	
3	10640.000	5.24	47.82	53.06	74.00	-20.94	peak	100	113	
4	10640.000	5.24	37.11	42.35	54.00	-11.65	AVG	100	113	

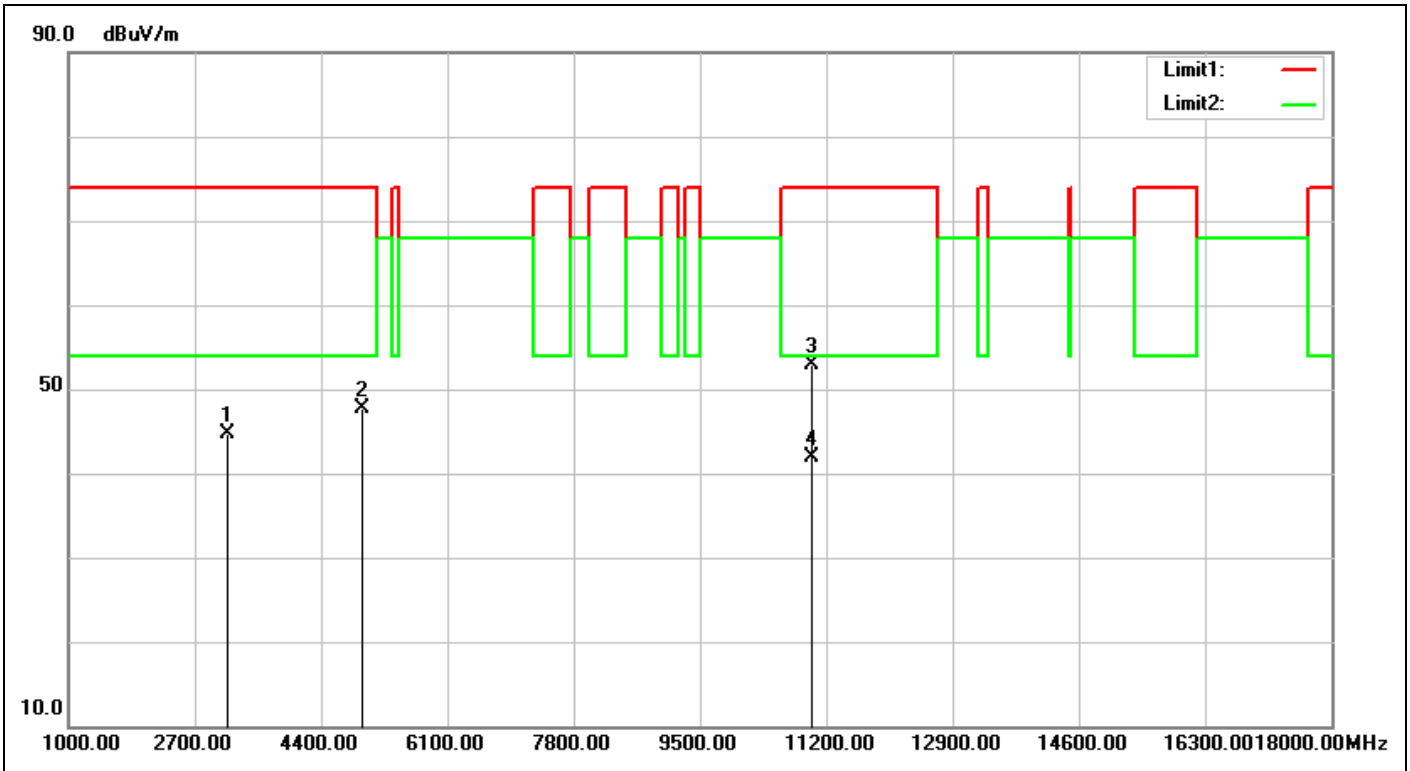


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:22:17
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3142.000	-5.35	49.97	44.62	74.00	-29.38	peak	100	189	
2	4961.000	-1.44	49.15	47.71	74.00	-26.29	peak	100	360	
3	11000.000	4.87	48.13	53.00	74.00	-21.00	peak	100	219	
4	11000.000	4.87	36.99	41.86	54.00	-12.14	AVG	100	219	

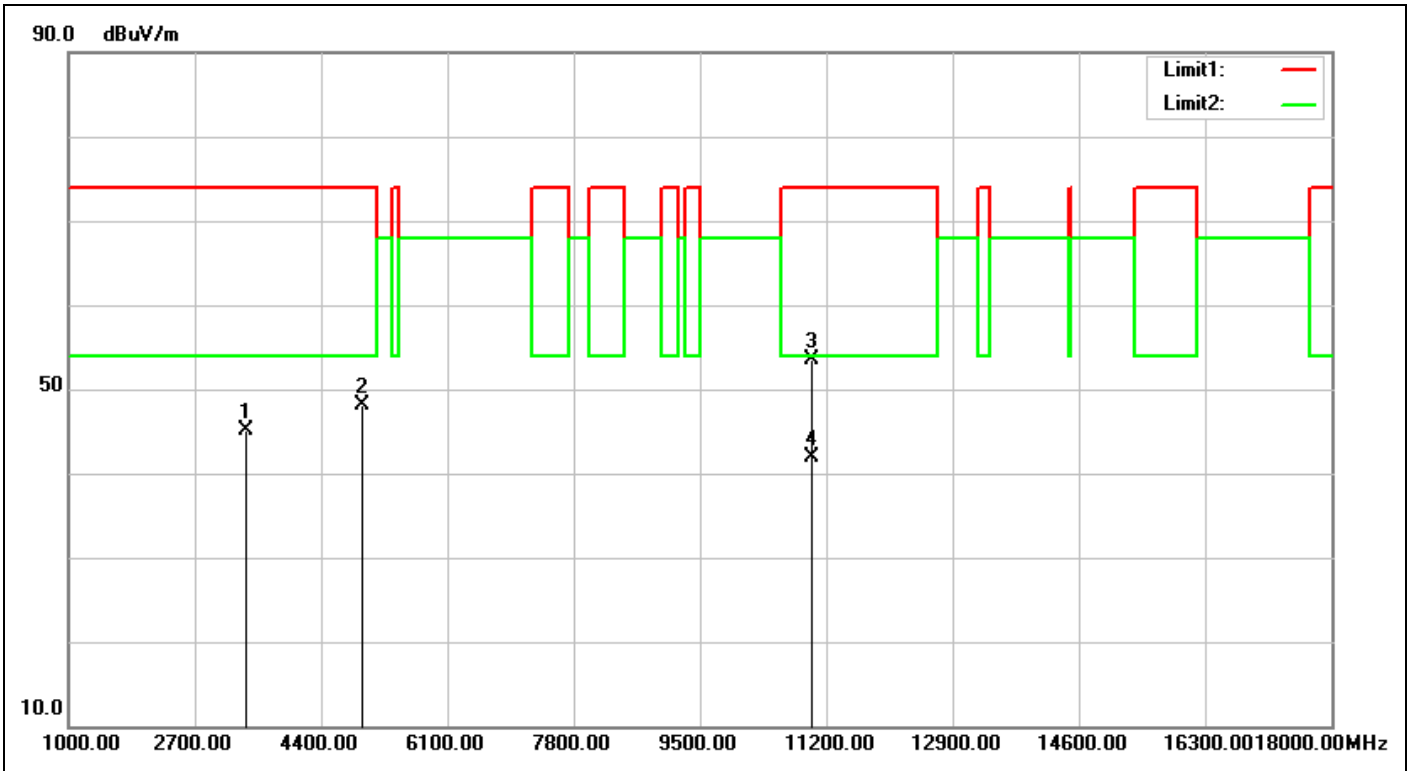


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:23:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5500-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	50.24	45.08	74.00	-28.92	peak	145	215	
2	4961.000	-1.44	49.63	48.19	74.00	-25.81	peak	100	287	
3	11000.000	4.87	48.69	53.56	74.00	-20.44	peak	102	254	
4	11000.000	4.87	37.12	41.99	54.00	-12.01	AVG	102	254	

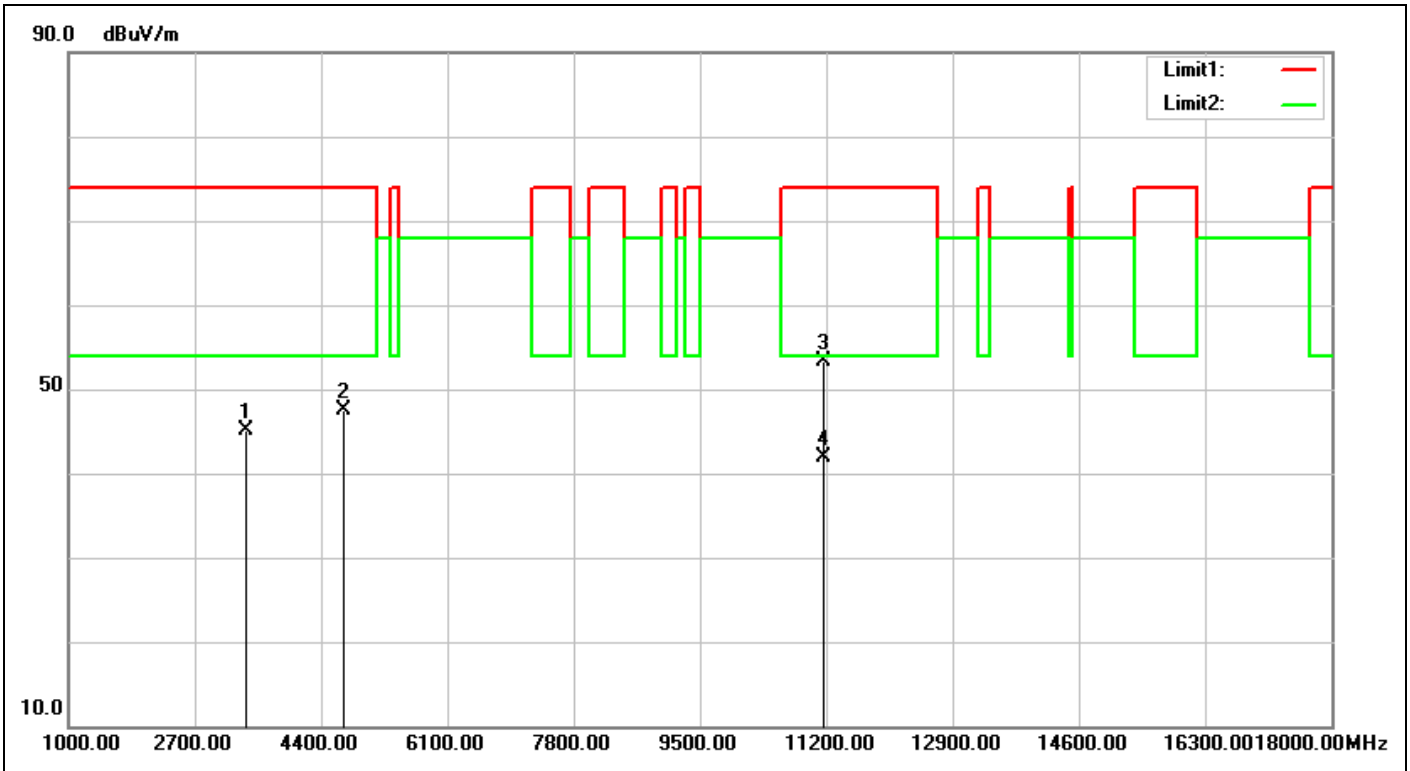


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:30:57
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3397.000	-5.15	50.35	45.20	74.00	-28.80	peak	100	182	
2	4706.000	-1.79	49.27	47.48	74.00	-26.52	peak	158	261	
3	11160.000	5.01	48.25	53.26	74.00	-20.74	peak	100	38	
4	11160.000	5.01	36.90	41.91	54.00	-12.09	AVG	100	38	

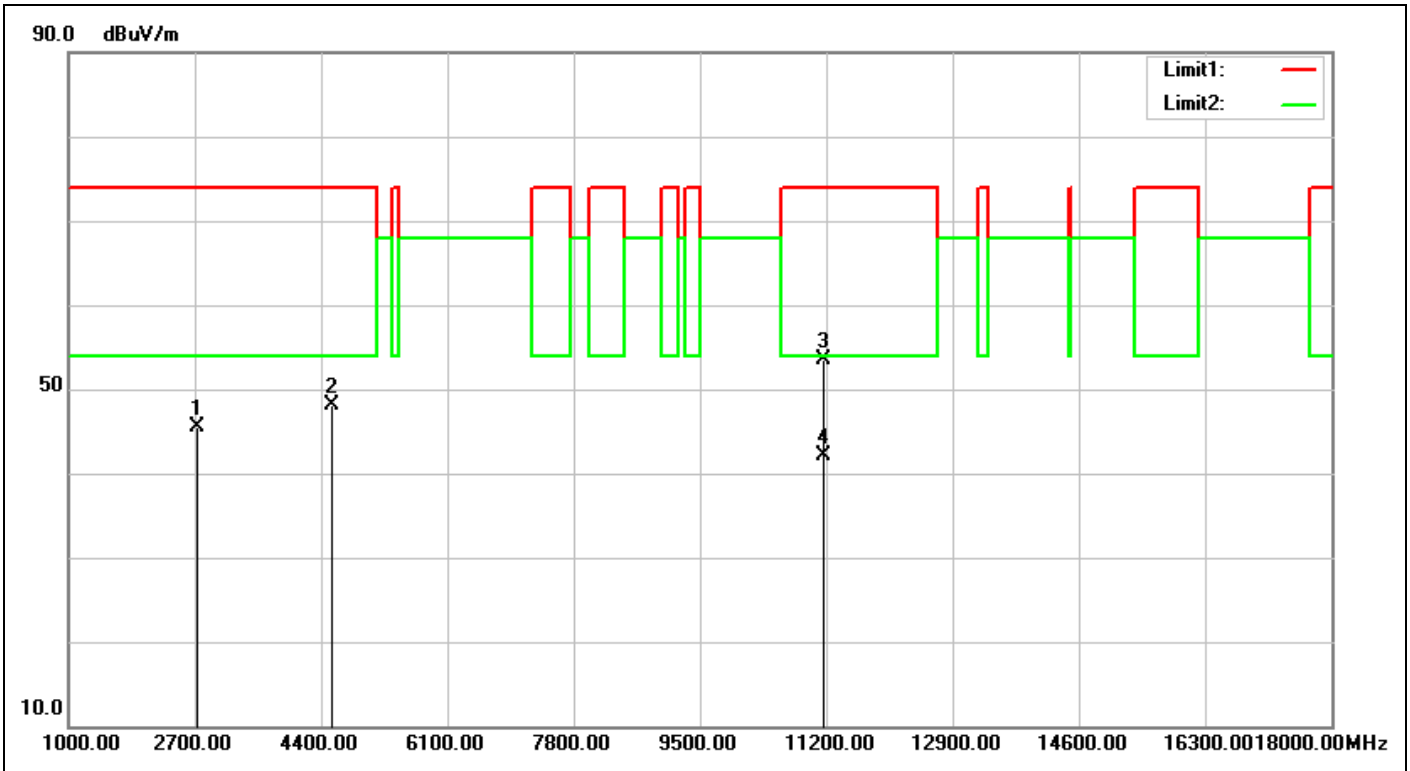


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:31:49
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5580-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2734.000	-5.90	51.39	45.49	74.00	-28.51	peak	100	61	
2	4553.000	-2.01	50.21	48.20	74.00	-25.80	peak	112	133	
3	11160.000	5.01	48.49	53.50	74.00	-20.50	peak	100	359	
4	11160.000	5.01	37.10	42.11	54.00	-11.89	AVG	100	359	

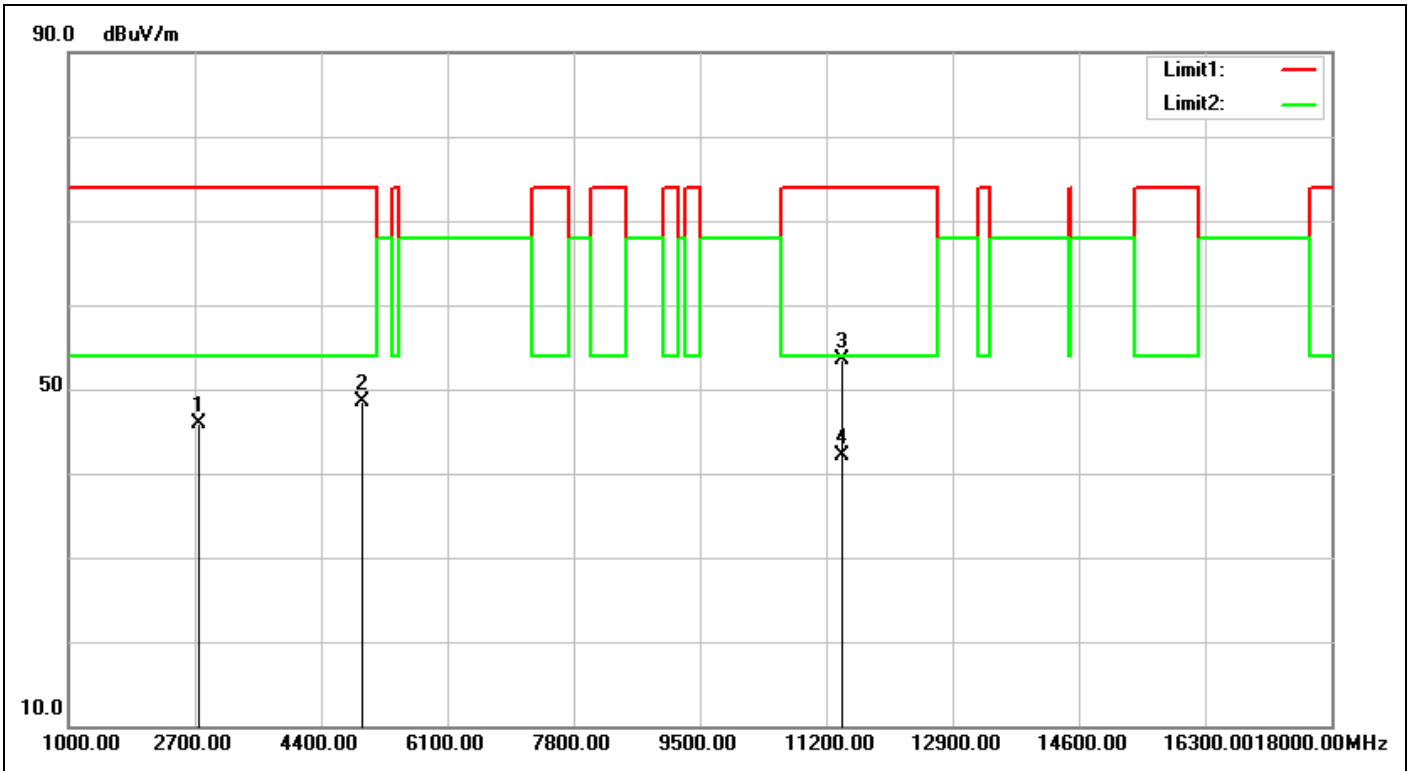


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:38:22
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2751.000	-5.87	51.75	45.88	74.00	-28.12	peak	100	299	
2	4944.000	-1.45	49.89	48.44	74.00	-25.56	peak	100	203	
3	11400.000	5.23	48.24	53.47	74.00	-20.53	peak	100	237	
4	11400.000	5.23	36.82	42.05	54.00	-11.95	AVG	100	237	

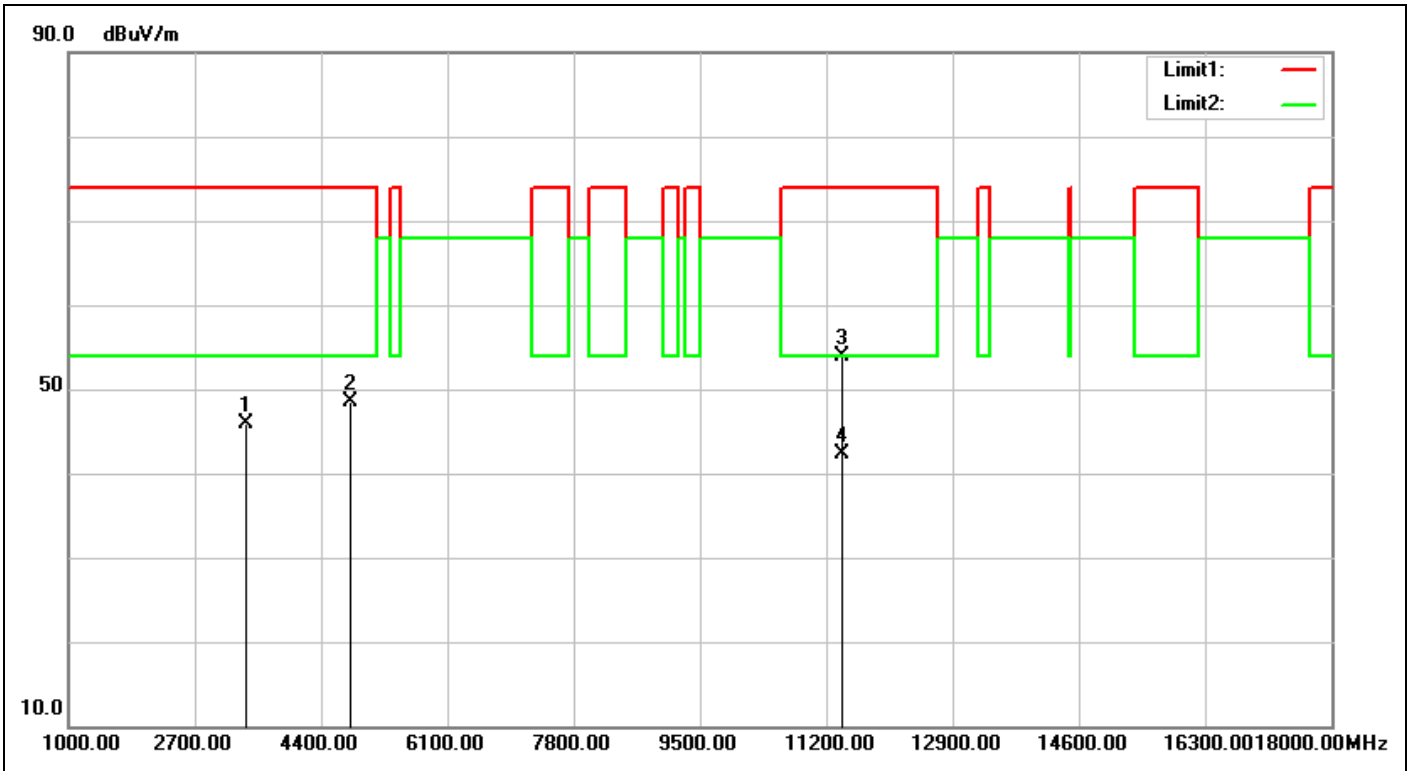


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:39:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5700-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	51.13	45.97	74.00	-28.03	peak	100	76	
2	4791.000	-1.67	50.22	48.55	74.00	-25.45	peak	130	259	
3	11400.000	5.23	48.72	53.95	74.00	-20.05	peak	100	315	
4	11400.000	5.23	36.99	42.22	54.00	-11.78	AVG	100	315	

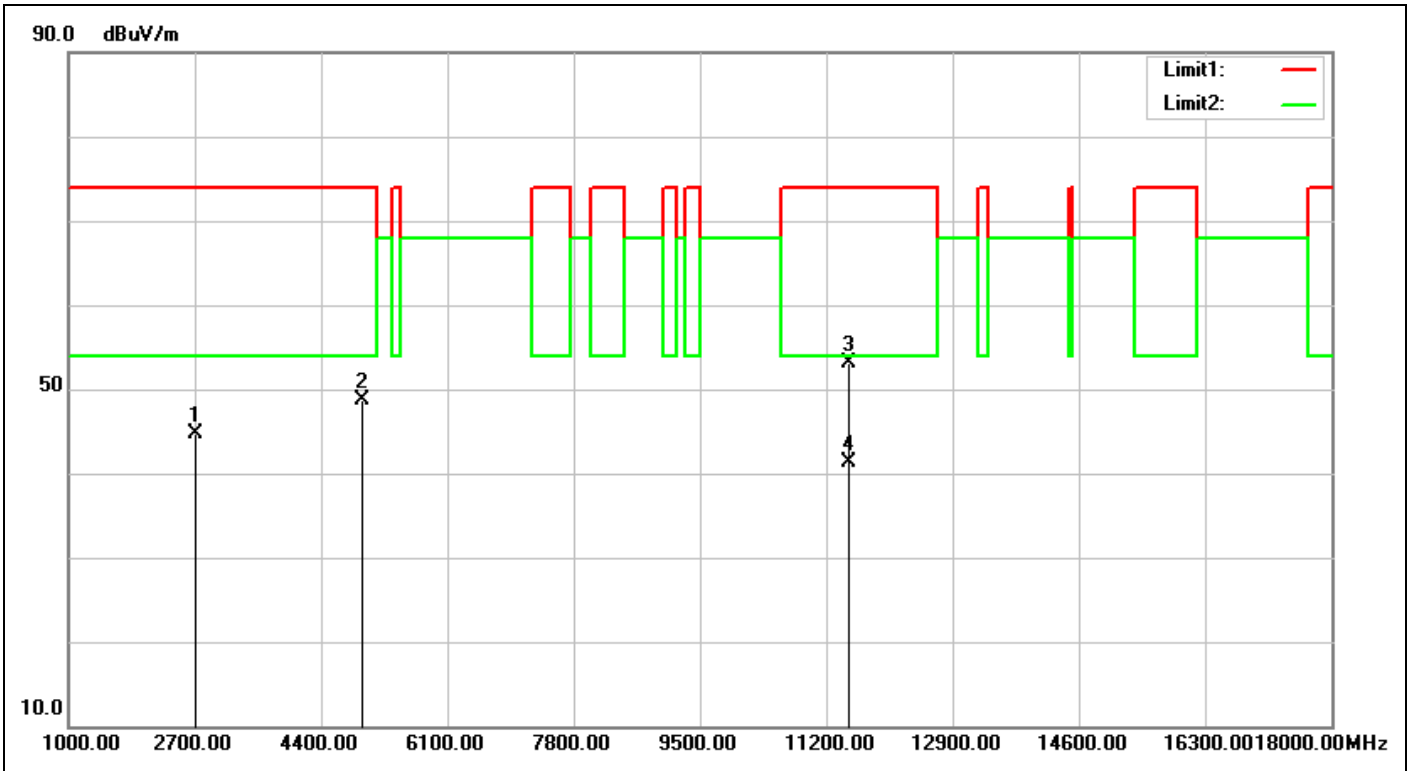


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:42:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	50.59	44.63	74.00	-29.37	peak	200	155	
2	4961.000	-1.44	50.22	48.78	74.00	-25.22	peak	100	306	
3	11490.000	5.33	47.73	53.06	74.00	-20.94	peak	100	264	
4	11490.000	5.33	35.95	41.28	54.00	-12.72	AVG	100	264	

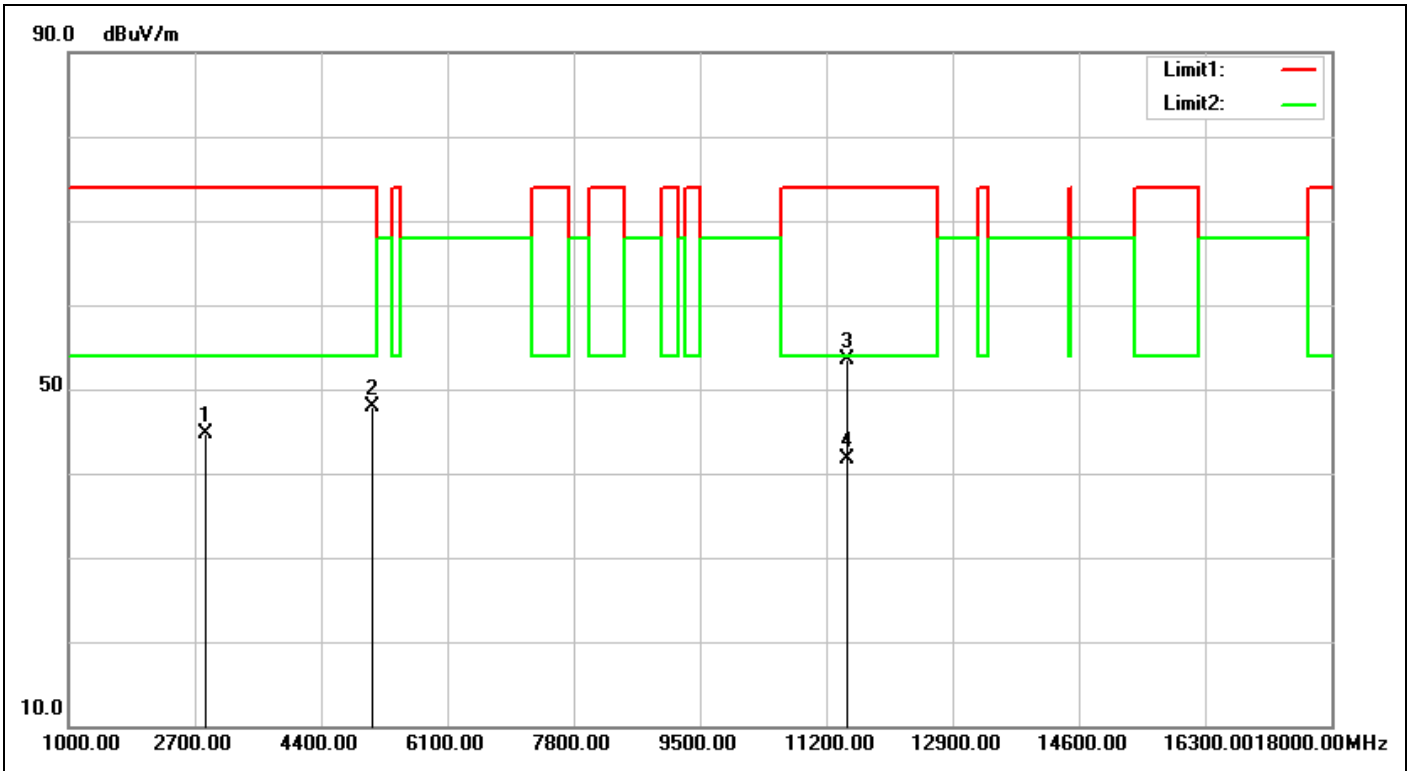


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:43:41
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5745-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2853.000	-5.71	50.37	44.66	74.00	-29.34	peak	160	85	
2	5097.000	-0.94	48.91	47.97	74.00	-26.03	peak	110	297	
3	11490.000	5.33	48.15	53.48	74.00	-20.52	peak	100	143	
4	11490.000	5.33	36.39	41.72	54.00	-12.28	AVG	100	143	

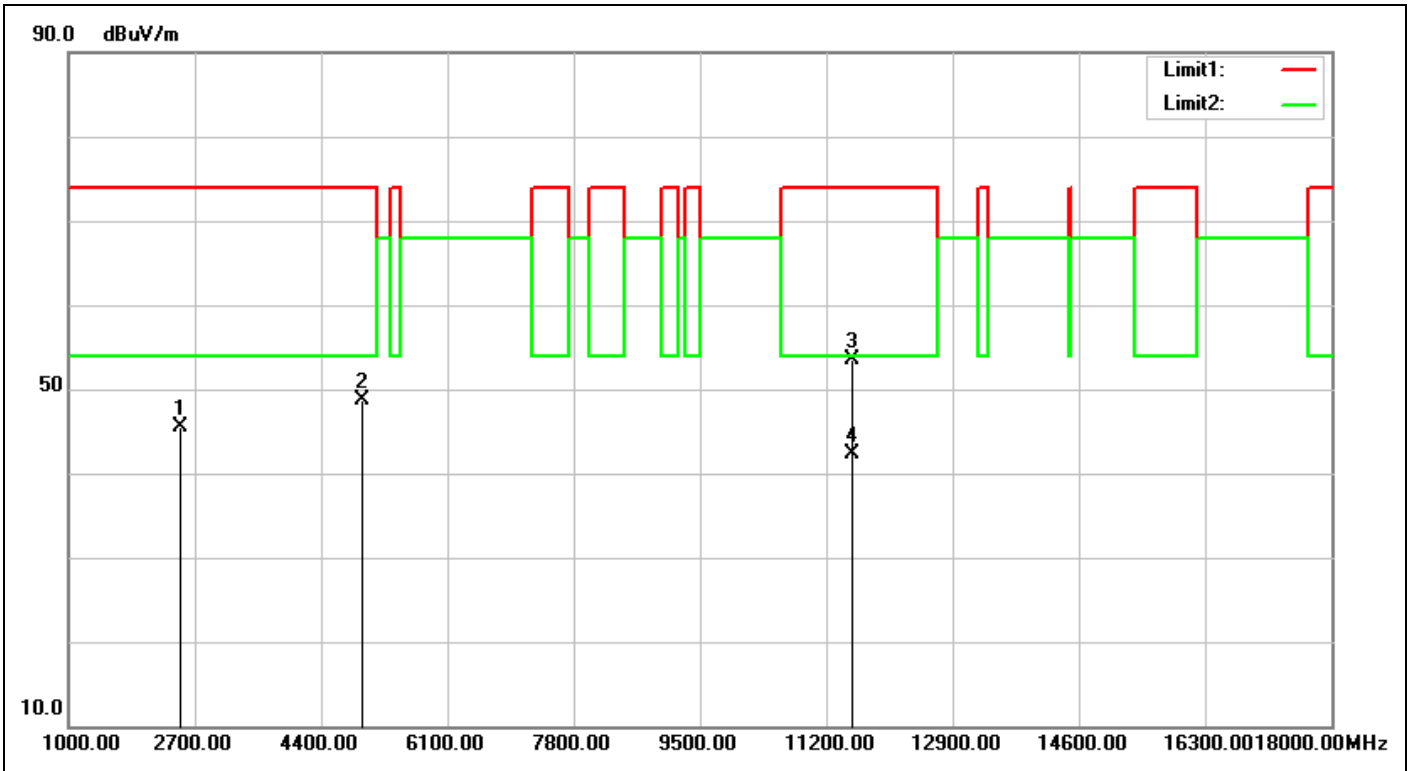


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:50:36
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	51.79	45.50	74.00	-28.50	peak	115	321	
2	4961.000	-1.44	50.18	48.74	74.00	-25.26	peak	170	57	
3	11570.000	5.59	47.89	53.48	74.00	-20.52	peak	100	133	
4	11570.000	5.59	36.68	42.27	54.00	-11.73	AVG	100	133	

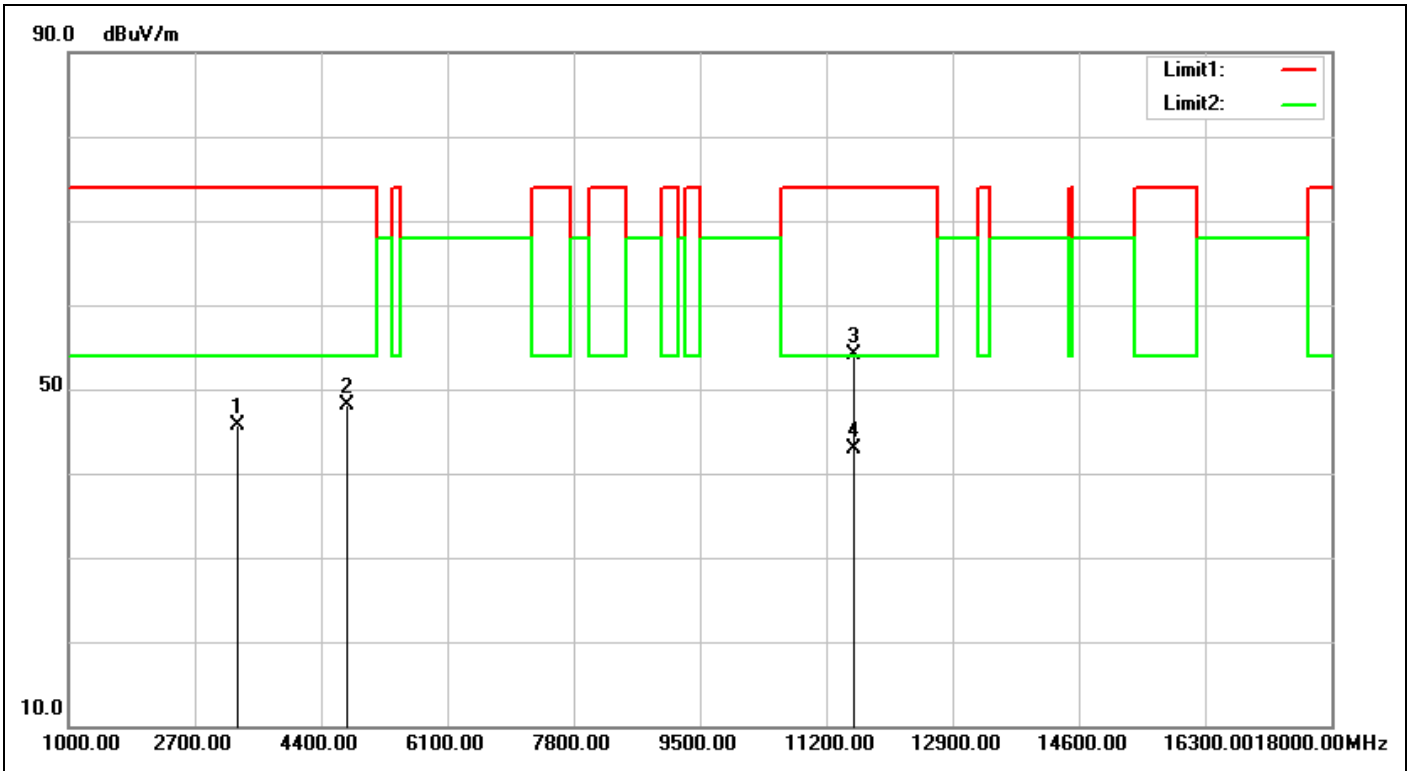


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:51:28
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3278.000	-5.24	50.85	45.61	74.00	-28.39	peak	100	148	
2	4740.000	-1.74	49.91	48.17	74.00	-25.83	peak	100	169	
3	11570.000	5.59	48.54	54.13	74.00	-19.87	peak	100	121	
4	11570.000	5.59	37.26	42.85	54.00	-11.15	AVG	100	121	

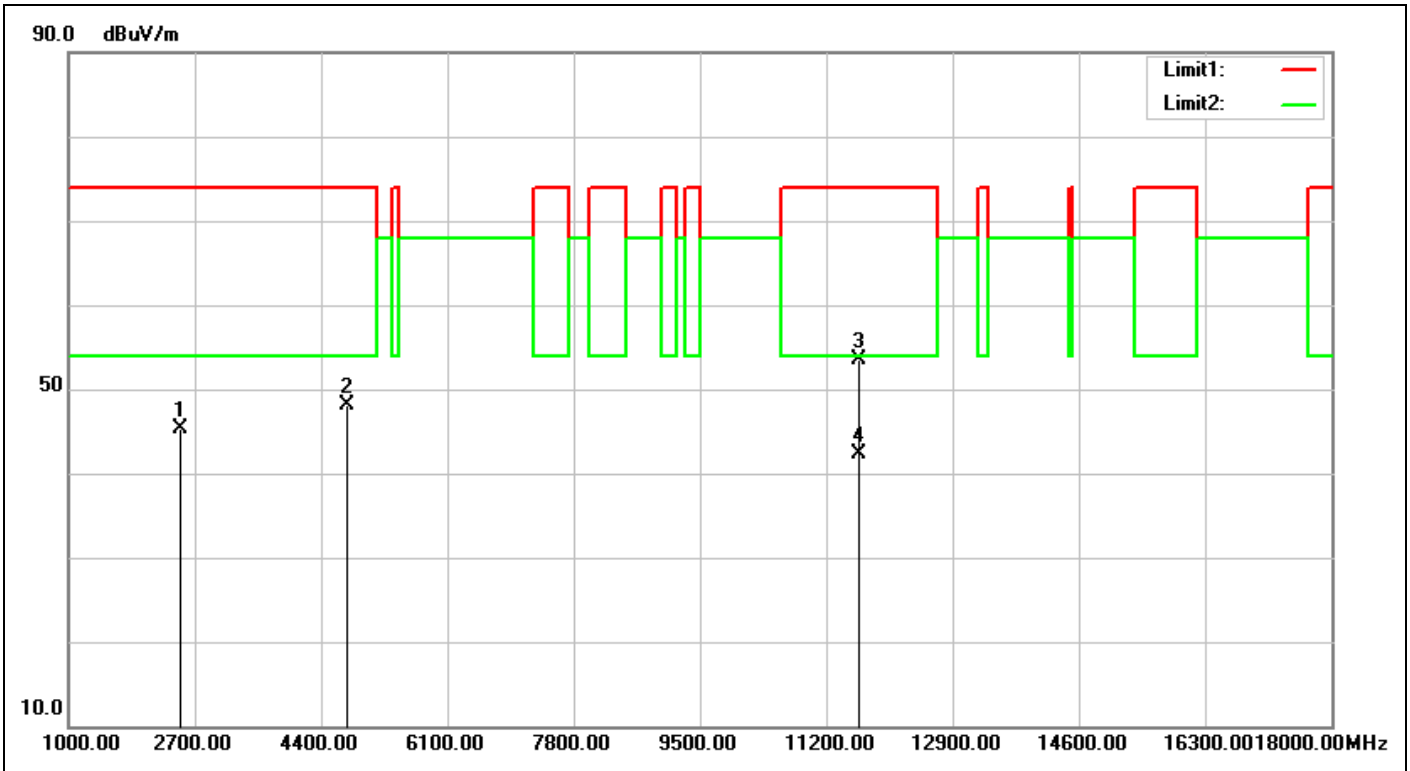


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:58:05
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2496.000	-6.29	51.55	45.26	74.00	-28.74	peak	188	135	
2	4757.000	-1.72	49.87	48.15	74.00	-25.85	peak	200	360	
3	11650.000	5.90	47.67	53.57	74.00	-20.43	peak	100	125	
4	11650.000	5.90	36.31	42.21	54.00	-11.79	AVG	100	125	

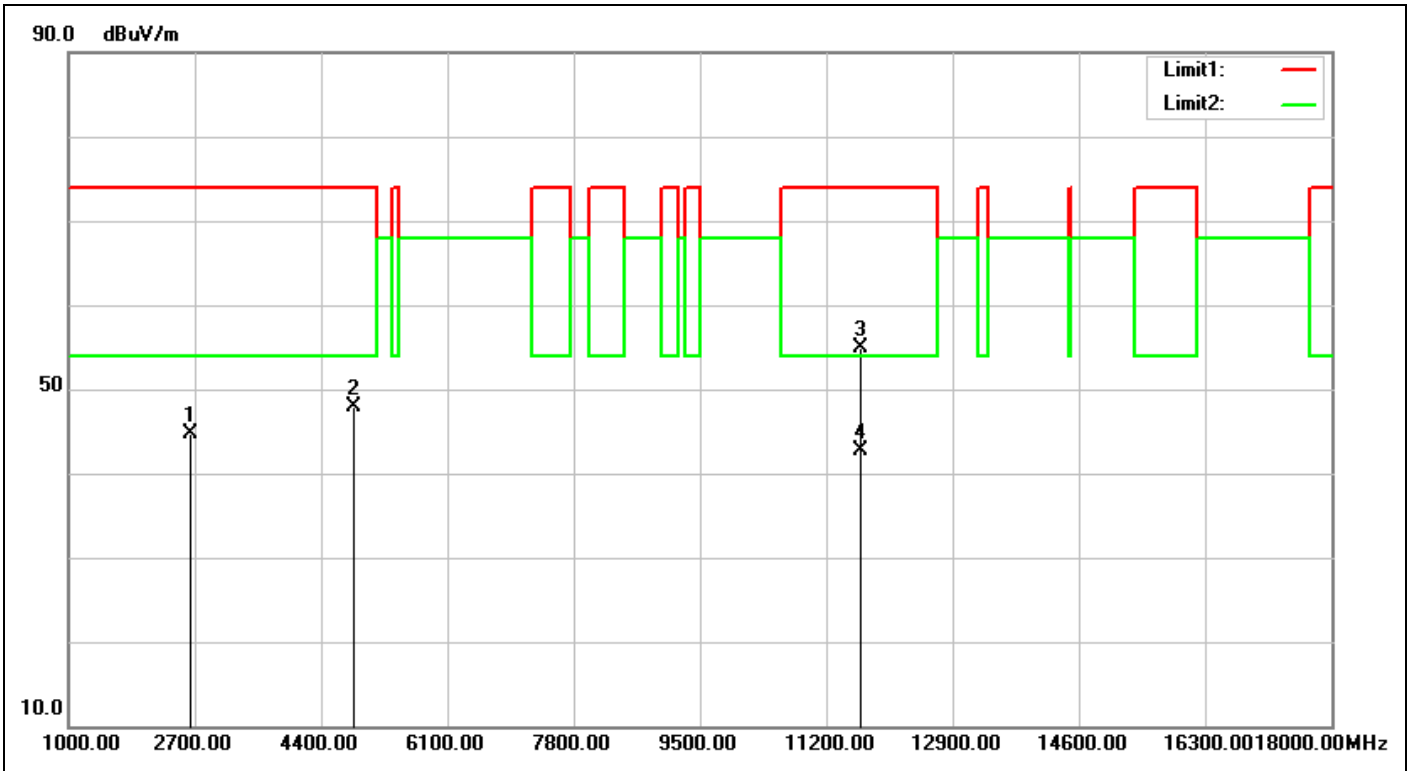


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:58:57
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A20-5825-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2649.000	-6.04	50.82	44.78	74.00	-29.22	peak	100	96	
2	4842.000	-1.60	49.53	47.93	74.00	-26.07	peak	100	168	
3	11650.000	5.90	48.93	54.83	74.00	-19.17	peak	101	335	
4	11650.000	5.90	36.79	42.69	54.00	-11.31	AVG	101	335	

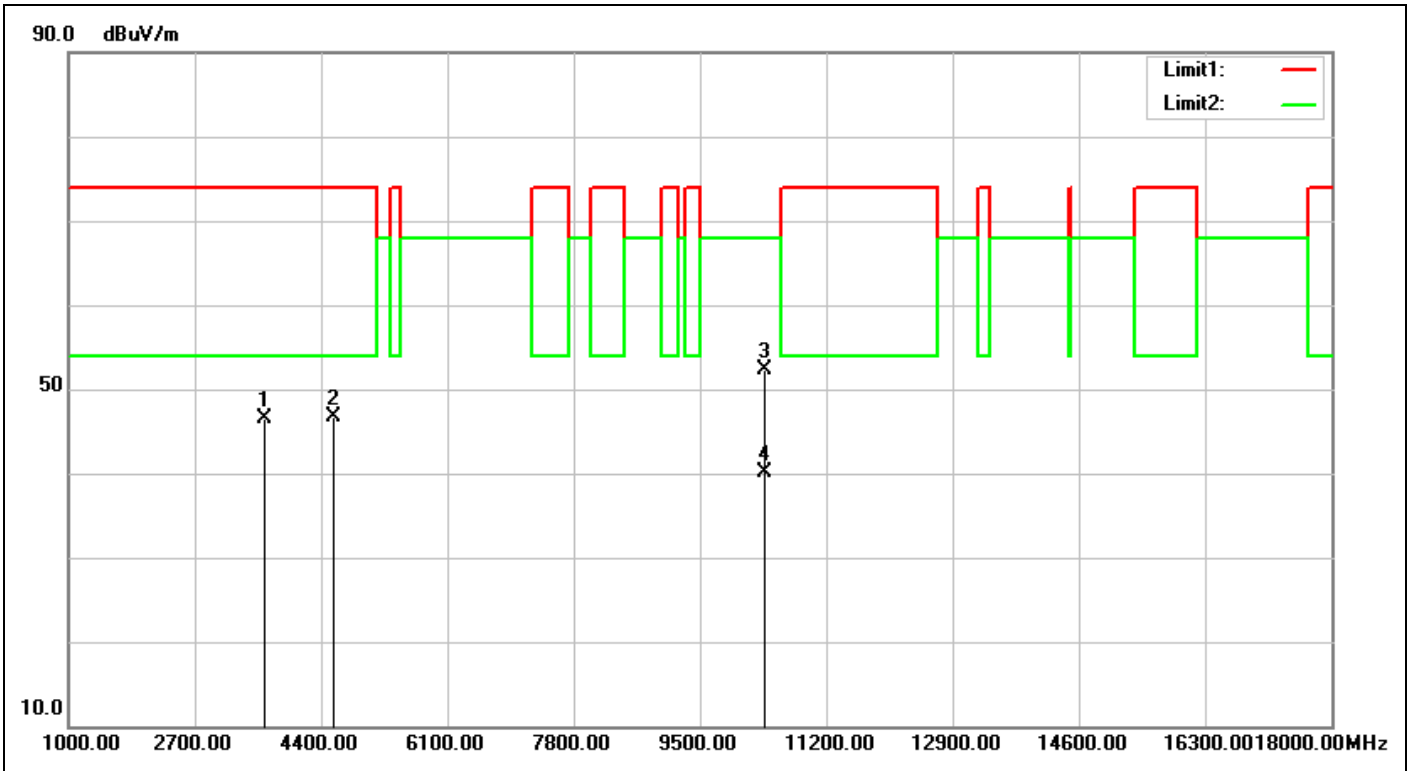


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:10:00
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5190-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3635.000	-4.76	51.20	46.44	74.00	-27.56	peak	100	271	
2	4570.000	-1.98	48.78	46.80	74.00	-27.20	peak	100	148	
3	10380.000	5.64	46.70	52.34	68.00	-15.66	peak	100	172	
4	10380.000	5.64	34.44	40.08	68.00	-27.92	AVG	100	172	

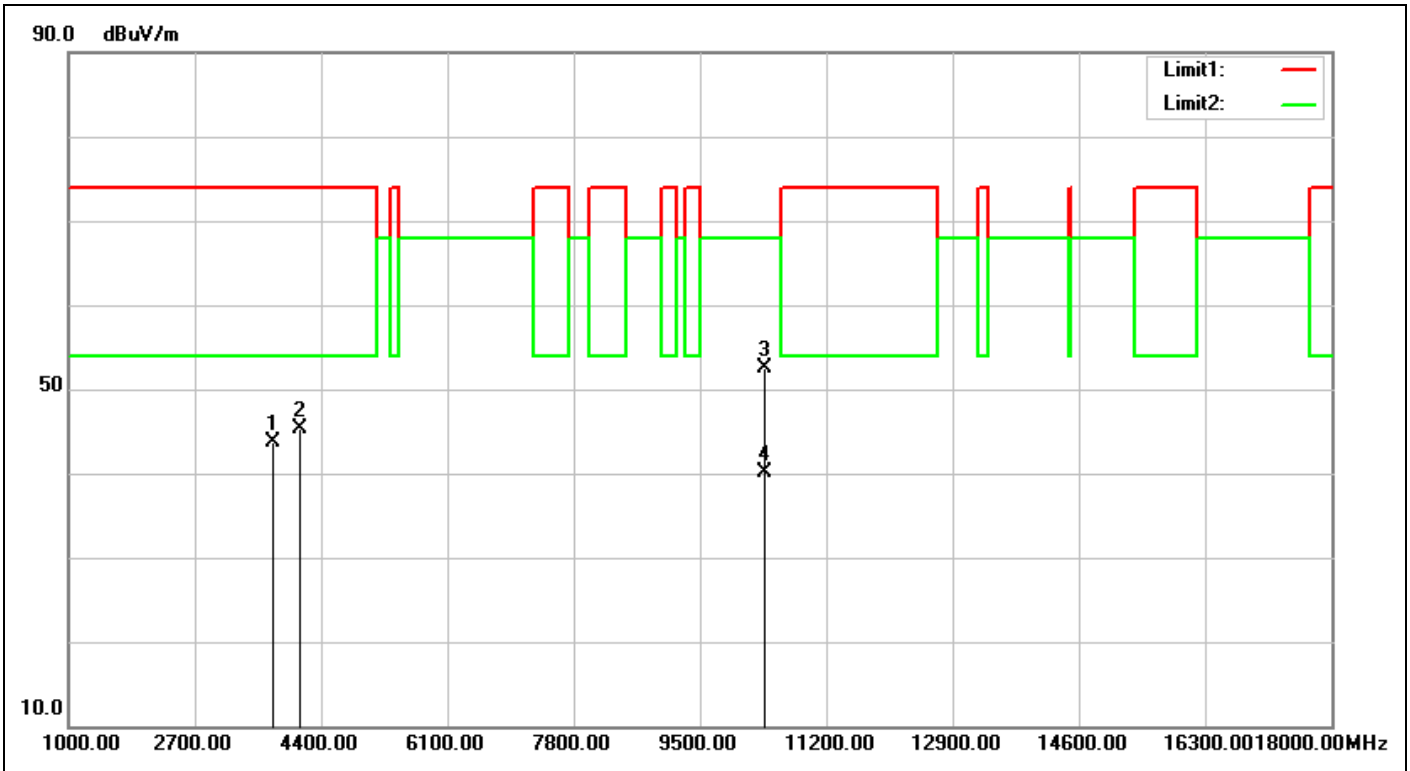


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:10:53
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5190-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3754.000	-4.48	48.11	43.63	74.00	-30.37	peak	100	355	
2	4111.000	-3.51	48.89	45.38	74.00	-28.62	peak	100	321	
3	10380.000	5.64	46.83	52.47	68.00	-15.53	peak	100	178	
4	10380.000	5.64	34.46	40.10	68.00	-27.90	AVG	100	178	

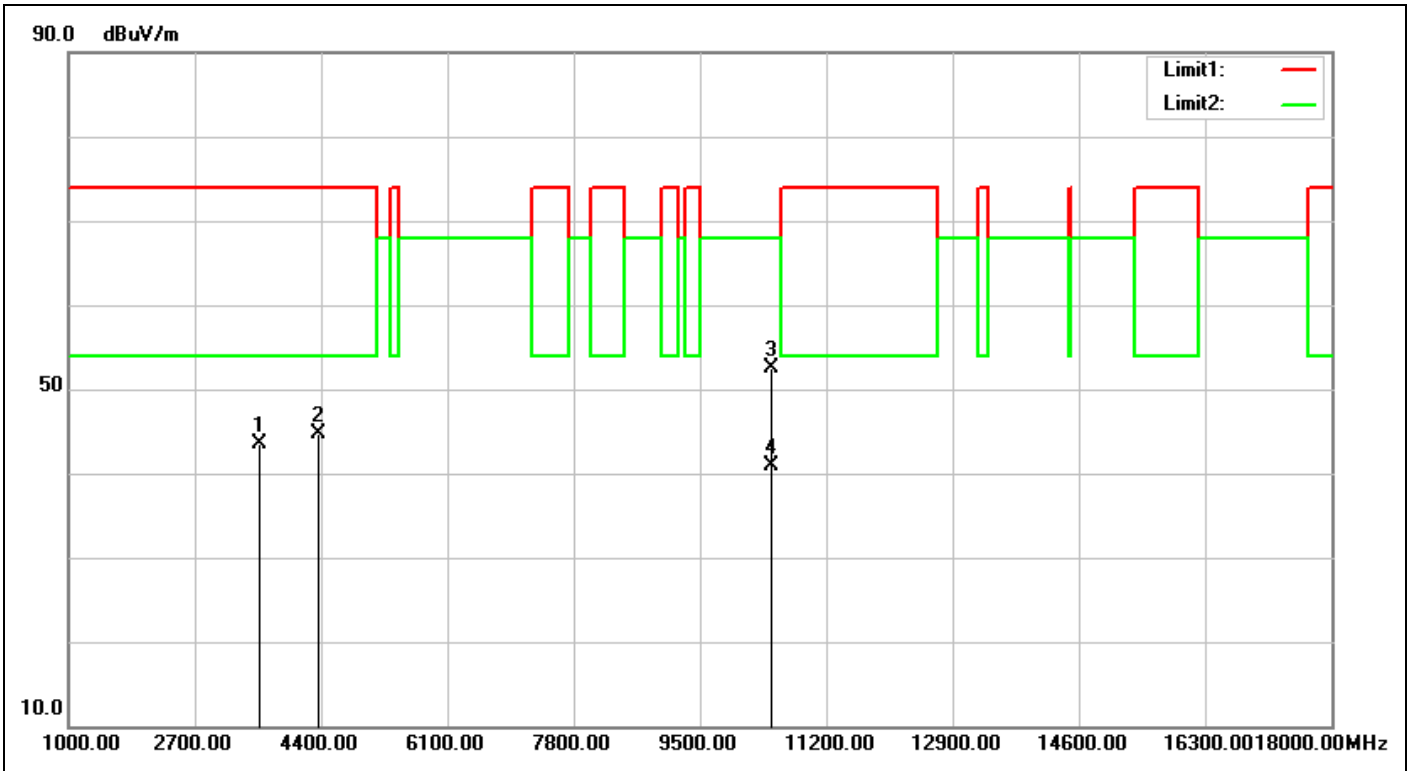


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 16:17:43
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5230-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3567.000	-4.93	48.46	43.53	74.00	-30.47	peak	100	203	
2	4366.000	-2.57	47.32	44.75	74.00	-29.25	peak	100	360	
3	10460.000	5.47	47.05	52.52	68.00	-15.48	peak	100	295	
4	10460.000	5.47	35.40	40.87	68.00	-27.13	AVG	100	295	

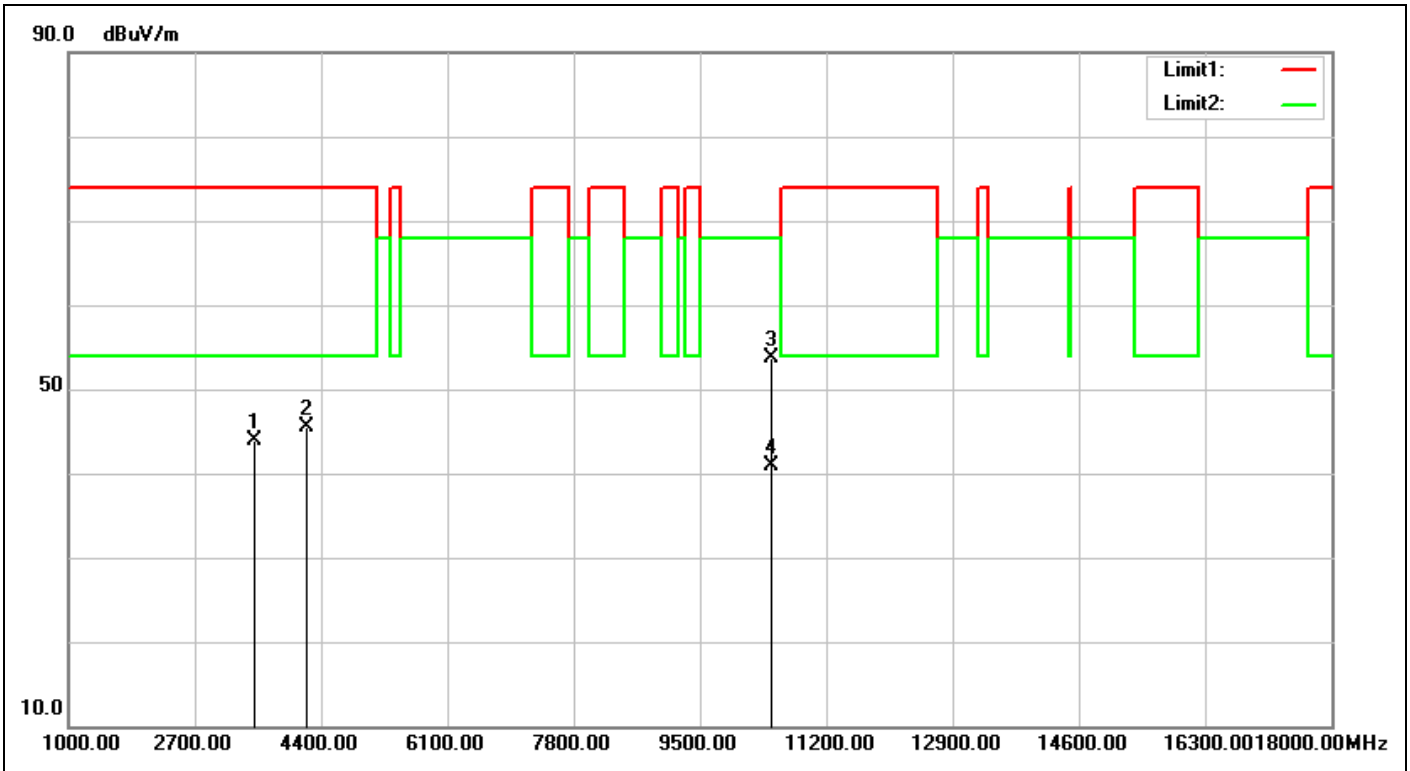


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 16:18:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Curry Cehn
Test Mode:	A40-5230-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3499.000	-5.07	48.93	43.86	74.00	-30.14	peak	100	109	
2	4213.000	-3.15	48.64	45.49	74.00	-28.51	peak	100	160	
3	10460.000	5.47	48.21	53.68	68.00	-14.32	peak	100	109	
4	10460.000	5.47	35.42	40.89	68.00	-27.11	AVG	100	109	

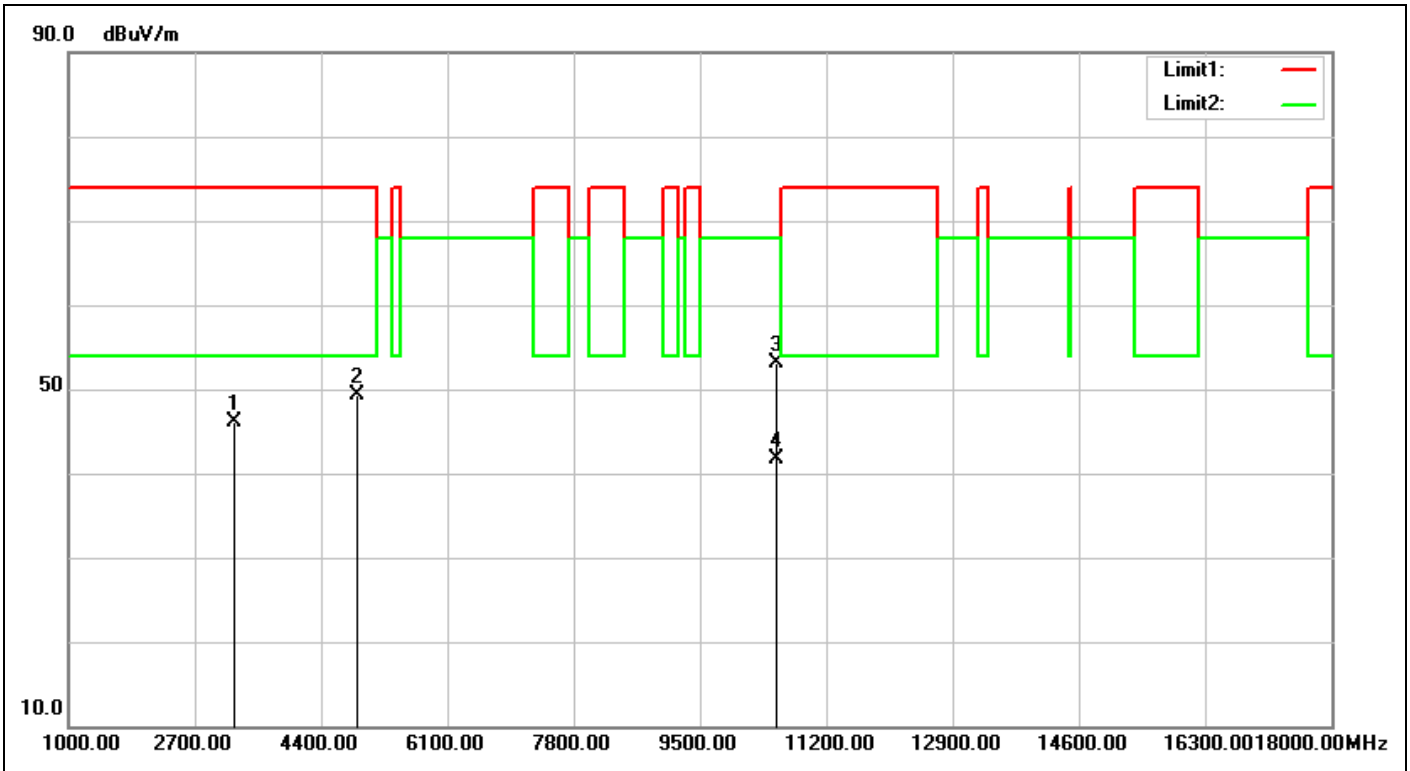


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:41:09
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5270-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3227.000	-5.29	51.45	46.16	74.00	-27.84	peak	100	178	
2	4893.000	-1.52	50.89	49.37	74.00	-24.63	peak	108	191	
3	10540.000	5.34	47.73	53.07	68.00	-14.93	peak	100	307	
4	10540.000	5.34	36.28	41.62	68.00	-26.38	AVG	100	307	

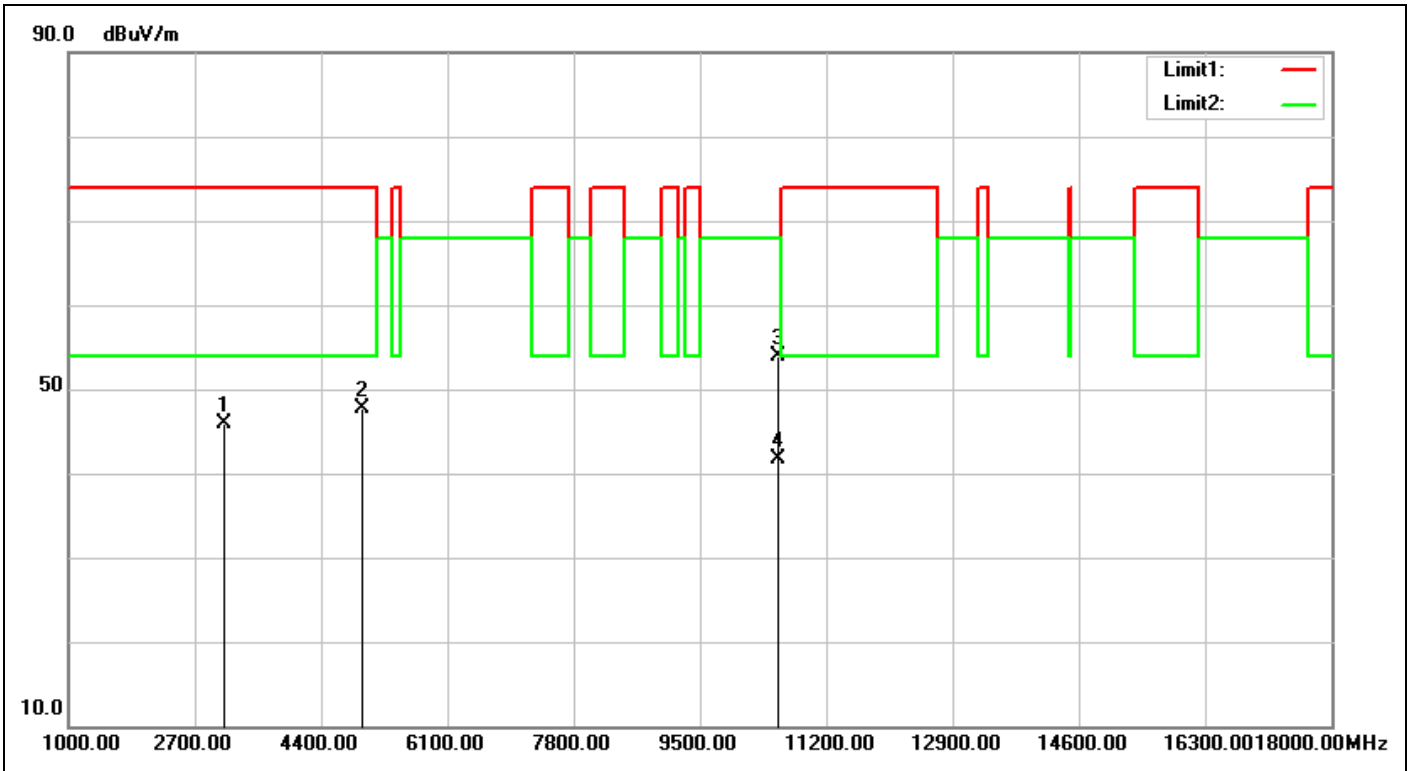


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:42:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5270-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3091.000	-5.39	51.22	45.83	74.00	-28.17	peak	200	199	
2	4944.000	-1.45	49.16	47.71	74.00	-26.29	peak	100	158	
3	10540.000	5.34	48.53	53.87	68.00	-14.13	peak	100	45	
4	10540.000	5.34	36.45	41.79	68.00	-26.21	AVG	100	45	

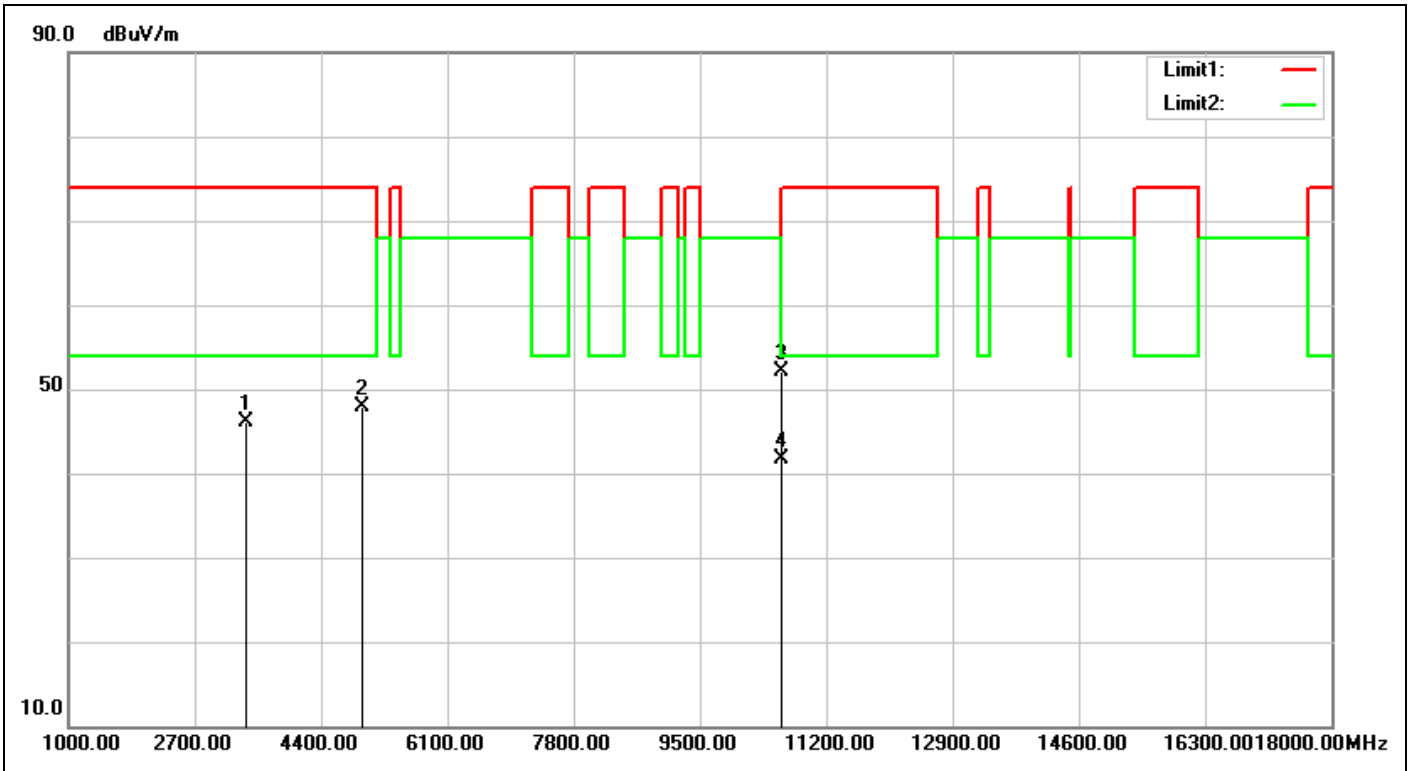


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 18:49:28
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5310-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	51.17	46.01	74.00	-27.99	peak	100	148	
2	4944.000	-1.45	49.34	47.89	74.00	-26.11	peak	130	248	
3	10620.000	5.26	46.87	52.13	74.00	-21.87	peak	100	205	
4	10620.000	5.26	36.40	41.66	54.00	-12.34	AVG	100	205	

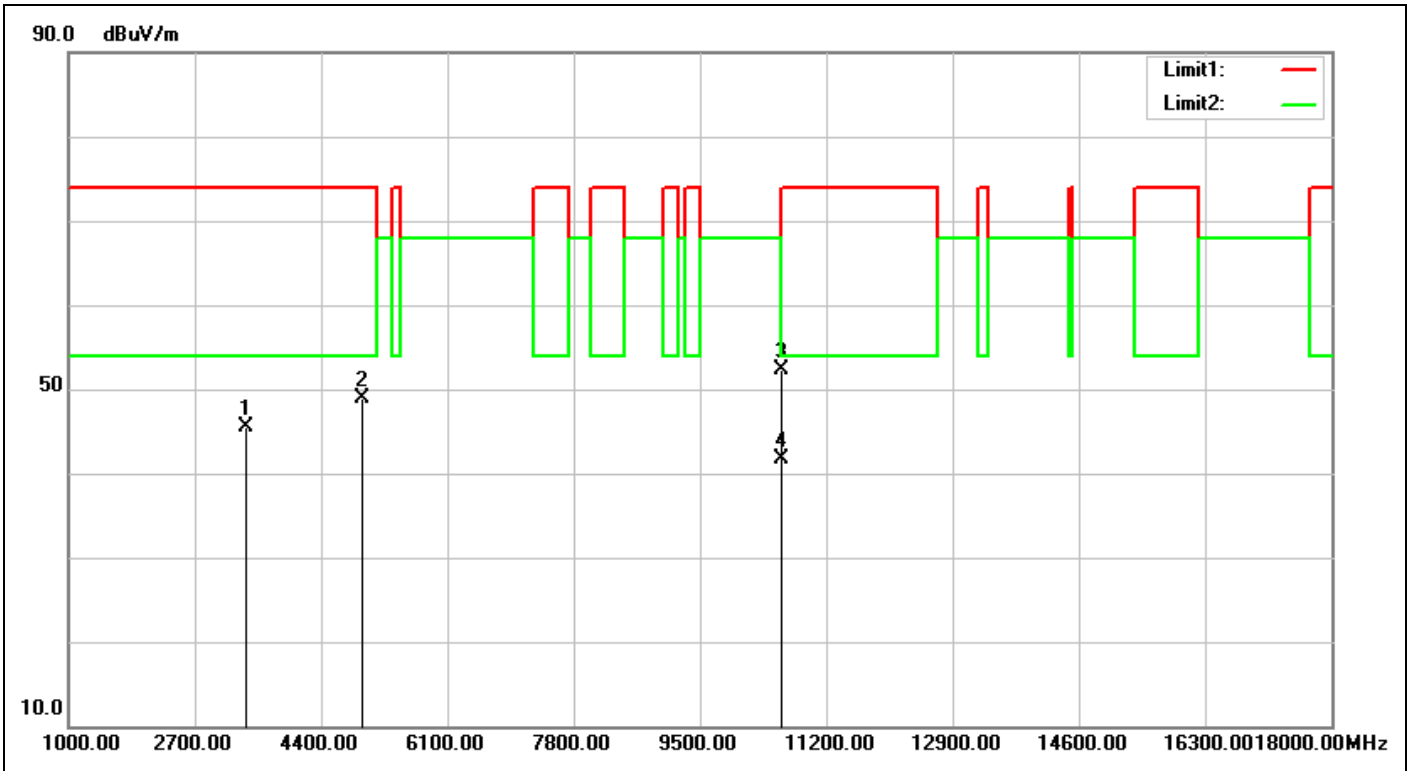


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 18:50:20
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5310-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3380.000	-5.16	50.76	45.60	74.00	-28.40	peak	100	335	
2	4961.000	-1.44	50.26	48.82	74.00	-25.18	peak	100	82	
3	10620.000	5.26	47.09	52.35	74.00	-21.65	peak	100	301	
4	10620.000	5.26	36.52	41.78	54.00	-12.22	AVG	100	301	

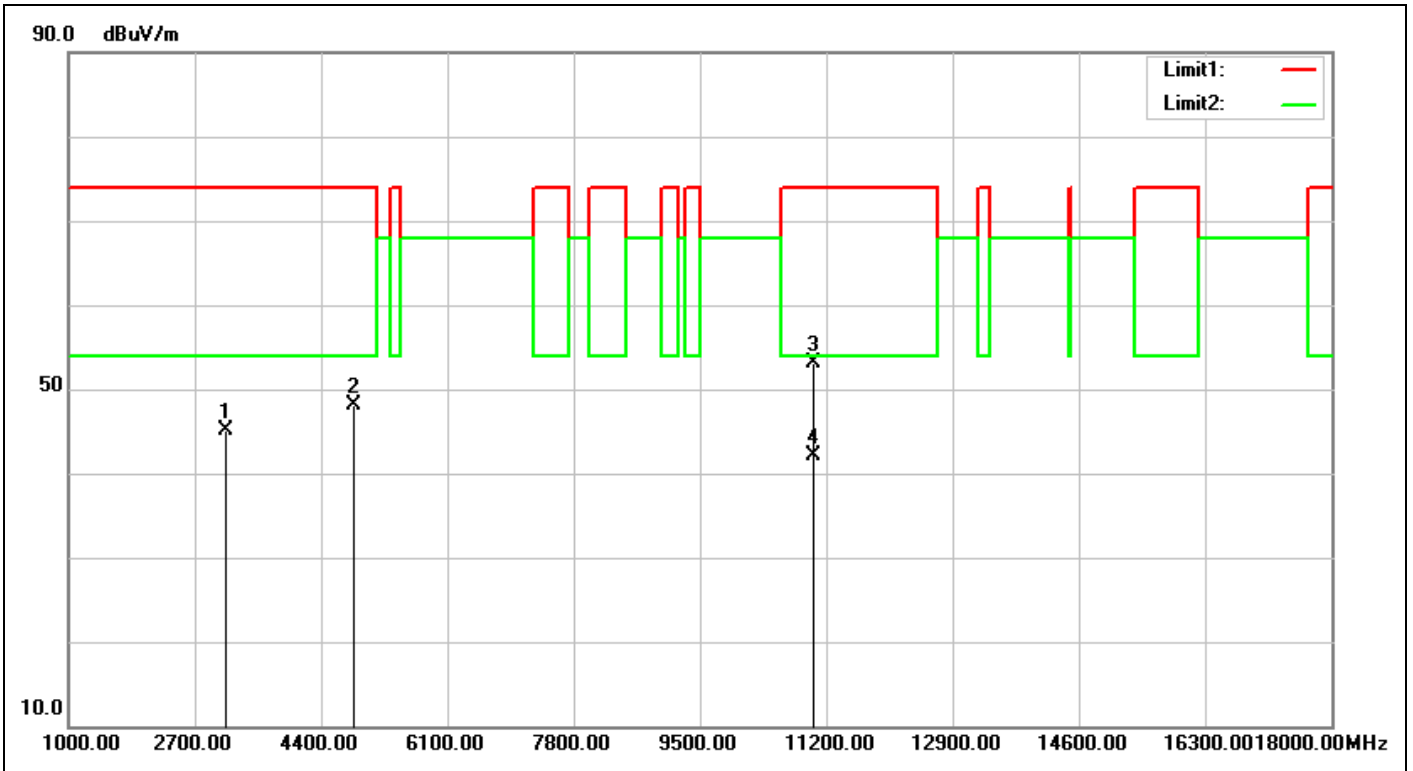


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:47:19
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5510-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-5.36	50.41	45.05	74.00	-28.95	peak	190	145	
2	4842.000	-1.60	49.63	48.03	74.00	-25.97	peak	200	121	
3	11020.000	4.89	48.31	53.20	74.00	-20.80	peak	100	275	
4	11020.000	4.89	37.27	42.16	54.00	-11.84	AVG	100	275	

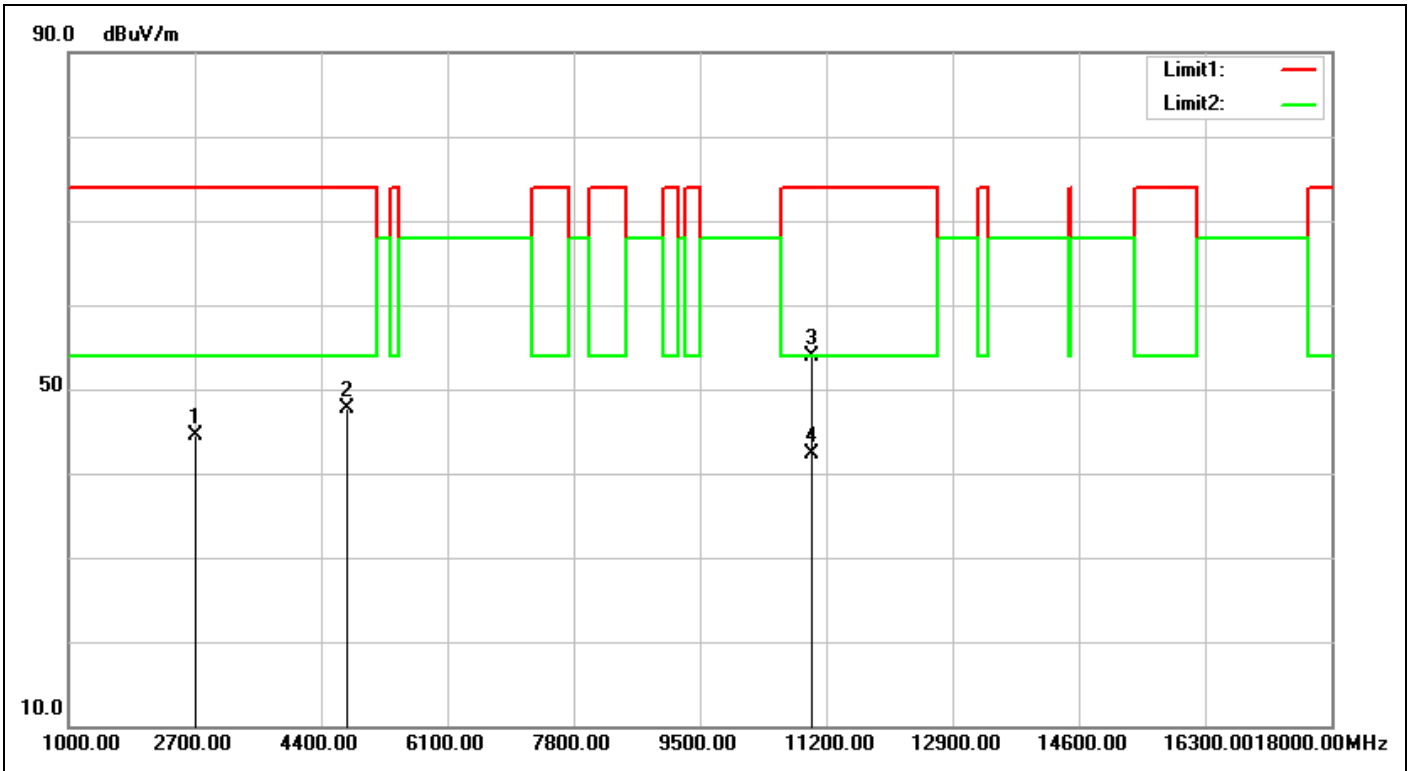


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:48:12
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5510-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2700.000	-5.96	50.38	44.42	74.00	-29.58	peak	100	338	
2	4740.000	-1.74	49.53	47.79	74.00	-26.21	peak	100	294	
3	11020.000	4.89	48.95	53.84	74.00	-20.16	peak	100	68	
4	11020.000	4.89	37.48	42.37	54.00	-11.63	AVG	100	68	

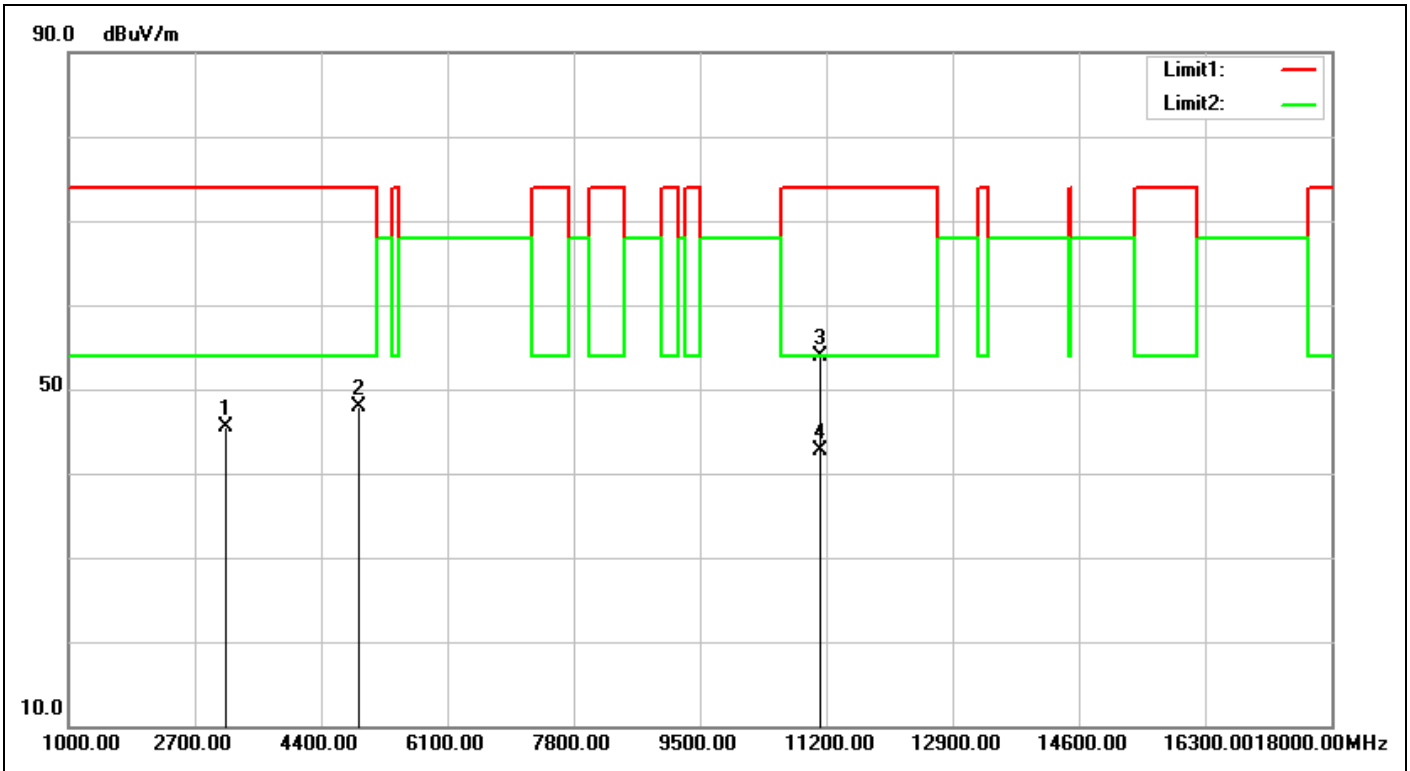


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 19:56:11
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5550-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-5.36	50.82	45.46	74.00	-28.54	peak	115	188	
2	4910.000	-1.51	49.49	47.98	74.00	-26.02	peak	200	251	
3	11100.000	4.97	48.99	53.96	74.00	-20.04	peak	100	239	
4	11100.000	4.97	37.76	42.73	54.00	-11.27	AVG	100	239	

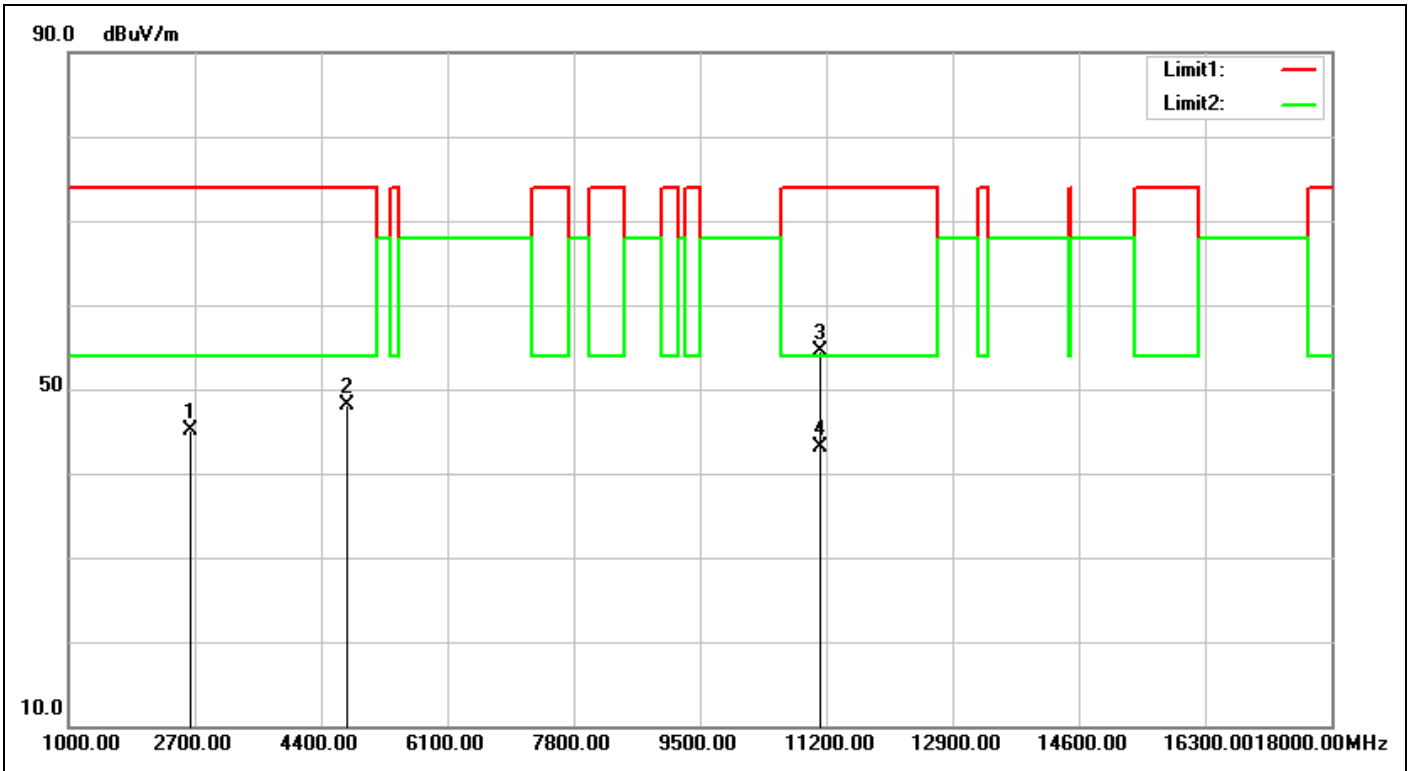


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 19:57:03
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5550-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2632.000	-6.07	51.24	45.17	74.00	-28.83	peak	100	323	
2	4740.000	-1.74	49.89	48.15	74.00	-25.85	peak	100	63	
3	11100.000	4.97	49.59	54.56	74.00	-19.44	peak	100	32	
4	11100.000	4.97	38.13	43.10	54.00	-10.90	AVG	100	32	

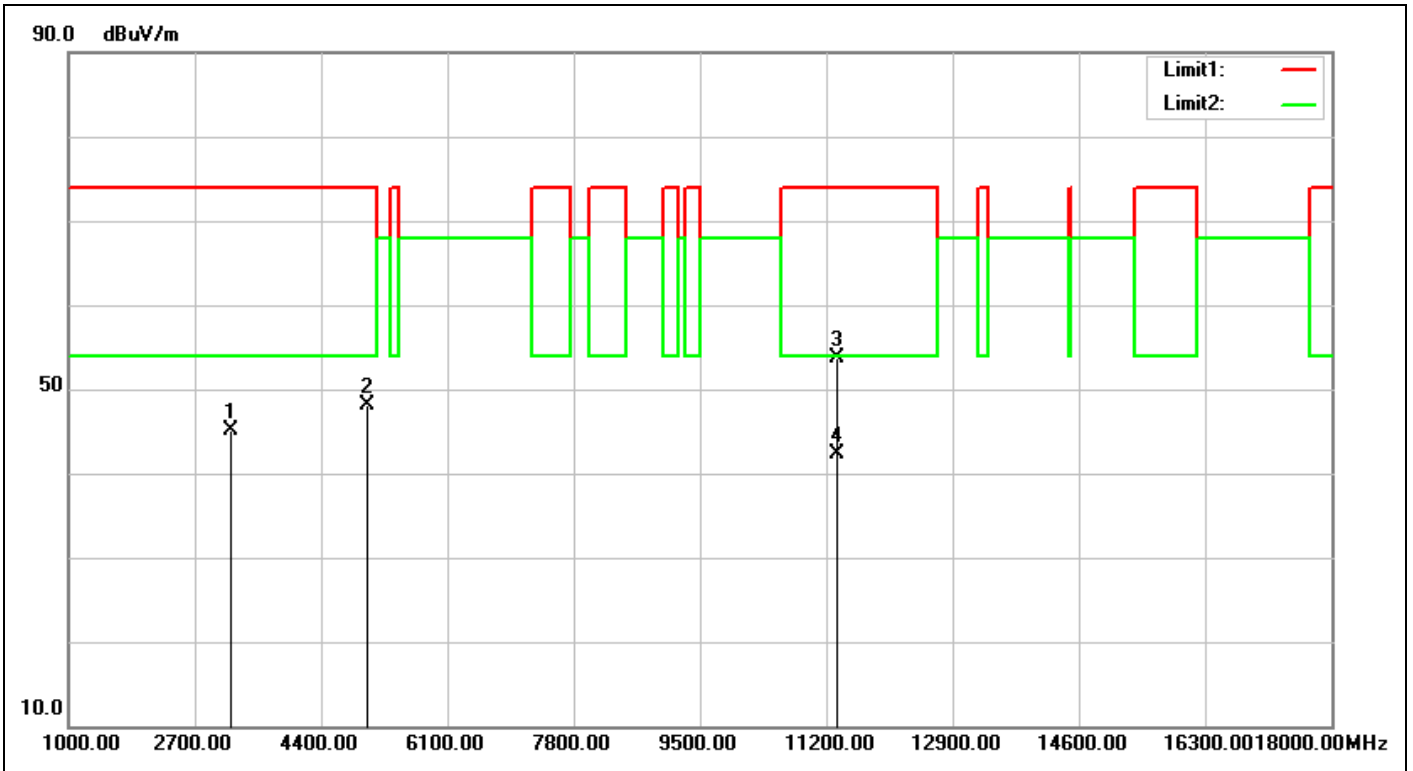


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 20:04:35
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5670-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3176.000	-5.32	50.35	45.03	74.00	-28.97	peak	180	155	
2	5029.000	-1.25	49.37	48.12	74.00	-25.88	peak	200	360	
3	11340.000	5.19	48.46	53.65	74.00	-20.35	peak	100	165	
4	11340.000	5.19	37.12	42.31	54.00	-11.69	AVG	100	165	

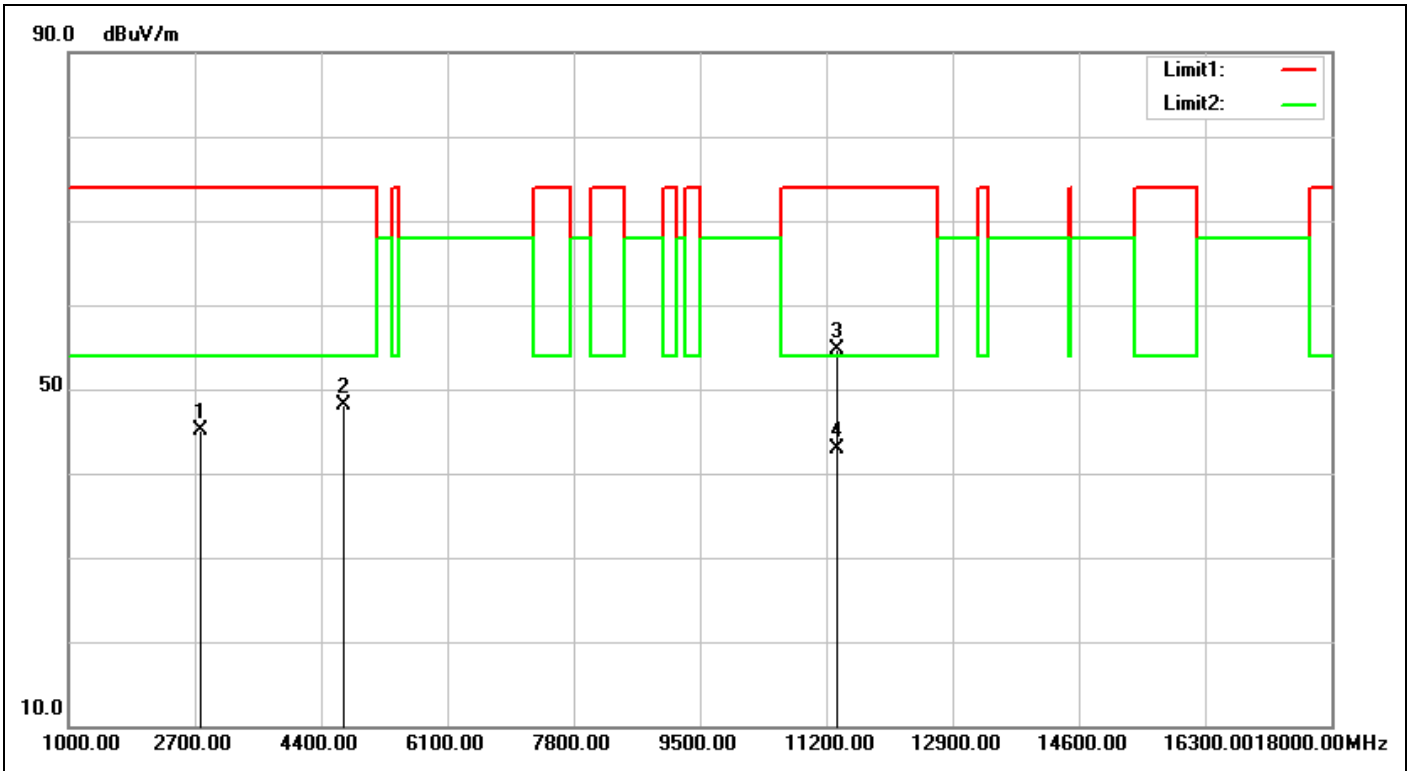


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 20:05:27
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5670-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2768.000	-5.85	50.86	45.01	74.00	-28.99	peak	100	78	
2	4706.000	-1.79	49.80	48.01	74.00	-25.99	peak	100	232	
3	11340.000	5.19	49.61	54.80	74.00	-19.20	peak	100	171	
4	11340.000	5.19	37.69	42.88	54.00	-11.12	AVG	100	171	

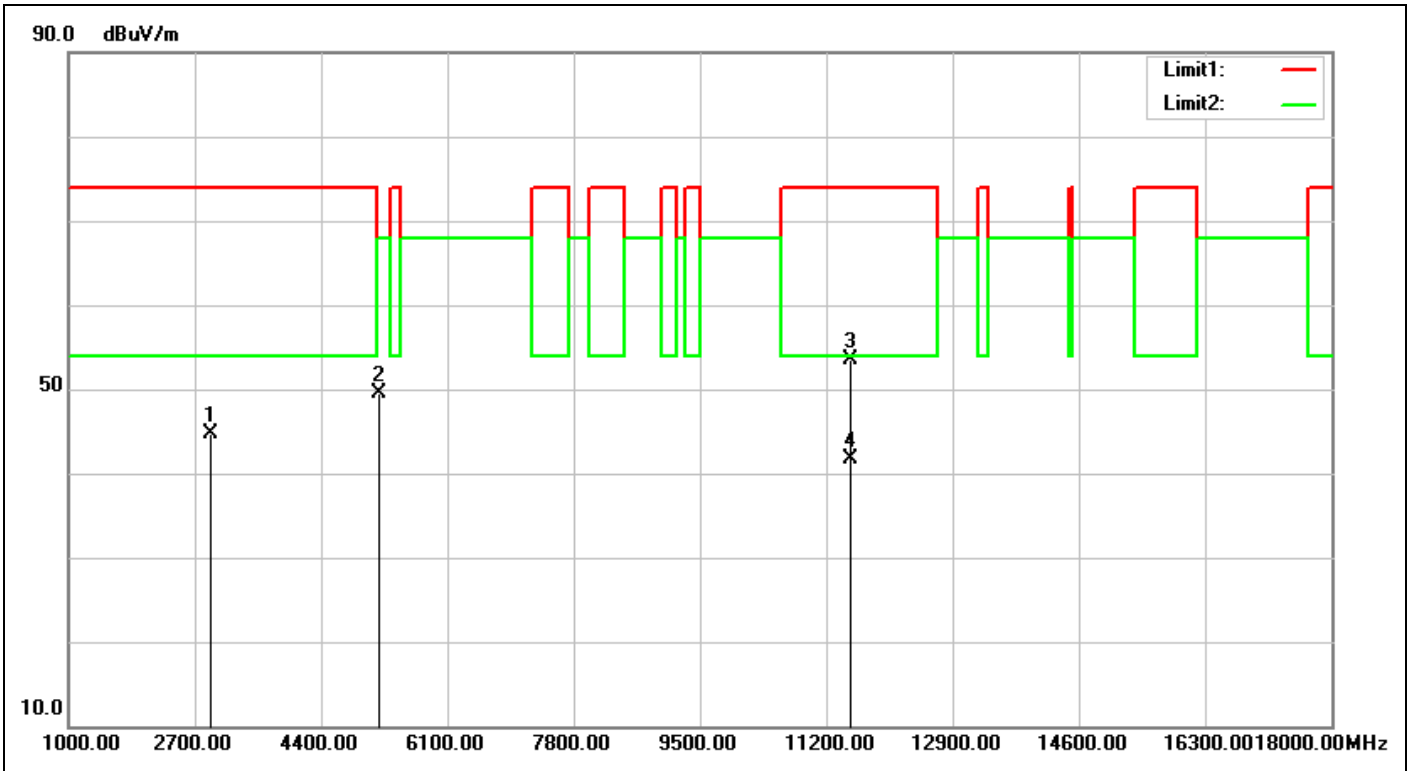


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 21:06:55
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5755-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2904.000	-5.62	50.24	44.62	74.00	-29.38	peak	150	109	
2	5182.000	-0.56	50.09	49.53	68.00	-18.47	peak	137	143	
3	11510.000	5.37	48.13	53.50	74.00	-20.50	peak	100	242	
4	11510.000	5.37	36.32	41.69	54.00	-12.31	AVG	100	242	

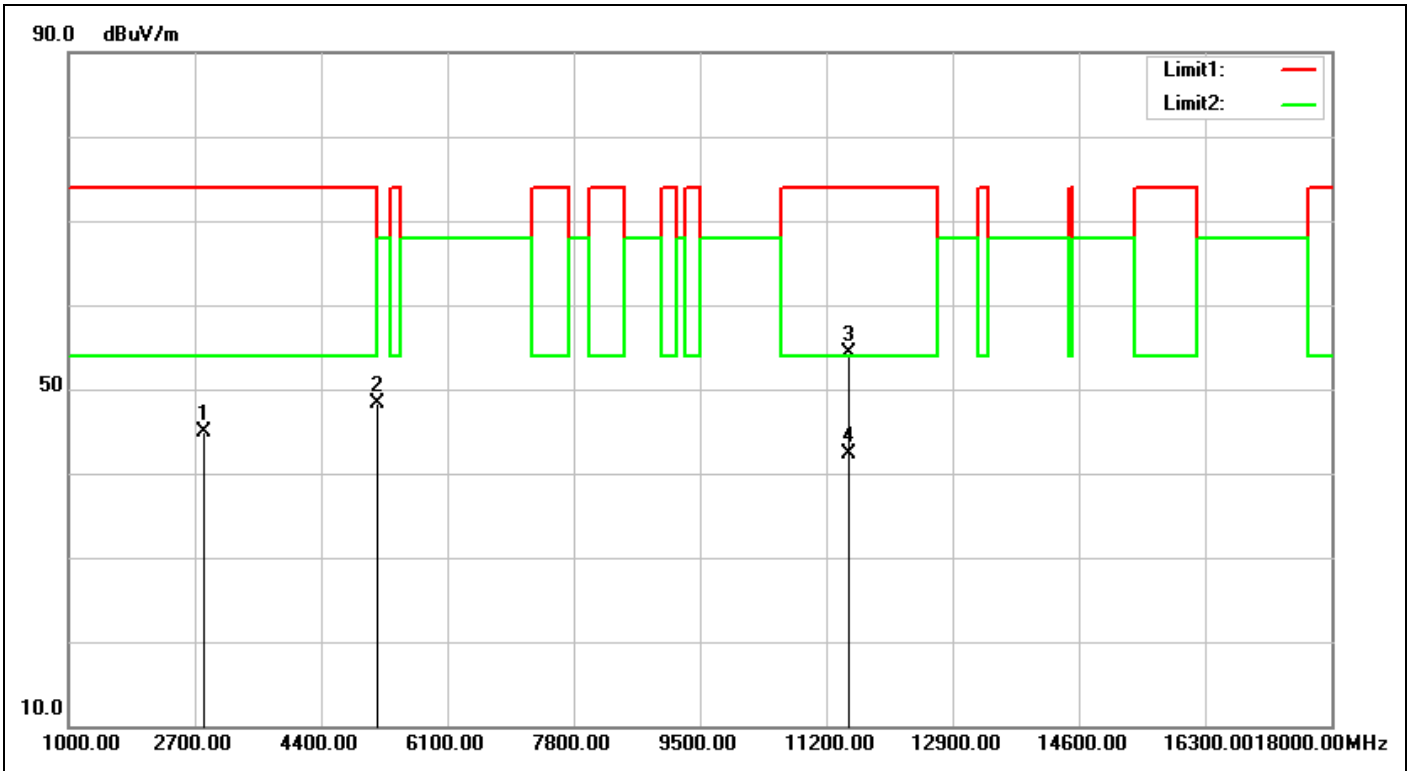


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 21:07:48
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5755-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2819.000	-5.77	50.64	44.87	74.00	-29.13	peak	200	248	
2	5148.000	-0.71	48.98	48.27	74.00	-25.73	peak	190	132	
3	11510.000	5.37	48.90	54.27	74.00	-19.73	peak	100	313	
4	11510.000	5.37	36.91	42.28	54.00	-11.72	AVG	100	312	

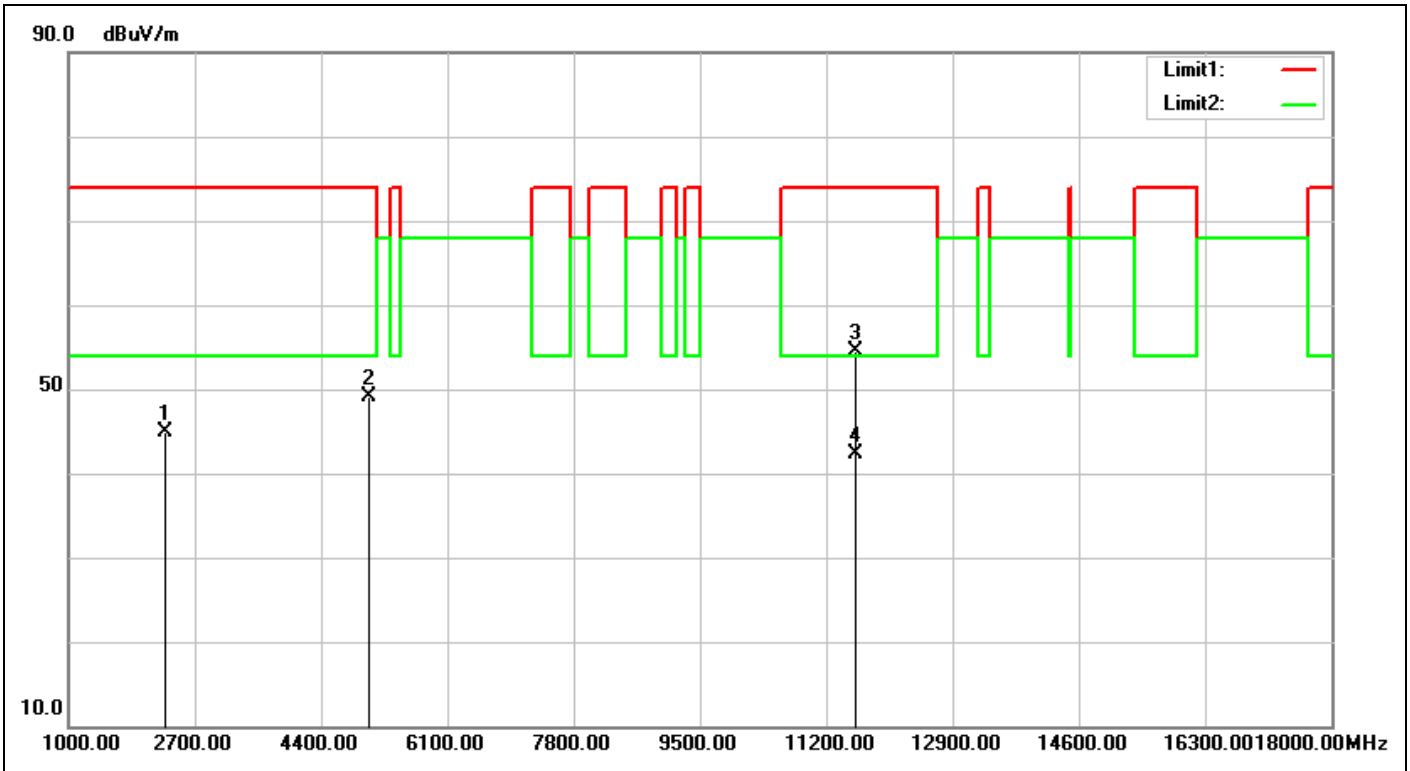

Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/22 21:14:15
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5795-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2292.000	-6.33	51.30	44.97	74.00	-29.03	peak	100	39	
2	5046.000	-1.17	50.25	49.08	74.00	-24.92	peak	160	125	
3	11590.000	5.67	48.86	54.53	74.00	-19.47	peak	100	108	
4	11590.000	5.67	36.63	42.30	54.00	-11.70	AVG	100	108	

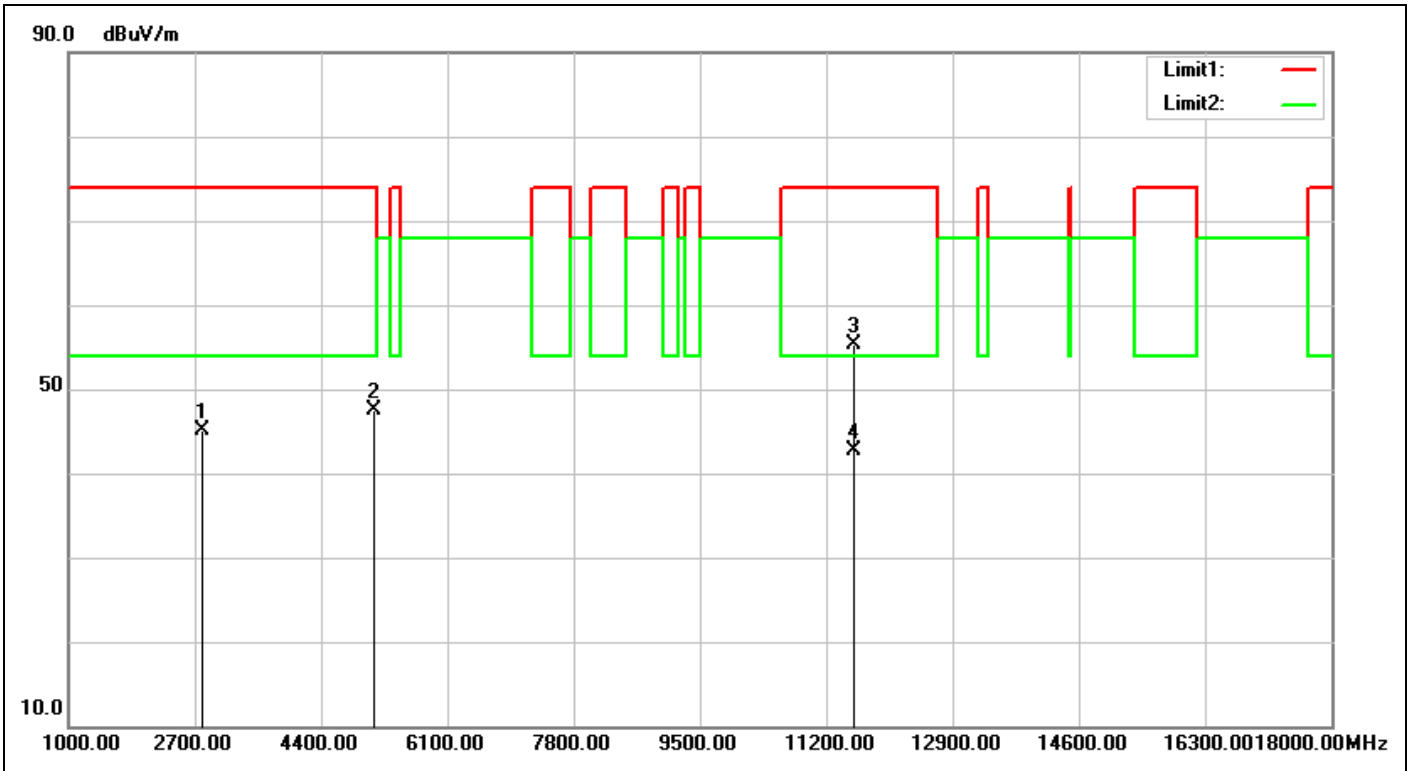


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC 1-40G UNII PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/22 21:15:08
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A40-5795-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2802.000	-5.79	50.84	45.05	74.00	-28.95	peak	198	10	
2	5114.000	-0.86	48.41	47.55	74.00	-26.45	peak	100	13	
3	11590.000	5.67	49.70	55.37	74.00	-18.63	peak	112	229	
4	11590.000	5.67	37.02	42.69	54.00	-11.31	AVG	112	229	

Spurious Emissions, TX Mode, 30MHz-1GHz




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

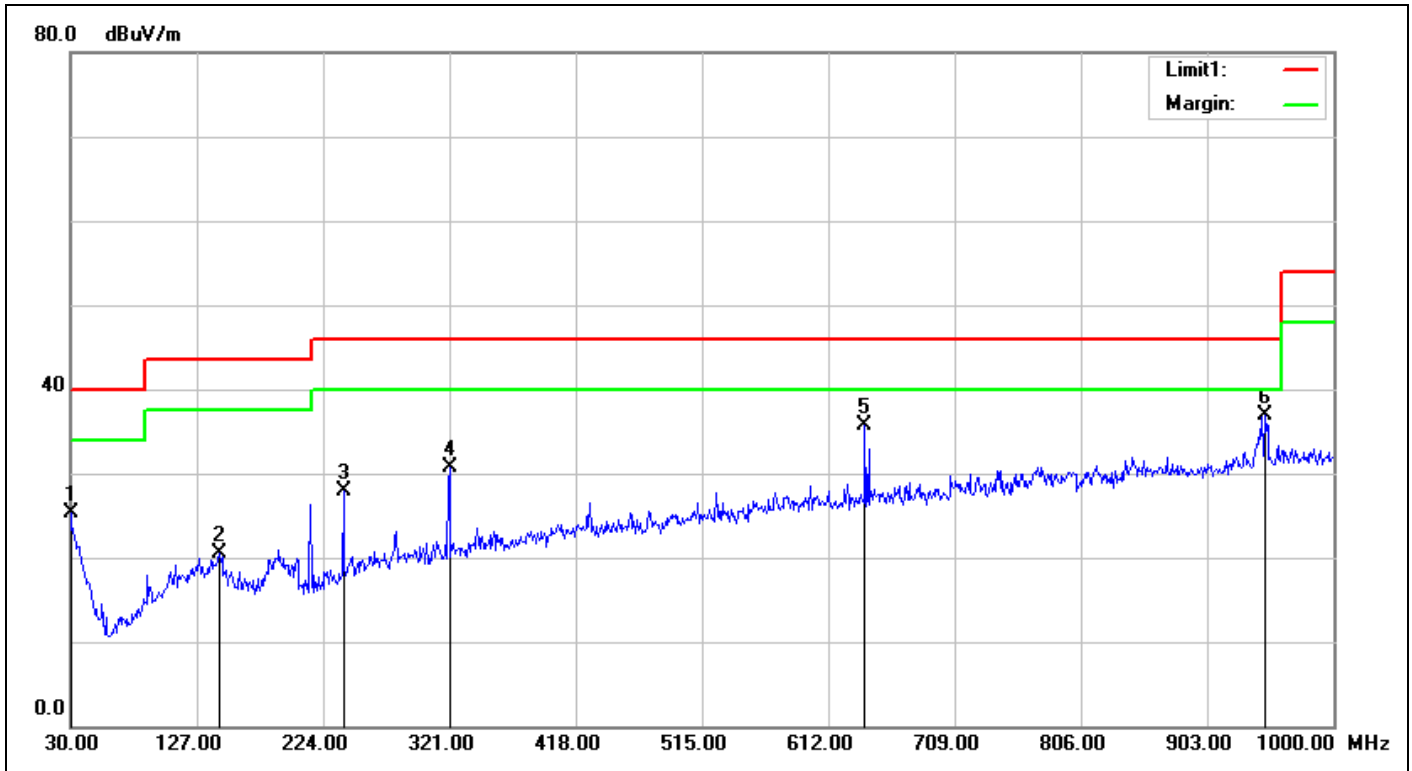

Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2019/4/23 00:00:58
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	25.31	25.28	40.00	-14.72	QP	300	143	
2	144.4600	-7.06	27.51	20.45	43.50	-23.05	QP	200	235	
3	239.5200	-6.78	34.72	27.94	46.00	-18.06	QP	100	202	
4	321.0000	-4.32	35.10	30.78	46.00	-15.22	QP	200	311	
5	640.1300	0.77	34.88	35.65	46.00	-10.35	QP	250	281	
6	947.6200	5.59	31.37	36.96	46.00	-9.04	QP	200	331	

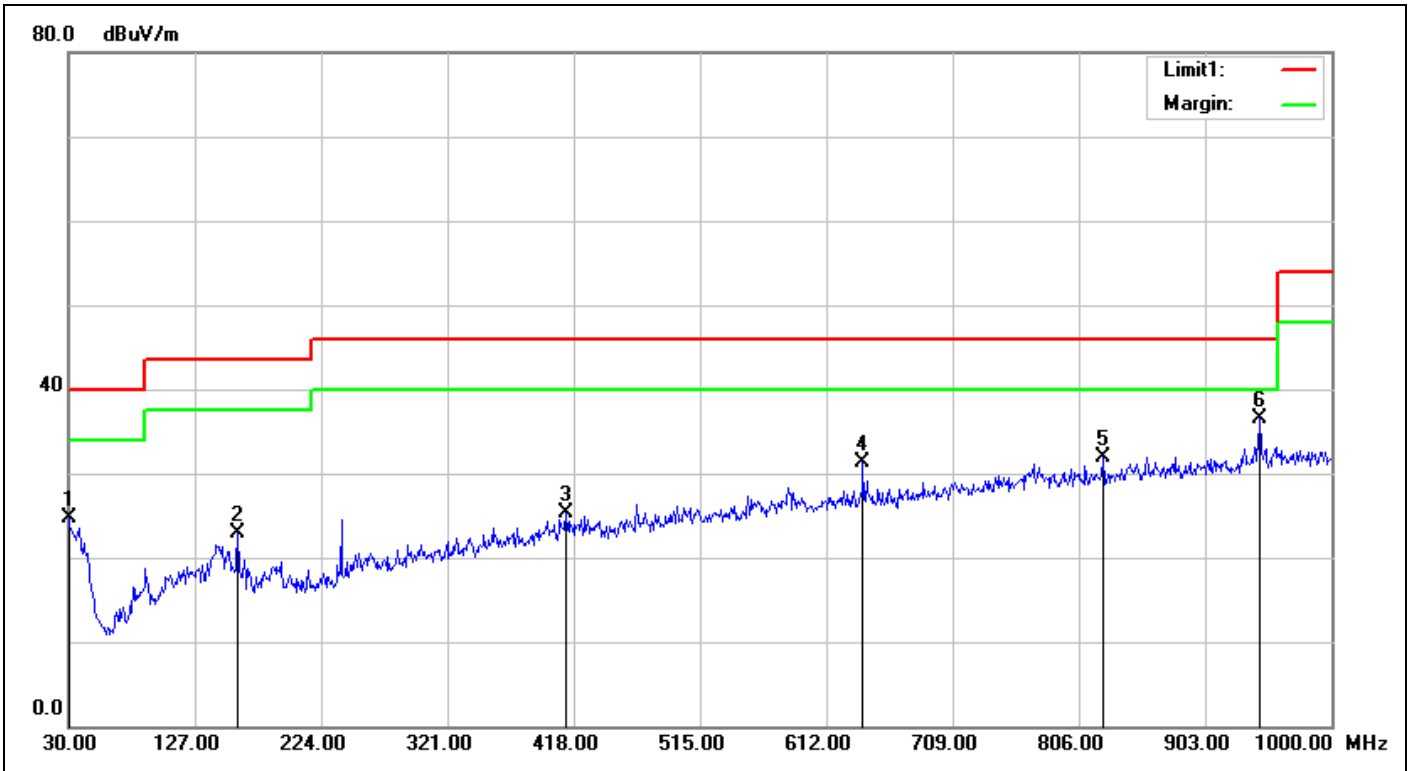


Service No.:	238102764	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2019/4/23 00:05:51
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	22(°C)/57%
Model No.:	20EAB9901	Test Engineer:	Kai Wang
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.03	24.73	24.70	40.00	-15.30	QP	100	92	
2	159.9800	-7.94	30.79	22.85	43.50	-20.65	QP	100	233	
3	412.1800	-2.02	27.31	25.29	46.00	-20.71	QP	100	26	
4	640.1300	0.77	30.52	31.29	46.00	-14.71	QP	100	325	
5	824.4300	3.39	28.47	31.86	46.00	-14.14	QP	100	36	
6	944.7100	5.47	31.12	36.59	46.00	-9.41	QP	100	203	

Spurious Emissions, TX Mode, 9kHz-30MHz




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

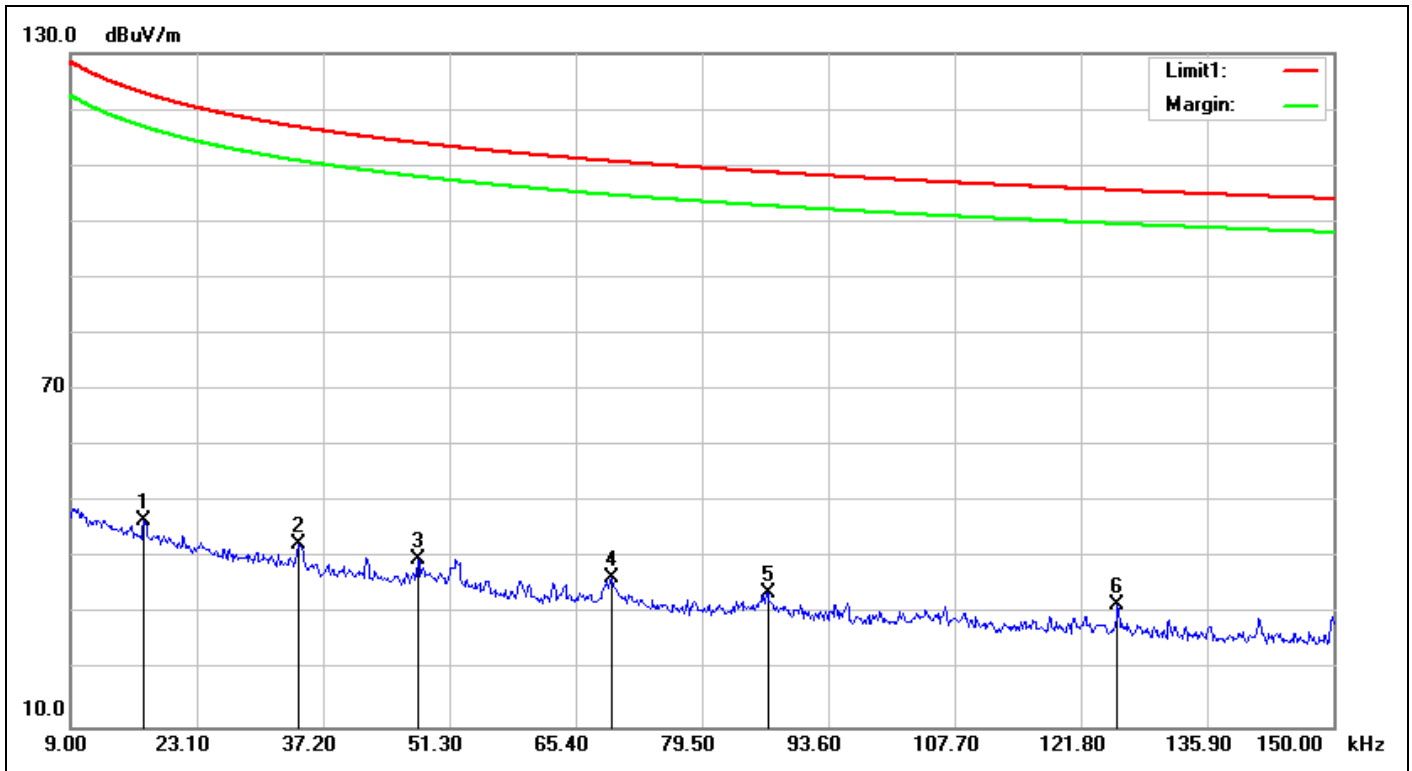

Service No.:	238102764	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2019/4/23 09:40:38
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	21.3(°C)/52%
Model No.:	20EAB9901	Test Engineer:	Curry Chen
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0172	18.81	27.86	46.67	122.88	-76.21	QP	100	158	
2	0.0344	19.23	23.18	42.41	116.86	-74.45	QP	100	263	
3	0.0478	18.96	20.80	39.76	114.00	-74.24	QP	100	197	
4	0.0693	18.69	17.91	36.60	110.78	-74.18	QP	100	138	
5	0.0868	18.48	15.49	33.97	108.83	-74.86	QP	100	127	
6	0.1259	18.34	13.34	31.68	105.60	-73.92	QP	100	0	

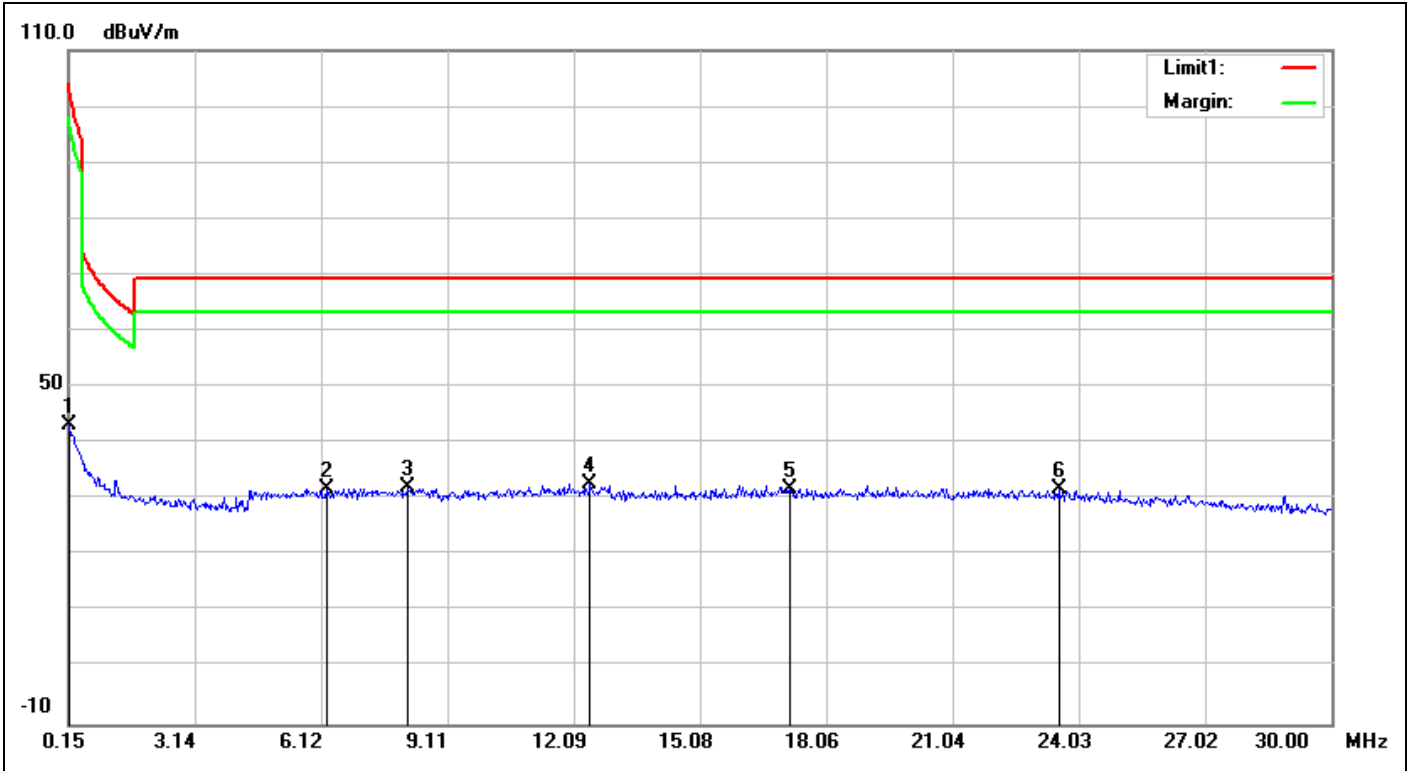


Service No.:	238102764	Test Distance:	3m
Test Standard:	NCC2.8_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2019/4/23 09:42:02
Applicant:	Eve Systems LLC	Test Rating:	AC 120V/60Hz
Product:	Eve Extend	Temp.(°C)/Hum.(%):	21.3(°C)/52%
Model No.:	20EAB9901	Test Engineer:	Curry Chen
Test Mode:	A-5785-Tx		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	18.36	24.87	43.23	104.08	-60.85	QP	100	239	
2	6.2394	19.71	12.23	31.94	69.50	-37.56	QP	100	268	
3	8.1797	20.08	12.08	32.16	69.50	-37.34	QP	100	1	
4	12.4781	20.73	11.88	32.61	69.50	-36.89	QP	100	315	
5	17.1944	21.28	10.63	31.91	69.50	-37.59	QP	100	226	
6	23.5524	21.74	10.12	31.86	69.50	-37.64	QP	100	77	

Spurious Emissions, AC Mains




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

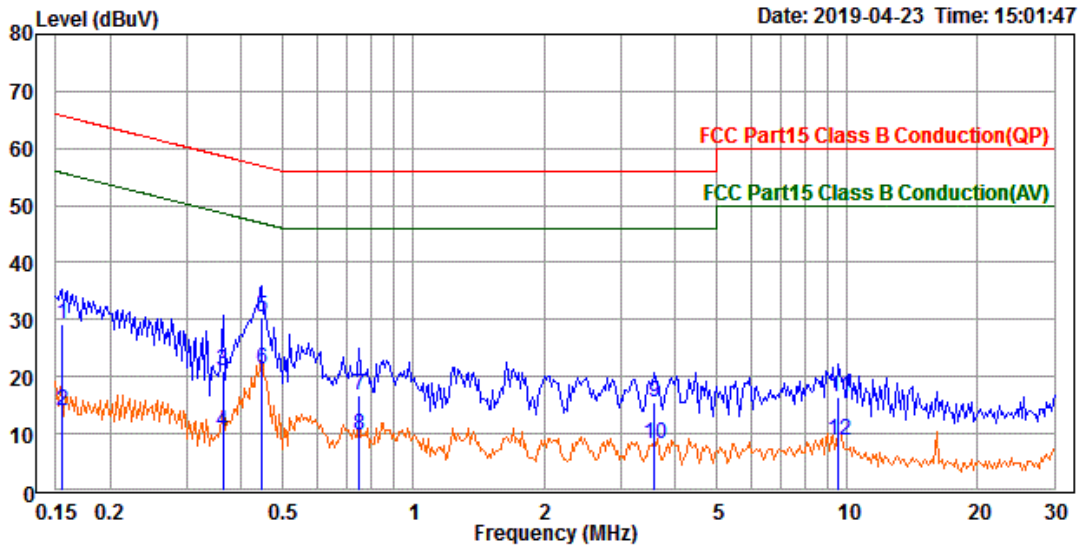

Trace: 1
 Site : Conduction room
 Condition : FCC Part15 Class B Conduction(QP) line1
 Test Engineer: Kevin Kuo
 Applicant :
 Product : Eve Extend
 Model No. : 20EAB9901
 Test Rating : 120Vac/60Hz
 Tmp/Hum : 24.2 °C / 34%
 Memo : WIFI 5G Mode

	Read Freq	Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	19.51	9.68	29.19	65.75	-36.56	QP
2	0.155	4.16	9.68	13.84	55.75	-41.91	Average
3	0.363	11.18	9.69	20.87	58.65	-37.78	QP
4	0.363	0.63	9.69	10.32	48.65	-38.33	Average
5	0.448	20.87	9.69	30.56	56.92	-26.36	QP
6	0.448	11.57	9.69	21.26	46.92	-25.66	Average
7	0.751	6.94	9.70	16.64	56.00	-39.36	QP
8	0.751	0.08	9.70	9.78	46.00	-36.22	Average
9	3.575	5.84	9.74	15.58	56.00	-40.42	QP
10	3.575	-1.40	9.74	8.34	46.00	-37.66	Average
11	9.564	6.50	9.83	16.33	60.00	-43.67	QP
12	9.564	-0.99	9.83	8.84	50.00	-41.16	Average

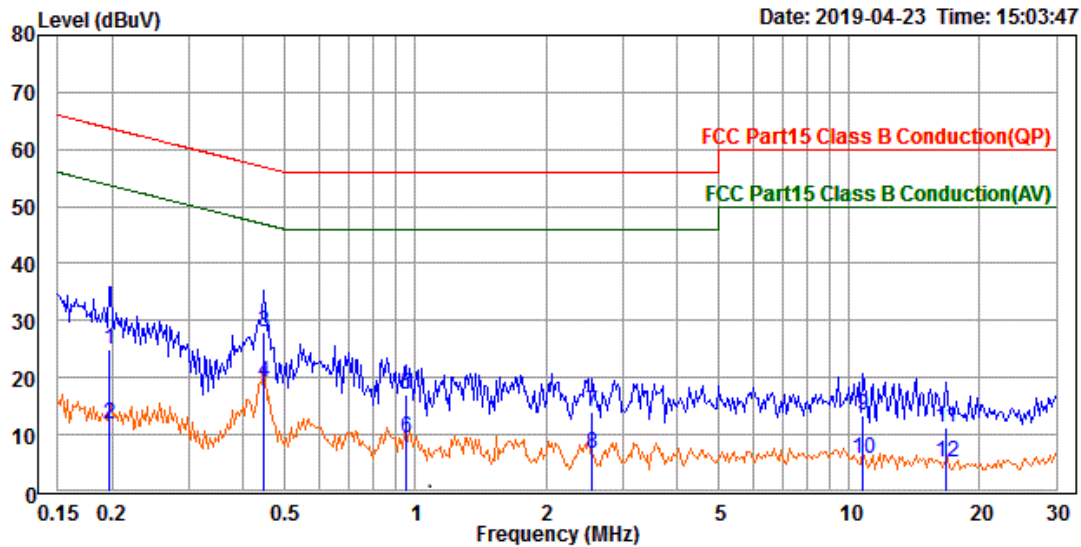

Trace: 1
 Site : Conduction room
 Condition : FCC Part15 Class B Conduction(QP) neutral
 Test Engineer: Kevin Kuo
 Applicant :
 Product : Eve Extend
 Model No. : 20EAB9901
 Test Rating : 120Vac/60Hz
 Tmp/Hum : 24.2 °C / 34%
 Memo : WIFI 5G Mode

	Read Freq	Level	Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.196	15.35	9.68	25.03	63.77	-38.74	QP
2	0.196	2.17	9.68	11.85	53.77	-41.92	Average
3	0.448	18.43	9.68	28.11	56.92	-28.81	QP
4	0.448	9.59	9.68	19.27	46.92	-27.65	Average
5	0.953	7.33	9.70	17.03	56.00	-38.97	QP
6	0.953	-0.20	9.70	9.50	46.00	-36.50	Average
7	2.550	4.37	9.72	14.09	56.00	-41.91	QP
8	2.550	-2.92	9.72	6.80	46.00	-39.20	Average
9	10.776	3.47	9.84	13.31	60.00	-46.69	QP
10	10.776	-4.20	9.84	5.64	50.00	-44.36	Average
11	16.688	1.25	9.89	11.14	60.00	-48.86	QP
12	16.688	-4.86	9.89	5.03	50.00	-44.97	Average