


Labeling for UWPA

Label design:

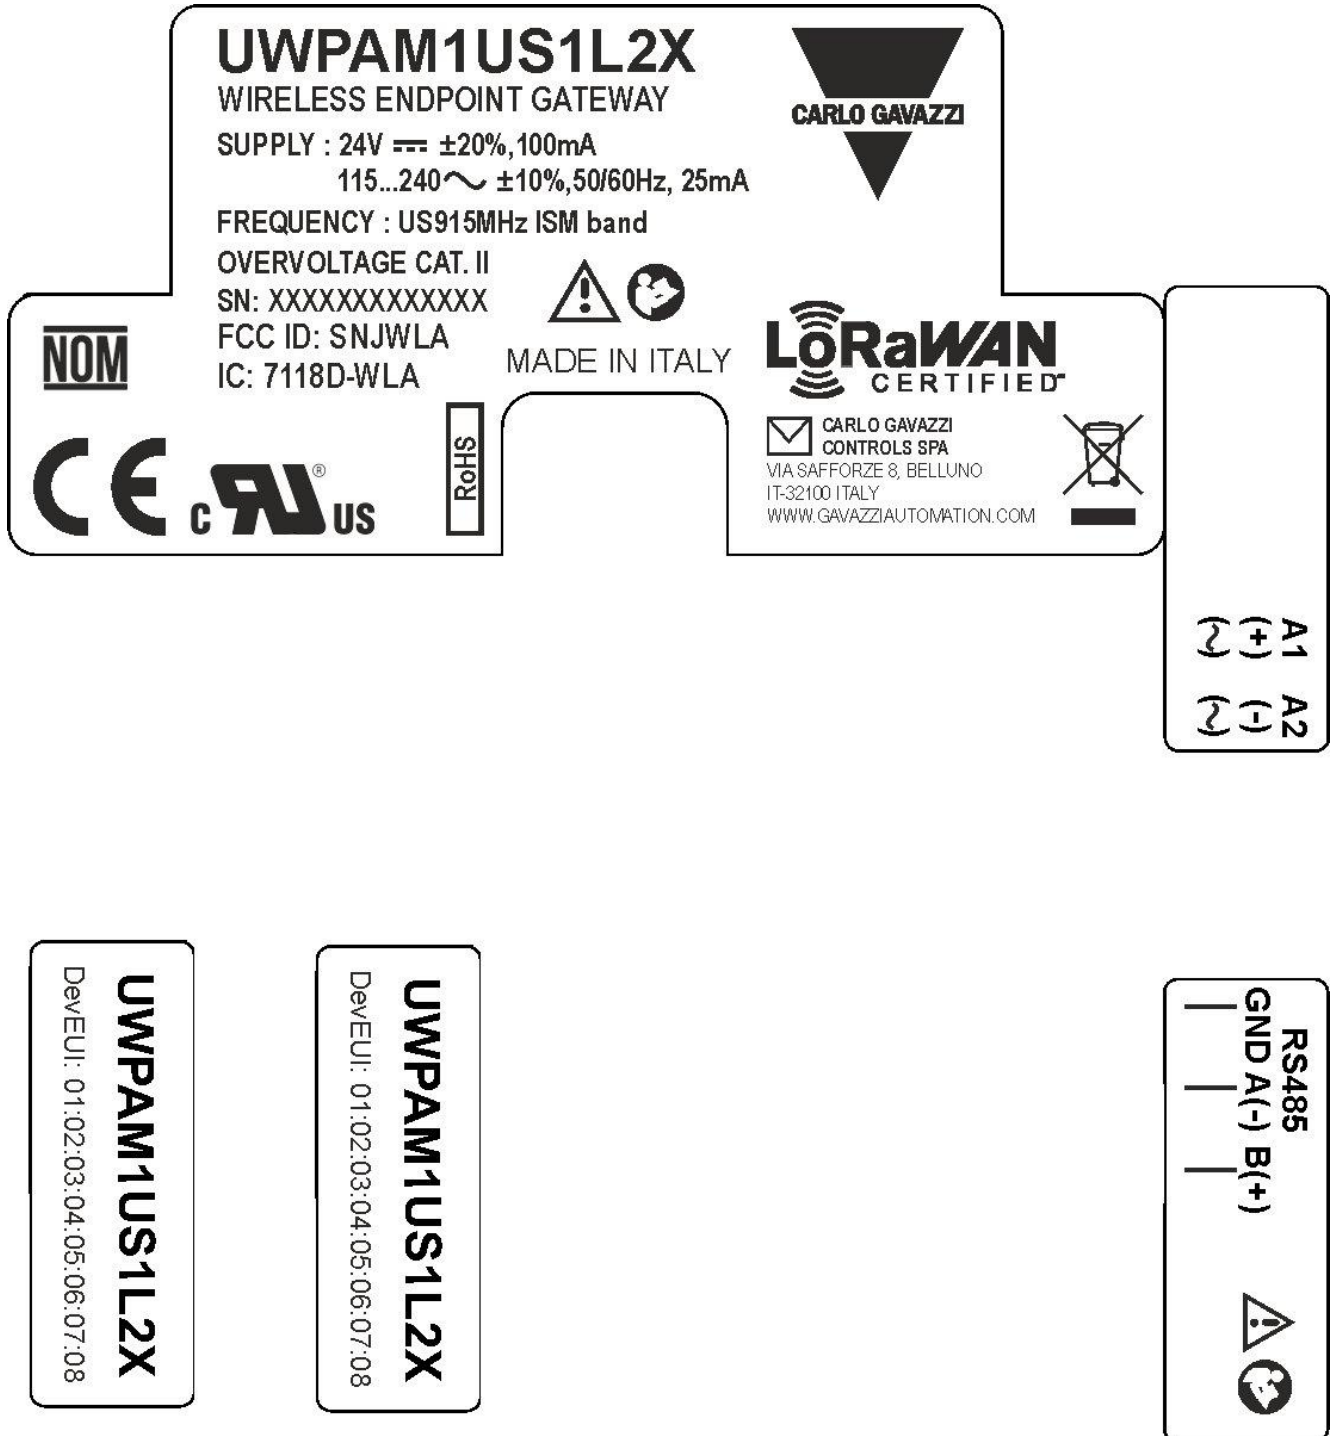

**UWPAM1US1L2X**  
 WIRELESS ENDPOINT GATEWAY

SUPPLY : 24V  $\pm 20\%$ , 100mA  
 115...240  $\pm 10\%$ , 50/60Hz, 25mA

FREQUENCY : US915MHz ISM band  
 OVERVOLTAGE CAT. II  
 SN: XXXXXXXXXXXXX  
 FCC ID: SNJWLA  
 IC: 7118D-WLA

**CARLO GAVAZZI**

**NOM**

**CE** **RoHS** **UL** **US**

MADE IN ITALY

**LoRaWAN**  
 CERTIFIED

CARLO GAVAZZI  
 CONTROLS SPA  
 VIA SAFFORZE 8, BELLUNO  
 IT-32100 ITALY  
 WWW.GAVAZZIAUTOMATION.COM

A1 (+)  
 A2 (-)

**UWPAM1US1L2X**  
 DeveUI: 01:02:03:04:05:06:07:08

**UWPAM1US1L2X**  
 DeveUI: 01:02:03:04:05:06:07:08

RS485  
 GND A(-) B(+)

Label location:

