

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

SJ Incorporated


FCC ID: SNL-16003510
Product Description: Receiver GR-12L Graupner/SJ HoTT
Model No.: GR-12L
Supplementary Model: GR-12S,GR-12

Prepared for: **SJ Incorporated**
8th F,202 Dong,Chunui Techno-Park2,202,Chuni-Dong,Wonmi-Gu,Bucheon-Shi,Kyungki-Do,South Korea

Prepared by: **Bontek Compliance Testing Laboratory Co., Ltd**
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028


Report No.: BCT13DR121E
Issue Date: June 4, 2013
Test Date: April 18~ June 3, 2013

Tested by:




Lion Cai

Reviewed by:



Kendy Wang

Approved by:



Tony Wu

TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
 - 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4
 - 1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY4
 - 1.3 TEST FACILITY5
- 2. SYSTEM TEST CONFIGURATION6**
 - 2.1 EUT CONFIGURATION6
 - 2.2 EUT EXERCISE6
 - 2.3 GENERAL TEST PROCEDURES6
 - 2.4 MEASUREMENT UNCERTAINTY6
 - 2.5 TEST EQUIPMENT LIST AND DETAILS7
- 3. SUMMARY OF TEST RESULTS8**
- 4. TEST OF AC POWER LINE CONDUCTED EMISSION.....9**
 - 4.1 APPLICABLE STANDARD9
 - 4.2 TEST SETUP DIAGRAM9
 - 4.3 TEST RESULT9
- 5. TEST OF HOPPING CHANNEL BANDWIDTH 10**
 - 5.1 APPLICABLE STANDARD 10
 - 5.2 EUT SETUP 10
 - 5.3 TEST EQUIPMENT LIST AND DETAILS 10
 - 5.4 TEST PROCEDURE 10
 - 5.5 TEST RESULT 10
- 6. TEST OF HOPPING CHANNEL SEPARATION..... 13**
 - 6.1 APPLICABLE STANDARD 13
 - 6.2 EUT SETUP 13
 - 6.3 TEST EQUIPMENT LIST AND DETAILS 13
 - 6.4 TEST PROCEDURE 13
 - 6.5 TEST RESULT 13
- 7. TEST OF NUMBER OF HOPPING FREQUENCY 16**
 - 7.1 APPLICABLE STANDARD 16
 - 7.2 EUT SETUP 16
 - 7.3 TEST EQUIPMENT LIST AND DETAILS 16
 - 7.4 TEST PROCEDURE 16
 - 7.5 TEST RESULT 16
- 8. TEST OF DWELL TIME OF EACH FREQUENCY 18**
 - 8.1 APPLICABLE STANDARD 18
 - 8.2 EUT SETUP 18
 - 8.3 TEST EQUIPMENT LIST AND DETAILS 18
 - 8.4 TEST PROCEDURE 18
 - 8.5 TEST RESULT 18
- 9. TEST OF MAXIMUM PEAK OUTPUT POWER 22**
 - 9.1 APPLICABLE STANDARD 22
 - 9.2 EUT SETUP 22
 - 9.3 TEST EQUIPMENT LIST AND DETAILS 22
 - 9.4 TEST PROCEDURE 22
 - 9.5 TEST RESULT 22
- 10. TEST OF BAND EDGES EMISSION 25**
 - 10.1 APPLICABLE STANDARD 25
 - 10.2 EUT SETUP 25
 - 10.3 TEST EQUIPMENT LIST AND DETAILS 25
 - 10.4 TEST PROCEDURE 25
 - 10.5 TEST RESULT 26
- 11. TEST OF SPURIOUS RADIATED EMISSION 28**

11.1 APPLICABLE STANDARD 28
11.2 EUT SETUP 28
11.3 TEST EQUIPMENT LIST AND DETAILS..... 29
11.4 TEST PROCEDURE 29
11.5 TEST RESULT 30
12. ANTENNA REQUIREMENT 43
12.1 STANDARD APPLICABLE 43
12.2 ANTENNA CONNECTED CONSTRUCTION 43

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	SJ Incorporated
Address of applicant:	8th F,202 Dong,Chunui Techno-Park2,202,Chuni-Dong,Wonmi-Gu,Bucheon-Shi,Kyungki-Do,South Korea
Manufacturer 1:	SJ Technology(Shenzhen)Co.,Ltd
Address of manufacturer:	F6, 1 Bldg, A Area, Yintianxifa Industrial Area, Xixiang Town, Baoan District Shenzhen, Guangdong Province, China
Manufacturer 2:	SJ Incorporated
Address of manufacturer:	8th F,202 Dong,Chunui Techno-Park2,202,Chuni-Dong,Wonmi-Gu,Bucheon-Shi,Kyungki-Do,South Korea

General Description of E.U.T

Items	Description
EUT Description:	Receiver GR-12L Graupner/SJ HoTT
Model No.:	GR-12L
Trade Name:	GRAUPNER/SJ HoTT
Supplementary Model:	GR-12S,GR-12
Frequency Band:	2404.056~2474.025
Channel Spacing:	1 MHz
Number of Channels:	70
Type of Modulation:	FHSS
Antenna Gain	1.5dBi
Antenna Type:	External Antenna
Rated Voltage:	Input: DC 6V from battery

Remark: * The test data gathered are from the production sample provided by the manufacturer.
Supplementary Models are no difference. Management, according to the sales region.

1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules. Test was carried out according to the above mentioned FCC rules and the FCC publication notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China and Centre Testing International (ShenZhen) Corporation ,Location at Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

Shenzhen Bontek Compliance Testing Laboratory Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

Shenzhen Bontek Compliance Testing Laboratory Ltd. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50242657-0001

Shenzhen Bontek Compliance Testing Laboratory Ltd. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-003.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2013-4-16	2014-4-15
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2012-11-1	2013-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2013-4-19	2014-4-18
4	BCT-EMC004	Single Power Conductor Module	R&S	NNBM 8124	242	2013-4-19	2014-4-18
5	BCT-EMC005	Single Power Conductor Module	R&S	NNBM 8124	243	2013-4-19	2014-4-18
6	BCT-EMC006	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-11-5	2013-11-4
7	BCT-EMC007	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	BCT-EMC008	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2012-11-2	2013-11-1
9	BCT-EMC009	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2013-4-16	2014-4-15
10	BCT-EMC010	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2012-6-26	2013-6-25
11	BCT-EMC011	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	BCT-EMC012	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2013-4-16	2014-4-15
14	BCT-EMC014	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2013-4-16	2014-4-15
15	BCT-EMC015	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2012-11-28	2013-11-27
16	BCT-EMC016	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2012-11-28	2013-11-27
17	BCT-EMC017	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2012-11-28	2013-11-27
18	BCT-EMC018	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2012-5-19	2014-5-18
19	BCT-EMC019	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-28	2013-11-27
20	BCT-EMC020	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2012-11-1	2013-10-31
21	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-11-15	2013-11-14
22	BCT-EMC022	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2013-4-16	2014-4-15
24	BCT-EMC027	CDN	FRANKONIA	CDN M2+M3	A3027019	2013-4-16	2014-4-15
25	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2013-4-16	2014-4-15

26	BCT-EMC030	EM Injection clamp	FCC	F-203I-23mm	091536	2013-4-16	2014-4-15
27	BCT-EMC031	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2013-4-16	2014-4-15
28	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2013-4-16	2014-4-15
29	BCT-EMC033	ISN	TESEQ	ISN-T800	30301	2012-11-15	2013-11-14
30	BCT-EMC034	10KV surge generator	SANKI	SKS-0510M	048110003E321	2012-11-01	2013-10-31
31	BCT-EMC035	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2012-11-20	2013-11-19
32	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2012-11-1	2013-10-31
33	BCT-EMC037	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2013-4-19	2014-4-18

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(a)(1)	Hopping Channel Bandwidth	Pass
FCC §15.247(a)(1)	Hopping Channel Separation	Pass
FCC §15.247(a)(1)	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1)	Maximum Peak Output Power	Pass
FCC §15.247(d)	Band Edges Emission	Pass
FCC §15.247(d)	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

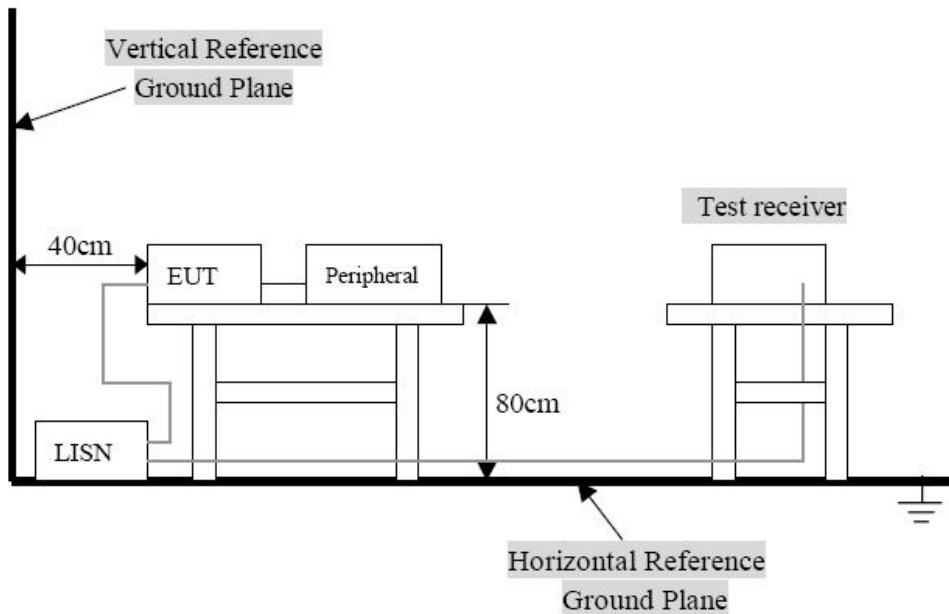

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

4.3 Test Result


Notes: The EUT is powered by battery without AC mains(with battery),this test is not applicable.

5. Test of Hopping Channel Bandwidth

5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2 EUT Setup

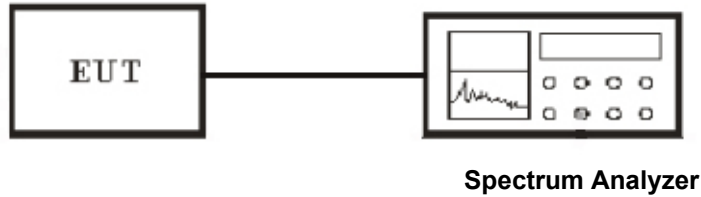

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
 Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	Low	2404.056	504	>25
FHSS	Middle	2438.533	508	>25
FHSS	High	2474.025	512	>25


Channel Low:

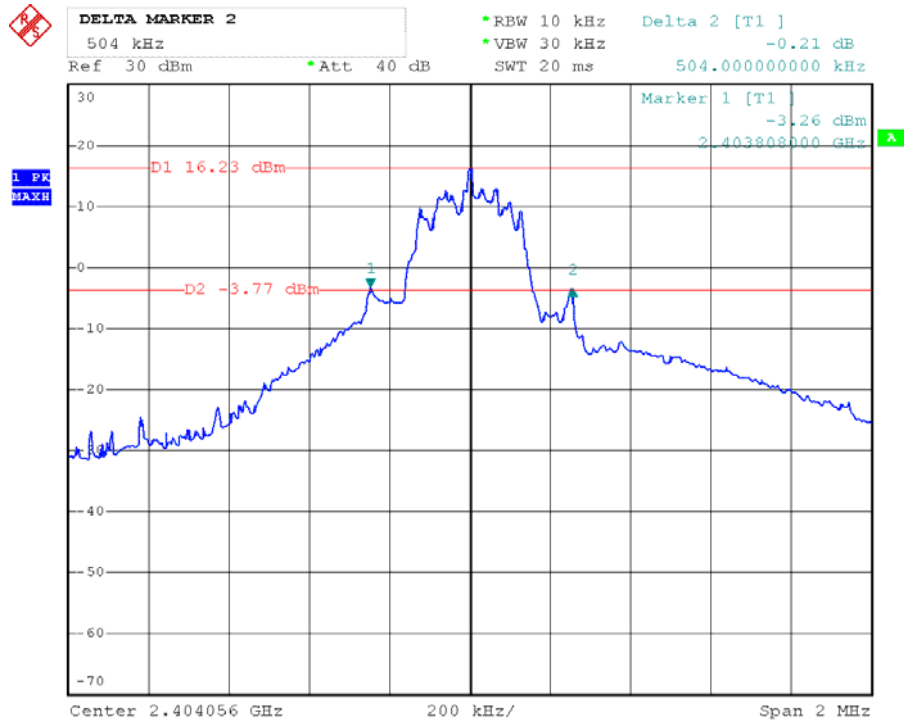

Channel Middle:

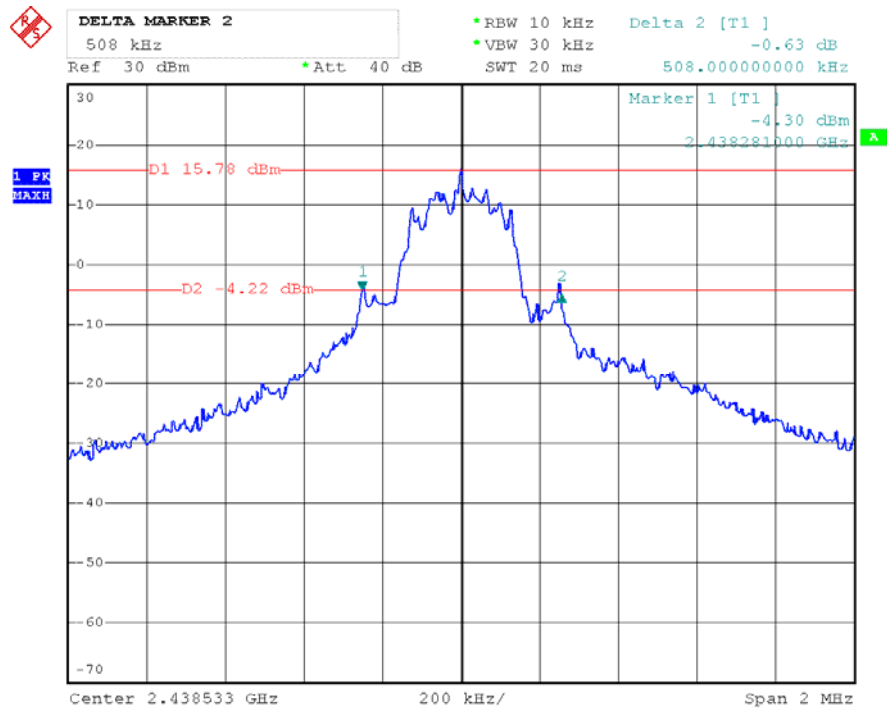

Channel High:

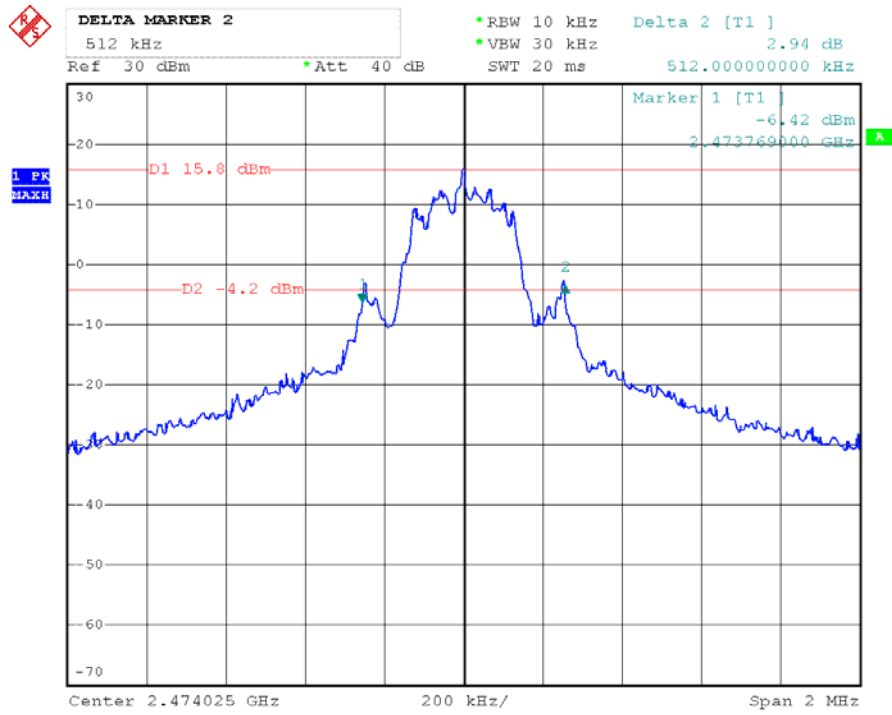


6. Test of Hopping Channel Separation

6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2 EUT Setup

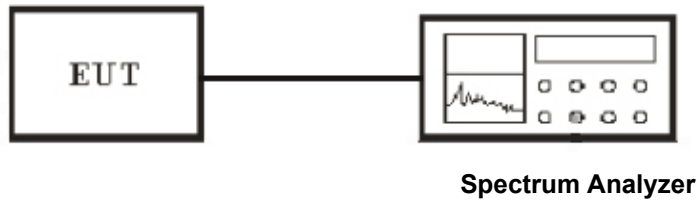

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

6.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (kHz)
FHSS	2404.056~2405.056	1.004	>25
FHSS	2438.533~2439.533	1.008	>25
FHSS	2473.025~2474.025	1.008	>25


Channel Low:

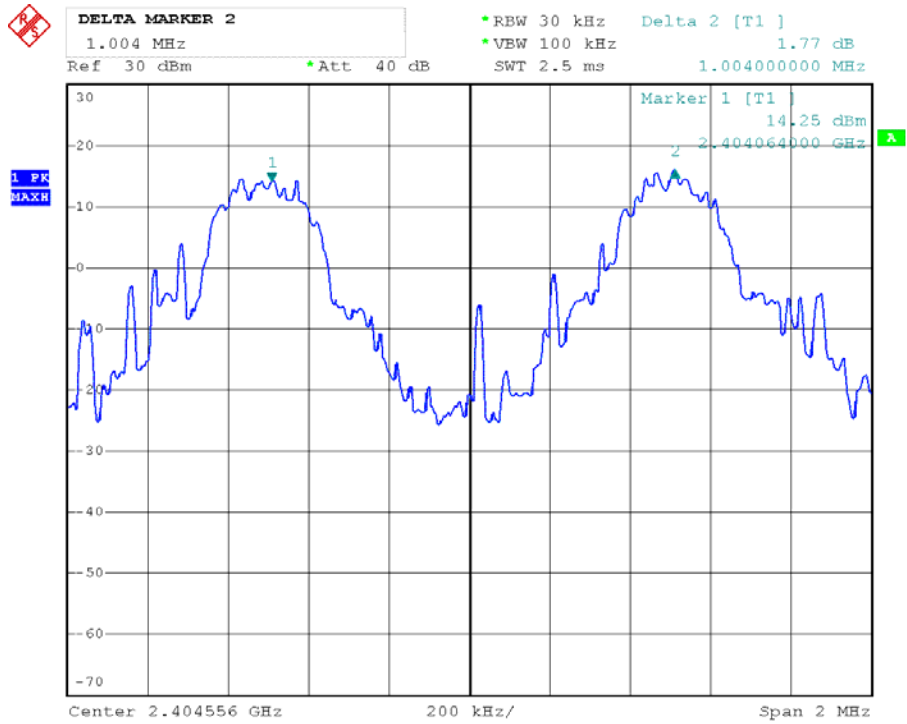

Channel Middle:

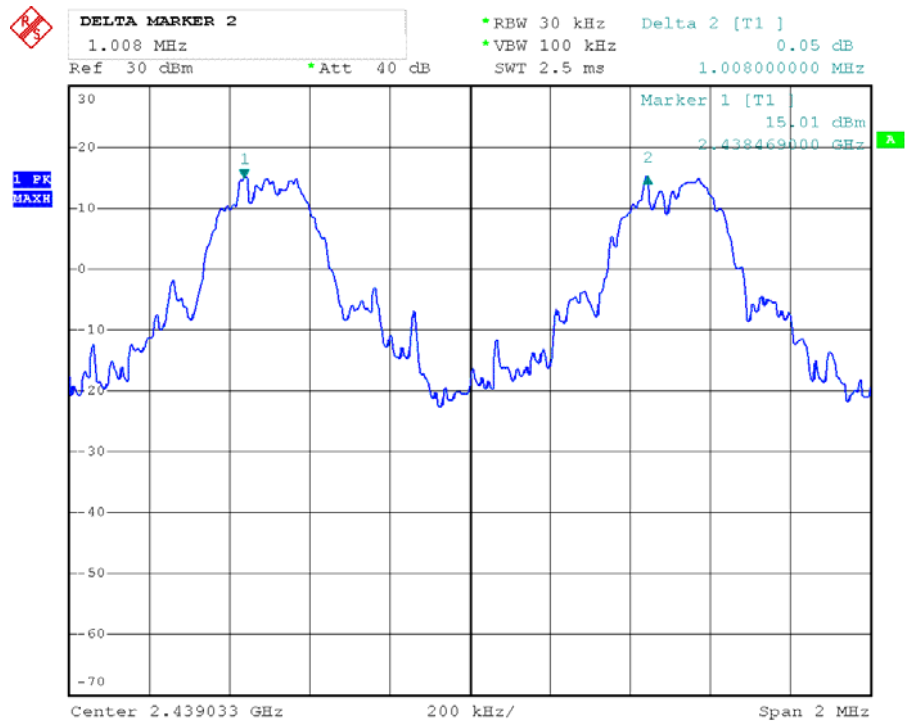

Channel High:

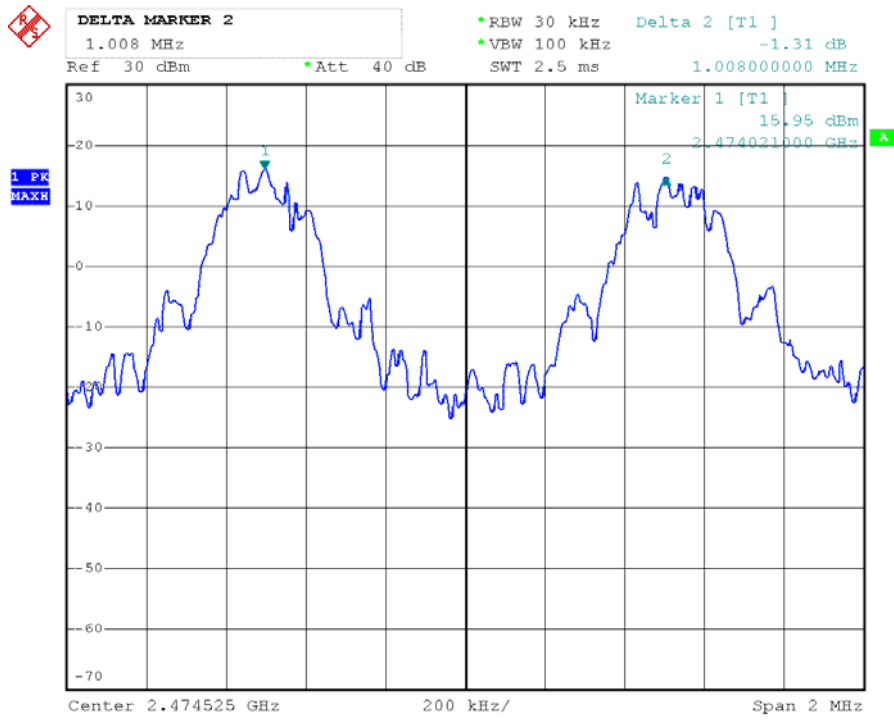


7. Test of Number of Hopping Frequency

7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

7.2 EUT Setup

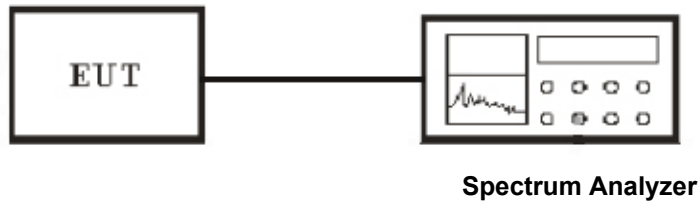

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

7.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
FHSS	2404.056~2474.025	70	≥ 15



DELTA MARKER 2
75.317 MHz
Ref 30 dBm *Att 40 dB

*RBW 100 kHz Delta 2 [T1]
*VBW 300 kHz -0.47 dB
SWT 10 ms 75.317000000 MHz

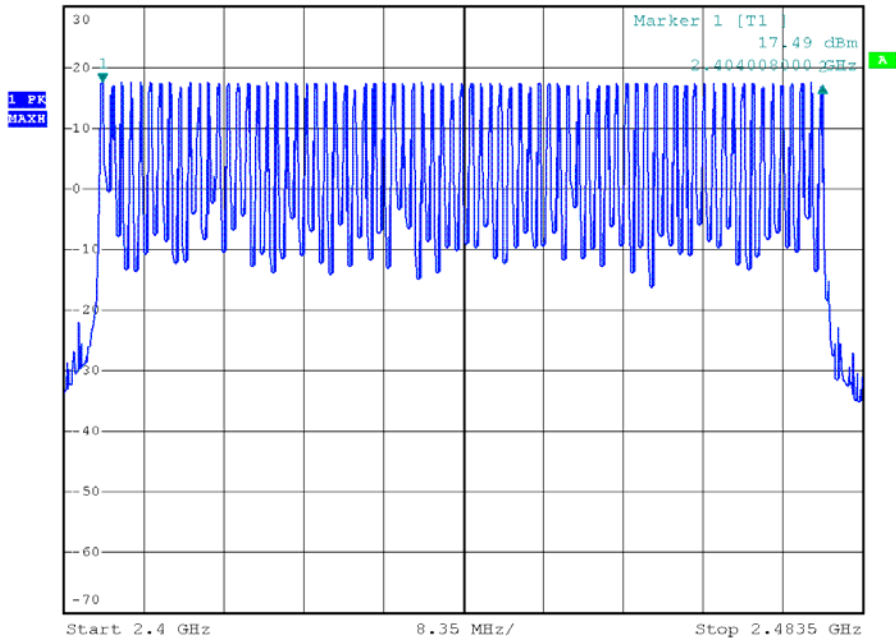


8. Test of Dwell Time of Each Frequency

8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

8.2 EUT Setup

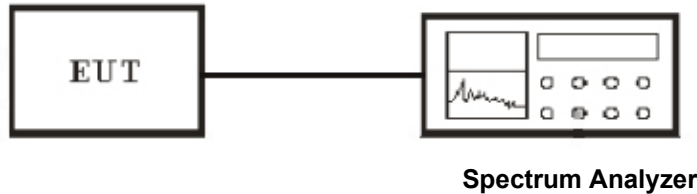

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

8.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2403	73.34	400
FHSS	Middle	2448	73.34	400
FHSS	High	2479	73.34	400


A period time = $0.4 \text{ (ms)} * 70 = 28 \text{ (s)}$
N=38
CH Low:
Time slot = 1.93(ms)
Dwell time = $N * T = 38 * 1.93 = 142.88 \text{ (ms)}$

CH Mid:
Time slot = 1.93 (ms)
Dwell time = $N * T = 38 * 1.93 = 143.64 \text{ (ms)}$


CH High:
Time slot = 1.93 (ms)
Dwell time = $N * T = 38 * 1.93 = 143.64 \text{ (ms)}$

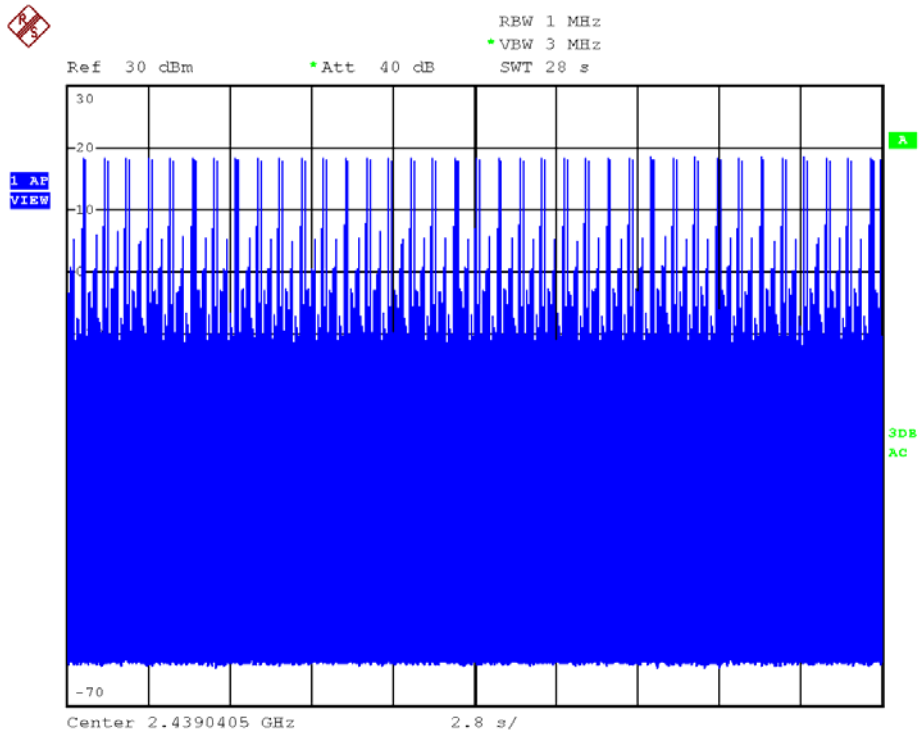


Channel Low:

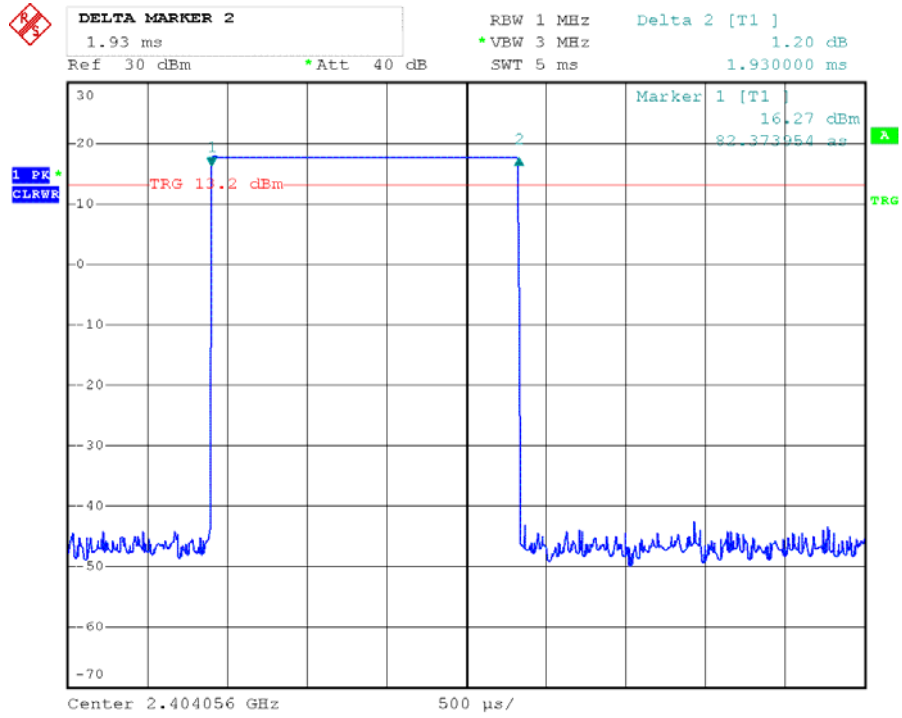

Channel Middle:

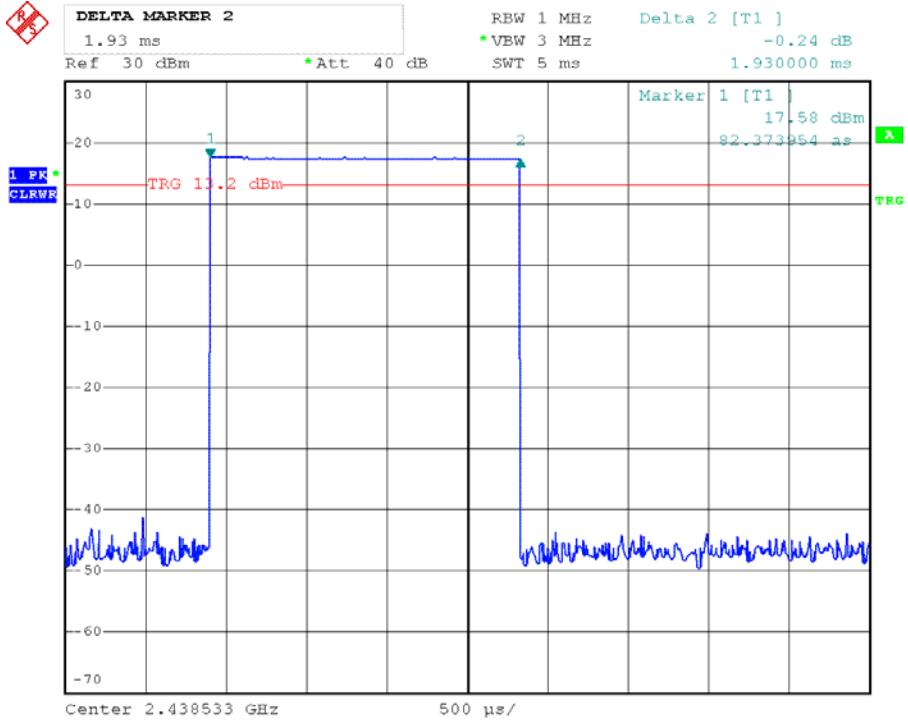

Channel High:

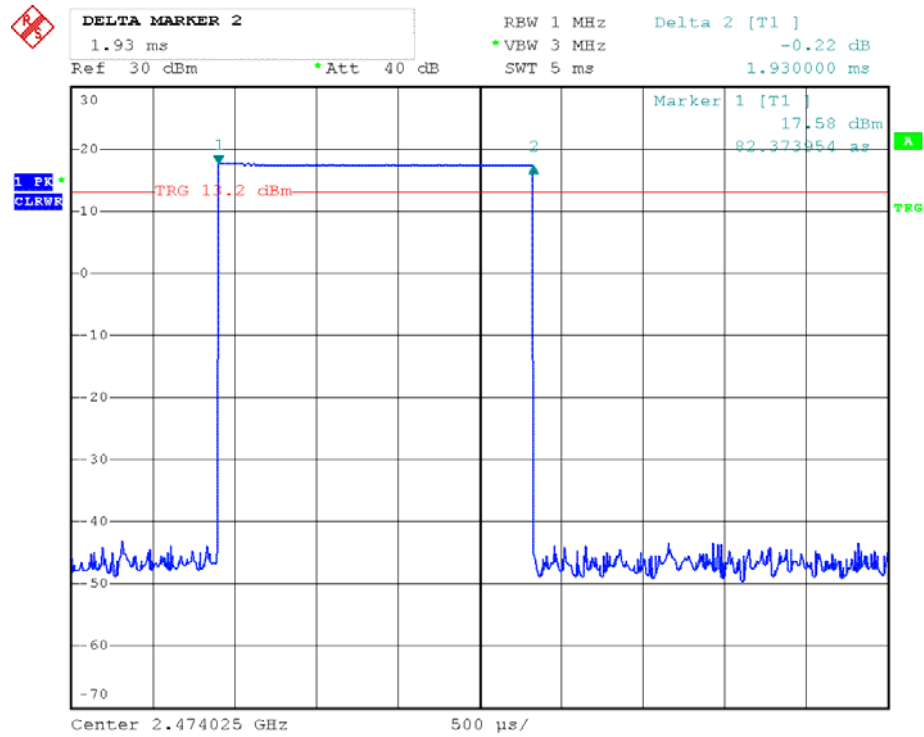


9. Test of Maximum Peak Output Power

9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

9.2 EUT Setup

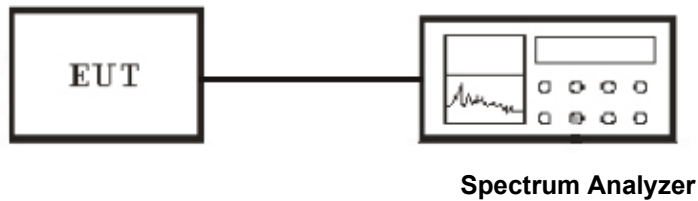

9.3 Test Equipment List and Details

See section 2.5.

9.4 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

9.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2403	17.61	21	2.43
FHSS	Middle	2448	17.59	21	2.28
FHSS	High	2479	17.60	21	2.39

Channel Low:

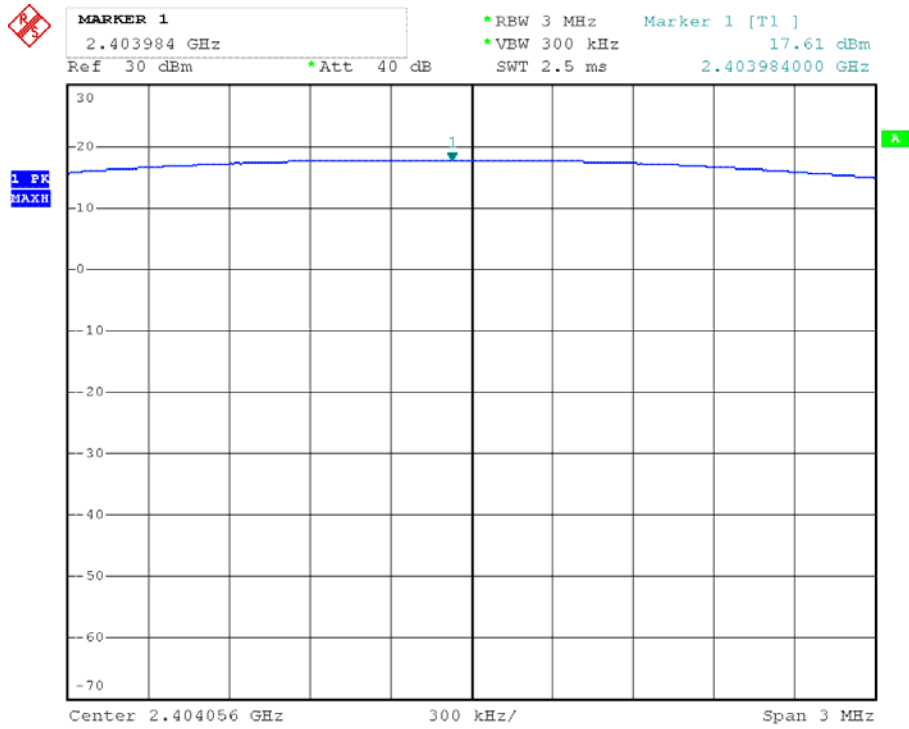

Channel Middle:

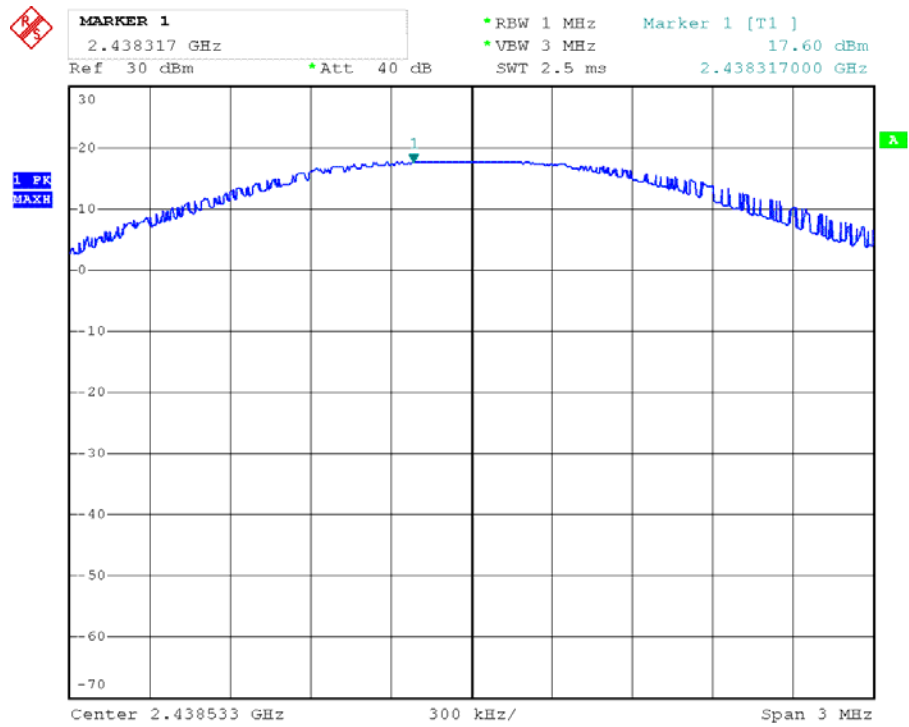

Channel High:




MARKER 1
2.474073 GHz

*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz 17.59 dBm
SWT 2.5 ms 2.474073000 GHz

Ref 30 dBm *Att 40 dB

1 PK
MAXH

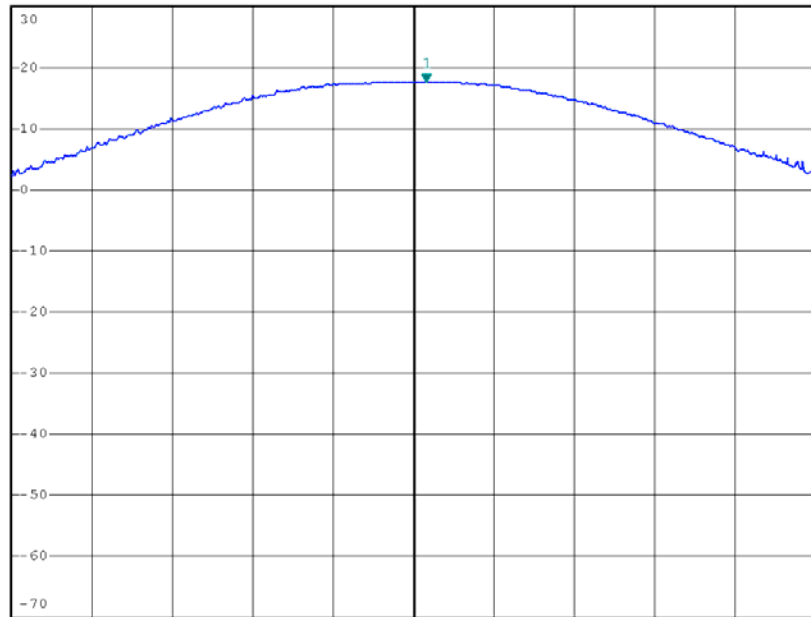

Center 2.474025 GHz 300 kHz/ Span 3 MHz

10. Test of Band Edges Emission

10.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup


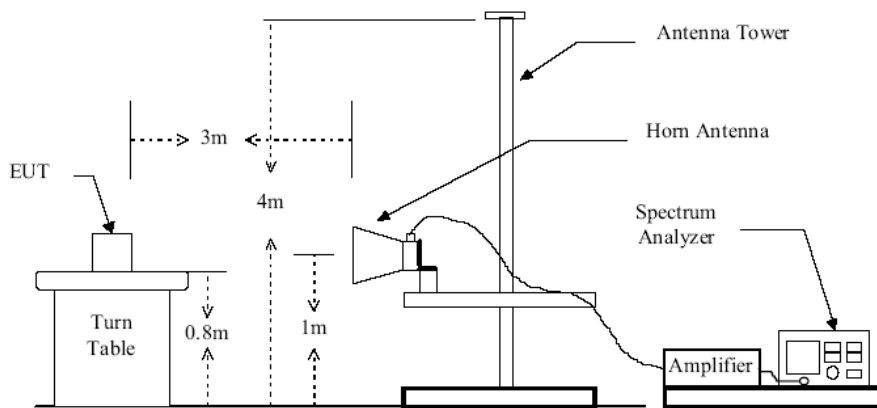


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

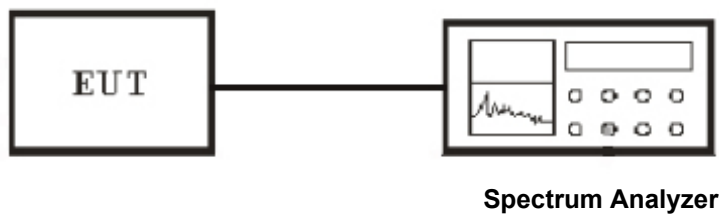

10.3 Test Equipment List and Details

See section 2.5.

10.4 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

10.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

Radiated Test Result


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBµV/m)	Limits (dBµV/m)
<2400	H	43.54	54
>2483.5	H	42.67	54

Conducted Test Result

The worst frequency range of Low Channel

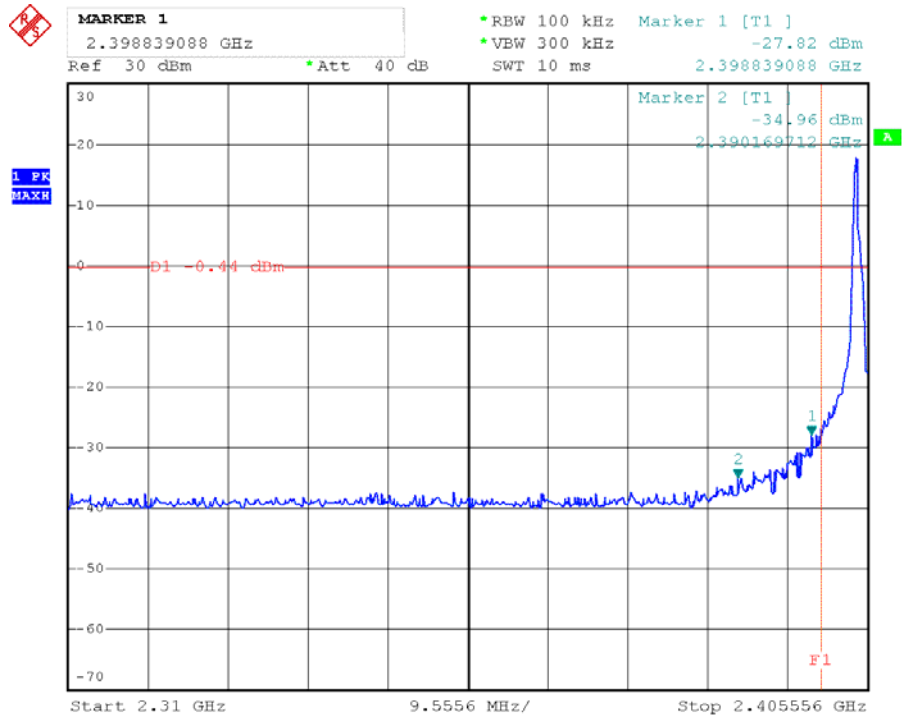

The worst frequency range of High Channel

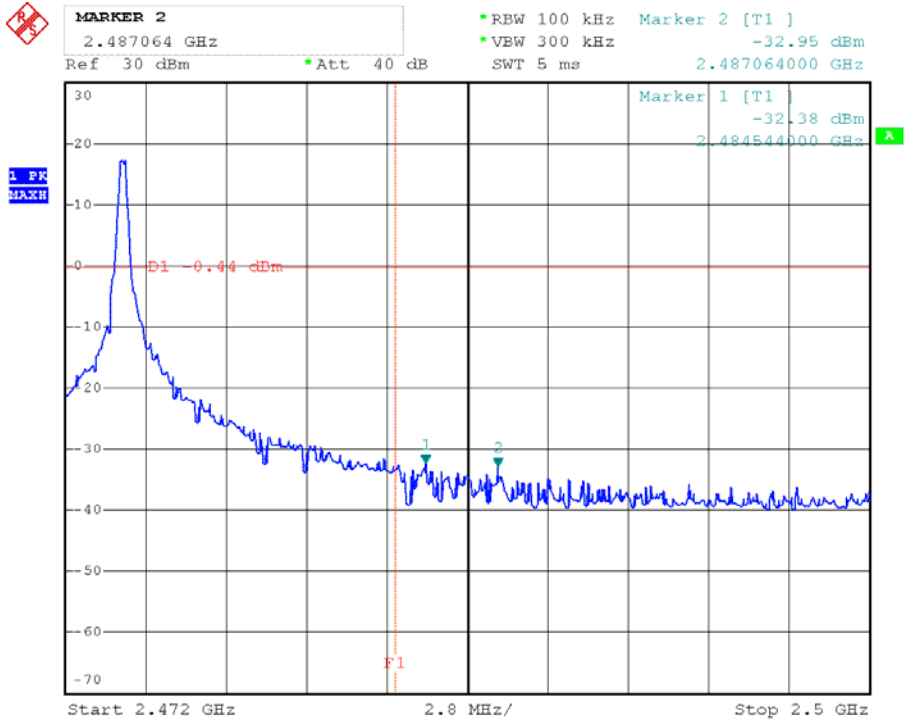


11. Test of Spurious Radiated Emission

11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

11.2 EUT Setup

Conducted Measurement Setup

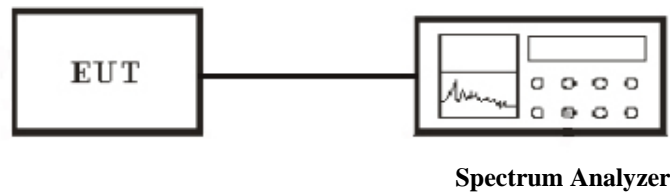

Radiated Measurement Setup

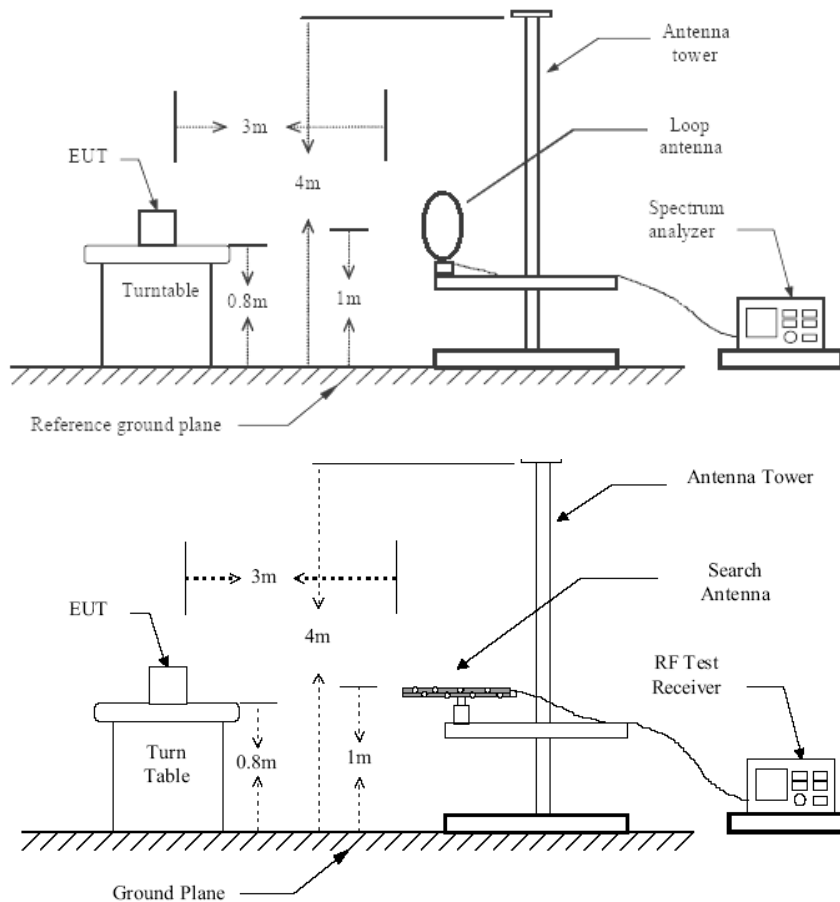


Figure 1 : Frequencies measured below 1 GHz configuration

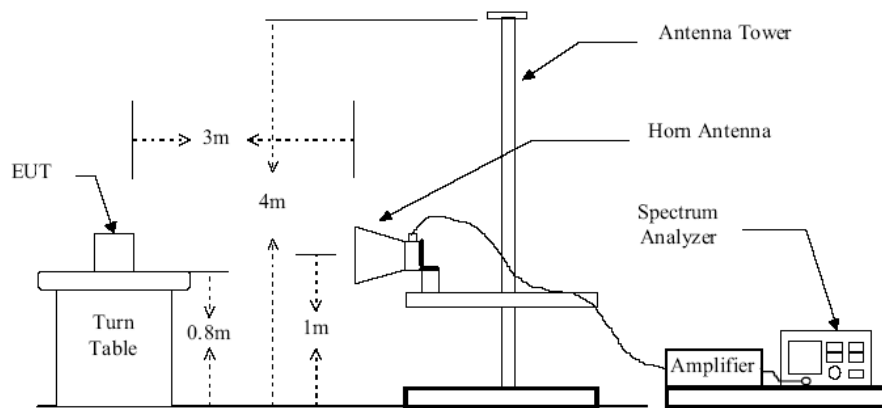


Figure 2 : Frequencies measured above 1 GHz configuration

11.3 Test Equipment List and Details

See section 2.5.

11.4 Test Procedure

Conducted Measurement

1. For emission above 1GHz to 26G,conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. Receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable. When the frequency spectrum measured started from 9 kHz to 30 MHz, a loop antenna is used. When the frequency spectrum measured started from 30 MHz to 1000 MHz and above 1000 MHz, a broadband receiving antenna and the horn antenna are used.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 26GHz.

9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.

11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

11.5 Test Result


Temperature (°C) : 22~23	EUT: Receiver GR-12L Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-12L
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

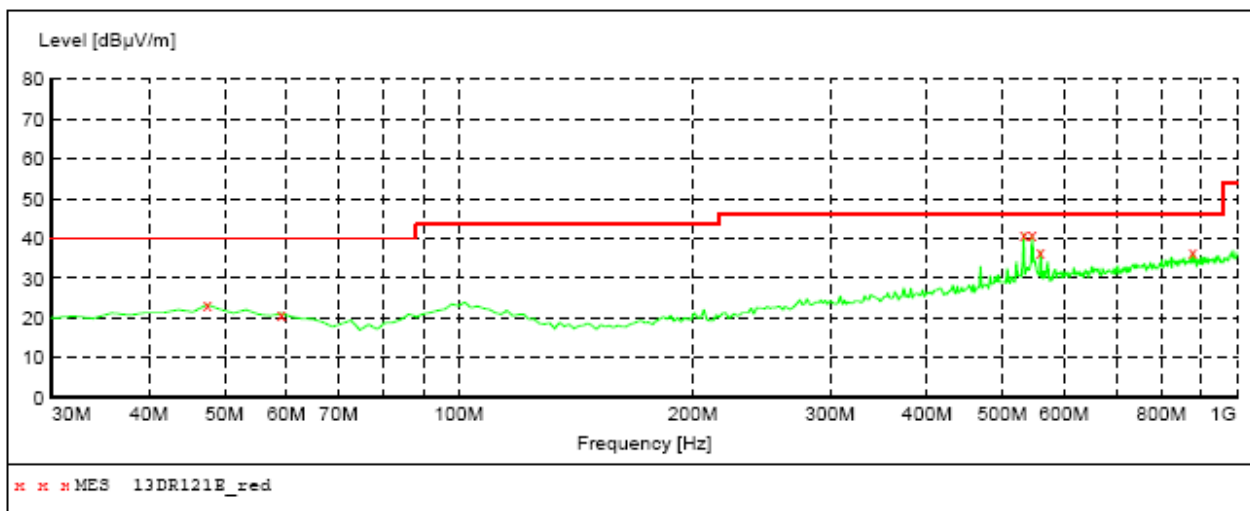

MEASUREMENT RESULT: "13DR121E_red"

6/3/2013 09:38


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	23.40	15.8	40.0	16.6	QP	100.0	0.00	HORIZONTAL
59.100000	21.20	14.6	40.0	18.8	QP	100.0	0.00	HORIZONTAL
532.460000	41.20	24.6	46.0	4.8	QP	100.0	0.00	HORIZONTAL
546.040000	40.90	24.9	46.0	5.1	QP	100.0	0.00	HORIZONTAL
559.620000	36.80	25.2	46.0	9.2	QP	100.0	0.00	HORIZONTAL
877.780000	36.40	28.9	46.0	9.6	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	MaxPeak	Coupled	100 kHz	VULB9163 NEW
30.0 MHz	1.0 GHz				

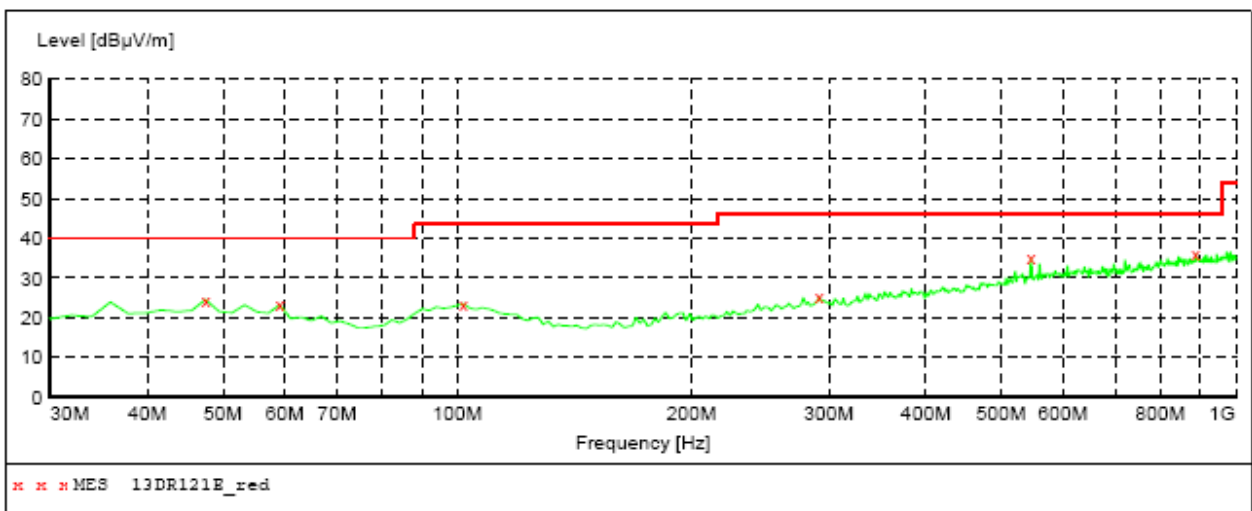

MEASUREMENT RESULT: "13DR121E_red"

6/3/2013 09:39


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.60	15.8	40.0	15.4	QP	100.0	0.00	VERTICAL
59.100000	23.20	14.6	40.0	16.8	QP	100.0	0.00	VERTICAL
101.780000	23.50	17.3	43.5	20.0	QP	100.0	0.00	VERTICAL
291.900000	25.30	18.5	46.0	20.7	QP	100.0	0.00	VERTICAL
546.040000	35.10	24.9	46.0	10.9	QP	100.0	0.00	VERTICAL
889.420000	36.00	29.1	46.0	10.0	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

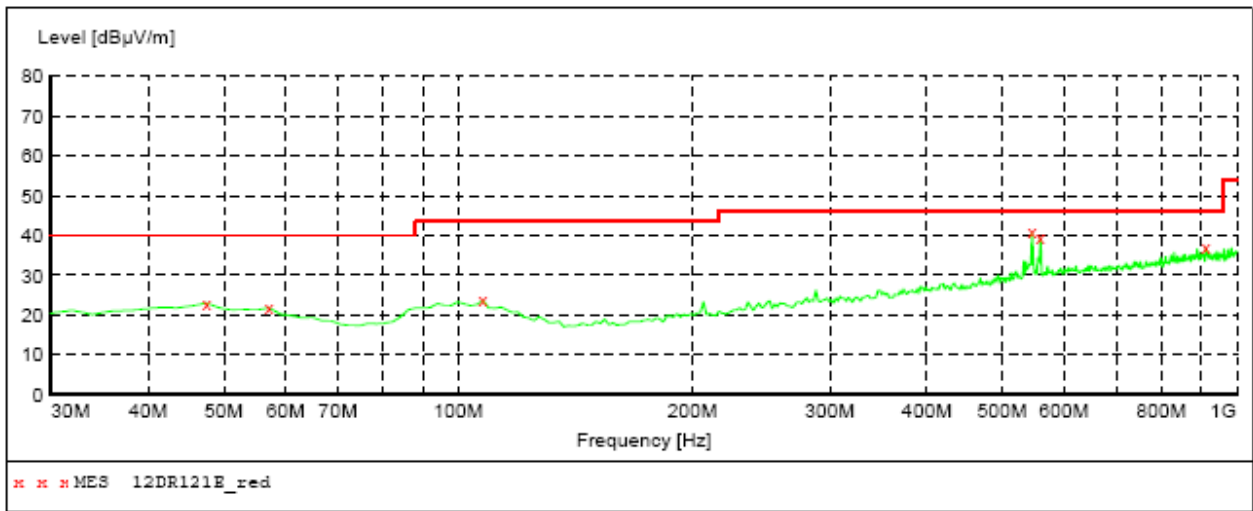

MEASUREMENT RESULT: "12DR121E_red"

6/3/2013 09:44


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	23.00	15.8	40.0	17.0	QP	100.0	0.00	HORIZONTAL
57.160000	21.80	15.1	40.0	18.2	QP	100.0	0.00	HORIZONTAL
107.600000	23.70	16.8	43.5	19.8	QP	100.0	0.00	HORIZONTAL
546.040000	40.80	24.9	46.0	5.2	QP	100.0	0.00	HORIZONTAL
559.620000	39.30	25.2	46.0	6.7	QP	100.0	0.00	HORIZONTAL
912.700000	36.90	29.3	46.0	9.1	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

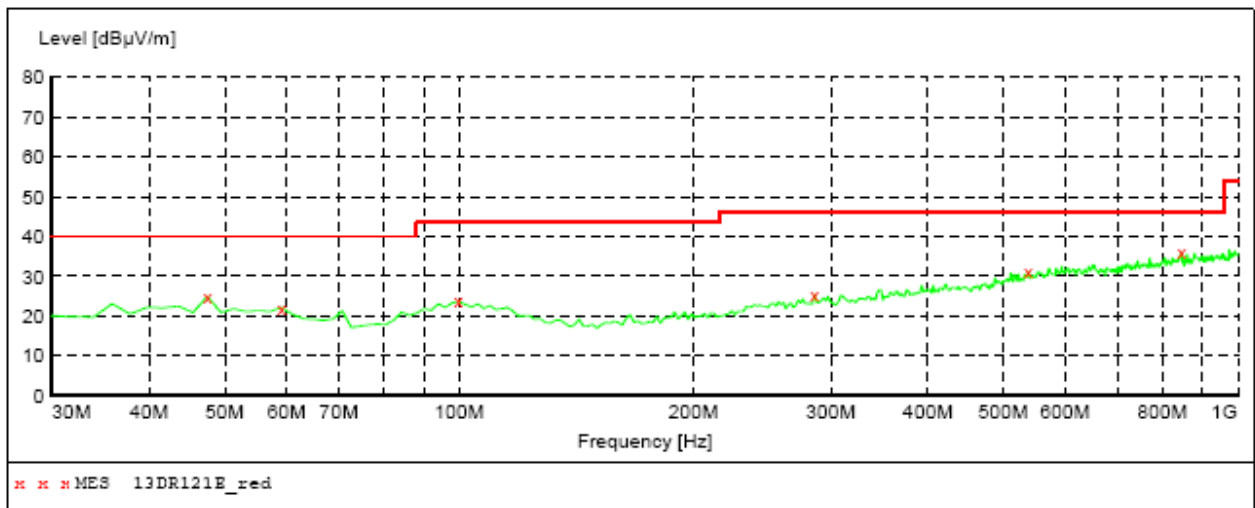

MEASUREMENT RESULT: "13DR121E_red"

6/3/2013 09:42


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	25.00	15.8	40.0	15.0	QP	100.0	0.00	VERTICAL
59.100000	22.20	14.6	40.0	17.8	QP	100.0	0.00	VERTICAL
99.840000	23.70	17.5	43.5	19.8	QP	100.0	0.00	VERTICAL
286.080000	25.50	18.3	46.0	20.5	QP	100.0	0.00	VERTICAL
538.280000	31.20	24.7	46.0	14.8	QP	100.0	0.00	VERTICAL
846.740000	36.10	28.6	46.0	9.9	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength				Transducer
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW	

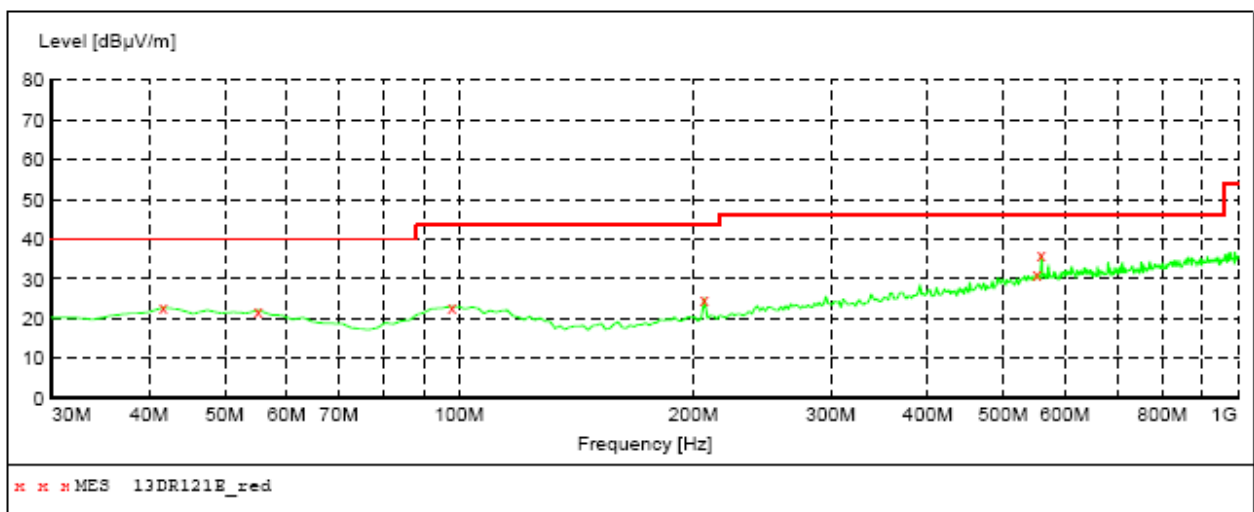

MEASUREMENT RESULT: "13DR121E_red"

6/3/2013 09:46


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
41.640000	22.80	15.9	40.0	17.2	QP	100.0	0.00	HORIZONTAL
55.220000	22.20	15.6	40.0	17.8	QP	100.0	0.00	HORIZONTAL
97.900000	23.10	17.4	43.5	20.4	QP	100.0	0.00	HORIZONTAL
206.540000	25.10	15.0	43.5	18.4	QP	100.0	0.00	HORIZONTAL
551.860000	31.20	25.0	46.0	14.8	QP	100.0	0.00	HORIZONTAL
559.620000	36.00	25.2	46.0	10.0	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: Receiver GR-12L Graupner/SJ HoTT
M/N: GR-12L
Operating Condition: TX Mode
Test Site: 3m CHAMBER
Operator: Chen
Test Specification: DC 6V
Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

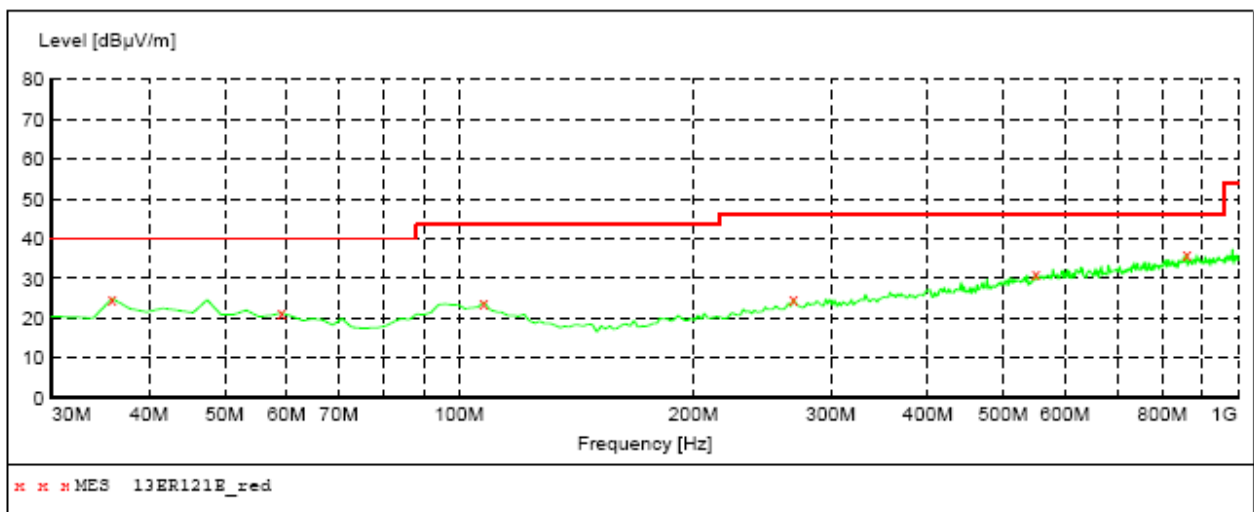

MEASUREMENT RESULT: "13DR121E_red"

6/3/2013 09:48

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
35.820000	25.00	14.7	40.0	15.0	QP	100.0	0.00	VERTICAL
59.100000	21.40	14.6	40.0	18.6	QP	100.0	0.00	VERTICAL
107.600000	24.00	16.8	43.5	19.5	QP	100.0	0.00	VERTICAL
268.620000	24.80	17.7	46.0	21.2	QP	100.0	0.00	VERTICAL
549.920000	31.00	25.0	46.0	15.0	QP	100.0	0.00	VERTICAL
860.320000	36.20	28.7	46.0	9.8	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1G

Channel Low

Channel Low (2404.056MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2404.056	H	1	108.21	-7.15	101.06	N/A	N/A	P
			100.34	-7.15	93.19	N/A	N/A	A
2404.056	V	1	112.34	-7.15	105.19	N/A	N/A	P
			102.34	-7.15	95.19	N/A	N/A	A
4808.112	H	1	42.11	1.07	43.18	74	-30.82	P
			32.18	1.07	33.25	54	-20.75	A
4808.112	V	1	44.05	1.07	45.12	74	-28.88	P
			32.84	1.07	33.91	54	-20.09	A
7205	H	1	46.43	7.38	53.81	74	-20.19	P
			32.14	7.38	39.52	54	-14.48	A
7205	V	1	48.42	7.38	55.8	74	-18.2	P
			35.18	7.38	42.56	54	-11.44	A
9613.33	H	1	54.34	10.29	64.63	74	-9.37	P
			37.81	10.29	48.1	54	-5.9	A
9613.33	V	1	49.42	7.38	56.8	74	-17.2	P
			36.18	7.38	43.56	54	-10.44	A
12021.67	H	1	53.94	14.01	67.95	74	-6.05	P
			36.26	14.01	50.27	54	-3.73	A
12021.67	V	1	51.93	14.01	65.94	74	-8.06	P
			36.6	14.01	50.61	54	-3.39	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
 4. The test limit distance is 3m limit

Channel Mid

Channel Low (2438.533MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2438.533	H	1	107.35	-6.37	100.98	N/A	N/A	P
			100.24	-6.37	93.87	N/A	N/A	A
2438.533	V	1	111.45	-6.37	105.08	N/A	N/A	P
			101.95	-6.37	95.58	N/A	N/A	A
4877.066	H	1	42.53	1.07	43.6	74	-30.4	P
			32.11	1.07	33.18	54	-20.82	A
4877.066	V	1	43.84	1.07	44.91	74	-29.09	P
			32.59	1.07	33.66	54	-20.34	A
7318.33	H	1	47.2	7.49	54.69	74	-19.31	P
			34.56	7.49	42.05	54	-11.95	A
7318.33	V	1	47.35	7.49	54.84	74	-19.16	P
			33.87	7.49	41.36	54	-12.64	A
9755	H	1	54.4	10.47	64.87	74	-9.13	P
			36.11	10.47	46.58	54	-7.42	A
9755	V	1	55.06	10.47	65.53	74	-8.47	P
			37.08	10.47	47.55	54	-6.45	A
12191.67	H	1	53.76	14.1	67.86	74	-6.14	P
			36.85	14.1	50.95	54	-3.05	A
12191.67	V	1	52.63	14.1	66.73	74	-7.27	P
			36.76	14.1	50.86	54	-3.14	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
 4. The test limit distance is 3m limit

Channel High

Channel Low (2474.025MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2474.025	H	1	107.57	-6.05	101.52	N/A	N/A	P
			100.24	-6.05	94.19	N/A	N/A	A
2474.025	V	1	111.79	-6.05	105.74	N/A	N/A	P
			101.32	-6.05	95.27	N/A	N/A	A
4948.05	H	1	46.37	1.07	47.44	74	-26.56	P
			38.59	1.07	39.66	54	-14.34	A
4948.5	V	1	49.36	1.07	50.43	74	-23.57	P
			39.74	1.07	40.81	54	-13.19	A
7431.67	H	1	49.77	7.61	57.38	74	-16.62	P
			36.92	7.61	44.53	54	-9.47	A
7431.67	V	1	47	7.61	54.61	74	-19.39	P
			34.69	7.61	42.3	54	-11.7	A
9896.67	H	1	51.33	10.65	61.98	74	-12.02	P
			34.09	10.65	44.74	54	-9.26	A
9896.67	V	1	54.44	10.65	65.09	74	-8.91	P
			36.58	10.65	47.23	54	-6.77	A
12361.67	H	1	51.36	14.19	65.55	74	-8.45	P
			34.13	14.19	48.32	54	-5.68	A
12361.67	V	1	52.79	14.19	66.98	74	-7.02	P
			34.4	14.19	48.59	54	-5.41	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier
 Margin = Level-Limit
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.
 4. The test limit distance is 3m limit

Radiated Emission Below 30 MHz


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector Mode
0.565	23.95	8.22	1.01	33.18	67	-33.82	QP
17.89	21.89	8.17	1.2	31.26	49.5	-18.24	QP
22.76	22.36	8.03	1.05	31.44	49.5	-18.06	QP
25.48	22.89	7.48	1.69	32.06	49.5	-17.44	QP

Note:


1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Limit value- Emission level.

Conducted Spurious Emission Test Data 30MHz-26.5GHz


Channel Low

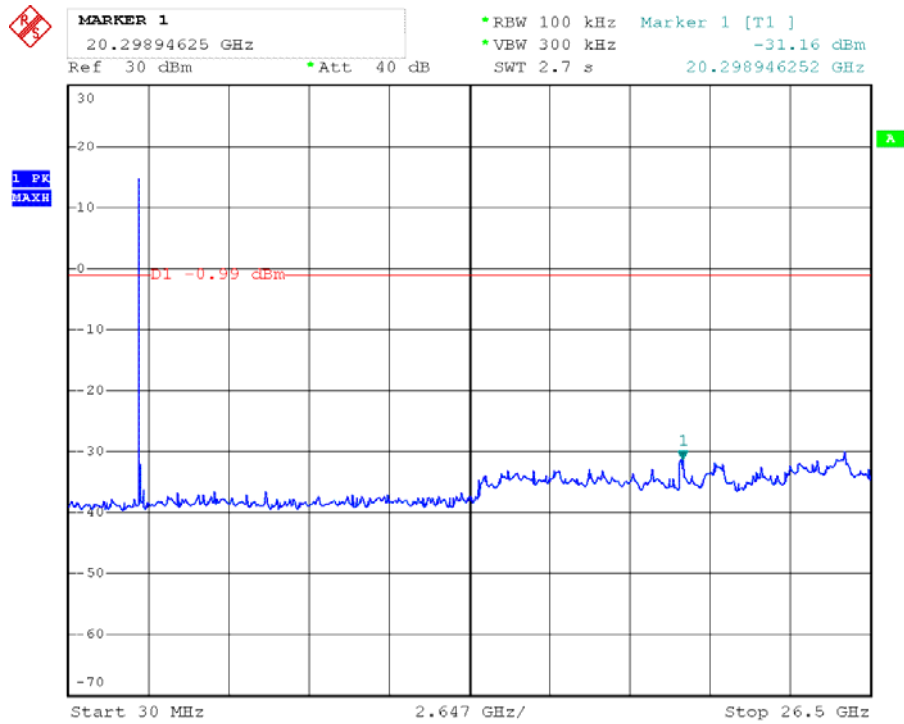

Channel Mid

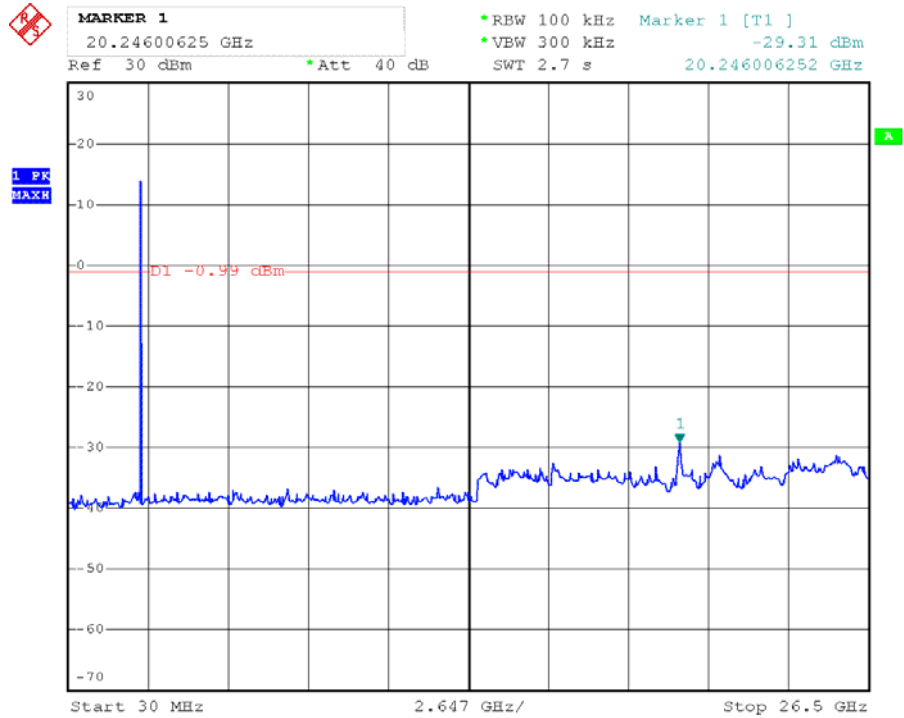

Channel High

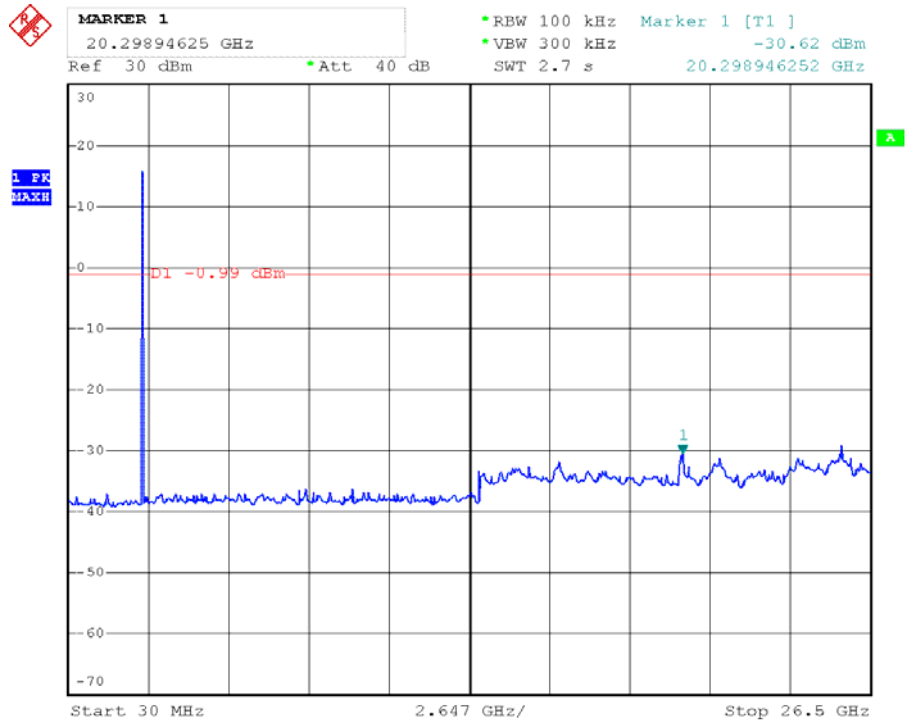

12. ANTENNA REQUIREMENT

12.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

12.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.