

# Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

## **SJ Incorporated**


**FCC ID:** SNL-16005800  
**Product Description:** Gyro Receiver Graupner/SJ HoTT  
**Model No.:** GR-24 PRO+3xG+3A+3M+Vario  
**Supplementary Model:** GR-24 PRO+3xG+3A

**Prepared for:** **SJ Incorporated**  
8<sup>th</sup> F, 202 Dong, Chunui Techno-Park2, 202, Chuni-Dong, Wonmi-Gu, Bucheon-Shi, Kyungki-Do, South Korea

**Prepared by:** **Bontek Compliance Testing Laboratory Co., Ltd**  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China  
Tel: 86-755-86337020  
Fax: 86-755-86337028


**Report No.:** BCT13HR290E  
**Issue Date:** August 28, 2013  
**Test Date:** August 28~ October 22, 2013

**Tested by:**




\_\_\_\_\_  
Lion Cai

**Reviewed by:**

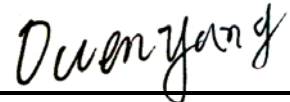

\_\_\_\_\_  
Owen Yang

**Approved by:**



\_\_\_\_\_  
Kendy Wang

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION .....4**

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY .....4

1.3 TEST FACILITY .....5

**2. SYSTEM TEST CONFIGURATION .....6**

2.1 EUT CONFIGURATION .....6

2.2 EUT EXERCISE .....6

2.3 GENERAL TEST PROCEDURES .....6

2.3.1 CHANNEL LIST .....7

2.4 MEASUREMENT UNCERTAINTY .....8

2.5 TEST EQUIPMENT LIST AND DETAILS .....9

**3. SUMMARY OF TEST RESULTS .....9**

**4. TEST OF AC POWER LINE CONDUCTED EMISSION .....10**

4.1 APPLICABLE STANDARD .....10

4.2 TEST SETUP DIAGRAM .....10

4.3 TEST RESULT .....10

**5. TEST OF HOPPING CHANNEL BANDWIDTH .....11**

5.1 APPLICABLE STANDARD .....11

5.2 EUT SETUP .....11

5.3 TEST EQUIPMENT LIST AND DETAILS .....11

5.4 TEST PROCEDURE .....11

5.5 TEST RESULT .....11

**6. TEST OF HOPPING CHANNEL SEPARATION .....16**

6.1 APPLICABLE STANDARD .....16

6.2 EUT SETUP .....16

6.3 TEST EQUIPMENT LIST AND DETAILS .....16

6.4 TEST PROCEDURE .....16

6.5 TEST RESULT .....16

**7. TEST OF NUMBER OF HOPPING FREQUENCY .....21**

7.1 APPLICABLE STANDARD .....21

7.2 EUT SETUP .....21

7.3 TEST EQUIPMENT LIST AND DETAILS .....21

7.4 TEST PROCEDURE .....21

7.5 TEST RESULT .....21

**8. TEST OF DWELL TIME OF EACH FREQUENCY .....23**

8.1 APPLICABLE STANDARD .....23

8.2 EUT SETUP .....23

8.3 TEST EQUIPMENT LIST AND DETAILS .....23

8.4 TEST PROCEDURE .....23

8.5 TEST RESULT .....23

**9. TEST OF MAXIMUM PEAK OUTPUT POWER .....29**

9.1 APPLICABLE STANDARD .....29

9.2 EUT SETUP .....29

9.3 TEST EQUIPMENT LIST AND DETAILS .....29

9.4 TEST PROCEDURE .....29

9.5 TEST RESULT .....29

**10. TEST OF BAND EDGES EMISSION .....34**

10.1 APPLICABLE STANDARD .....34

10.2 EUT SETUP .....34

10.3 TEST EQUIPMENT LIST AND DETAILS .....34

10.4 TEST PROCEDURE .....34

10.5 TEST RESULT .....35

**11. TEST OF SPURIOUS RADIATED EMISSION .....38**  
11.1 APPLICABLE STANDARD ..... 38  
11.2 EUT SETUP ..... 38  
11.3 TEST EQUIPMENT LIST AND DETAILS..... 39  
11.4 TEST PROCEDURE ..... 39  
11.5 TEST RESULT ..... 40

**12. ANTENNA REQUIREMENT .....54**  
12.1 STANDARD APPLICABLE ..... 54  
12.2 ANTENNA CONNECTED CONSTRUCTION ..... 54

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant:	<b>SJ Incorporated</b>
Address of applicant:	8 <sup>th</sup> F,202 Dong,Chunui Techno-Park2,202,Chuni-Dong,Wonmi-Gu,Bucheon-Shi,Kyungki-Do,South Korea
Manufacturer 1:	<b>SJ Technology(Shenzhen)Co.,Ltd</b>
Address of manufacturer:	F6, 1 Bldg, A Area, Yintianxifa Industrial Area, Xixiang Town, Baoan District Shenzhen, Guangdong Province, China
Manufacturer 2:	<b>SJ Incorporated</b>
Address of manufacturer:	8 <sup>th</sup> F,202 Dong,Chunui Techno-Park2,202,Chuni-Dong,Wonmi-Gu,Bucheon-Shi,Kyungki-Do,South Korea

### General Description of E.U.T

Items	Description
EUT Description:	<b>Gyro Receiver Graupner/SJ HoTT</b>
Model No.:	<b>GR-24 PRO+3xG+3A+3M+Vario</b>
Trade Name:	<b>GRAUPNER/SJ HoTT</b>
Supplementary Model:	<b>GR-24 PRO+3xG+3A</b>
Frequency Band:	<b>2404.056~2474.025</b>
Number of Channels:	<b>70</b>
Type of Modulation:	<b>FHSS</b>
Antenna Gain	<b>1.5dBi</b>
Antenna Type:	<b>Integral Antenna</b>
Antenna description	<b>2T2R</b>
Rated Voltage:	<b>Input: DC 3.6V~8.4V</b>

Remark: \* The test data gathered are from the production sample provided by the manufacturer.  
\* Supplementary models have the same circuit, but with different appearance

## 1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules. Test was carried out according to the above mentioned FCC rules and the FCC publication notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

### **1.3 Test Facility**

All measurement required was performed at laboratory of Shenzhen Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China and Centre Testing International (ShenZhen) Corporation ,Location at Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong.

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC – Registration No.: 338263**

Shenzhen Bontek Compliance Testing Laboratory Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

#### **IC Registration No.: 7631A**

The 3m alternate test site of Shenzhen Bontek Compliance Testing Laboratory Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

#### **CNAS - Registration No.: L3923**

Shenzhen Bontek Compliance Testing Laboratory Ltd. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

#### **TUV - Registration No.: UA 50242657-0001**

Shenzhen Bontek Compliance Testing Laboratory Ltd. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-003.

## **2. SYSTEM TEST CONFIGURATION**

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### **2.3 General Test Procedures**

**Conducted Emissions:** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions:** The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

### 2.3.1 Channel List

Number	Frequency	Number	Frequency
1	2404.056	35	2439.547
2	2405.070	36	2440.562
3	2406.084	37	2441.575
4	2407.098	38	2442.590
5	2408.112	39	2443.604
6	2409.126	40	2444.618
7	2410.140	41	2445.632
8	2411.154	42	2446.646
9	2412.169	43	2447.660
10	2413.182	44	2448.674
11	2414.197	45	2449.688
12	2415.210	46	2450.702
13	2416.225	47	2451.716
14	2417.239	48	2452.730
15	2418.253	49	2453.744
16	2419.267	50	2454.758
17	2420.281	51	2455.772
18	2421.295	52	2456.786
19	2422.309	53	2457.800
20	2423.323	54	2458.814
21	2424.337	55	2459.828
22	2425.351	56	2460.842
23	2426.365	57	2461.856
24	2427.379	58	2462.870
25	2428.393	59	2463.884
26	2429.407	60	2464.898
27	2430.421	61	2465.912
28	2431.435	62	2466.927
29	2432.449	63	2467.940
30	2433.463	64	2468.955
31	2434.477	65	2469.969
32	2435.491	66	2470.983
33	2436.505	67	2471.997
34	2437.519	68	2473.011
35	2438.533	69	2474.025

## 2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.



## 2.5 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.

No.	Instrument no.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	BCT-EMC001	EMI Test Receiver	R&S	ESCI	100687	2013-4-25	2014-4-24
2	BCT-EMC002	EMI Test Receiver	R&S	ESPI	100097	2012-11-1	2013-10-31
3	BCT-EMC003	Amplifier	HP	8447D	1937A02492	2013-4-25	2014-4-24
4	BCT-EMC018	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2013-4-25	2014-4-24
5	BCT-EMC019	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2012-11-1	2013-10-31
6	BCT-EMC021	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-11-1	2013-10-31
7	BCT-EMC026	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2013-4-25	2014-4-24
8	BCT-EMC029	6DB Attenuator	FRANKONIA	N/A	1001698	2013-4-25	2014-4-24
9	BCT-EMC032	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2013-4-25	2014-4-24
10	BCT-EMC036	Spectrum Analyzer	R&S	FSP	100397	2012-11-1	2013-10-30
11	BCT-EMC037	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2013-4-25	2014-4-24
12	BCT-EMC039	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2013-4-25	2014-4-24
13	BCT-EMC038	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2013-4-5	2014-4-4

## 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	No applicable
FCC §15.247(a)(1)	Hopping Channel Bandwidth	Pass
FCC §15.247(a)(1)	Hopping Channel Separation	Pass
FCC §15.247(a)(1)	Number of Hopping Frequency Used	Pass
FCC §15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
FCC §15.247(b)(1)	Maximum Peak Output Power	Pass
FCC §15.247(d)	Band Edges Emission	Pass
FCC §15.247(d)	Spurious Radiated Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

## 4. TEST OF AC POWER LINE CONDUCTED EMISSION

### 4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

### 4.2 Test Setup Diagram

No required

Remark: The EUT was connected to a 120VAC/ 60Hz power source.

### 4.3 Test Result


Notes: The EUT is powered by battery without AC mains(with battery),this test is not applicable.

## 5. Test of Hopping Channel Bandwidth

### 5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 EUT Setup

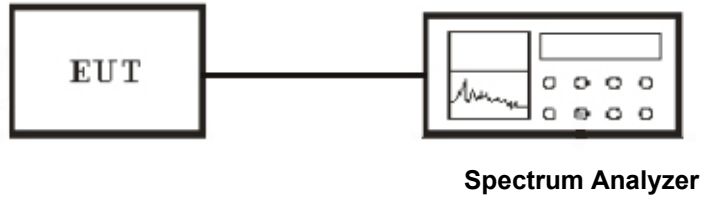

### 5.3 Test Equipment List and Details

See section 2.5.

### 5.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 5.5 Test Result

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**Antenna 1**


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
FHSS	Low	2404.056	500
FHSS	Middle	2438.533	400
FHSS	High	2474.025	524

**Antenna 2**


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
FHSS	Low	2404.056	500
FHSS	Middle	2438.533	340
FHSS	High	2474.025	408

**Antenna 1**


Channel Low:

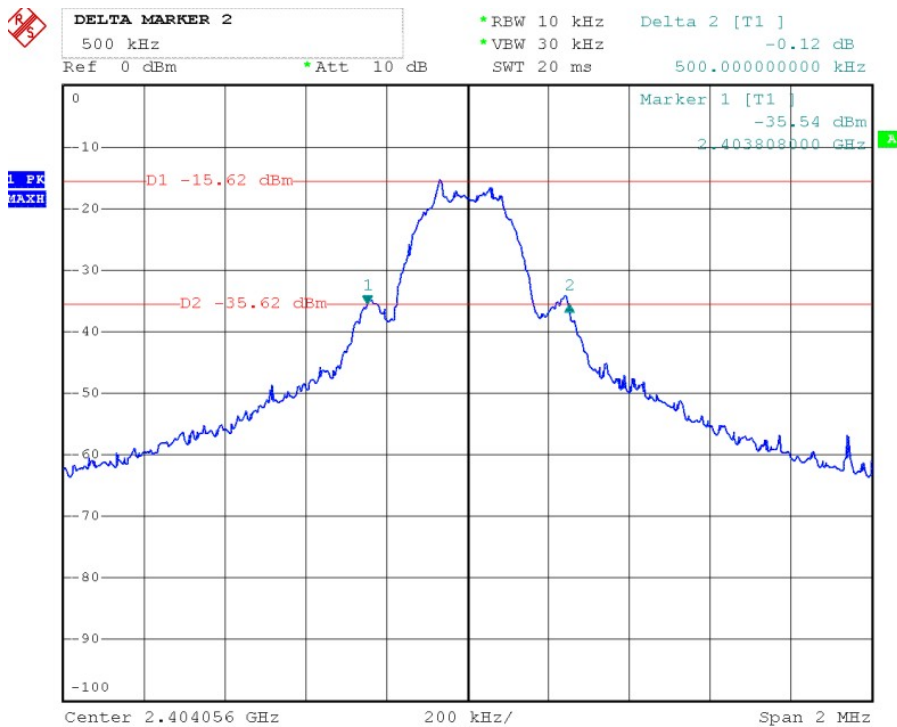

Channel Middle:

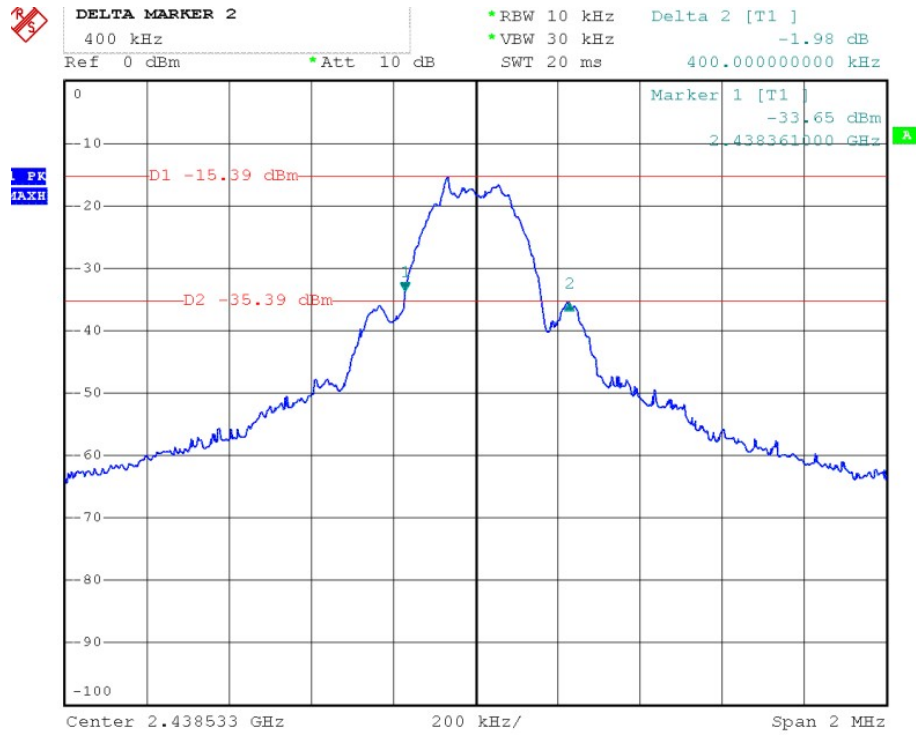


Channel High:

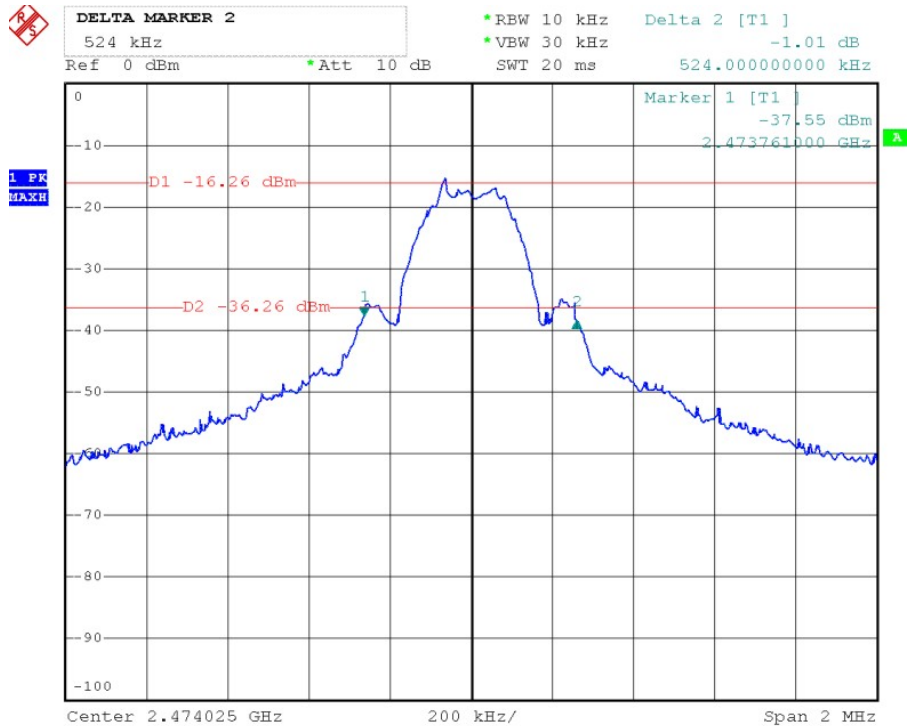


## Antenna 2


Channel Low:

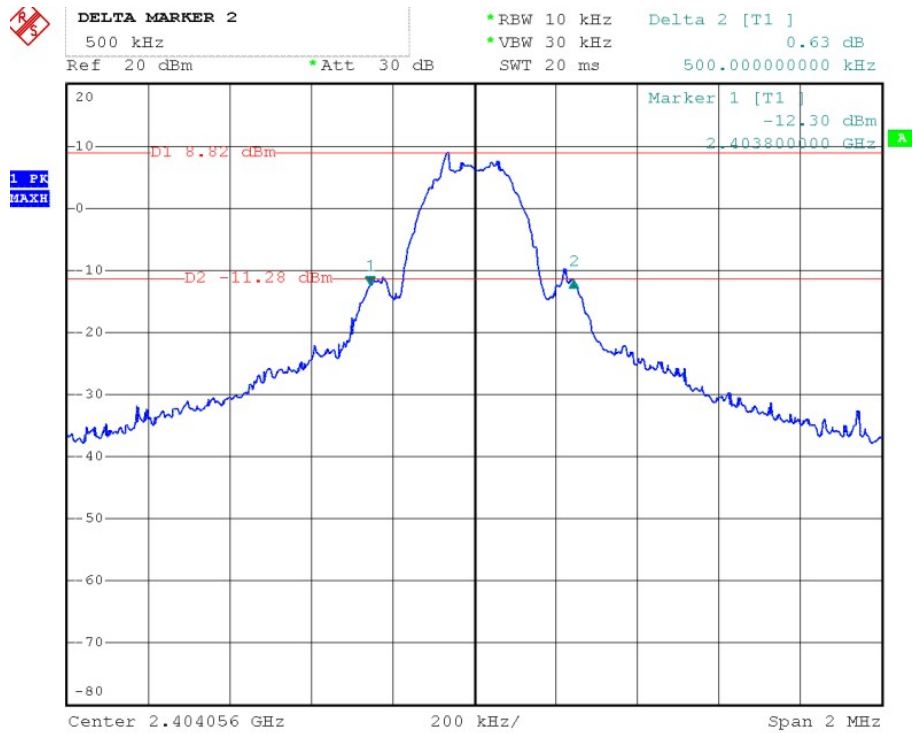

Channel Middle:

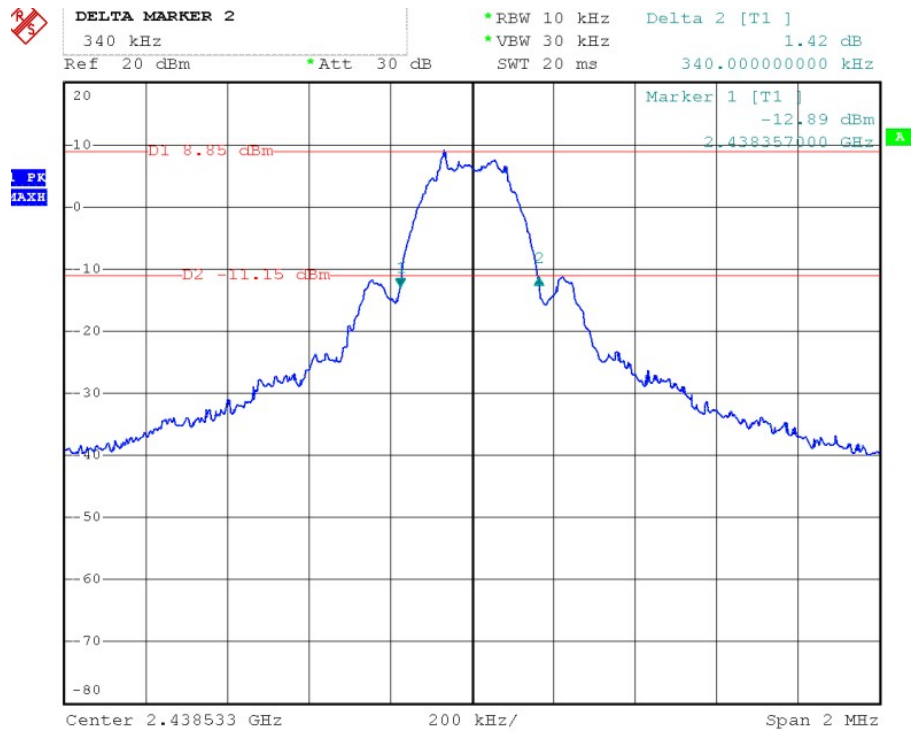

Channel High:

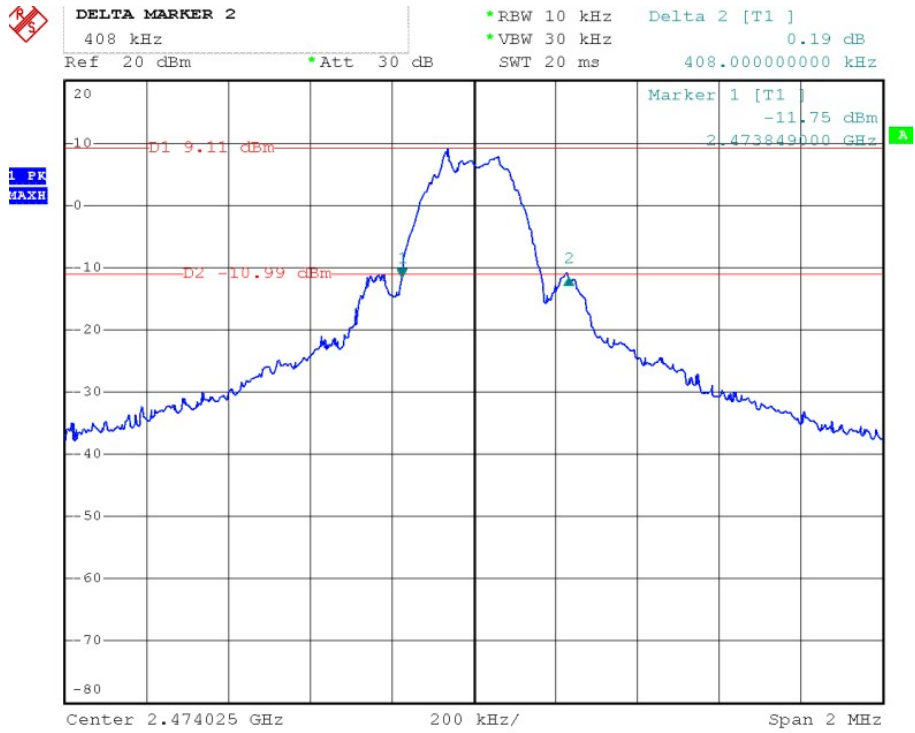


## 6. Test of Hopping Channel Separation

### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 EUT Setup

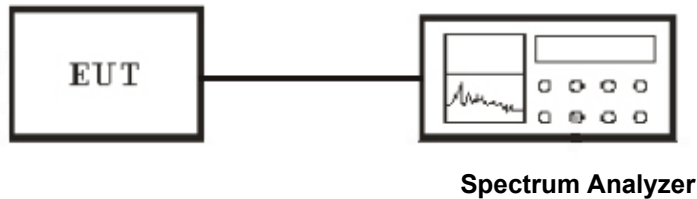

### 6.3 Test Equipment List and Details

See section 2.5.

### 6.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode



**Antenna 1**

Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (MHz)
FHSS	2404.056~2405.056	1.012	1.000
FHSS	2438.533~2439.533	1.071	1.000
FHSS	2473.025~2474.025	1.020	1.000

**Antenna 2**


Modulation Type	Frequency (MHz)	Channel Separation (MHz)	Min. Limit (MHz)
FHSS	2404.056~2405.056	1.086	1.000
FHSS	2438.533~2439.533	1.016	1.000
FHSS	2473.025~2474.025	1.016	1.000

**Antenna 1**


Channel Low:




Channel Middle:

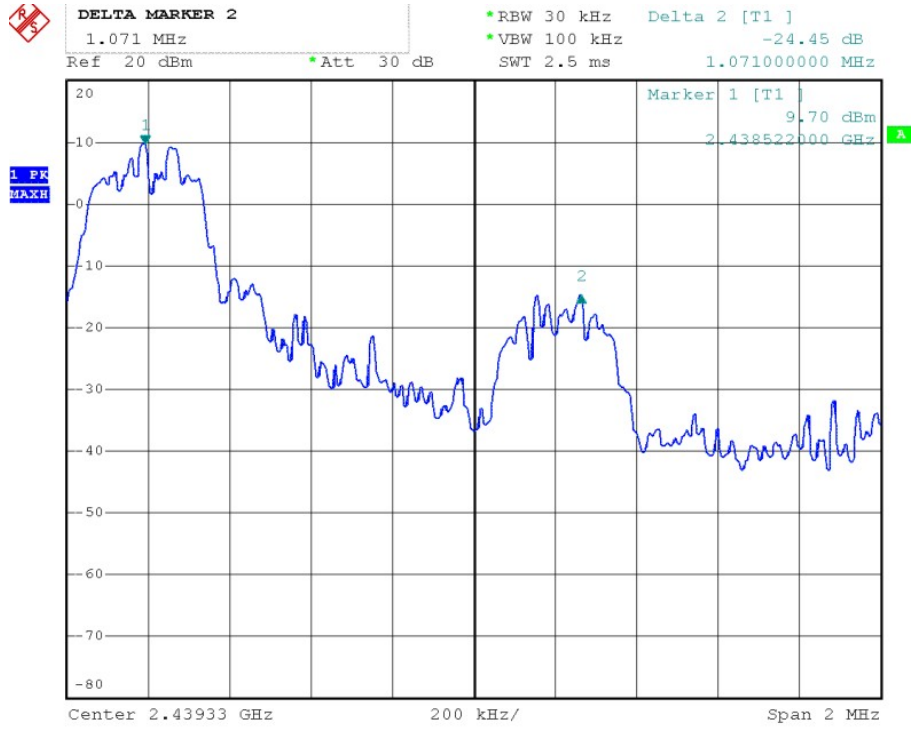


Channel High:

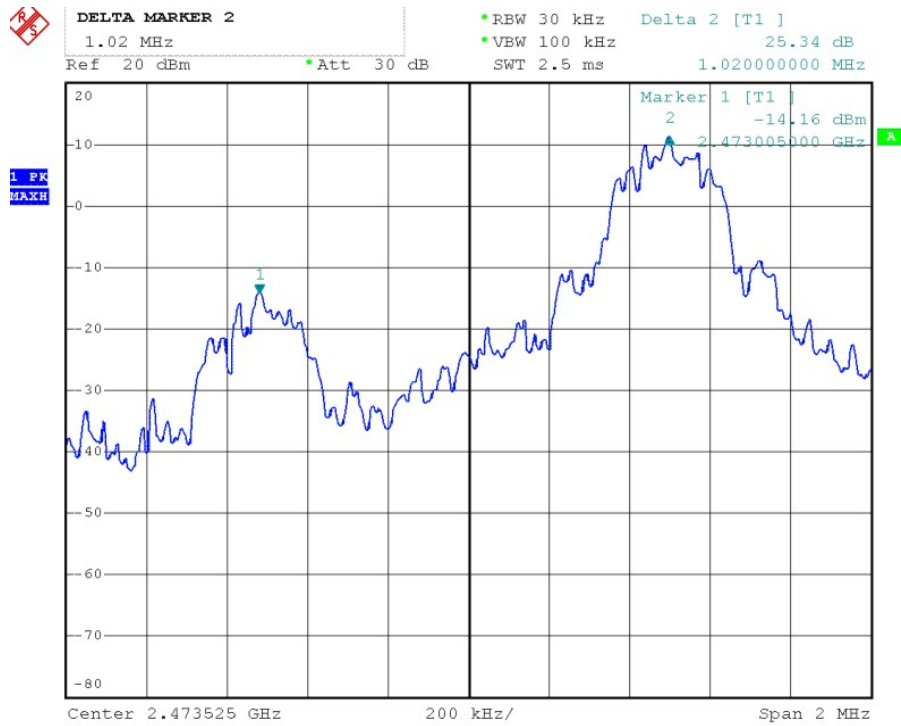


**Antenna 2**  
Channel Low:

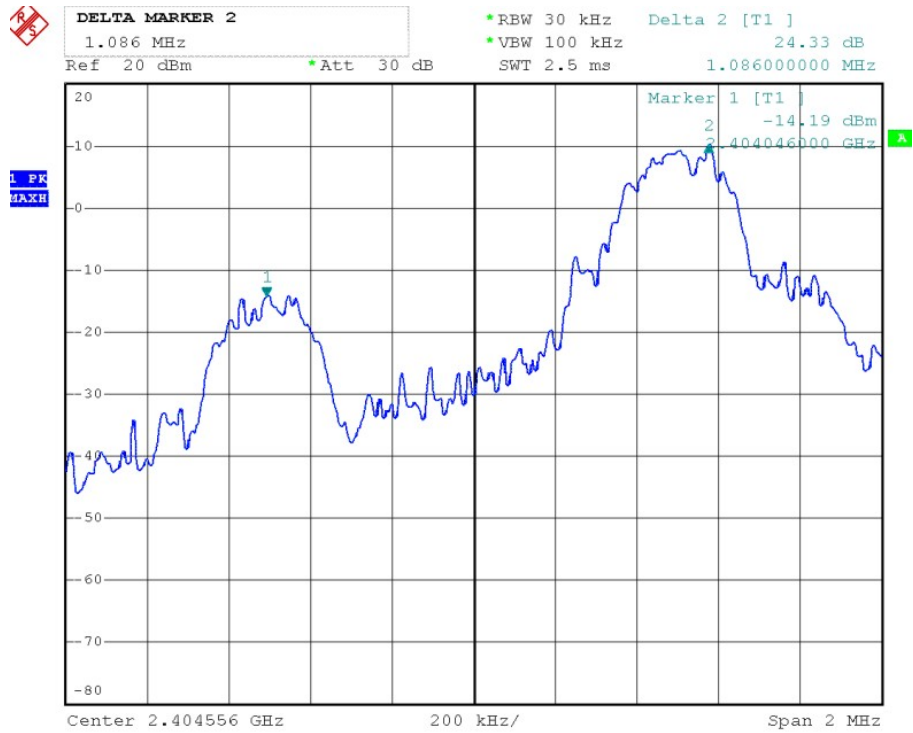

**Channel Middle:**

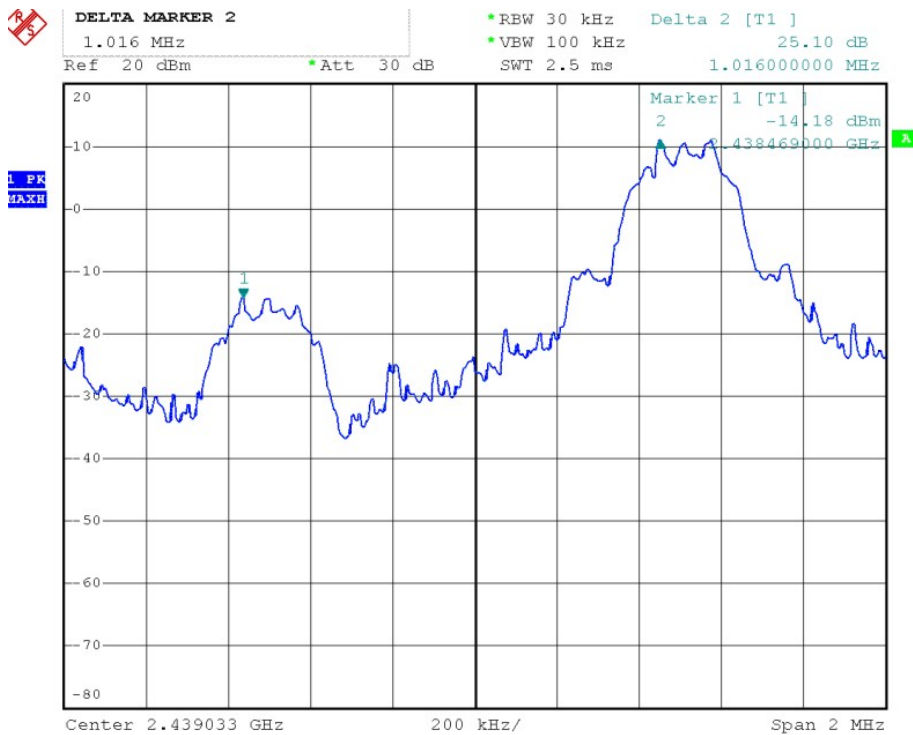

Channel High:

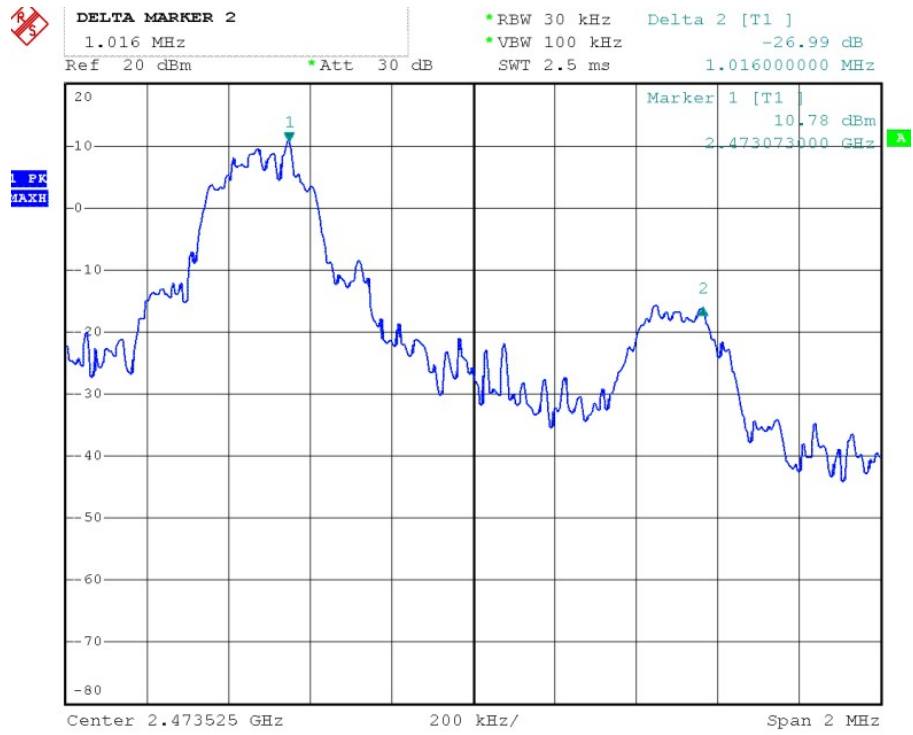


## 7. Test of Number of Hopping Frequency

### 7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 7.2 EUT Setup

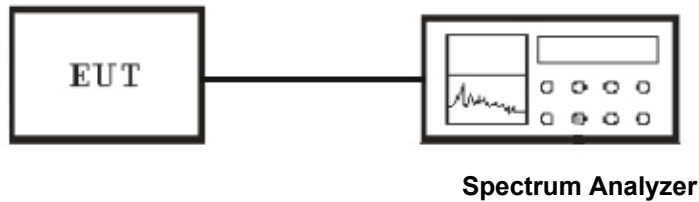

### 7.3 Test Equipment List and Details

See section 2.5.

### 7.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 7.5 Test Result

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode


#### Antenna 1

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
FHSS	2404.056~2474.025	70	≥ 15


#### Antenna 2

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit
FHSS	2404.056~2474.025	70	≥ 15

# Antenna 1

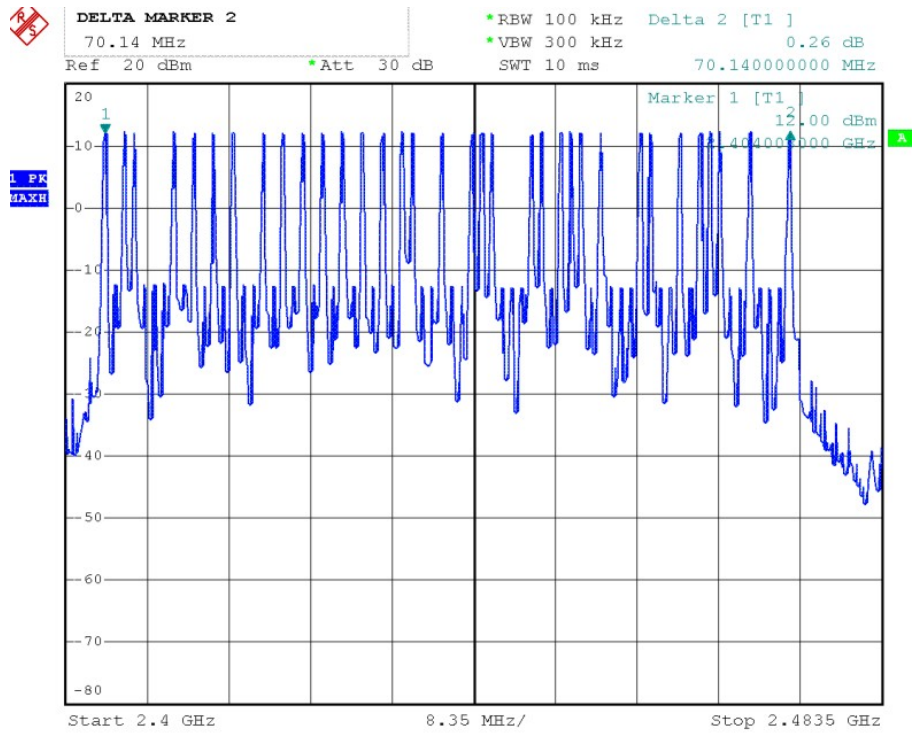

# Antenna 2

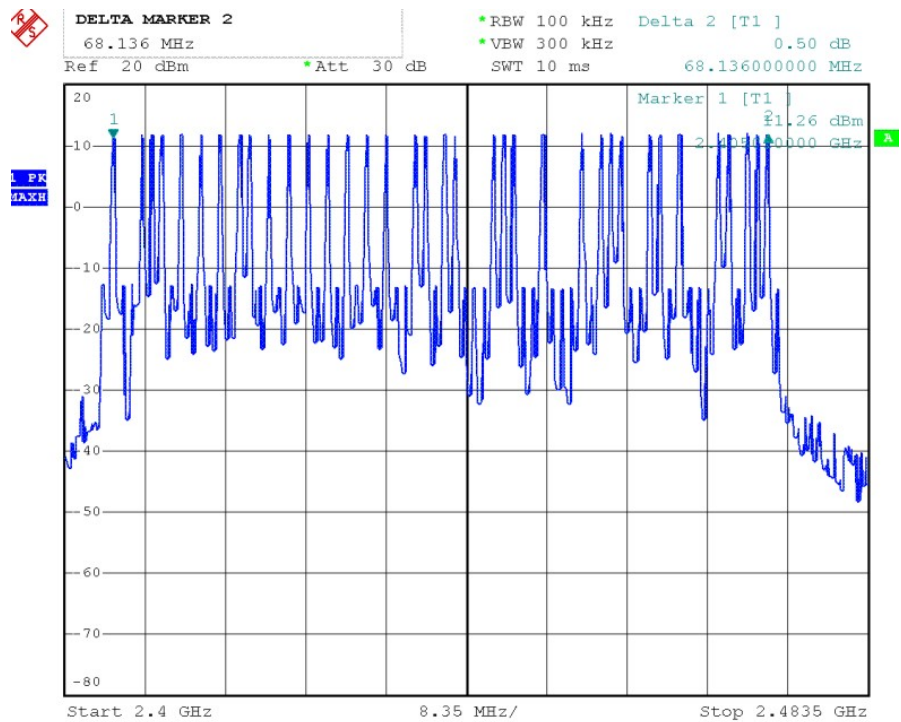


## 8. Test of Dwell Time of Each Frequency

### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 8.2 EUT Setup

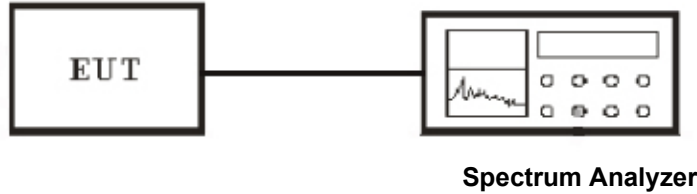

### 8.3 Test Equipment List and Details

See section 2.5.

### 8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

### 8.5 Test Result

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**Antenna 1**

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2404.056	73.264	400
FHSS	Middle	2438.533	73.264	400
FHSS	High	2474.025	73.264	400

**Antenna 2**

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2404.056	73.264	400
FHSS	Middle	2438.533	73.264	400
FHSS	High	2474.025	73.264	400


A period time = 0.4 (ms) \* 70 = 28 (s)  
 N=38  
 CH Low:  
 Time slot = 1.928(ms)  
 Dwell time= N\*T= 38\*1.928=73.264(ms)

CH Mid:  
 Time slot = 1.928 (ms)  
 Dwell time= N\*T= 38\*1.928=73.264 (ms)


CH High:  
 Time slot = 1.928 (ms)  
 Dwell time= N\*T= 38\*1.928=73.264 (ms)




Antenna 1

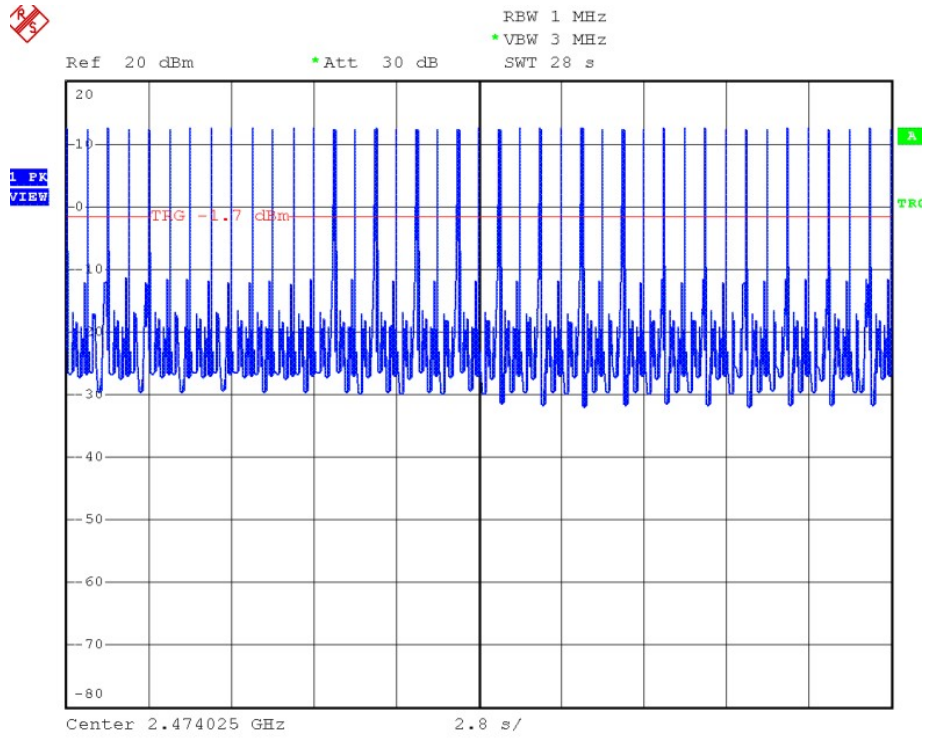


Channel Low:

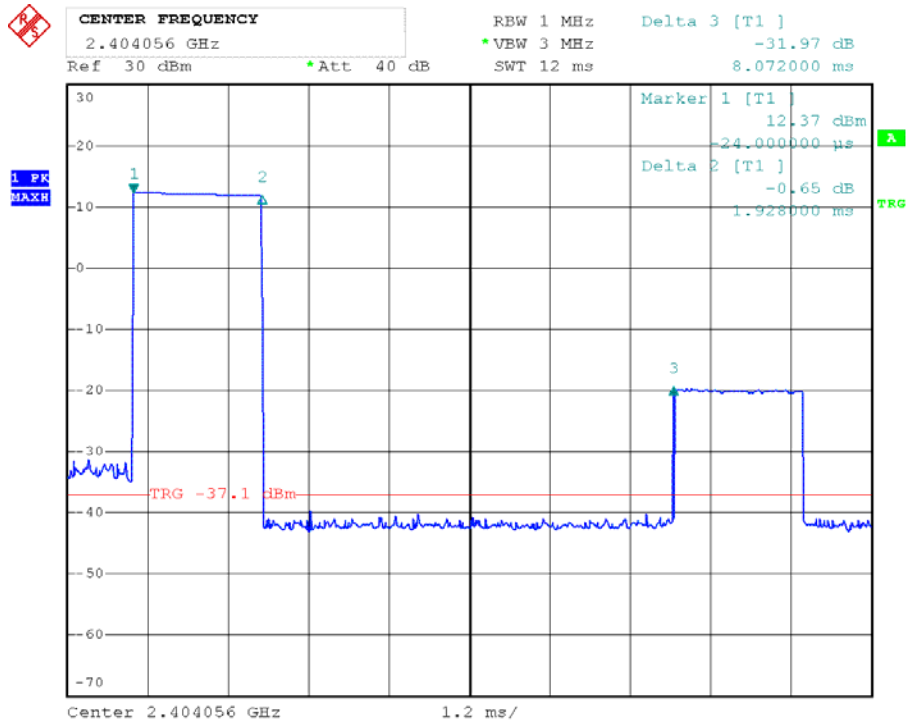


Channel Middle:

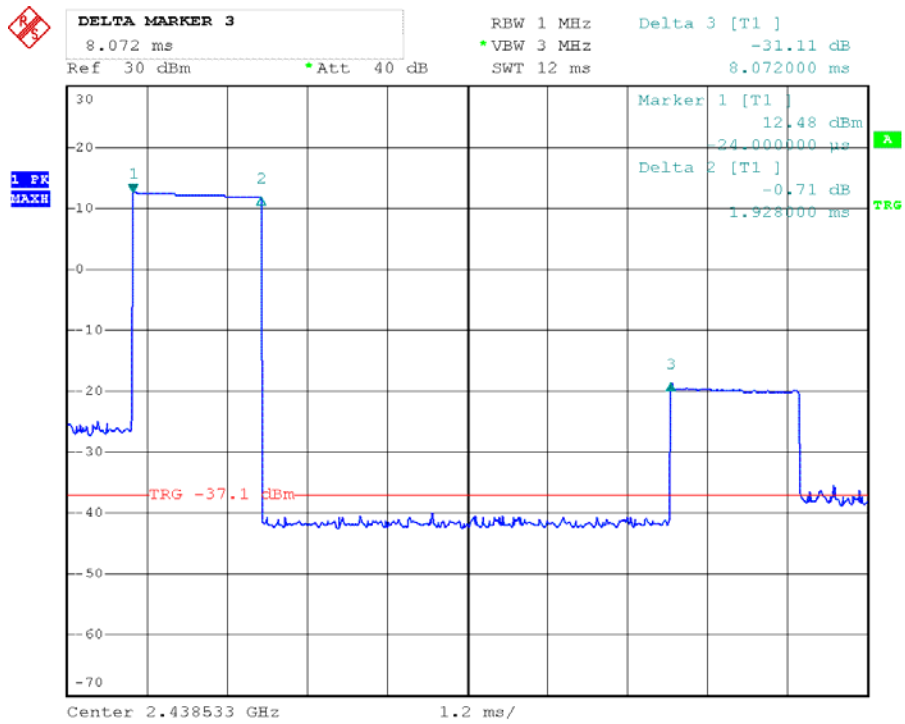


Channel High:

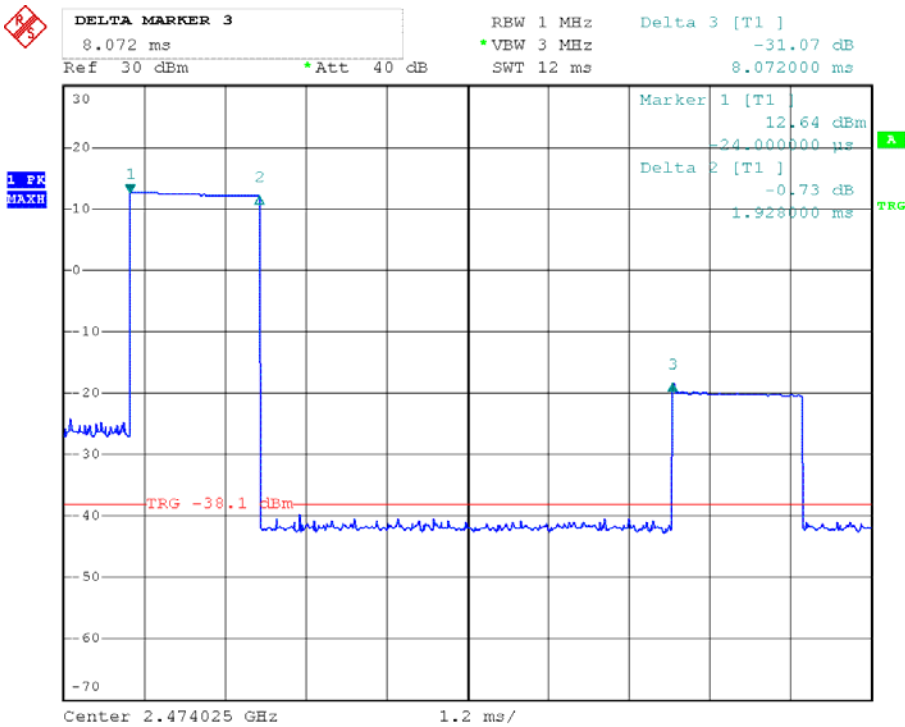


# Antenna 2

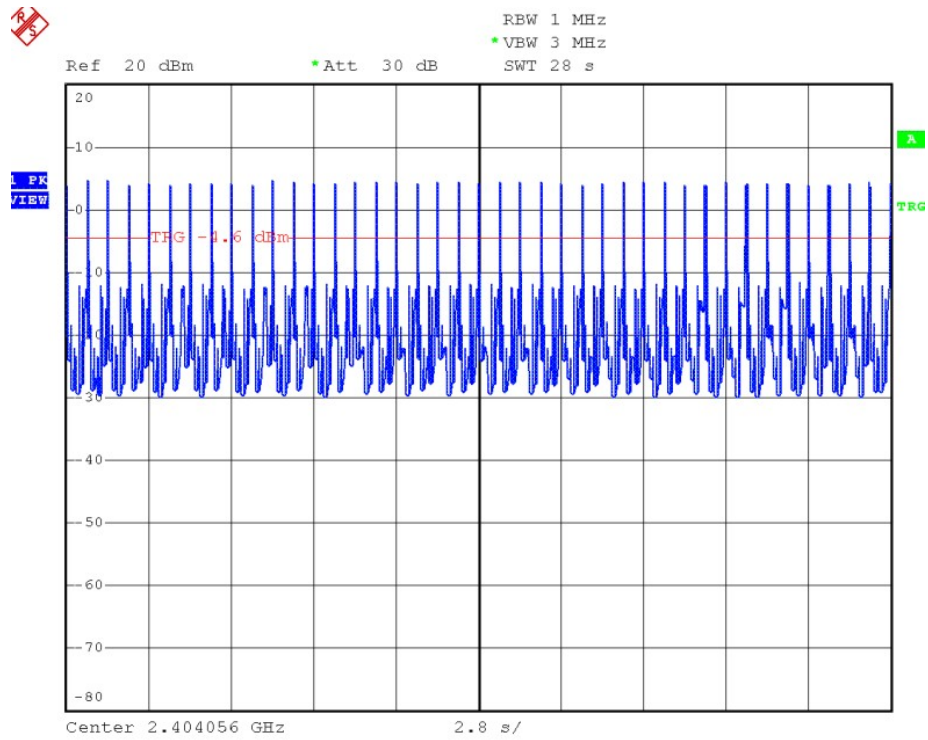


# Channel Low:

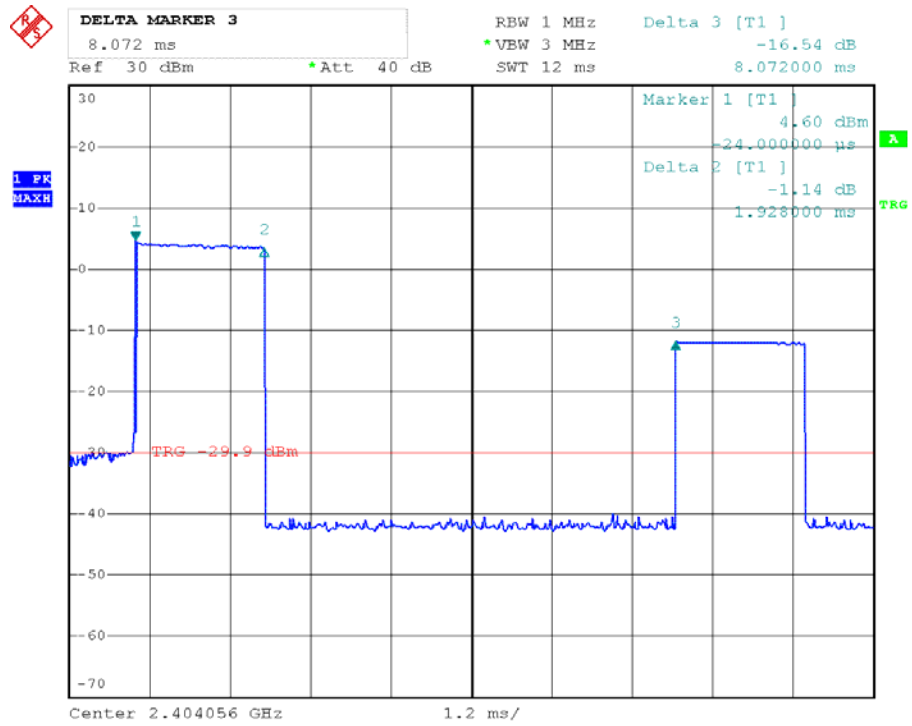

Channel Middle:

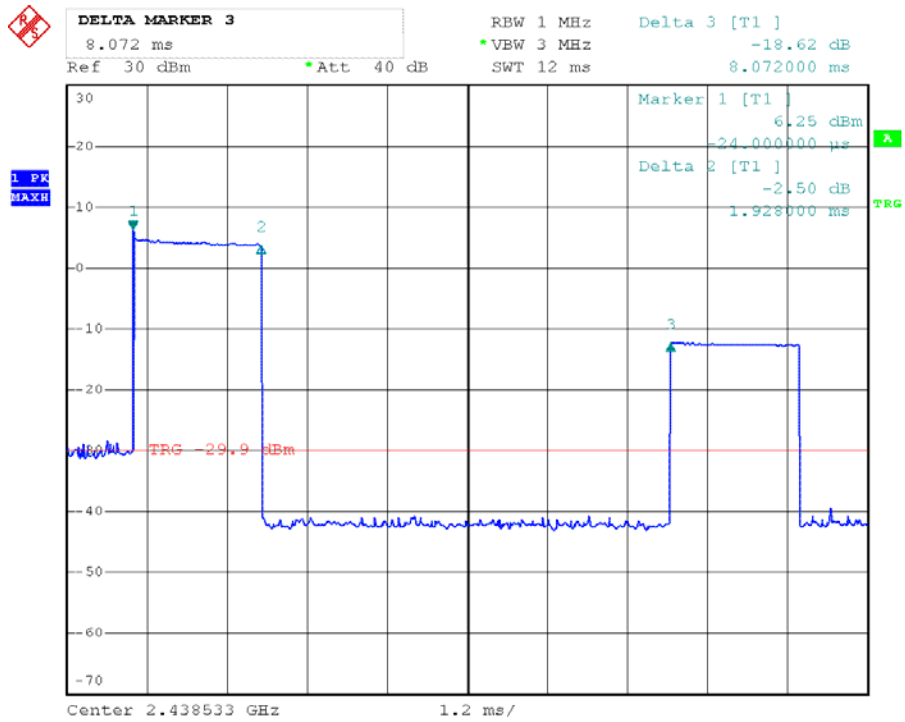

Channel High:

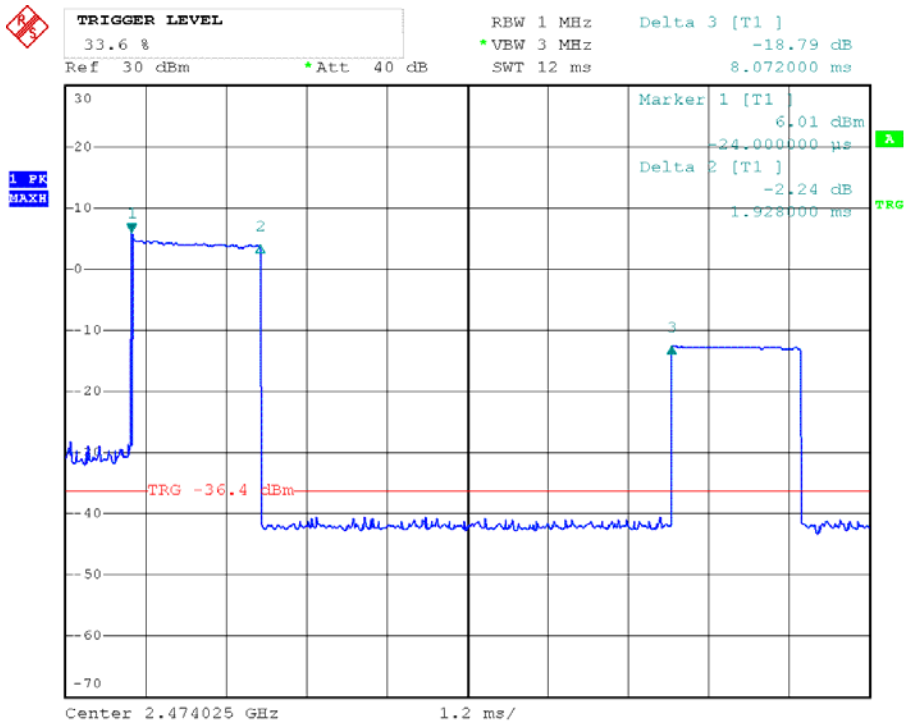


## 9. Test of Maximum Peak Output Power

### 9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

### 9.2 EUT Setup

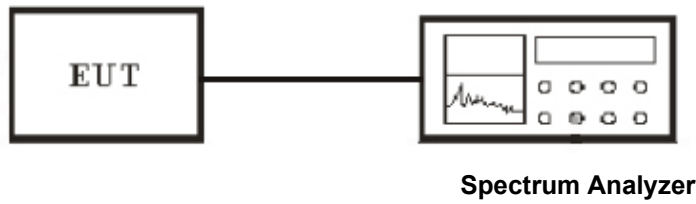

### 9.3 Test Equipment List and Details

See section 2.5.

### 9.4 Test Procedure

1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

### 9.5 Test Result

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**Antenna1**

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)
FHSS	Low	2404.056	-12.80
FHSS	Middle	2438.553	-12.76
FHSS	High	2474.025	-12.87


**Antenna 2**

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)
FHSS	Low	2404.056	11.57
FHSS	Middle	2438.553	11.62
FHSS	High	2474.025	11.72


**Antenna1+Antenna 2**

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2404.056	11.79	21	-9.21
FHSS	Middle	2438.553	11.64	21	-9.36
FHSS	High	2474.025	11.74	21	-9.26


Antenna1  
Channel Low:

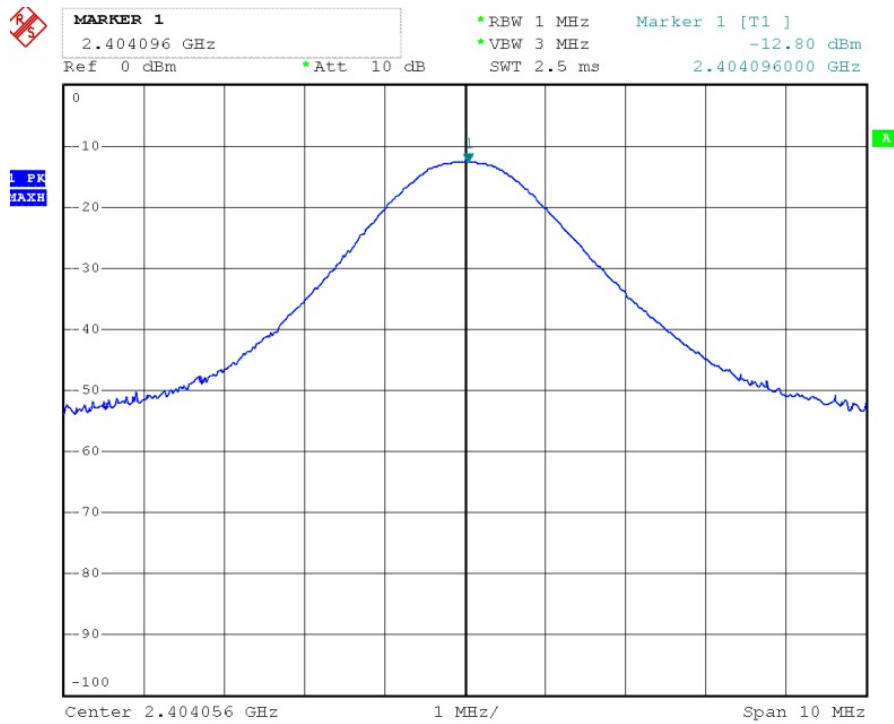


Channel Middle:

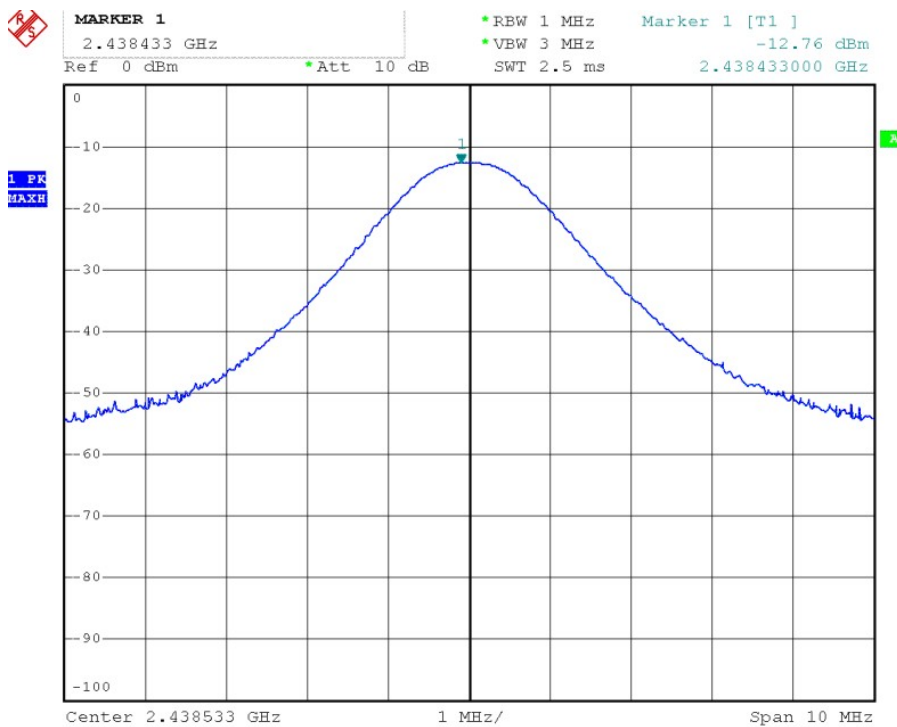

Channel High:

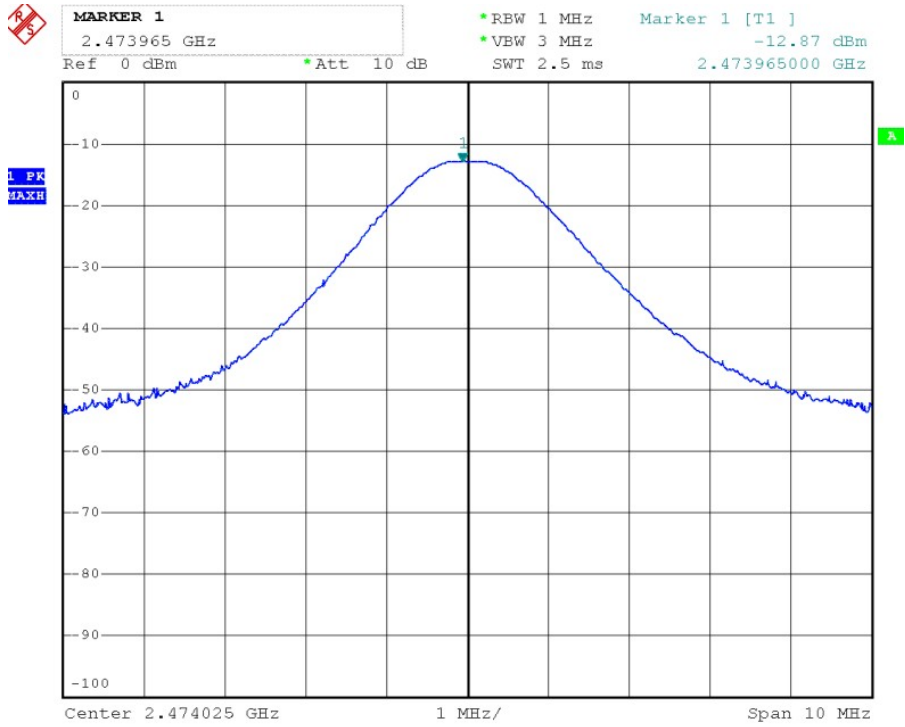


Antenna2  
Channel Low:

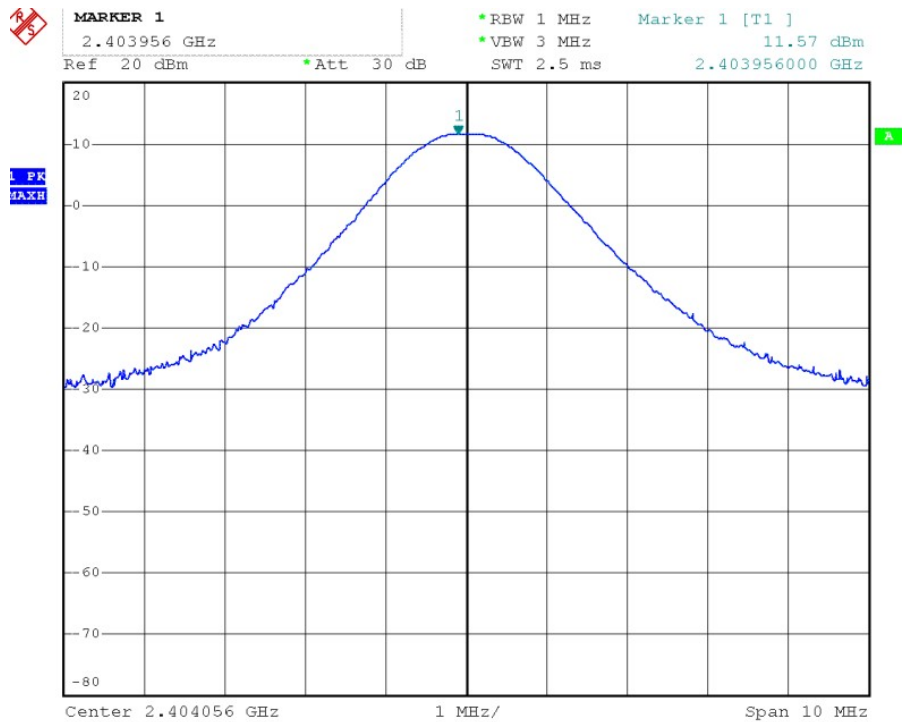




Channel Middle:

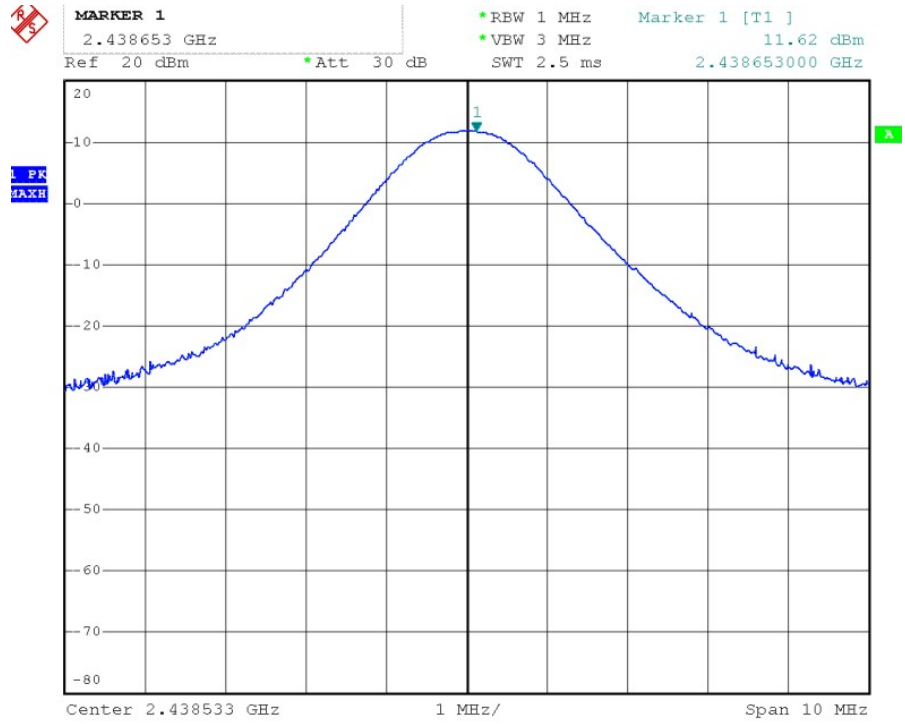

Channel High:

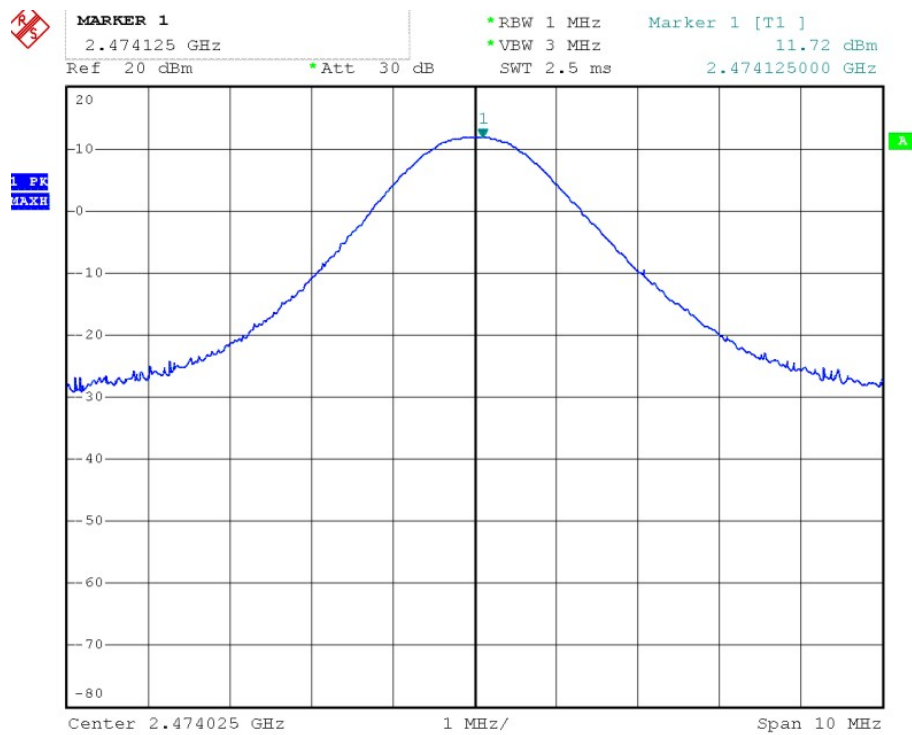

## 10. Test of Band Edges Emission

### 10.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 10.2 EUT Setup

Radiated Measurement Setup


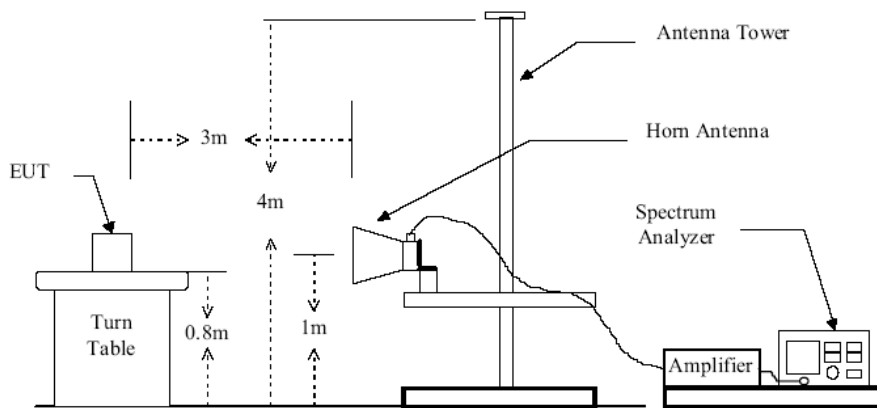


Figure 2 : Frequencies measured above 1 GHz configuration

Conducted Measurement Setup

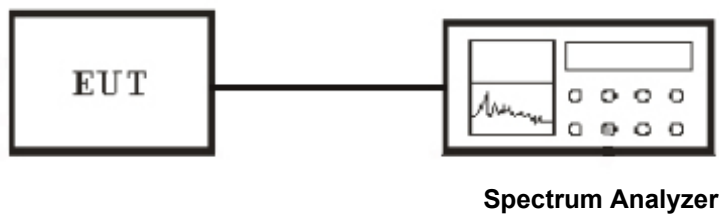

### 10.3 Test Equipment List and Details

See section 2.5.

### 10.4 Test Procedure

Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer

3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

**Radiated Measurement**

1. Configure the EUT according to ANSI C63.4-2003
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

**10.5 Test Result**


Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH) : 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode

**Radiated Test Result**


Frequency (MHz)	Antenna Polarization	Emission Read Value (dBµV/m)	Limits (dBµV/m)
2389.37	H	42.75	54
2389.37	V	43.85	54
2486.64	H	41.59	54
2486.64	V	42.58	54

# Antenna1 Conducted Test Result

The worst frequency range of Low Channel

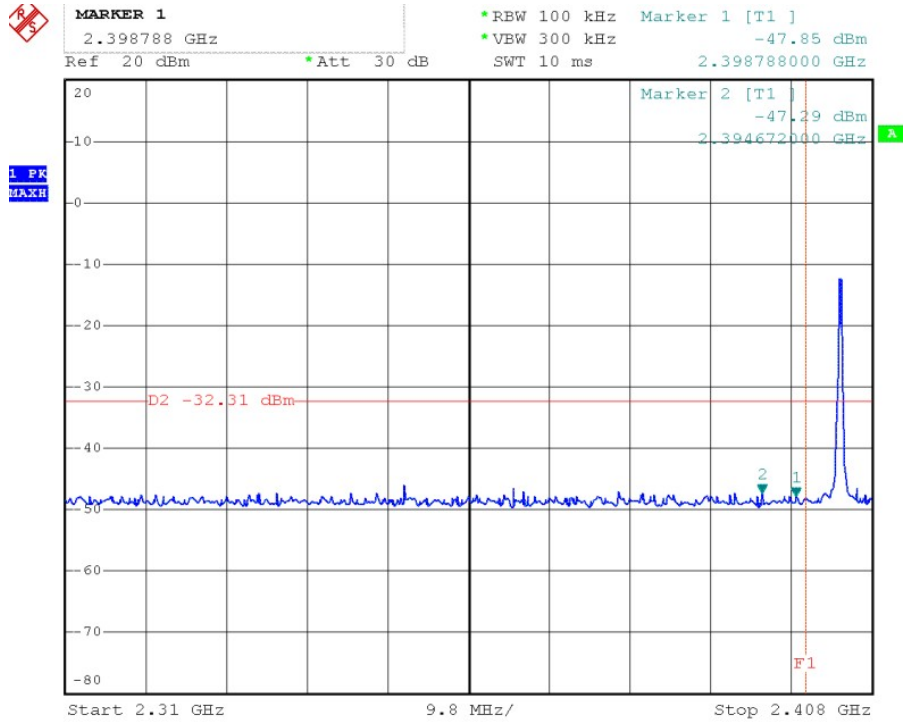


The worst frequency range of High Channel

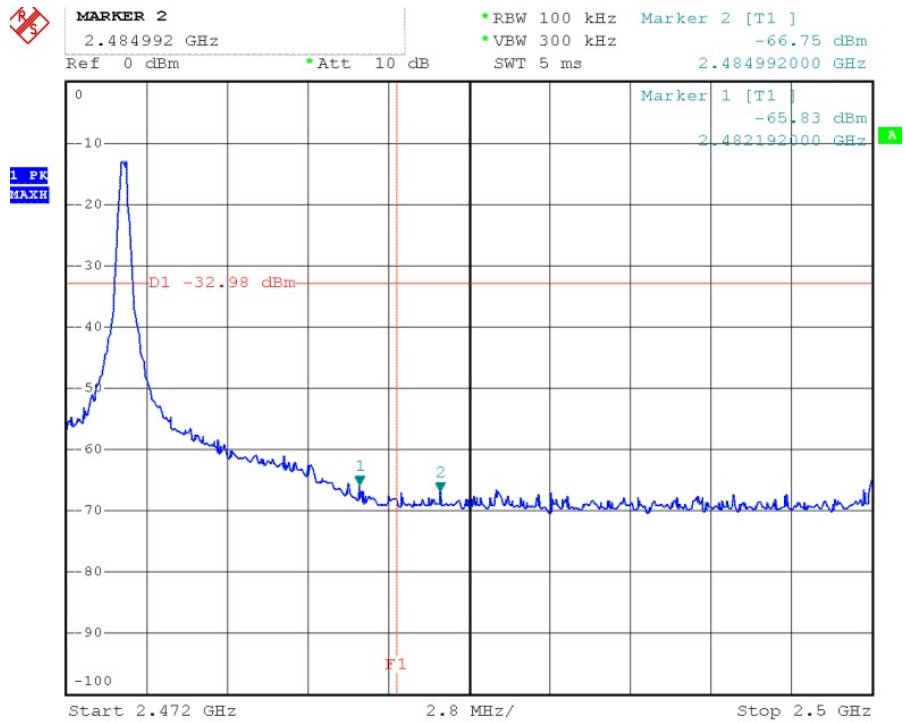


**Antenna2**  
 Conducted Test Result

The worst frequency range of Low Channel

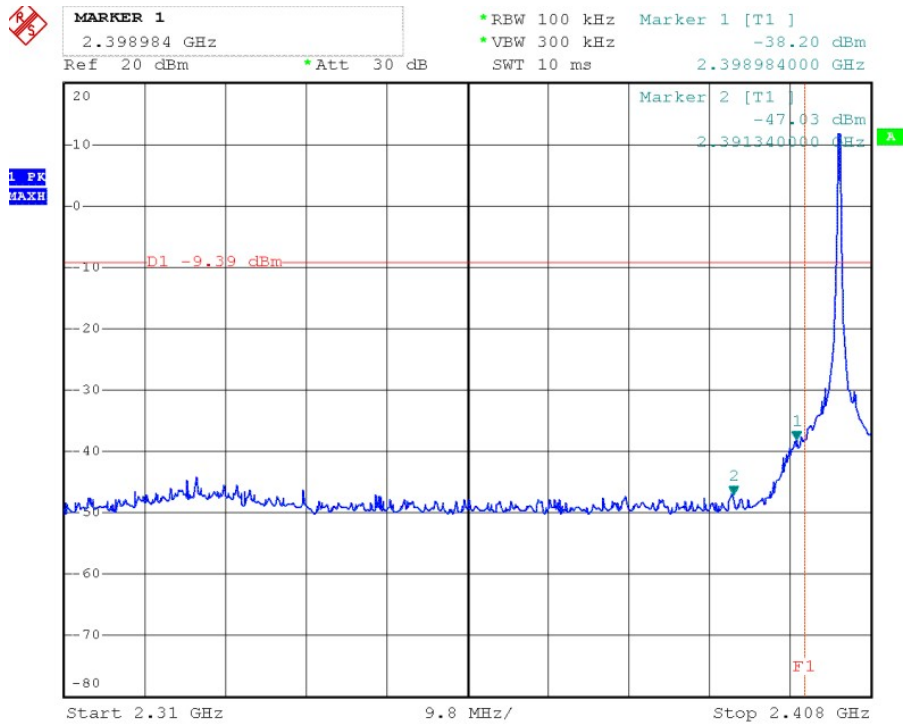

The worst frequency range of High Channel

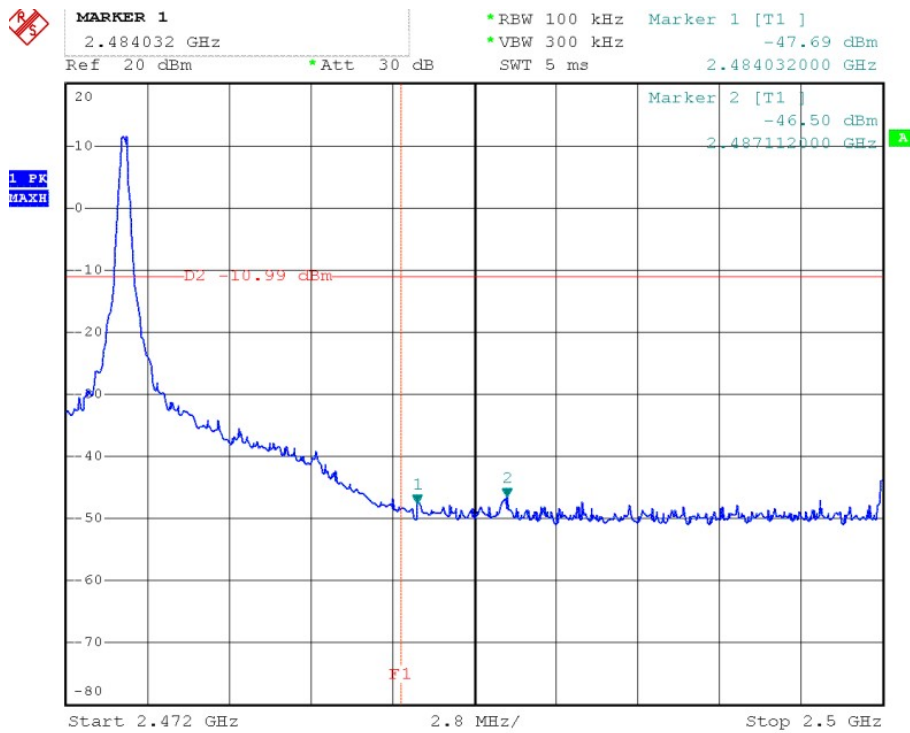


# 11. Test of Spurious Radiated Emission

## 11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

## 11.2 EUT Setup

### Conducted Measurement Setup

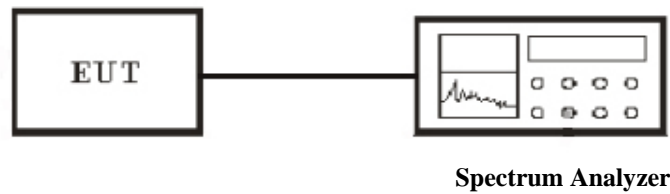

### Radiated Measurement Setup

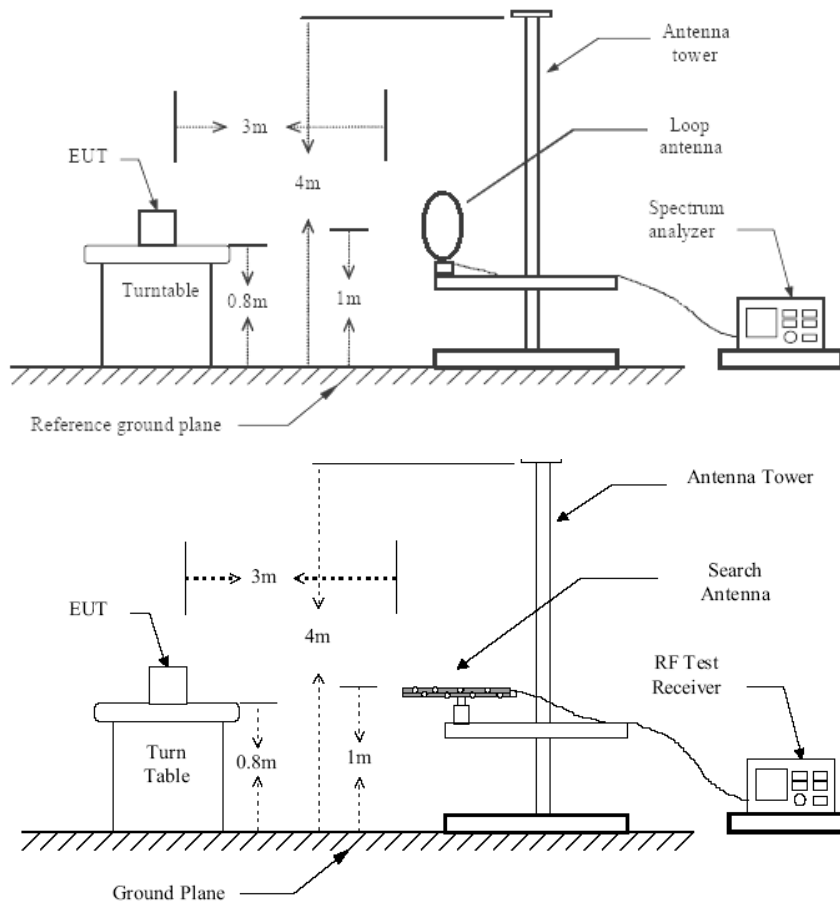


Figure 1 : Frequencies measured below 1 GHz configuration

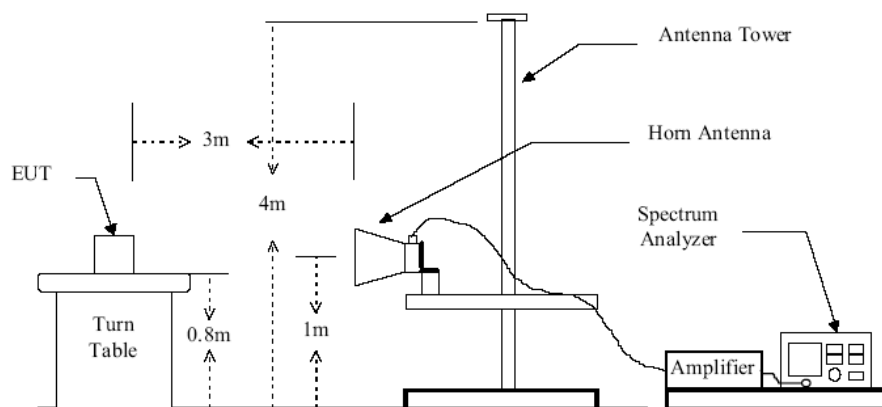


Figure 2 : Frequencies measured above 1 GHz configuration

### 11.3 Test Equipment List and Details

See section 2.5.

### 11.4 Test Procedure

#### Conducted Measurement

1. For emission above 1GHz to 26G,conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

#### Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2003
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. Receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable. When the frequency spectrum measured started from 9 kHz to 30 MHz, a loop antenna is used. When the frequency spectrum measured started from 30 MHz to 1000 MHz and above 1000 MHz, a broadband receiving antenna and the horn antenna are used.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

8. According to the characteristic of the EUT crystals, the range of frequencies was investigated from 9KHz to 30MHz, 30MHz to 1GHz and 1GHz to 26GHz.

9. For emission below 1GHz, Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

10. For emission above 1GHz, Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz, VBW=10Hz for Average Detector, Readings are both peak and average values.

11. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report. All emission not reported are much lower than the prescribed limits.

**11.5 Test Result**

Temperature ( °C ) : 22~23	EUT: Gyro Receiver Graupner/SJ HoTT
Humidity (%RH ): 50~54	M/N: GR-24 PRO+3xG+3A+3M+Vario
Barometric Pressure ( mbar ): 950~1000	Operation Condition: TX Mode




The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

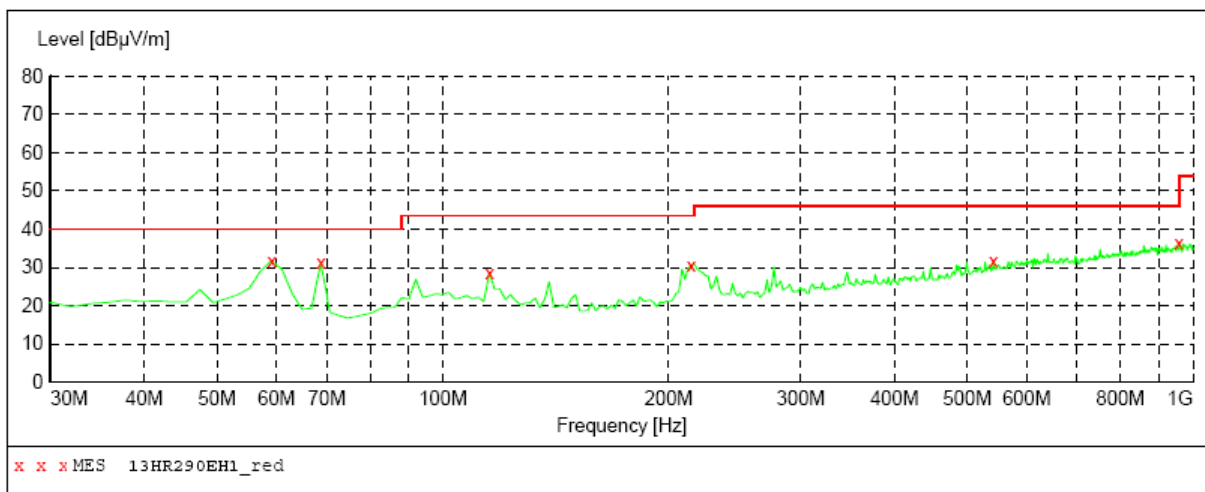

**MEASUREMENT RESULT: "13HR290EH1\_red"**

10/12/2013 09:38


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
59.100000	31.70	14.6	40.0	8.3	QP	100.0	0.00	HORIZONTAL
68.800000	31.20	12.7	40.0	8.8	QP	100.0	0.00	HORIZONTAL
115.360000	28.40	15.5	43.5	15.1	QP	100.0	0.00	HORIZONTAL
214.300000	30.50	15.2	43.5	13.0	QP	100.0	0.00	HORIZONTAL
542.160000	31.60	24.8	46.0	14.4	QP	100.0	0.00	HORIZONTAL
957.320000	36.30	29.6	46.0	9.7	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

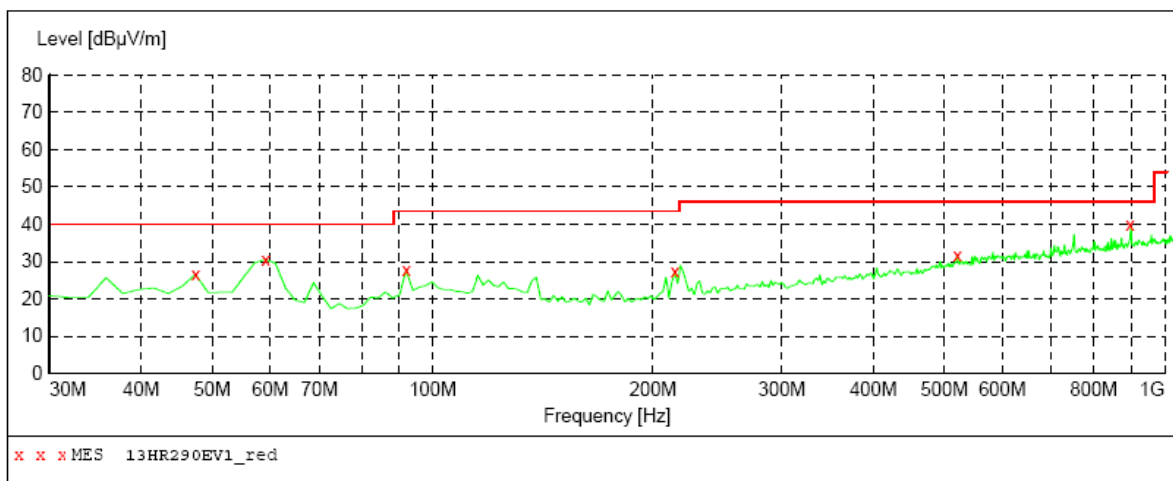

**MEASUREMENT RESULT: "13HR290EV1\_red"**

10/12/2013 09:36


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.60	15.8	40.0	13.4	QP	100.0	0.00	VERTICAL
59.100000	30.50	14.6	40.0	9.5	QP	100.0	0.00	VERTICAL
92.080000	27.70	16.5	43.5	15.8	QP	100.0	0.00	VERTICAL
214.300000	27.30	15.2	43.5	16.2	QP	100.0	0.00	VERTICAL
520.820000	31.70	24.3	46.0	14.3	QP	100.0	0.00	VERTICAL
895.240000	40.60	29.1	46.0	5.4	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

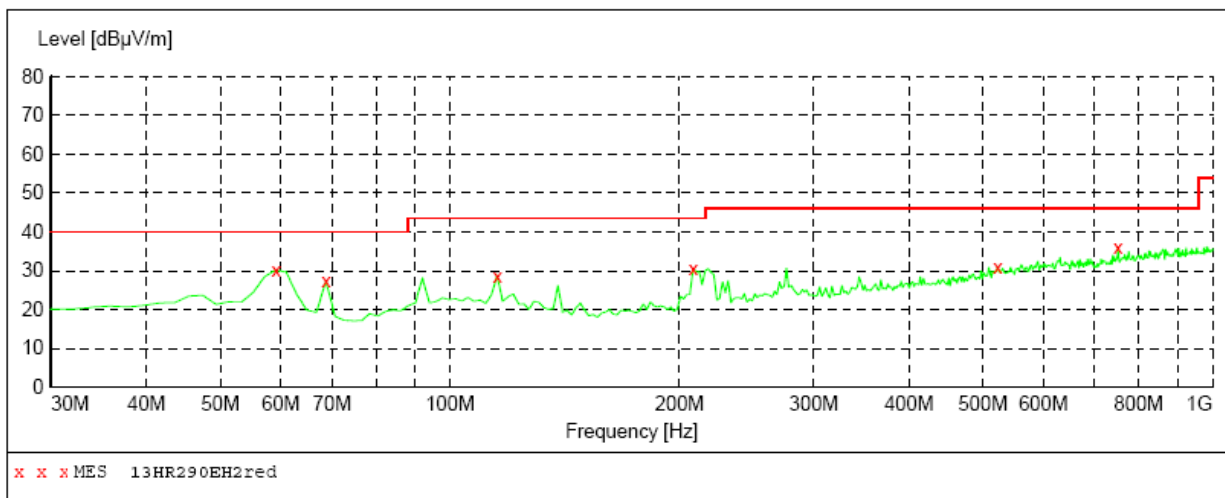

**MEASUREMENT RESULT: "13HR290EH2\_red"**

10/12/2013 09:39


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
59.100000	30.20	14.6	40.0	9.8	QP	100.0	0.00	HORIZONTAL
68.800000	27.30	12.7	40.0	12.7	QP	100.0	0.00	HORIZONTAL
115.360000	28.80	15.5	43.5	14.7	QP	100.0	0.00	HORIZONTAL
208.480000	30.70	15.1	43.5	12.8	QP	100.0	0.00	HORIZONTAL
522.760000	31.10	24.4	46.0	14.9	QP	100.0	0.00	HORIZONTAL
751.680000	35.90	27.3	46.0	10.1	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	MaxPeak	Coupled	100 kHz	VULB9163 NEW
30.0 MHz	1.0 GHz				

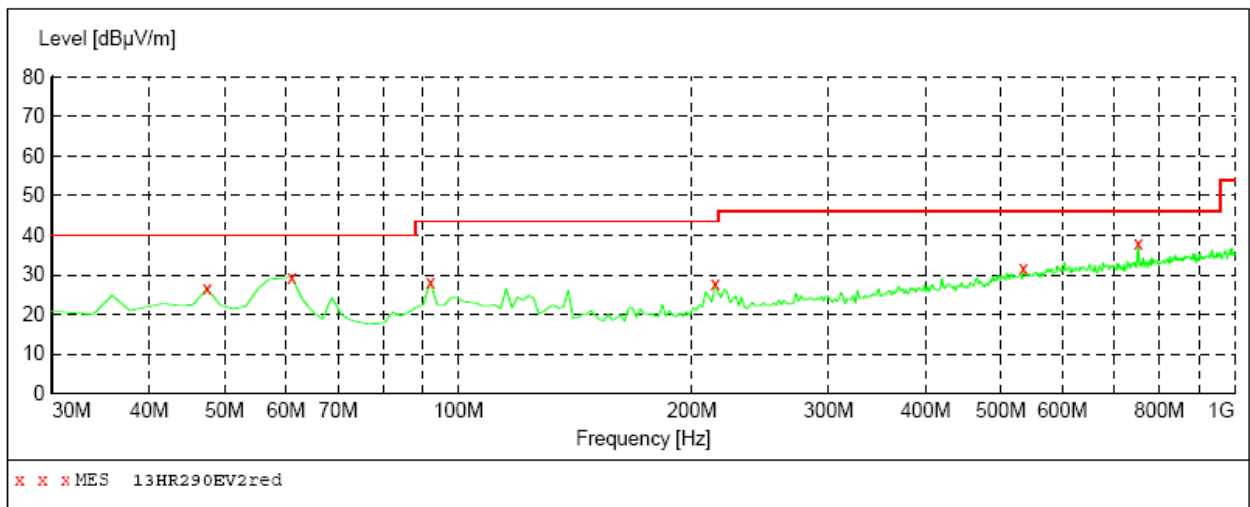

**MEASUREMENT RESULT: "13HR290EV2\_red"**

10/12/2013 09:41


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	26.50	15.8	40.0	13.5	QP	100.0	0.00	VERTICAL
61.040000	29.40	14.2	40.0	10.6	QP	100.0	0.00	VERTICAL
92.080000	28.30	16.5	43.5	15.2	QP	100.0	0.00	VERTICAL
214.300000	27.60	15.2	43.5	15.9	QP	100.0	0.00	VERTICAL
534.400000	31.70	24.6	46.0	14.3	QP	100.0	0.00	VERTICAL
751.680000	38.10	27.3	46.0	7.9	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Horizontal

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

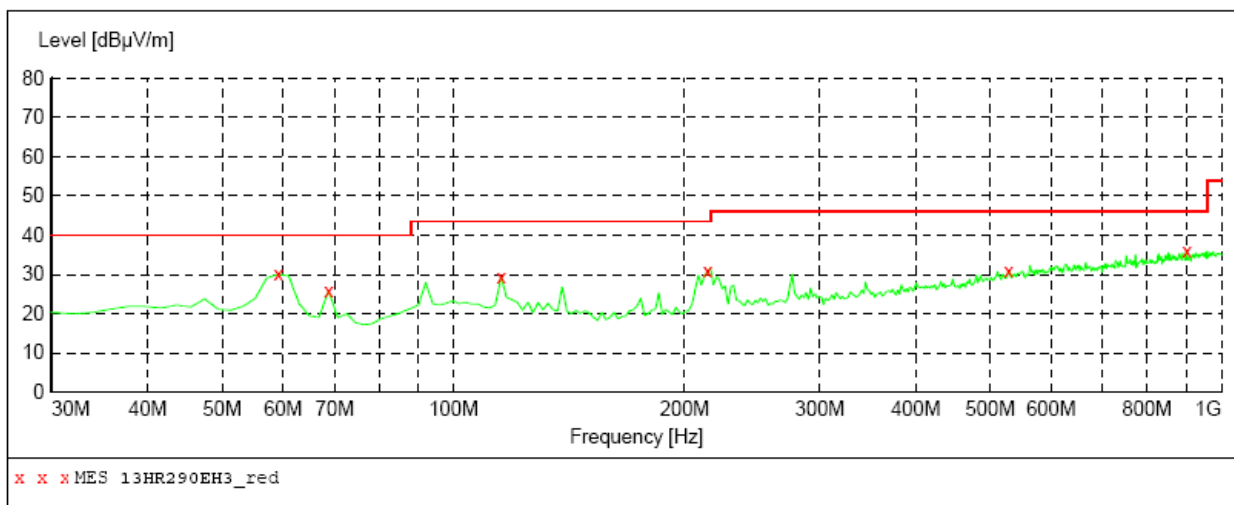

**MEASUREMENT RESULT: "13HR290EH3\_red"**

10/12/2013 09:43


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
59.100000	30.00	14.6	40.0	10.0	QP	100.0	0.00	HORIZONTAL
68.800000	25.90	12.7	40.0	14.1	QP	100.0	0.00	HORIZONTAL
115.360000	29.40	15.5	43.5	14.1	QP	100.0	0.00	HORIZONTAL
214.300000	30.80	15.2	43.5	12.7	QP	100.0	0.00	HORIZONTAL
528.580000	30.90	24.5	46.0	15.1	QP	100.0	0.00	HORIZONTAL
901.060000	36.20	29.2	46.0	9.8	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: Gyro Receiver Graupner/SJ HoTT  
M/N: GR-24 PRO+3xG+3A+3M+Vario  
Operating Condition: TX Mode  
Test Site: 3m CHAMBER  
Operator: Chen  
Test Specification: DC 6V from battery  
Comment: Polarization: Vertical

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

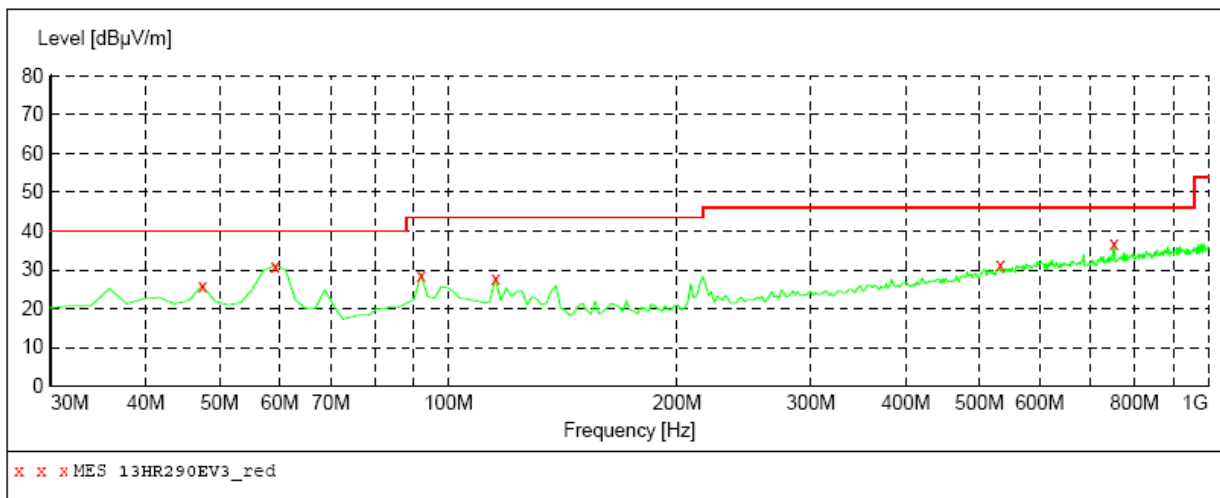

**MEASUREMENT RESULT: "13HR290EV3\_red"**

10/12/2013 09:42

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	25.90	15.8	40.0	14.1	QP	100.0	0.00	VERTICAL
59.100000	31.10	14.6	40.0	8.9	QP	100.0	0.00	VERTICAL
92.080000	28.80	16.5	43.5	14.7	QP	100.0	0.00	VERTICAL
115.360000	27.80	15.5	43.5	15.7	QP	100.0	0.00	VERTICAL
532.460000	31.30	24.6	46.0	14.7	QP	100.0	0.00	VERTICAL
751.680000	36.70	27.3	46.0	9.3	QP	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1GHz

Channel Low

Channel Low (2404.056MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2404.056	H	1	96.09	-7.15	88.94	N/A	N/A	P
			90.01	-7.15	82.86	N/A	N/A	A
2404.056	V	1	97.56	-7.15	90.41	N/A	N/A	P
			91.35	-7.15	84.2	N/A	N/A	A
4808.112	H	1	43.35	1.07	44.42	74	-29.58	P
			34.03	1.07	35.1	54	-18.9	A
4808.112	V	1	45.64	1.07	46.71	74	-27.29	P
			34.75	1.07	35.82	54	-18.18	A
7205	H	1	43.02	7.38	50.4	74	-23.6	P
			33.15	7.38	40.53	54	-13.47	A
7205	V	1	46.15	7.38	53.53	74	-20.47	P
			34.53	7.38	41.91	54	-12.09	A
9613.33	H	1	44.31	10.29	54.6	74	-19.4	P
			33.62	10.29	43.91	54	-10.09	A
9613.33	V	1	45.34	7.38	52.72	74	-21.28	P
			33.95	7.38	41.33	54	-12.67	A
12021.67	H	1	44.75	14.01	58.76	74	-15.24	P
			34.34	14.01	48.35	54	-5.65	A
12021.67	V	1	45.62	14.01	59.63	74	-14.37	P
			34.19	14.01	48.2	54	-5.8	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
 Margin = Level-Limit  
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
 4. The test limit distance is 3m limit

Channel Mid

Channel Mid (2438.533MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2438.533	H	1	95.35	-6.37	88.98	N/A	N/A	P
			90.15	-6.37	83.78	N/A	N/A	A
2438.533	V	1	97.56	-6.37	91.19	N/A	N/A	P
			91.2	-6.37	84.83	N/A	N/A	A
4877.066	H	1	41.16	1.07	42.23	74	-31.77	P
			33.15	1.07	34.22	54	-19.78	A
4877.066	V	1	41.02	1.07	42.09	74	-31.91	P
			33.09	1.07	34.16	54	-19.84	A
7318.33	H	1	42.56	7.49	50.05	74	-23.95	P
			33.65	7.49	41.14	54	-12.86	A
7318.33	V	1	43.54	7.49	51.03	74	-22.97	P
			33.64	7.49	41.13	54	-12.87	A
9755	H	1	44.16	10.47	54.63	74	-19.37	P
			33.45	10.47	43.92	54	-10.08	A
9755	V	1	45.5	10.47	55.97	74	-18.03	P
			33.89	10.47	44.36	54	-9.64	A
12191.67	H	1	46.159	14.1	60.259	74	-13.741	P
			32.98	14.1	47.08	54	-6.92	A
12191.67	V	1	46.12	14.1	60.22	74	-13.78	P
			33.4	14.1	47.5	54	-6.5	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
 Margin = Level-Limit  
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
 4. The test limit distance is 3m limit



Channel High

Channel High (2474.025MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dBµV/m)	Margin (dBµV/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dBµV	Transd	Result dBµV/m			
2474.025	H	1	94.55	-6.05	88.5	N/A	N/A	P
			89.12	-6.05	83.07	N/A	N/A	A
2474.025	V	1	96.11	-6.05	90.06	N/A	N/A	P
			90.02	-6.05	83.97	N/A	N/A	A
4948.05	H	1	42.08	1.07	43.15	74	-30.85	P
			33.72	1.07	34.79	54	-19.21	A
4948.5	V	1	43.14	1.07	44.21	74	-29.79	P
			33.36	1.07	34.43	54	-19.57	A
7431.67	H	1	43.98	7.61	51.59	74	-22.41	P
			33.02	7.61	40.63	54	-13.37	A
7431.67	V	1	45.15	7.61	52.76	74	-21.24	P
			33.78	7.61	41.39	54	-12.61	A
9896.67	H	1	43.12	10.65	53.77	74	-20.23	P
			34.39	10.65	45.04	54	-8.96	A
9896.67	V	1	46.01	10.65	56.66	74	-17.34	P
			34.12	10.65	44.77	54	-9.23	A
12361.67	H	1	44.14	14.19	58.33	74	-15.67	P
			33.31	14.19	47.5	54	-6.5	A
12361.67	V	1	45.29	14.19	59.48	74	-14.52	P
			33.05	14.19	47.24	54	-6.76	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier  
 Margin = Level-Limit  
 Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
 2. Data of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
 4. The test limit distance is 3m limit


Radiated Emission Below 30 MHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector Mode
0.566	25.51	8.22	-1.01	32.72	67	-34.28	QP
18.99	24.54	8.17	-1.2	31.51	49.5	-17.99	QP
23.62	24.58	8.03	-1.05	31.56	49.5	-17.94	QP
24.66	25.55	7.48	-1.69	31.34	49.5	-18.16	QP


Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) =Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level.- Limit value


Conducted Spurious Emission Test Data 30MHz-26.5GHz  
**Antenna1**  
Channel Low

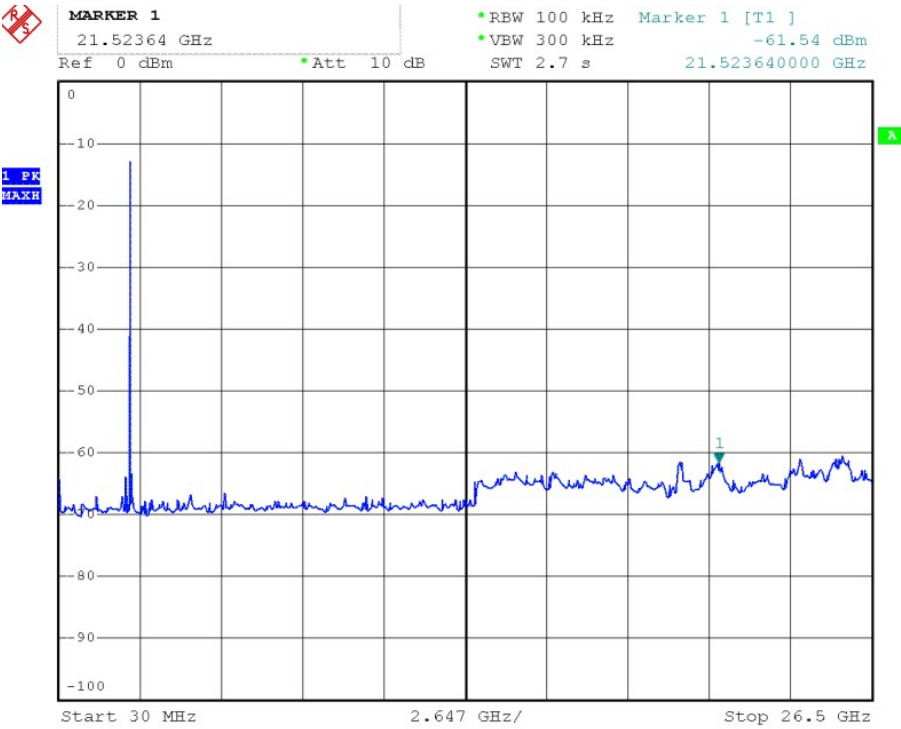


Channel Mid

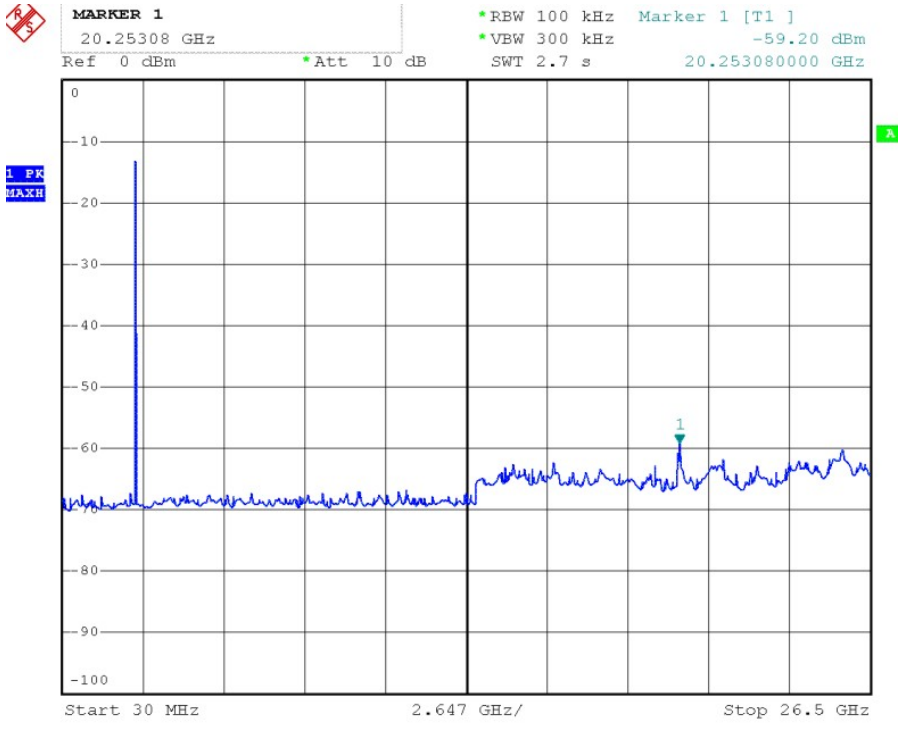


### Channel High

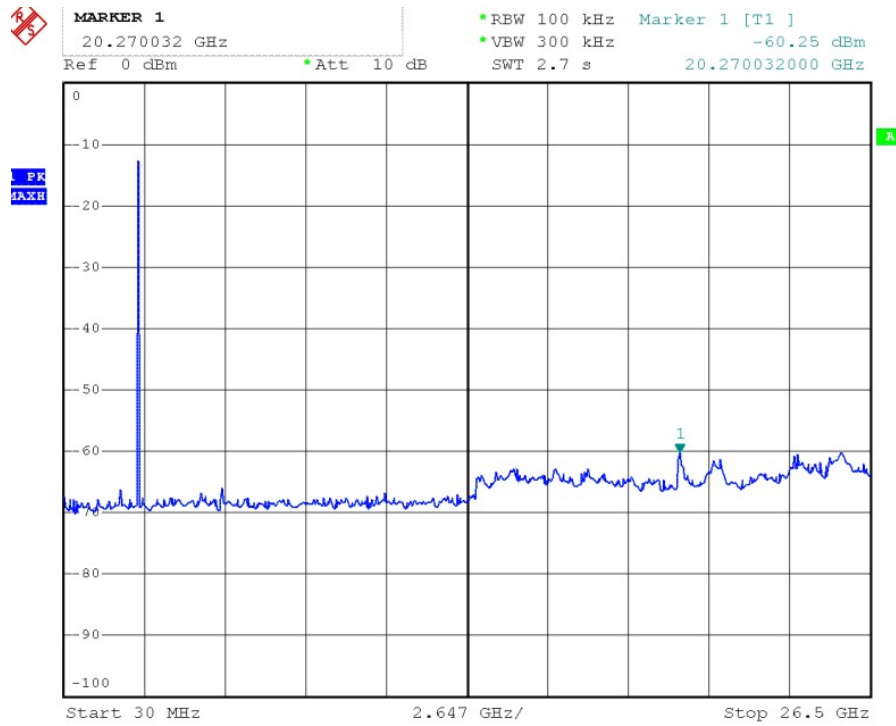


### Antenna 2 Channel Low

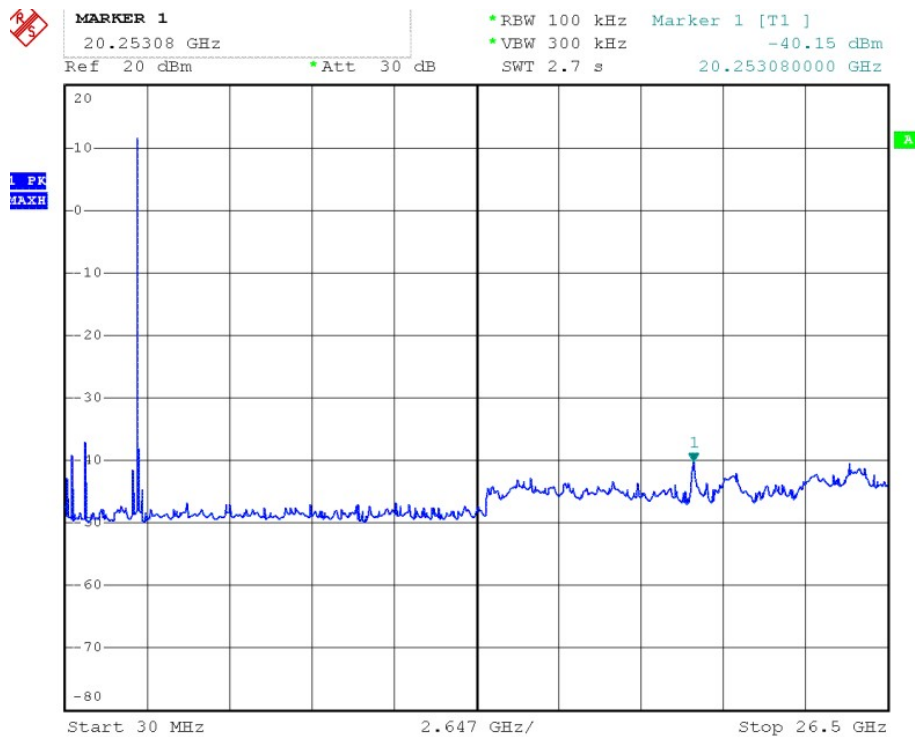

### Channel Mid

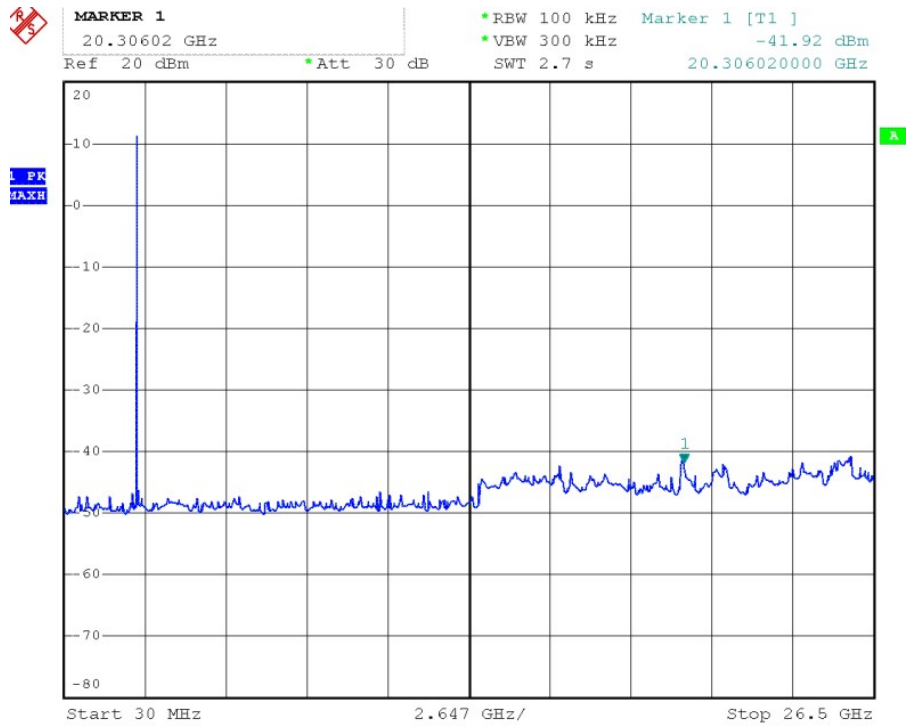

### Channel High

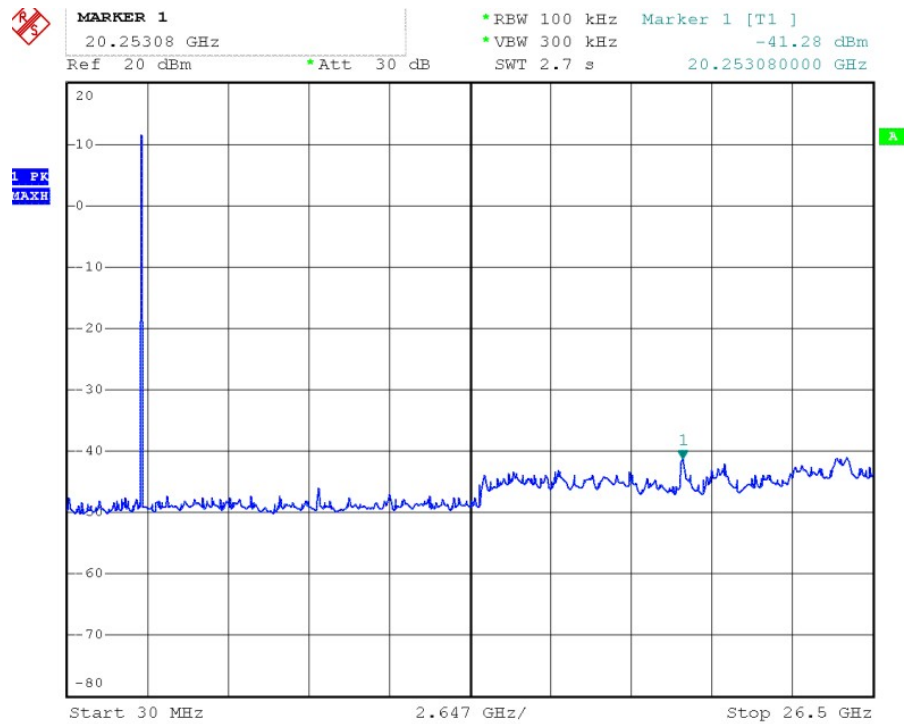

## **12. ANTENNA REQUIREMENT**

### **12.1 Standard Applicable**

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **12.2 Antenna Connected Construction**

The antenna connector is designed with permanent attachment and no consideration of replacement. The antenna used in this product is complied with Standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.