


# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

**Test Report No.** : W179R-D021  
**AGR No.** : A179A-375  
**Applicant** : ROBOTIS  
**Address** : #1505,1506, Ace High End Tower No.3, 371-50 Gasandong Geumcheongu, Seoul, Korea  
**Manufacturer** : ROBOTIS  
**Address** : #1505,1506, Ace High End Tower No.3, 371-50 Gasandong Geumcheongu, Seoul, Korea  
**Type of Equipment** : BT-410 DONGLE  
**FCC ID.** : SOD-BT-410-DONGLE  
**Model Name** : BT-410 DONGLE  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 35 pages (including this page)  
**Date of Incoming** : September 11, 2017  
**Date of issue** : September 27, 2017

## SUMMARY

The equipment complies with the regulation; ***FCC PART 15 SUBPART C Section 15.247***  
 This test report only contains the result of a single test of the sample supplied for the examination.  
 It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:   
 Ki-Hong, Nam / Asst, Chief Engineer  
 ONETECH Corp.

Approved by:   
 Keun-Young, Choi / Vice President  
 ONETECH Corp.

**CONTENTS****PAGE**

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY.....</b>	<b>6</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>6</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....</b>	<b>6</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>6</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>6</b>
<b>2.5 TEST METHODOLOGY.....</b>	<b>6</b>
<b>2.6 TEST FACILITY.....</b>	<b>6</b>
<b>3. GENERAL INFORMATION.....</b>	<b>7</b>
<b>3.1 PRODUCT DESCRIPTION.....</b>	<b>7</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....</b>	<b>7</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>8</b>
<b>5.1 JUSTIFICATION.....</b>	<b>8</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>8</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>8</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM.....</b>	<b>9</b>
<b>6. PRELIMINARY TEST .....</b>	<b>10</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>10</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>10</b>
<b>7. MIMIMUM 6 DB BANDWIDTH .....</b>	<b>11</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>11</b>
<b>7.2 TEST SET-UP .....</b>	<b>11</b>
<b>7.3 TEST EQUIPMENT USED.....</b>	<b>11</b>
<b>7.4 TEST DATA.....</b>	<b>12</b>
<b>8. MAXIMUM PEAK OUTPUT POWER.....</b>	<b>14</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>14</b>
<b>8.2 TEST SET-UP .....</b>	<b>14</b>
<b>8.3 TEST EQUIPMENT USED.....</b>	<b>14</b>
<b>8.4 TEST DATA.....</b>	<b>15</b>
<b>9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....</b>	<b>17</b>
<b>9.1 OPERATING ENVIRONMENT .....</b>	<b>17</b>

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST EQUIPMENT USED.....	17
9.5 TEST DATA FOR CONDUCTED EMISSION .....	18
9.6 TEST DATA FOR RADIATED EMISSION .....	23
9.6.1 Radiated Emission which fall in the Restricted Band and Band Edge .....	23
9.6.2 Spurious & Harmonic Radiated Emission.....	24
<b>10. PEAK POWER SPECTRAL DENSITY .....</b>	<b>25</b>
10.1 OPERATING ENVIRONMENT .....	25
10.2 TEST SET-UP .....	25
10.3 TEST EQUIPMENT USED.....	25
10.4 TEST DATA.....	26
<b>11. RADIATED EMISSION TEST .....</b>	<b>28</b>
11.1 OPERATING ENVIRONMENT .....	28
11.2 TEST SET-UP .....	28
11.3 TEST EQUIPMENT USED.....	28
11.4 TEST DATA FOR TRANSMITTING MODE .....	29
11.4.1 Test data for 30 MHz ~ 1 GHz .....	29
11.4.2 Test data for Below 30 MHz.....	32
11.4.3 Test data for above 1 GHz .....	32
<b>12. CONDUCTED EMISSION TEST .....</b>	<b>33</b>
12.1 OPERATING ENVIRONMENT .....	33
12.2 TEST SET-UP .....	33
12.3 TEST EQUIPMENT USED.....	33
12.4 TEST DATA.....	34

### Revision History

Issued Report No.	Issued Date	Revisions	Effect Section
W179R-D021	September 27, 2017	Initial Issue	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : ROBOTIS  
 Address : #1505,1506, Ace High End Tower No.3, 371-50 Gasandong Geumcheongu, Seoul, Korea  
 Contact Person : Eunsung, Lee / Senior Engineer  
 Telephone No. : +82-70-8671-2600  
 FCC ID : SOD-BT-410-DONGLE  
 Model Name : BT-410 DONGLE  
 Serial Number : N/A  
 Date : September 27, 2017

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
KIND OF EQUIPMENT	BT-410 DONGLE
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The ROBOTIS, Model BT-410 DONGLE (referred to as the EUT in this report) is a BT-410 DONGLE. The product specification described herein was obtained from product data sheet or user’s manual.

Device Type	BT-410 DONGLE
Operating Frequency	2 402 MHz ~ 2 480 MHz
RF Output Power	-2.64 dBm
Number of Channel	40 Channel
Modulation Type	GFSK
Antenna Type	Chip Antenna
Antenna Gain	-0.92 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	16 MHz
Rated Supply Voltage	DC 5.0 V

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

### 4. EUT MODIFICATIONS

-. None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	ROBOTIS	BIC17-A01-E001	-

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
BT-410 DONGLE	ROBOTIS	BT-410 DONGLE (EUT)	-
Lenovo IdeaPad Z560	Lenovo	Notebook PC	EUT

### 5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.



## 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was connected to Notebook PC and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

## 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 7. MIMIMUM 6 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.7 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

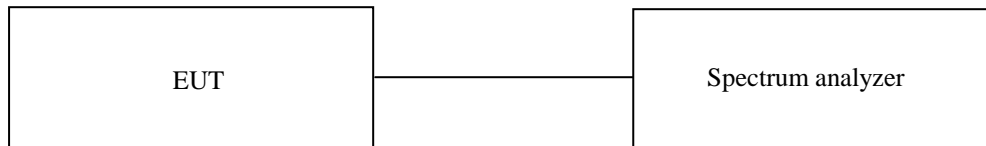

### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

**7.4 Test data**


-. Test Date : September 12, 2017 ~ September 14, 2017  
 -. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	1 004.00	500.00	504.00
Middle	2 440.00	709.30	500.00	209.30
High	2 480.00	714.30	500.00	214.30

Remark. Margin = Measured Value - Limit




**Tested by: Tae-Ho, Kim / Manager**

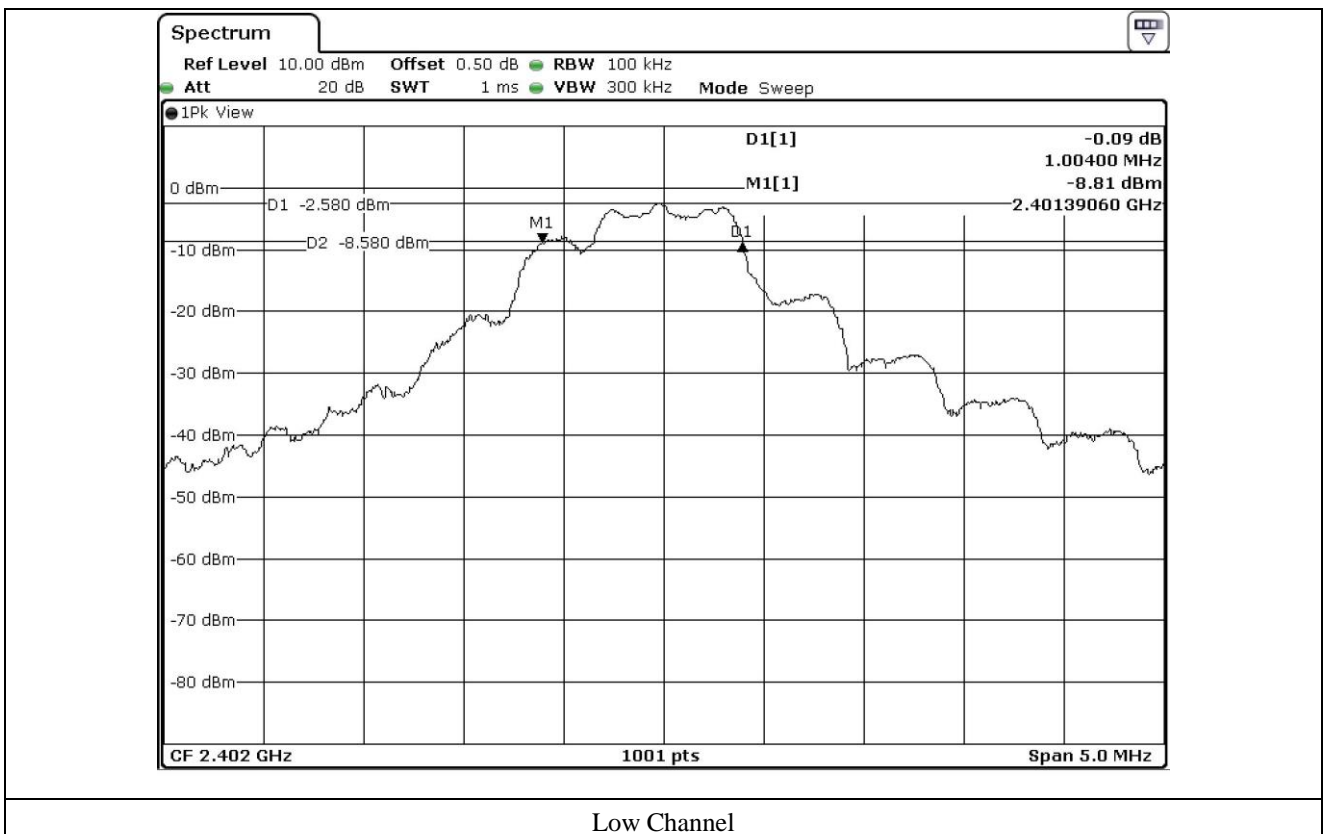

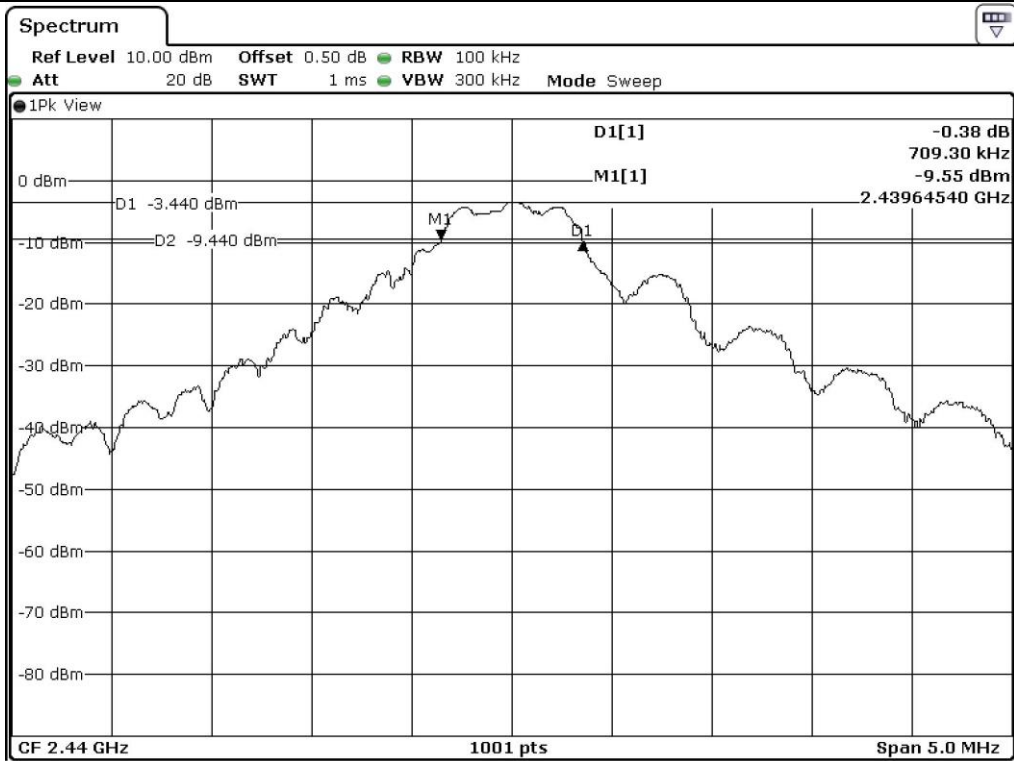

Middle Channel

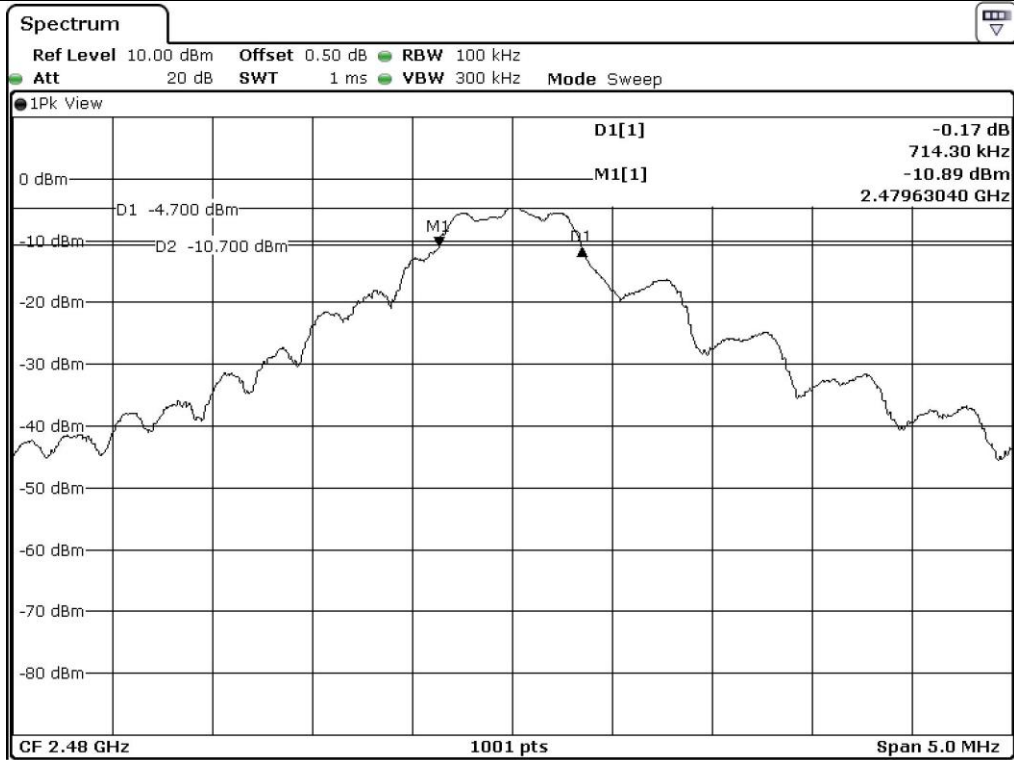

High Channel


## 8. MAXIMUM PEAK OUTPUT POWER

### 8.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.7 % R.H.

### 8.2 Test set-up

The maximum peak output power was measured with the wide band sensor connected to the antenna output of the EUT. The Wide Band Sensor is measured when the EUT is transmitting at the appropriate center frequency its maximum power control level as described in Section 9.2.3(KDB 558074 D01 DTS Meas Guidance V04). Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

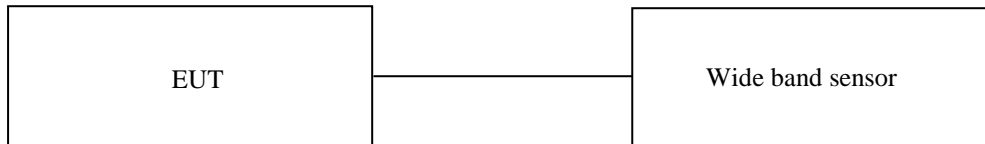

### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - NRP-Z81	Rohde & Schwarz	Wide band Sensor	101975	Apr. 04, 2017 (1Y)

All test equipment used is calibrated on a regular basis.

**8.4 Test data**

-. Test Date : September 12, 2017 ~ September 14, 2017


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-2.64	30.00	32.64
MIDDLE	2 440.00	-3.45	30.00	33.45
HIGH	2 480.00	-4.72	30.00	34.72

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




**Tested by: Tae-Ho, Kim / Manager**

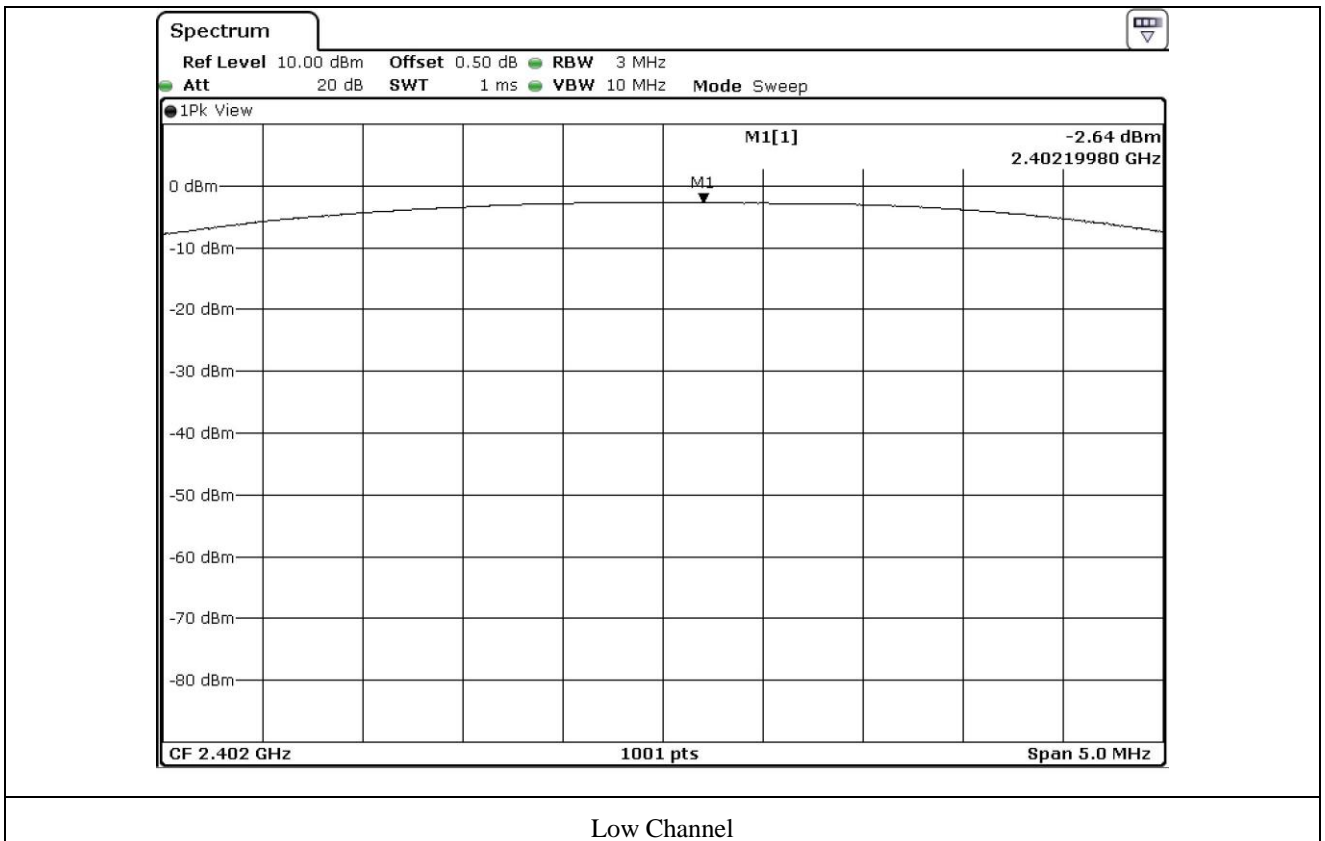

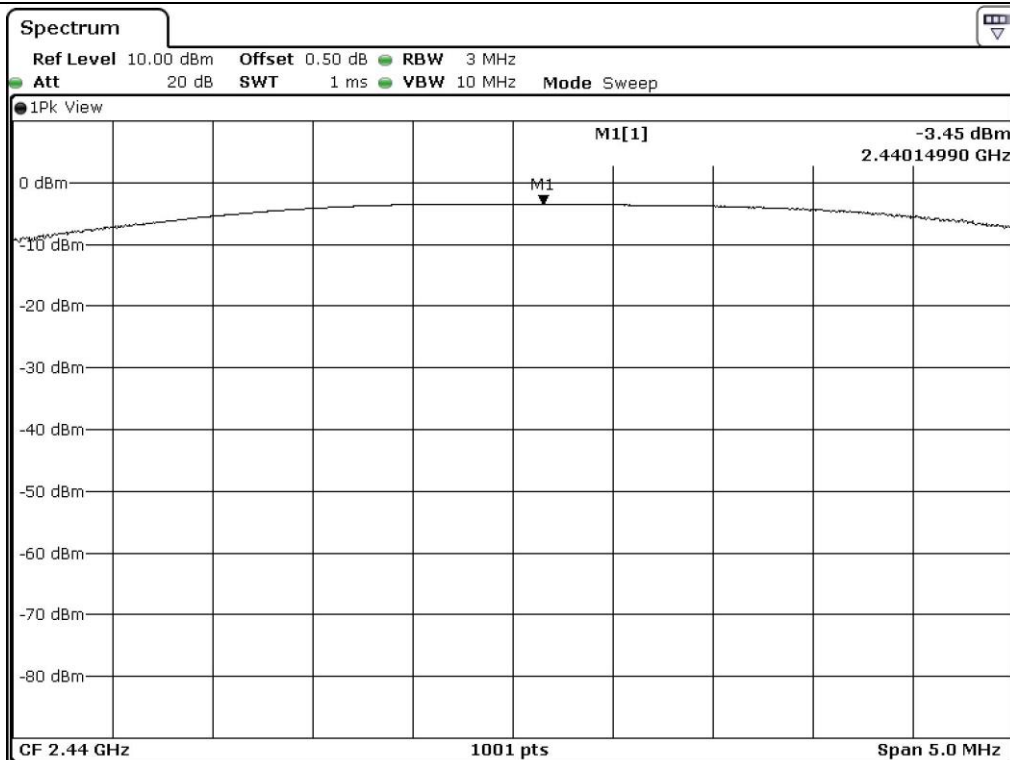

Middle Channel

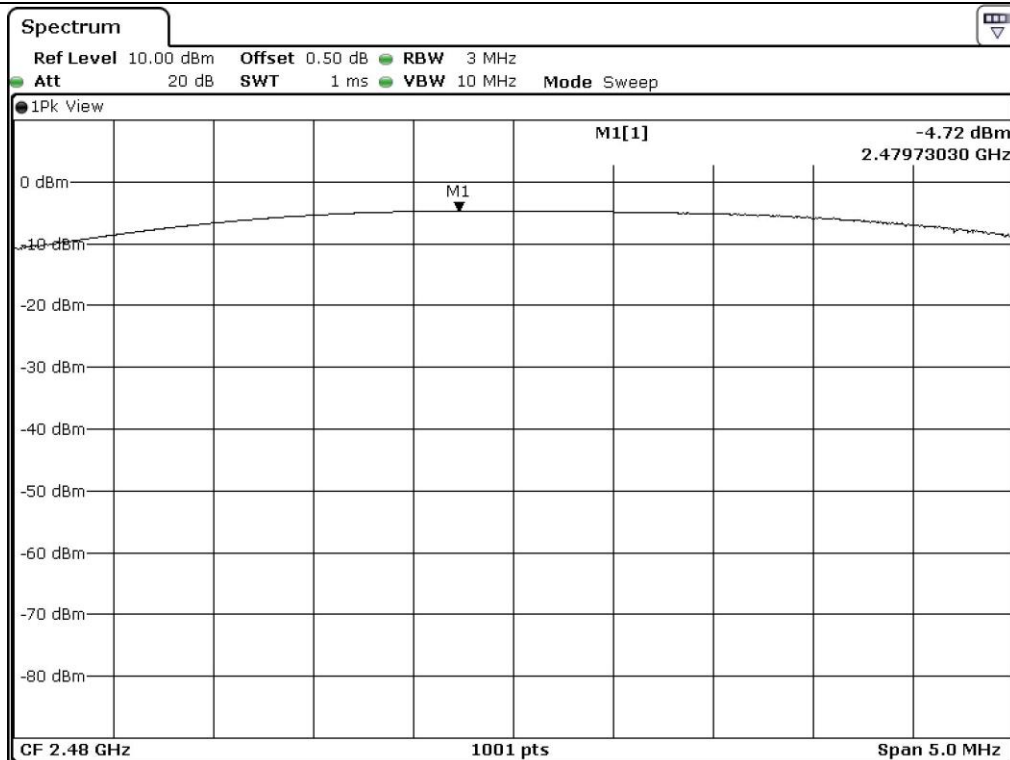

High Channel




## 9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 9.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.7 % R.H.

### 9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

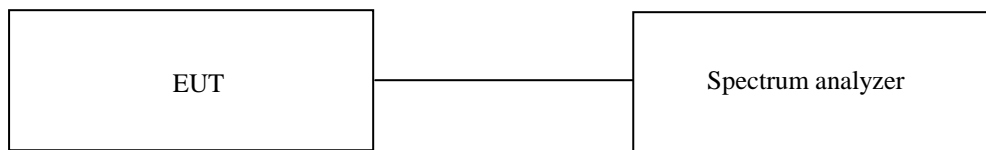

### 9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

### 9.4 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Sep. 01, 2017 (1Y)
■ - SCU40A	Rohde & Schwarz	Signal Conditioning unit	100436	Apr. 04, 2017 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	May 26, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

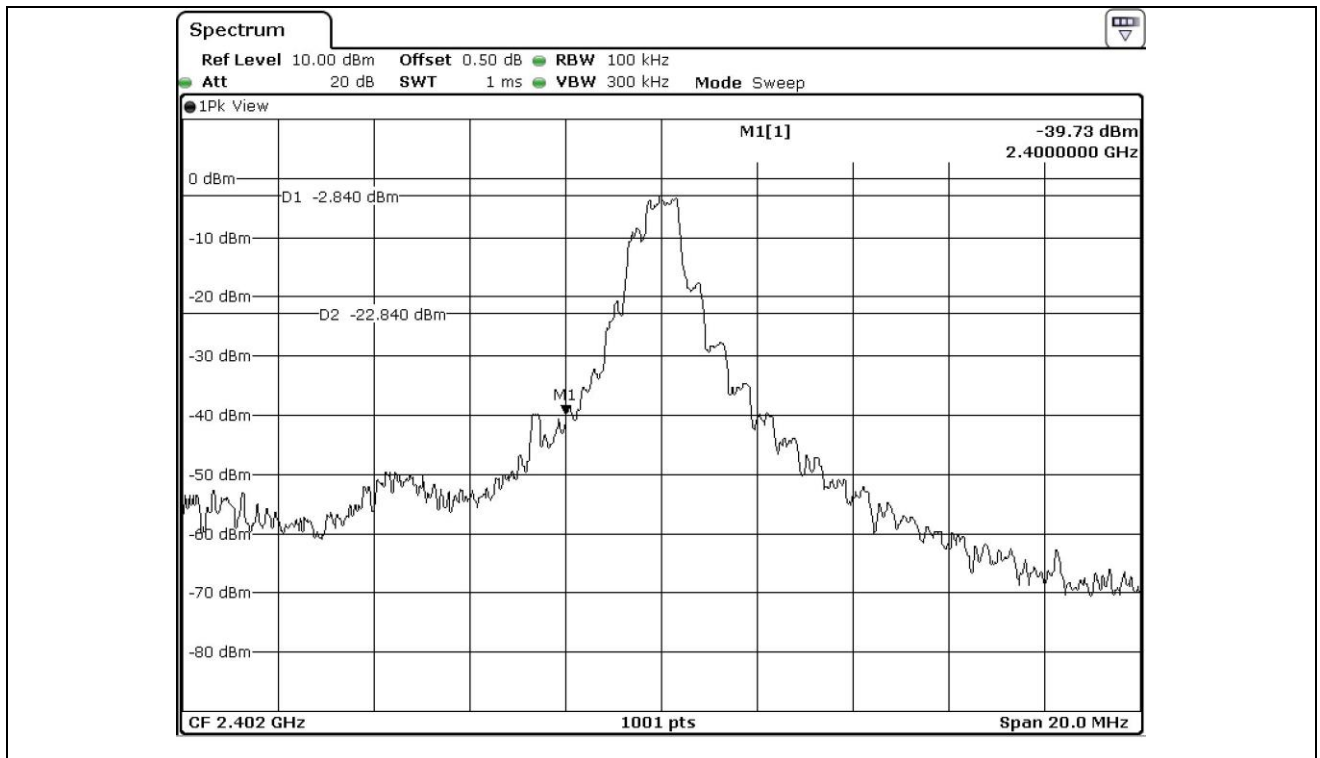


Low Channel

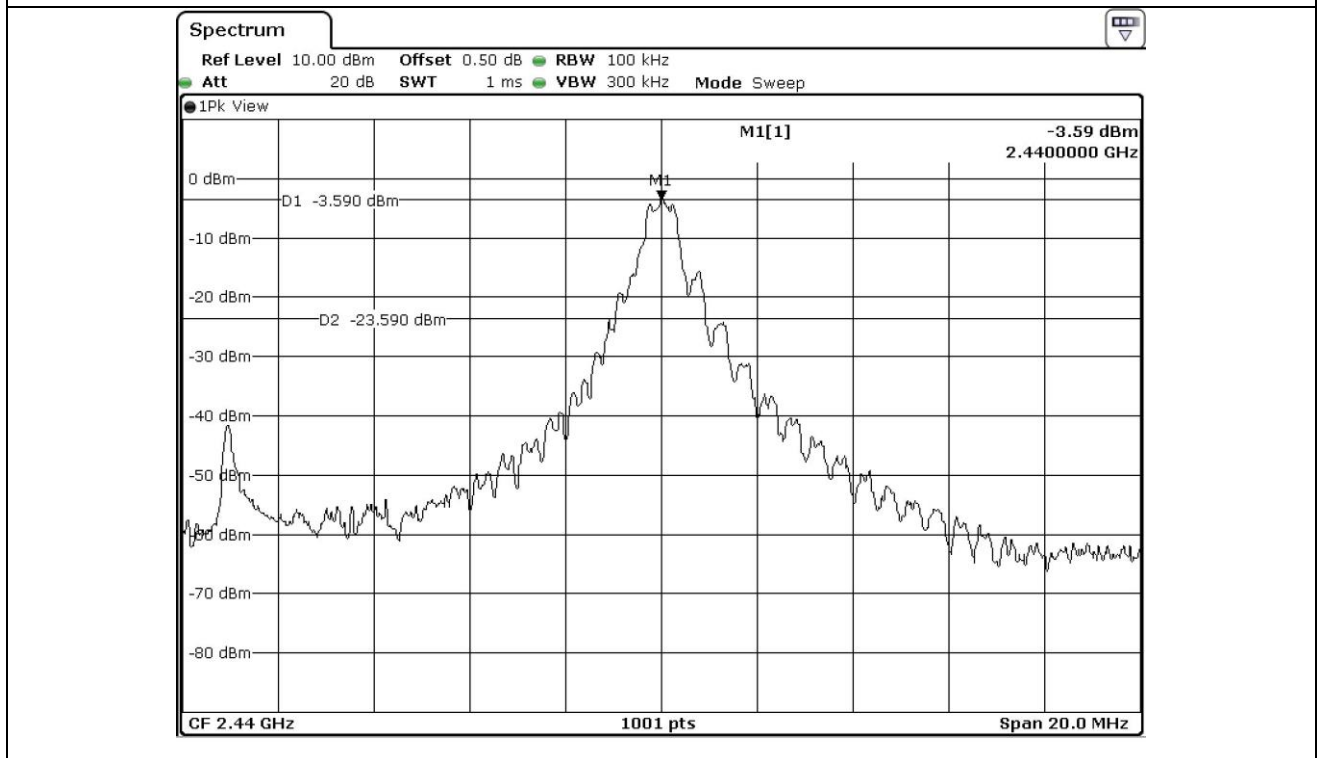


Middle Channel

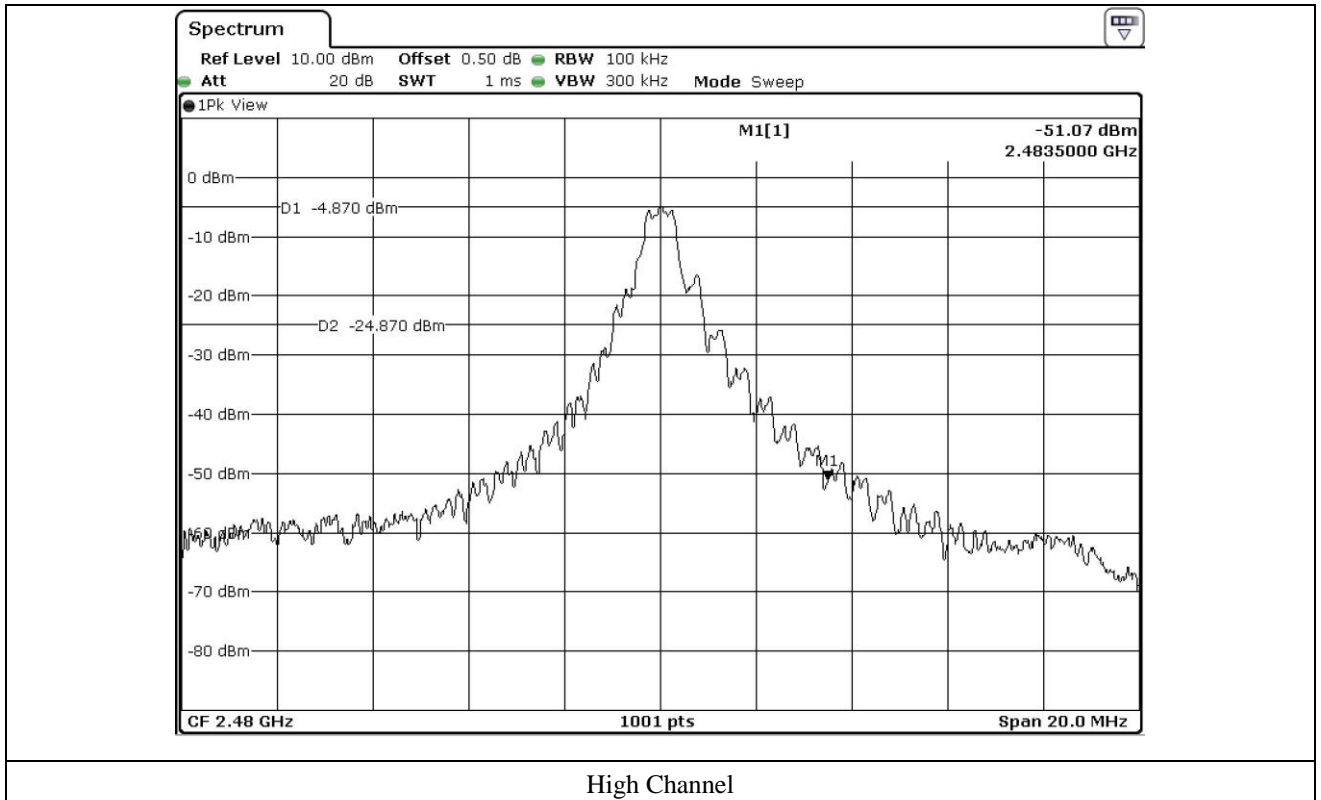


High Channel

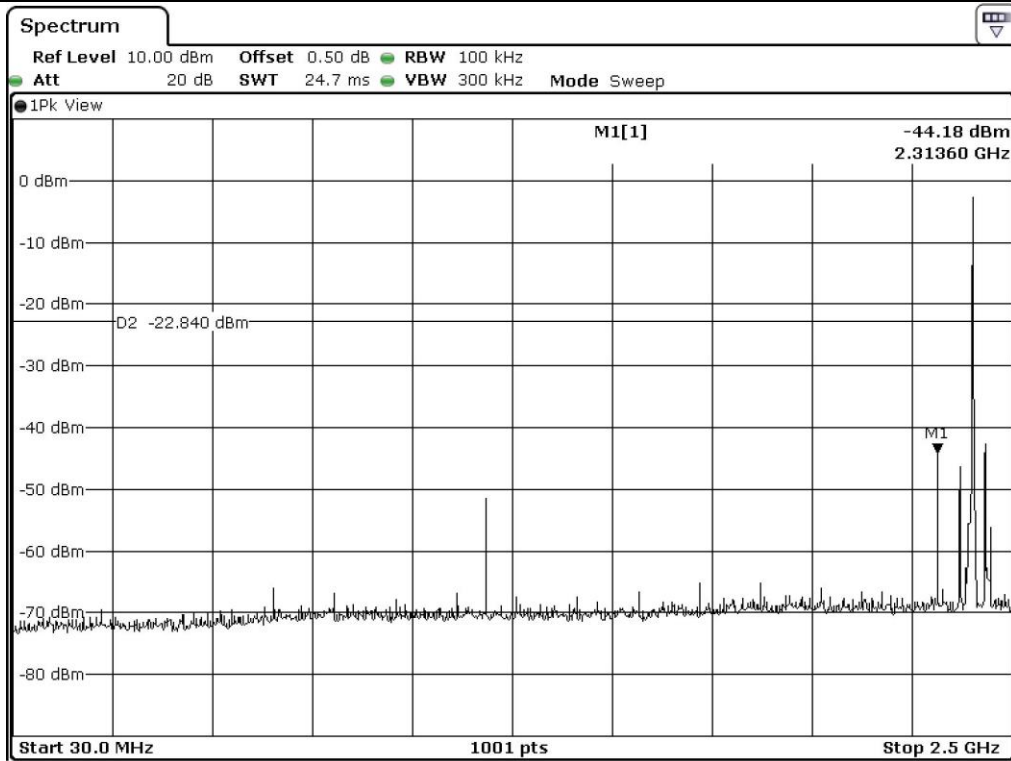


Low Channel

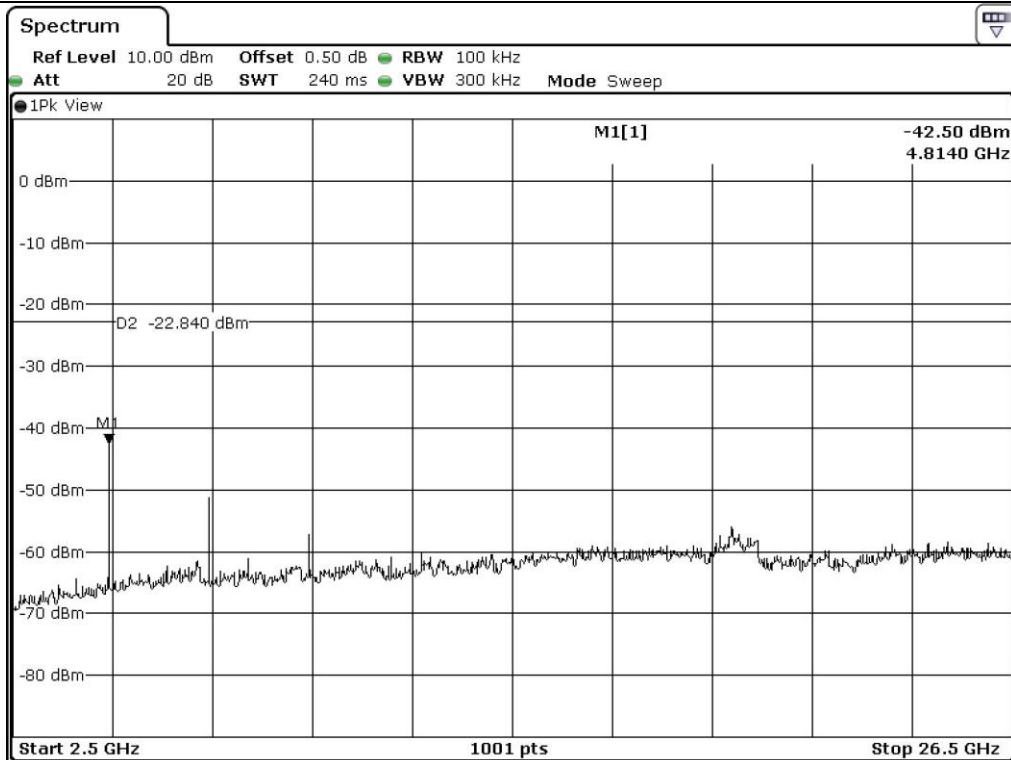


Low Channel

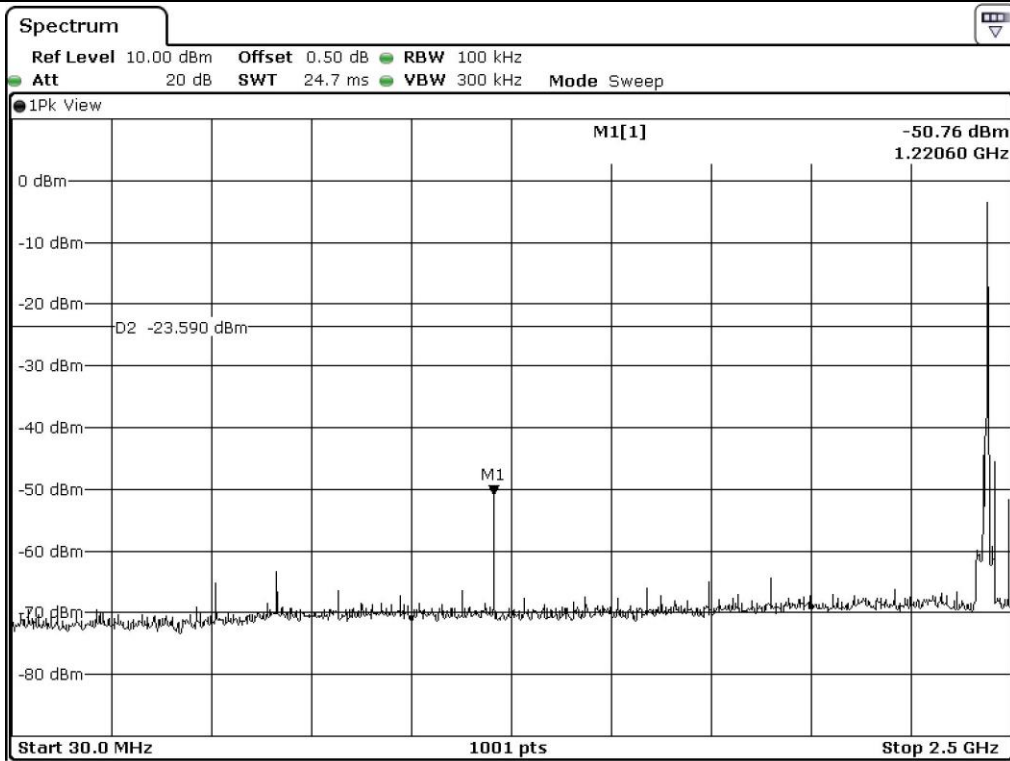


Middle Channel

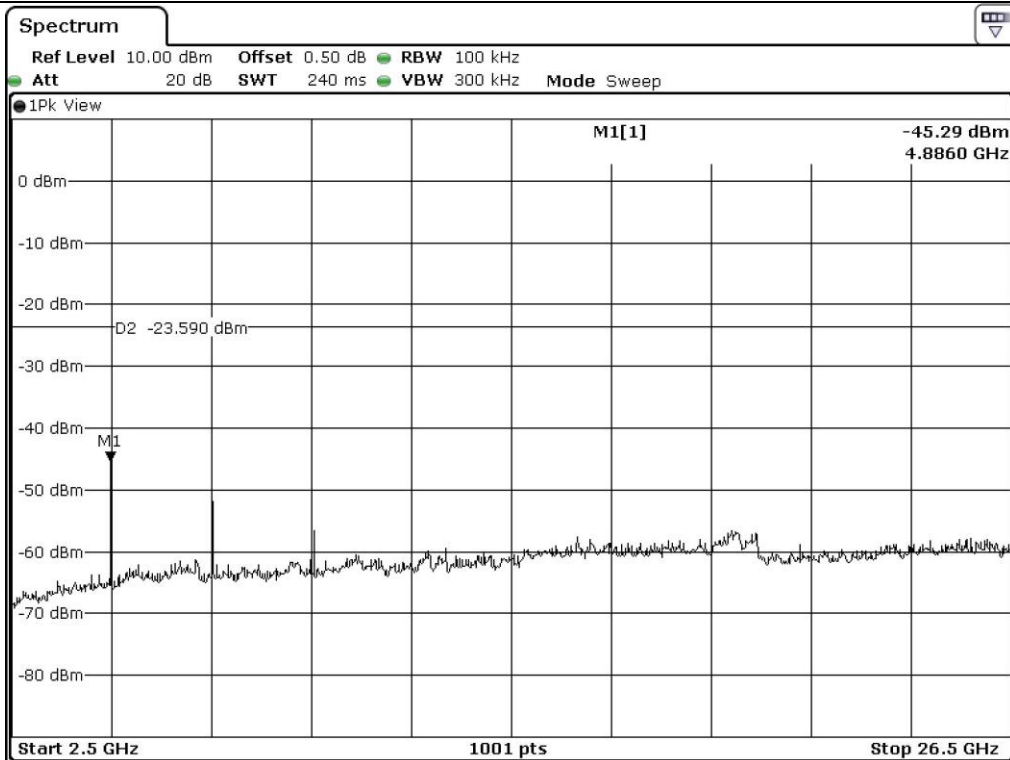

Middle Channel

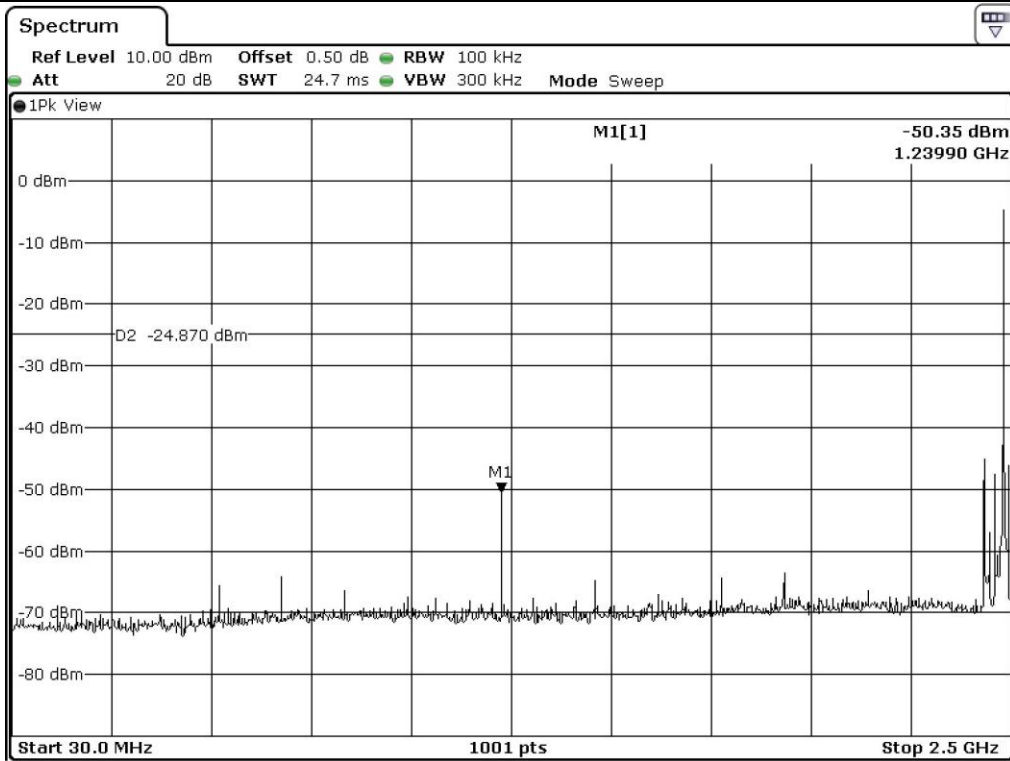

High Channel

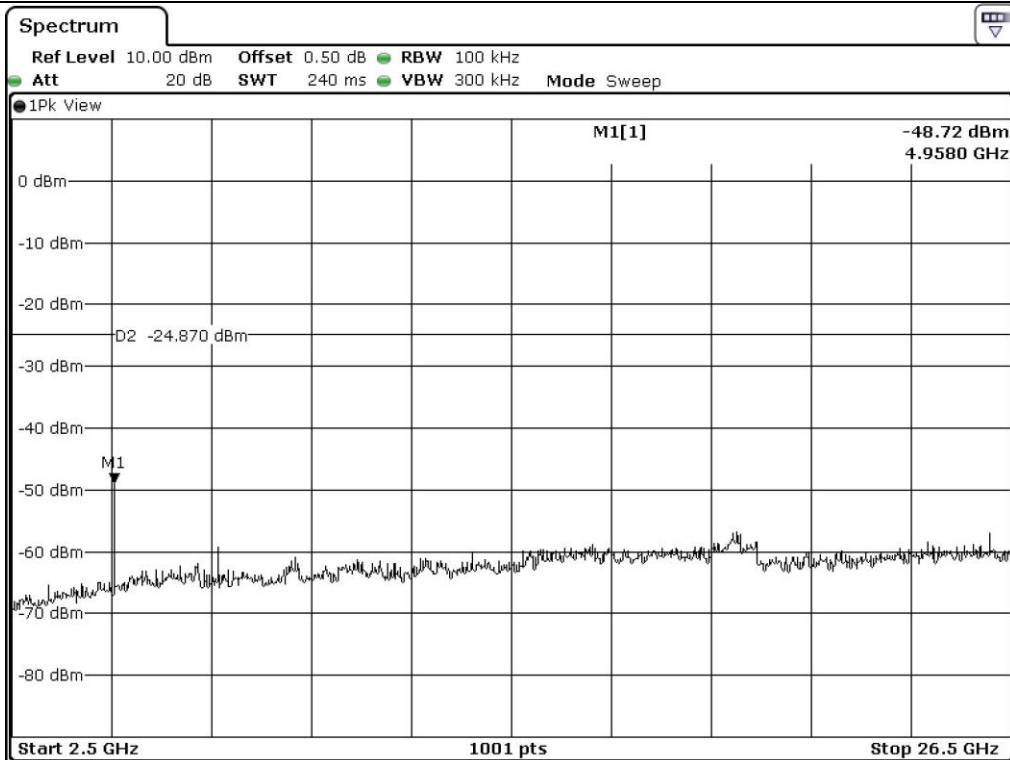

High Channel

## 9.6 Test data for radiated emission

### 9.6.1 Radiated Emission which fall in the Restricted Band and Band Edge

- Test Date : September 12, 2017 ~ September 14, 2017
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2 384.60	52.66	Peak	H	27.30	11.40	42.70	48.66	74.00	25.34
	36.52	Average	H				32.52	54.00	21.48
	45.90	Peak	V				41.90	74.00	32.10
	31.70	Average	V				27.70	54.00	26.30
<b>Test Data for Band Edge</b>									
2 400.00	60.71	Peak	H	27.30	11.40	42.70	56.71	74.00	17.29
	49.33	Average	H				45.33	54.00	8.67
	53.18	Peak	V				49.18	74.00	24.82
	41.40	Average	V				37.40	54.00	16.60
<b>Test Data for High Channel</b>									
2 483.51	51.85	Peak	H	27.30	11.40	42.70	47.85	74.00	26.15
	35.90	Average	H				31.90	54.00	22.10
	43.27	Peak	V				39.27	74.00	34.73
	32.99	Average	V				28.99	54.00	25.01

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



**Tested by: Tae-Ho, Kim / Manager**

**9.6.2 Spurious & Harmonic Radiated Emission**

- . Test Date : September 12, 2017 ~ September 14, 2017
- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
100 kHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 100 %
- . Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	40.15	Peak	H	30.80	16.10	43.80	43.30	74.00	30.75
	33.07	Average	H				36.17	54.00	17.83
	37.56	Peak	V				40.66	74.00	33.34
	29.84	Average	V				32.94	54.00	21.06
<b>Test Data for Middle Channel</b>									
4 880.00	40.52	Peak	H	30.90	16.10	43.80	43.72	74.00	30.28
	34.15	Average	H				37.35	54.00	16.65
	37.91	Peak	V				41.11	74.00	32.89
	33.52	Average	V				36.72	54.00	17.28
<b>Test Data for High Channel</b>									
4 960.00	40.26	Peak	H	31.00	16.10	43.80	43.56	74.00	30.44
	35.49	Average	H				38.79	54.00	15.21
	36.77	Peak	V				40.07	74.00	33.93
	34.28	Average	V				37.58	54.00	16.42

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



**Tested by: Tae-Ho, Kim / Manager**



## 10. PEAK POWER SPECTRAL DENSITY


### 10.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.7 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$  , the video bandwidth is set to 3 times the resolution bandwidth.

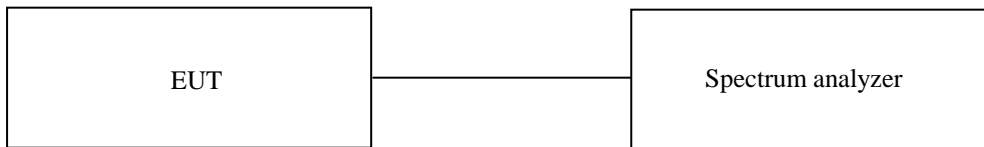

### 10.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


### 10.4 Test data


- Test Date : September 12, 2017 ~ September 14, 2017
- Test Result : Pass
- Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-16.36	8.00	24.36
Middle	2 440.00	-17.87	8.00	25.87
High	2 480.00	-18.87	8.00	26.87


Remark. Margin = Limit – Measured value

**Tested by: Tae-Ho, Kim / Manager**

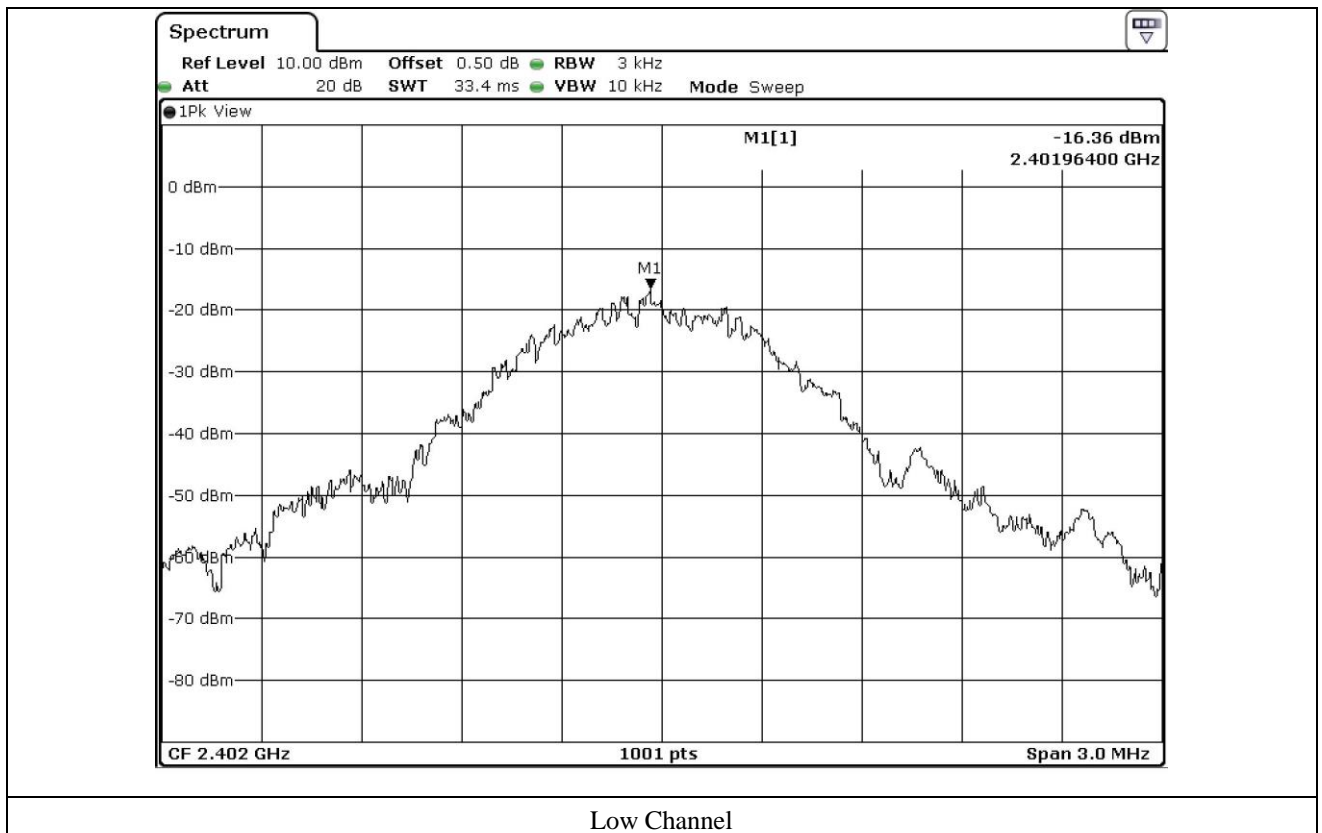

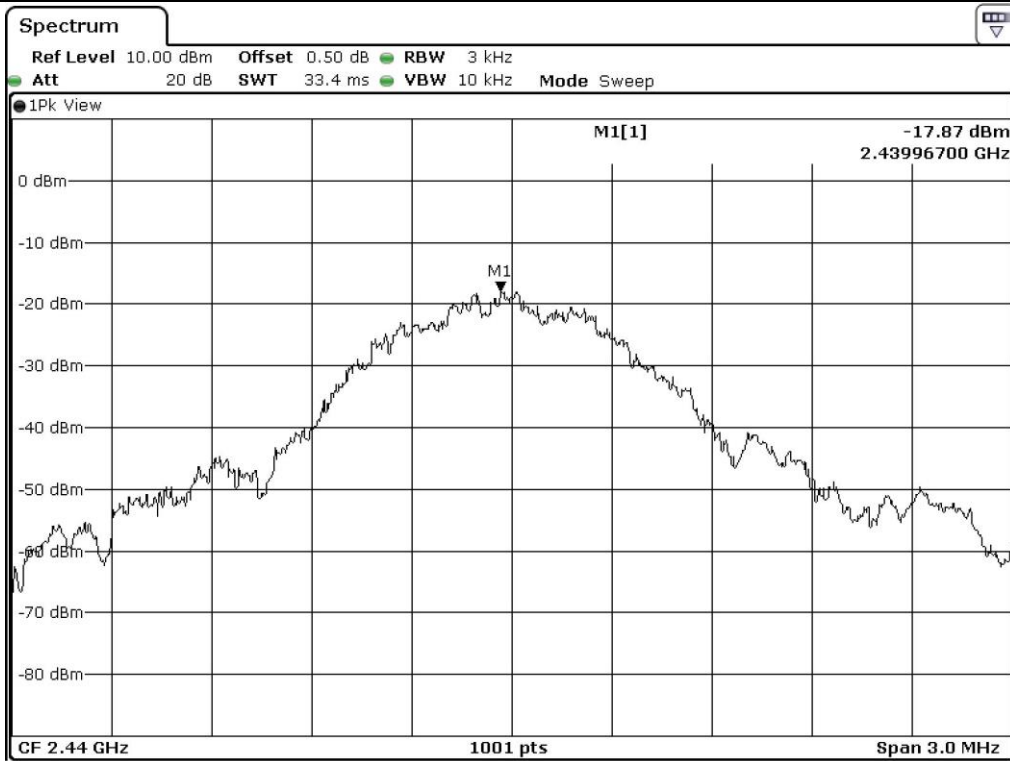

Middle Channel

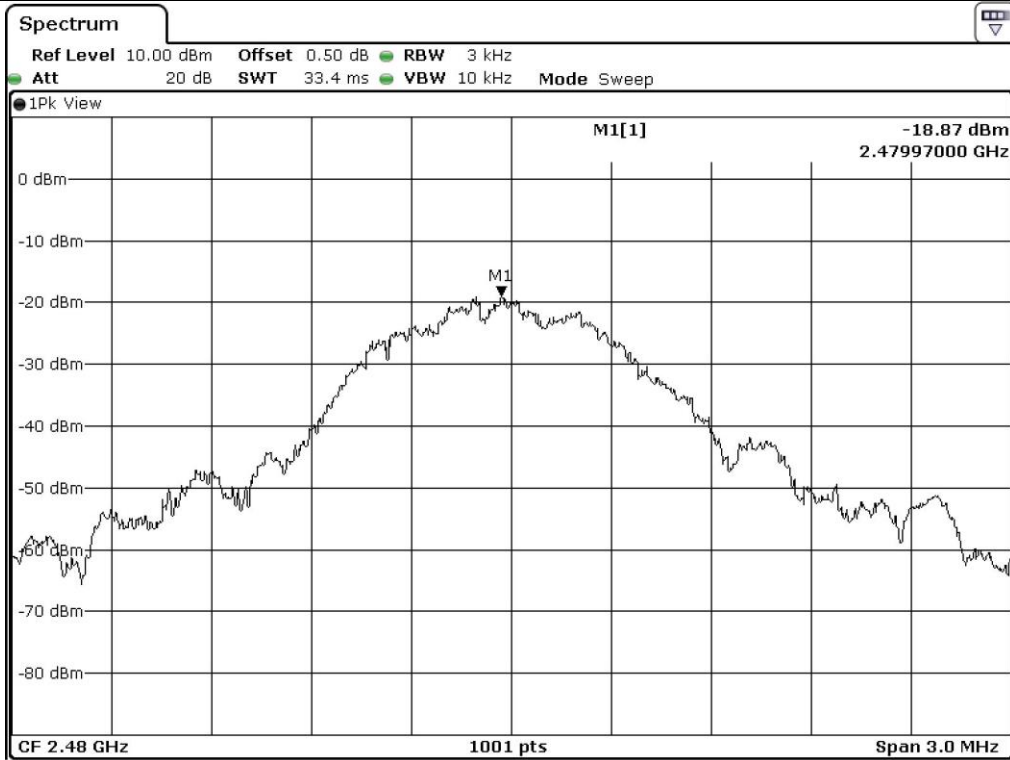

High Channel

## 11. RADIATED EMISSION TEST

### 11.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.9 % R.H.

### 11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 11.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV40	Rohde & Schwarz	Signal Analyzer	101009	Apr. 05, 2017 (1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 06, 2017 (1Y)
■ - 310N	Sonoma Instrument	Pre-Amplifier	312544	Apr. 05, 2017 (1Y)
■ - BBV9718	Schwarzbeck	Amplifier	310	Sep. 01, 2017 (1Y)
■ - DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
■ - MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-421	Apr. 15, 2016 (2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	May 26, 2017 (2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170179	Jul. 28, 2017 (2Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for Transmitting Mode

11.4.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 43.9 % R.H. Temperature: 22.1 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247


Result : PASSED

EUT : BT-410 DONGLE

Date: September 13, 2017


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operating condition : Low Channel

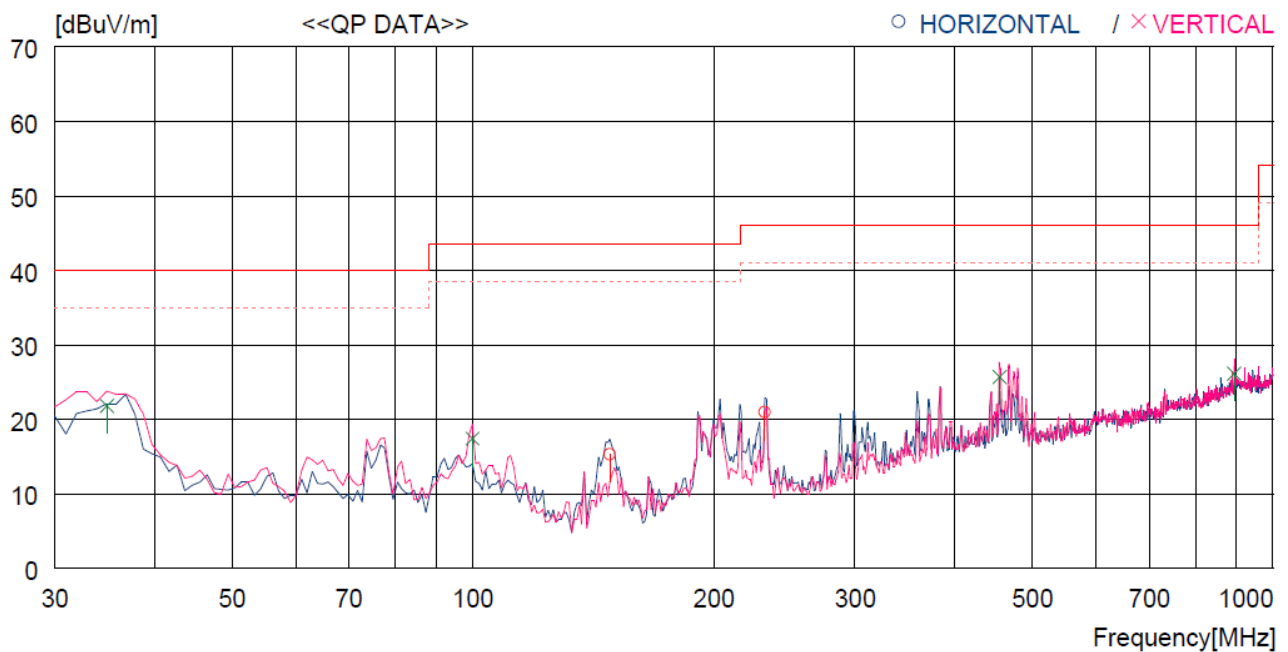


No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	148.340	37.6	7.7	2.9	32.9	15.3	43.5	28.2	200	359
2	231.760	38.8	11.7	3.5	33.1	20.9	46.0	25.1	100	0
----- Vertical -----										
3	34.850	41.2	12.3	1.4	33.1	21.8	40.0	18.2	400	30
4	99.840	36.1	11.9	2.4	33.0	17.4	43.5	26.1	100	128
5	454.861	37.6	16.4	4.9	33.2	25.7	46.0	20.3	100	137
6	894.259	29.7	22.1	7.0	32.7	26.1	46.0	19.9	100	359

Operating condition : Middle Channel

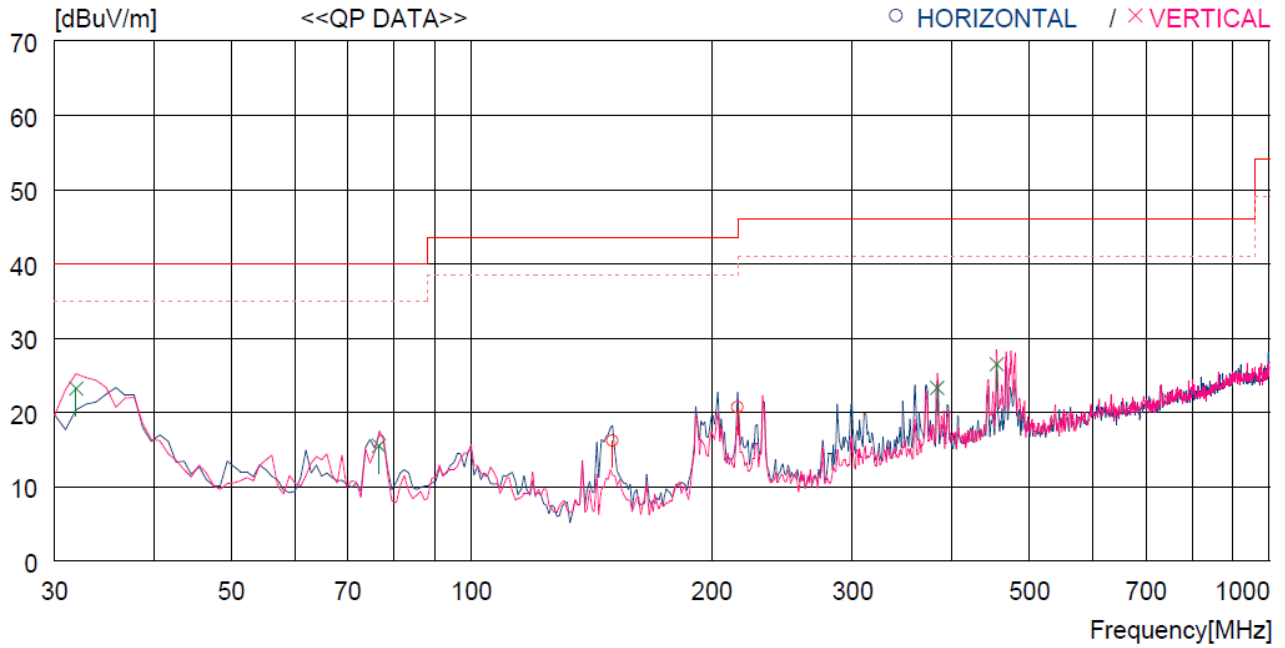

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	150.280	38.5	7.7	2.9	32.9	16.2	43.5	27.3	200	132
2	215.270	39.5	11.0	3.4	33.2	20.7	43.5	22.8	100	101
----- Vertical -----										
3	31.940	43.2	11.7	1.4	33.1	23.2	40.0	16.8	400	254
4	76.560	38.7	7.8	2.1	33.1	15.5	40.0	24.5	400	204
5	383.080	36.6	15.4	4.5	33.2	23.3	46.0	22.7	100	359
6	454.861	38.4	16.4	4.9	33.2	26.5	46.0	19.5	100	128

Operating condition : High Channel

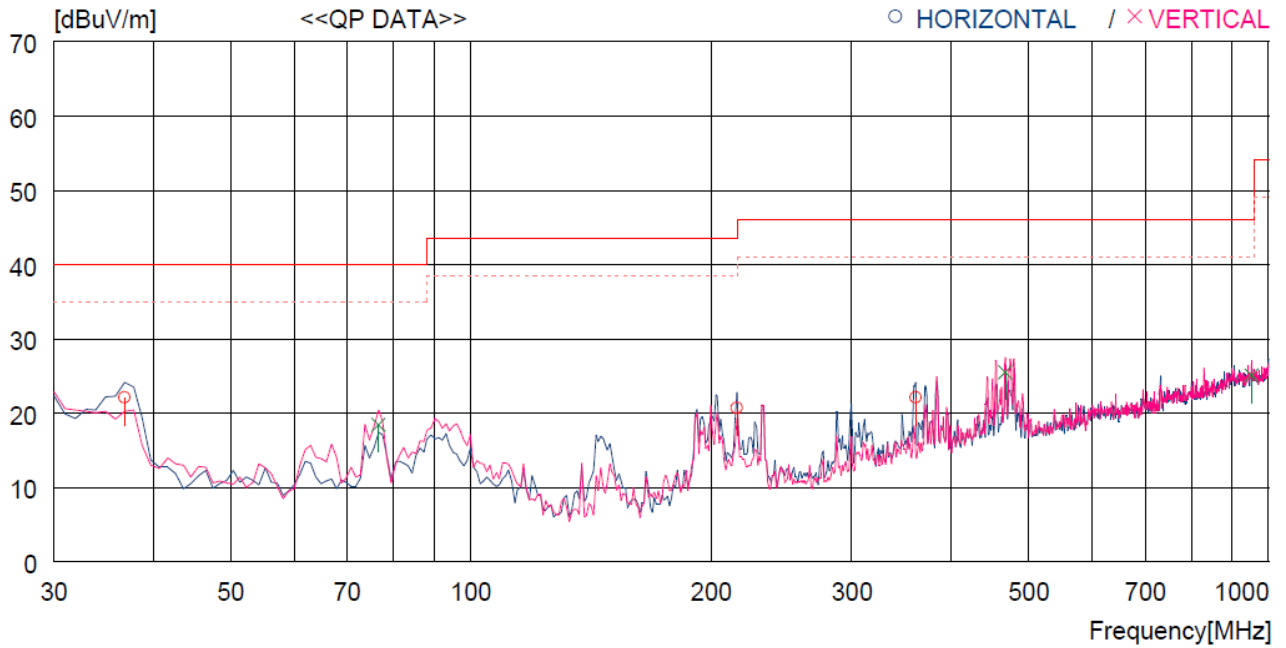

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	36.790	39.7	13.6	1.8	33.0	22.1	40.0	17.9	400	359
2	215.270	38.6	11.2	3.9	33.0	20.7	43.5	22.8	100	0
3	360.770	35.1	15.0	5.1	33.1	22.1	46.0	23.9	100	0
----- Vertical -----										
4	76.560	40.9	8.2	2.4	33.1	18.4	40.0	21.6	400	0
5	467.471	36.5	16.4	5.8	33.2	25.5	46.0	20.5	100	140
6	951.487	26.3	22.4	8.6	32.2	25.1	46.0	20.9	200	0

**Tested by: Tae-Ho, Kim / Manager**

**11.4.2 Test data for Below 30 MHz**

- . Test Date : September 13, 2017
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
Any emissions less than 20 dB below the limit were not observed.									

**11.4.3 Test data for above 1 GHz**

- . Test Date : September 13, 2017
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dB $\mu$ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)
Any emissions less than 20 dB below the limit were not observed.									



**Tested by: Tae-Ho, Kim / Manager**



## 12. CONDUCTED EMISSION TEST

### 12.1 Operating environment

Temperature : 22.1 °C  
 Relative humidity : 43.9 % R.H.

### 12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


### 12.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESPI	Rohde & Schwarz	EMI Test Receiver	101278	Nov. 01, 2016 (1Y)
□ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Apr. 03, 2017 (1Y)
□ - NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 05, 2017 (1Y)
■ - NSLK8126	Schwarzbeck	AMN	8126-404	Apr. 03, 2017 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	Apr. 06, 2017 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	Apr. 07, 2017 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data

- Test Date : September 13, 2017
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

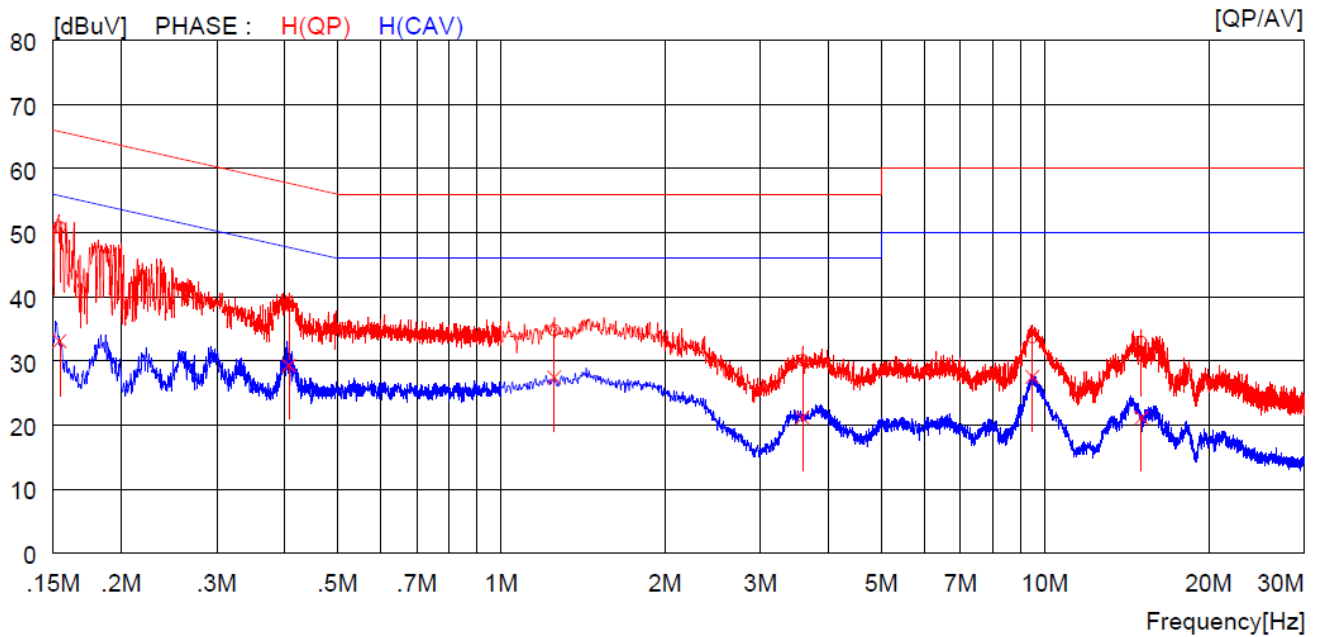

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15400	40.8	----	10.0	50.8	----	65.8	----	15.0	----	H (QP)
2	0.40700	28.6	----	10.0	38.6	----	57.7	----	19.1	----	H (QP)
3	1.25200	24.7	----	10.1	34.8	----	56.0	----	21.2	----	H (QP)
4	3.58000	19.9	----	10.2	30.1	----	56.0	----	25.9	----	H (QP)
5	9.48500	23.2	----	10.4	33.6	----	60.0	----	26.4	----	H (QP)
6	15.05000	22.3	----	10.6	32.9	----	60.0	----	27.1	----	H (QP)
7	0.15400	----	23.1	10.0	----	33.1	----	55.8	----	22.7	H (CAV)
8	0.40700	----	19.3	10.0	----	29.3	----	47.7	----	18.4	H (CAV)
9	1.25200	----	17.3	10.1	----	27.4	----	46.0	----	18.6	H (CAV)
10	3.58000	----	11.0	10.2	----	21.2	----	46.0	----	24.8	H (CAV)
11	9.48500	----	17.1	10.4	----	27.5	----	50.0	----	22.5	H (CAV)
12	15.05000	----	10.6	10.6	----	21.2	----	50.0	----	28.8	H (CAV)

-. Tested Line : NEUTRAL LINE

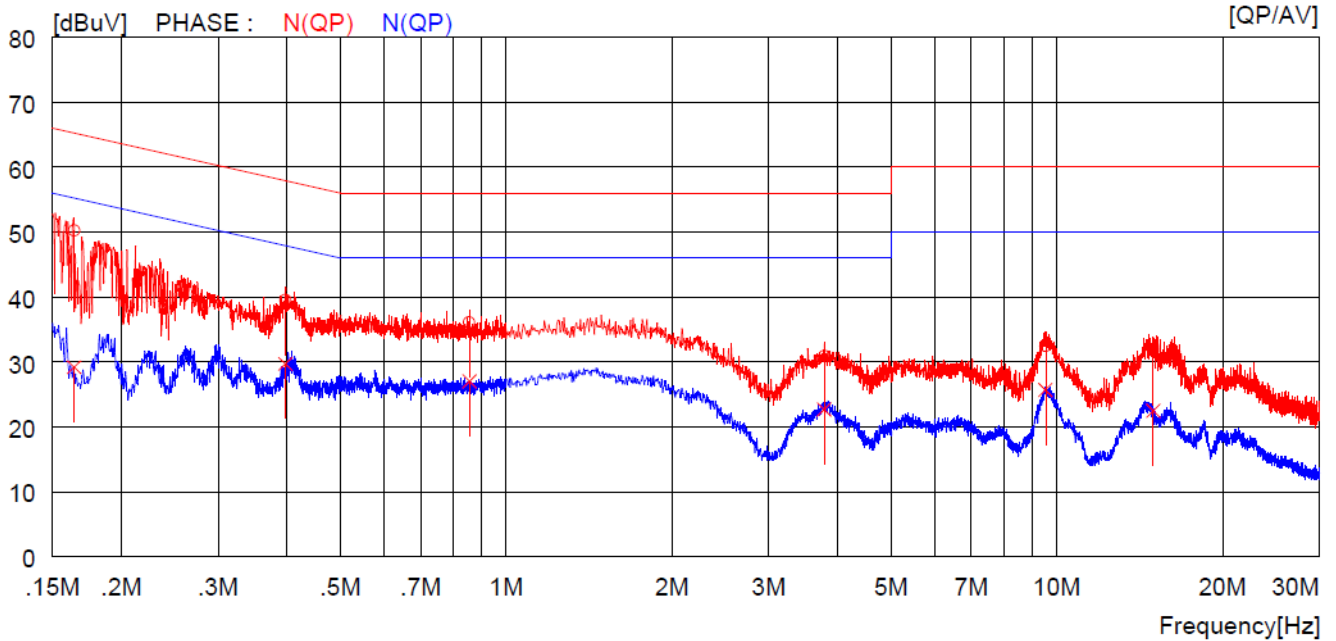

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16400	40.2	----	10.0	50.2	----	65.3	----	15.1	----	N (QP)
2	0.39700	29.5	----	10.0	39.5	----	57.9	----	18.4	----	N (QP)
3	0.85700	26.0	----	10.1	36.1	----	56.0	----	19.9	----	N (QP)
4	3.78400	20.7	----	10.2	30.9	----	56.0	----	25.1	----	N (QP)
5	9.53500	22.0	----	10.4	32.4	----	60.0	----	27.6	----	N (QP)
6	14.96000	21.2	----	10.6	31.8	----	60.0	----	28.2	----	N (QP)
7	0.16400	----	19.2	10.0	----	29.2	----	55.3	----	26.1	N (CAV)
8	0.39700	----	19.7	10.0	----	29.7	----	47.9	----	18.2	N (CAV)
9	0.85700	----	16.9	10.1	----	27.0	----	46.0	----	19.0	N (CAV)
10	3.78400	----	12.5	10.2	----	22.7	----	46.0	----	23.3	N (CAV)
11	9.53500	----	15.3	10.4	----	25.7	----	50.0	----	24.3	N (CAV)
12	14.96000	----	11.9	10.6	----	22.5	----	50.0	----	27.5	N (CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Tae-Ho, Kim / Manager