

North 710, Yihua Building, Shennan Road, Futian District,

Shenzhen, P. R. China

Telephone: 86-755-83187996,

Fax: 86-755-22639141

FCC ID: SOVA101B

Report No.: FCC11-ITE012501

Page: 1 of 14

FCC REPORT

Application No.: FCC11-RTE01041ITE

Applicant: ARCHOS S.A.

Address of Applicant: 12 Rue Ampere ZI 91430 Igny, France

FCC ID: SOVA101B

Equipment Under Test (EUT):

EUT Name: A10HT Internet Tablet

Item No.: A101B

Serial No.: Not supplied by client

Standards: FCC PART 15 Subpart B: 2008

Date of Receipt: 14 January. 2011

Date of Test: 17 January. 2011 to 18 January. 2011

Date of Issue: 25 January. 2011

Test Result : PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kavin Yu Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO Technology Approvals or testing done by EBO Technology Approvals in connection with, distribution or use of the product described in this report must be approved by EBO Technology Approvals in writing. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC11-ITE012501

Page: 2 of 14

1 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Conducted Emissions	FCC PART 15:2008	Section 15.107	PASS
Radiated Emission	FCC PART 15:2008	Section 15.109	PASS



Report No.: FCC11-ITE012501

Page: 3 of 14

2 Contents

		Pa	ge
1	TEST	SUMMARY	2
2	CONT	TENTS	2
_	CONT	I EN I O	3
3	GENE	ERAL INFORMATION	4
	3.1	CLIENT INFORMATION	Δ
		GENERAL DESCRIPTION OF E.U.T.	
		TEST LOCATION	
		TEST SUPPORTING SYSTEM DETAILS	
	3.5	TEST FACILITY	5
		MEASUREMENT UNCERTAINTY	
	3.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
4	FOUII	PMENT USED DURING TEST	6
•	LQUII	MEIT	•••••
5	TEST	RESULTS	7
	5.1 (CONDUCTED EMISSIONS	7
		Test Setup	
	5.1.2		
	5.1.3		
	5.2 F	RADIATED EMISSIONS	
	5.2.1		
	5.2.2	•	
	5.2.3	Measurement Data	



Report No.: FCC11-ITE012501

Page: 4 of 14

3 General Information

3.1 Client Information

Applicant: ARCHOS S.A.

Address of Applicant: 12 Rue Ampere ZI 91430 Igny, France

Factory: Shenzhen Shenchuang Electronics Co.,Ltd

Address of Factory: 7th floor, West Tower, Hengfanglaobing Industrial Park, Xingye

Road, Xixiang Town, Bao'an District, Shenzhen

3.2 General Description of E.U.T.

Equipment Under Test: Digital Device

Trade Name: ARNOVA

Type Designation: A10HT Internet tablet

Model Number: A101B

AC Adapter

Model:KSAS0100500200D5
Power Supply:

Input:AC 100-240V 50/60Hz 0.4A

Output:DC 5.0V 2.0A

Date of Test: January 17-24, 2011

3.3 Test Location

All tests were sub-contracted to:

ATC Lab Co., Ltd (Guangdong, China).

205#, Yingfeng Building, Ronggu Rd,Foshan, Guangdong, China (528305)

Phone:0757-23612690 Fax:0757-23612537

3.4 Test Supporting System Details

Equipment Name	Modle No.	Manufacturer	FCC Status
Notebook Computer	nc4000	HP	DOC
Monitor	TFT1780PS	AOV	DOC
Keyboard	JME7053	Lenovo	DOC
Mouse	N/A	Lenovo	DOC



Report No.: FCC11-ITE012501

Page: 5 of 14

3.5 Test Facility

FCC-Registration No.: 415467

ATC Lab Co., Ltd (Guangdong, China) EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 415467. Listing date October 10, 2008.

3.6 Measurement Uncertainty

of +/- 4.5 dB for Radiated Emissions of +/- 2.3 dB for Conducted Emissions

3.7 Other Information Requested by the Customer

None



Report No.: FCC11-ITE012501

Page: 6 of 14

4 Equipment Used during Test

Conducted Emission							
No.	Test Equipment	Manufacturer	Mo del No.	Serial No.	Cal. Due Date		
GAL-EMC002	Shielding Room	ETS	N/A	N/A	2011-05-18		
GAL-EMC003	Receiver	SCHAFFNER	SMR4503	11725	2011-07-08		
GAL-EMC005	Line impedance stabilization network	EMCO	4825/2	1161	2011-07-08		
GAL-EMC098	Line impedance stabilization network	EMCO	3810/2	2516	2011-07-08		
RF in Chambe	r						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Due Date		
GAL-EMC001	Semi-anechoic Chamber	ETS	N/A	N/A	2011-05-25		
GAL-EMC003	Receiver	SCHAFFNER	SMR4503	11725	2011-07-08		
GAL-EMC007	Double-ridged Wave guide horn	ETS	3115	6587	2011-08-02		
GAL-EMC008	Microwave system amplifier (0.5G-26.5G)	Agilent	83017A	MY39500438	2011-07-08		
GAL-EMC017	Biconilog Antenna	ETS	3142C	00042672	2011-09-26		
GAL-EMC055	Band-pass Filter	Micro-Tronic	BRM50702	S/N-030	2011-11-09		
GAL-EMC056	Spectrum Analyzer 9KHz-30GHz	R&S	FSP30	100755	2011-11-02		



Report No.: FCC11-ITE012501

Page: 7 of 14

5 Test Results

5.1 Conducted Emissions

Test Requirement: FCC Part15 B Section 15.107

Test Method: ANSI C63.4:2003 Frequency Range: 150KHz to 30MHz

Class/Severity: Class B

Detector: Peak for pre-scan (9 kHz resolution bandwidth)

Test Mode: USB mode (Connect the EUT with Notebook computer ,and exchange

data between them)

Test Voltage: 120Vac, 60Hz
Test Date: 17 January. 2011

Temperature: 21° C Humidity: 48%

Limit: (a) Except for Class A digital devices, for equipment that is designed to

be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power lineon any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in thefollowing table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The

lower limit applies atthe band edges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)			
	Quasi-peak	Average		
0.15-0.5	66 to 56 *	56 to 46 *		
0.5-5	56	46		
5-30	60	50		


^{*} Decreases with the logarithm of the frequency.



Report No.: FCC11-ITE012501

Page: 8 of 14

5.1.1 Test Setup

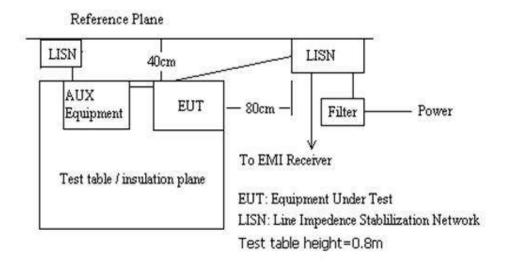

5.1.2Test Procesure

The Device was connected to the artifical main network via AC adapter and connect with Notebook computer(refer to section 3.4 for details), And test the EUT with actived in USB mode.

5.1.3Measurement Data

Measure the maximised peak emissions from the EUT for both the Live and Neutral Lines. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Frequency	Lino	Measured	QP Limit	Measured	AV Limit	Over Limit	Over Limit
(MHz)	Line	QP (dBuV)	(dBuV)	AV (dBuV)	(dBuV)	QP	AV
0.1950	L	43.60	63.76	26.60	53.76	-20.16	-27.16
0.2100	L	56.60	63.15	41.00	53.15	-6.55	-12.15
0.3050	L	45.00	60.07	28.20	50.07	-15.07	-21.87
2.3600	L	42.60	56.00	29.60	46.00	-13.40	-16.40
7.9300	L	45.90	60.00	36.00	50.00	-14.10	-14.00
8.2750	L	46.50	60.00	36.90	50.00	-13.50	-13.10
0.2100	Ν	49.20	63.15	34.30	53.15	-13.95	-18.85
0.4250	N	39.50	57.34	27.80	47.34	-17.84	-19.54
0.7450	N	38.40	56.00	23.90	46.00	-17.60	-22.10
1.7150	Ν	41.10	56.00	28.50	46.00	-14.90	-17.50
4.5000	Ν	39.50	56.00	29.50	46.00	-16.50	-16.50
11.6650	N	41.90	60.00	32.00	50.00	-18.10	-18.00




Report No.: FCC11-ITE012501

Page: 9 of 14

Live Line Scan Graph

EUT / Ser.No.		A10HT	
Frequency Rang	je(s)		Range 1
Start Frequency			150 kHz
Stop Frequency			30 MHz
Step Frequency			5 kHz
Attenuator			Auto
Detector	(Pre)		AV CISPR
IF Bandwidth	(Pre)		9 kHz
Measure Time	(Pre)		10 ms
Detector	(Final)		QP
IF Bandwidth	(Final)		9 kHz
Measure Time	(Final)		1 s
Sub Ranges	(Final)		20

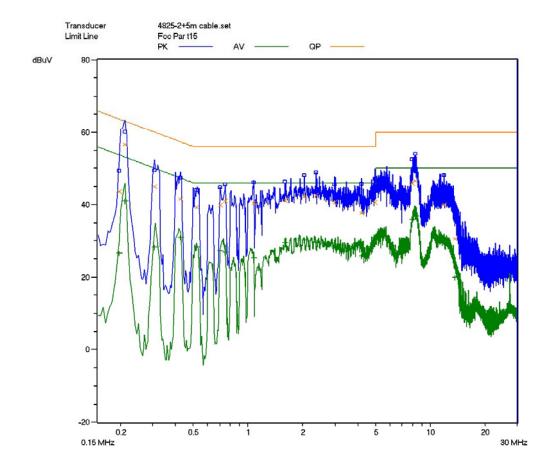




Report No.: FCC11-ITE012501

Page: 10 of 14

Nuetral Line Scan Graph

EUT / Ser.No.		A10HT	
Frequency Rang	ge(s)		Range 1
Start Frequency			150 kHz
Stop Frequency	,		30 MHz
Step Frequency	,		5 kHz
Attenuator			Auto
Detector	(Pre)		AV CISPR
IF Bandwidth	(Pre)		9 kHz
Measure Time	(Pre)		10 ms
Detector	(Final)		QP
IF Bandwidth	(Final)		9 kHz
Measure Time	(Final)		1 s
Sub Ranges	(Final)		20

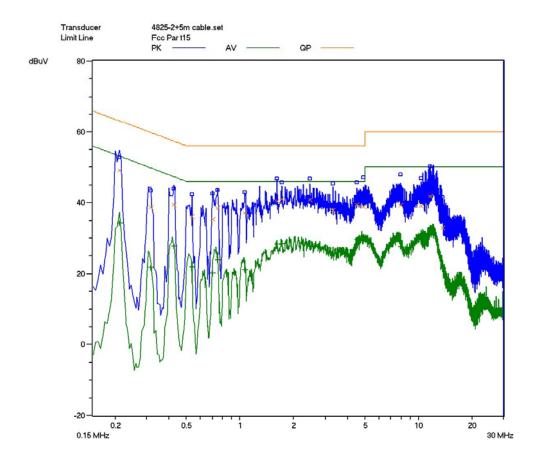



Report No.: FCC11-ITE012501

Page: 11 of 14

5.2 Radiated Emissions

Test Requirement: FCC Part15 B Section 15.109

Test Method: ANSI C63.4:2003 **Frequency Range:** 30MHz to 5GHz

Class/Severity: Class B

Detector: QP Detector(RBW=120kHz,VBW=300kHz)for 30 to 1000 MHz RE testing

Peak Detector(RBW=1MHz,VBW=3MHz) for 1 to 25 GHz RE Peak value test Peak Detector(RBW=1MHz, VBW=10Hz) for 1 to 25 GHz RE AV value test

Test Mode: USB mode (Connect the EUT with PC ,and exchange data between them)

Test Voltage: 120Vac, 60Hz
Test Date: 18 January. 2011

Temperature: 22° C Humidity: 47%

Limit: Except for Class A digital devices, the field strength of radiated emissions

from unintentional radiators at a distance of 3 meters shall not exceed the

following values:

Frequency of Emission	Field Stre	Field Strength		
(MHz)	(microvolts/meter)	dB (μV/m)		
30 - 88	100	40(QP)		
88 - 216	150	43.5(QP)		
216 - 960	200	46(QP)		
960-1000	500	54(QP)		
Above 1000	500	54(AV)		
		74(PK)		



Report No.: FCC11-ITE012501

Page: 12 of 14

5.2.1 Test Setup

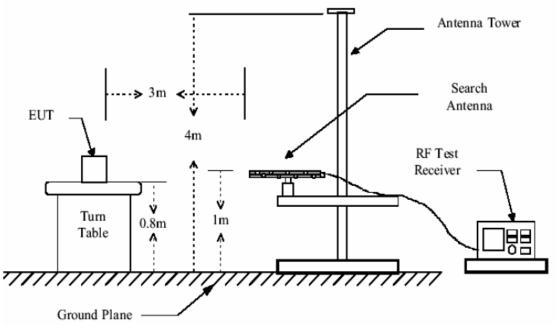


Figure1: 30MHz to 1GHz radiated emissions test setup

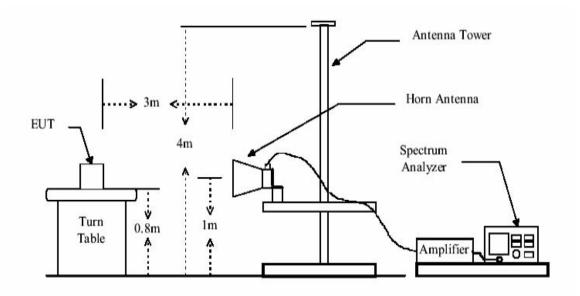


Figure 2: Above 1GHz radiated emissions test setup



Report No.: FCC11-ITE012501

Page: 13 of 14

5.2.2Test Prosesure

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until all frequency measured were complete.

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain

5.2.3Measurement Data

An initial pre-scan was performed in peak detection mode. Peak measurement was performed at the frequencies with maximized peak emission were detected.

Radiated Emission below 1GHz

Frequency	Antenna	Detector	Reading	Ant./CL/	Measured	QP Limit	Over
(MHz)	Polarity	Mode	(dBuV)	Amp.CF	Level	(dBuV/m)	Limit(dB)
				(dB)	(dBuV/m)		
168.820	Н	QP	15.38	10.22	25.60	40.00	-14.40
264.500	Н	QP	19.71	14.09	33.80	43.50	-9.70
330.800	Н	QP	17.60	15.07	32.67	46.00	-13.33
440.800	Н	QP	13.71	17.79	31.50	46.00	-14.50
799.840	Н	QP	16.41	22.59	39.00	46.00	-7.00
844.560	Н	QP	8.38	23.12	31.50	46.00	-14.50
32.920	V	QP	10.83	18.07	28.90	40.00	-11.10
256.800	V	QP	18.38	14.20	32.58	43.50	-10.92
396.800	V	QP	19.71	16.17	35.88	46.00	-10.12
512.000	V	QP	18.60	20.30	38.90	46.00	-7.10
586.000	V	QP	13.72	20.90	34.62	46.00	-11.38
797.448	V	QP	12.90	22.90	35.80	46.00	-10.20



Report No.: FCC11-ITE012501

Page: 14 of 14

Radiated Emission Above 1GHz

Frequency	Antenna	Detector	Reading	Ant./CL/	Measured	PK Limit	Over
(MHz)	Polarity	Mode	(dBuV)	Amp.CF	Level	(dBuV/m)	Limit(dB)
				(dB)	(dBuV/m)		
1324.000	Н	PK	56.40	-2.80	53.60	74.00	-20.40
1510.000	Н	PK	54.28	-2.60	51.68	74.00	-22.32
1788.000	Н	PK	52.72	-2.50	50.22	74.00	-23.78
2408.000	Н	PK	49.16	-0.54	48.62	74.00	-25.38
2650.000	Н	PK	44.97	-0.42	44.55	74.00	-29.45
3468.000	Н	PK	46.08	3.68	49.76	74.00	-24.24
1044.000	V	PK	53.26	-3.00	50.26	74.00	-23.74
1220.000	V	PK	51.13	-2.80	48.33	74.00	-25.67
1318.000	V	PK	52.32	-2.80	49.52	74.00	-24.48
1608.000	V	PK	51.50	-2.50	49.00	74.00	-25.00
1700.000	V	PK	50.87	-2.50	48.37	74.00	-25.63
2078.000	V	PK	47.66	-1.60	46.06	74.00	-27.94

Frequency	Antenna	Detector	Reading	Ant./CL/	Measured	AV Limit	Over
(MHz)	Polarity	Mode	(dBuV)	Amp.CF	Level	(dBuV/m)	Limit(dB)
				(dB)	(dBuV/m)		
1324.000	Н	AV	39.69	-2.80	36.89	54.00	-17.11
1510.000	Н	AV	36.85	-2.60	34.25	54.00	-19.75
1788.000	Н	AV	39.38	-2.50	36.88	54.00	-17.12
2408.000	Н	AV	34.81	-0.54	34.27	54.00	-19.73
2650.000	Н	AV	34.07	-0.42	33.65	54.00	-20.35
3468.000	Н	AV	30.35	3.68	32.87	54.00	-21.13
1044.000	V	AV	37.56	-3.00	34.56	54.00	-19.44
1220.000	V	AV	35.09	-2.80	32.29	54.00	-21.71
1318.000	V	AV	37.08	-2.80	34.28	54.00	-19.72
1608.000	V	AV	36.06	-2.50	33.56	54.00	-20.44
1700.000	V	AV	35.50	-2.50	33.00	54.00	-21.00
2078.000	V	AV	35.47	-1.60	33.87	54.00	-20.13