

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Archos S.A.

12 rue Ampère 91430 Igny France

E.U.T.: Archos smart home tablet

Model Name: ACH70

Brand Name: ARCHOS

FCC ID: SOVACH70

Report Number: NTC1311605F

Test Date(s): November 29, 2013 to January 10, 2014

Report Date(s): January 10, 2014

Prepared by

Dongguan Nore Testing Center Co., Ltd.

Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road,
Nancheng District, Dongguan, Guangdong, China.

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Chris Pan / Engineer



Shun Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	7
1.3 TEST METHODOLOGY	7
1.4 EQUIPMENT MODIFICATIONS	7
1.5 SUPPORT DEVICE	7
1.6 TEST FACILITY AND LOCATION	7
1.7 SUMMARY OF TEST RESULTS	8
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION	9
2.2 SPECIAL ACCESSORIES	9
2.3 DESCRIPTION OF TEST MODES	9
2.4 EUT EXERCISE	9
3. CONDUCTED EMISSIONS TEST	10
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
3.2 TEST CONDITION	10
3.3 MEASUREMENT RESULTS	10
4. MAX. CONDUCTED OUTPUT POWER	15
4.1 MEASUREMENT PROCEDURE	15
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
4.3 MEASUREMENT RESULTS	16
5. 6DB&20DB BANDWIDTH	25
5.1 MEASUREMENT PROCEDURE	25
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
5.3 MEASUREMENT RESULTS	25
6. POWER SPECTRAL DENSITY	38
6.1 MEASUREMENT PROCEDURE	38
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	38
6.3 MEASUREMENT RESULTS	38
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	47
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	47
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	47
7.3 MEASUREMENT RESULTS	47



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS 64

8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 64

8.2 MEASUREMENT PROCEDURE 65

8.3 LIMIT..... 66

8.4 MEASUREMENT RESULTS 67

9. ANTENNA APPLICATION 77

9.1 ANTENNA REQUIREMENT 77

9.2 MEASUREMENT RESULTS..... 77

10. TEST EQUIPMENT LIST..... 78

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This is a home tablet computer, which with WIFI, BLE, RF switch, etc., functions. It's powered by DC 5V come from external adapter or DC 3.7V internal Li-ion battery. For more details features, please refer to User's Manual.

Manufacturer : Archos S.A.
Address : 12 rue Ampère 91430 Igny France

Factory : Luckstar(Shenzhen) Digital Technology Co., Ltd.
Address : 21st FL, Fuchun Orient Bldg, Shennan Ave. 7006#,
Shenzhen 518040, P.R.C

For BT Function

Frequency : 2402-2480MHz
Bluetooth Version : Bluetooth 4.0 Version
Modulation : GFSK
Number of Channel : 40
Channel space : 2MHz
Antenna Type : Integral
Antenna Gain : 2.0dBi (Declaration by factory)
Power Supply : DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Note : N/A

WIFI Function

Frequency: : 2412MHz~2462MHz(802.11b/802.11g/802.11n(HT20))
Number of Channel : 11
Channel space : 5MHz
Antenna Type : Integral
Antenna Gain : 2.0dBi (Declaration by factory)
Modulation Type : CCK, DQPSK, DBPSK for 802.11b
: OFDM for 802.11g/n
Power Supply : DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Model name : ACH70
Note : N/A

For RF Switch Function

Frequency: : 433.92MHz
Number of Channel : 1
Antenna Type : PCB
Antenna Gain : 0.5dBi (Declaration by factory)
Modulation Type : ASK
DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Power Supply : Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Model name : ACH70
Note : N/A

Channel List

802.11 b/g/n(HT20)	
Channel	Frequency MHz
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)	
Channel	Frequency MHz
1	2412
6	2437
11	2462

BLE	
Channel	Frequency MHz
1	2402
20	2442
40	2480

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SOVACH70 filing to comply with Section 15.247 of the FCC Part 15(2012), Subpart C Rule.

1.3 Test Methodology

AC mains line-conducted, antenna port conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003) and KDB558074(v03). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 46405-9743.

Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207 (a)	AC Power Conducted Emission	Compliance
§15.247(b)(3)	Max. Conducted Output Power	Compliance
§15.247(a)(2)	6dB Bandwidth	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	Compliance
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	Compliance
§15.203	Antenna Requirement	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes

The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode.

For BT Mode, the Lowest, middle and highest channel were chosen for testing, and modulation type GFSK was tested.

For WIFI Mode, the Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested.


But only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

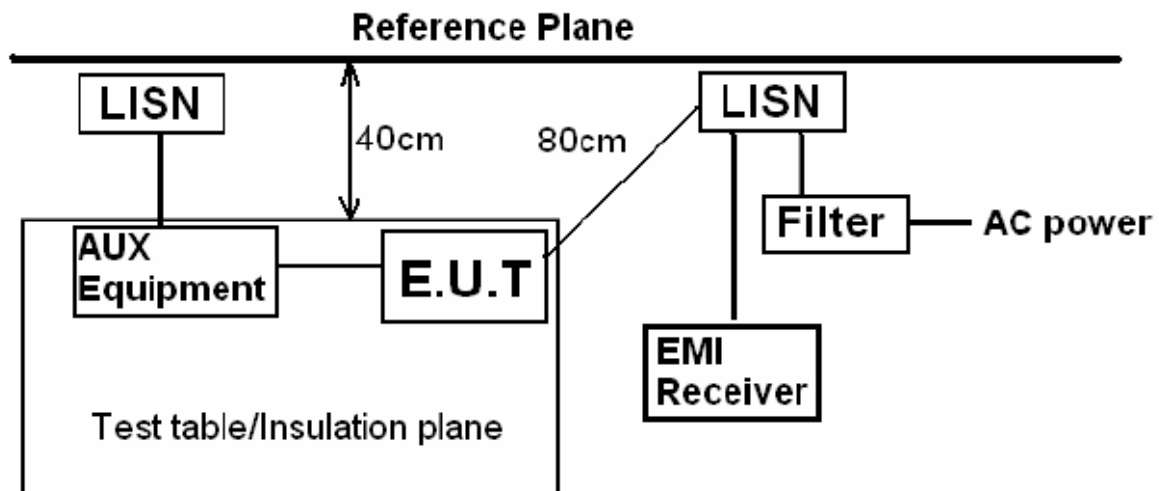

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: BT Mode, WIFI Mode

3.3 Measurement Results

For BT Mode:
Please refer to following plots.


For WIFI Mode:
Please refer to following the worst case (802.11g) plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-1-5 19:34:45

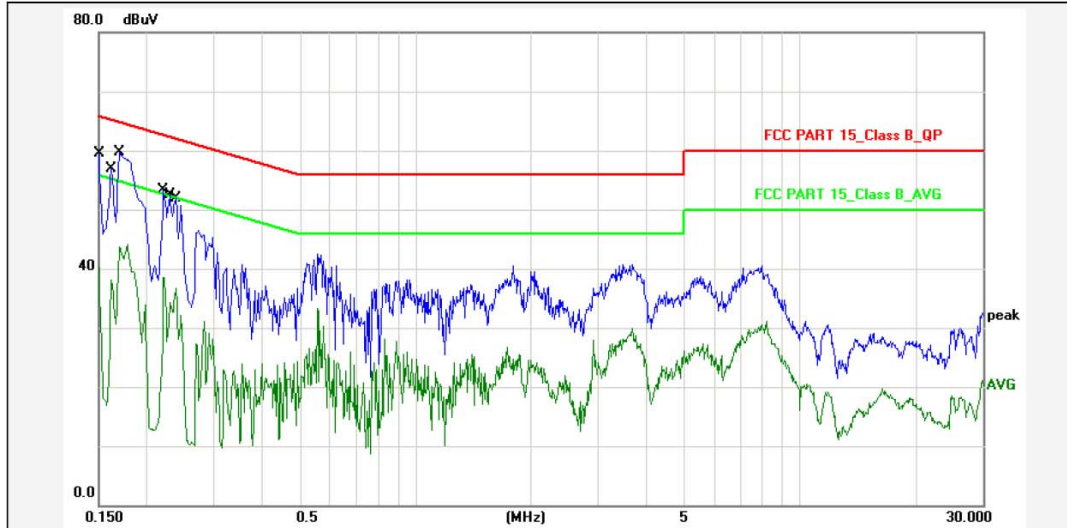

Report No.: ACH70

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Archos S.A.

Temp.()/Hum.(%): 21(C) / 47 %

Product: Archos smart home tablet

Power Rating: AC 120V/60Hz

Model No.: ACH70

Test Engineer: Sance

Test Mode: WIFI Mode (802.11g)

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	45.90	56.70	65.99	-9.29	QP	P	
2	0.1500	10.80	27.60	38.40	55.99	-17.59	AVG	P	
3	0.1620	10.80	43.00	53.80	65.36	-11.56	QP	P	
4	0.1620	10.80	25.40	36.20	55.36	-19.16	AVG	P	
5	0.1700	10.80	45.80	56.60	64.96	-8.36	QP	P	
6	0.1700	10.80	30.90	41.70	54.96	-13.26	AVG	P	
7	0.2220	10.80	39.50	50.30	62.74	-12.44	QP	P	
8	0.2220	10.80	25.60	36.40	52.74	-16.34	AVG	P	
9	0.2300	10.80	38.60	49.40	62.45	-13.05	QP	P	
10	0.2300	10.80	21.50	32.30	52.45	-20.15	AVG	P	
11	0.2380	10.80	38.10	48.90	62.16	-13.26	QP	P	
12	0.2380	10.80	23.90	34.70	52.16	-17.46	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:Home Table\#5


Page: 1



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-1-5 19:37:14

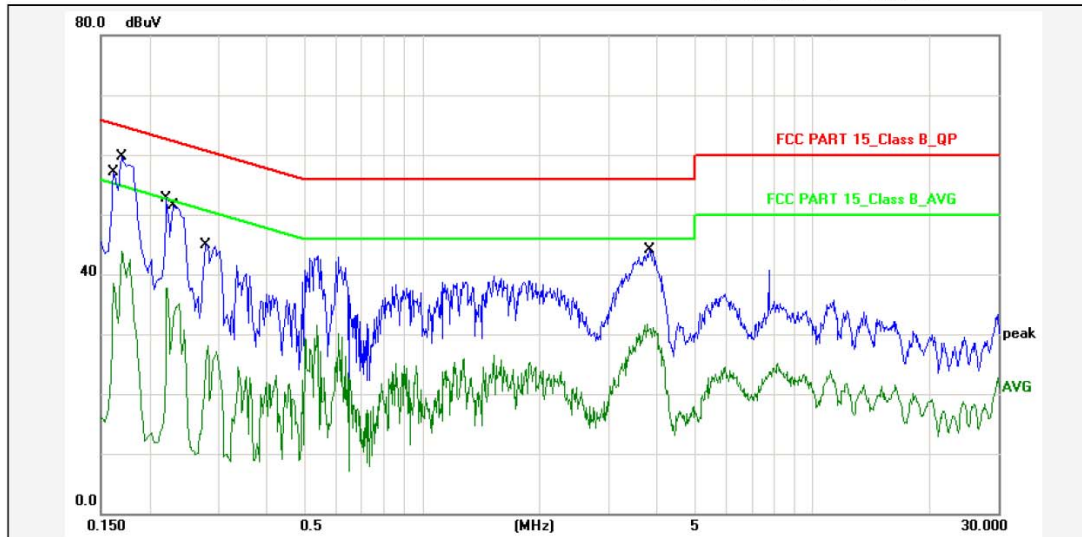

Report No.: ACH70

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Archos S.A.

Temp.()/Hum.(%): 21(C) / 47 %

Product: Archos smart home tablet

Power Rating: AC 120V/60Hz

Model No.: ACH70

Test Engineer: Sance

Test Mode: WIFI Mode (802.11g)

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1620	10.80	43.30	54.10	65.36	-11.26	QP	P	
2	0.1620	10.80	25.60	36.40	55.36	-18.96	AVG	P	
3	0.1700	10.80	45.90	56.70	64.96	-8.26	QP	P	
4	0.1700	10.80	31.00	41.80	54.96	-13.16	AVG	P	
5	0.2220	10.80	38.80	49.60	62.74	-13.14	QP	P	
6	0.2220	10.80	24.80	35.60	52.74	-17.14	AVG	P	
7	0.2300	10.80	37.70	48.50	62.45	-13.95	QP	P	
8	0.2300	10.80	22.40	33.20	52.45	-19.25	AVG	P	
9	0.2779	10.80	31.10	41.90	60.88	-18.98	QP	P	
10	0.2779	10.80	15.30	26.10	50.88	-24.78	AVG	P	
11	3.8340	10.80	30.40	41.20	56.00	-14.80	QP	P	
12	3.8340	10.80	18.80	29.60	46.00	-16.40	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:Home Table\#6


Page: 1



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-1-5 17:42:48

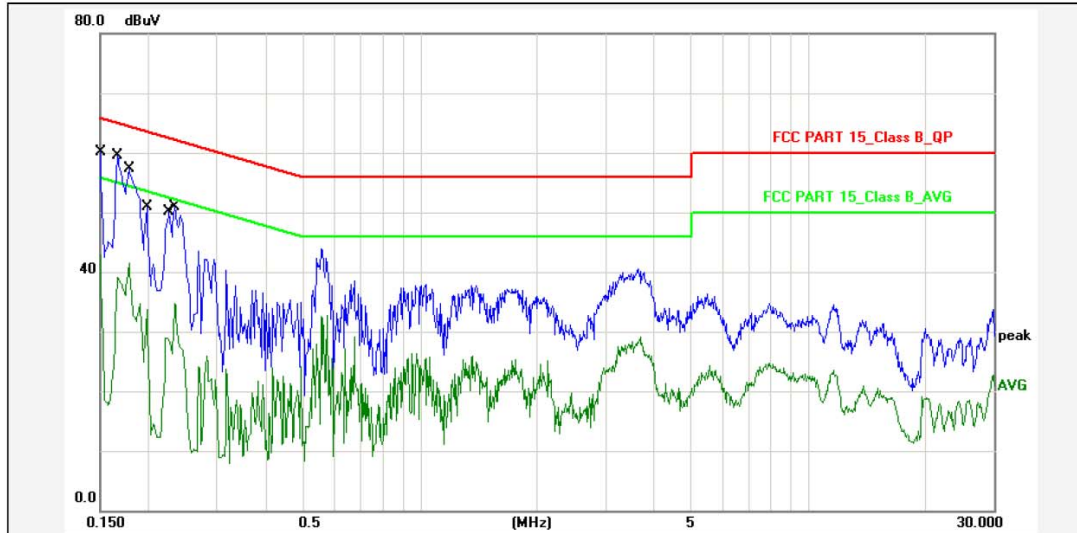

Report No.: ACH70

Test Standard: FCC PART 15_Class B_QP

Test Item: Conducted Emission

Phase: N

Applicant: Archos S.A.

Temp.()/Hum.(%): 21(C) / 47 %

Product: Archos smart home tablet

Power Rating: AC 120V/60Hz

Model No.: ACH70

Test Engineer: Sance

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	46.50	57.30	65.99	-8.69	QP	P	
2	0.1500	10.80	30.10	40.90	55.99	-15.09	AVG	P	
3	0.1660	10.80	45.70	56.50	65.15	-8.65	QP	P	
4	0.1660	10.80	26.30	37.10	55.15	-18.05	AVG	P	
5	0.1780	10.80	43.40	54.20	64.57	-10.37	QP	P	
6	0.1780	10.80	28.60	39.40	54.57	-15.17	AVG	P	
7	0.1980	10.80	37.00	47.80	63.69	-15.89	QP	P	
8	0.1980	10.80	21.00	31.80	53.69	-21.89	AVG	P	
9	0.2260	10.80	36.30	47.10	62.59	-15.49	QP	P	
10	0.2260	10.80	16.00	26.80	52.59	-25.79	AVG	P	
11	0.2340	10.80	37.10	47.90	62.30	-14.40	QP	P	
12	0.2340	10.80	21.90	32.70	52.30	-19.60	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:Home Table\#7


Page: 1



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-1-5 17:45:06

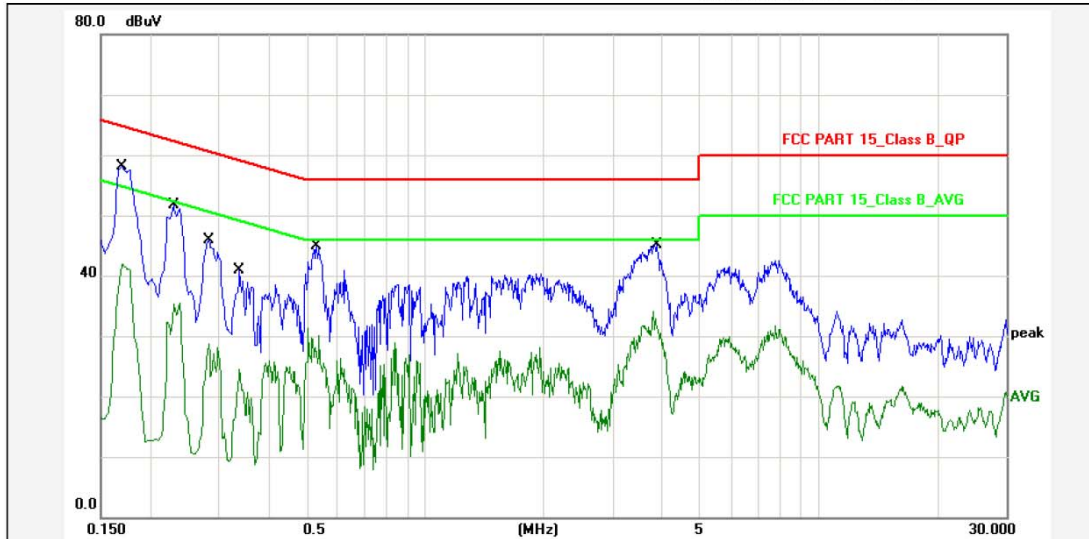

Report No.:	ACH70	Phase:	L1
Test Standard:	FCC PART 15_Class B_QP	Temp.()/Hum.(%):	21(C) / 47 %
Test item:	Conducted Emission	Power Rating:	AC 120V/60Hz
Applicant:	Archos S.A.	Test Engineer:	Sance
Product:	Archos smart home tablet		
Model No.:	ACH70		
Test Mode:	BT Mode		
Remark:			

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1700	10.80	44.20	55.00	64.96	-9.96	QP	P	
2	0.1700	10.80	29.00	39.80	54.96	-15.16	AVG	P	
3	0.2300	10.80	37.90	48.70	62.45	-13.75	QP	P	
4	0.2300	10.80	22.60	33.40	52.45	-19.05	AVG	P	
5	0.2819	10.80	32.00	42.80	60.76	-17.96	QP	P	
6	0.2819	10.80	15.90	26.70	50.76	-24.06	AVG	P	
7	0.3379	10.80	27.00	37.80	59.25	-21.45	QP	P	
8	0.3379	10.80	11.70	22.50	49.25	-26.75	AVG	P	
9	0.5299	10.80	31.00	41.80	56.00	-14.20	QP	P	
10	0.5299	10.80	18.50	29.30	46.00	-16.70	AVG	P	
11	3.8980	10.80	31.20	42.00	56.00	-14.00	QP	P	
12	3.8980	10.80	21.20	32.00	46.00	-14.00	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:Home Table\#8

Page: 1

4. Max. Conducted Output Power

4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03):

Maximum conducted (Peak) output power:

1. Set the RBW = 1MHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span $\geq 1.5 \times$ DTS bandwidth
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Maximum conducted (Average) output power:

1. Set the RBW = 1-5% of the OBW, not to exceed 1MHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Set the span $\geq 1.5 \times$ OBW
4. Detector = RMS
5. Sweep time = auto couple.
6. Number of points in sweep $\geq 2 \times$ span/RBW. (This gives bin-to-bin spacing ≤ 2 , so that narrowband signals are not lost between frequency bins.)
7. Trace mode = Trace average at least 100 traces in power averaging (i.e., RMS) mode.
8. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
9. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results




For BT Mode:

Please refer to following table and plots.

Modulation:	GFSK	Humidity :	44 %
Temperature :	20 °C	Test Date :	December 13, 2013
Test By:	Sance		
Test Result:	PASS		

Frequency MHz	Data Rate Mbps	PK Output Power dBm	Limit dBm
Low Channel: 2402	1	0.76	30
Middle Channel: 2442	1	0.24	30
High Channel: 2480	1	-0.41	30

Maximum Peak Conducted Output Power Low Channel

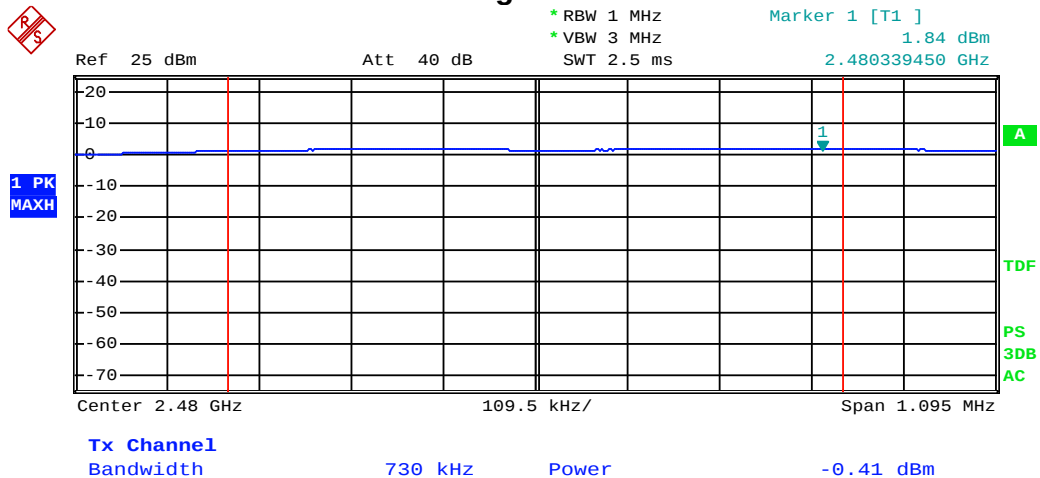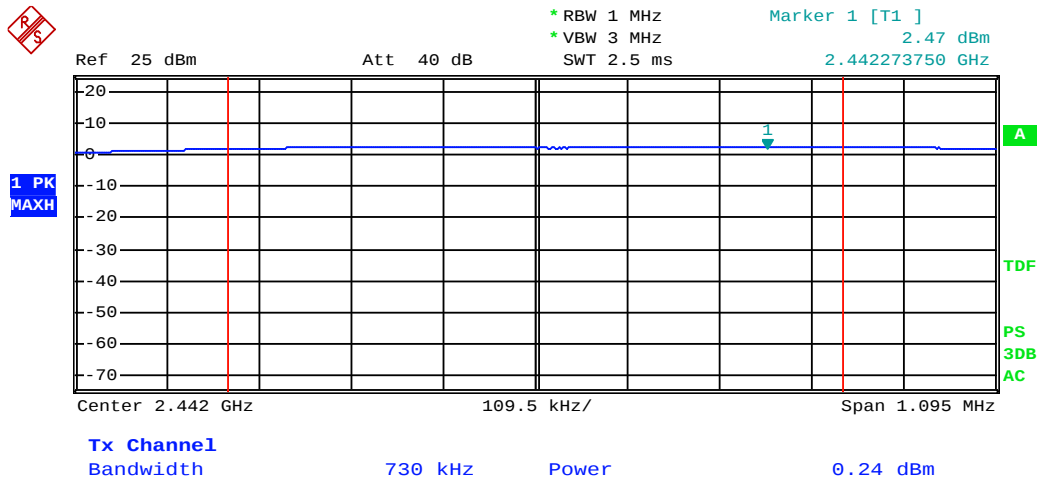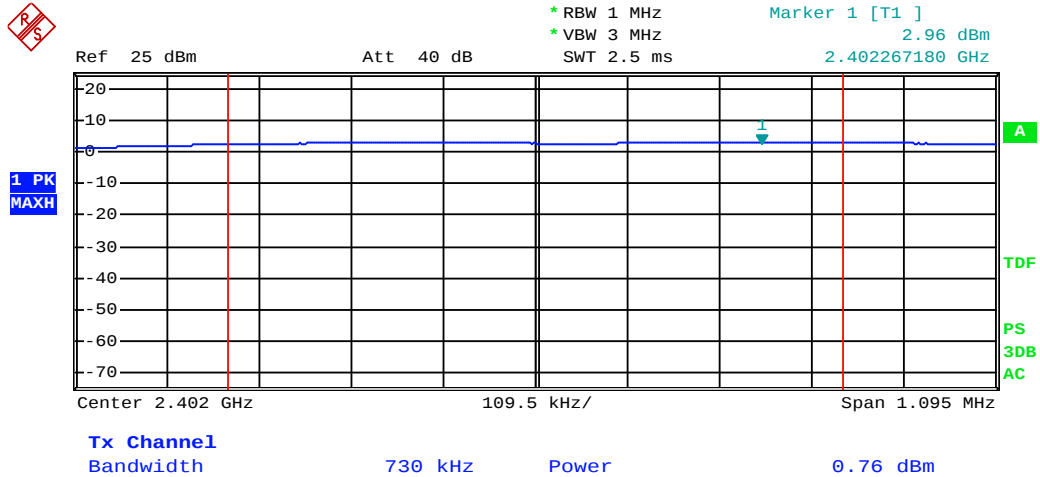


For WIFI Mode:


Please refer to following table and plots.

Temperature :	21 °C	Humidity :	52%	
Test By:	Sance	Test Date :	January 09, 2014	
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	PK Output Power dBm	AV Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=2.0dBi)				
Low Channel: 2412	1	12.36	6.74	30
Middle Channel: 2437	1	11.83	6.24	30
High Channel: 2462	1	11.07	6.03	30
IEEE 802.11g Mode (OFDM, Antenna Gain=2.0dBi)				
Low Channel: 2412	6	14.60	8.81	30
Middle Channel: 2437	6	14.20	7.64	30
High Channel: 2462	6	13.51	6.52	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=2.0dBi)				
Low Channel: 2412	6.5	13.88	7.46	30
Middle Channel: 2437	6.5	13.47	6.32	30
High Channel: 2462	6.5	12.70	6.18	30


Maximum Peak Conducted Output Power 802.11b Low Channel

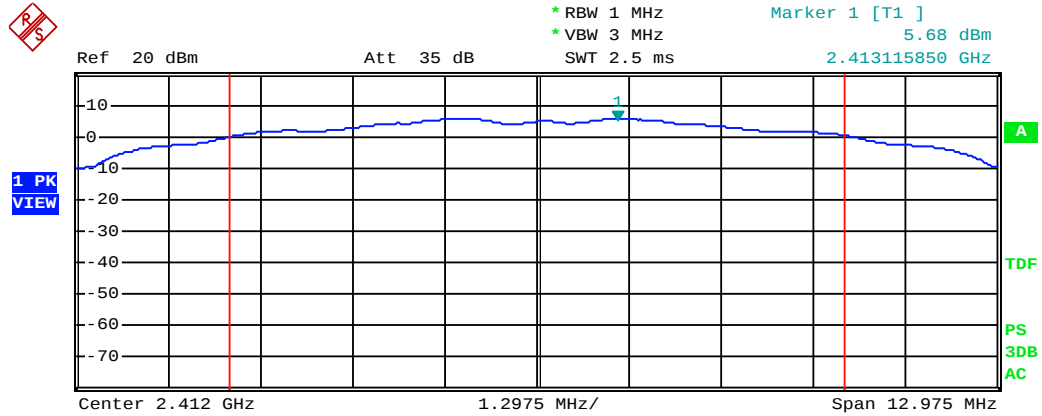


802.11b Middle Channel

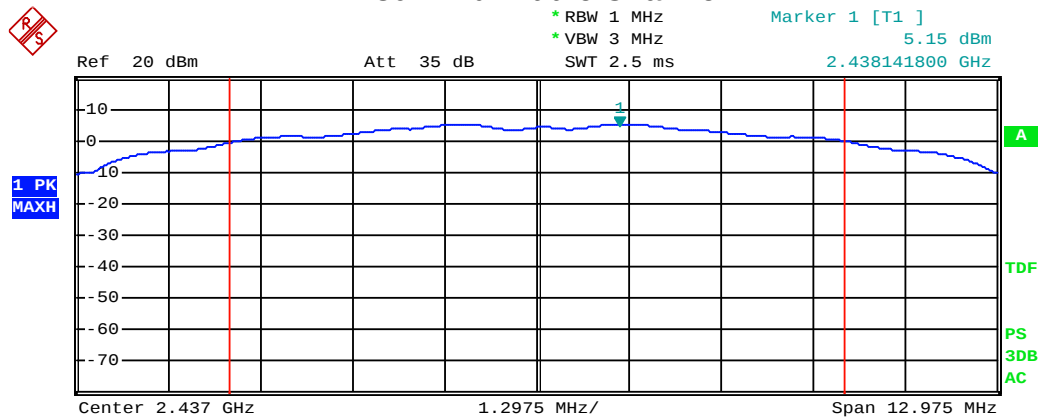


802.11b High Channel

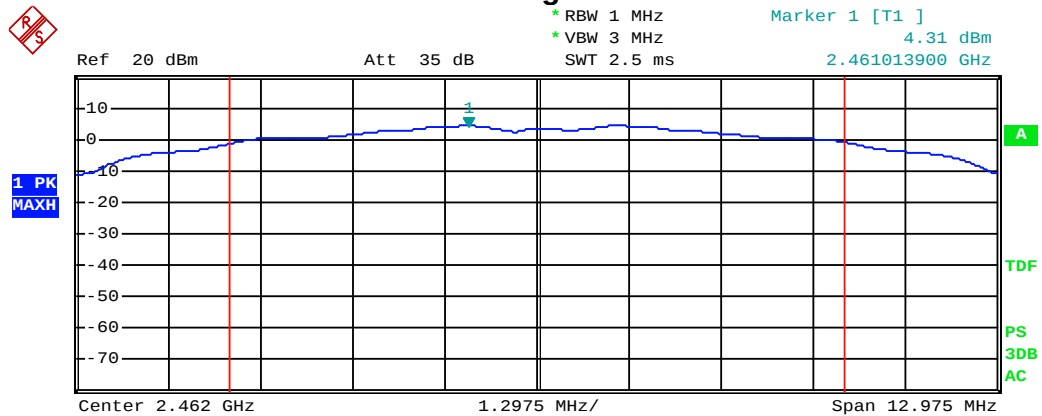


802.11g Low Channel

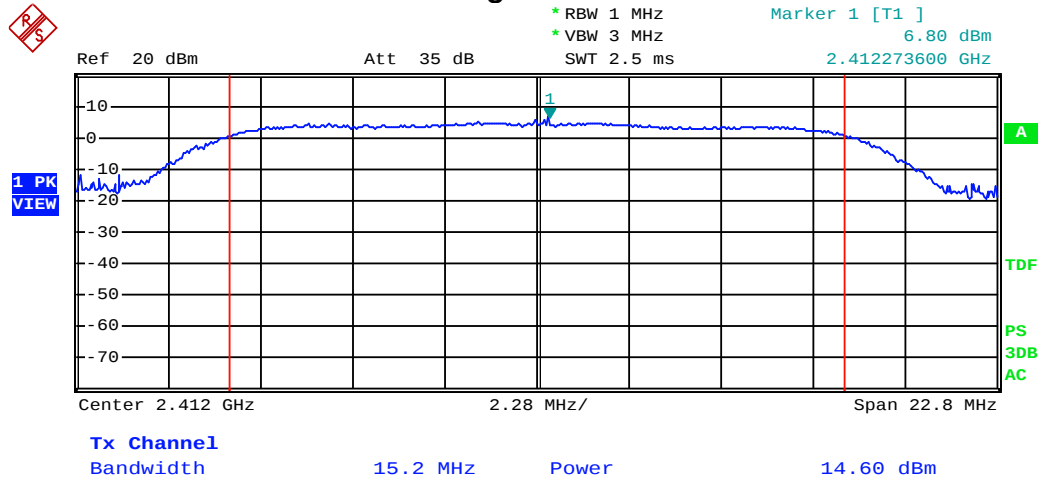


802.11g Middle Channel

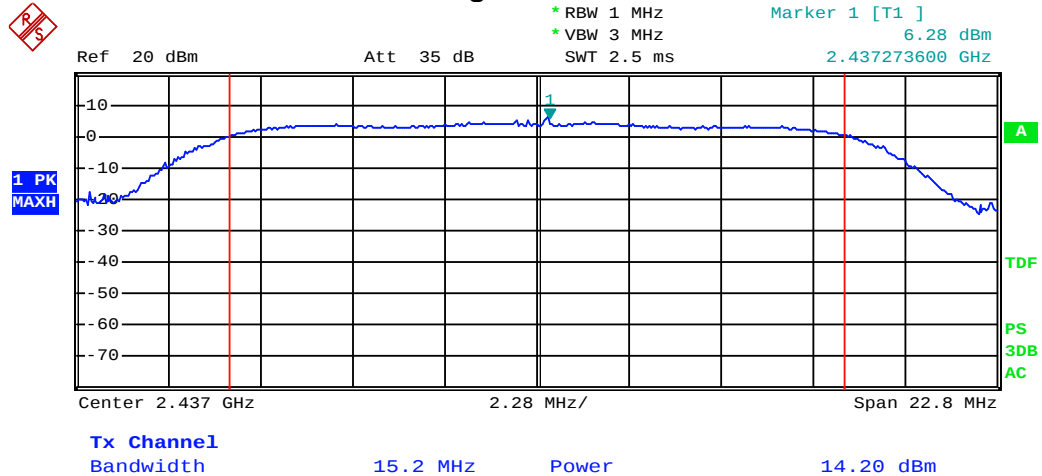


802.11g High Channel

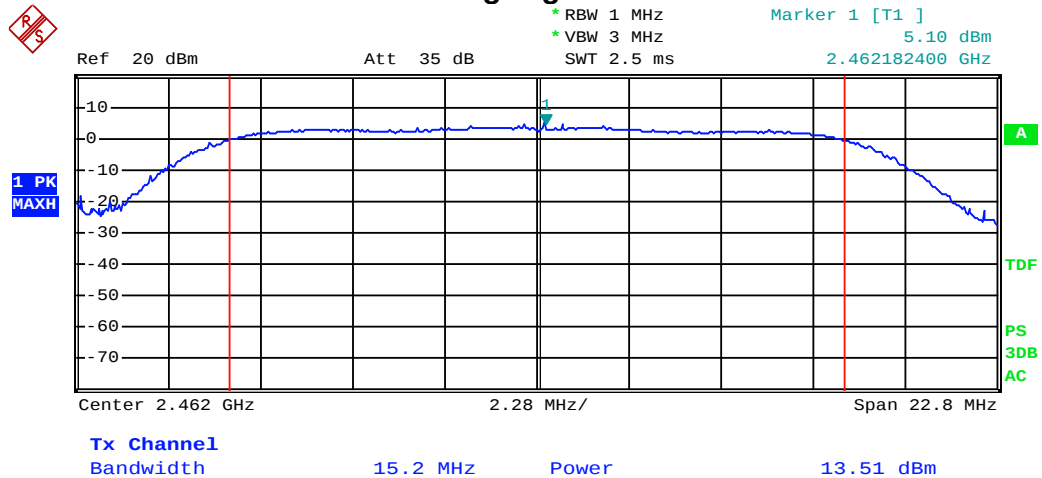


802.11n(HT20) Low Channel

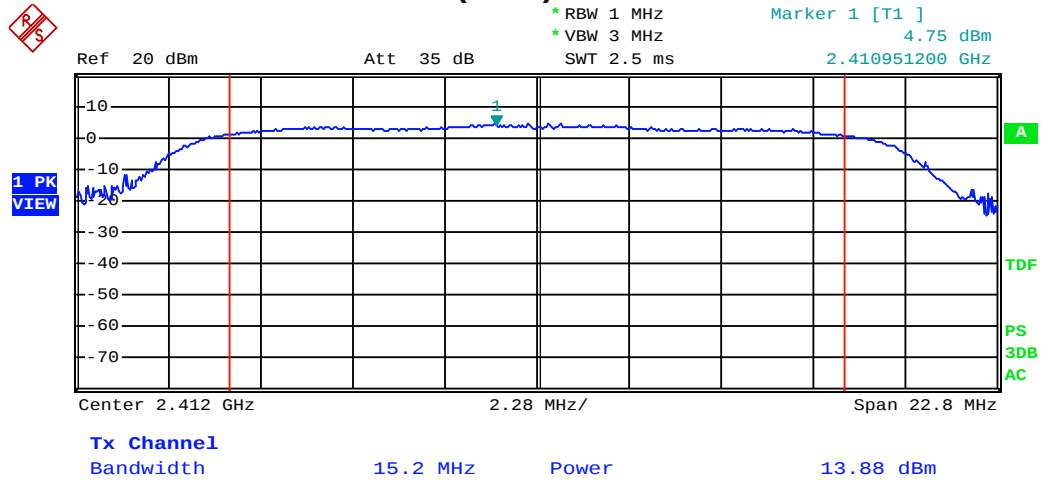


802.11n(HT20) Middle Channel

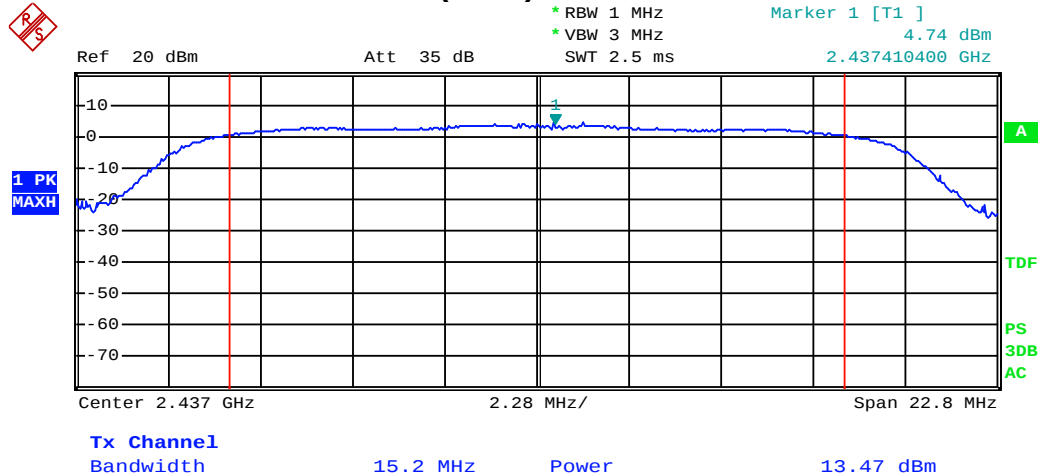


802.11n(HT20) High Channel

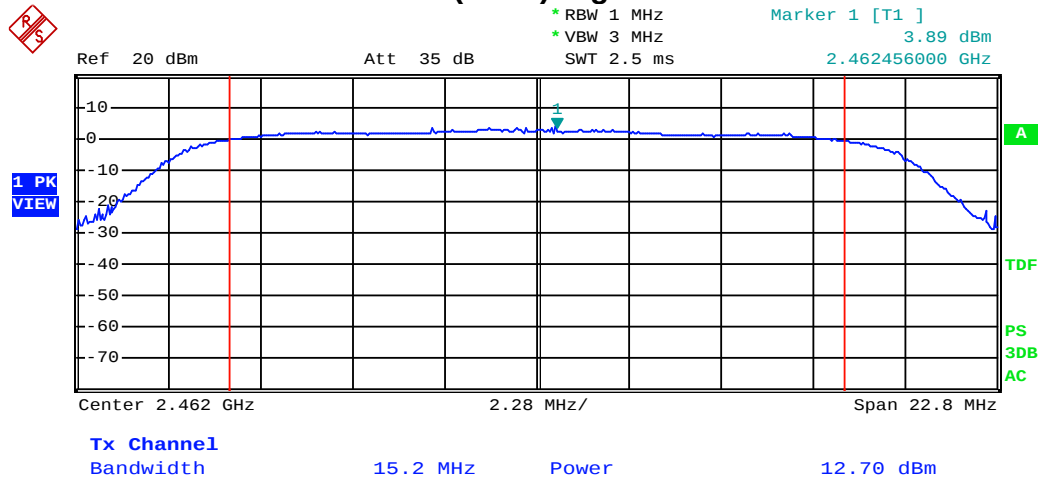


Maximum Average Conducted Output Power 802.11b Low Channel

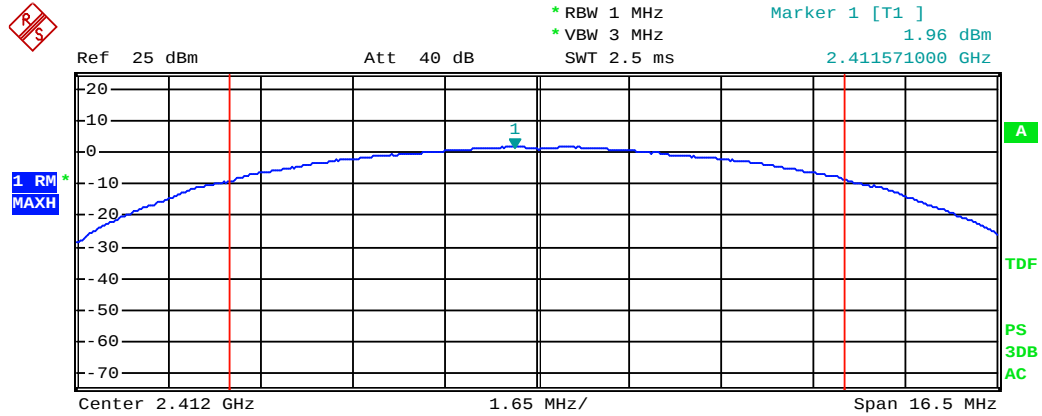


802.11b Middle Channel

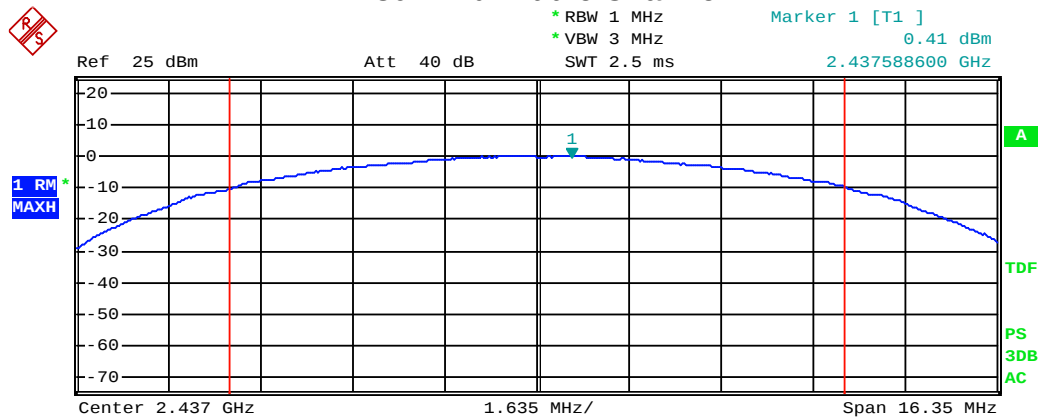

802.11b High Channel

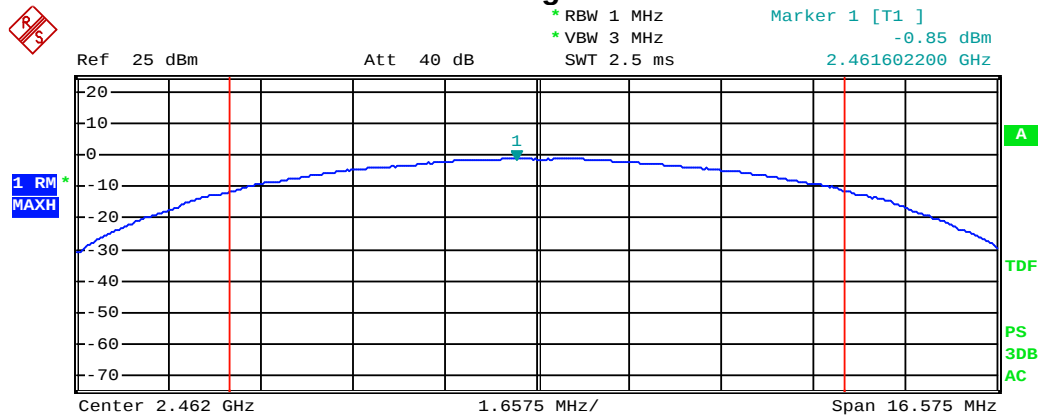

802.11g Low Channel

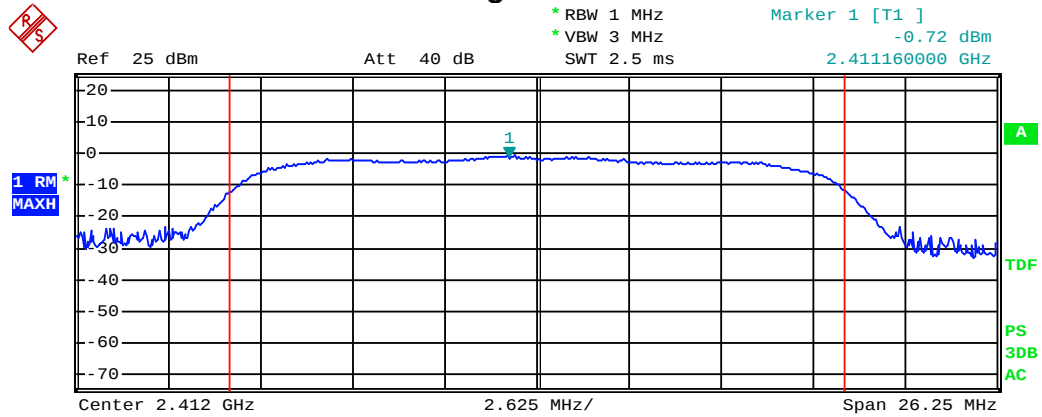


Tx Channel
Bandwidth

17.5 MHz

Power

8.81 dBm

802.11g Middle Channel

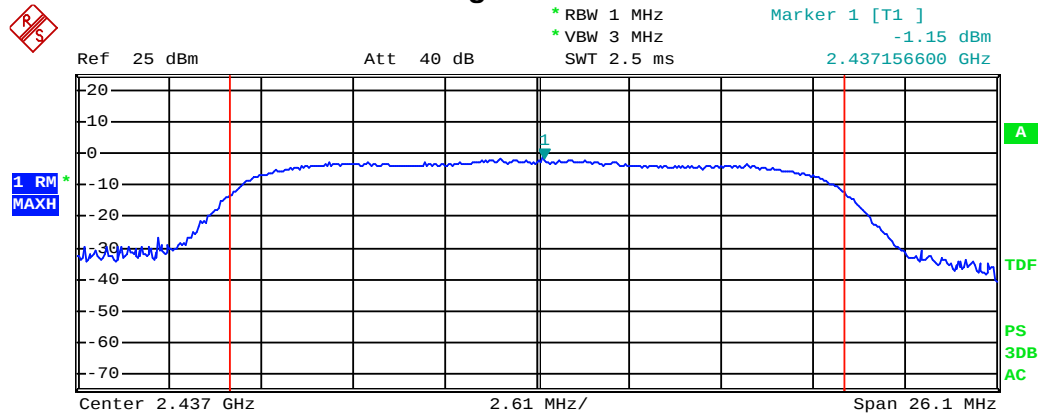


Tx Channel
Bandwidth

17.4 MHz

Power

7.64 dBm

802.11g High Channel

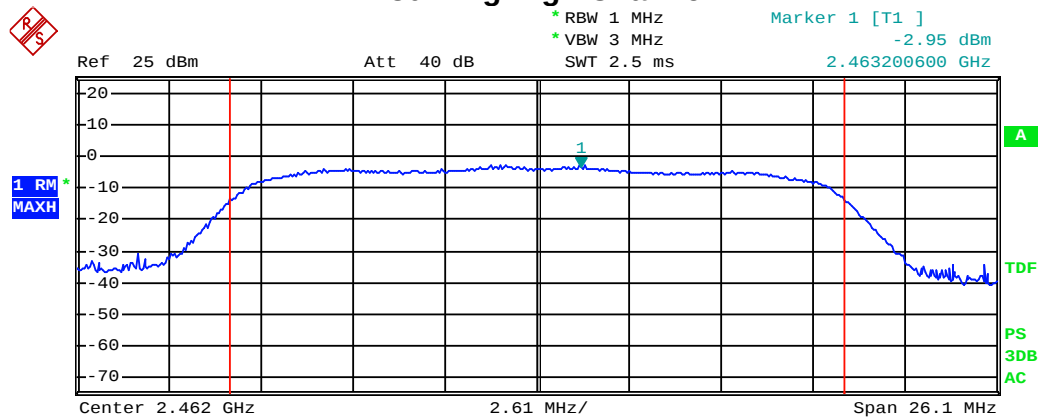


Tx Channel
Bandwidth

17.4 MHz


Power

6.52 dBm


802.11n(HT20) Low Channel

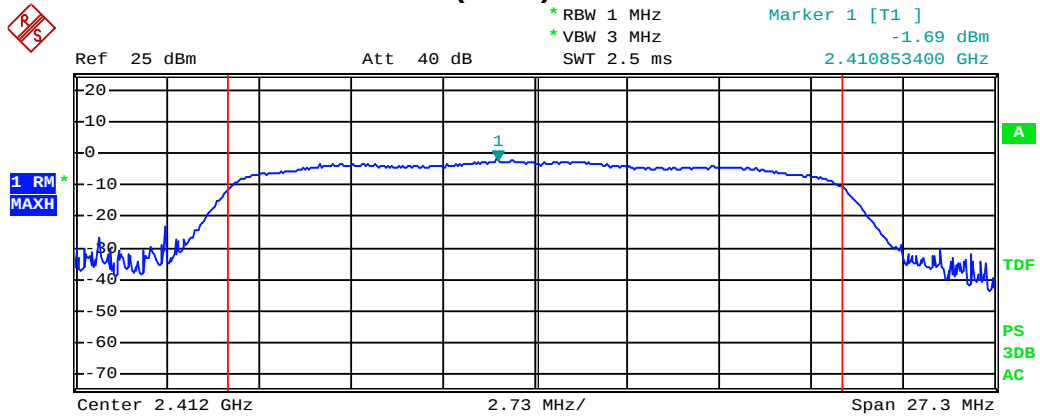

802.11n(HT20) Middle Channel

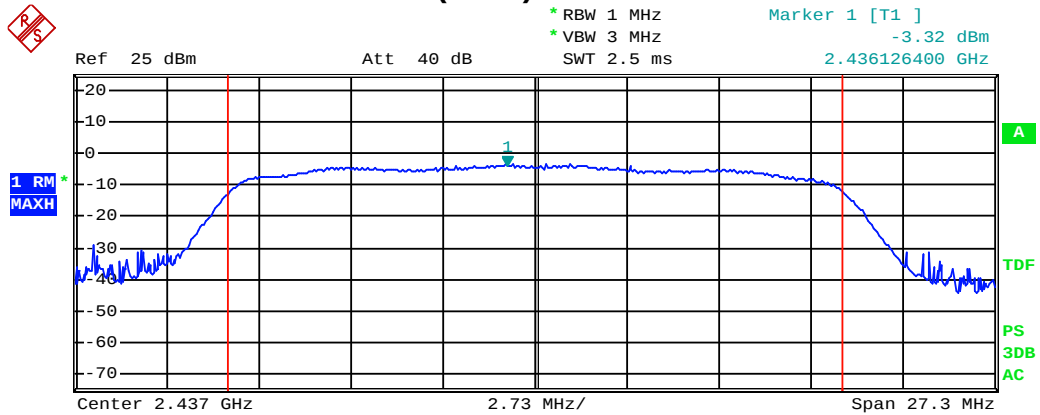

802.11n(HT20) High Channel

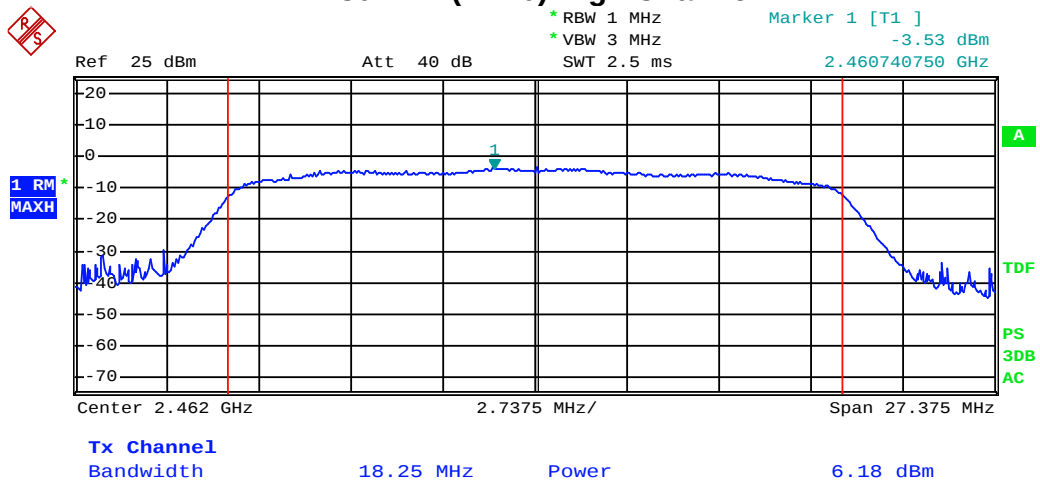

5. 6dB&20dB Bandwidth


5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03):

1. Set the RBW = 100KHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Results


For BT Mode:

Please refer to following table and plots.

Modulation:	GFSK	Humidity :	44 %
Temperature :	20 °C	Test Date :	December 13, 2013
Test By:	Sance		
Test Result:	PASS		


Frequency MHz	Data Rate Mbps	6dB Bandwidth KHz	Limit
Low Channel: 2402	1	730	>500KHz
Middle Channel: 2442	1	730	>500KHz
High Channel: 2480	1	730	>500KHz

Low Channel

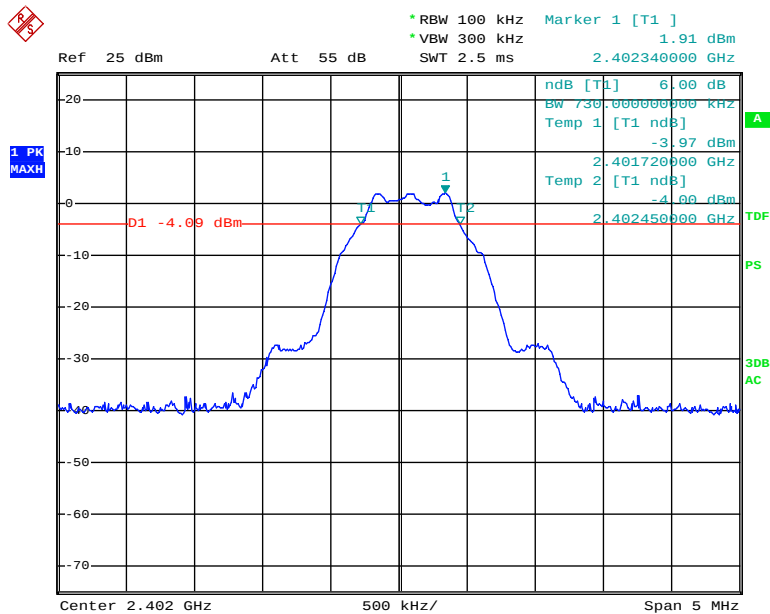

Date: 13.DEC.2013 11:50:17


Middle Channel

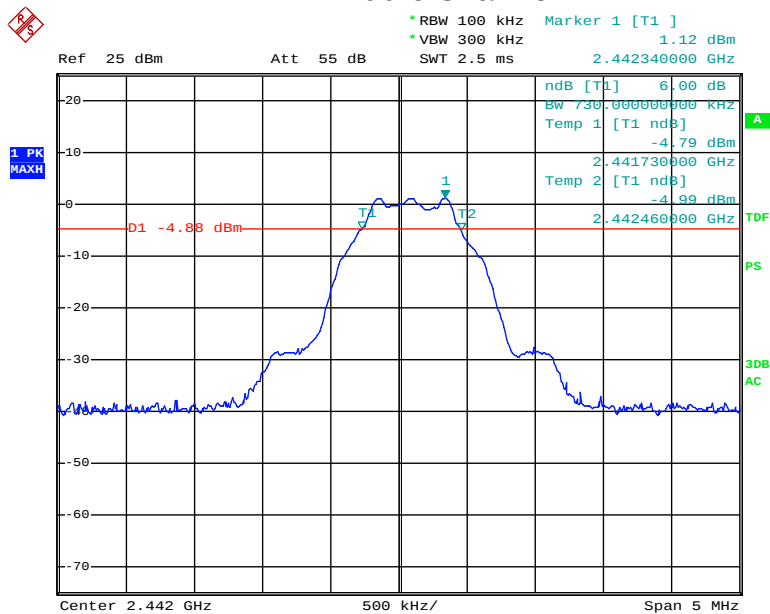

Date: 13.DEC.2013 11:51:15



High Channel

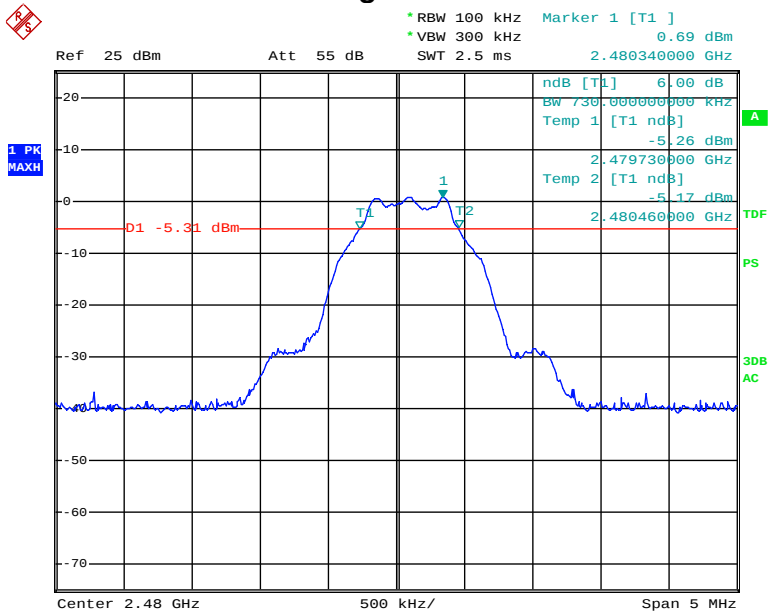


Date: 13.DEC.2013 11:51:57

For WIFI Mode:

Please refer to following table and plots.


Temperature :	21 °C	Humidity : 52 %		
Test By:	Sance	Test Date : January 09, 2014		
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	20dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)				
Low Channel: 2412	1	8.65	11.00	>500KHz
Middle Channel: 2437	1	8.65	10.90	>500KHz
High Channel: 2462	1	8.65	11.05	>500KHz
IEEE 802.11g Mode (OFDM)				
Low Channel: 2412	6	15.2	17.50	>500KHz
Middle Channel: 2437	6	15.2	17.40	>500KHz
High Channel: 2462	6	15.2	17.40	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)				
Low Channel: 2412	6.5	15.2	18.20	>500KHz
Middle Channel: 2437	6.5	15.2	18.20	>500KHz
High Channel: 2462	6.5	15.2	18.25	>500KHz

6dB Bandwidth 802.11b Low Channel

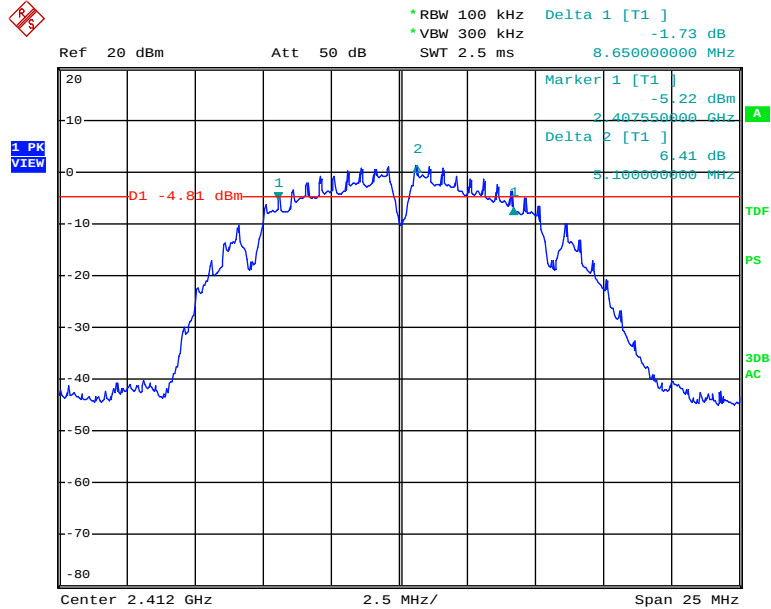


Date: 9.JAN.2014 19:50:49

802.11b Middle Channel

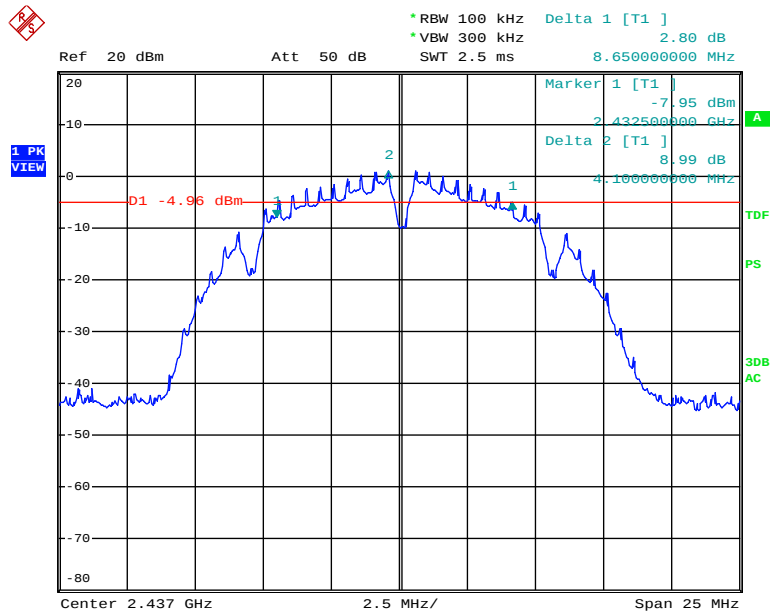


Date: 9.JAN.2014 19:52:05

802.11b High Channel

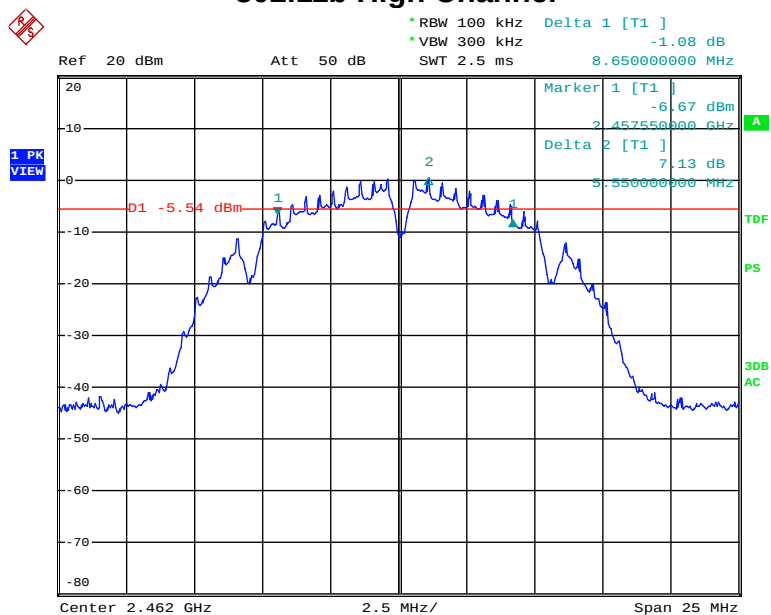


Date: 9.JAN.2014 19:53:37

802.11g Low Channel

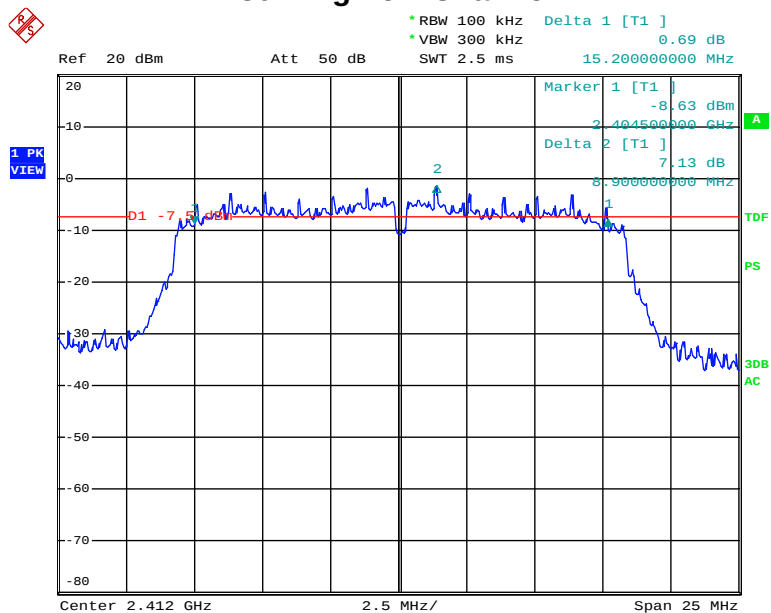


Date: 9.JAN.2014 19:55:09

802.11g Middle Channel

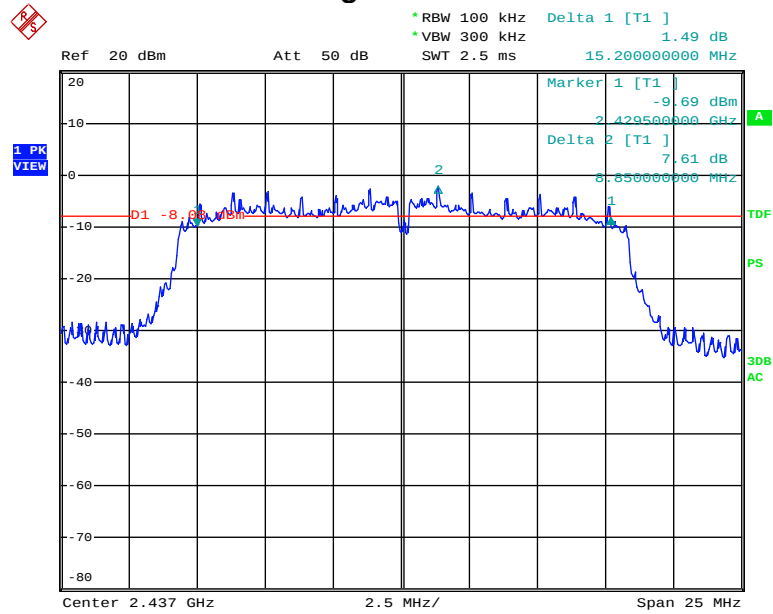


Date: 9.JAN.2014 19:56:07

802.11g High Channel

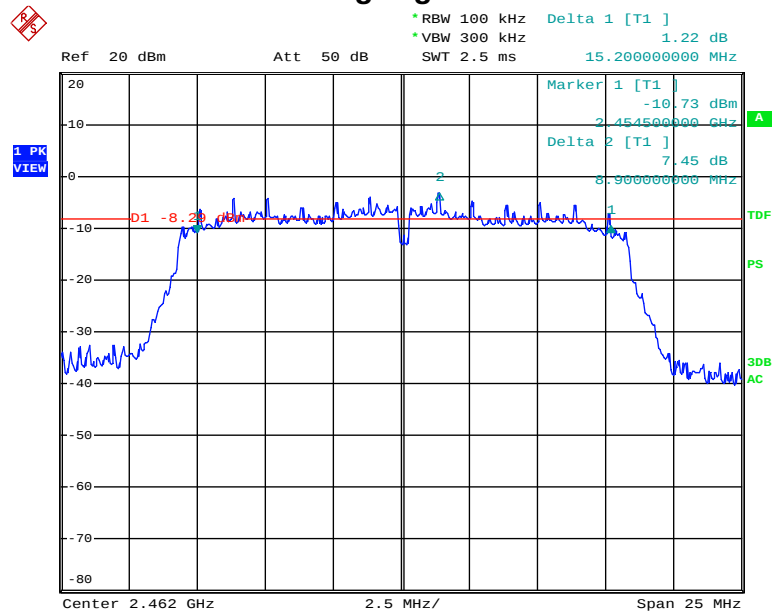


Date: 9.JAN.2014 20:03:11

802.11n(HT20) Low Channel

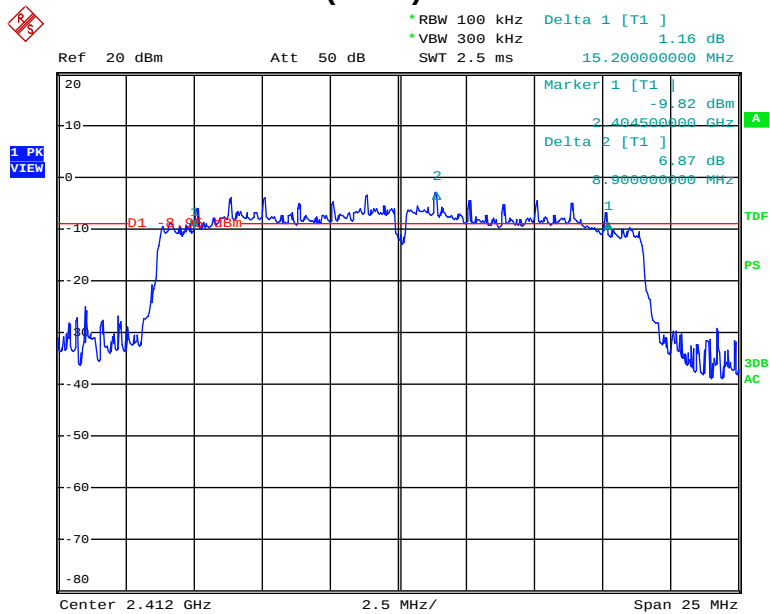


Date: 9.JAN.2014 20:04:32

802.11n(HT20) Middle Channel

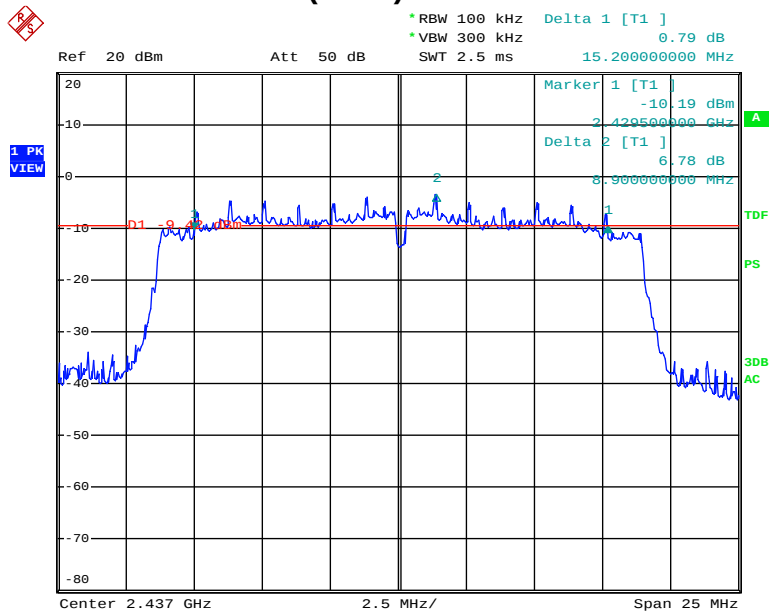

Date: 9.JAN.2014 20:05:51


802.11n(HT20) High Channel

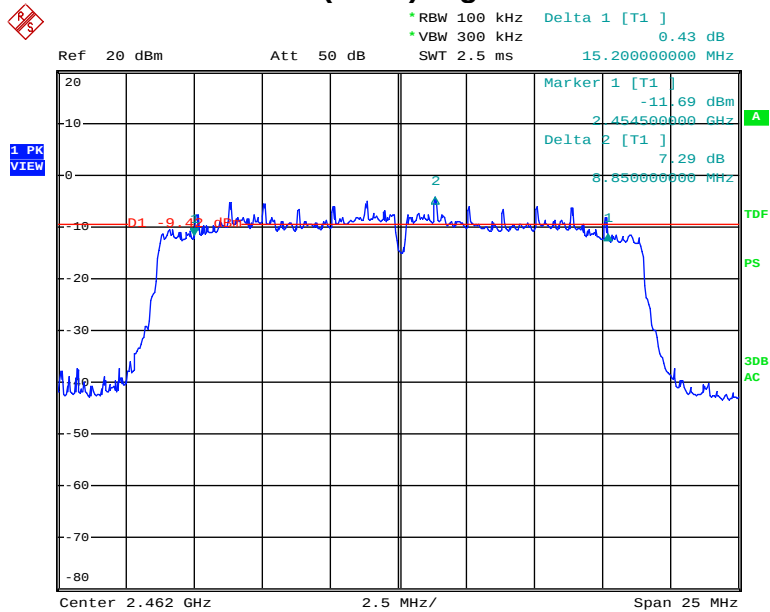

Date: 9.JAN.2014 20:06:41


20dB Bandwidth

802.11b Low Channel

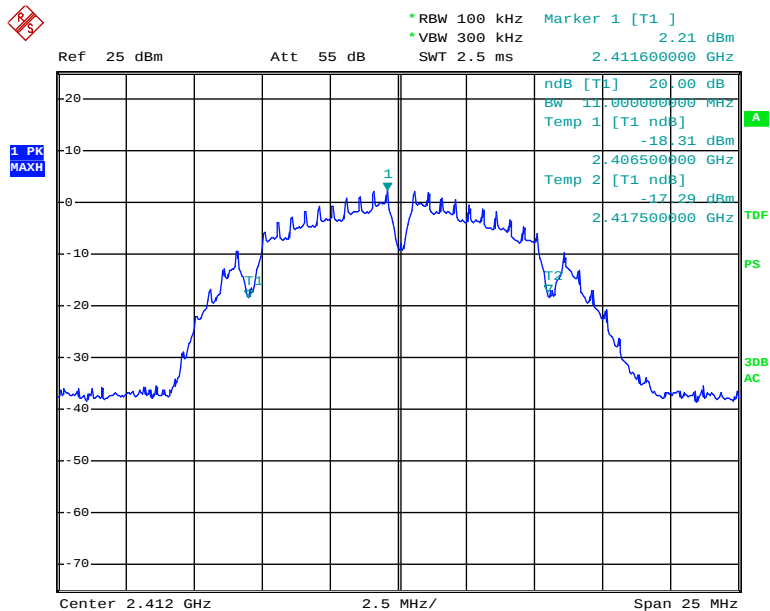


Date: 9.JAN.2014 18:24:50

802.11b Middle Channel

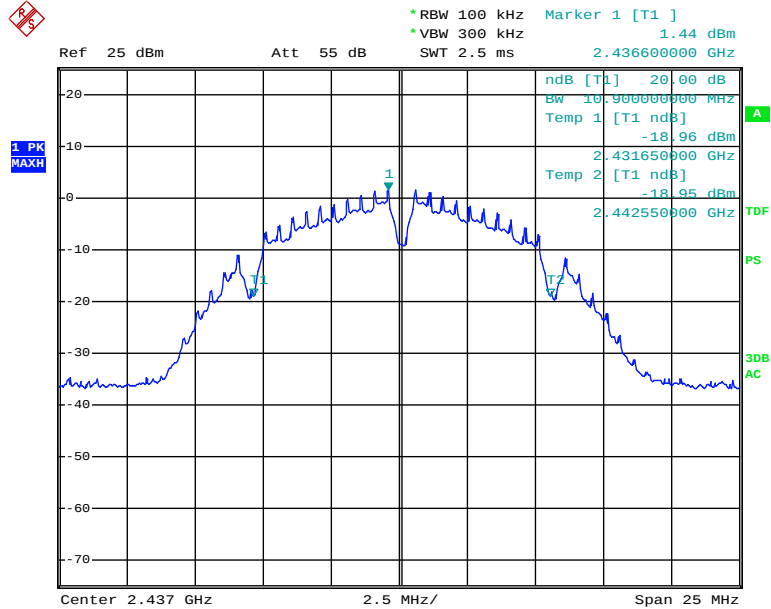


Date: 9.JAN.2014 19:06:40

802.11b High Channel

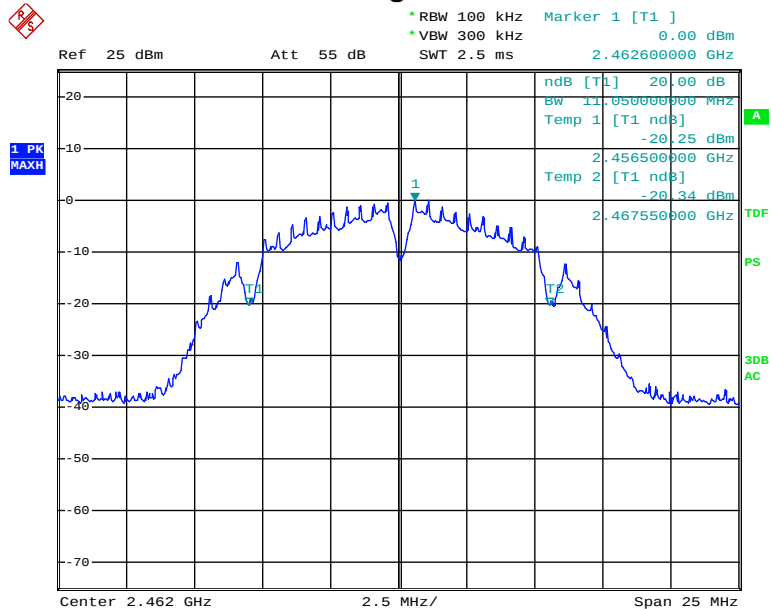


Date: 9.JAN.2014 19:12:22

802.11g Low Channel

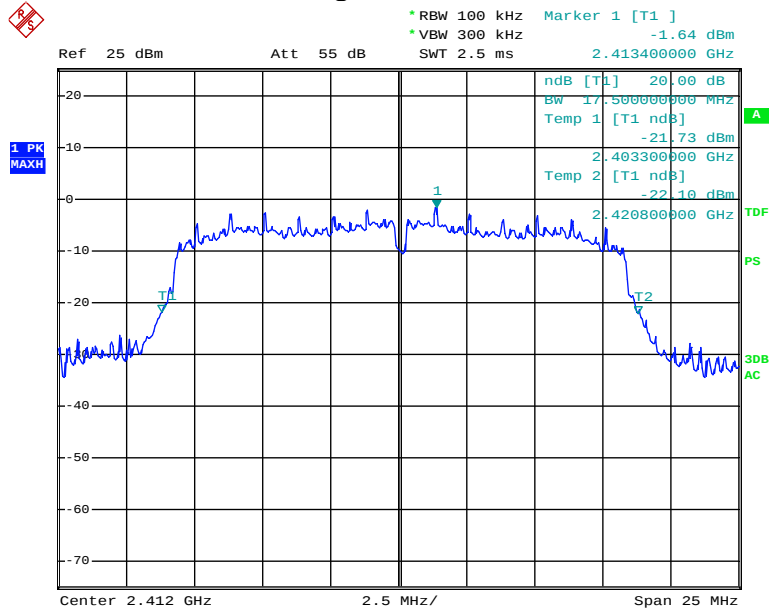


Date: 9.JAN.2014 19:13:46

802.11g Middle Channel

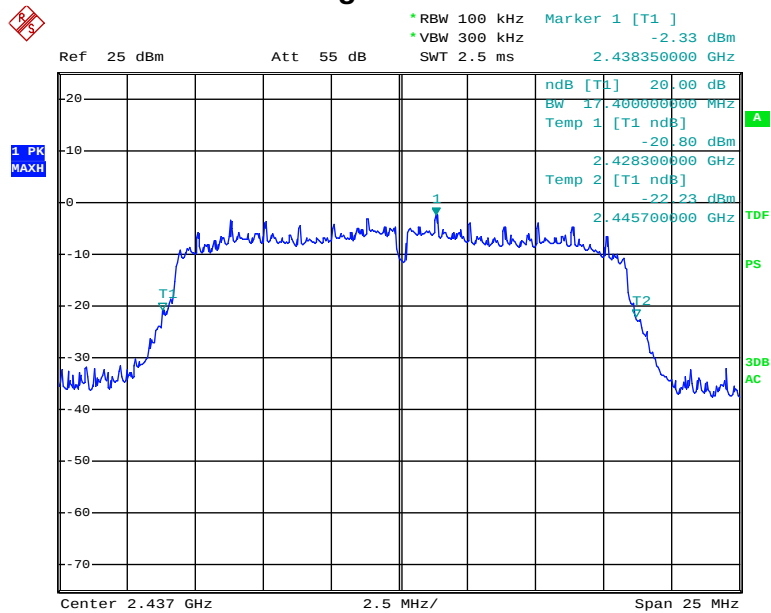


Date: 9.JAN.2014 19:14:54

802.11g High Channel

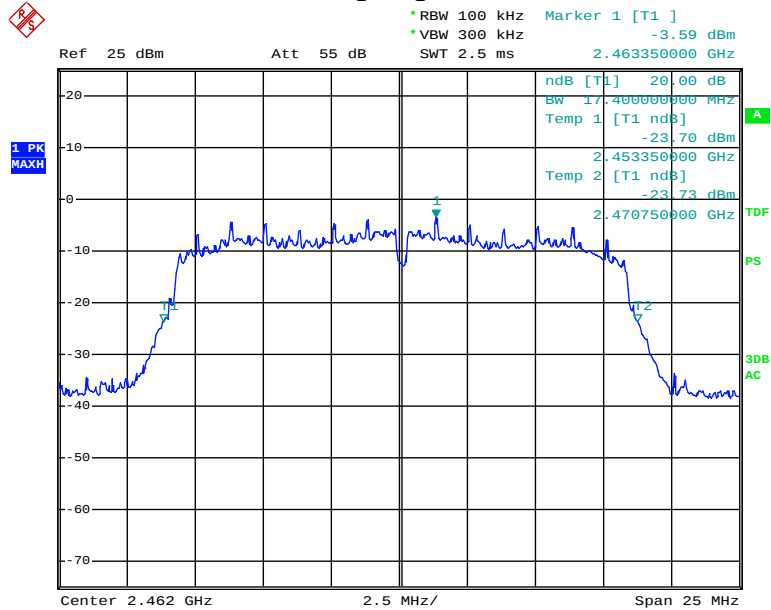


Date: 9.JAN.2014 19:15:37

802.11n(HT20) Low Channel

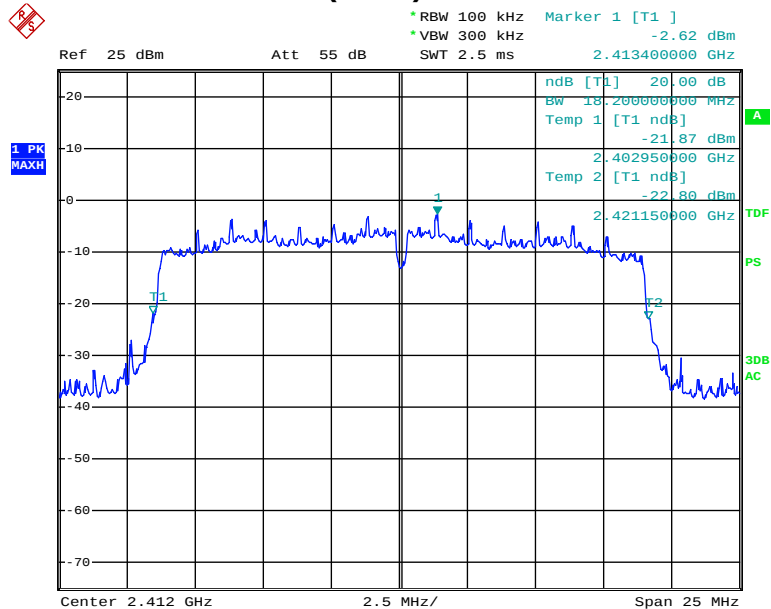


Date: 9.JAN.2014 19:16:24

802.11n(HT20) Middle Channel

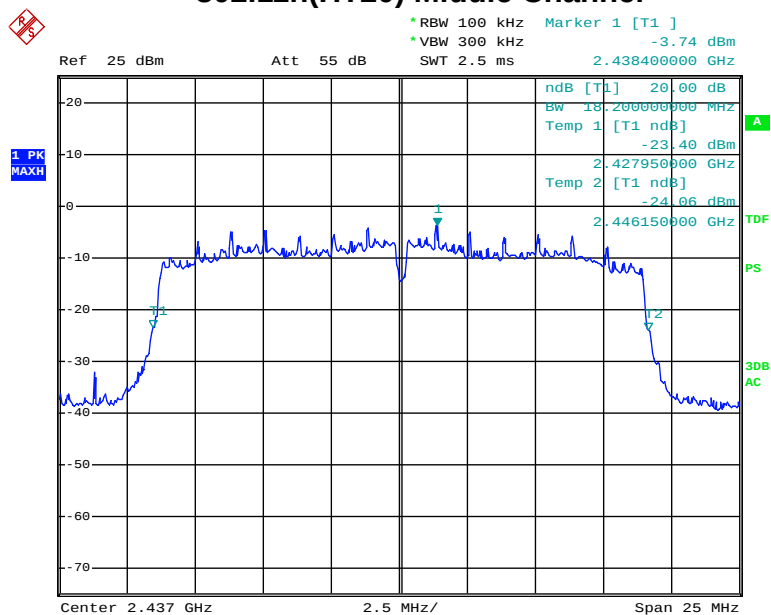

Date: 9.JAN.2014 19:16:55

802.11n(HT20) High Channel

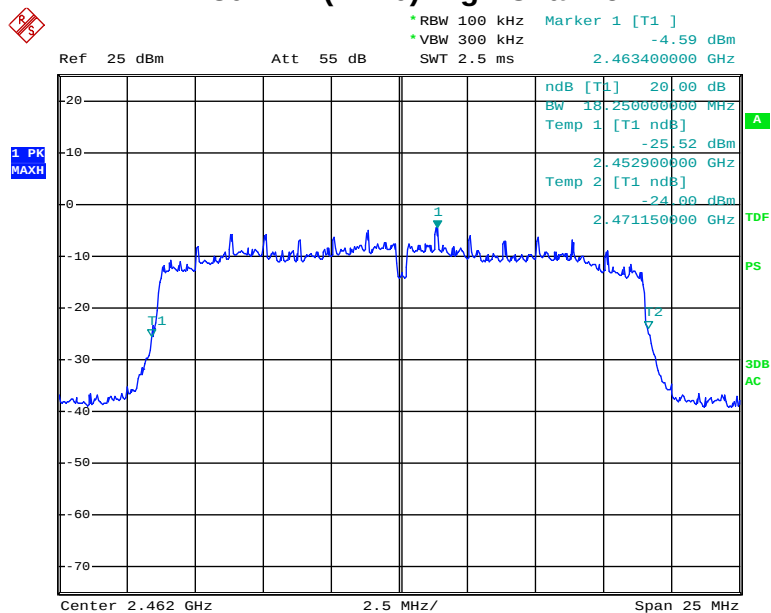

Date: 9.JAN.2014 19:17:59

6. Power Spectral Density


6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v03):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Results


For BT Mode:

Please refer to following table and plots.

Modulation:	GFSK		
Temperature :	20 °C	Humidity :	44 %
Test By:	Sance	Test Date :	December 13, 2013
Test Result:	PASS		


Frequency MHz	Data Rate Mbps	PSD dBm	Limit dBm
Low Channel: 2402	1	-11.86	8
Middle Channel: 2442	1	-12.75	8
High Channel: 2480	1	-13.12	8

Low Channel

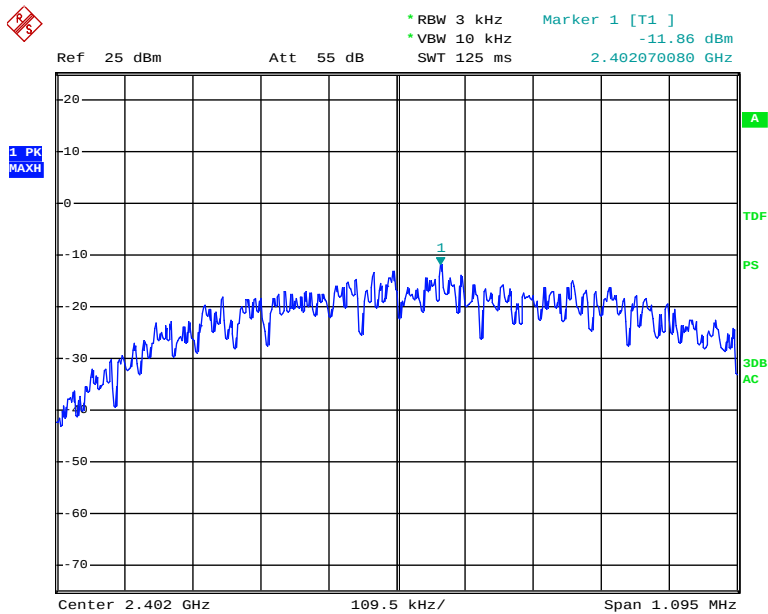


Date: 13.DEC.2013 11:54:18

Middle Channel

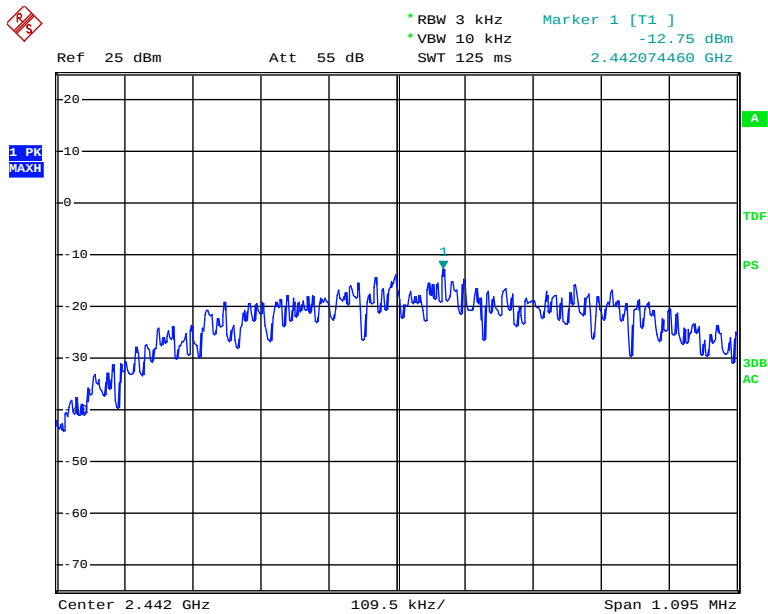

Date: 13.DEC.2013 11:54:38

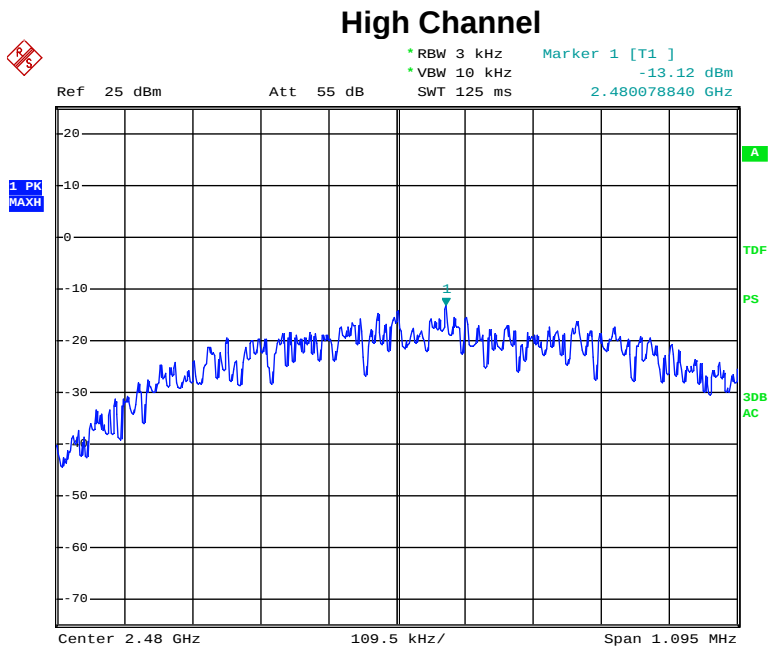


Date: 13.DEC.2013 11:55:00

For WIFI Mode:

Please refer to following table and plots.


Temperature :	21 °C	Humidity :	52 %
Test By:	Sance	Test Date :	January 09, 2014
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm	Limit dBm
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-12.38	8
Middle Channel: 2437	1	-12.66	8
High Channel: 2462	1	-12.80	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-16.80	8
Middle Channel: 2437	6	-16.27	8
High Channel: 2462	6	-17.61	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-17.27	8
Middle Channel: 2437	6.5	-18.14	8
High Channel: 2462	6.5	-19.59	8

802.11b Low Channel

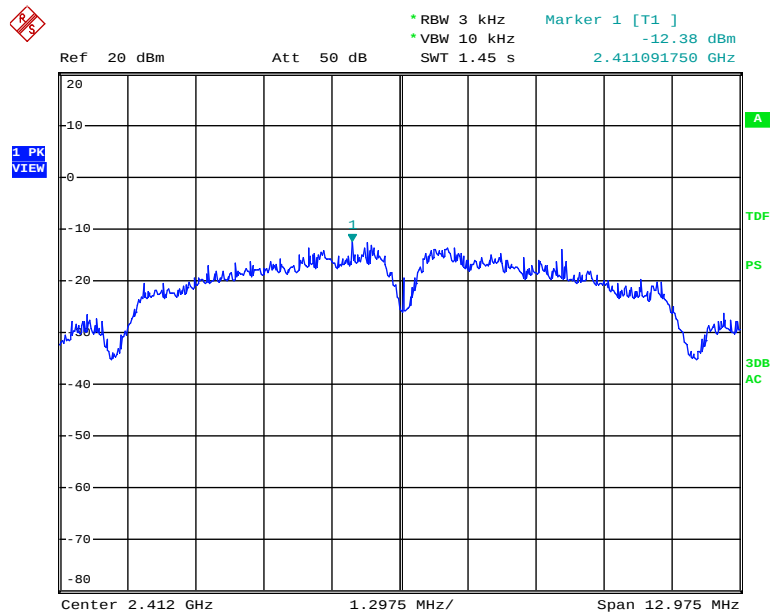


Date: 9.JAN.2014 20:17:21

802.11b Middle Channel

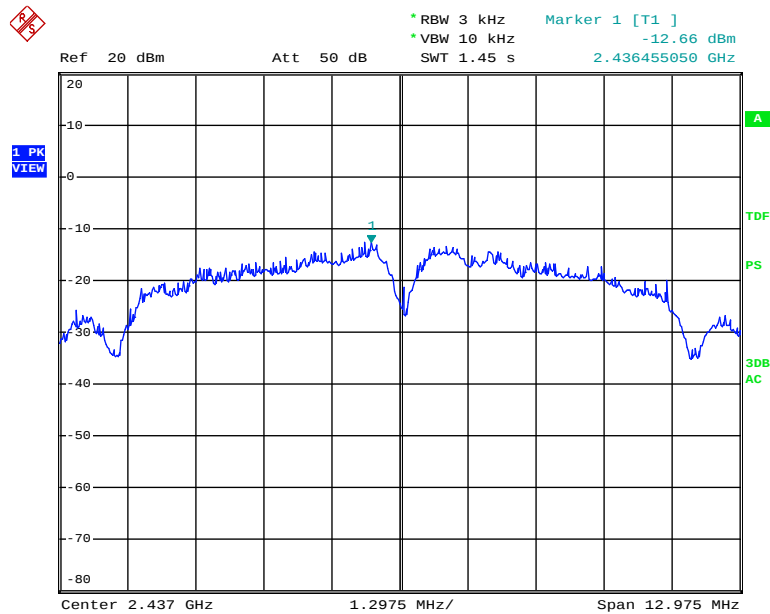


Date: 9.JAN.2014 20:21:09

802.11b High Channel

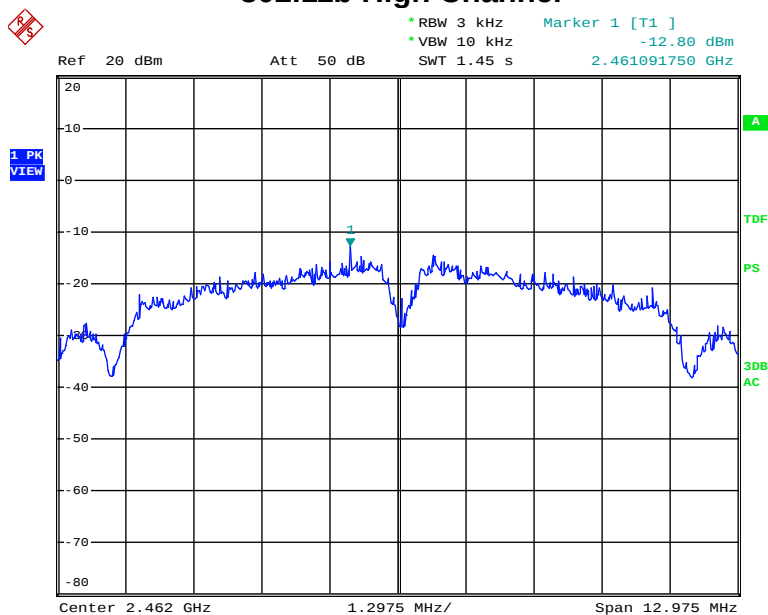


Date: 9.JAN.2014 20:18:40

802.11g Low Channel

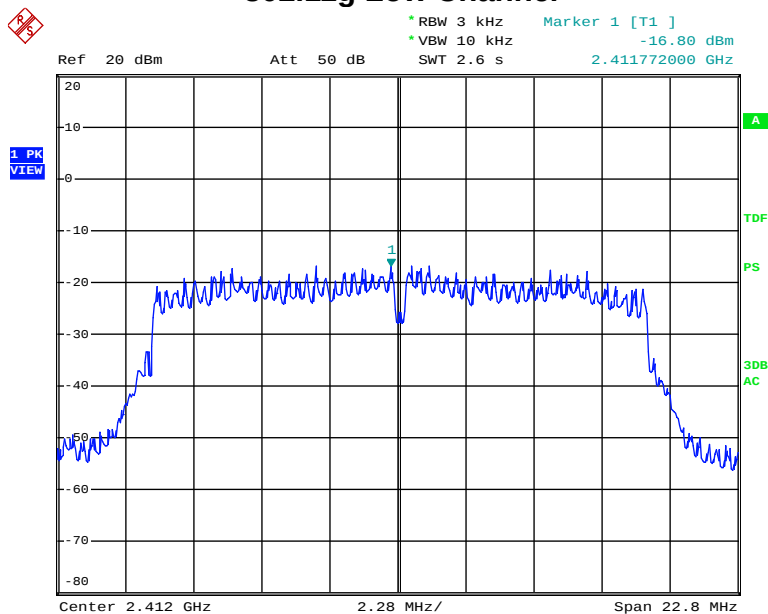


Date: 9.JAN.2014 20:15:10

802.11g Middle Channel

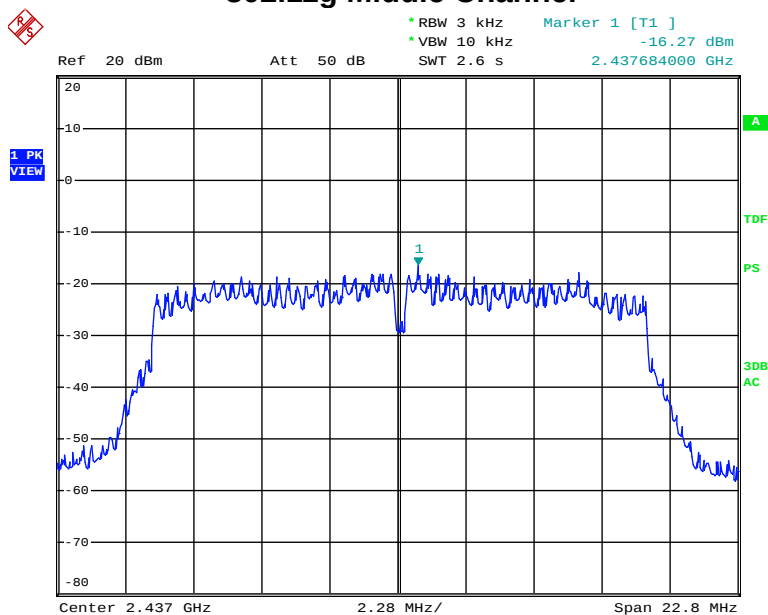


Date: 9.JAN.2014 20:15:44

802.11g High Channel

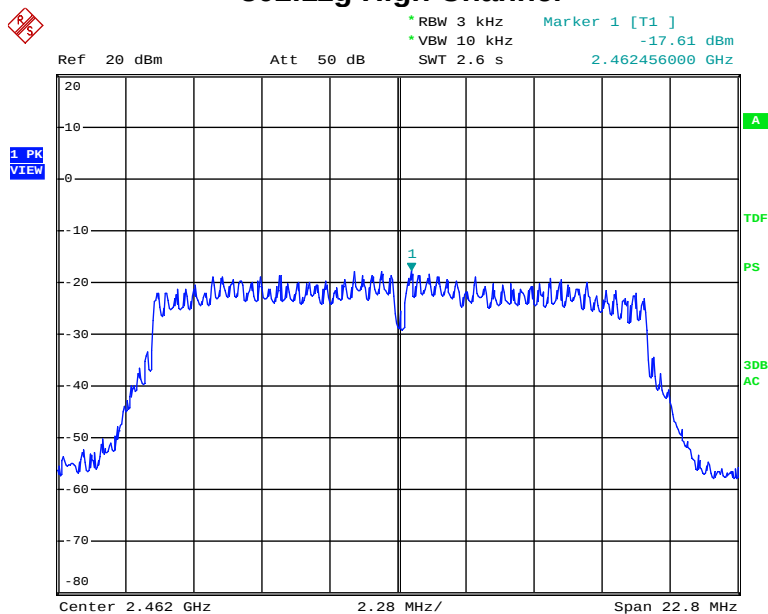


Date: 9.JAN.2014 20:16:29

802.11n(HT20) Low Channel

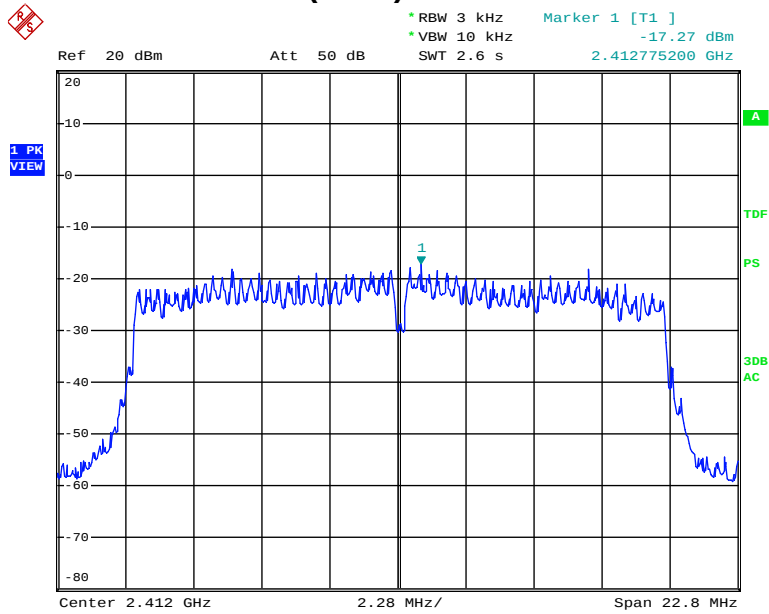


Date: 9.JAN.2014 20:14:39

802.11n(HT20) Middle Channel

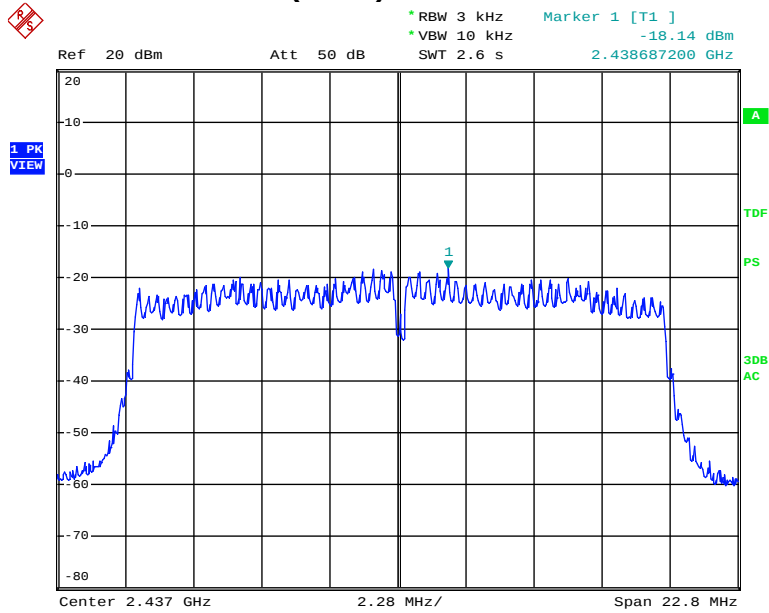

Date: 9.JAN.2014 20:14:09

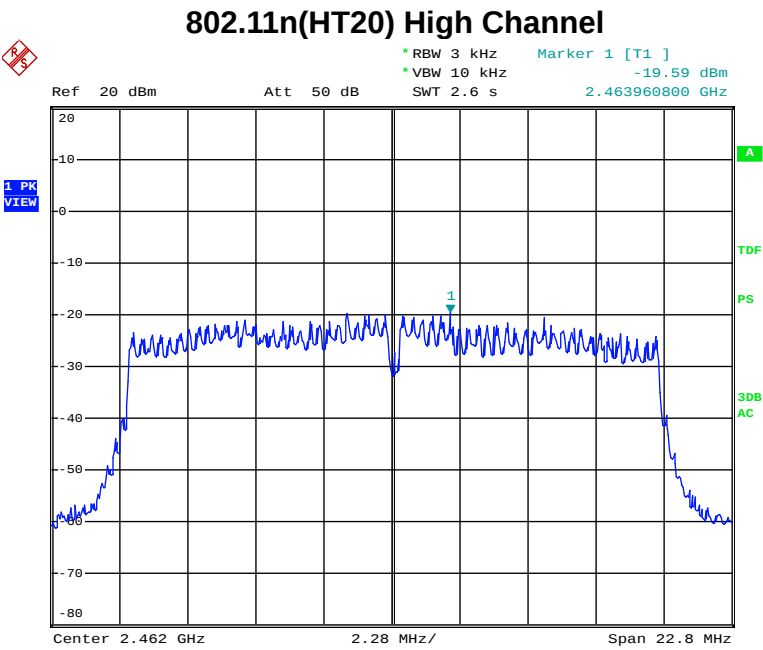

Date: 9.JAN.2014 20:13:33


7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set according to FCC KDB558074(v03) clause 11.3.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

The test plots showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.


For BT Mode:

Band Edge Low Channel

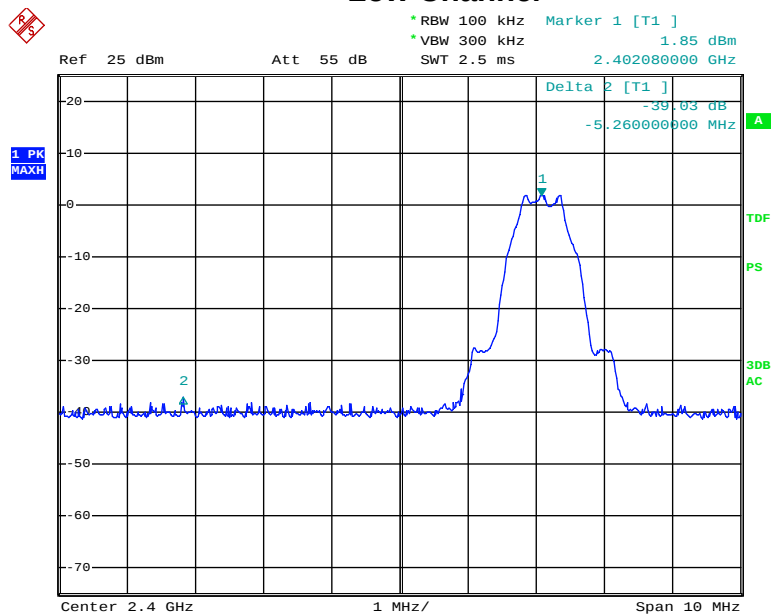


Date: 13.DEC.2013 11:55:59

High Channel

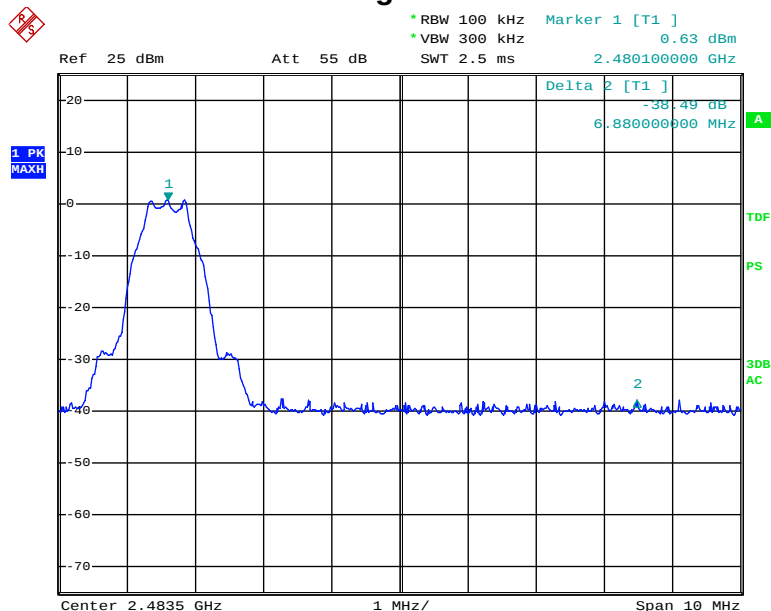



Date: 13.DEC.2013 11:57:44

Conducted Spurious Emissions Low Channel

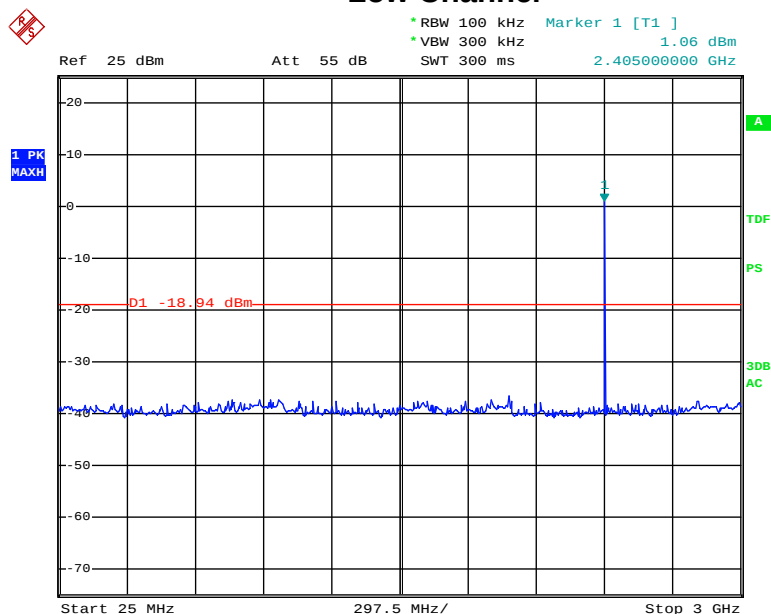


Date: 13.DEC.2013 11:58:58

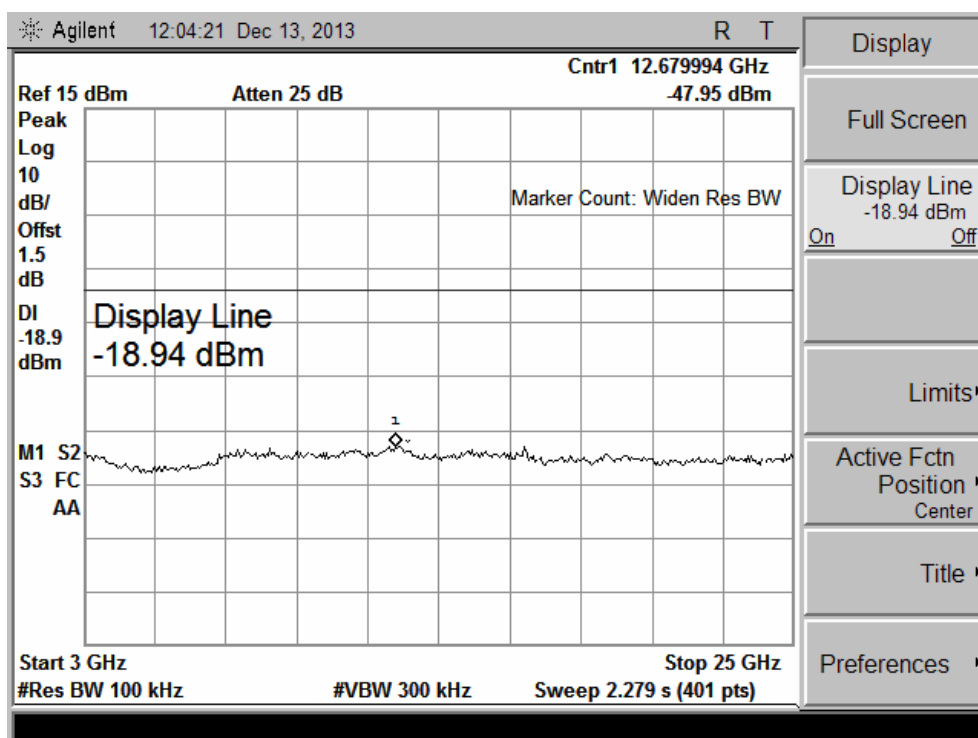


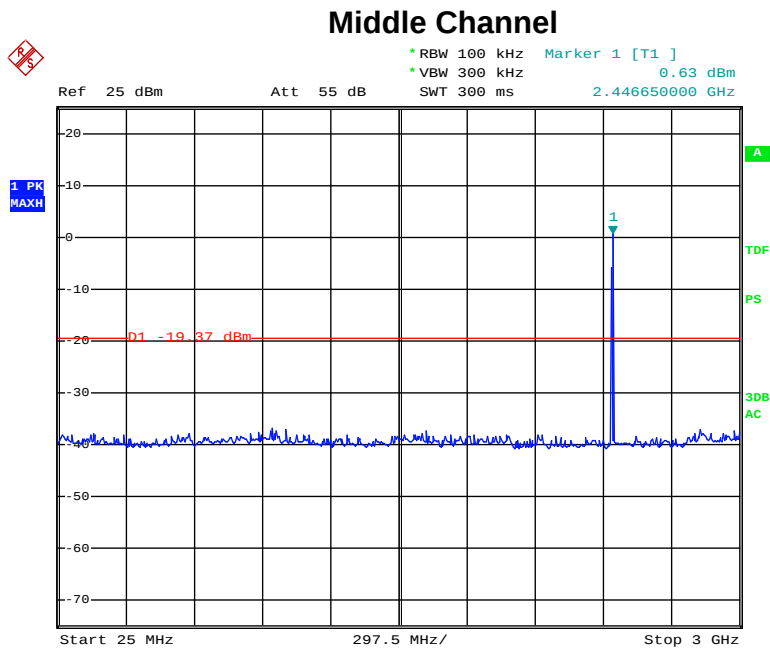


Date: 13.DEC.2013 11:59:32

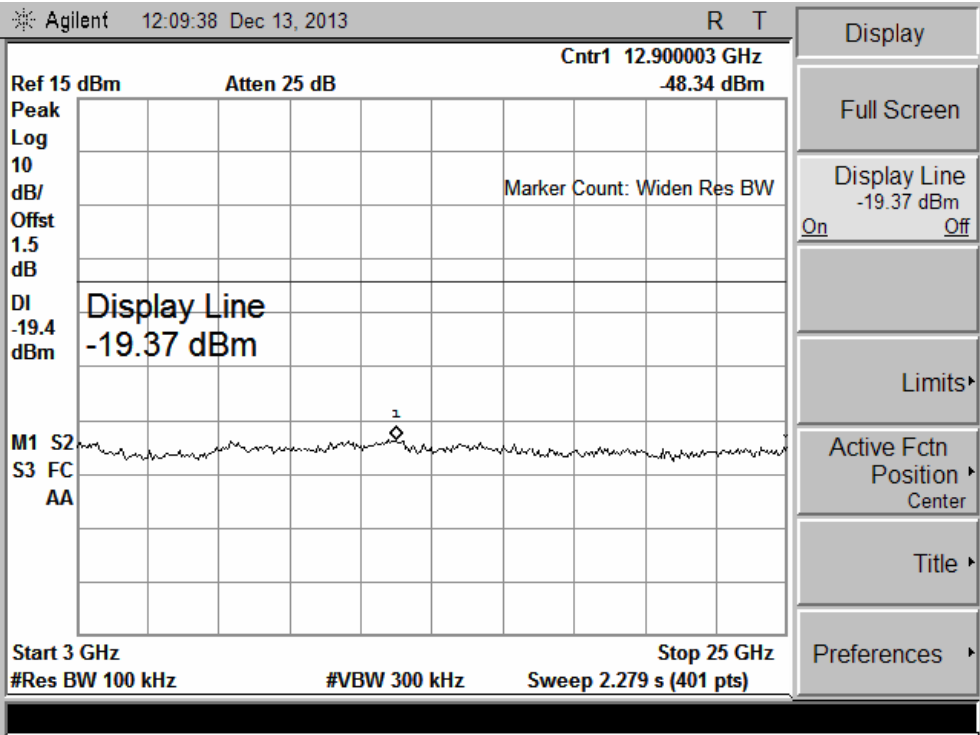

High Channel

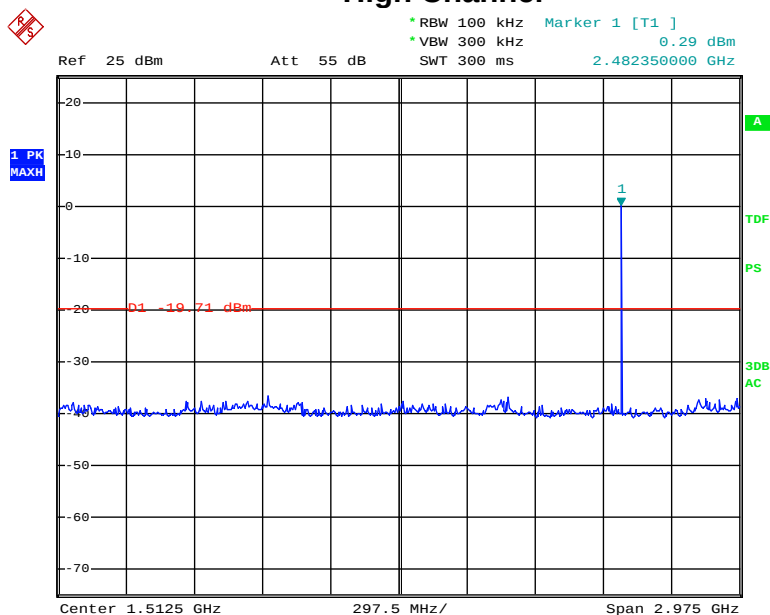


Date: 13.DEC.2013 12:00:11

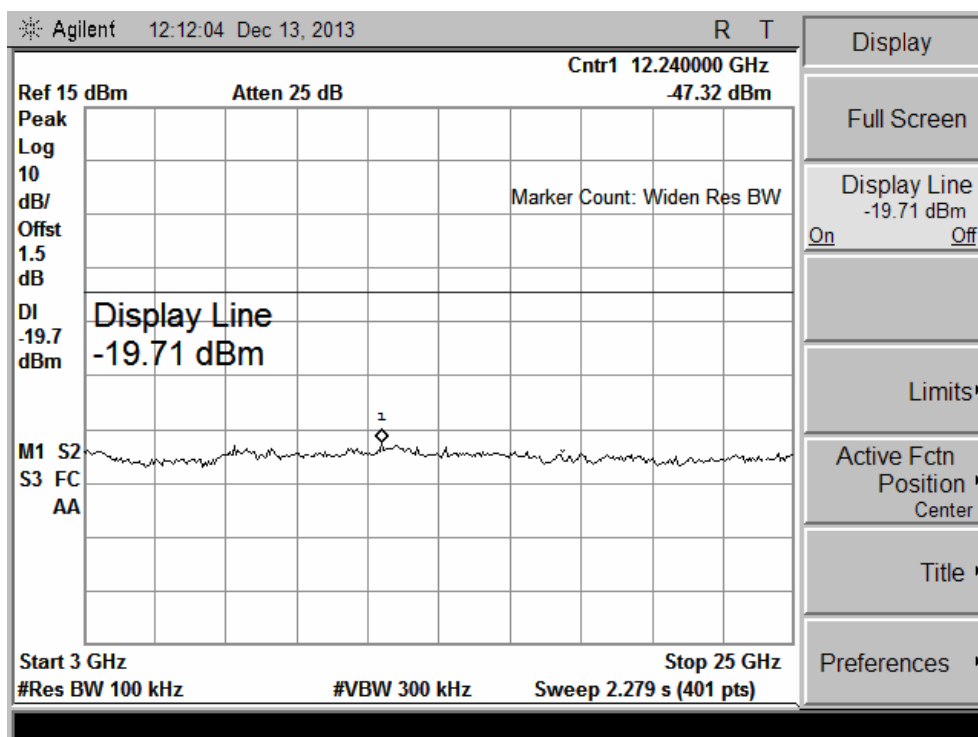


For WIFI Mode:

Band Edge
802.11b Low Channel

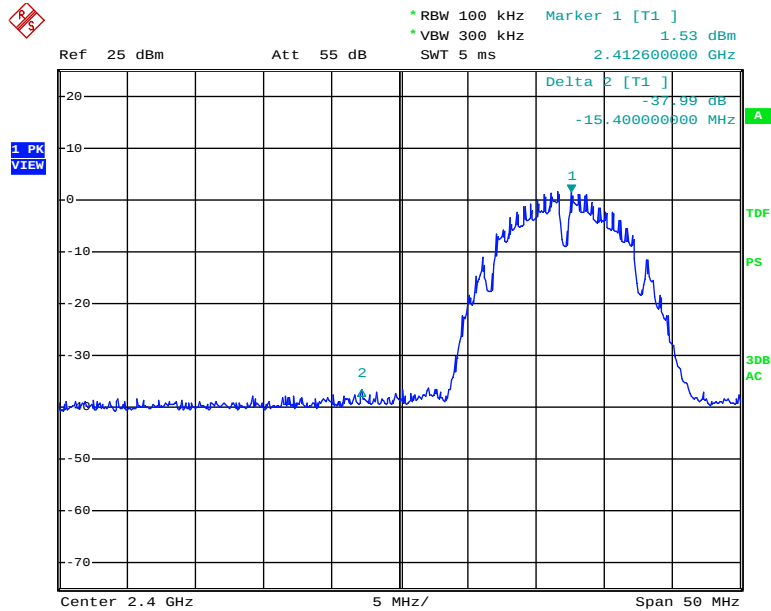


Date: 13.DEC.2013 10:44:33

802.11b High Channel

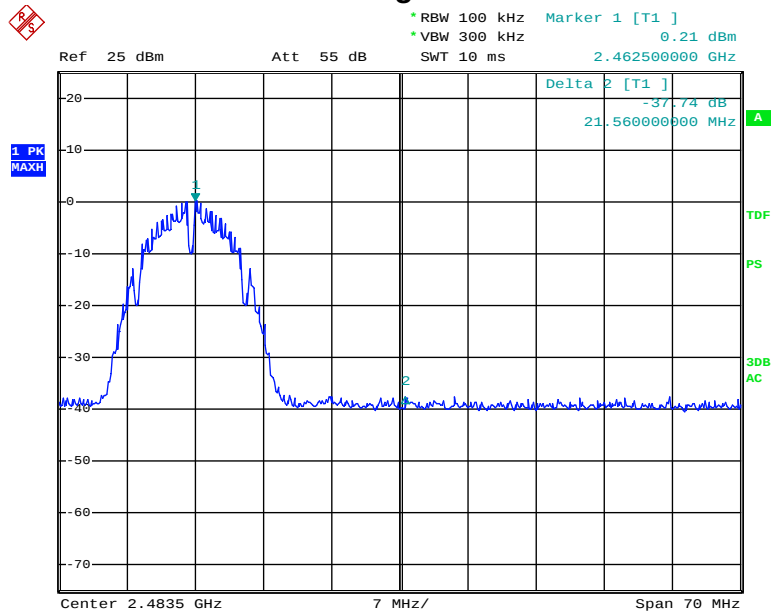


Date: 13.DEC.2013 10:45:54

802.11g Low Channel

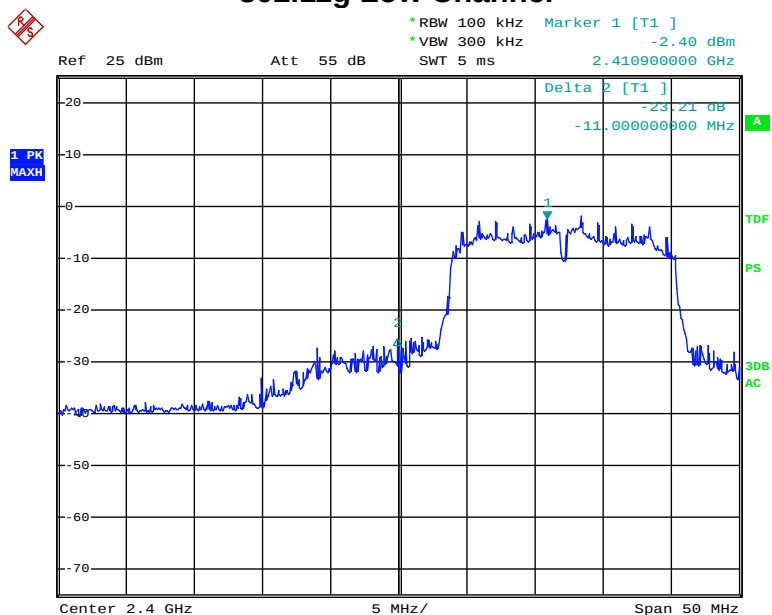


Date: 13.DEC.2013 10:49:15

802.11g High Channel

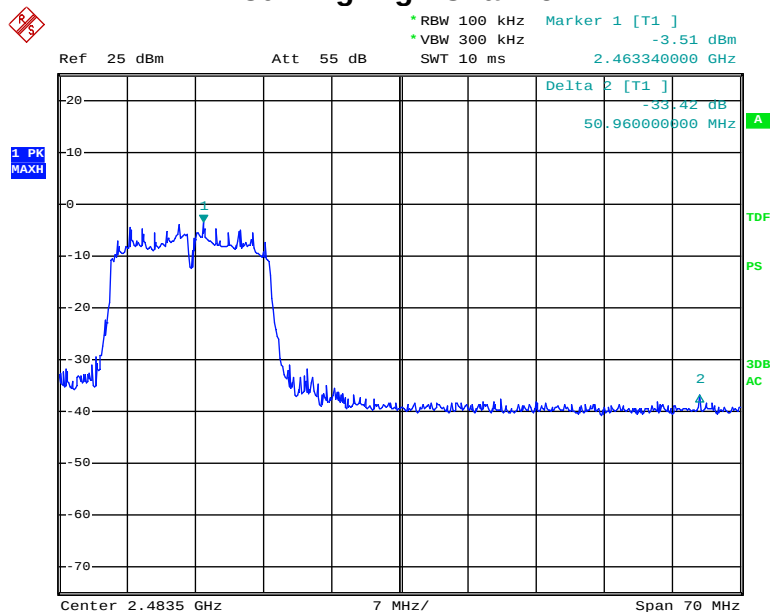


Date: 13.DEC.2013 10:46:52

802.11n(HT20) Low Channel

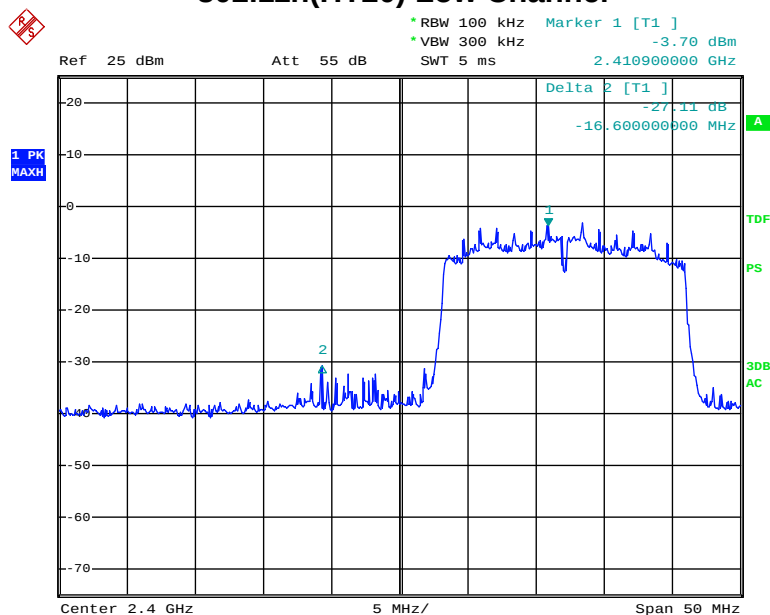


Date: 13.DEC.2013 10:50:14

802.11n(HT20) High Channel

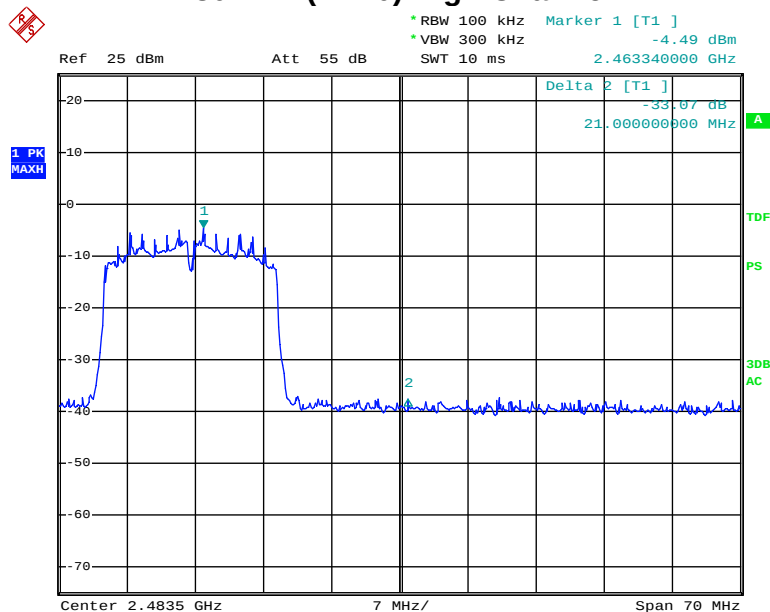


Date: 13.DEC.2013 10:51:09


Conducted Spurious Emissions 802.11b Low Channel

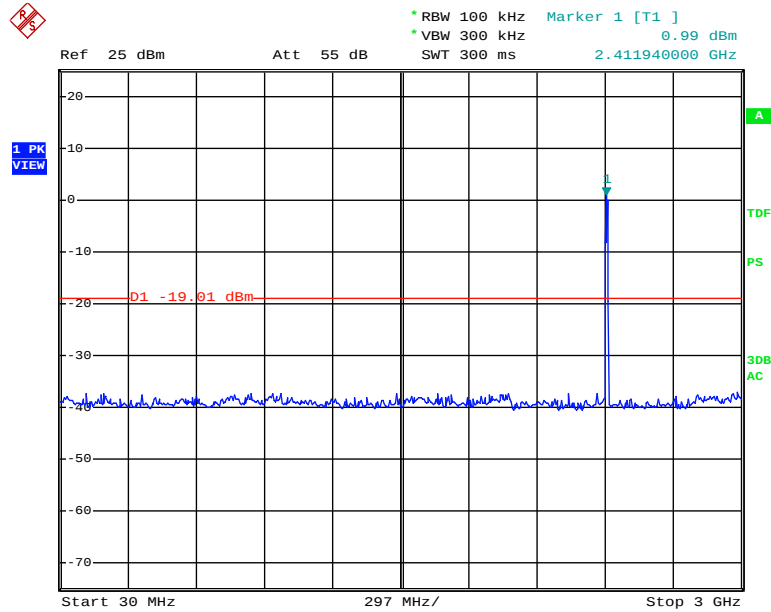


Date: 13.DEC.2013 10:52:42

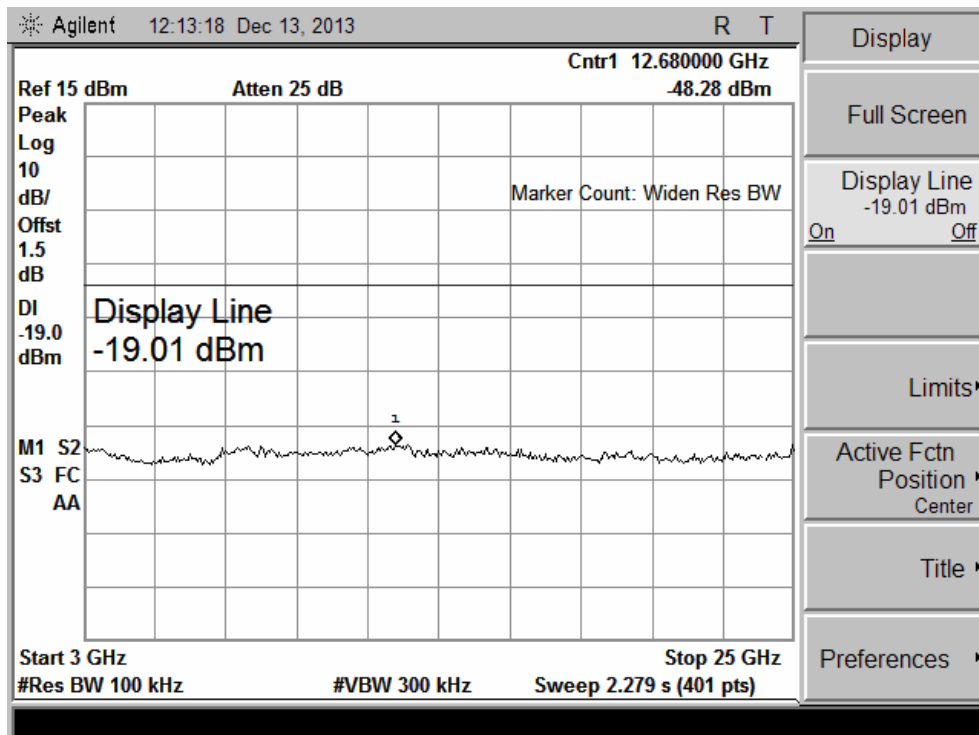


802.11b Middle Channel

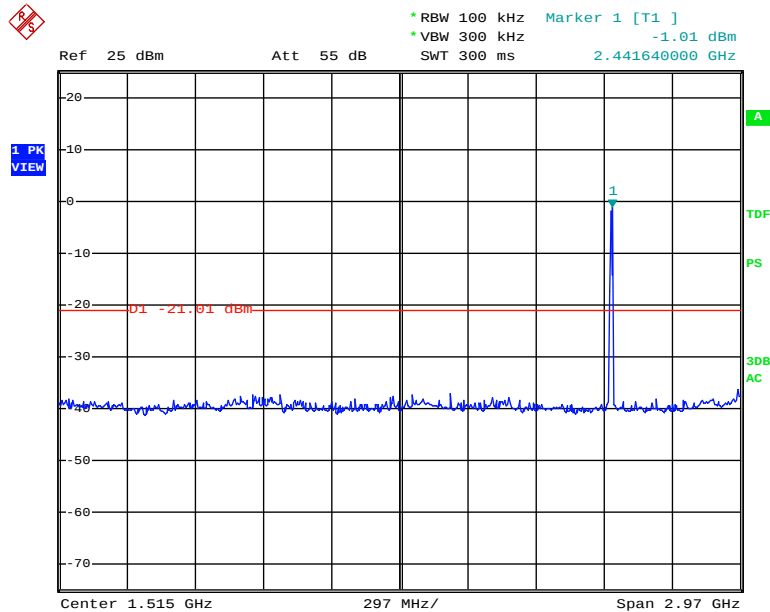


Date: 13.DEC.2013 10:53:18

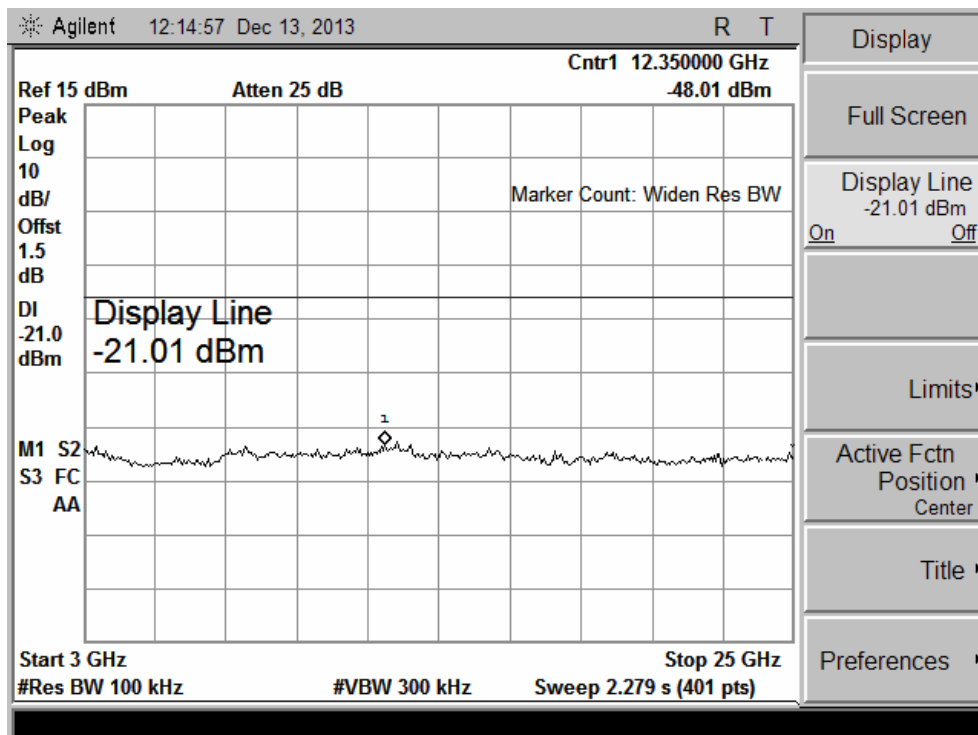


802.11b High Channel

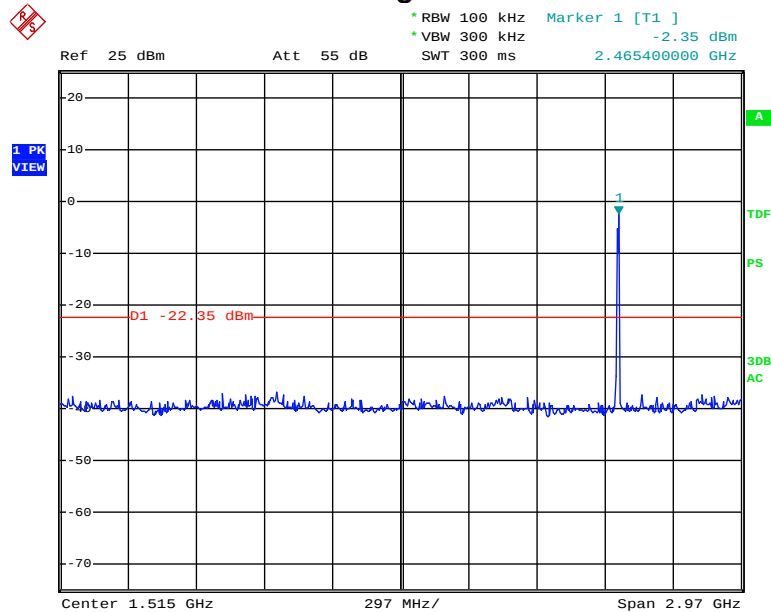


Date: 13.DEC.2013 10:53:51

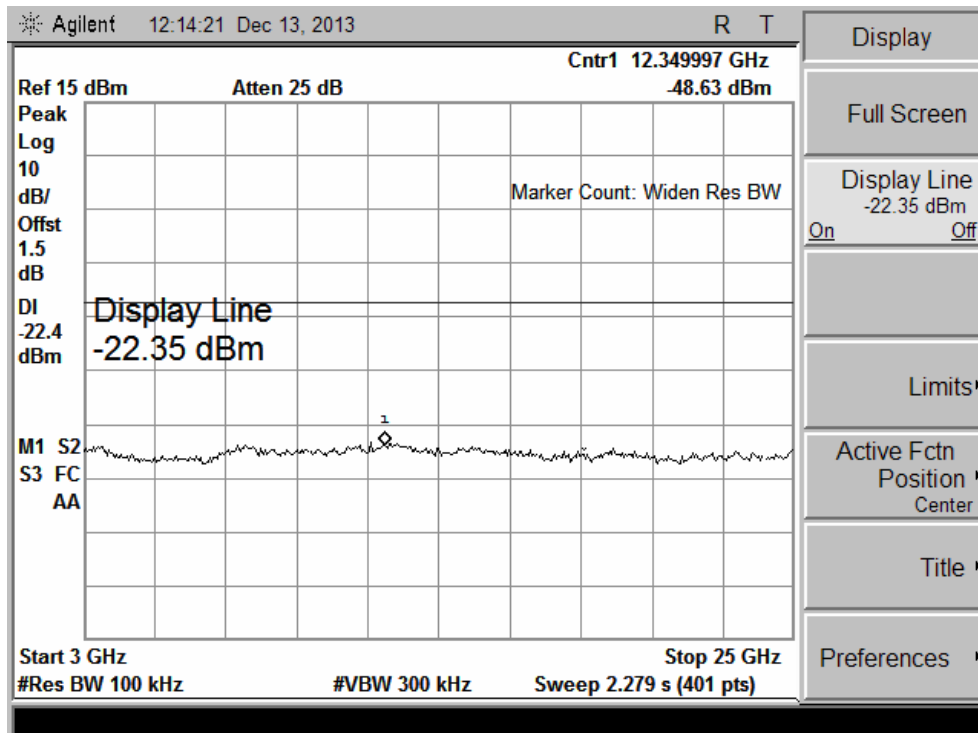


802.11g Low Channel

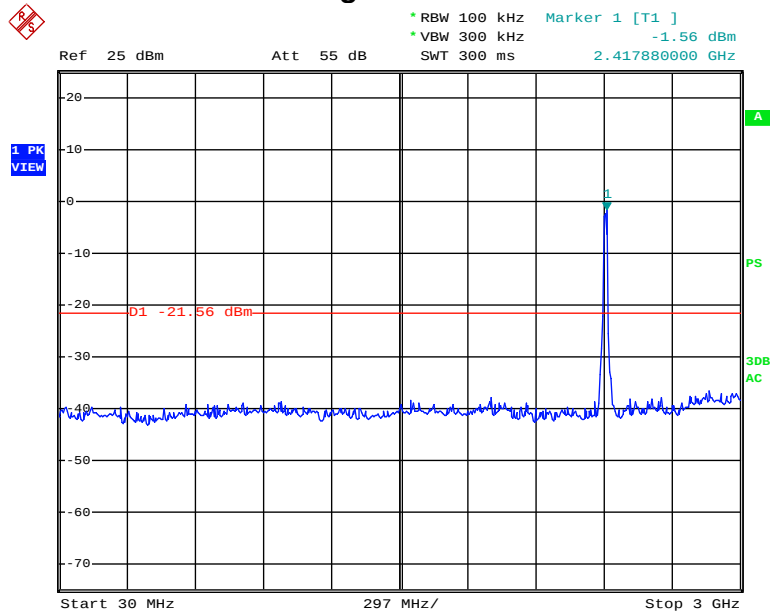


Date: 13.DEC.2013 14:13:28

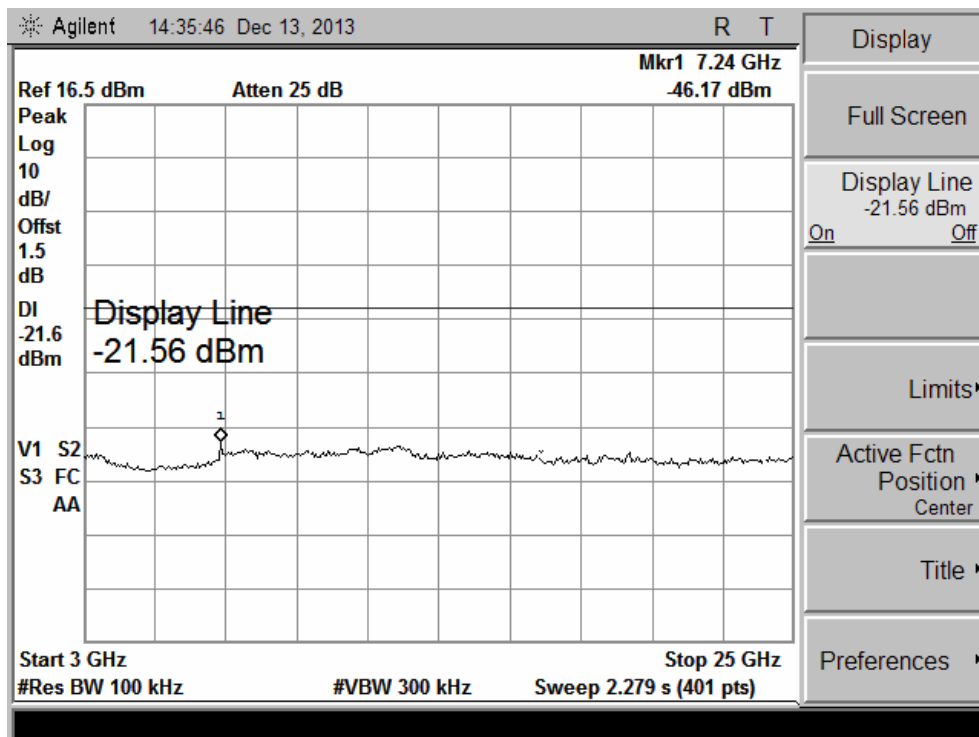


802.11g Middle Channel

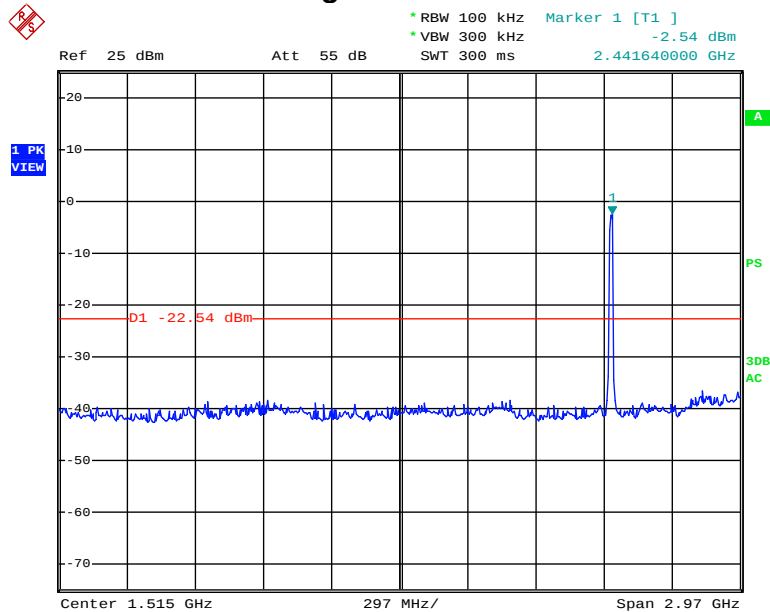


Date: 13.DEC.2013 14:14:41

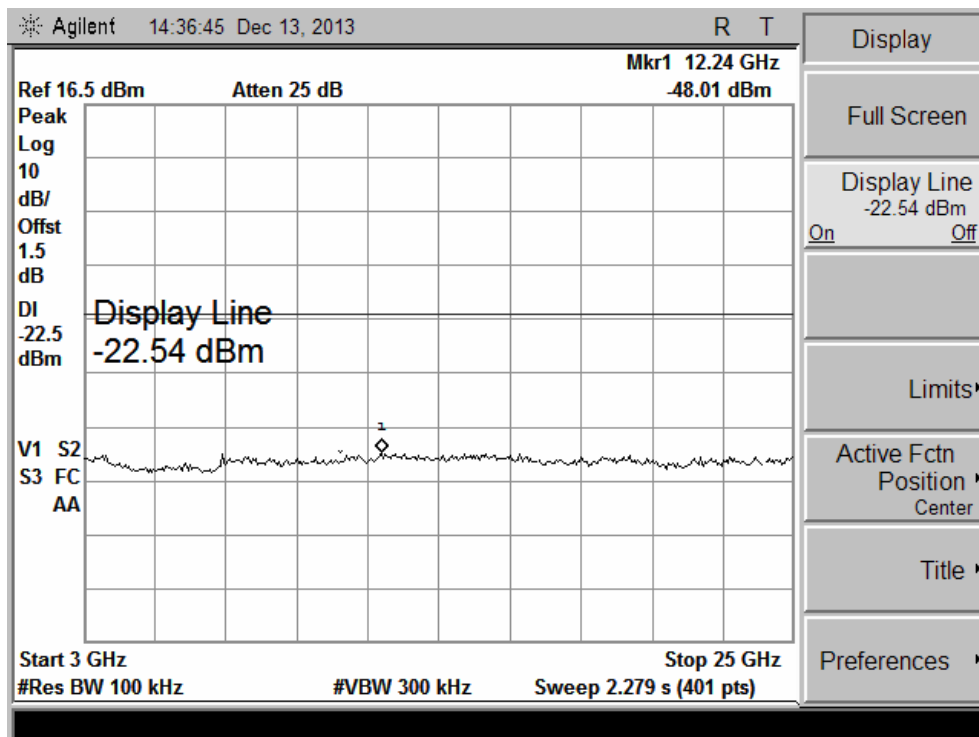


802.11g High Channel

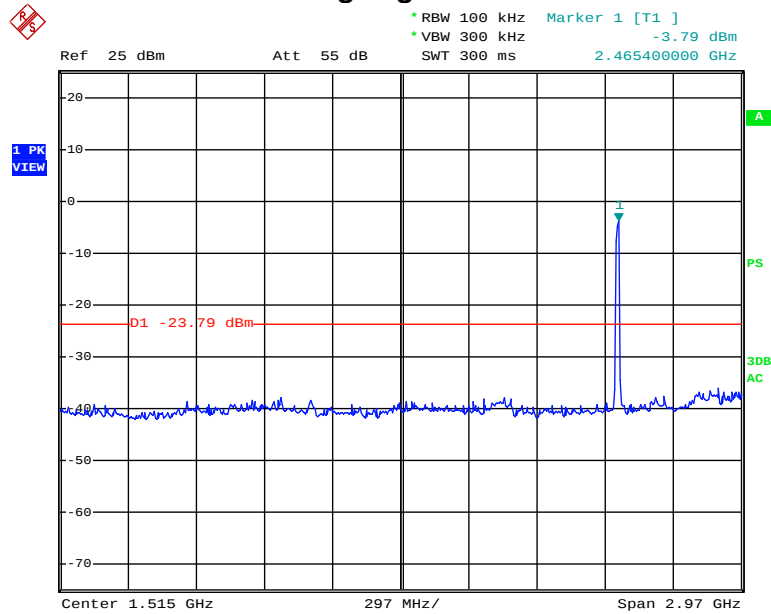


Date: 13.DEC.2013 14:15:37

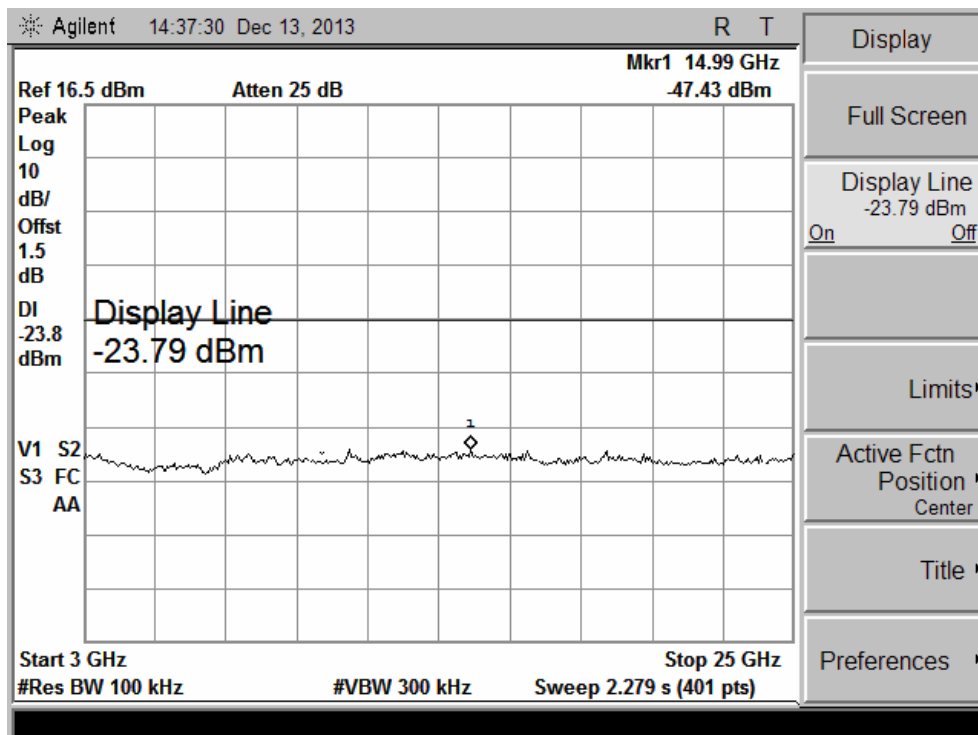


802.11n(HT20) Low Channel

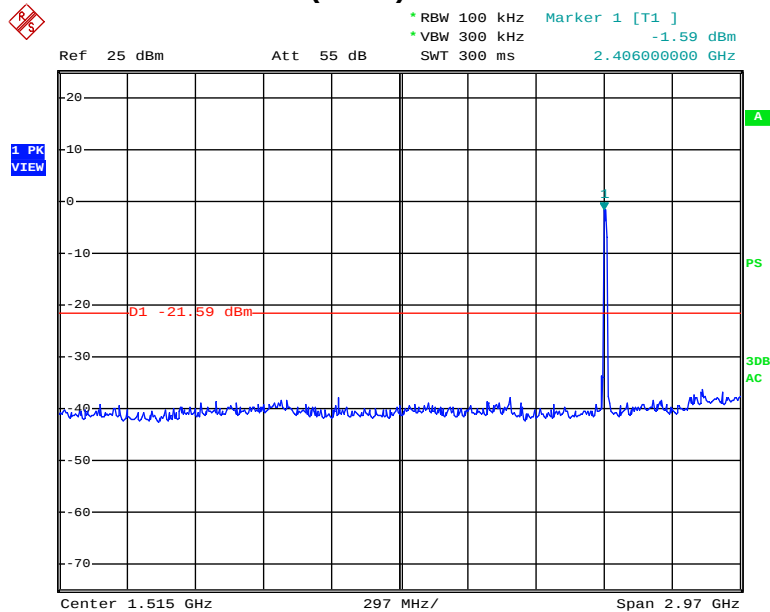


Date: 13.DEC.2013 14:16:10

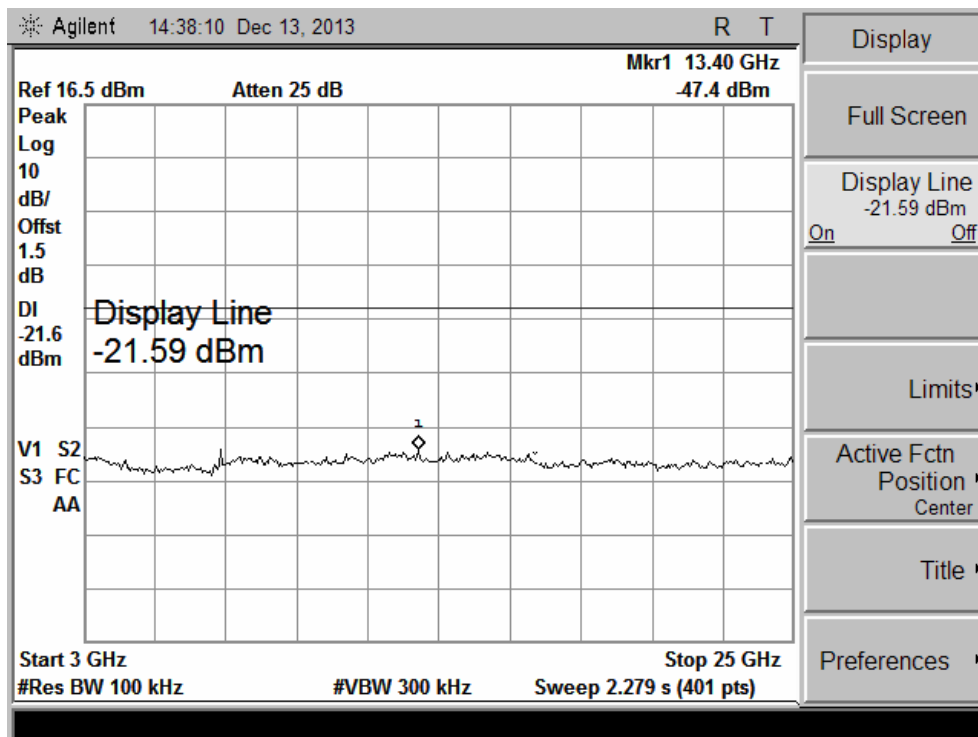


802.11n(HT20) Middle Channel

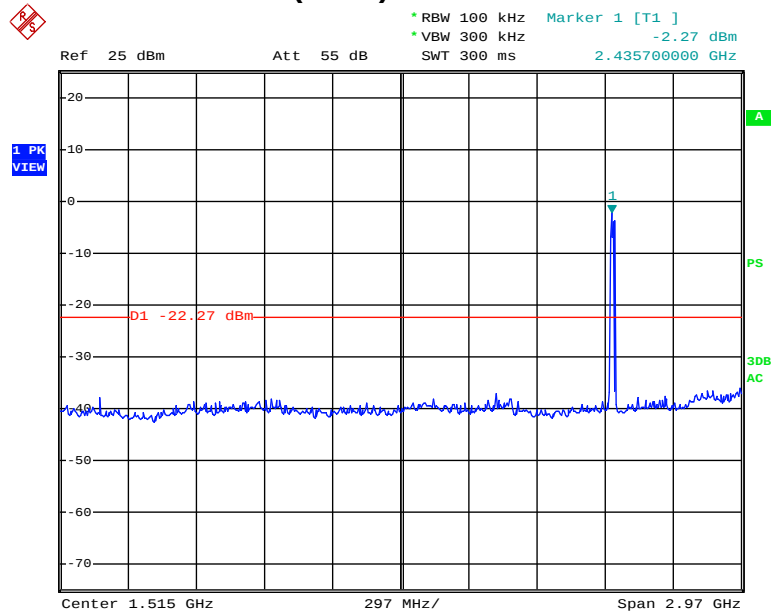


Date: 13.DEC.2013 14:16:59

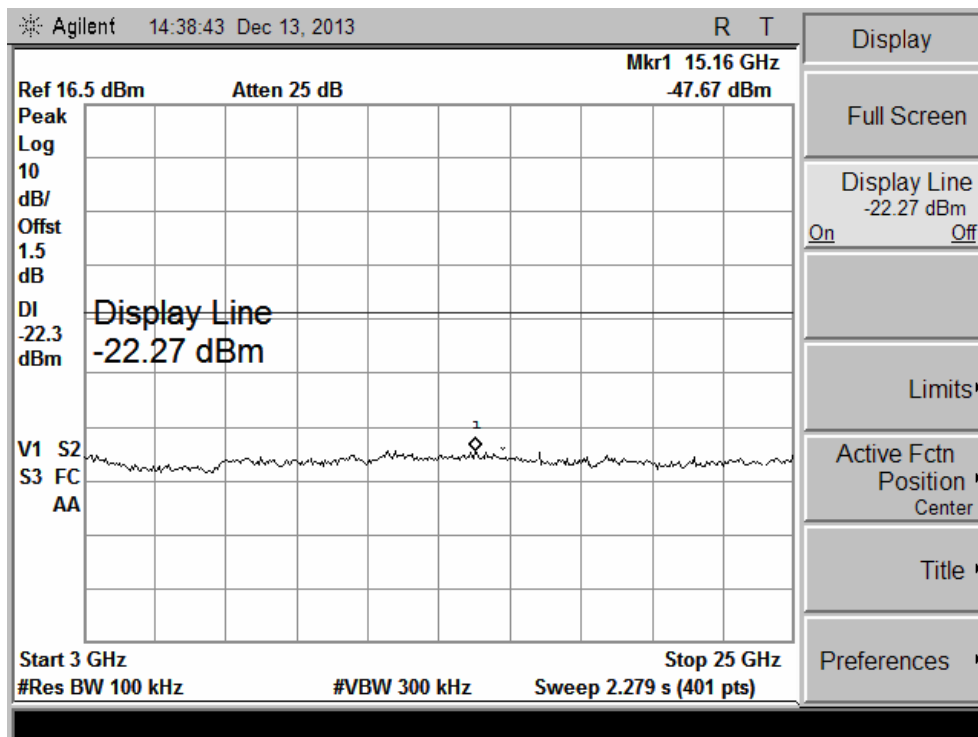

802.11n(HT20) High Channel

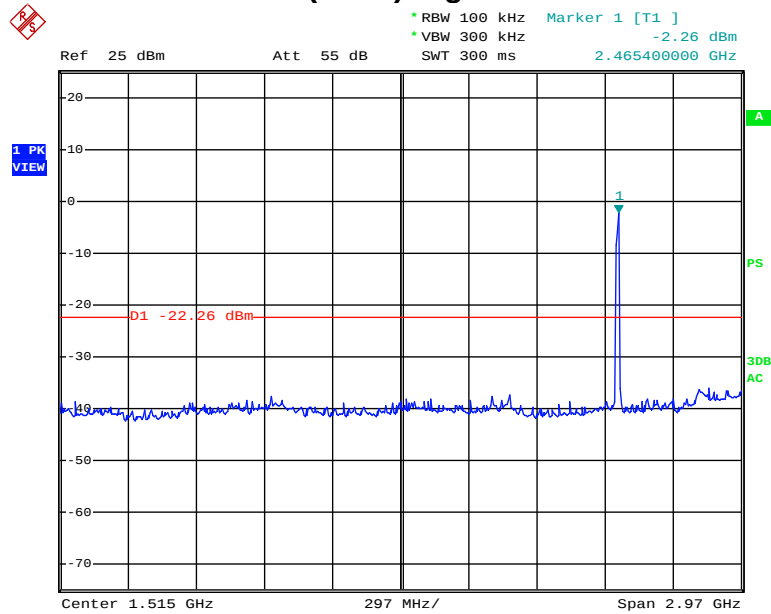


Date: 13.DEC.2013 14:17:39

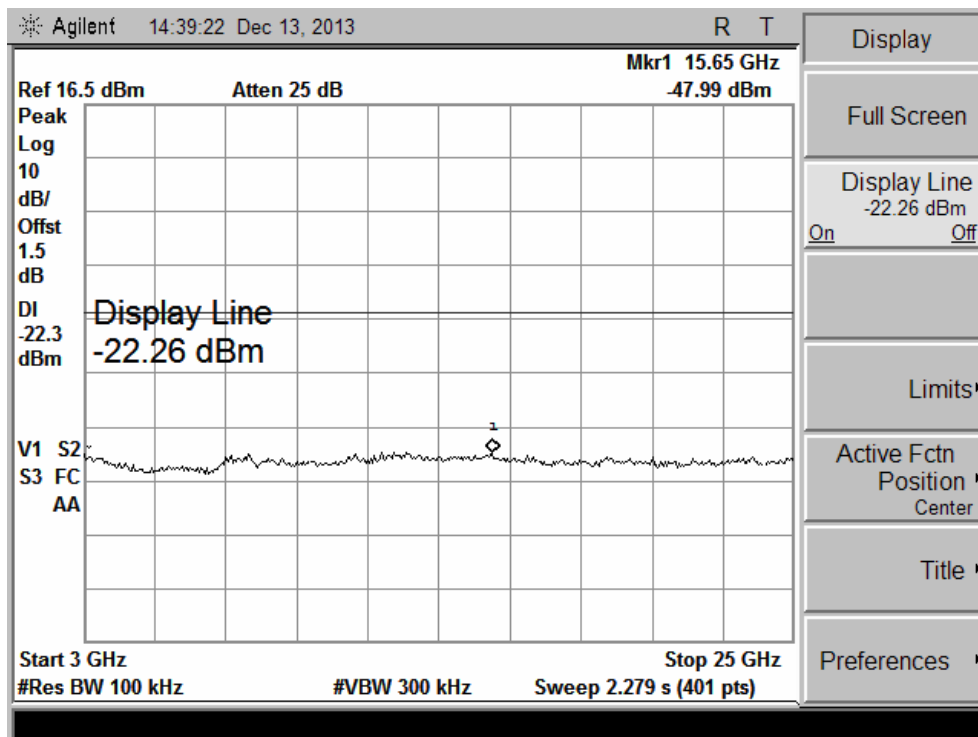


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

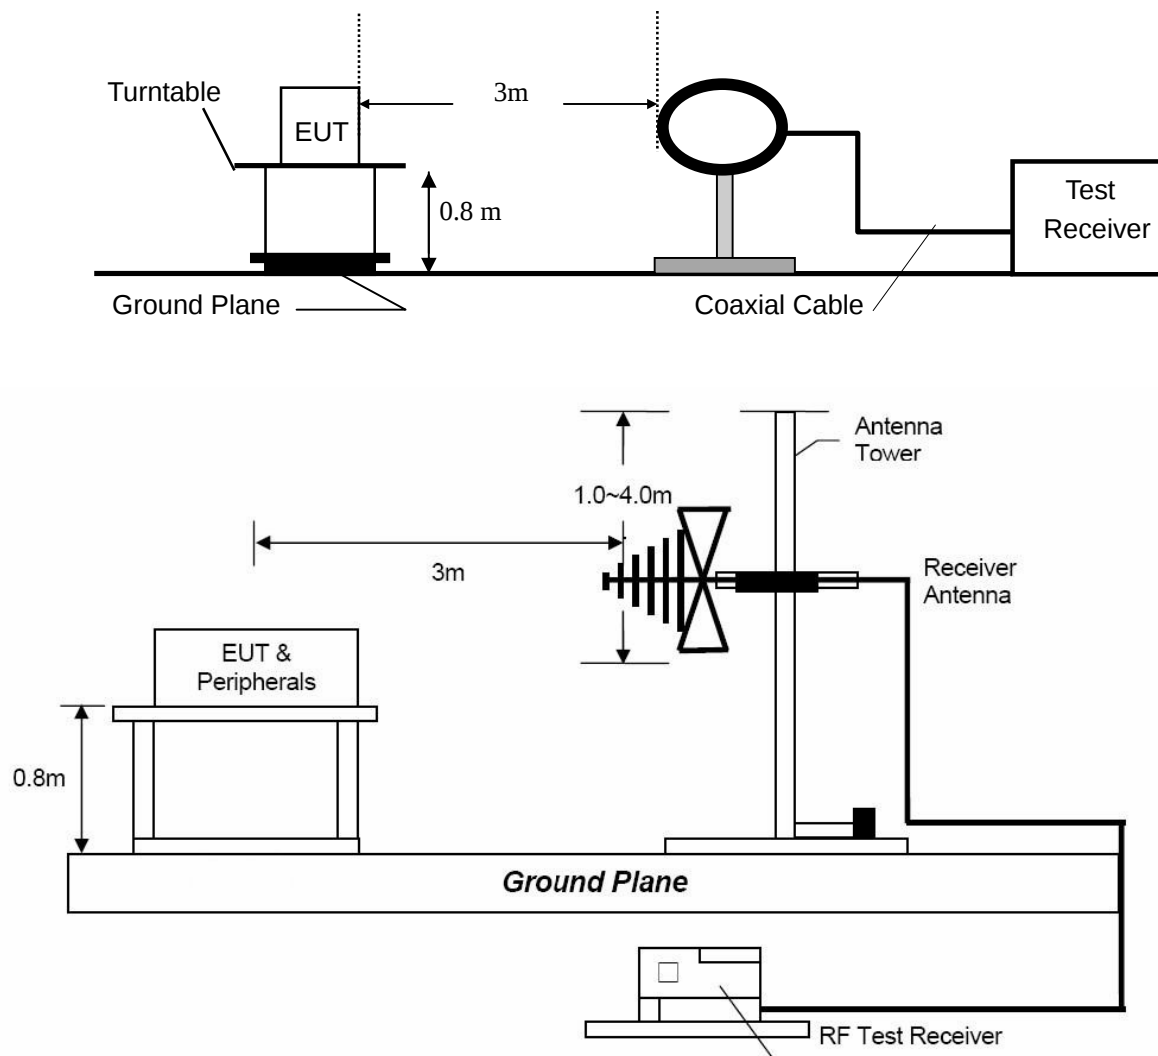

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

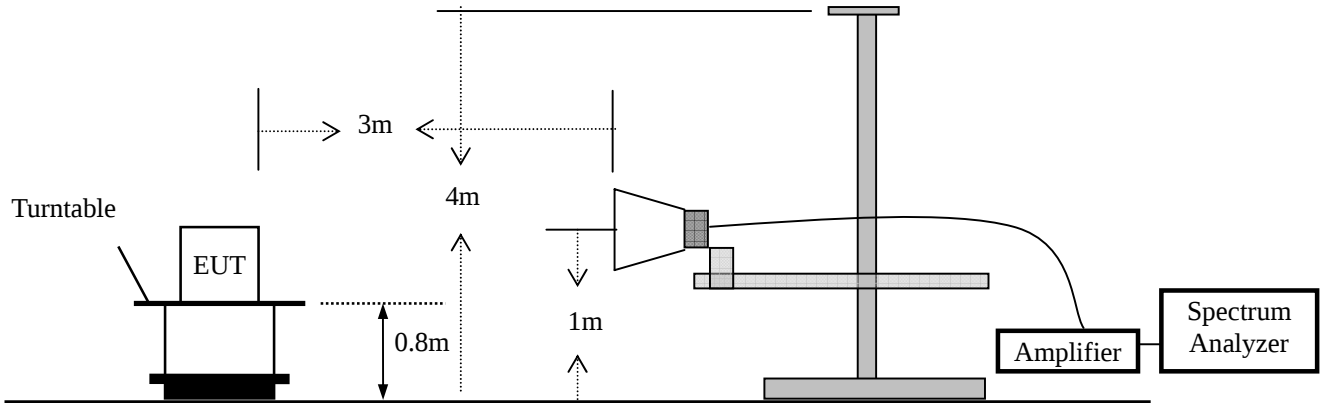

8.2 Measurement Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark :
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

For BT Mode:

Operation Mode:	TX	Temperature :	21 °C
Frequency Range:	9KHz~1GHz	Humidity :	46 %
Test Result:	PASS	Test By:	Sance
Measured Distance:	3m		
Test Date :	January 05, 2014		

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV)	Limit 3m (dBUV/m)	Margin (dB)	Note
63.9500	V	31.50	40.00	-8.50	QP
94.0199	V	28.90	43.50	-14.60	QP
188.1100	V	25.50	43.50	-18.00	QP
234.6699	V	25.40	46.00	-20.60	QP
298.6899	V	29.60	46.00	-16.40	QP
384.0500	V	28.20	46.00	-17.80	QP
101.7800	H	28.30	43.50	-15.20	QP
148.3400	H	25.10	43.50	-18.40	QP
197.8100	H	25.40	43.50	-18.10	QP
234.6699	H	30.20	46.00	-15.80	QP
384.0500	H	27.80	46.00	-18.20	QP
676.0198	H	32.50	46.00	-13.50	QP

Other emissions are lower than 10dB below the allowable limit.

Note: (1) Quasi-Peak detector is used except for others stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB.

Modulation: GFSK
(Low Frequency: 2402MHz)
Operation Mode: TX Mode (Low) Test Date : January 05, 2014
Frequency Range: 1-25GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	H	55.97	40.98	74.00	54.00	-18.03	-13.02
7206	H	52.69	42.14	74.00	54.00	-21.31	-11.86

4804	V	55.76	40.77	74.00	54.00	-18.24	-13.23
7206	V	53.25	41.73	74.00	54.00	-20.75	-12.27

Modulation: GFSK
(Mid Frequency: 2442MHz)
Operation Mode: TX Mode (Mid) Test Date : January 05, 2014
Frequency Range: 1-25GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4884	V	56.12	41.23	74.00	54.00	-17.88	-12.77
7326	V	54.24	41.79	74.00	54.00	-19.76	-12.21

4884	H	56.93	41.58	74.00	54.00	-17.07	-12.42
7326	H	54.87	42.05	74.00	54.00	-19.13	-11.95

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB
(4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Modulation: GFSK
(High Frequency: 2480MHz)
Operation Mode: TX Mode (High) Test Date : January 05, 2014
Frequency Range: 1-25GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	56.84	41.07	74.00	54.00	-17.16	-12.93
7440	V	55.02	42.24	74.00	54.00	-18.98	-11.76

4960	H	56.92	41.28	74.00	54.00	-17.08	-12.72
7440	H	55.76	42.45	74.00	54.00	-18.24	-11.55

Spurious Emission in restricted band:

Operation Mode: TX Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Frequency (MHz)	Polarity	Level		Limited		Margin		Result
		PK	AV	PK	AV	PK	AV	
GFSK								
2396.280	H	41.23	29.79	74.00	54.00	-32.77	-24.21	PASS
2393.390	V	41.39	30.21	74.00	54.00	-32.61	-23.79	PASS
2489.480	H	41.67	32.65	74.00	54.00	-32.33	-21.35	PASS
2488.920	V	41.50	32.01	74.00	54.00	-32.50	-21.99	PASS

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : $\pm 3.7\text{dB}$
 - (4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

For WIFI Mode:

Test Mode: 802.11g(the worst case)
Frequency Range: Below 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance
Test Date : January 05, 2014

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
63.9500	V	30.80	40.00	-9.20	QP
94.0199	V	29.50	43.50	-14.00	QP
15.2800	V	25.40	43.50	-18.10	QP
189.0800	V	23.10	43.50	-20.40	QP
234.6699	V	29.80	46.00	-16.20	QP
298.6899	V	33.20	46.00	-12.80	QP
100.8100	H	28.20	43.50	-15.30	QP
148.3400	H	23.20	43.50	-20.30	QP
234.6699	H	29.80	46.00	-16.20	QP
394.7200	H	28.40	46.00	-17.60	QP
440.3100	H	29.70	46.00	-16.30	QP
463.5899	H	25.50	46.00	-20.50	QP

Test Mode: 802.11b
Operation Mode: TX Mode (Low) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	58.70	51.57	74.00	54.00	-15.30	-2.43
7236	V	55.23	41.94	74.00	54.00	-18.77	-12.06

4824	H	57.66	49.53	74.00	54.00	-16.34	-4.47
7236	H	55.12	41.75	74.00	54.00	-18.88	-12.25

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : ± 3.7 dB
 - (4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Test Mode: 802.11b
Operation Mode: TX Mode (Mid) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	58.94	51.60	74.00	54.00	-15.06	-2.40
7311	V	56.45	42.09	74.00	54.00	-17.55	-11.91

4874	H	56.88	46.95	74.00	54.00	-17.12	-7.05
7311	H	56.29	41.98	74.00	54.00	-17.71	-12.02

Test Mode: 802.11b
Operation Mode: TX Mode (High) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	57.66	48.21	74.00	54.00	-16.34	-5.79
7386	V	56.85	42.48	74.00	54.00	-17.15	-11.52

4924	H	56.77	44.67	74.00	54.00	-17.23	-9.33
7386	H	56.53	42.33	74.00	54.00	-17.47	-11.67

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB
(4) Data of measurement within this frequency range shown " ---" in the table
above means the reading of emissions are attenuated more than 10dB
below the permissible limits.

Spurious Emission in restricted band:

Test Mode:	802.11b	Test Date :	January 05, 2014
Operation Mode:	TX	Temperature :	21 °C
Frequency Range:	Above 1GHz	Humidity :	46 %
Test Result:	PASS	Test By:	Sance
Measured Distance:	3m		

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2396.080	H	53.28	42.81	74.00	54.00	-20.72	-11.19
2396.120	V	53.30	43.02	74.00	54.00	-20.70	-10.98
2485.460	H	42.28	31.66	74.00	54.00	-31.72	-22.34
2484.100	V	42.34	31.70	74.00	54.00	-31.66	-22.30

Note: (1) All Readings are Peak Value and AV.
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 (3) Measurement uncertainty : $\pm 3.7\text{dB}$

Test Mode: 802.11g
Operation Mode: TX Mode (Low) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	58.20	43.40	74.00	54.00	-15.80	-10.60
7236	V	55.13	41.30	74.00	54.00	-18.87	-12.70

4824	H	57.20	42.19	74.00	54.00	-16.80	-11.81
7236	H	54.87	41.25	74.00	54.00	-19.13	-12.75

Test Mode: 802.11g
Operation Mode: TX Mode (Mid) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	57.92	43.19	74.00	54.00	-16.08	-10.81
7311	V	55.64	41.82	74.00	54.00	-18.36	-12.18

4874	H	57.58	42.32	74.00	54.00	-16.42	-11.68
7311	H	55.42	41.44	74.00	54.00	-18.58	-12.56

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : $\pm 3.7\text{dB}$
(4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Test Mode: 802.11g
Operation Mode: TX Mode (High) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	56.72	42.04	74.00	54.00	-17.28	-11.96
7386	V	56.68	42.62	74.00	54.00	-17.32	-11.38

4924	H	55.32	41.10	74.00	54.00	-18.68	-12.90
7386	H	56.40	42.23	74.00	54.00	-17.60	-11.77

Spurious Emission in restricted band:

Test Mode: 802.11g
Operation Mode: TX Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2396.250	H	61.15	47.86	74.00	54.00	-12.85	-6.14
2396.140	V	62.49	48.12	74.00	54.00	-11.51	-5.88
2485.320	H	47.25	34.78	74.00	54.00	-26.75	-19.22
2484.440	V	46.37	33.03	74.00	54.00	-27.63	-20.97

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : $\pm 3.7\text{dB}$
 - (4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Test Mode: 802.11n(HT20)
Operation Mode: TX Mode (Low) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4824	V	56.85	42.11	74.00	54.00	-17.15	-11.89
7236	V	55.32	41.53	74.00	54.00	-18.68	-12.47

4824	H	56.94	42.49	74.00	54.00	-17.06	-11.51
7236	H	55.17	41.22	74.00	54.00	-18.83	-12.78

Test Mode: 802.11n(HT20)
Operation Mode: TX Mode (Mid) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4874	V	56.18	42.20	74.00	54.00	-17.82	-11.80
7311	V	55.92	42.16	74.00	54.00	-18.08	-11.84

4874	H	55.72	41.66	74.00	54.00	-18.28	-12.34
7311	H	55.76	42.01	74.00	54.00	-18.24	-11.99

Note: (1) All Readings are Peak Value and AV.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB
(4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

Test Mode: 802.11n(HT20)
Operation Mode: TX Mode (High) Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4924	V	56.56	42.07	74.00	54.00	-17.44	-11.93
7386	V	56.88	42.52	74.00	54.00	-17.12	-11.48

4924	H	55.42	41.38	74.00	54.00	-18.58	-12.62
7386	H	56.65	42.30	74.00	54.00	-17.35	-11.70

Spurious Emission in restricted band:

Test Mode: 802.11n(HT20)
Operation Mode: TX Test Date : January 05, 2014
Frequency Range: Above 1GHz Temperature : 21 °C
Test Result: PASS Humidity : 46 %
Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2396.140	H	60.72	46.95	74.00	54.00	-13.28	-7.05
2396.120	V	62.11	48.83	74.00	54.00	-11.89	-5.17
2485.500	H	42.82	31.02	74.00	54.00	-31.18	-22.98
2484.980	V	42.57	31.45	74.00	54.00	-31.43	-22.55

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : ± 3.7 dB
 - (4) Data of measurement within this frequency range shown " ---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is integral antenna that no antenna other than that furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.0dBi, So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 25, 2013	Nov. 24, 2014
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2013	Nov. 27, 2014
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	Nov. 09, 2013	Nov. 08, 2014
Cable	Huber+Suhner	CIL02	N/A	Nov. 09, 2013	Nov. 08, 2014
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 09, 2013	Nov. 08, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct. 24, 2013	Oct. 23, 2014
Horn Antenna	Com-Power	AH-118	071078	Nov. 07, 2013	Nov. 06, 2014
Loop antenna	Daze	ZA30900A	0708	Oct.11, 2013	Oct.10, 2014
Spectrum Analyzer	Agilent	E4408B	MY41440717	Nov.05, 2013	Nov.04, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	Nov.05, 2013	Nov.04, 2014
L.I.S.N	Rohde & Schwarz	ENV 216	101317	Nov. 09, 2013	Nov. 08, 2014

---End of report---