

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Archos S.A.

12 rue Ampère 91430 Igny France

E.U.T.: Archos smart home tablet

Model Name: ACH70

Brand Name: ARCHOS

FCC ID: SOVACH70

Report Number: NTC1312757F

Test Date(s): November 29, 2013 to January 10, 2014

Report Date(s): January 10, 2014

Prepared by

Dongguan Nore Testing Center Co., Ltd.

**Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road,
Nancheng District, Dongguan, Guangdong, China.**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer



Chris Pan / Engineer



Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	3
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	5
1.6 TEST FACILITY AND LOCATION	5
1.7 SUMMARY OF TEST RESULTS	6
2. CONDUCTED EMISSIONS TEST	7
2.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	7
2.2 TEST CONDITION	7
2.3 MEASUREMENT RESULTS	7
3. RADIATED EMISSION TEST	10
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
3.2 MEASUREMENT PROCEDURE	11
3.3 LIMIT	12
3.4 MEASUREMENT RESULTS	13
4. OCCUPIED BANDWIDTH	17
4.1 MEASUREMENT PROCEDURE	17
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
4.3 LIMIT	17
4.4 MEASUREMENT RESULTS	17
5 TRANSMISSION TIME	19
5.1 MEASUREMENT PROCEDURE	19
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
5.3 LIMIT	19
5.4 MEASUREMENT RESULTS	19
6. ANTENNA APPLICATION	21
6.1 ANTENNA REQUIREMENT	21
6.2 MEASUREMENT RESULTS	21
7. TEST EQUIPMENT LIST	22

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This is a home tablet computer, which with WIFI, BLE, RF switch, etc., functions. It's powered by DC 5V come from external adapter or DC 3.7V internal Li-ion battery. For more details features, please refer to User's Manual.

Manufacturer : Archos S.A.
Address : 12 rue Ampère 91430 Igny France

Factory : Luckstar(Shenzhen) Digital Technology Co., Ltd.
Address : 21st FL, Fuchun Orient Bldg, Shennan Ave. 7006#,
Shenzhen 518040, P.R.C

For BT Function

Frequency : 2402-2480MHz
Bluetooth Version : Bluetooth 4.0 Version
Modulation : GFSK
Number of Channel : 40
Channel space : 2MHz
Antenna Type : Integral
Antenna Gain : 2.0dBi (Declaration by factory)
Power Supply : DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Note : N/A

WIFI Function

Frequency: : 2412MHz~2462MHz(802.11b/802.11g/802.11n(HT20))
Number of Channel : 11
Channel space : 5MHz
Antenna Type : Integral
Antenna Gain : 2.0dBi (Declaration by factory)
Modulation Type : CCK, DQPSK, DBPSK for 802.11b
: OFDM for 802.11g/n
Power Supply : DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Model name : ACH70
Note : N/A

For RF Switch Function

Frequency: : 433.92MHz
Number of Channel : 1
Antenna Type : PCB
Antenna Gain : 0.5dBi (Declaration by factory)
Modulation Type : ASK
DC 5V com from external adapter
Adapter: M/N: THX-050200KB
Power Supply : Input: AC 100-240V 50/60Hz, 0.65A Max
Output: DC 5V 2A
DC 3.7V Li-ion battery
Model name : ACH70
Note : N/A

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SOVACH70 filing to comply with Section 15.231 of the FCC Part 15 (2012), Subpart C Rule.

1.3 Test Methodology

The radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.

Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 46405-9743.

Dongguan NTC Co., Ltd.


Building D, Gaosheng Science and Technology Park,
Hongtu Road, Nancheng District, Dongguan City,
Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.231&15.209	Radiated Emission	Compliant
§15.231(c)	Occupied bandwidth	Compliant
§15.231(a)	Transmission time	Compliant
§15.203	Antenna Requirement	Compliant

2. Conducted Emissions Test

2.1 Test SET-UP (Block Diagram of Configuration)

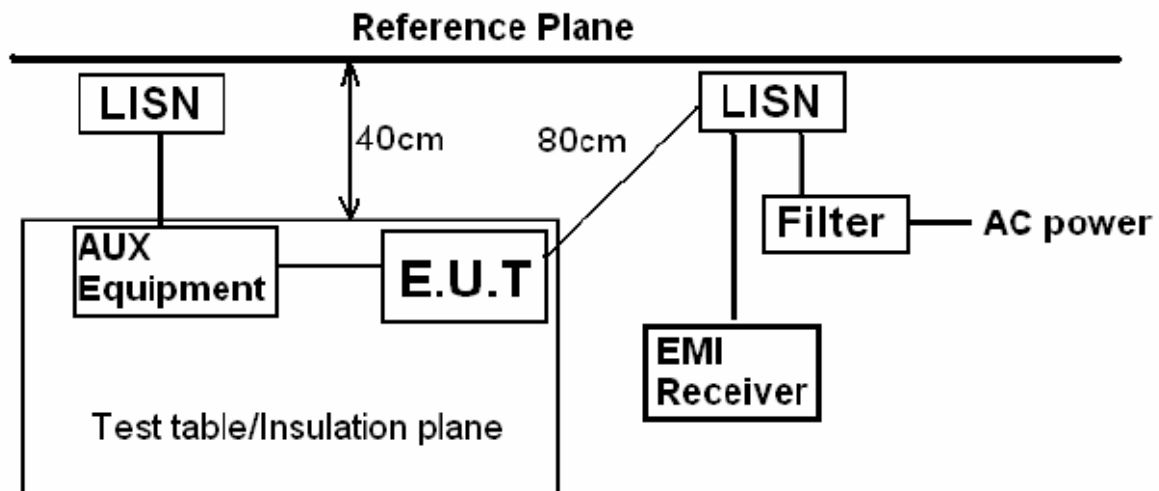

2.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX (RF Switch)

2.3 Measurement Results

Pass.


Please refer to following plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2014-1-5 11:11:23

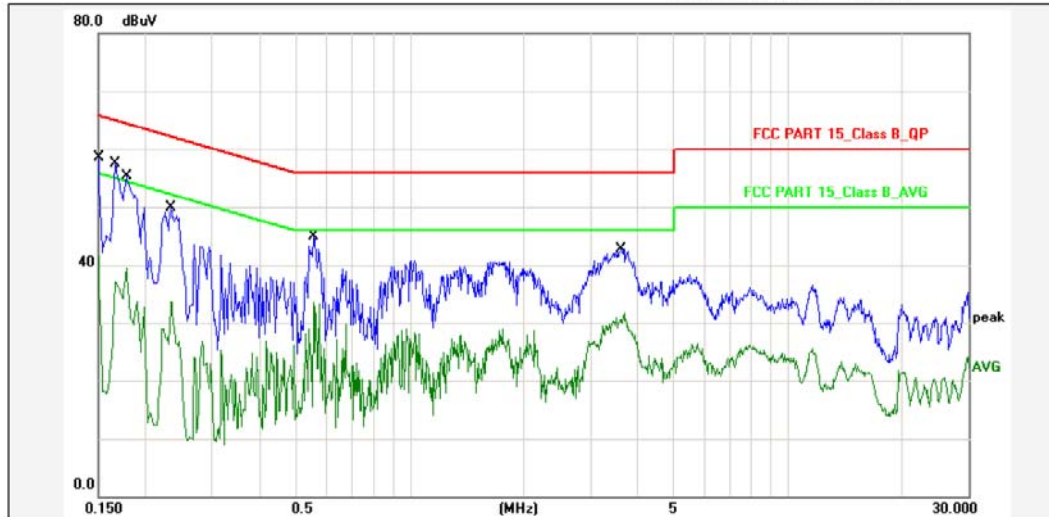

Report No.: ACH70

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Applicant: Archos S.A.

Product: Archos smart home tablet

Model No.: ACH70

Phase: N

Temp.()/Hum.(%): 21(C) / 46 %

Power Rating: AC 120V/60Hz

Test Engineer: Sance

Test Mode: TX (RF Switch)

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1500	10.80	44.80	55.60	65.99	-10.39	QP	P	
2	0.1500	10.80	27.60	38.40	55.99	-17.59	AVG	P	
3	0.1660	10.80	43.70	54.50	65.15	-10.65	QP	P	
4	0.1660	10.80	23.30	34.10	55.15	-21.05	AVG	P	
5	0.1780	10.80	41.40	52.20	64.57	-12.37	QP	P	
6	0.1780	10.80	25.60	36.40	54.57	-18.17	AVG	P	
7	0.2340	10.80	36.10	46.90	62.30	-15.40	QP	P	
8	0.2340	10.80	19.90	30.70	52.30	-21.60	AVG	P	
9	0.5580	10.80	31.00	41.80	56.00	-14.20	QP	P	
10	0.5580	10.80	19.80	30.60	46.00	-15.40	AVG	P	
11	3.6300	10.80	28.90	39.70	56.00	-16.30	QP	P	
12	3.6300	10.80	17.00	27.80	46.00	-18.20	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

File:ACH70\#23


Page: 1



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Conduction

Test Time: 2014-1-5 11:16:32

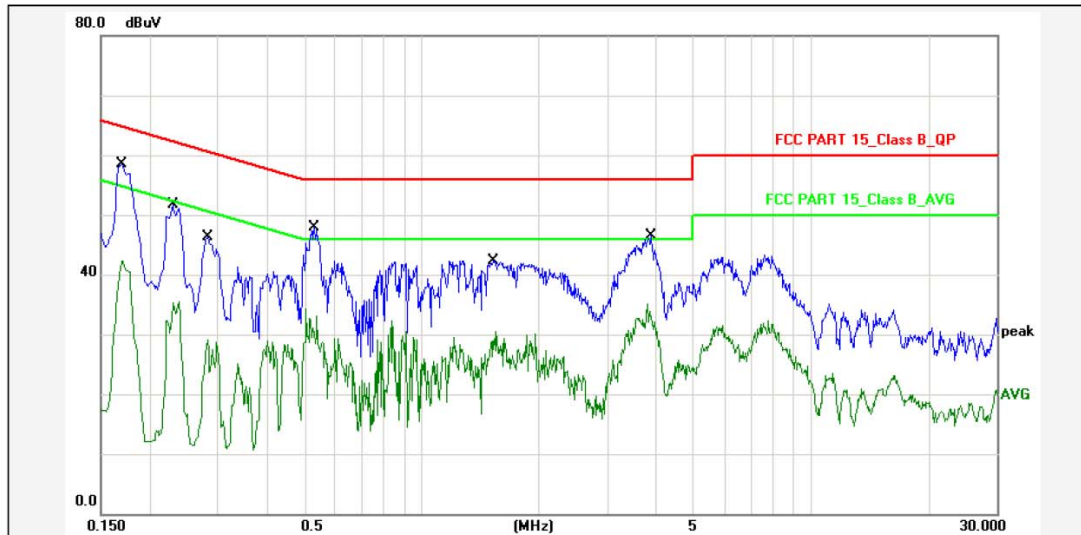

Report No.: ACH70

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Archos S.A.

Temp.()/Hum.(%): 21(C) / 46 %

Product: Archos smart home tablet

Power Rating: AC 120V/60Hz

Model No.: ACH70

Test Engineer: Sance

Test Mode: TX (RF Switch)

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1700	10.80	44.70	55.50	64.96	-9.46	QP	P	
2	0.1700	10.80	28.60	39.40	54.96	-15.56	AVG	P	
3	0.2300	10.80	37.90	48.70	62.45	-13.75	QP	P	
4	0.2300	10.80	21.60	32.40	52.45	-20.05	AVG	P	
5	0.2819	10.80	32.60	43.40	60.76	-17.36	QP	P	
6	0.2819	10.80	15.40	26.20	50.76	-24.56	AVG	P	
7	0.5299	10.80	34.00	44.80	56.00	-11.20	QP	P	
8	0.5299	10.80	20.50	31.30	46.00	-14.70	AVG	P	
9	1.5339	10.80	28.50	39.30	56.00	-16.70	QP	P	
10	1.5339	10.80	16.70	27.50	46.00	-18.50	AVG	P	
11	3.8980	10.80	32.70	43.50	56.00	-12.50	QP	P	
12	3.8980	10.80	19.40	30.20	46.00	-15.80	AVG	P	

Note: Level=Reading+Factor.

Margin=Limit-Level.


File:ACH70\#24

Page: 1


3. Radiated Emission Test

3.1 Test SET-UP (Block Diagram of Configuration)

(1) Radiated Emission Test Set-Up, Frequency Below 30MHz

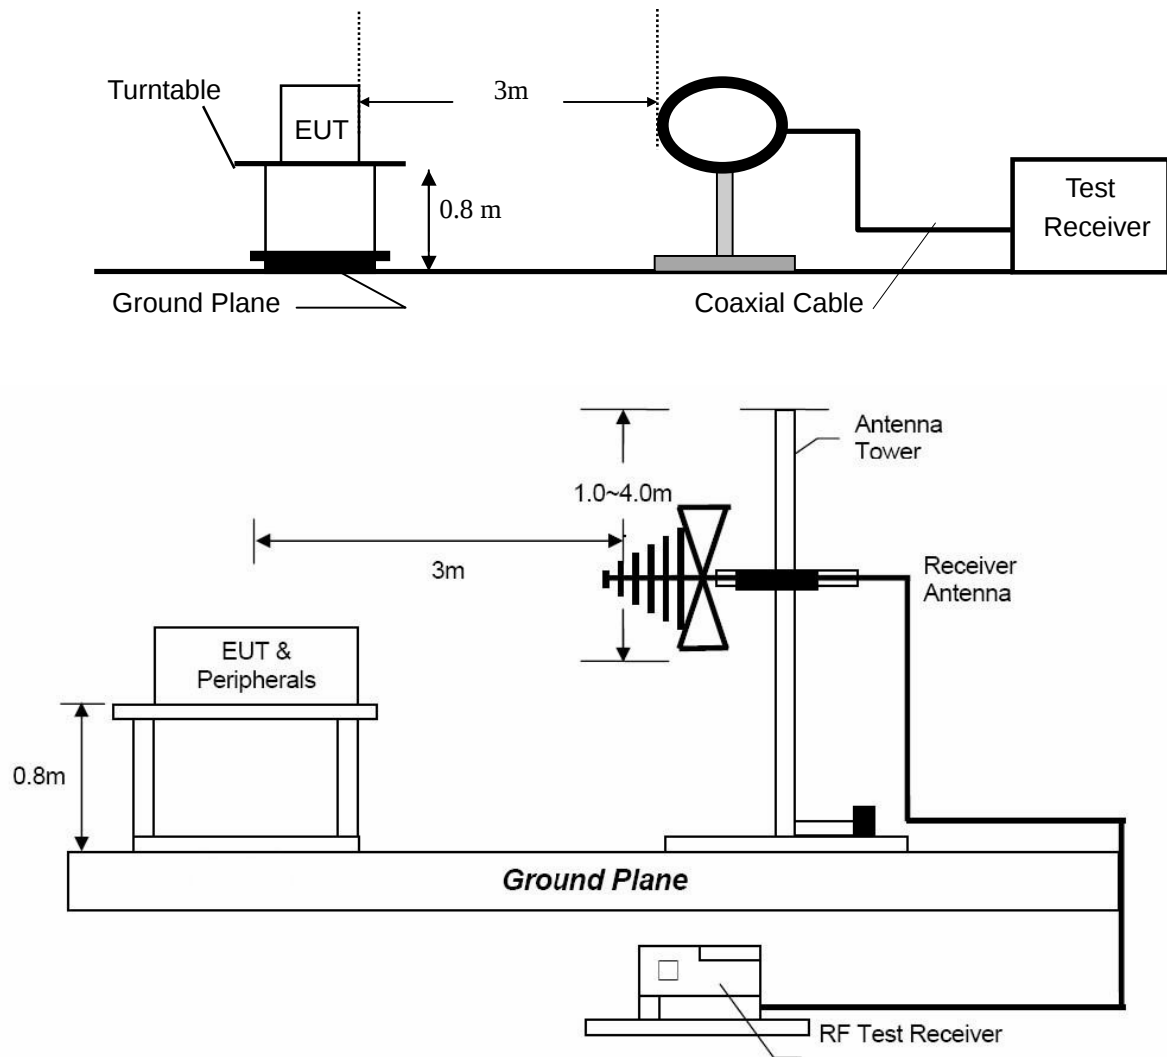

(2) Radiated Emission Test Set-Up, Frequency above 1GHz

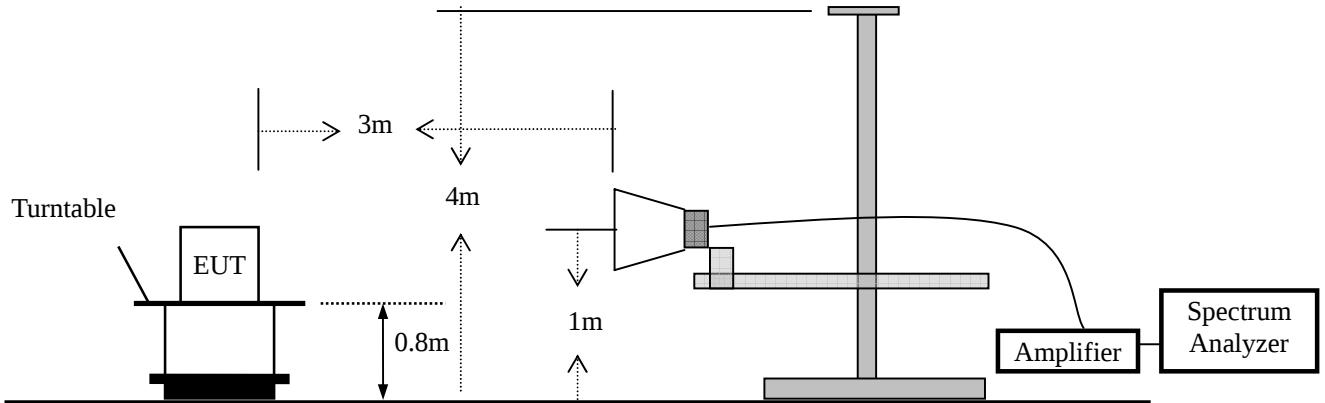

3.2 Measurement Procedure

- A The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- B The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- C The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- D For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

3.3 Limit

Table A [0.009MHz~1GHz]

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark :
- (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Table B

Fundamental Frequency (MHz)	Field Strength of Fundamental		Field Strength of Spurious Emissions	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
40.66-40.70	2250	67.04	225	47.04
70-130	1250	61.94	125	41.94
130-174	1250-3370**	61.9-70.55	125-375**	41.94-51.48
174-260	3750	71.48	375	51.48
260-470	3750-12500**	71.48-81.94	375-1250**	51.48-61.94
Above 470	12500	81.94	1250	61.94

**) Linear interpolations

3.4 Measurement Results

Operation Mode: TX
Frequency Range: 9KHz~1GHz
Test Result: PASS
Measured Distance: 3m
Test Date : January 05, 2014

Temperature : 21 °C
Humidity : 46 %
Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
63.9500	V	32.80	40.00	-7.20	QP
94.0199	V	31.50	43.50	-12.00	QP
234.6699	V	31.20	46.00	-14.80	QP
247.2800	V	29.40	46.00	-16.60	QP
298.6899	V	33.70	46.00	-12.30	QP
320.0298	V	30.80	46.00	-15.20	QP
105.6600	H	15.85	43.50	-27.65	QP
215.2700	H	14.91	43.50	-28.59	QP
251.1600	H	15.69	46.00	-30.31	QP
275.4100	H	17.48	46.00	-28.52	QP
350.1000	H	18.37	46.00	-27.63	QP
421.8800	H	20.40	46.00	-25.60	QP

Other emissions are lower than 10dB below the allowable limit.

Note: (1) Quasi-Peak detector is used except for others stated.
(2) Emission Level= Reading Level+Probe Factor +Cable Loss
(3) Measurement uncertainty : ± 3.7 dB.


Operation Mode: TX
Test Result: PASS
Measured Distance: 3m
Test Date : January 05, 2013
Temperature : 21 °C
Humidity : 46 %
Test By: Sance

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
433.920	V	73.34	100.8	-27.46	peak
433.920	V	65.25	80.8	-15.55	AV
868.080	V	46.50	80.8	-34.30	peak
868.080	V	38.41	60.8	-22.39	AV
1300.000	V	44.71	74.0	-29.29	peak
1300.000	V	36.62	54.0	-17.38	AV
2170.000	V	50.31	80.8	-30.49	peak
2170.000	V	42.22	60.8	-18.58	AV
433.920	H	74.18	100.8	-26.62	peak
433.920	H	66.09	80.8	-14.71	AV
868.080	H	43.70	80.8	-37.10	peak
868.080	H	35.61	60.8	-25.19	AV
1735.000	H	48.30	80.8	-32.50	peak
1735.000	H	40.21	60.8	-20.59	AV

Other harmonics emissions are lower than 10dB below the allowable limit.


- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : $\pm 3.7\text{dB}$
 - (4) Emission (the row indicated by bold) within the restricted band meets the requirement of FCC part 15 Section 15.205.
 - (5) Average should be determined by duty cycle factor.
The dutycycle is simply the on time by divided by the period:
The duration of one cycle = 60.2ms
Effective period of the cycle =
 $\text{Ton1} \times \text{Number} + \text{Ton2} \times \text{Number} = 0.47 \times 12 + 1.39 \times 13 = 23.71\text{ms}$
Duty cycle = $23.71\text{ms} / 60.2\text{ms} = 0.394\text{ms}$
AV Factor = $20\log 0.394 = -8.09$
Details please see the following plots.
 - (6) Pulse Desensitization Correction Factor
Pulse Width(PW) = 60.2ms
 $1/\text{PW} = 1/60.2\text{ms} = 0.016611\text{KHz}$
RBW (100KHz) > $1/\text{PW}$ (0.016611KHz)
Therefore PDCF is not needed.

The duration of one cycle

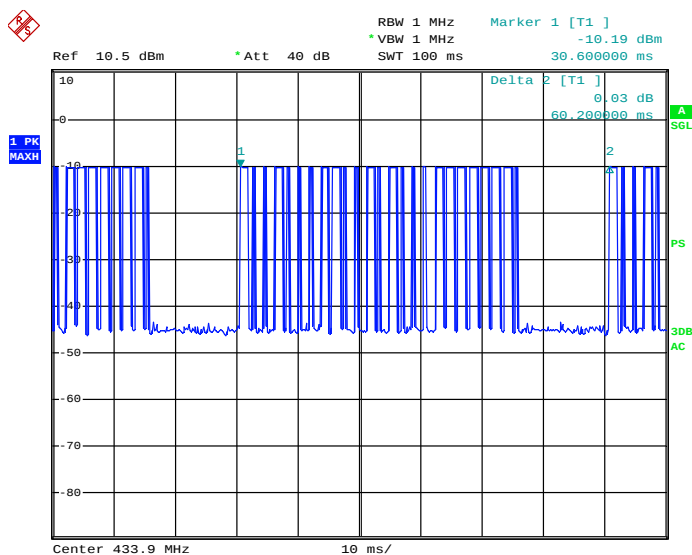


Date: 5.JAN.2014 18:28:12

13 long signals and 12 short signals

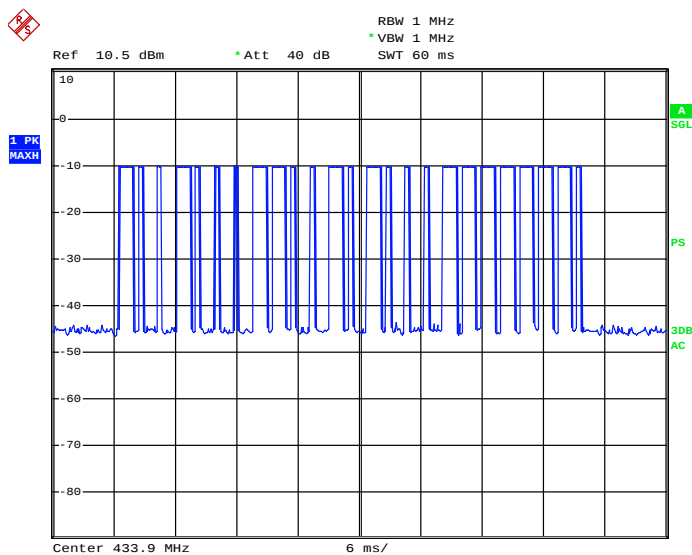


Date: 5.JAN.2014 18:28:55

Long signal

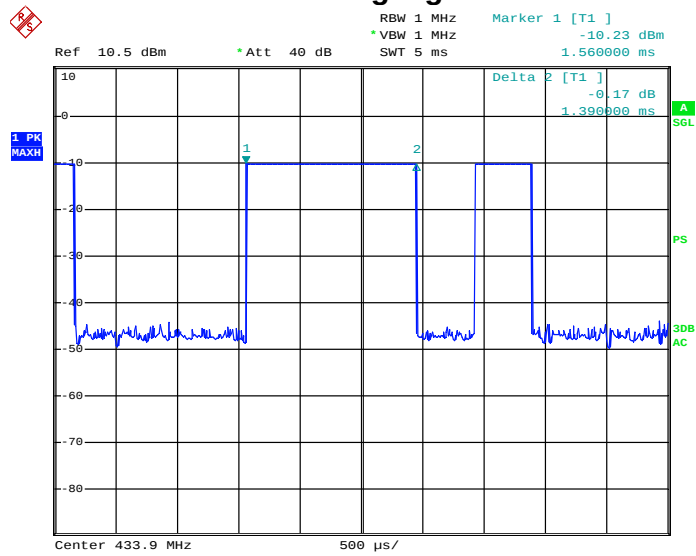

Date: 5.JAN.2014 18:30:28

Short signal

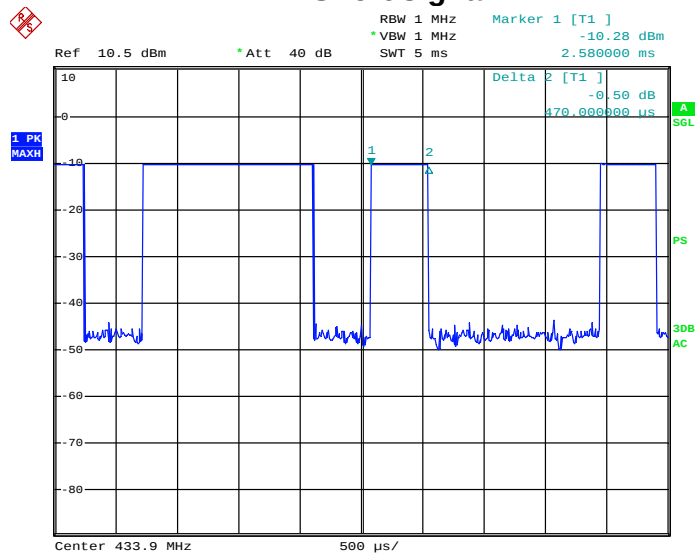

Date: 5.JAN.2014 18:30:01

4. Occupied Bandwidth

4.1 Measurement Procedure

1. The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
2. The test receiver RBW set 100KHz, VBW set 300KHz, Sweep time set auto.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Limit

Please refer section 15.231


According to 15.231(C), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

$$\text{Limit} = 433.92 \times 0.25\% = 1.08 \text{ MHz}$$

4.4 Measurement Results

20dB Bandwidth	Limit
500KHz	1.0848MHz

Please refer to the following plot.

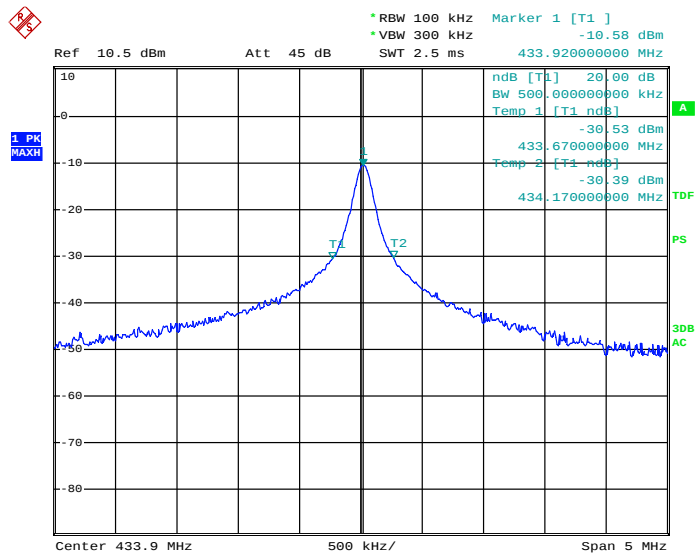


Date: 5.JAN.2014 19:04:12

5 Transmission Time

5.1 Measurement Procedure

- 4.1.1 Place the EUT on the table and set it in transmitting mode.
- 4.1.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4.1.3 Set spectrum analyzer center= 433.9MHz, Span=0MHz, Sweep= 10s
- 4.1.4 Set the spectrum analyzer as RBW, VBW=1MHz
- 4.1.5 Max hold, view and count how many channel in the band.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Limit

According to 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.4 Measurement Results

Transmission Time	Limit
2.2s	5s

Please refer to the following plot.

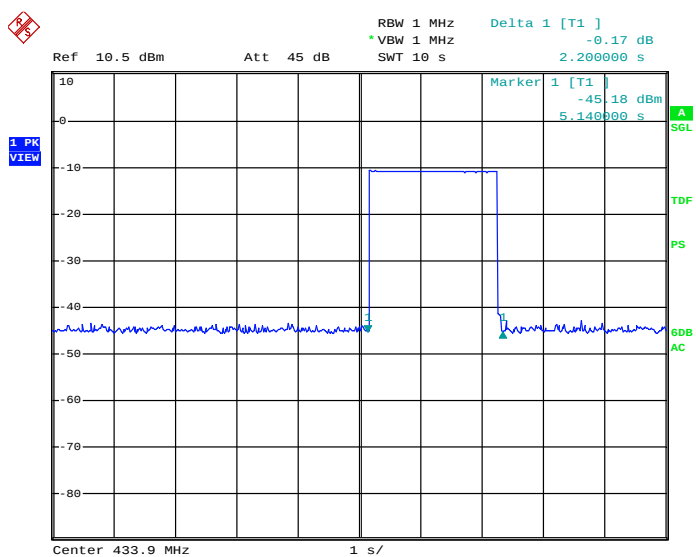

Date: 5.JAN.2014 19:15:32

6. Antenna Application

6.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

6.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is 0.5dBi. So, the antenna is consider meet the requirement.

7. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	Nov. 25, 2013	Nov. 24, 2014
Antenna	Schwarzbeck	VULB9162	9162-010	Nov. 28, 2013	Nov. 27, 2014
Positioning Controller	UC	UC 3000	N/A	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	Nov. 09, 2013	Nov. 08, 2014
Cable	Huber+Suhner	CIL02	N/A	Nov. 09, 2013	Nov. 08, 2014
Power Amplifier	HP	HP 8447D	1145A00203	Nov. 09, 2013	Nov. 08, 2014
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	Oct. 24, 2013	Oct. 23, 2014
Horn Antenna	Com-Power	AH-118	071078	Nov. 07, 2013	Nov. 06, 2014
Loop antenna	Daze	ZA30900A	0708	Oct.11, 2013	Oct.10, 2014
Spectrum Analyzer	Agilent	E4408B	MY41440717	Nov.05, 2013	Nov.04, 2014
Pre-Amplifier	Agilent	8449B	3008A02964	Nov.05, 2013	Nov.04, 2014
L.I.S.N	Rohde & Schwarz	ENV 216	101317	Nov. 09, 2013	Nov. 08, 2014

---End of report---