

North 710, Yihua Building, Shennan Road, Futian District, Shenzhen, P. R. China Telephone: +86-755-29451282,

Fax: +86-755-22639141

Report No.: FCC12-RTE040602

Page 1 of 18

TEST REPORT

Applicant: Archos SA

Address of Applicant: 12, Rue Ampere 91430 Igny France

Equipment Under Test (EUT)

Product Name: HOME TABLET

Model No.: AN7DG3ST

Trade mark: ARNOVA

FCC ID: SOVAN7DG3ST

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2010

Date of sample receipt: Mar. 15, 2012

Date of Test: Mar. 15-Apr. 03, 2012

Date of report issued: Apr. 06, 2012

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Kavin Yu Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC12-RTE040602

Page 2 of 18

2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Apr. 06, 2012 | Original |
| | | |
| | | |
| | | |
| | | |

| Prepared by: | Collin. He | Date: | Apr. 06, 2012 | |
|--------------|------------------|-------|---------------|--|
| | Project Engineer | | | |
| Reviewed by: | Hams. Hu | Date: | Apr. 06, 2012 | |
| | Reviewer | | | |



Report No.: FCC12-RTE040602 Page 3 of 18

3 Contents

| | | | Page |
|---|------------|---|------|
| 1 | COV | /ER PAGE | 1 |
| 2 | VER | SION | 2 |
| 3 | | ITENTS | |
| 3 | CON | TENIS | 3 |
| 4 | TES | T SUMMARY | 4 |
| 5 | GEN | IERAL INFORMATION | 5 |
| | 5.1 | CLIENT INFORMATION | |
| | 5.2 | GENERAL DESCRIPTION OF E.U.T. | |
| | 5.3 | TEST MODE AND VOLTAGE | |
| | 5.4 5.5 | TEST FACILITY TEST LOCATION | |
| | 5.6 | DESCRIPTION OF SUPPORT UNITS | |
| | 5.7 | DEVIATION FROM STANDARDS | |
| | 5.8 | ABNORMALITIES FROM STANDARD CONDITIONS | |
| | 5.9 | OTHER INFORMATION REQUESTED BY THE CUSTOMER | |
| 6 | TES | T INSTRUMENTS LIST | 7 |
| 7 | TES | T RESULTS AND MEASUREMENT DATA | 8 |
| | 7.1 | CONDUCTED EMISSIONS | 8 |
| | 7.2 | RADIATED EMISSION | |
| 8 | TES | T SETUP PHOTO | 17 |
| 9 | EUT | CONSTRUCTIONAL DETAILS | 18 |



Report No.: FCC12-RTE040602

Page 4 of 18

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--------------------|-------------------|--------|
| Conducted Emission | Part15.107 | PASS |
| Radiated Emissions | Part15.109 | PASS |

PASS: The EUT complies with the essential requirements in the standard.



Report No.: FCC12-RTE040602

Page 5 of 18

5 General Information

5.1 Client Information

| Applicant: | Archos SA |
|--------------------------|----------------------------------|
| Address of Applicant: | 12, Rue Ampere 91430 Igny France |
| Manufacturer: | Archos SA |
| Address of Manufacturer/ | 12, Rue Ampere 91430 Igny France |

5.2 General Description of E.U.T.

| Product Name: | HOME TABLET |
|---------------|---------------------------------|
| Model No.: | AN7DG3ST |
| Power supply: | MODEL: MD-ADP-0516UN001 |
| | Input: AC 100-240V 50/60Hz 0.3A |
| | Output: DC 5.0V 1.5A |
| | DC 3.7V Li-ion Battery |

5.3 Test mode and voltage

| Test mode: | |
|---------------|--|
| PC mode | Keep the EUT in communicate mode by PC |
| Play mode | Keep the EUT in play file. |
| Test voltage: | AC 120V/60Hz |

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

Industry Canada (IC)

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.



Report No.: FCC12-RTE040602

Page 6 of 18

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen,

China

Tel: 0755-27798480 Fax: 0755-27798960

5.6 Description of Support Units

| Manufacturer | Description | Model | Serial Number | FCC ID/DoC |
|--------------|-------------|-------------|---------------|------------|
| HP | Printer | CB495A | 05257893 | DoC |
| DELL | PC | OPTIPLEX745 | GTS312 | DoC |
| DELL | MONITOR | E178FPC | N/A | DoC |
| DELL | KEYBOARD | SK-8115 | N/A | DoC |
| DELL | MOUSE | MOC5UO | N/A | DoC |

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: FCC12-RTE040602

Page 7 of 18

6 Test Instruments list

| Radia | Radiated Emission | | | | | |
|-------|------------------------------|--------------------------------|-----------------------|------------------|------------------------|----------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | Mar. 29 2012 | Mar. 28 2013 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | Jul. 04 2011 | Jul. 03 2012 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | Feb. 26 2012 | Feb. 25 2013 |
| 5 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 6 | Coaxial Cable | GTS | N/A | GTS213 | Mar. 31 2012 | Mar. 30 2013 |
| 7 | Coaxial Cable | GTS | N/A | GTS211 | Mar. 31 2012 | Mar. 30 2013 |
| 8 | Coaxial cable | GTS | N/A | GTS210 | Mar. 31 2012 | Mar. 30 2013 |
| 9 | Coaxial Cable | GTS | N/A | GTS212 | Mar. 31 2012 | Mar. 30 2013 |
| 10 | Amplifier(100kHz- 3GHz) | HP | 8347A | GTS204 | Jul. 04 2011 | Jul. 03 2012 |

¹¹ Double -ridged waveguide horn SCHWARZBECK MESS-ELEKTRONIK 9120D-829 GTS208 June 30 2011 June 29 2012

| Cond | Conducted Emission | | | | | |
|------|--------------------|--------------------------------|----------------------|------------------|------------------------|----------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Shielding Room | ZhongYu Electron | 7.0(L)x3.0(W)x3.0(H) | GTS252 | Jul. 04 2011 | Jul. 03 2012 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESCS30 | GTS223 | Jul. 04 2011 | Jul. 03 2012 |
| 3 | 10dB Pulse Limita | Rohde & Schwarz | N/A | GTS224 | Jul. 04 2011 | Jul. 03 2012 |
| 4 | LISN | SCHWARZBECK MESS-ELEKTRONIK | NSLK 8127 | GTS226 | Jul. 04 2011 | Jul. 03 2012 |
| 5 | Coaxial Cable | GTS | N/A | GTS227 | Mar. 31 2012 | Mar. 30 2013 |
| 6 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ebotek.cn and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ebotek.cn. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: FCC12-RTE040602

Page 8 of 18

7 Test results and Measurement Data

7.1 Conducted Emissions

| Test Method: Test Frequency Range: Class / Severity: | FCC Part15 B Section 15.107 ANSI C63.4:2003 150kHz to 30MHz Class B | | | | |
|---|---|-----------------------------------|---|--|--|
| Test Frequency Range: Class / Severity: Receiver setup: | 150kHz to 30MHz Class B | | | | |
| Class / Severity: Receiver setup: | Class B | | ANSI C63.4:2003 | | |
| Receiver setup: | | 150kHz to 30MHz | | | |
| . toootto. ootap. | DDM OLL MOM OOLI | | | | |
| Limit: | RBW=9kHz, VBW=30kHz | | | | |
| Lillil. | | Limit (d | RuV) | | |
| | Frequency range (MHz) | Quasi-peak | Average | | |
| | 0.15-0.5 | 66 to 56* | 56 to 46* | | |
| | 0.5-5 | 56 | 46 | | |
| Test procedure | 0.5-30 | 60 | 50 | | |
| | The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 500hm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 500hm/50uH coupling impedance with 500hm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. | | equipment. The ower through a LISN th 50ohm e test setup and r maximum n emission, the e cables must be | | |
| | LISN 40cm AUX Equipment E.L | BOCM LISN Filte | er — AC power | | |
| | Test table/Insulation plan Remark: E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Test table height=0.8m | ne Receiver | | | |
| Test environment: | Remark: E.U.T. Equipment Under Test LISN: Line Impedence Stabilization | Receiver ne | ss.: : 1 012mbar | | |
| Test environment: Measurement Record: | Remark: E.U.T. Equipment Under Test LISN: Line Impedence Stabilization Test table height=0.8m | Receiver n Network d.: 52% Pres | ss.: 1 012mbar ertainty: ± 3.45dB | | |




Report No.: FCC12-RTE040602 Page 9 of 18

| Test mode: | Refer to section 5.3 for details |
|---------------|----------------------------------|
| Test results: | Pass |

Measurement Data

worst case

Line:

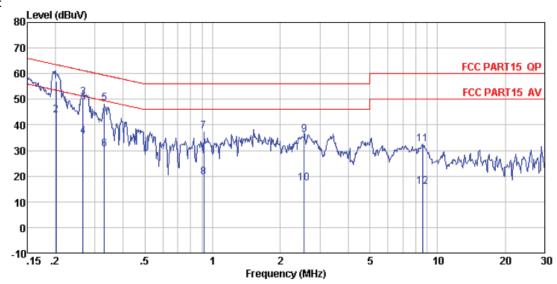

Condition : FCC PART15 QP LISN(2011) LINE

Job No. : 173RF Test Mode : PC mode Test Engineer: Sam


| | Freq | Read | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----------------|----------------------------|----------------------------|-------------------------|----------------------|----------------------------|-------------------------|--------------------------|--------------------------|
| | MHz | dBuV | dB | dB | dBu₹ | dBuV | dB | |
| 1 2 3 | 0. 201 0. 201 0. 266 | 56. 42 42. 95 50. 12 | 0.66 0.66 0.62 | 0.10 0.10 0.10 | 57. 18 43. 71 50. 84 | 63.55 53.55 61.25 | -6.37 -9.84 -10.41 | Average |
| 4 5 6 | 0. 266 0. 330 0. 330 | 34.62 47.85 29.84 | 0. 62 0. 60 0. 60 | 0.10 0.10 0.10 | 35.34 48.55 30.54 | 59.44 | -10.89 | Average QP Average |
| 7 8 9 | 0. 914 0. 914 2. 554 | 36.84 18.92 35.85 | 0. 49 0. 49 0. 37 | 0.10 0.10 0.10 | 37. 43 19. 51 36. 32 | 56.00 46.00 | -18.57 | QP Average |
| 10 11 12 | 2. 554 8. 592 8. 592 | 16.85 32.20 15.32 | 0.37 0.24 0.24 | 0.10 0.19 0.19 | 17.32 32.63 15.75 | 46.00 60.00 | -28.68 -27.37 | Average |



Report No.: FCC12-RTE040602

Page 10 of 18

Neutral:

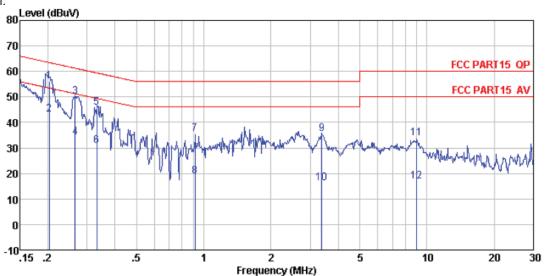

Condition : FCC PART15 QP LISN(2011) NEUTRAL

Job No. : 173RF Test Mode : PC mode Test Engineer: Sam

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|--------|-------|---------------|----------------|---------------|-------|---------------|---------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.203 | 55.32 | 0.65 | 0.10 | 56.07 | 63.49 | -7.42 | QP |
| 2 | 0.203 | 42.52 | 0.65 | 0.10 | 43.27 | 53.49 | -10.22 | Average |
| 3 | 0.266 | 49.25 | 0.62 | 0.10 | 49.97 | 61.25 | -11.28 | QP |
| 4 5 | 0.266 | 33.56 | 0.62 | 0.10 | 34.28 | 51.25 | -16.97 | Average |
| 5 | 0.332 | 44.95 | 0.60 | 0.10 | 45.65 | 59.40 | -13.75 | QP |
| 6 | 0.332 | 30.00 | 0.60 | 0.10 | 30.70 | 49.40 | -18.70 | Average |
| 7 | 0.914 | 34.96 | 0.49 | 0.10 | 35.55 | 56.00 | -20.45 | QP |
| 8 | 0.914 | 18.24 | 0.49 | 0.10 | 18.83 | 46.00 | -27.17 | Average |
| 9 | 3.381 | 35.14 | 0.34 | 0.10 | 35.58 | 56.00 | -20.42 | QP |
| 10 | 3.381 | 15.94 | 0.34 | 0.10 | 16.38 | 46.00 | -29.62 | Average |
| 11 | 9.011 | 33.33 | 0.23 | 0.19 | 33.75 | 60.00 | -26.25 | QP |
| 12 | 9.011 | 16.46 | 0.23 | 0.19 | 16.88 | 50.00 | -33.12 | Average |

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: FCC12-RTE040602


Page 11 of 18

7.2 Radiated Emission

| Test Requirement: | FCC Part15 B Section 15.109 | | | | | | |
|-----------------------|--|-------------|--------------|------------|------------------|--|--|
| Test Method: | ANSI C63.4:200 |)3 | | | | | |
| Test Frequency Range: | 30MHz to 1GHz | <u>'</u> | | | | | |
| Test site: | Measurement D | istance: 3m | (Semi-Anecho | ic Chambe | r) | | |
| Receiver setup: | Frequency | Remark | | | | | |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300KHz | Quasi-peak Value | | |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | | |
| Limit: | | PK | 1MHz | 10Hz | AV Value | | |
| | Freque | ncy | Limit (dBuV/ | /m @3m) | Remark | | |
| | 30MHz-8 | 8MHz | 40.0 |) | Quasi-peak Value | | |
| | 88MHz-21 | I6MHz | 43.5 | 5 | Quasi-peak Value | | |
| | 216MHz-9 | 60MHz | 46.0 |) | Quasi-peak Value | | |
| | 960MHz- | 1GHz | 54.0 |) | Quasi-peak Value | | |
| | Above 1 | GHz | 54.0 | | Average Value | | |
| | 7,5575 | 01.12 |) | Peak Value | | | |
| | The EUT was placed on the top of a rotating table 0.8 meters above the grat a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the groundetermine the maximum value of the field strength. Both horizontal and ver polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and the antenna was tuned to heights from 1 meter to 4 meters and the rota tab was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified | | | | | | |
| | Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | | |
| Test setup: | Below 1GHz | | | | | | |



Report No.: FCC12-RTE040602 Page 12 of 18

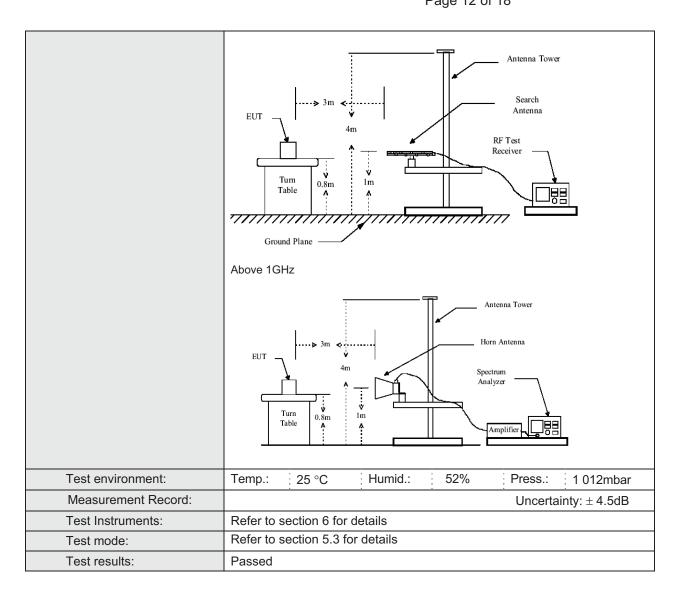

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: FCC12-RTE040602


Page 13 of 18

Measurement Data

worst case

Below 1GHz

Horizontal:

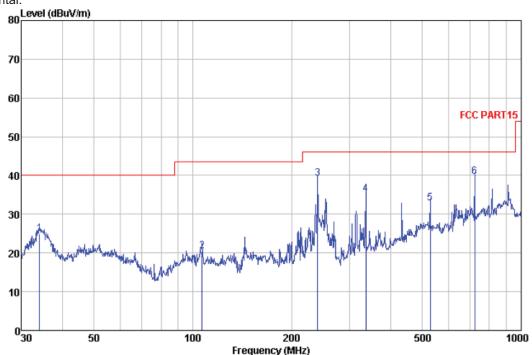

Site : 3m chamber

: FCC PART15 3m VULB9163-2012 HORIZONTAL Condition

Job No. : 173RF Test Mode

: PC mode


| 62(| Engineer: | | | enna Cable Preamp | | | Limit Over | | |
|-----------------------|-------------------------------------|----------------------------------|----------------|------------------------------|----------------------------------|--|----------------------------------|-------------------------------------|----------------------|
| | Freq | | | | | Level | | | Remark |
| | MHz | dBu∜ | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 2 3 4 5 | 239. 9874 336. 0352 528. 2458 | 40.47 59.83 53.09 43.82 | 11.14 13.72 | 0.26 0.51 0.68 1.05 | 31.74 32.28 32.31 31.52 | 24.87 20.57 39.20 35.18 32.91 39.71 | 43.50 46.00 46.00 46.00 | -22.93 -6.80 -10.82 -13.09 | QP QP QP QP |



Report No.: FCC12-RTE040602

Page 14 of 18

Vertical:

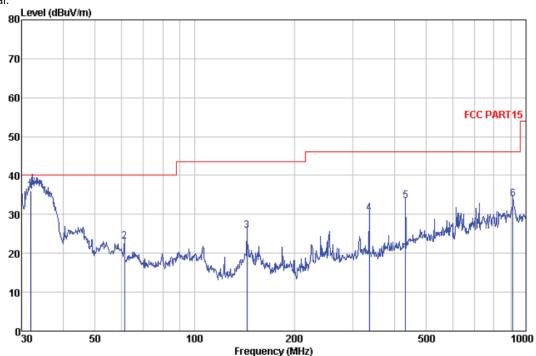

Site

: 3m chamber : FCC PART15 3m VULB9163-2012 VERTICAL Condition

: 173RF : PC mode Job No. Test Mode

| est | Engineer: Freq | Collin ReadAntenna Level Factor | | | | | Limit Line | Over Limit | Remark |
|----------------------------|--|---------------------------------------|--------------|----------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------|----------------------|
| | MHz | dBu₹ | <u>dB</u> /m | | dB | dBuV/m | dBuV/m | <u>dB</u> | |
| 1 2 3 4 5 6 | 31.9100 61.3463 143.8295 336.0352 432.5457 912.8621 | 44.62 48.97 49.10 | | 0.31 0.68 0.85 | 31.95 31.95 32.31 32.09 | 23.11 25.84 30.22 33.39 | 40.00 43.50 46.00 46.00 | -17.66 -15.78 -12.61 | QP QP QP QP |




Report No.: FCC12-RTE040602

Page 15 of 18

Above 1GHz

Horizontal:

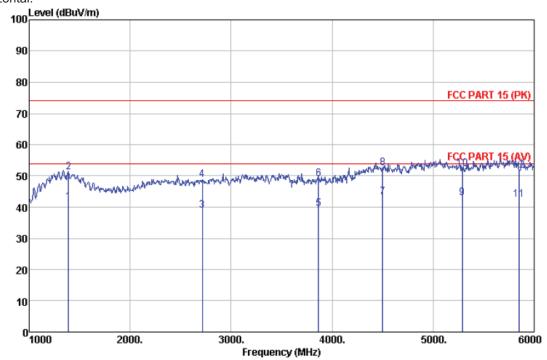

Site : 3m chamber

Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL

Job No. : 173RF Test Mode : PC mode Test Engineer: Collin


| est | Engineer: | Collin | | | | | | | |
|-----|-----------|--------|----------------|-------|--------|--------|--------|--------|---------|
| | | Read | Int enna | Cable | Preamp | | Limit | Over | |
| | Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| | MHz | dBu∜ | — <u>d</u> B/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1390.0000 | 35.29 | 25.60 | 2.15 | 21.35 | 41.69 | 54.00 | -12.31 | Average |
| 2 | 1390.0000 | 44.77 | 25.60 | 2.15 | 21.35 | 51.17 | 74.00 | -22.83 | Peak |
| 3 | 2715.0000 | 38.17 | 28.18 | 3.04 | 30.38 | 39.01 | 54.00 | -14.99 | Average |
| 4 | 2715.0000 | 47.99 | 28.18 | 3.04 | 30.38 | 48.83 | 74.00 | -25.17 | Peak |
| 5 | 3865.0000 | 33.17 | 29.45 | 3.81 | 27.07 | 39.36 | 54.00 | -14.64 | Average |
| 6 | 3865.0000 | 42.84 | 29.45 | 3.81 | 27.07 | 49.03 | 74.00 | -24.97 | Peak |
| 7 | 4500.0000 | 32.25 | 31.32 | 4.24 | 24.60 | 43.21 | 54.00 | -10.79 | Average |
| 8 | 4500.0000 | 41.63 | 31.32 | 4.24 | 24.60 | 52.59 | 74.00 | -21.41 | Peak |
| 9 | 5290.0000 | 30.26 | 31.72 | 4.76 | 23.85 | 42.89 | 54.00 | -11.11 | Average |
| 10 | 5290.0000 | 39.51 | 31.72 | 4.76 | 23.85 | 52.14 | 74.00 | -21.86 | Peak |
| 11 | 5850.0000 | 28.43 | 32.70 | 5.14 | 23.87 | 42.40 | 54.00 | -11.60 | Average |
| 12 | 5850.0000 | 37.68 | 32.70 | 5.14 | 23.87 | 51.65 | 74.00 | -22.35 | Peak |



Report No.: FCC12-RTE040602

Page 16 of 18

Vertical:

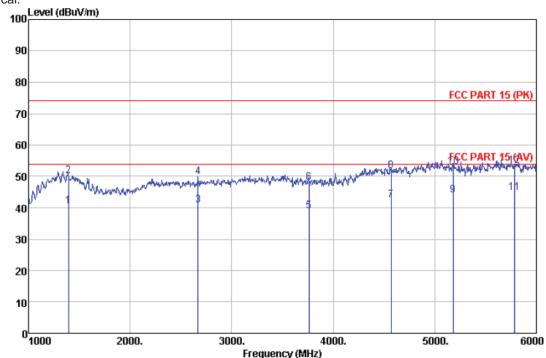

Site

: 3m chamber : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL Condition

: 173RF Job No. PC mode Test Mode

| est | Engineer: Freq | Read | intenna Factor | | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|-----|-------------------|-------|-------------------|------|------------------|--------|---------------|---------------|---------|
| | MHz | dBu∀ | —dB/m | ₫B | ₫B | dBuV/m | dBuV/m | ₫B | |
| 1 | 1395.0000 | 34.18 | 25.59 | 2.15 | 21.35 | 40.57 | 54.00 | -13.43 | Average |
| 2 | 1395.0000 | 43.75 | 25.59 | 2.15 | 21.35 | 50.14 | 74.00 | -23.86 | Peak |
| 3 | 2670.0000 | 40.18 | 28.04 | 3.01 | 30.42 | 40.81 | 54.00 | -13.19 | Average |
| 4 | 2670.0000 | 49.23 | 28.04 | 3.01 | 30.42 | 49.86 | 74.00 | -24.14 | Peak |
| 5 | 3760.0000 | 33.10 | 29.32 | 3.74 | 27.34 | 38.82 | 54.00 | -15.18 | Average |
| 6 | 3760.0000 | 42.37 | 29.32 | 3.74 | 27.34 | 48.09 | 74.00 | -25.91 | Peak |
| 7 | 4570.0000 | 31.09 | 31.47 | 4.27 | 24.48 | 42.35 | 54.00 | -11.65 | Average |
| 8 | 4570.0000 | 40.37 | 31.47 | 4.27 | 24.48 | 51.63 | | -22.37 | |
| 9 | 5180.0000 | 31.27 | 32.00 | 4.69 | 23.87 | 44.09 | 54.00 | -9.91 | Average |
| 10 | 5180.0000 | 40.32 | 32.00 | 4.69 | 23.87 | 53.14 | | -20.86 | |
| 11 | 5785.0000 | 30.88 | 32.63 | 5.09 | 23.85 | 44.75 | | | Average |
| 12 | 5785.0000 | 39.37 | 32.63 | 5.09 | 23.85 | 53.24 | 74.00 | -20.76 | Peak |
| | | | | | | | | | |