



FCC Test Report

FCC Part 15.247 for DSSS systems/ CANADA RSS-210

FOR:

GSM/UMTS/HSDPA Mobile Phone

MODEL #: RG4-E01

Toshiba Information Systems (UK) Ltd., Mobile Communications Division

**Riverside Way
Camberley, Surrey, GU15 3YA UK**

FCC ID: SP2-RG4-E01

**TEST REPORT #: EMC_CETEC_009_06502_15.247WLAN
DATE: 2006-12-06**



Certificate # 2135.01



**FCC listed#
101450**

**IC recognized #
3925**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



TABLE OF CONTENTS

1	Assessment	4
	EMC & Radio	4
2	Administrative Data	5
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2	Identification of the Client	5
2.3	Identification of the Manufacturer	5
3	Equipment under Test (EUT)	6
3.1	Specification of the Equipment under Test	6
3.2	Identification of the Equipment Under Test (EUT)	6
3.3	Identification of Accessory equipment	6
4	Subject Of Investigation	7
5	Measurements (Radiated)	8
5.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED)	8
5.1.1	LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4)	8
5.1.2	EIRP	8
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205	15
5.2.1	LIMITS	15
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	24
5.3.1	LIMITS	24
5.3.2	RESULTS 802.11 (worst case)	25
5.4	RECEIVER SPURIOUS RADIATION § 15.209/RSS210	33
5.4.1	LIMITS	33
5.4.2	RESULTS	34
6	Measurements (CONDUCTED)	38
6.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)	38
6.1.1	LIMIT SUB CLAUSE § 15.247 (b) (1)	38
6.1.2	RESULTS:	38
6.2	6dB BANDWIDTH	38
	6dB BANDWIDTH (kHz)	38
6.3	CORRECTED OUTPUT POWER	51
6.3.1	LIMIT SUB CLAUSE § FCC97-114	51
6.3.2	Result	51
6.4	POWER SPECTRAL DENSITY	51
6.4.1	LIMIT SUB CLAUSE § 15.247 5 (d)	51
6.4.2	RESULTS:	51
6.5	CONDUCTED SPURIOUS EMISSION	58
6.5.1	LIMIT SUB CLAUSE § 15.247 (d)	58
6.5.2	RESULTS: Tnom(23)°C VnomVDC	58



6.6	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	61
6.6.1	LIMITS	61
6.6.2	RESULTS	62
7	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	63
8	BLOCK DIAGRAMS	64



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS210.

Company	Description	Model #
Toshiba Information Systems (UK) Ltd., Mobile Communications Division	GSM/UMTS/HSDPA Mobile Phone	RG4-E01

2006-08-21 EMC & Radio Lothar Schmidt
(Test Lab Manager)

A handwritten signature in blue ink, appearing to read "Lothar Schmidt", written over a horizontal line.

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Peter Mu
Date of test:	2006-10-27 to 2006-11-14

2.2 Identification of the Client

APPLICANT	
Applicant (Company Name)	Toshiba Information Systems (UK) Ltd., MobileCommunications Division
Street Address	Riverside Way
City/Zip Code	Camberley, Surrey, GU15 3YA
Country	UK
Contact Person	Adrian Coyle
Telephone	+44 1276 405100
Fax	+44 1276 405111
e-mail	adrian.coyle@toshiba.co.uk

2.3 Identification of the Manufacturer

MANUFACTURER	
Manufacturer	Toshiba Corporation
Street Address	1-1, Shibaura 1-Chome, Minato-ku
City/Zip Code	Tokyo, 105-8001
Country	Japan

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

EUT	
Marketing Name of EUT (if not same as Model No.)	RG4-E01
Description	GSM/UMTS/HSDPA Mobile Phone
Model No.	RG4-E01
Serial No.	
H/W & S/W	HW version: SP1 SW version: TF_QCT2340C_SHARK_VER_01.25_20061130
FCC-ID	SP2-RG4-E01
IC-ID (Industry Canada)	N/A

Frequency Range:	2400-2483.5MHz
Type(s) of Modulation:	CCK , OFDM
Number of Channels:	11
Antenna Type:	PIFA/average Gain is about -5dBi
Output Power:	802.11 (b) mode: 0.0121 W EIRP @ 2412 MHz 802.11 (g) mode: 0.0235 W EIRP @ 2412 MHz

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	Toshiba Corporation	RG4-E01	004401120210105

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	AC/DC ADAPTER	TAMURA	AWW0515KA (SP)	0640



4 Subject Of Investigation

During the testing process the EUT was tested in b mode with 11Mbps data rate and in g mode with 54Mbps data rate which yielded the worst case results. All data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS210.



5 Measurements (Radiated)

5.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED)

5.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4)

Frequency range	RF power output
2400-2483.5 MHz	36dBm EIRP

*limit is based upon antenna gain of less than or equal to 6dBi.

5.1.2 EIRP

TEST CONDITIONS Frequency (MHz)	MAXIMUM PEAK OUTPUT POWER (dBm)		
	2412	2437	2462
802.11b	10.81	10.38	9.82
802.11g	13.71*	12.76*	11.79*
802.11g (corrected)	14.49	13.56	12.57
Measurement uncertainty	±0.5dBm		

* Since 6dB bandwidth for 802.11g is greater than analyzer maximum resolution bandwidth of 10MHz correction factors apply. See section 6.3 for calculations.




EIRP 802.11 b Mode (2412MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, TT198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: EIRP RLAN CH1

SWEEP TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM
		MaxPeak			

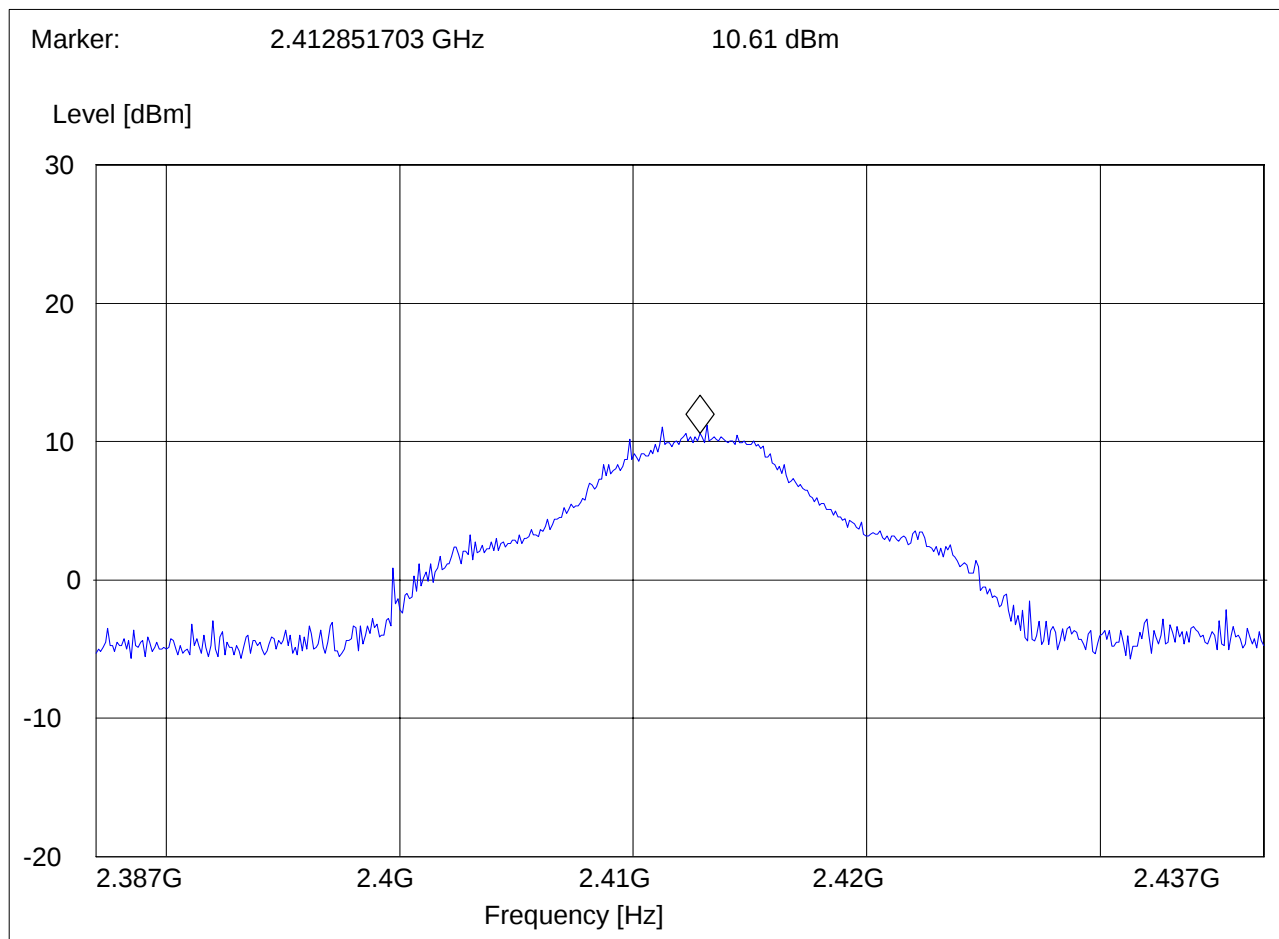



EIRP 802.11 b Mode (2437MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 6, TT198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: EIRP RLAN CH6

SWEEP TABLE: "EIRP RLAN CH6"

Short Description:		EIRP RLAN channel-2437 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM

Marker: 2.438352705 GHz 10.38 dBm

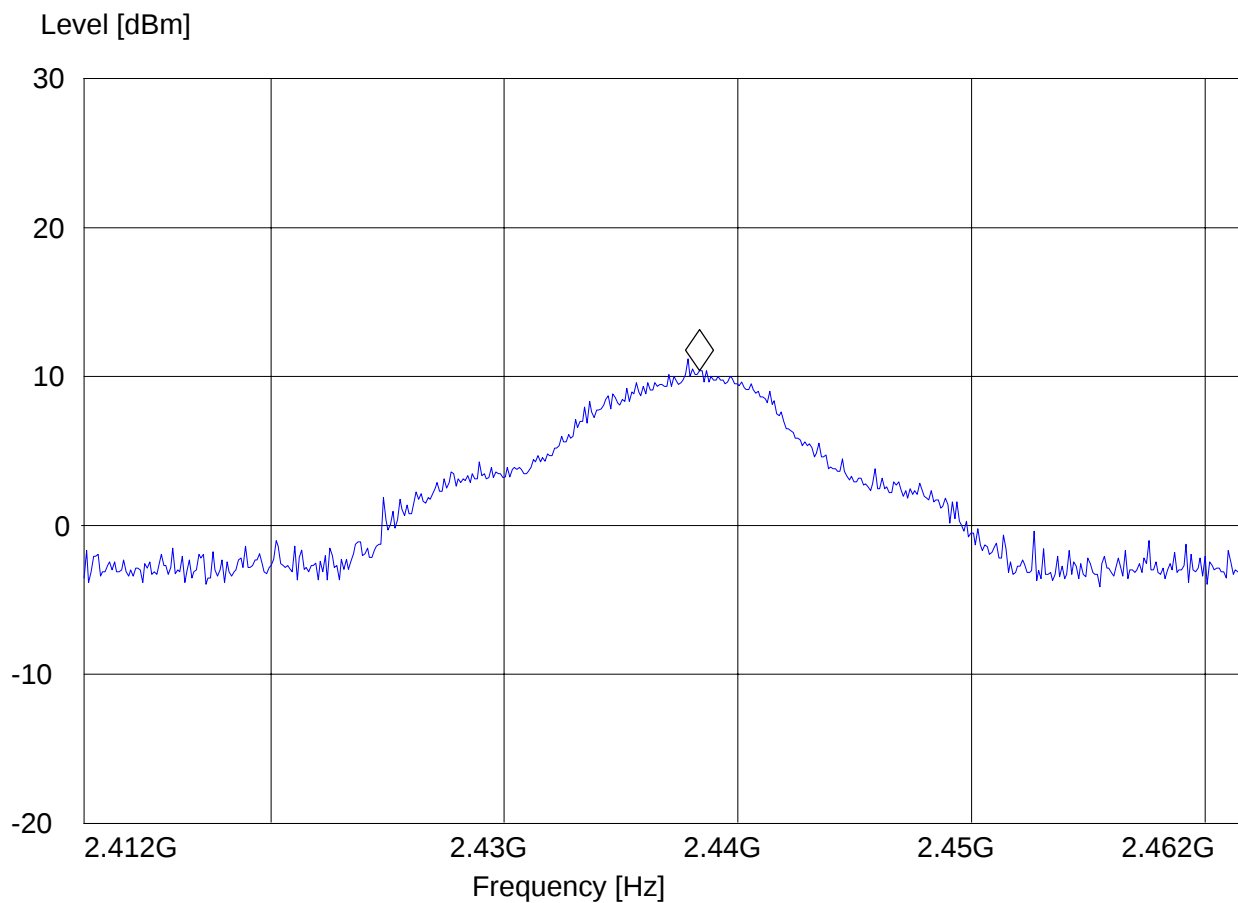



EIRP 802.11 b Mode (2462MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 11, TT198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: EIRP RLAN CH11

SWEEP TABLE: "EIRP RLAN CH11"

Short Description:		EIRP RLAN channel-2462 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM
		MaxPeak			

Marker: 2.464755511 GHz 9.82 dBm

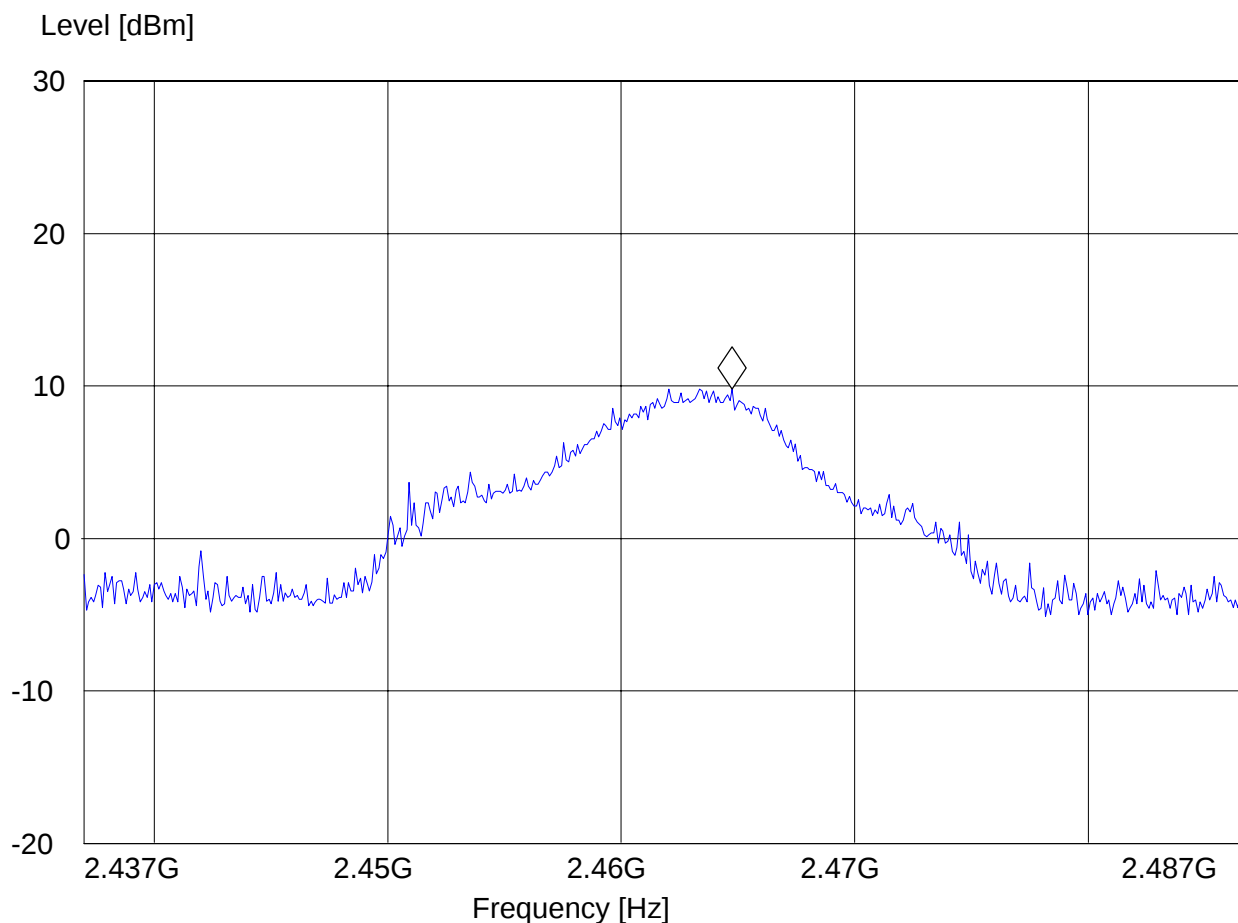



EIRP 802.11 g Mode (2412MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH1 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: EIRP RLAN CH1

SWEEP TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM
MaxPeak					

Marker: 2.410246493 GHz 13.71 dBm

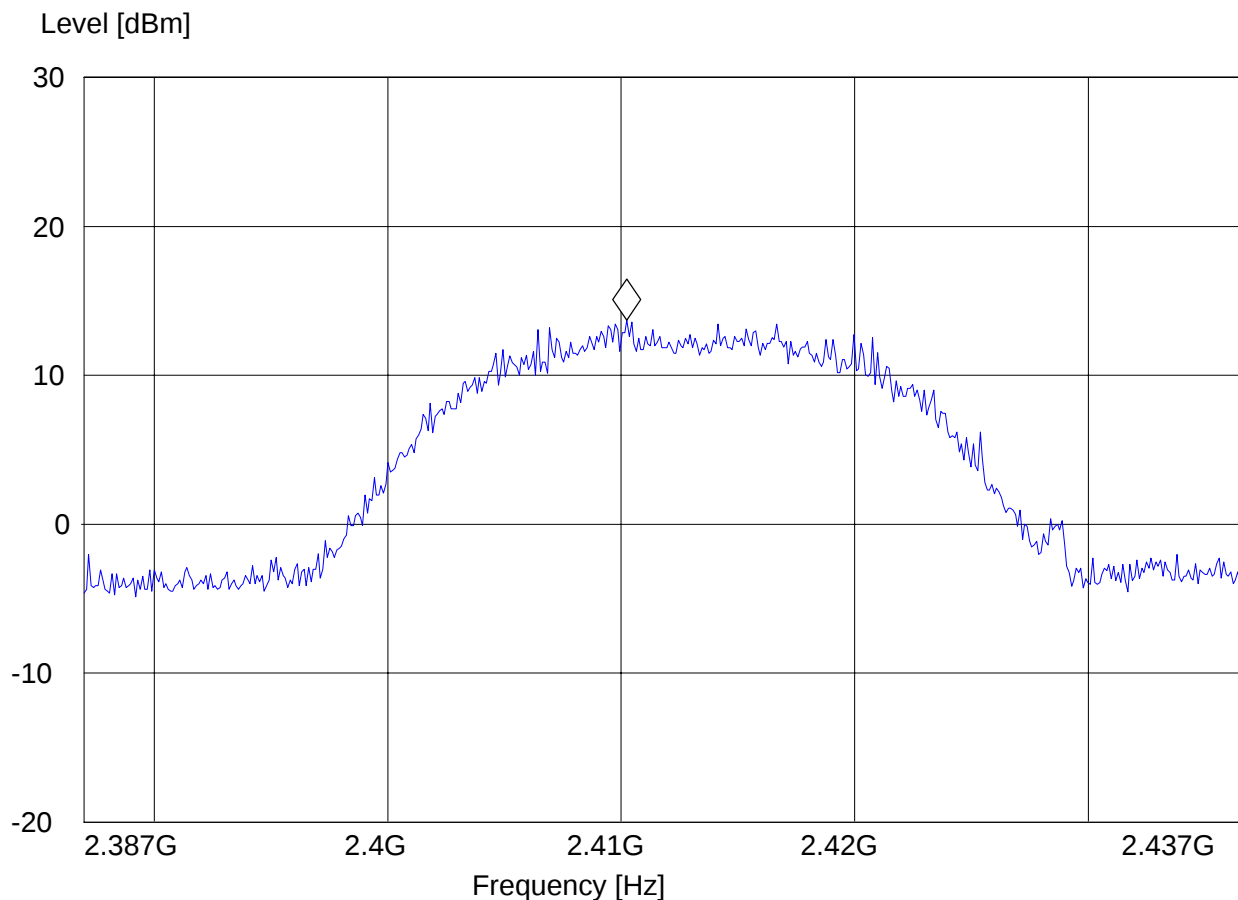



EIRP 802.11 g Mode (2437MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH6 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: EIRP RLAN CH6

SWEEP TABLE: "EIRP RLAN CH6"

Short Description:		EIRP RLAN channel-2437 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM

Marker: 2.440456914 GHz 12.76 dBm

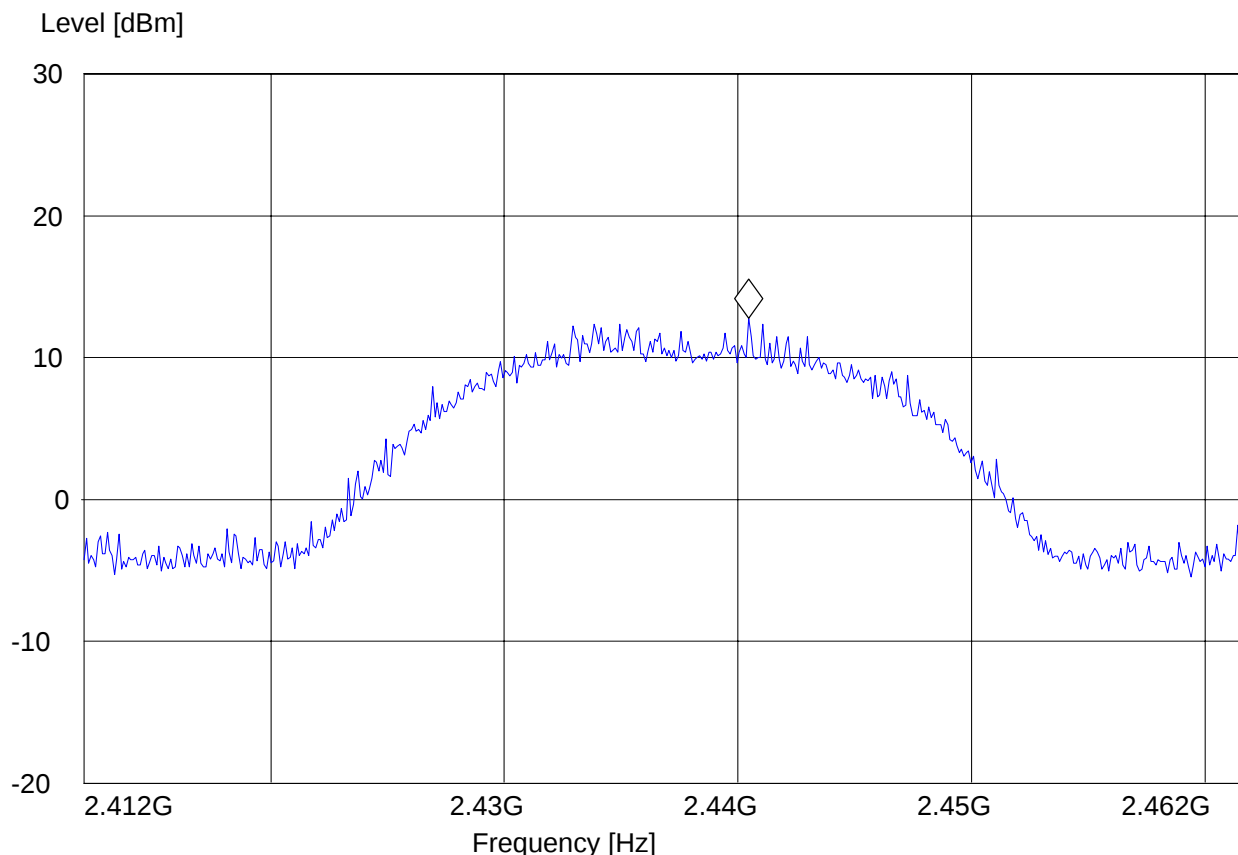



EIRP 802.11 g Mode (2462MHz)


CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH11 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: EIRP RLAN CH11

SWEEP TABLE: "EIRP RLAN CH11"

Short Description:		EIRP RLAN channel-2462 MHz			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz	DUMMY-DBM
		MaxPeak			

Marker: 2.465757515 GHz 11.79 dBm

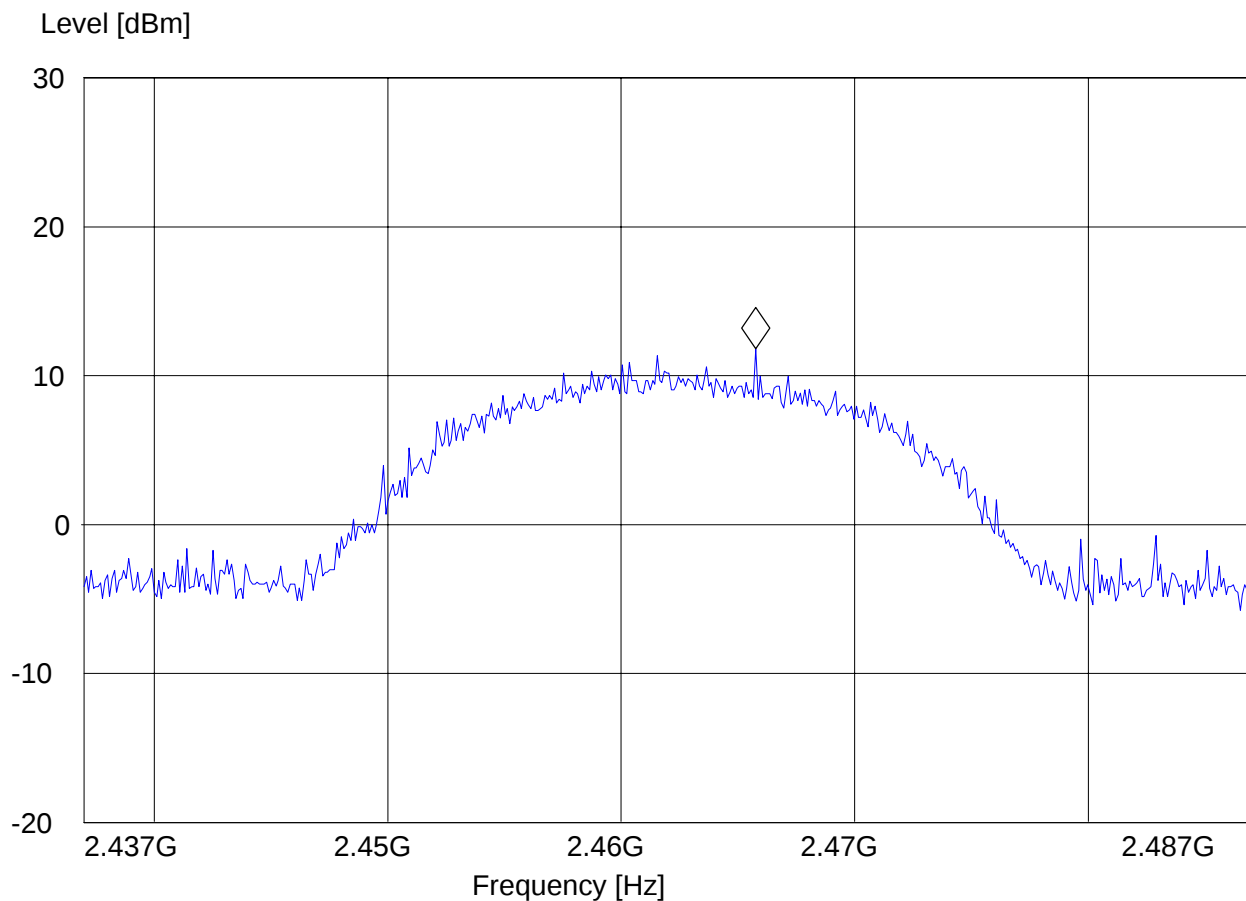

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m




PEAK, 802.11 b MODE (2412MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_LBE_PK

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

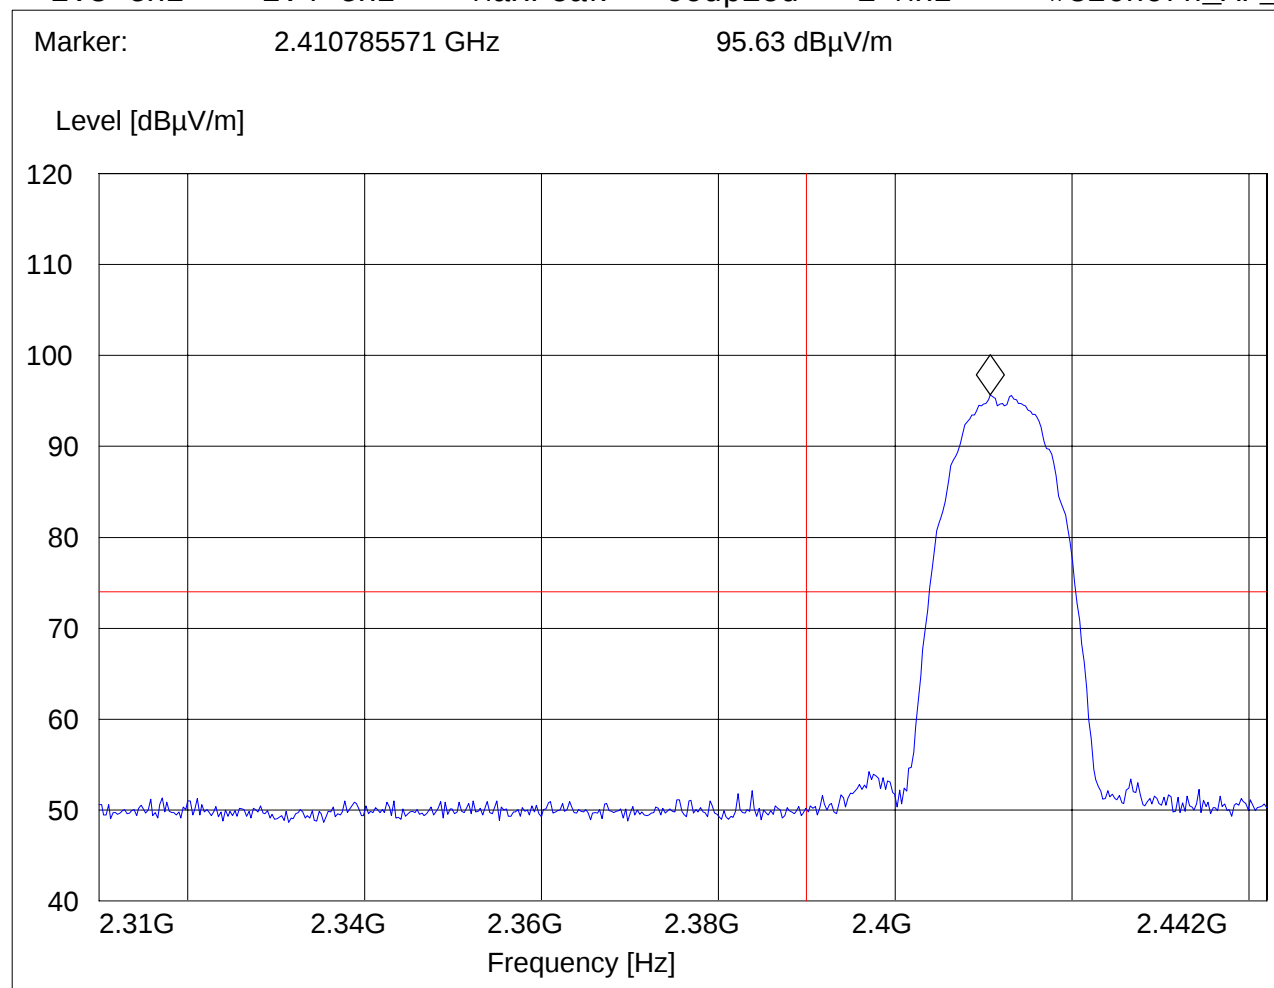




AVG, 802.11 b MODE (2412MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_LBE_AVG

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

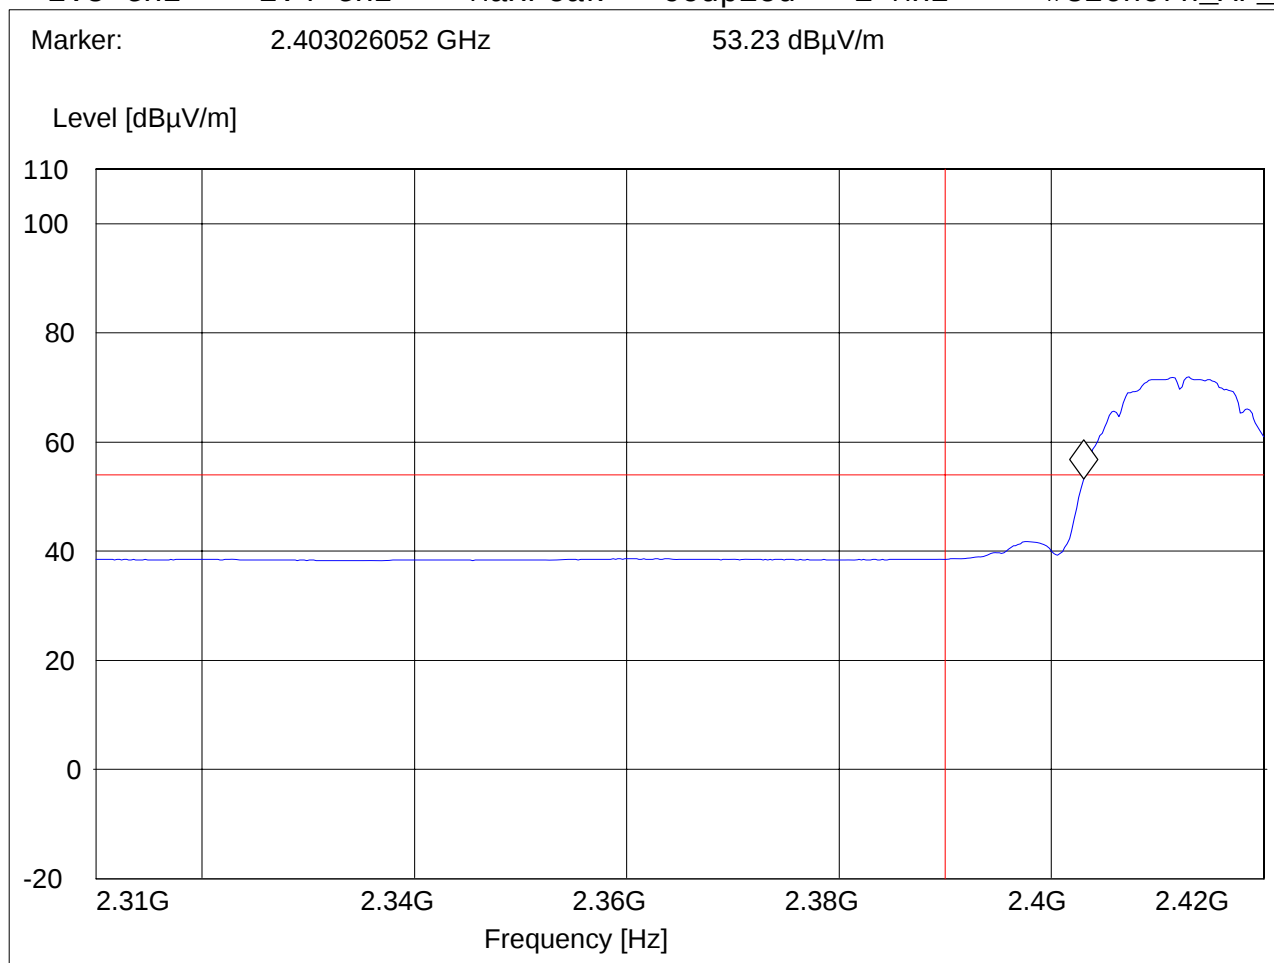



PEAK, 802.11 b MODE (2462MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 11, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_HBE_PK

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.46298998 GHz 94 dBμV/m

Level [dBμV/m]

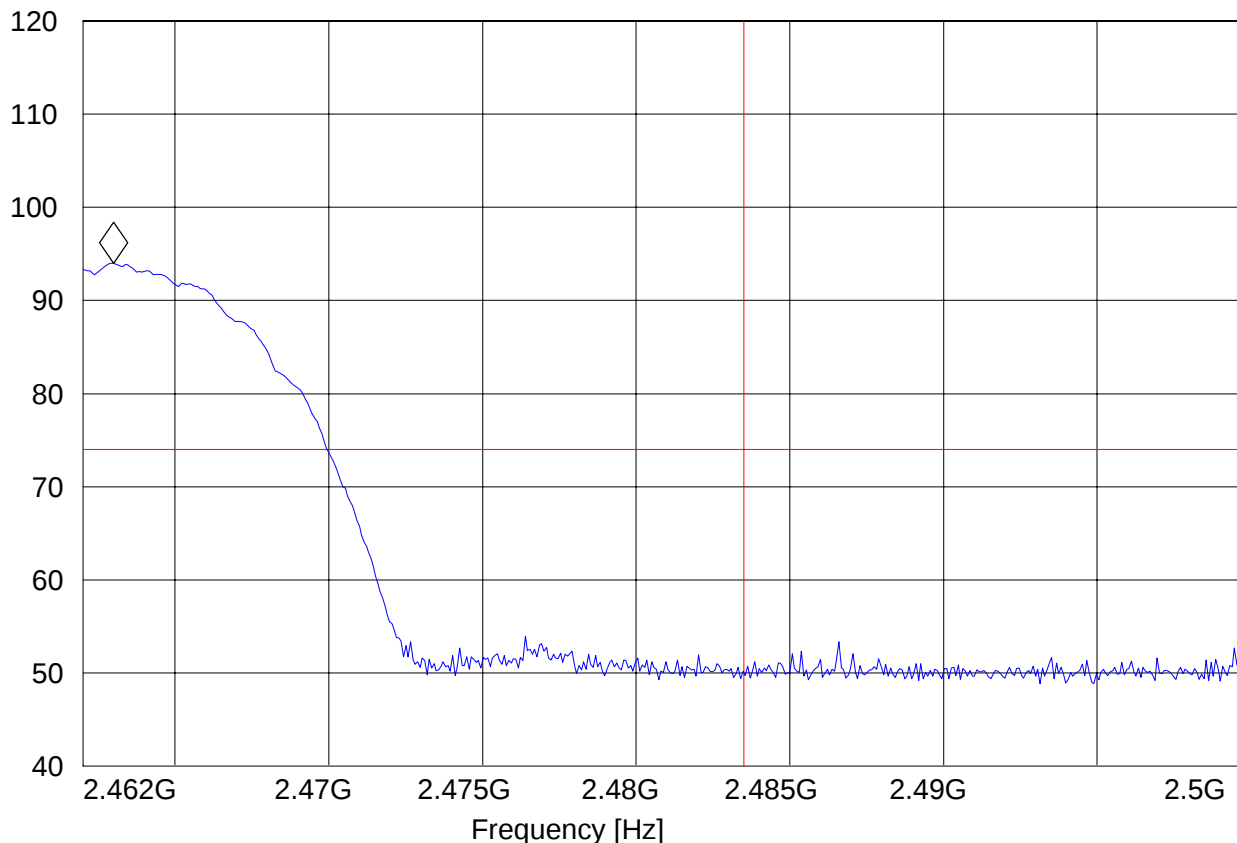



AVG, , 802.11 b MODE (2462MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 11, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_HBE_AVG

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.462761523 GHz 75.33 dBμV/m

Level [dBμV/m]

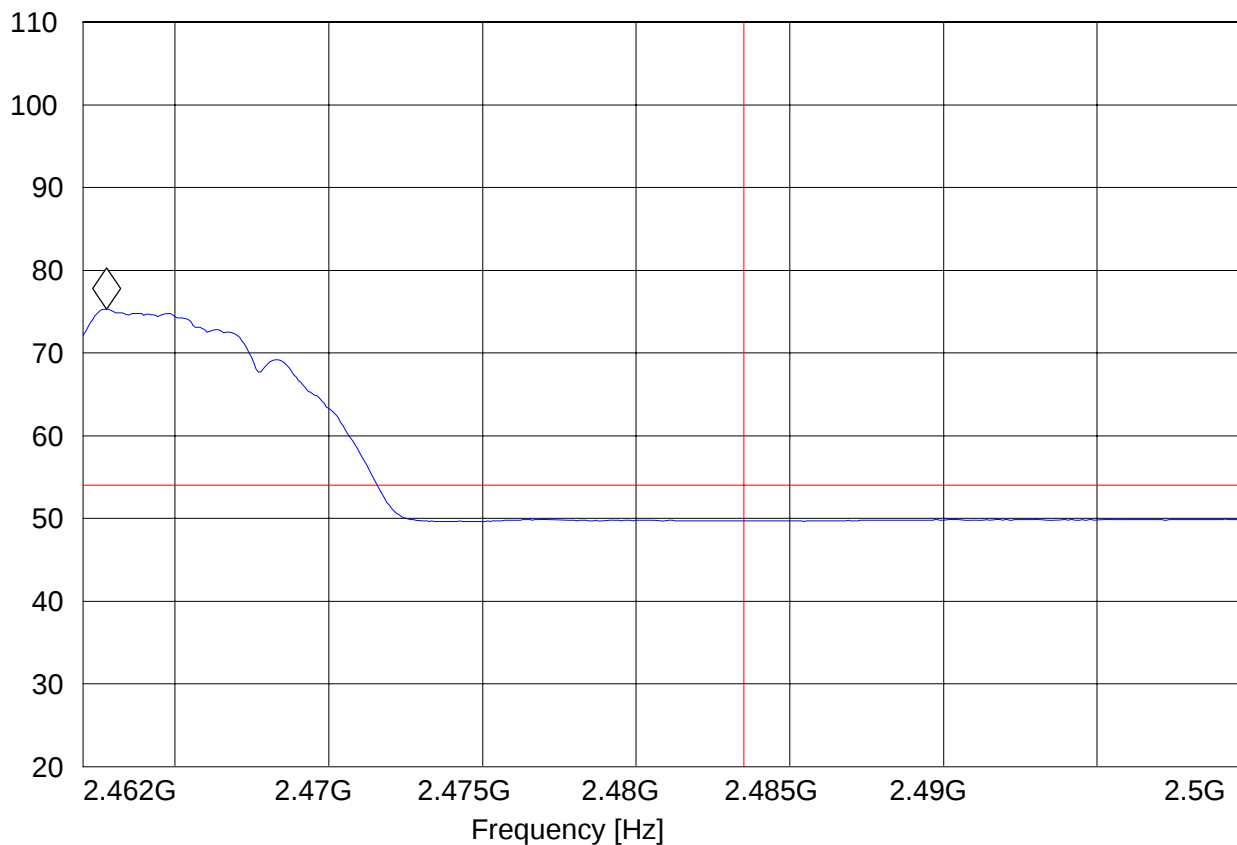




PEAK, 802.11g MODE (2412MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH1 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: FCC15.247 LBE_PK

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

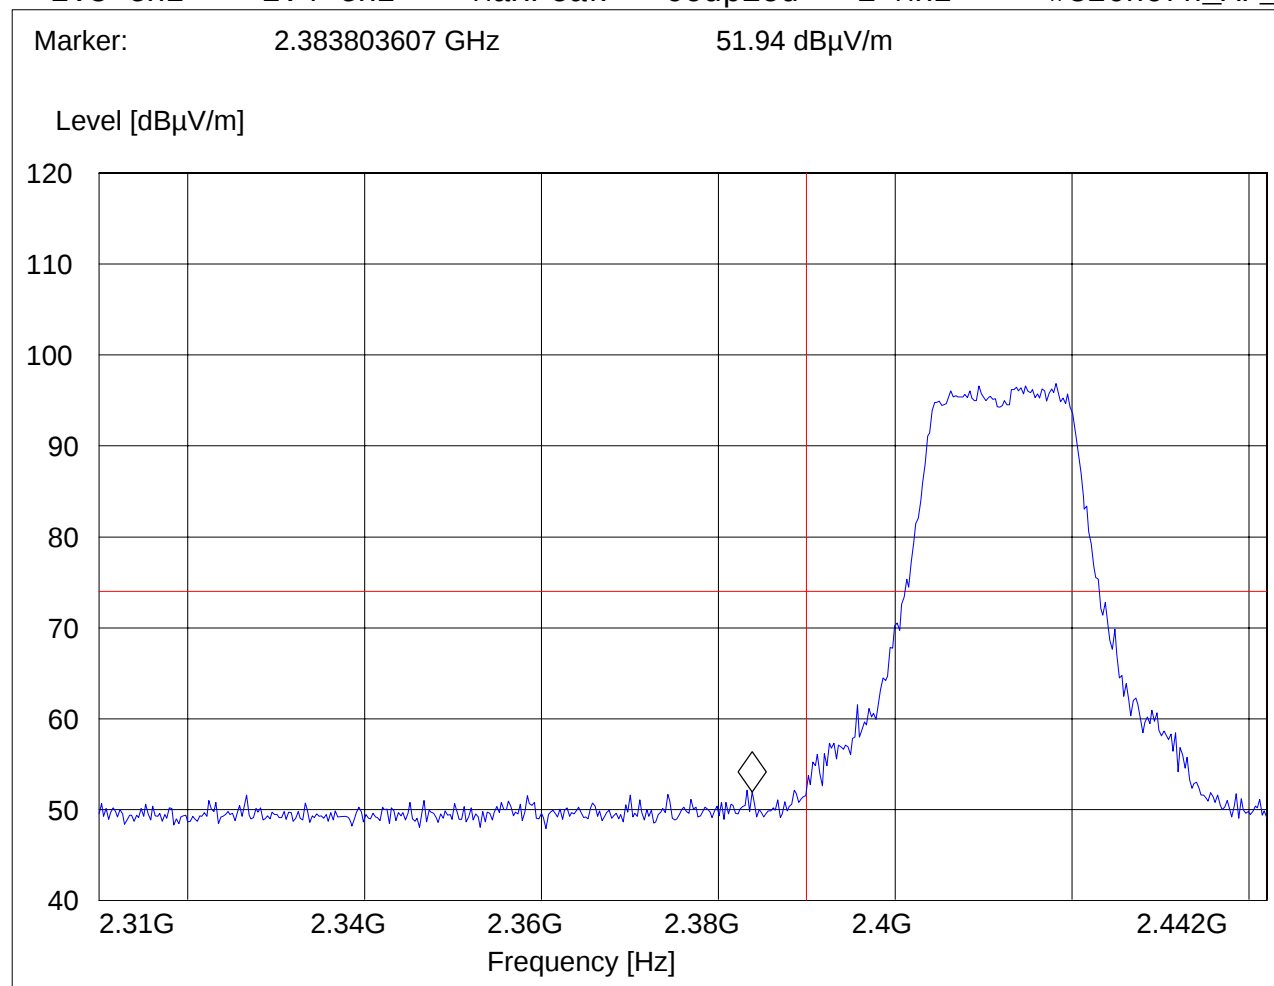




AVG, 802.11g MODE (2412MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH1 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: FCC15.247 LBE_AVG

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

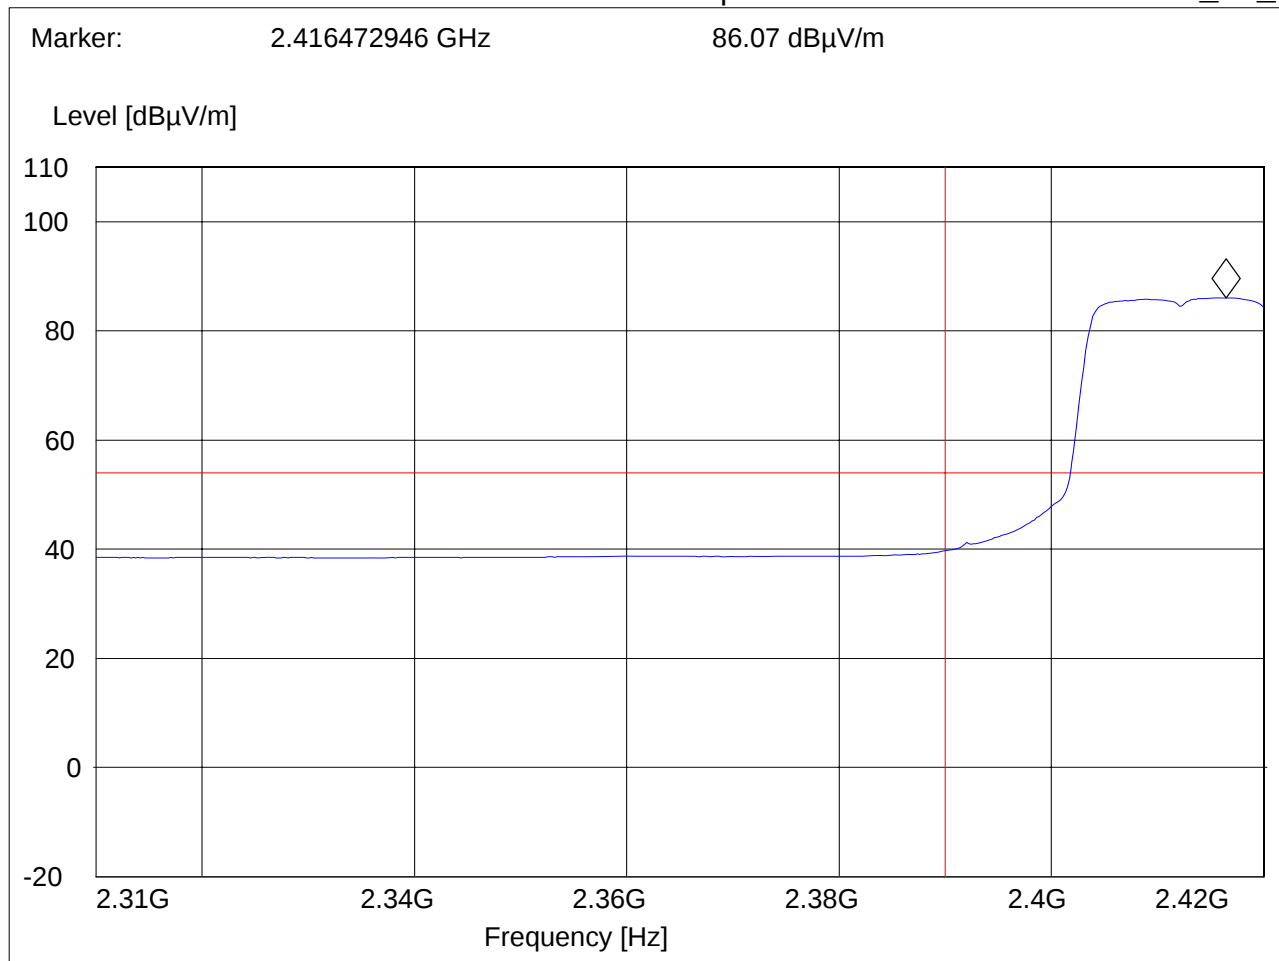



PEAK, 802.11g MODE (2462MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH11 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: FCC15.247 HBE_PK

SWEEP TABLE: "FCC15.247 HBE_PK"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.467102204 GHz 93.37 dB μ V/m

Level [dB μ V/m]

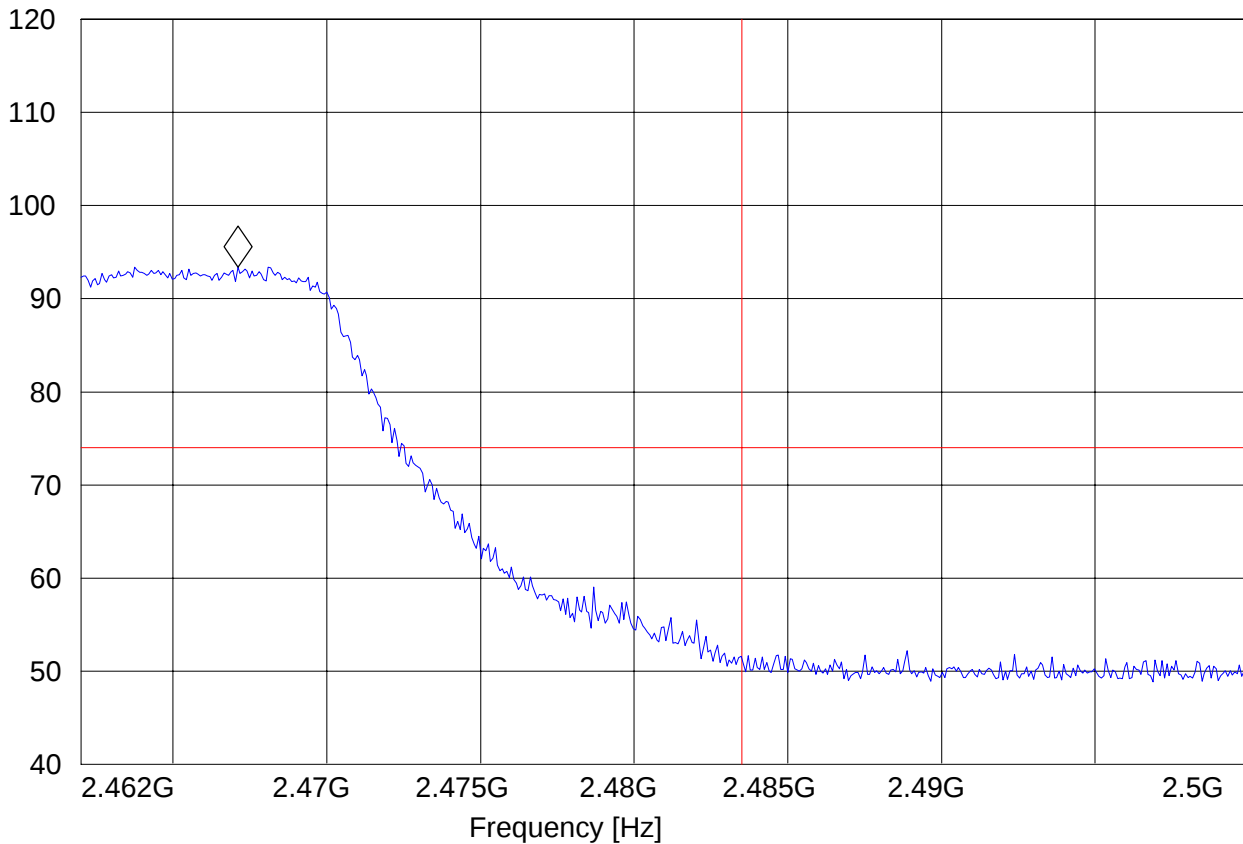



AVG, 802.11g MODE (2462MHz)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276, 004401120210105
Customer:: Toshiba
Test Mode: WLAN CH11 802.11g
Ant Orientation: V
EUT Orientation: H
Test Engineer: Peter Mu
Voltage:: Battery
Sweep: FCC15.247 HBE_AVG

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.462 GHz 81.61 dB μ V/m

Level [dB μ V/m]

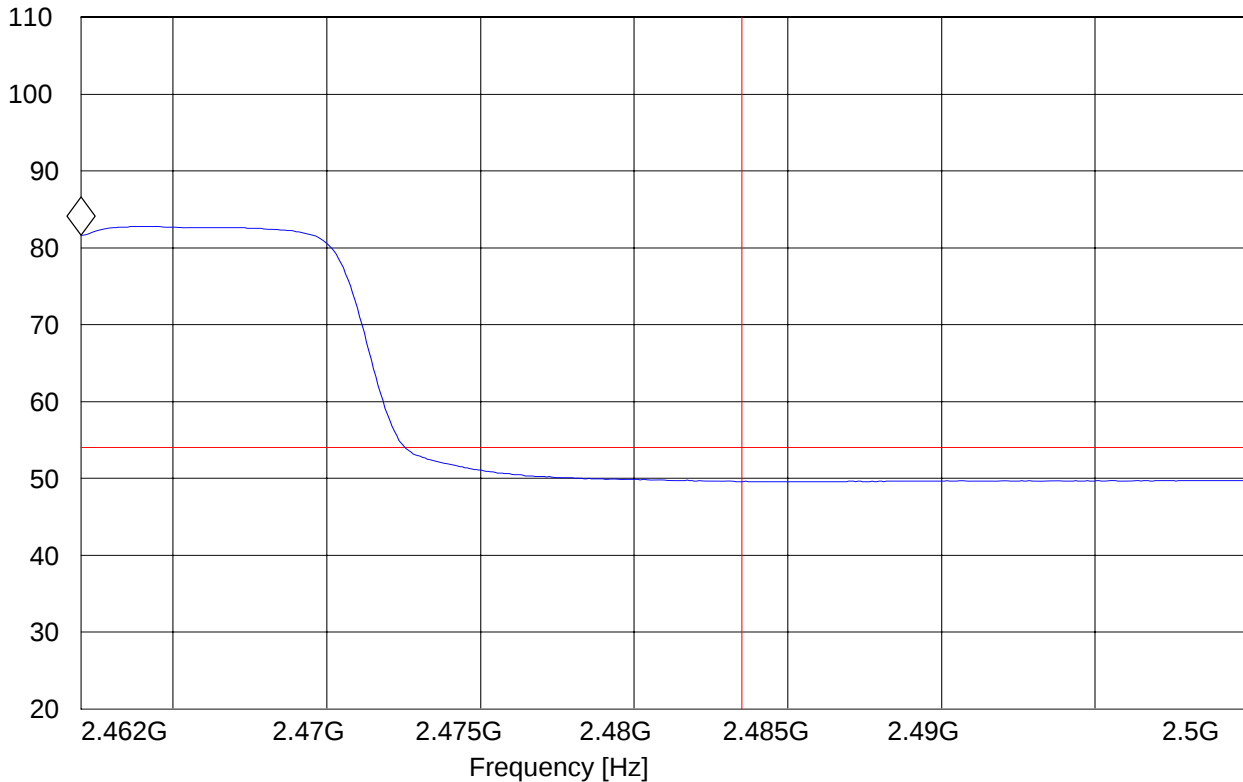

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels



5.3.2 RESULTS 802.11 (worst case)

30MHz – 1GHz

Antenna: vertical

Note: This plot is valid for low, mid, high channels and both polarizations (worst-case plot)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 6, 360° rotation
Ant Orientation: V
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_30M-1G_V

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 76.653307 MHz 38.66 dBμV/m

Level [dBμV/m]

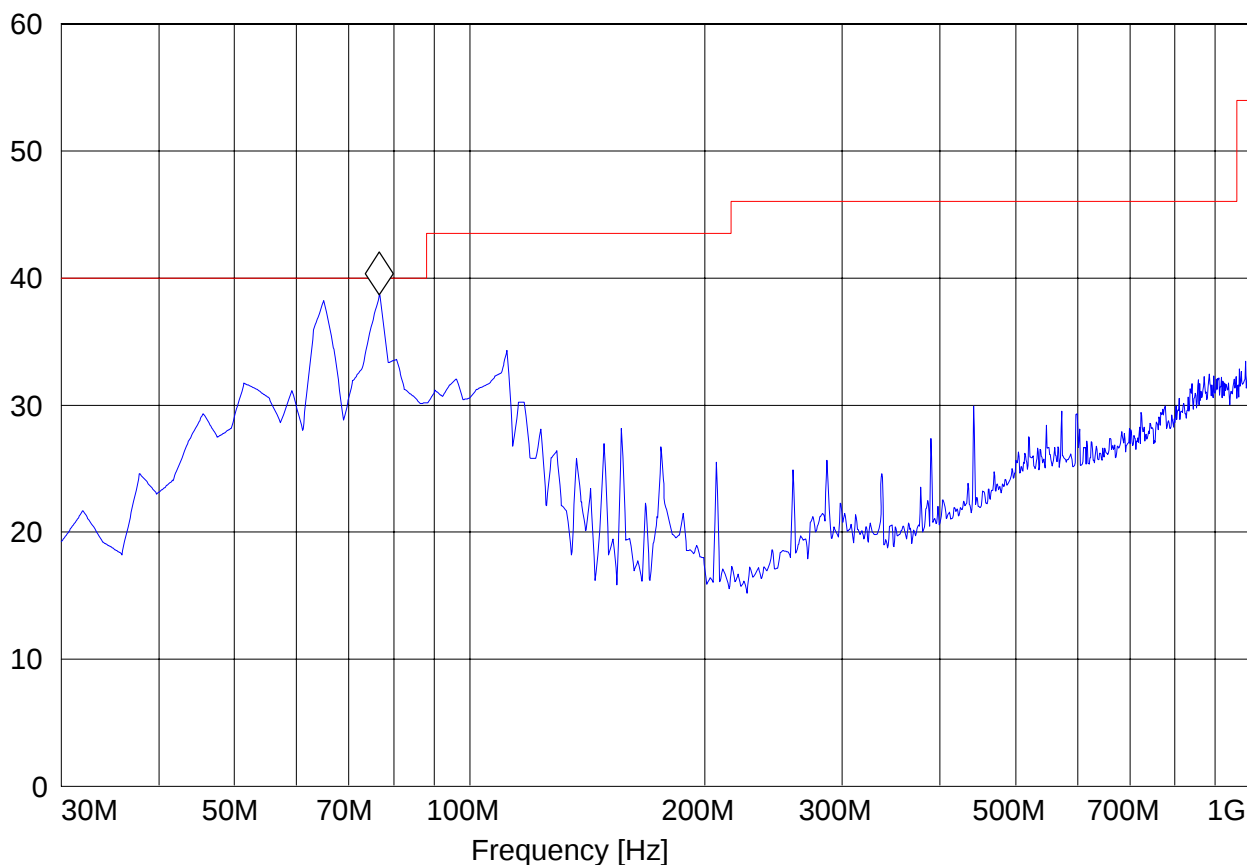



1-3GHz (2412MHz)

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, 198°, marker on uplink sig
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: fcc 15.247_1-3G

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.414829659 GHz 91.05 dBμV/m

Level [dBμV/m]

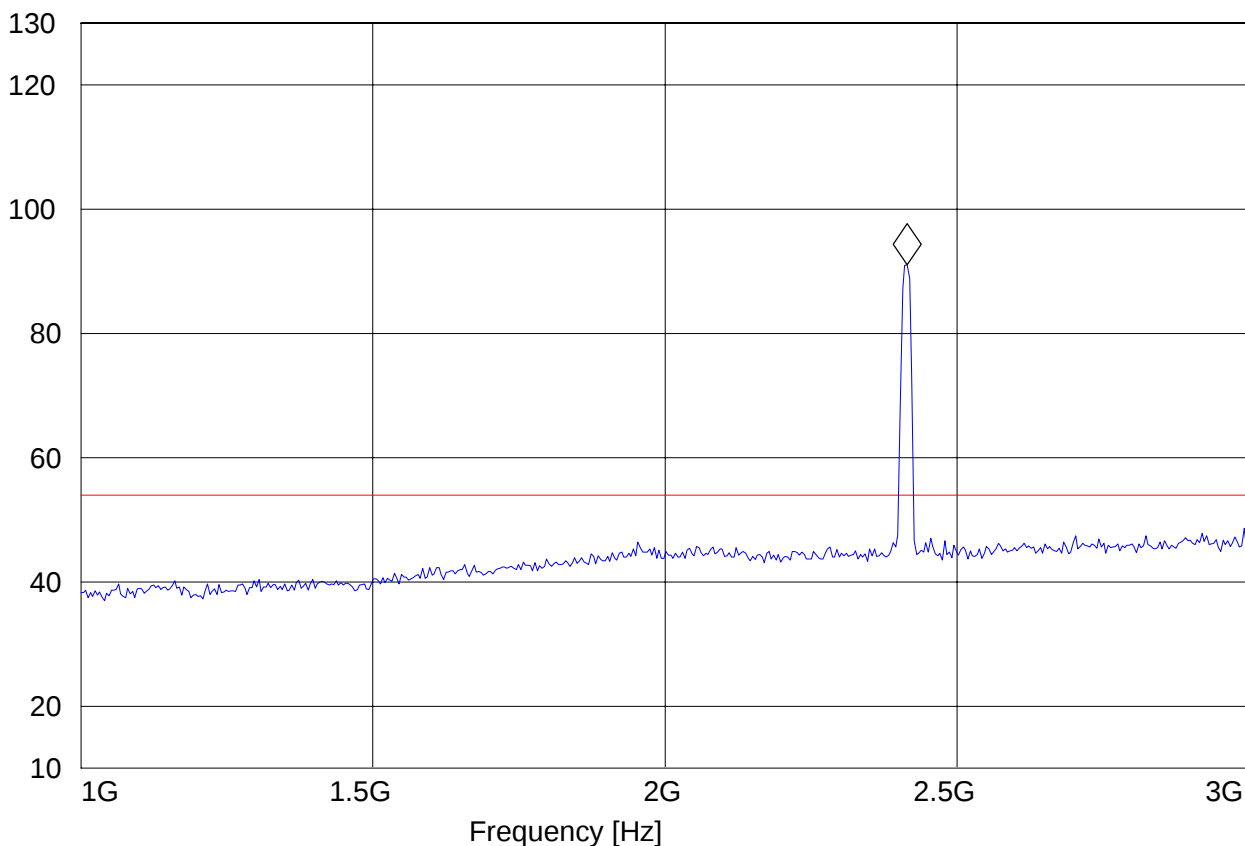



1-3GHz (2437MHz)

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 6, 198°, marker on uplink sig
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_1-3G

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.438877756 GHz 89.03 dBμV/m

Level [dBμV/m]

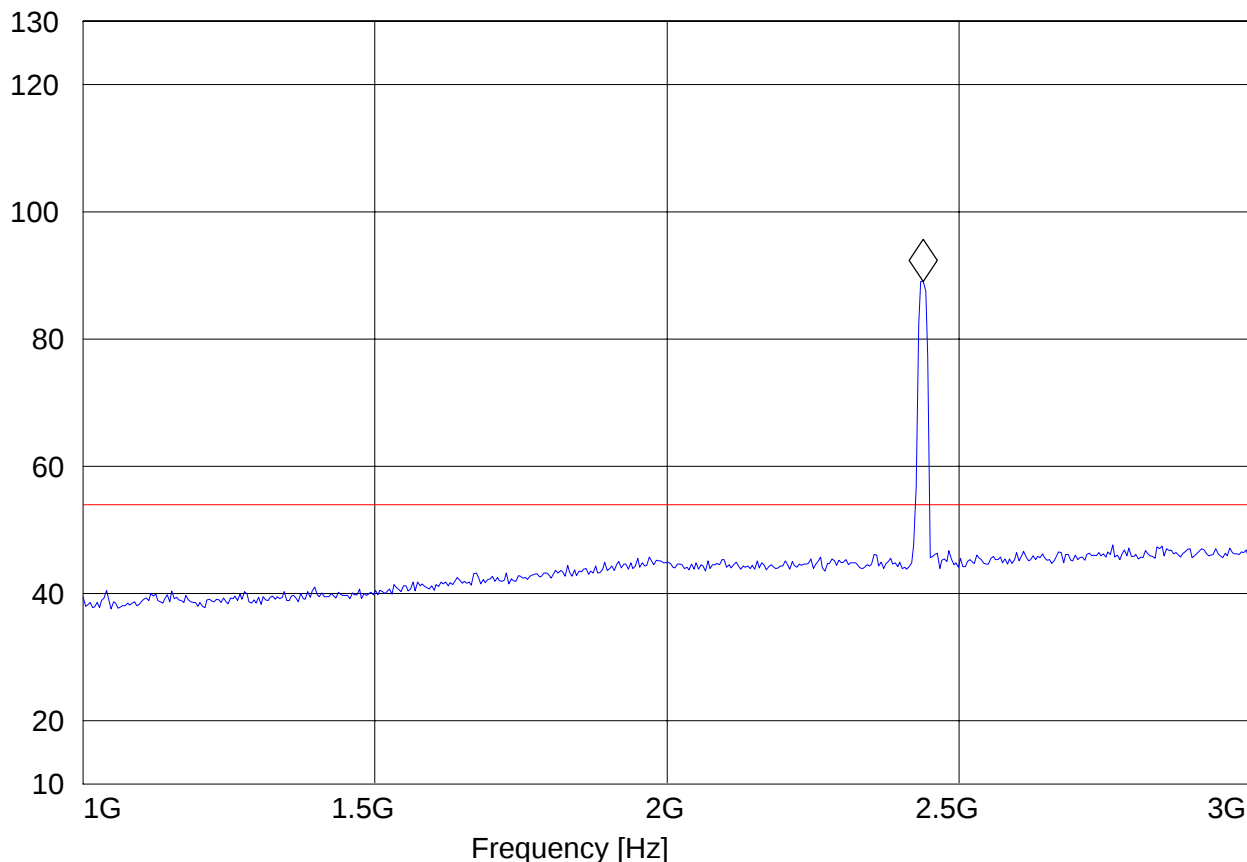



1-3GHz (2462MHz)

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 11, 198°, marker on uplink sig.
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_1-3G

SWEEP TABLE: "FCC15.247_1-3G"

Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.462925852 GHz 88.33 dBμV/m

Level [dBμV/m]

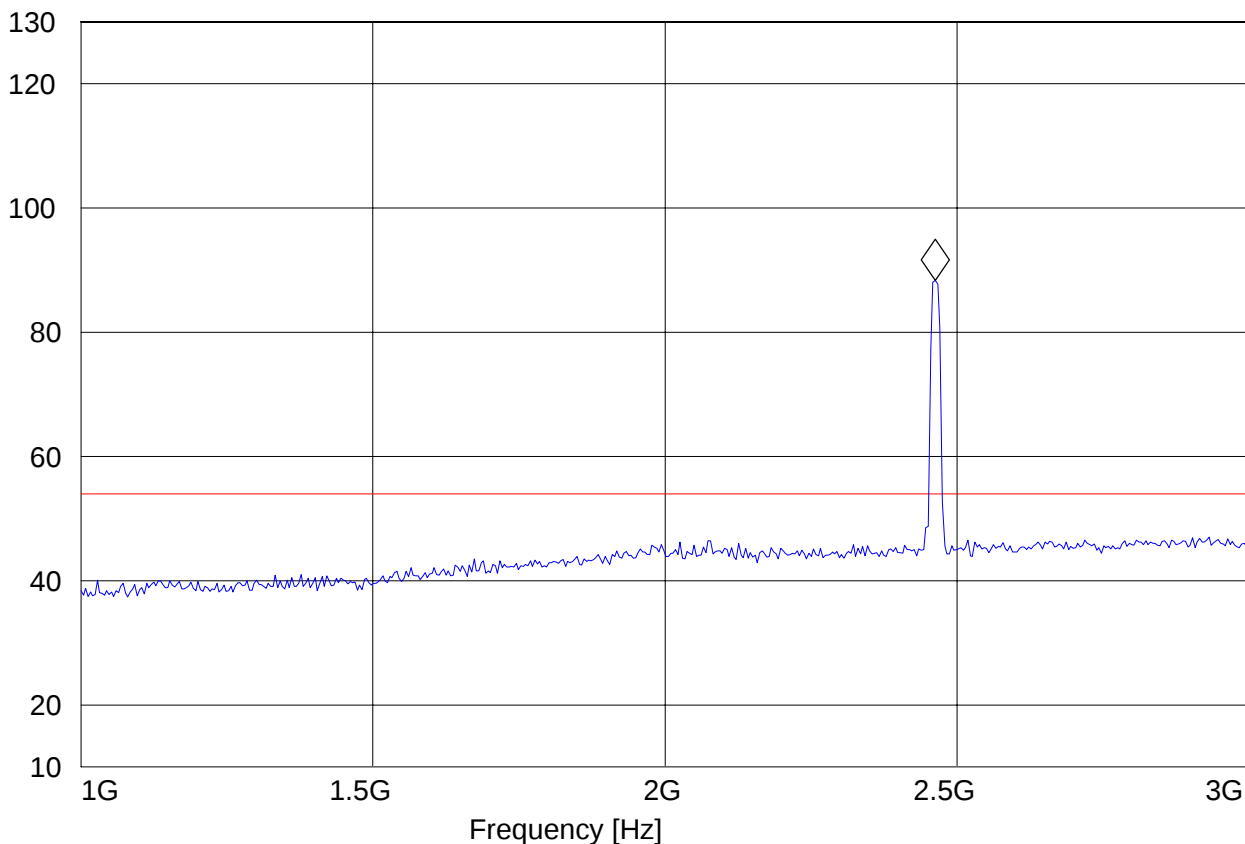



3-18GHz (2412MHz)

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: fcc 15.247_3-18G

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.114228457 GHz 40.36 dBμV/m

Level [dBμV/m]

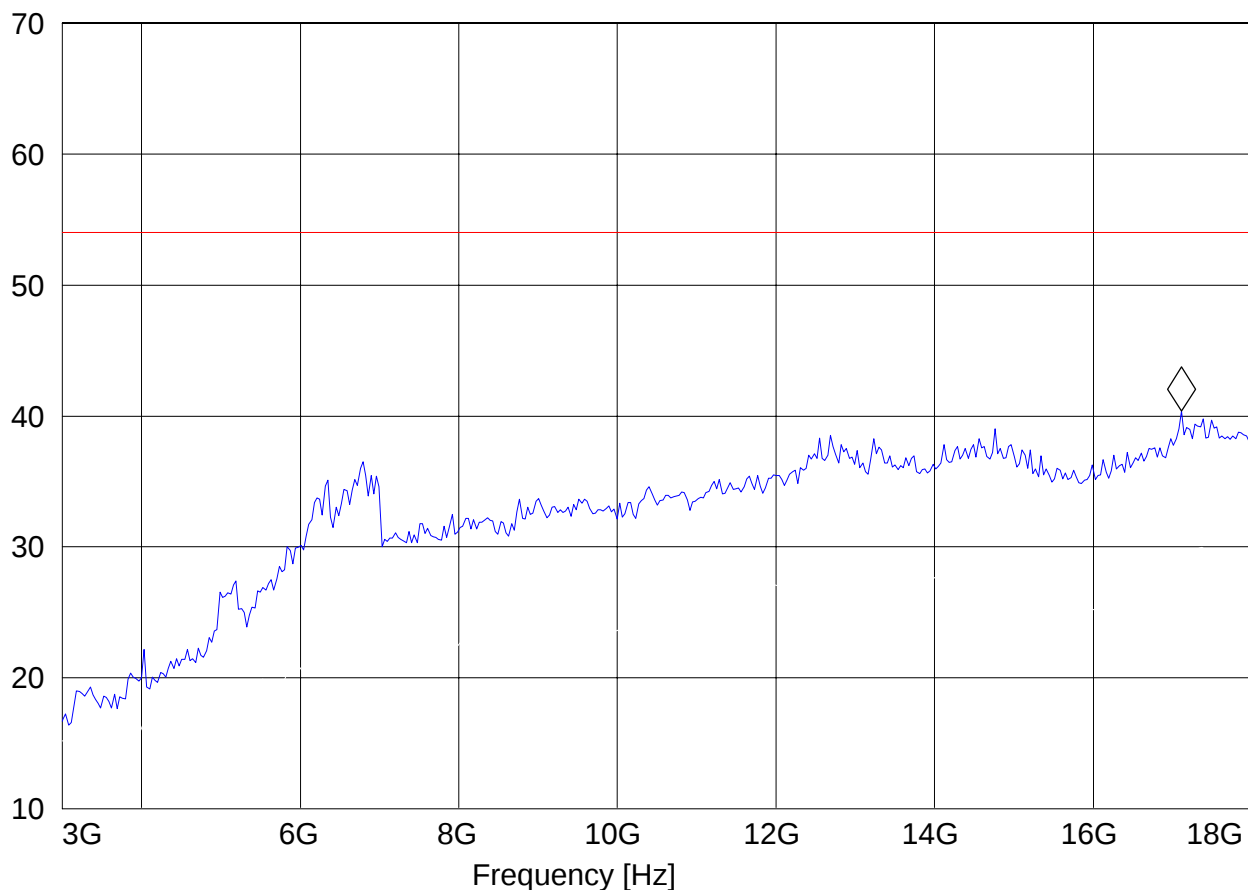



3-18GHz (2437MHz)

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 6, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_3-18G

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.216432866 GHz 39.68 dBμV/m

Level [dBμV/m]

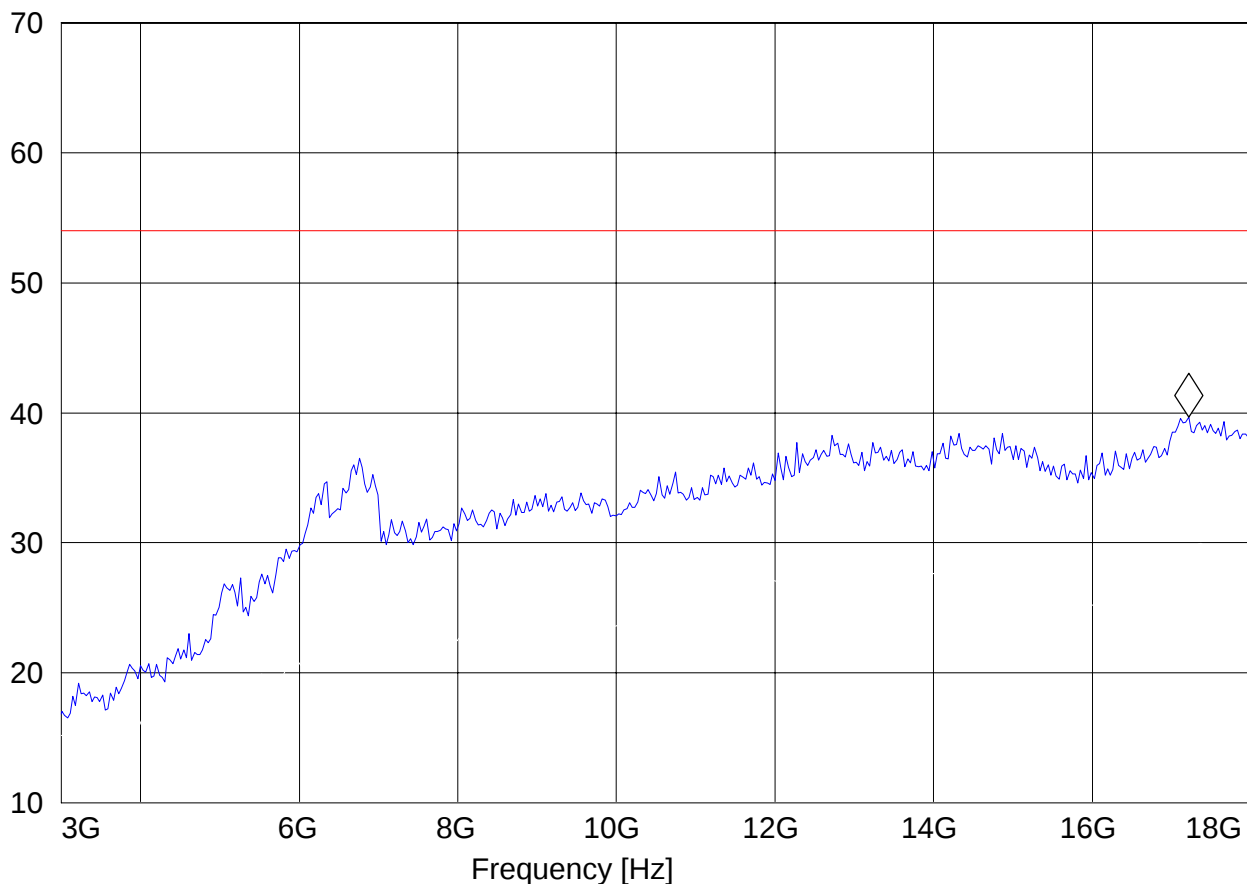



3-18GHz (2462MHz)

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN ch 11, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: FCC 15.247_3-18G

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.386773547 GHz 40.18 dBμV/m

Level [dBμV/m]

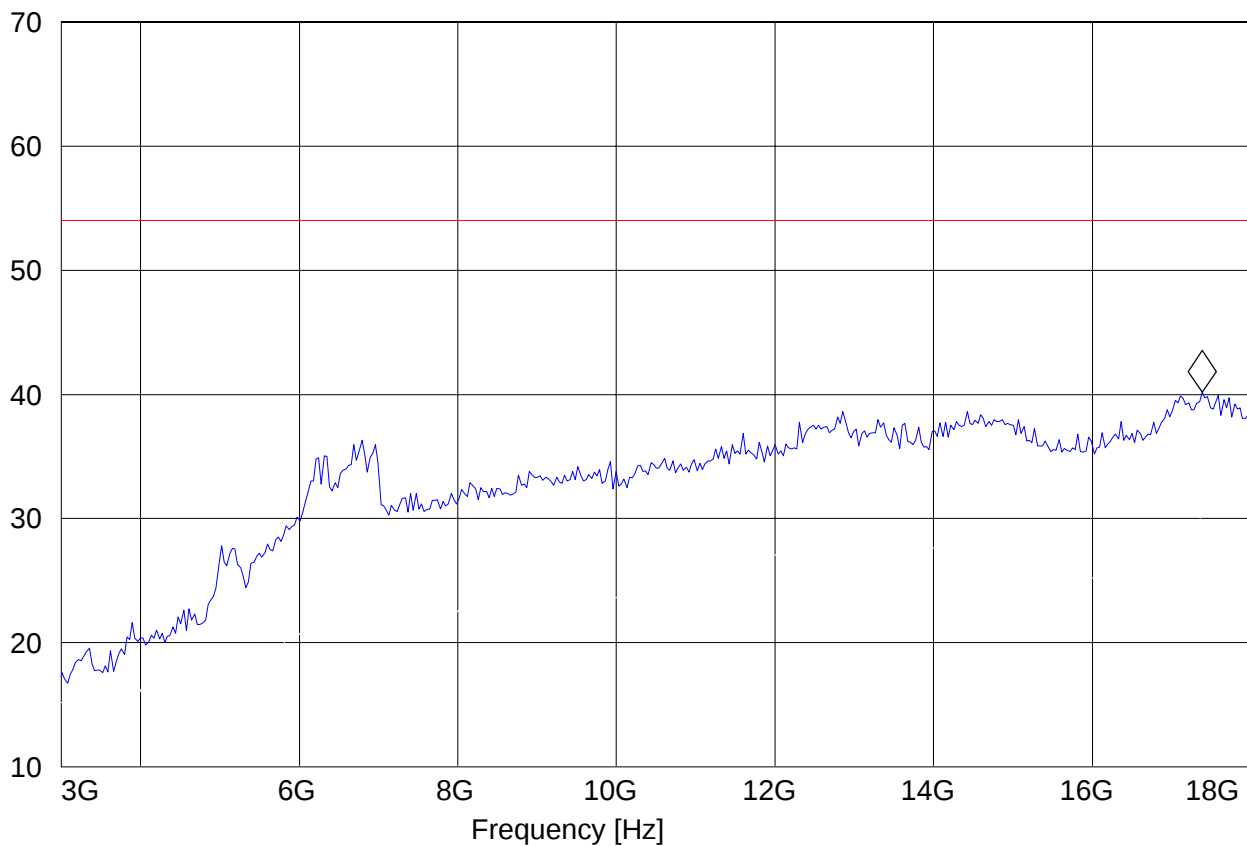



18-25GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)


Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276, 004401120210105
Customer: Toshiba
Test Mode: WLAN ch 1, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: fcc 15.247_18-26.5G

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	25.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18-26.5G

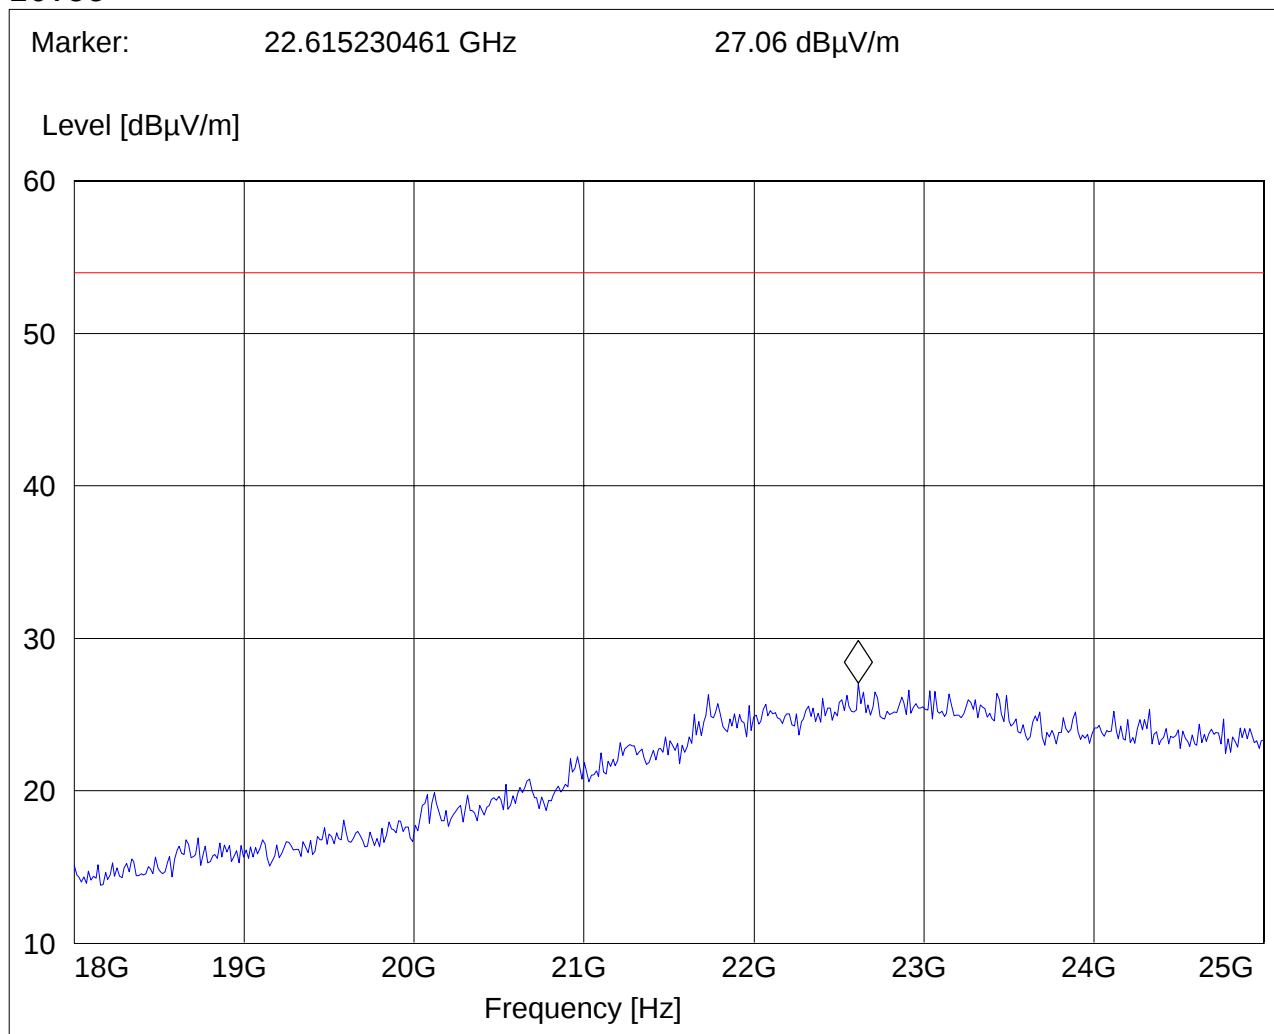

5.4 RECEIVER SPURIOUS RADIATION § 15.209/RSS210

5.4.1 LIMITS

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit , unless specified with the plots.



5.4.2 RESULTS

30MHz – 1GHz

Antenna: vertical (worst case)

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN Idle Mode, 198°, 360° rotation
Ant Orientation: V
EUT Orientation: V
Test Engineer: Ed
Voltage:: Battery
Sweep: Canada RE_30M-1G_V

SWEEP TABLE: "CANDA RE_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

Marker: 976.673347 MHz 33.02 dB μ V/m

Level [dB μ V/m]

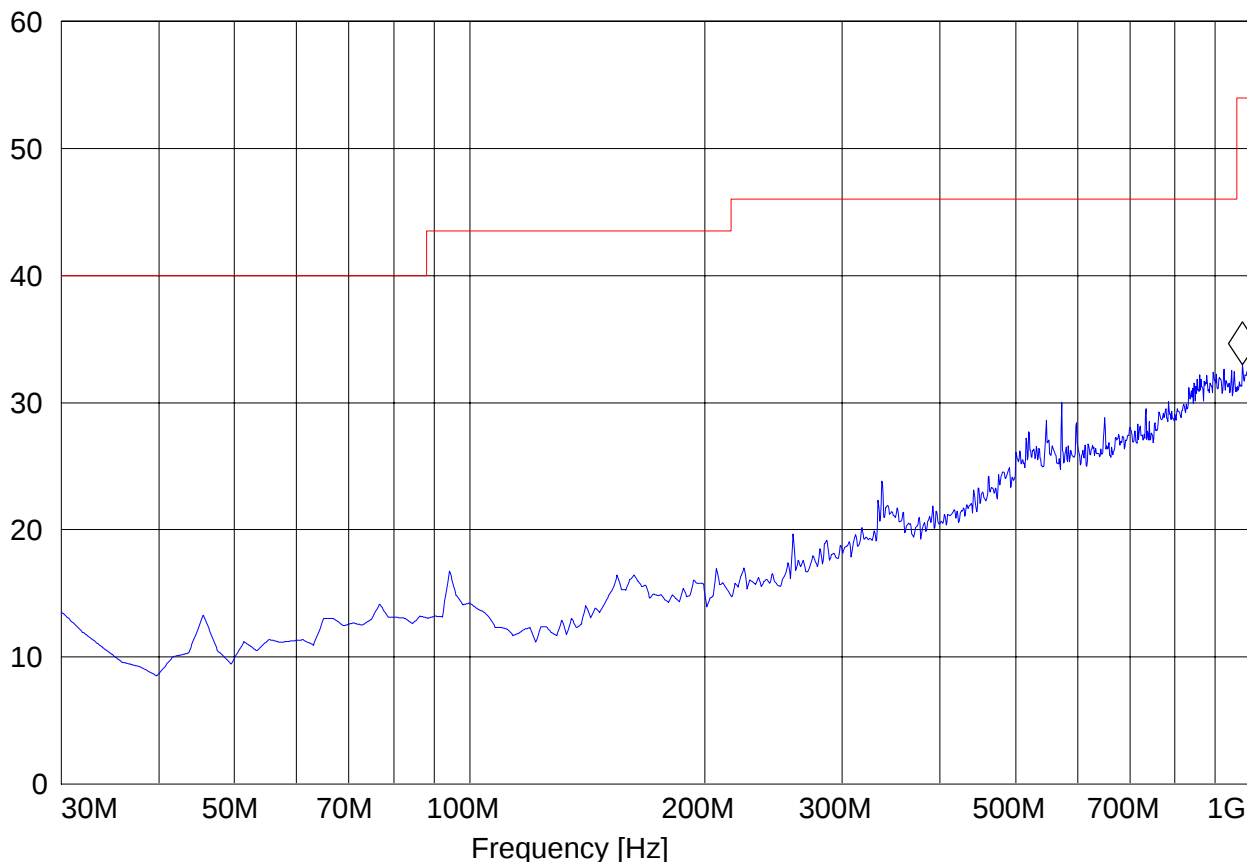



1-3GHz

Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA


EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN Idle Mode, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: Canada RE_1-3G

SWEEP TABLE: "CANADA RE_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.827655311 GHz 48.62 dBμV/m

Level [dBμV/m]

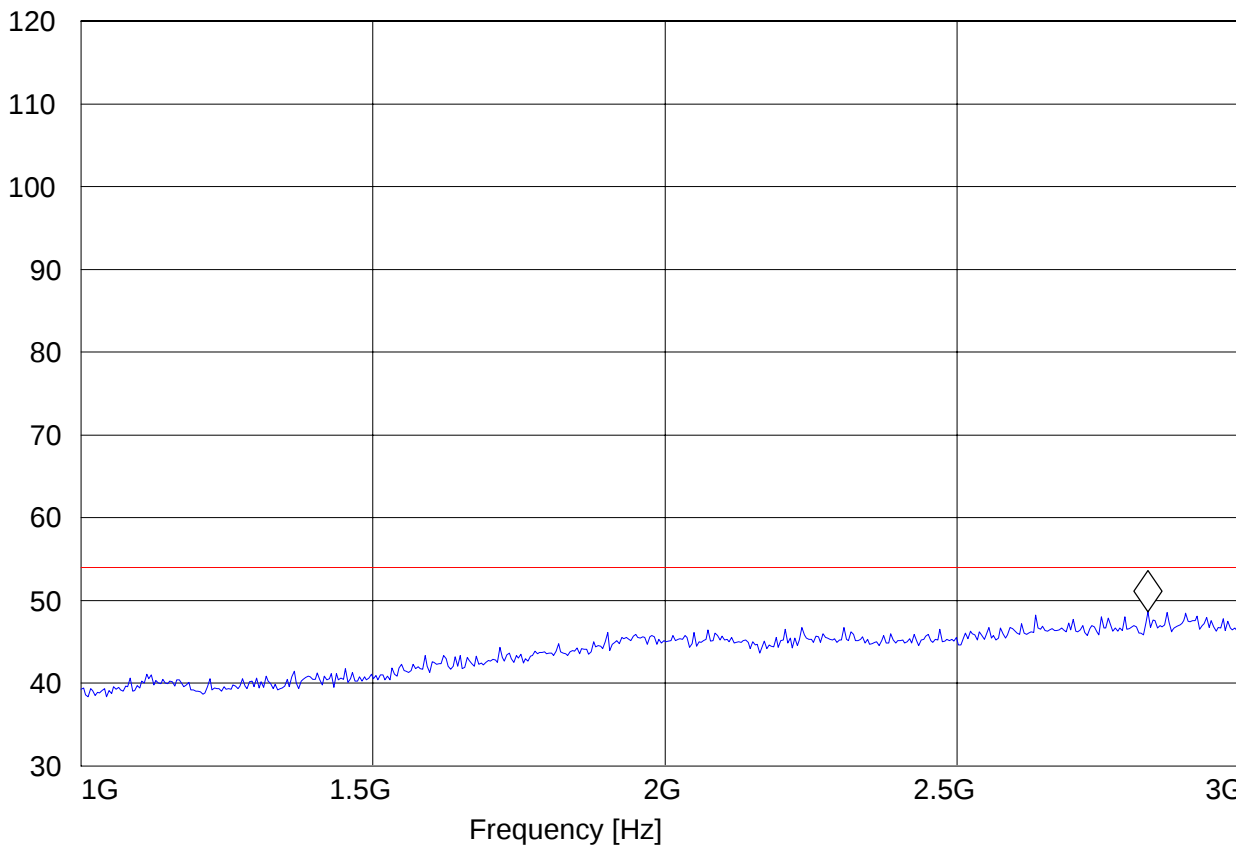



3-18GHz


Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN Idle Mode, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: Canada RE_3-18G

SWEEP TABLE: "CANADA RE_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

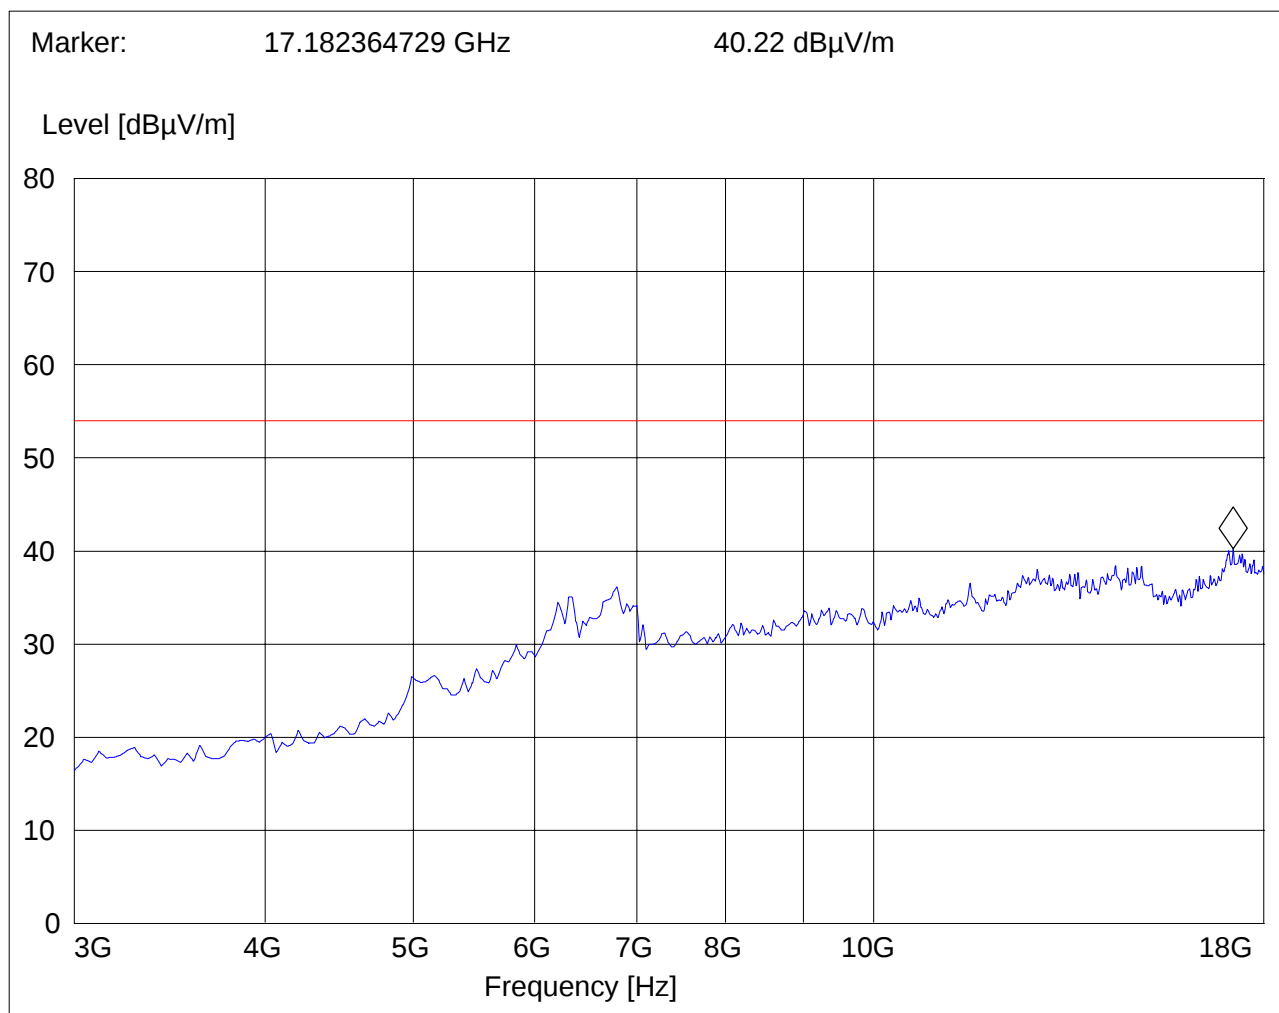



18-25GHz


Note: Peak Reading vs. Average limit

CETECOM Inc., 411 Dixon Landing Road, Milpitas CA 95035, USA

EUT:: 9901910000009276
Customer: Toshiba
Test Mode: WLAN Idle Mode, 198°
Ant Orientation: H
EUT Orientation: V
Test Engineer: Ed
Voltage:: AC Adapter
Sweep: Canada RE_18-26.5G

SWEEP TABLE: "CANADA RE_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 18- 26.5G

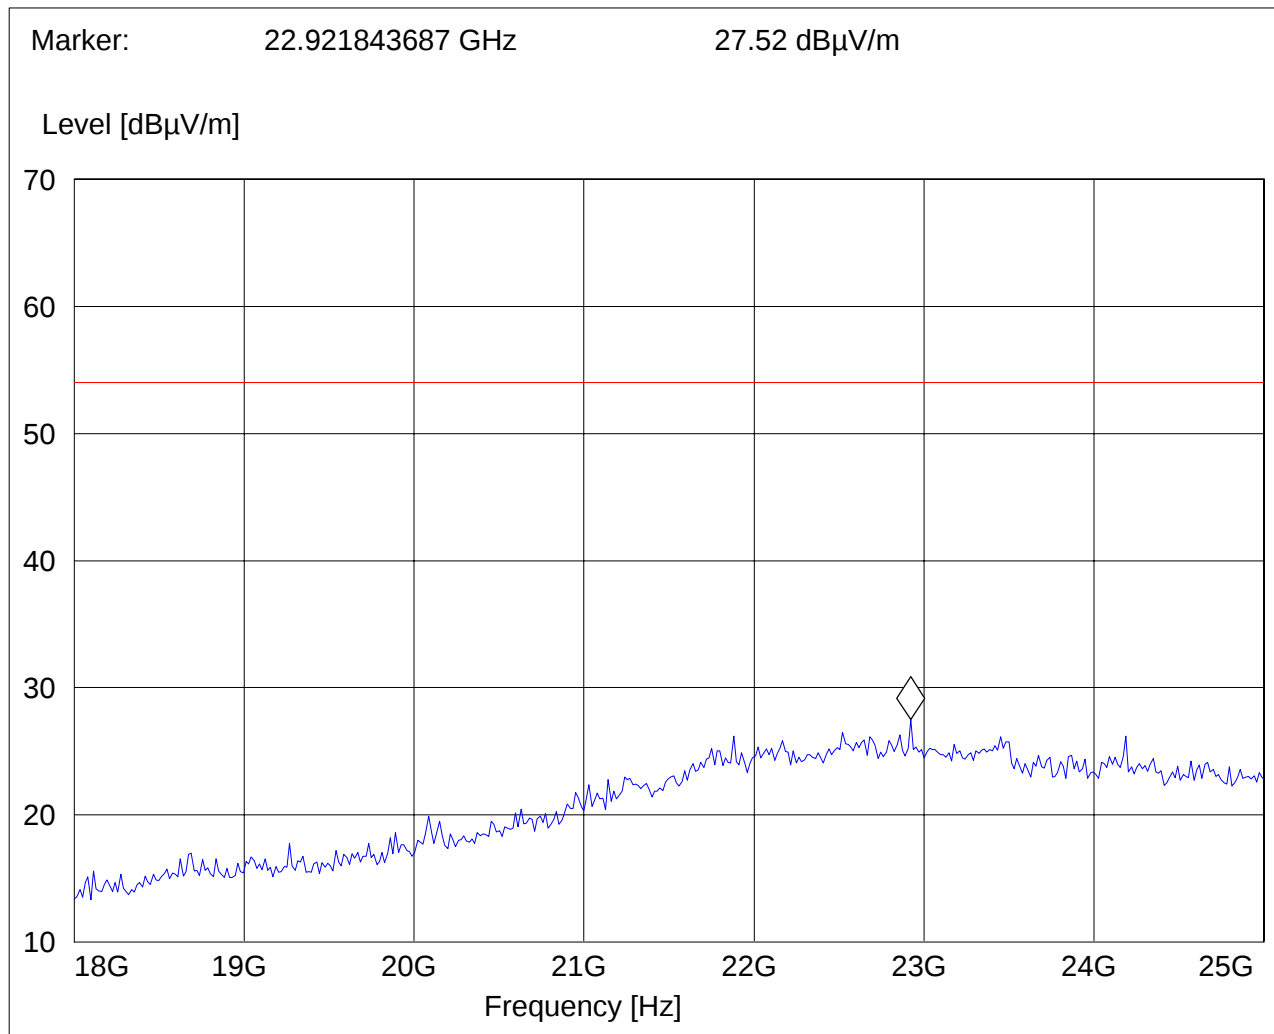



6 Measurements (CONDUCTED)

6.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)

6.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm

*limit is based upon antenna gain of less than or equal to 6dBi.

6.1.2 RESULTS:


TEST CONDITIONS Frequency (MHz)	MAXIMUM PEAK OUTPUT POWER (dBm)		
	2412 MHz	2437 MHz	2462 MHz
802.11b	18.13	17.66	16.79
802.11g	18.99*	18.53*	18.44*
802.11g (corrected)	19.77	19.33	19.22

* Since 6dB bandwidth for 802.11g is greater than analyzer maximum resolution bandwidth of 10MHz correction factors apply. See section 6.3 for calculations.

6.2 6dB BANDWIDTH

TEST CONDITIONS Frequency (MHz)	6dB BANDWIDTH (kHz)		
	2412 MHz	2437 MHz	2462 MHz
802.11b	7014	7014	7014
802.11g	11.97	12.02	11.97


(2412 MHz) 802.11b CONDUCTED PEAK POWER

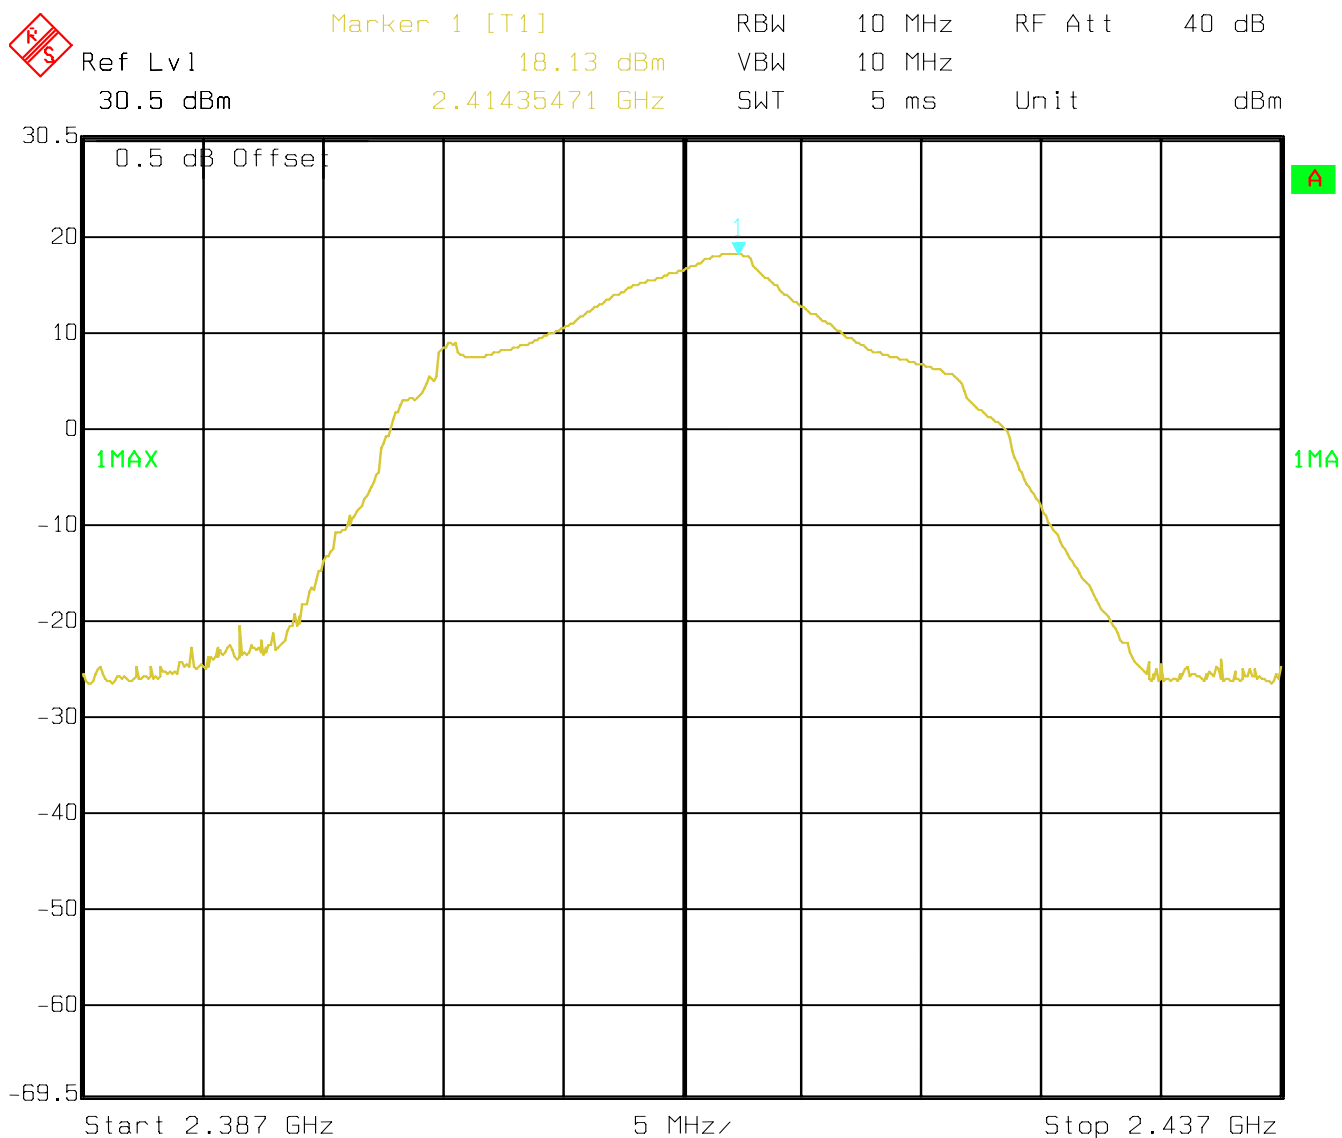

Date: 07.NOV.2006 12:12:40




(2437 MHz) 802.11b CONDUCTED PEAK POWER

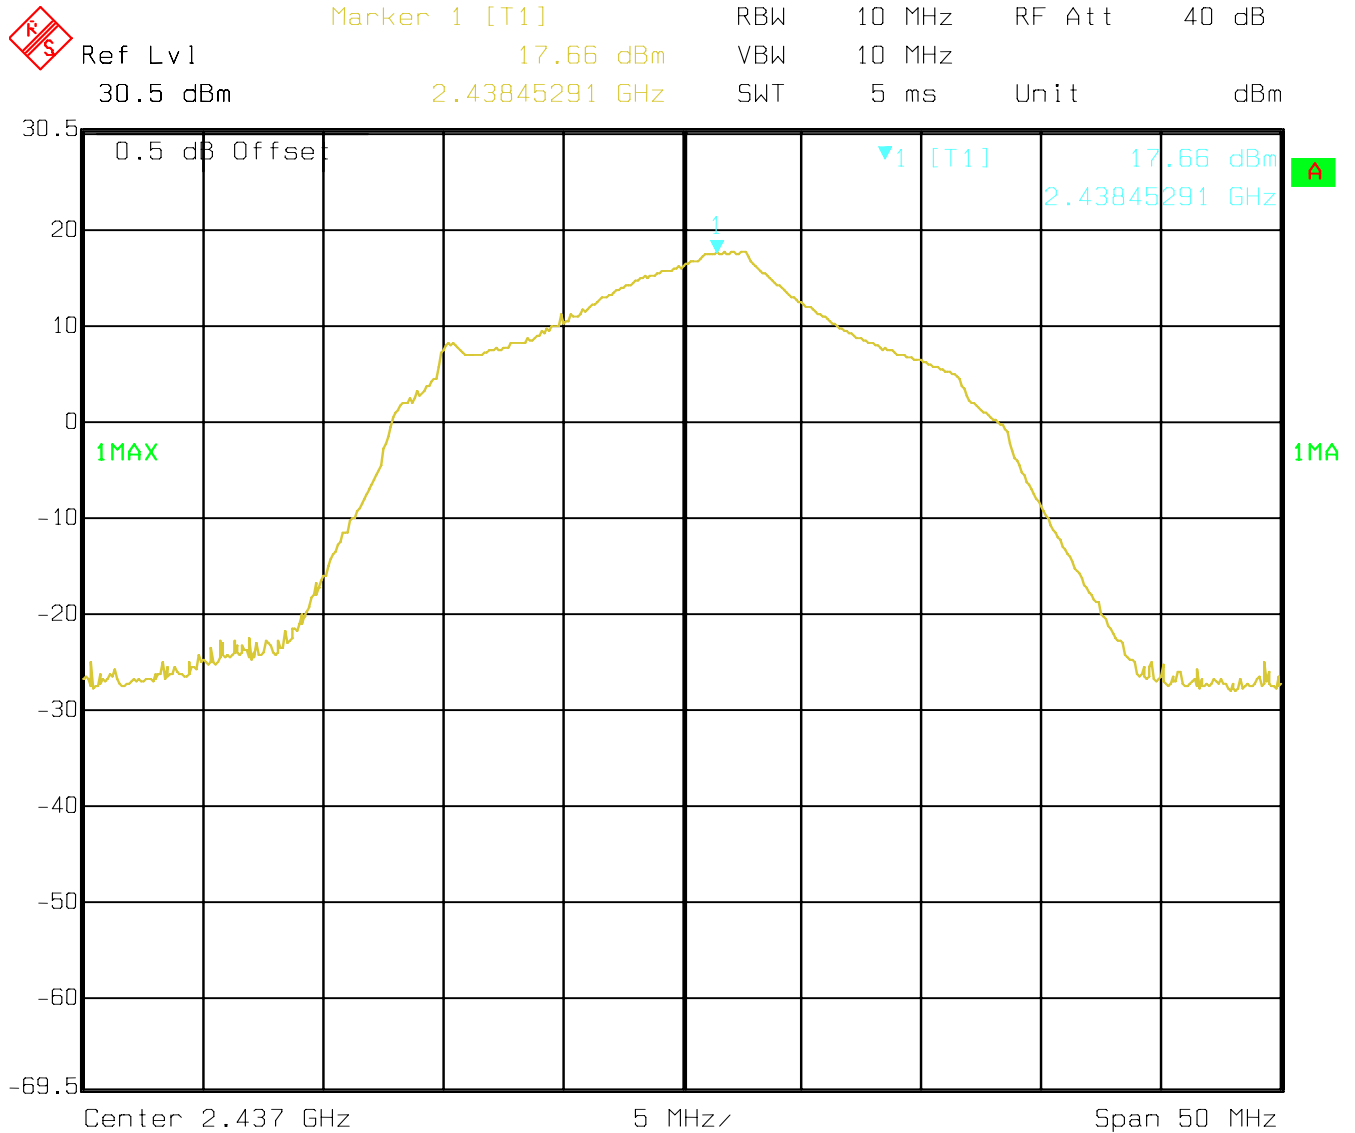

Date: 07.NOV.2006 12:40:38




(2462 MHz) 802.11b CONDUCTED PEAK POWER

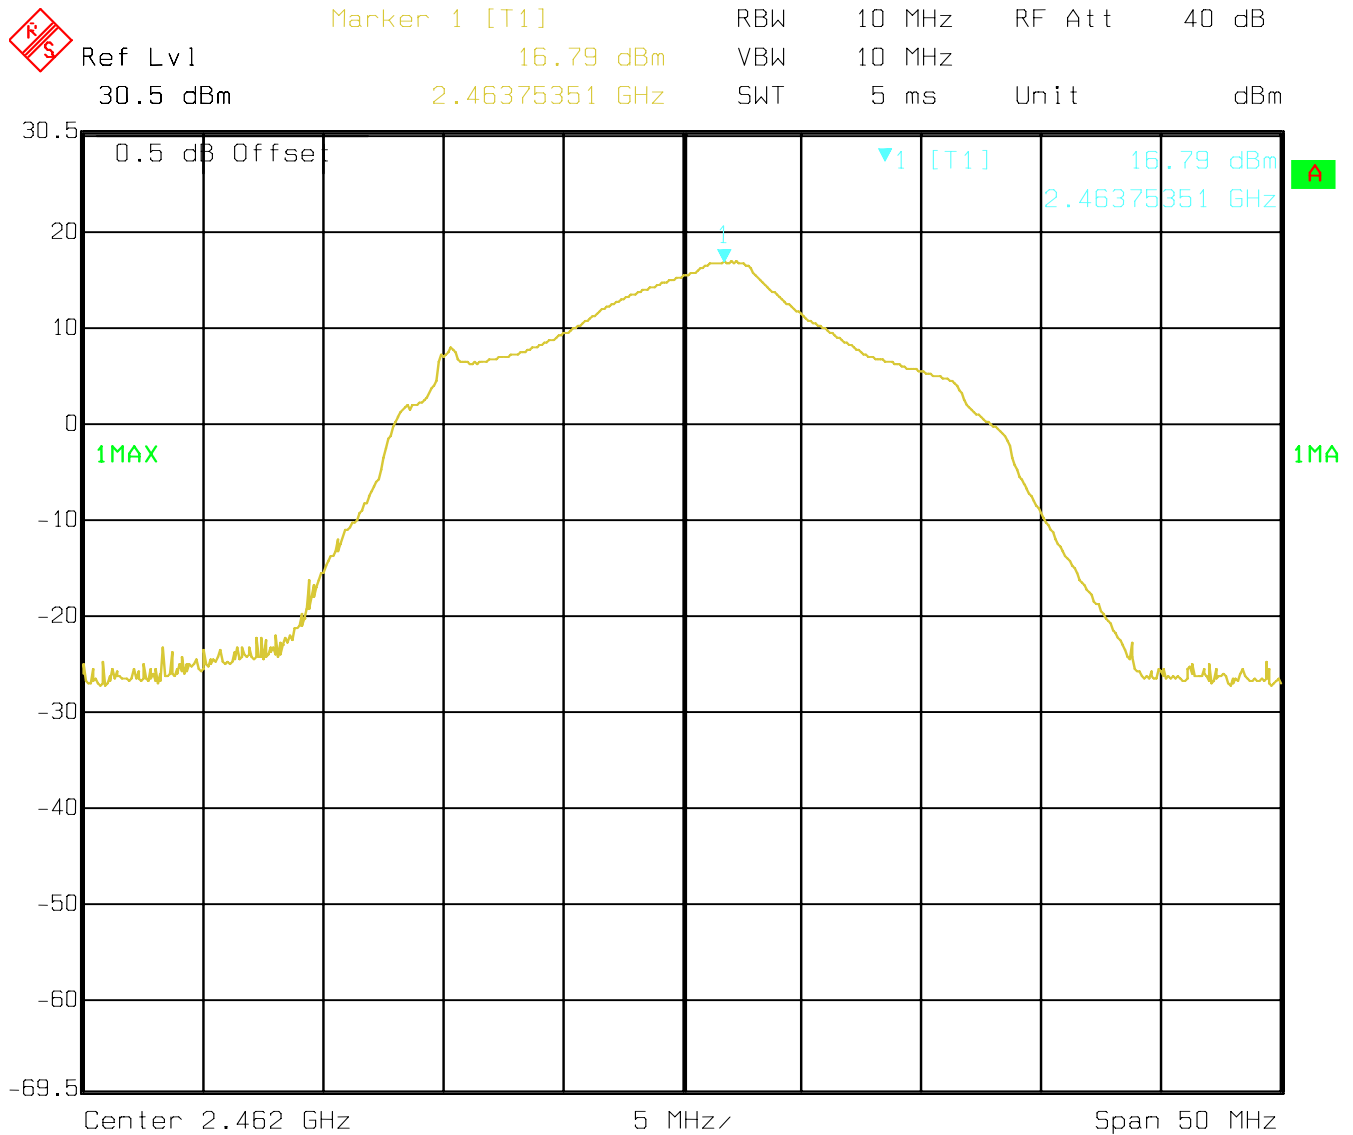

Date: 07.NOV.2006 12:43:10




(2412 MHz) 802.11g CONDUCTED PEAK POWER

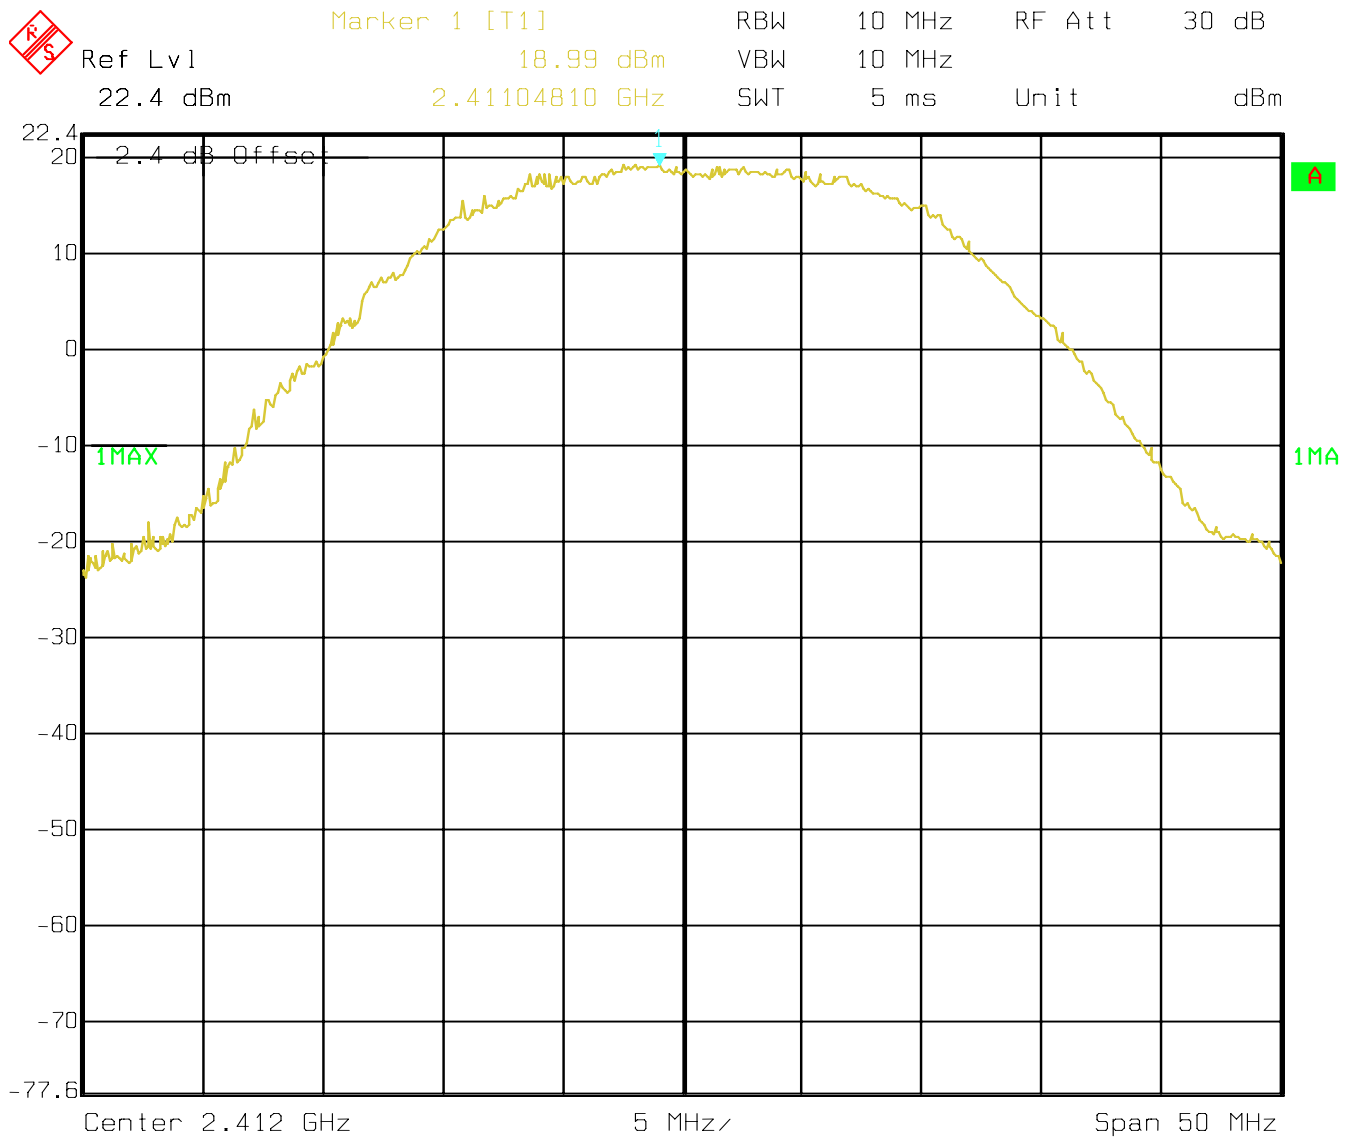

Date: 07.DEC.2006 18:16:39




(2437 MHz) 802.11g CONDUCTED PEAK POWER

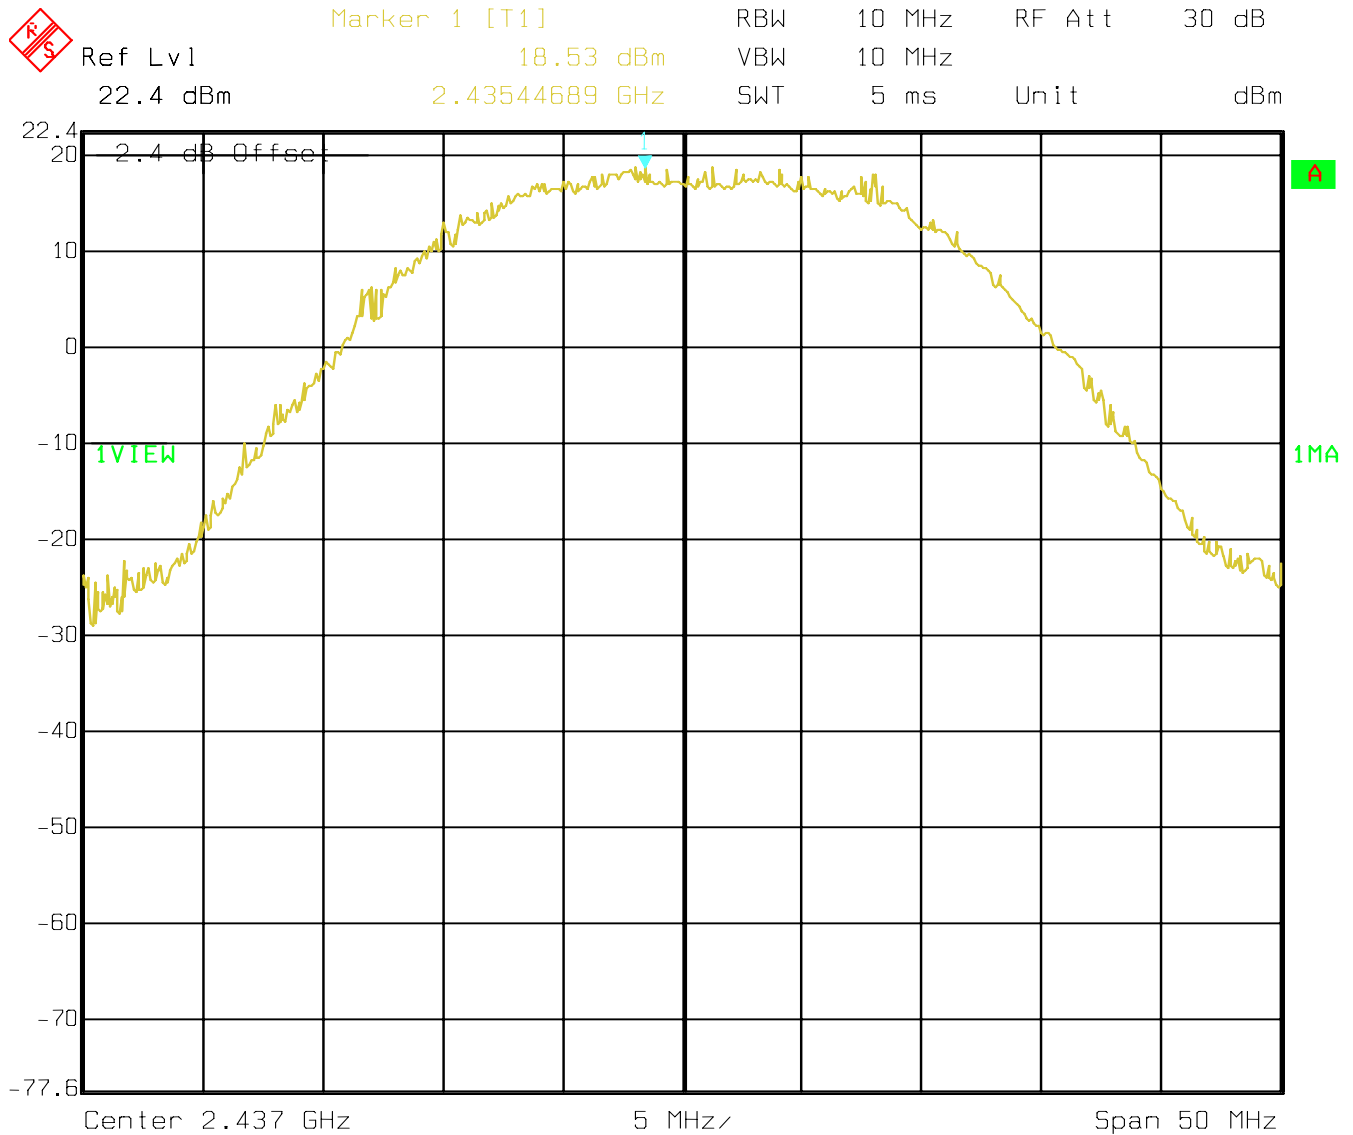

Date: 07.DEC.2006 18:17:40


(2462 MHz) 802.11g CONDUCTED PEAK POWER

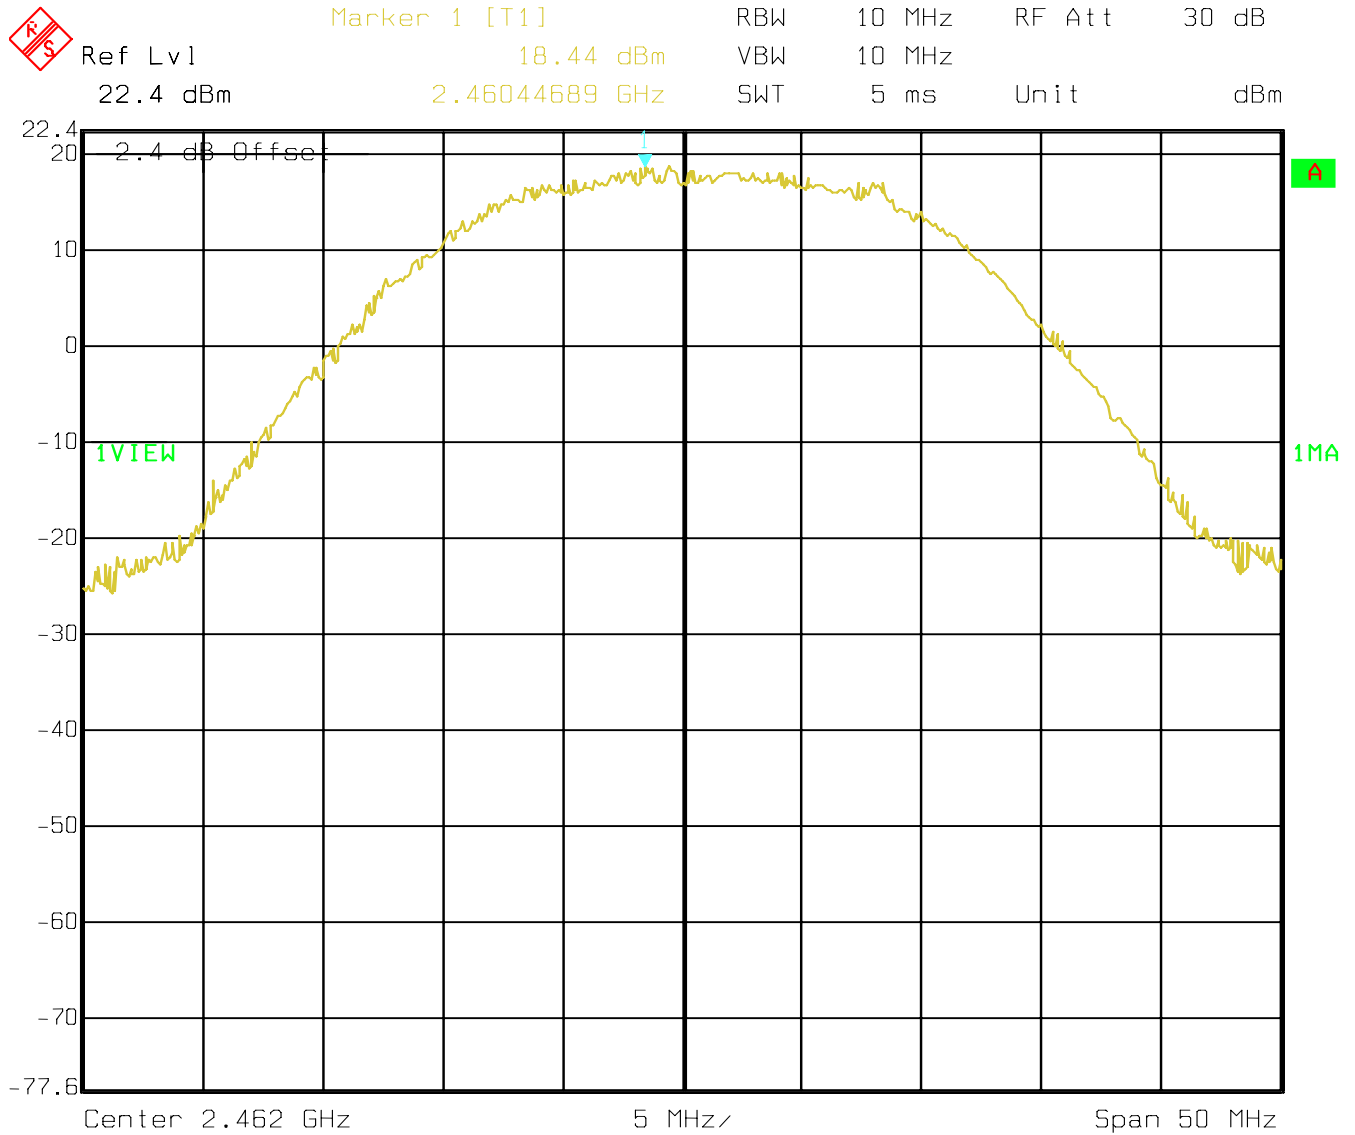

Date: 07.DEC.2006 18:18:28




(2412 MHz) 802.11b 6dB BW

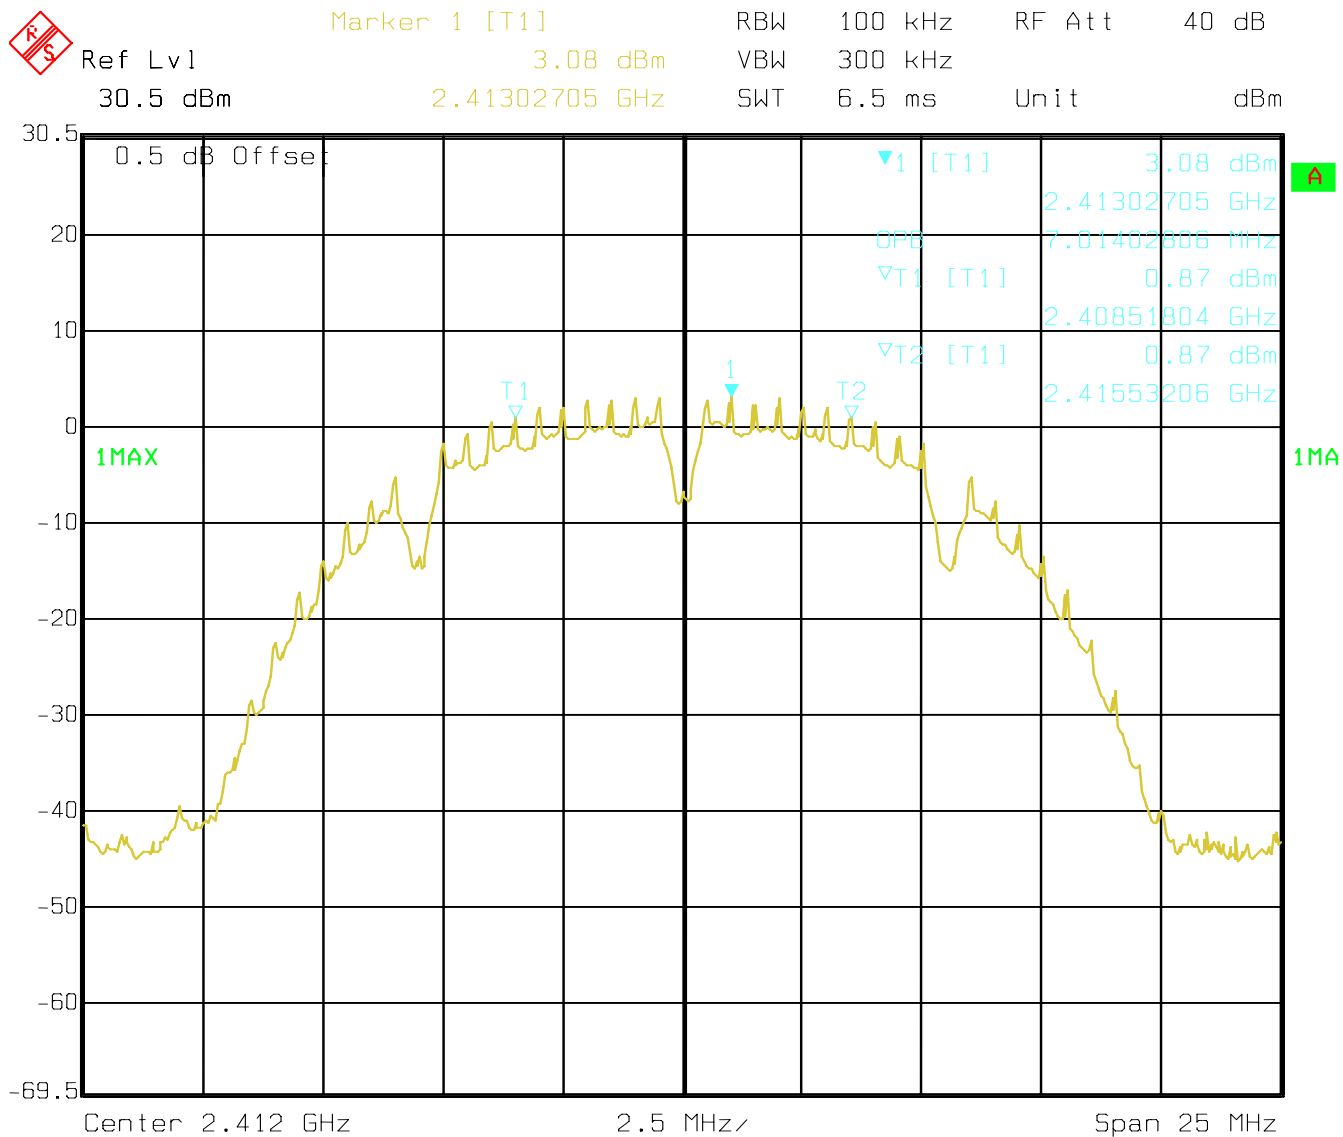

Date: 07.NOV.2006 12:59:49



(2437 MHz) 802.11b 6dB BW

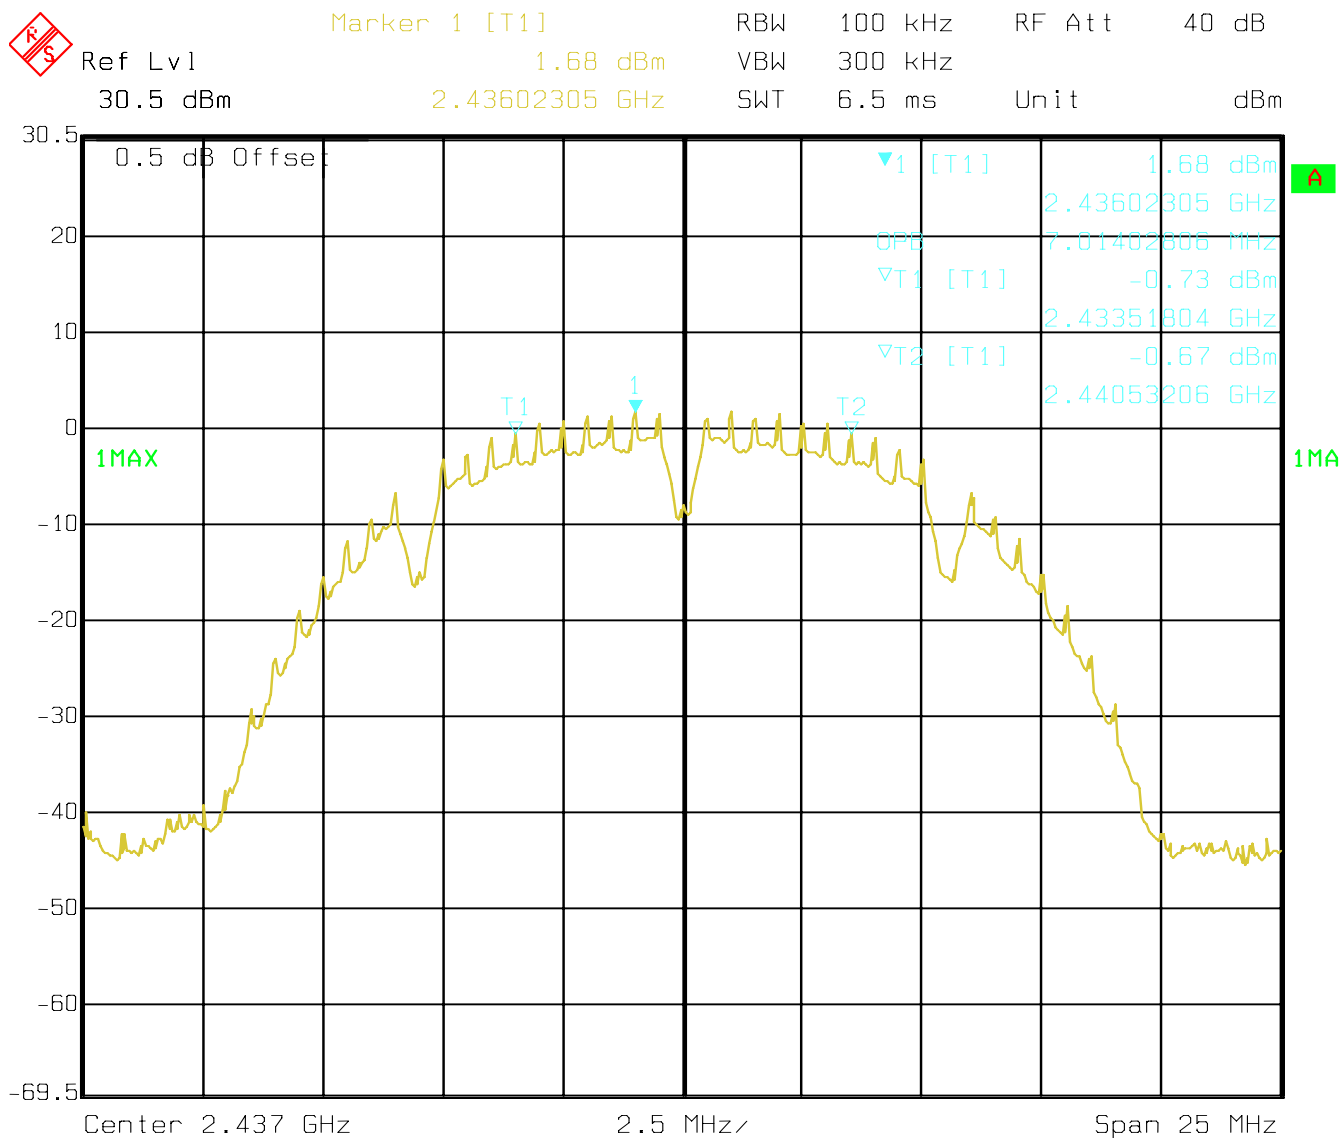


Date: 07.NOV.2006 12:58:33



(2462 MHz) 802.11b 6dB BW




Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl 1.48 dBm VBW 300 kHz
 30.5 dBm 2.46302705 GHz SWT 6.5 ms Unit dBm

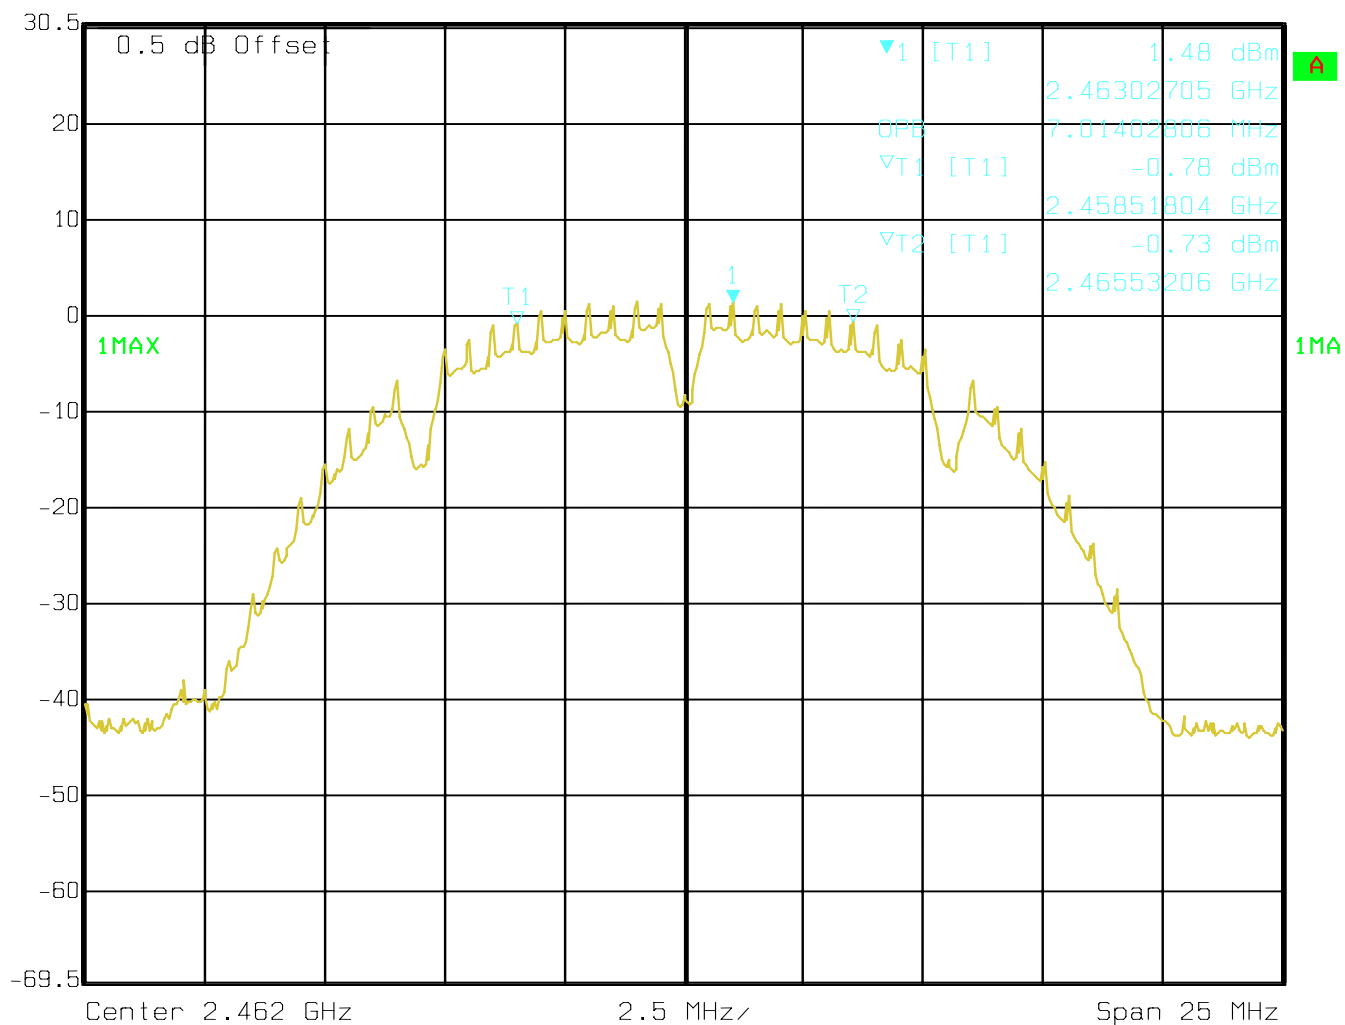

Date: 07.NOV.2006 12:55:04




(2412 MHz) 802.11g 6dB BW

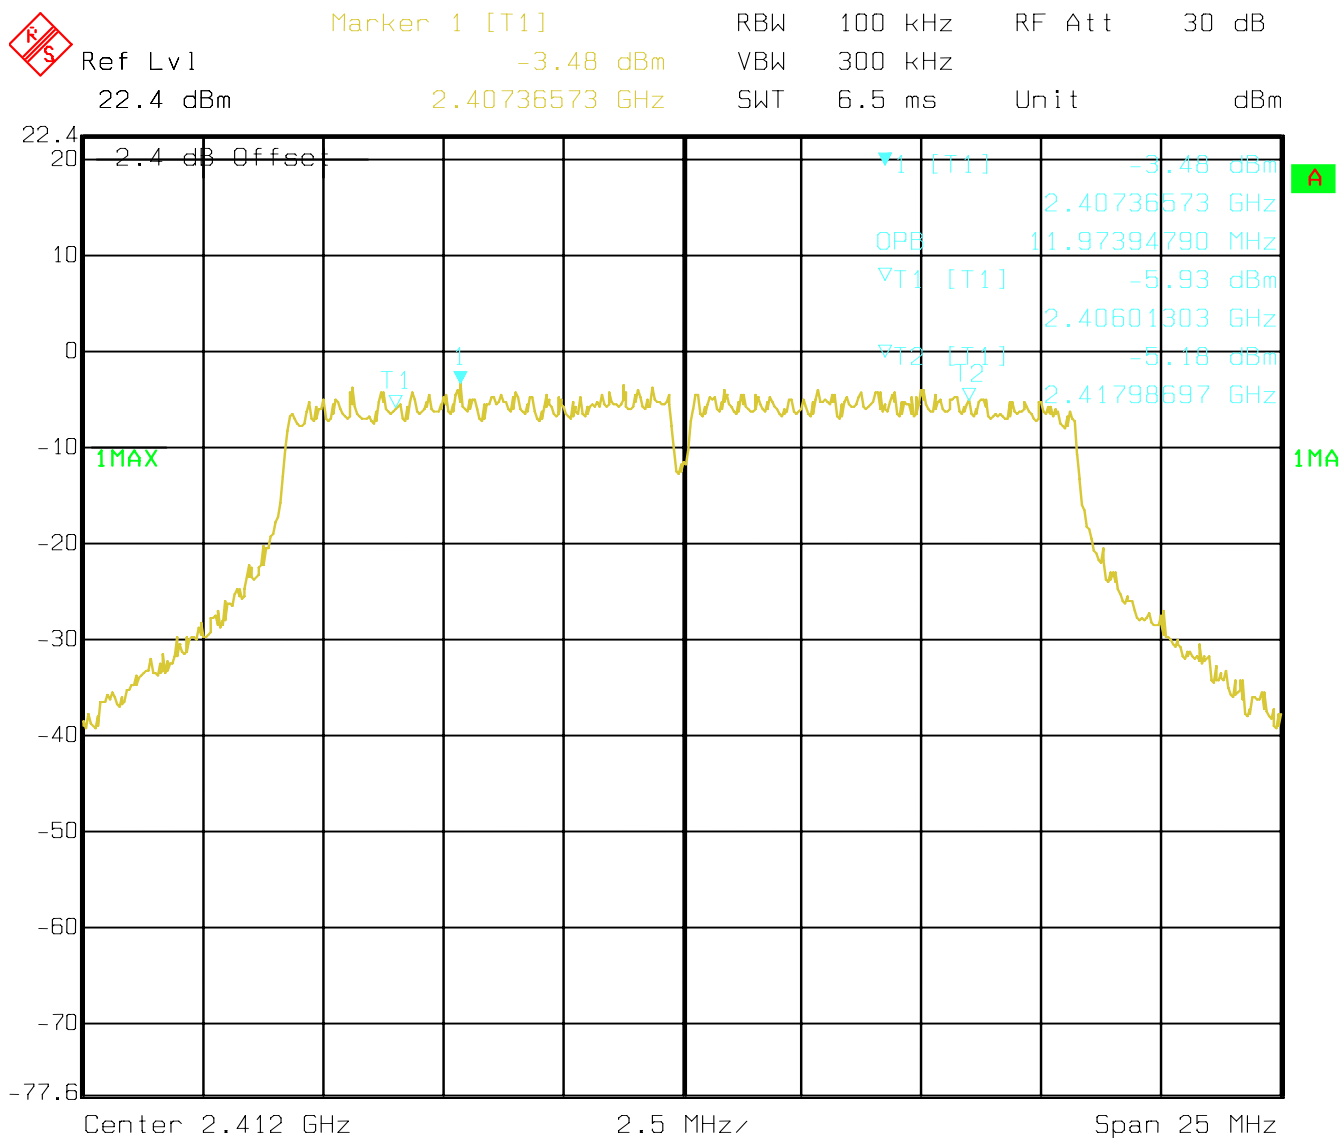

Date: 07.DEC.2006 18:27:18




(2437 MHz) 802.11g 6dB BW

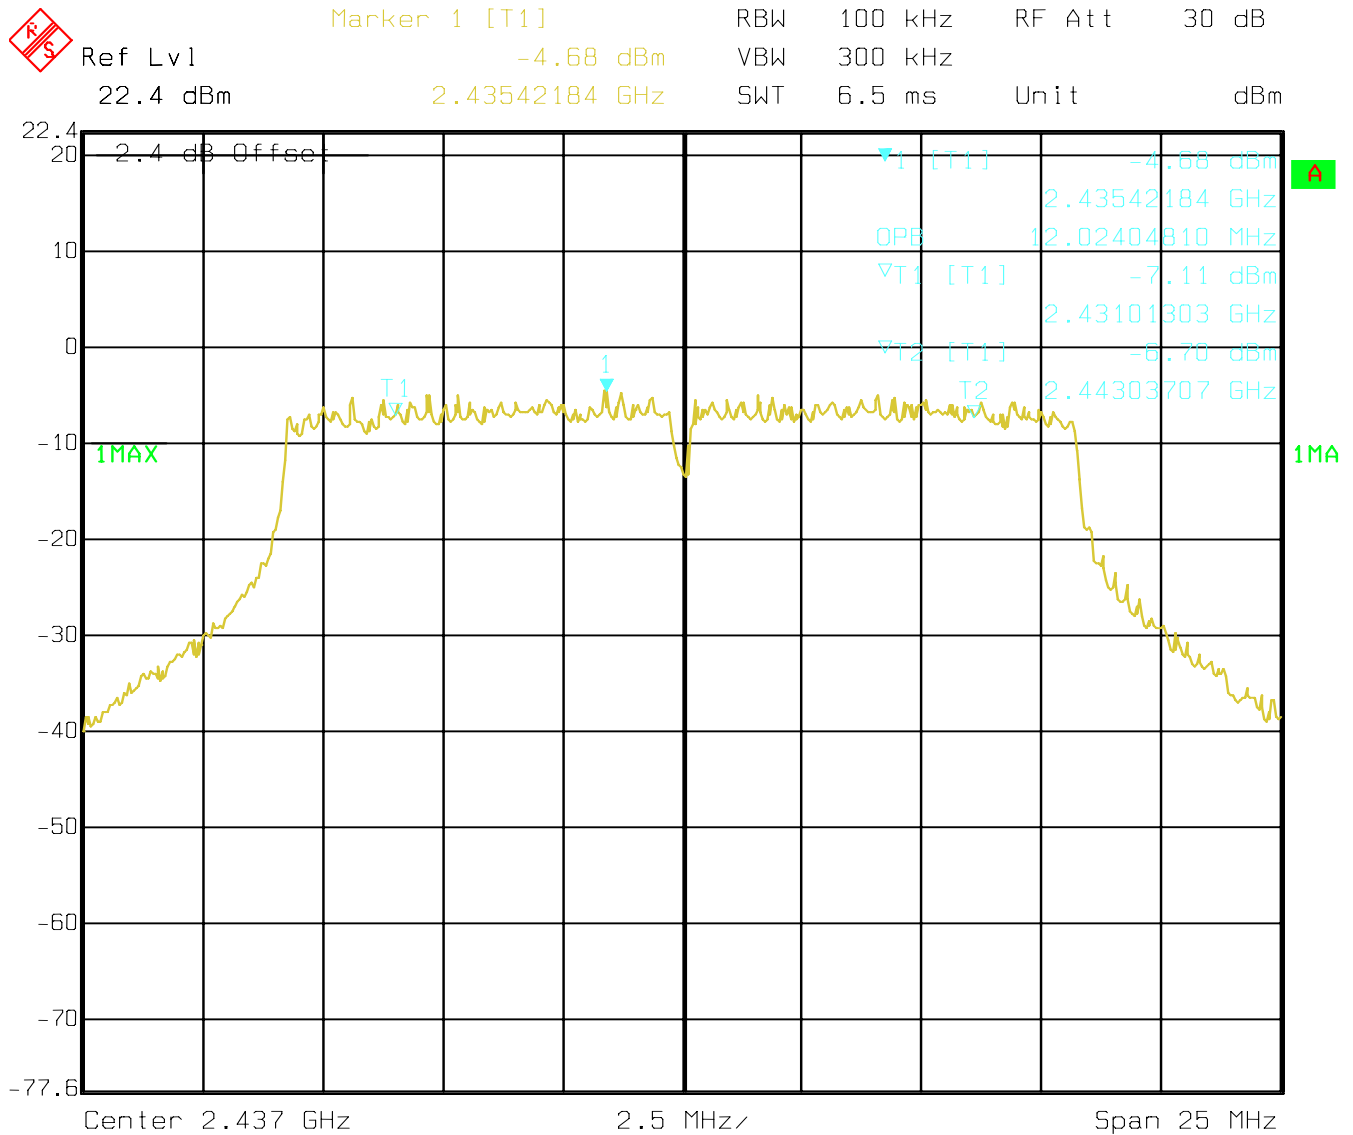

Date: 07.DEC.2006 18:26:27



(2462 MHz) 802.11g 6dB BW

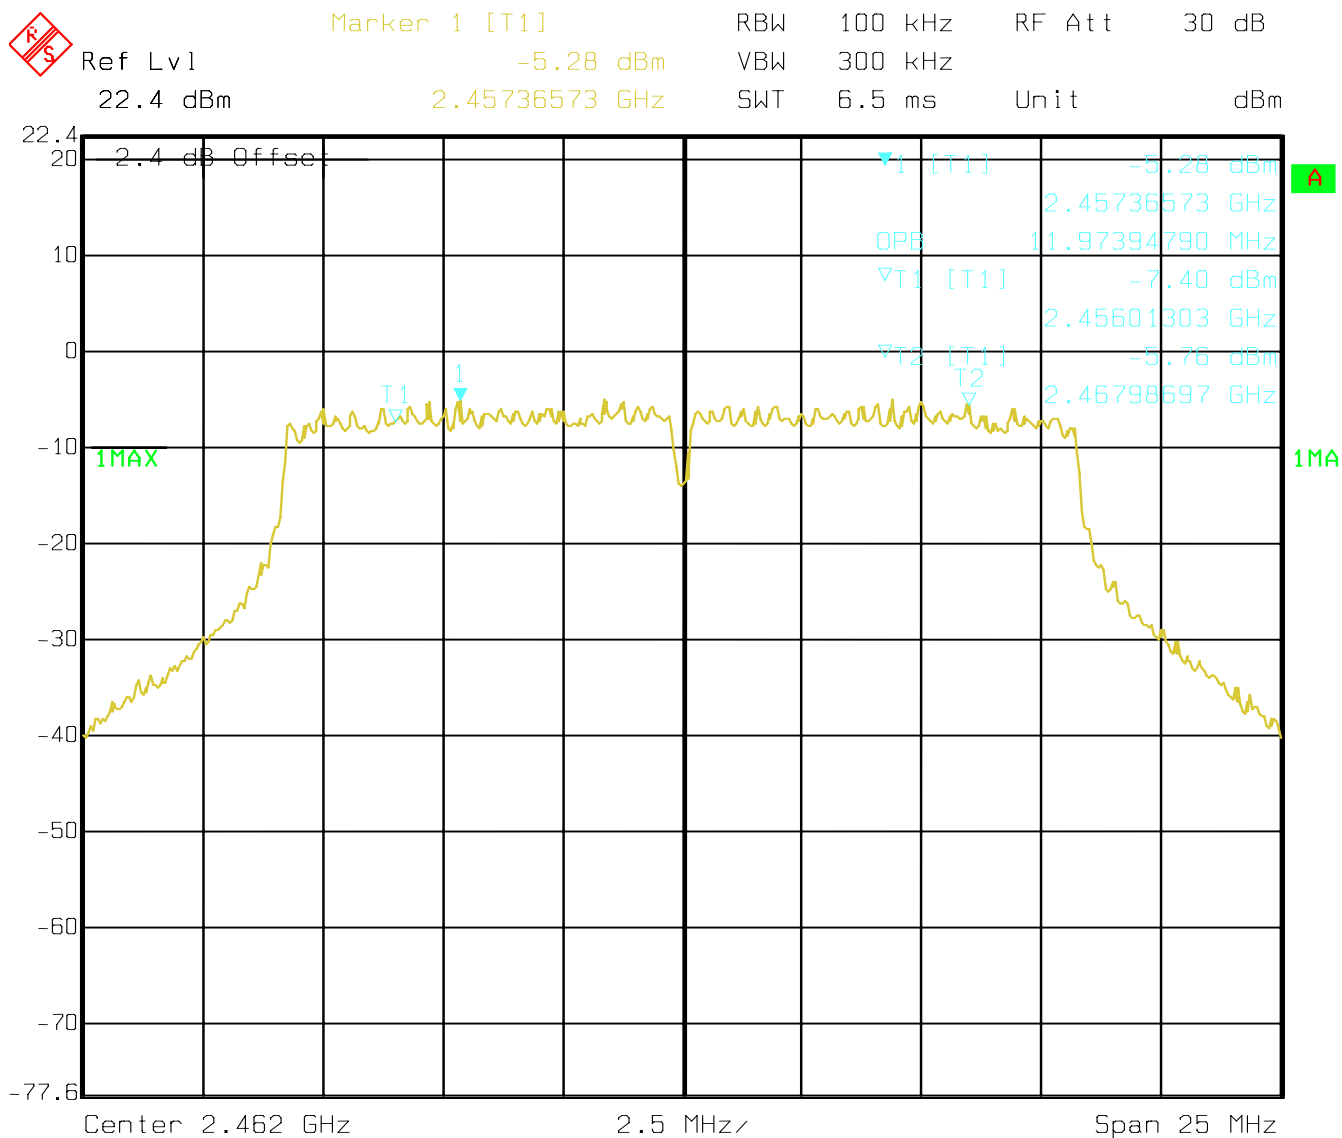

Date: 07.DEC.2006 18:23:46



6.3 CORRECTED OUTPUT POWER

6.3.1 LIMIT SUB CLAUSE § FCC97-114

RBW for measuring output power should be greater than 6dB BW. Since maximum available BW on spectrum analyzer is 10MHz, if 6dB BW >10MHz, correct the measured output power as following:

Correction factor: $10 \log (6\text{dB BW} / \text{Measurement RBW})$

6.3.2 Result

Channel No.	Frequency (MHz)	Correction Factor (dBm)	Corrected EIRP: 802.11g (dBm)	Corrected Cond. Out put power (dBm)
1	2412	0.780942	14.49094	19.77094
6	2437	0.799045	13.55904	19.32904
11	2462	0.780942	12.57094	19.22094

6.4 POWER SPECTRAL DENSITY

6.4.1 LIMIT SUB CLAUSE § 15.247 5 (d)


FREQUENCY RANGE	limit
2400-2483.5	8dBm (in 3kHz BW)

6.4.2 RESULTS:

TEST CONDITIONS Frequency (MHz)	POWER SPECTRAL DENSITY (dBm)		
	2412 MHz	2437 MHz	2462 MHz
802.11b	-0.82	-3.93	-3.49
802.11g	-17.86	-19.19	-19.93




(2412 MHz) 802.11b POWER SPECTRAL DENSITY

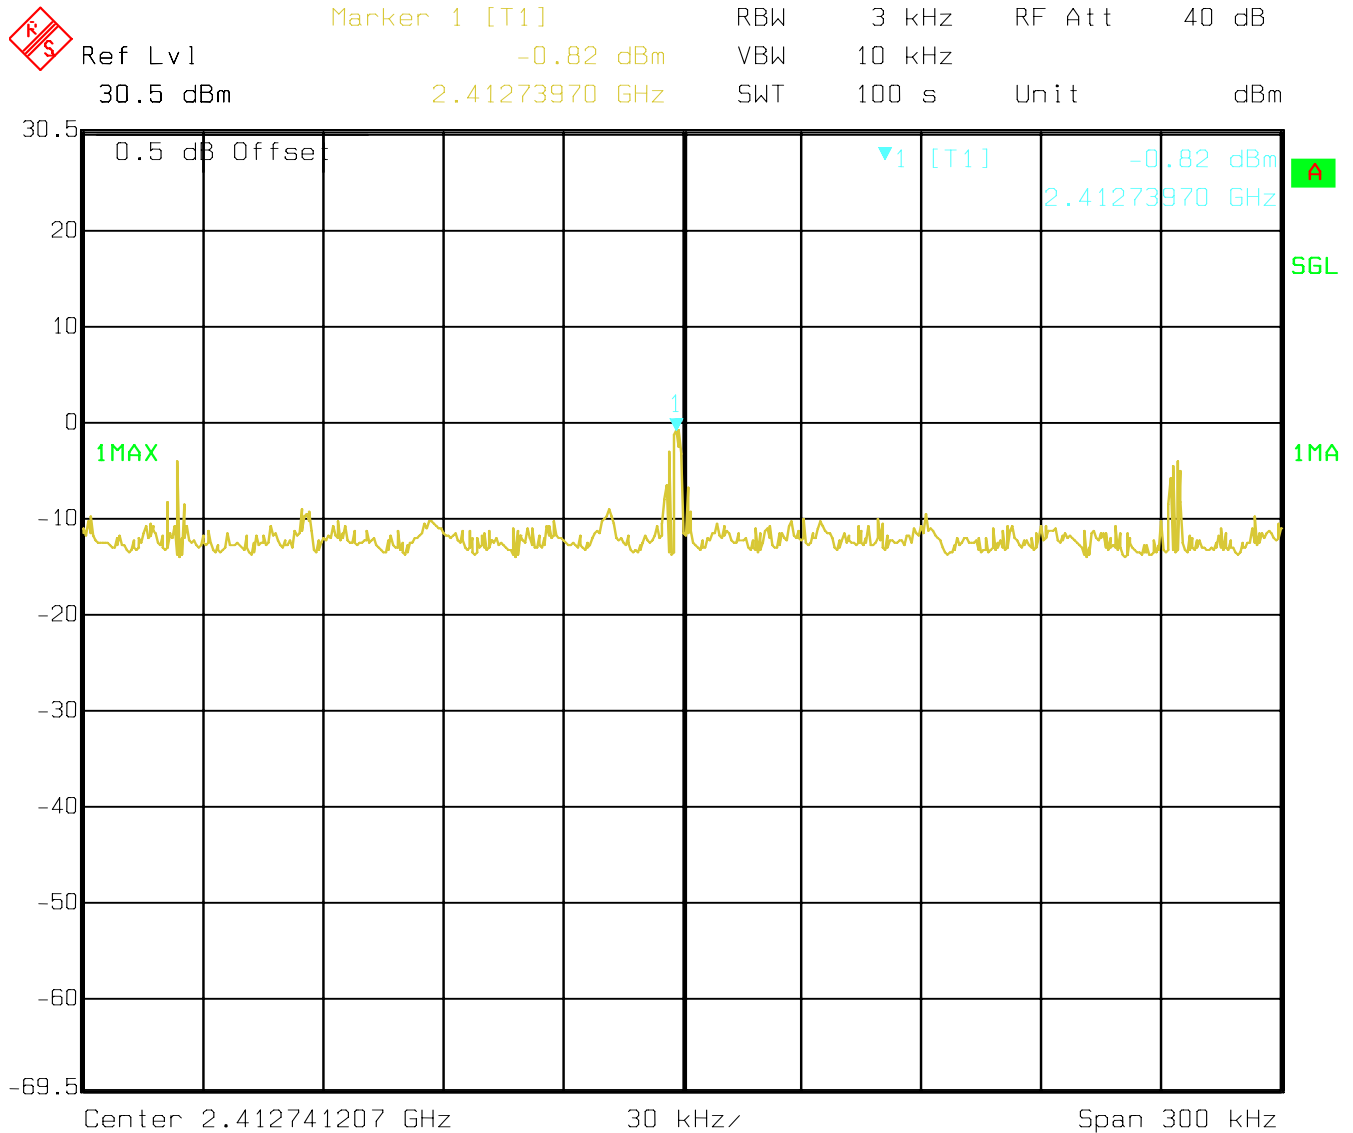

Date: 07.NOV.2006 15:06:43




(2437 MHz) 802.11b POWER SPECTRAL DENSITY

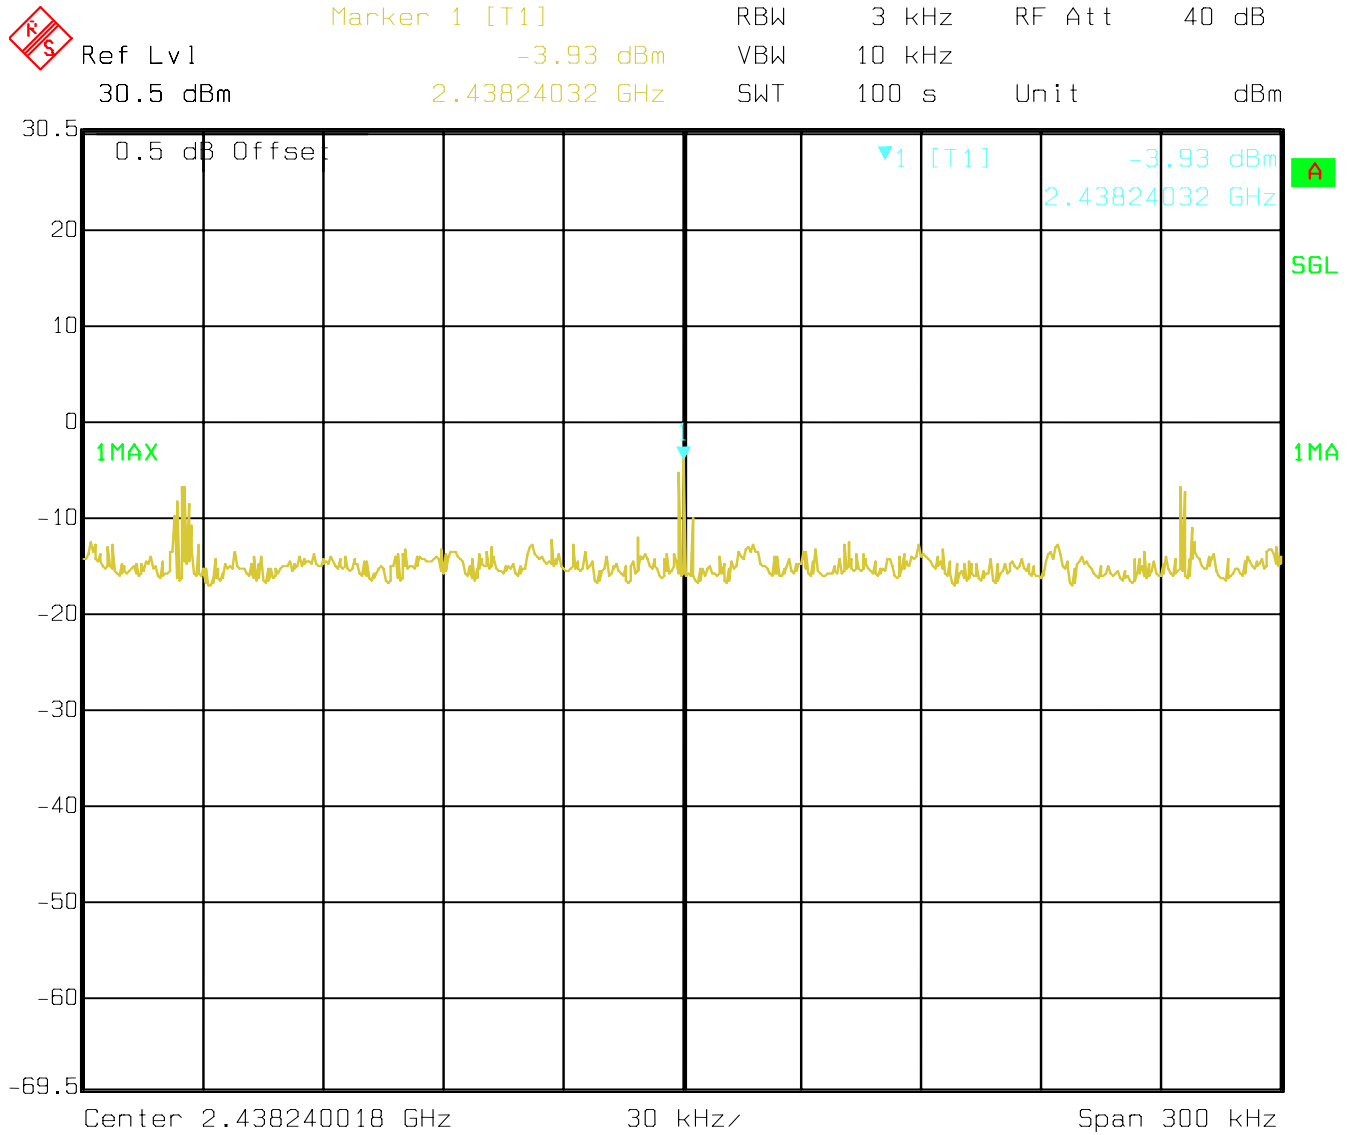

Date: 07.NOV.2006 15:14:53




(2462 MHz) 802.11b POWER SPECTRAL DENSITY

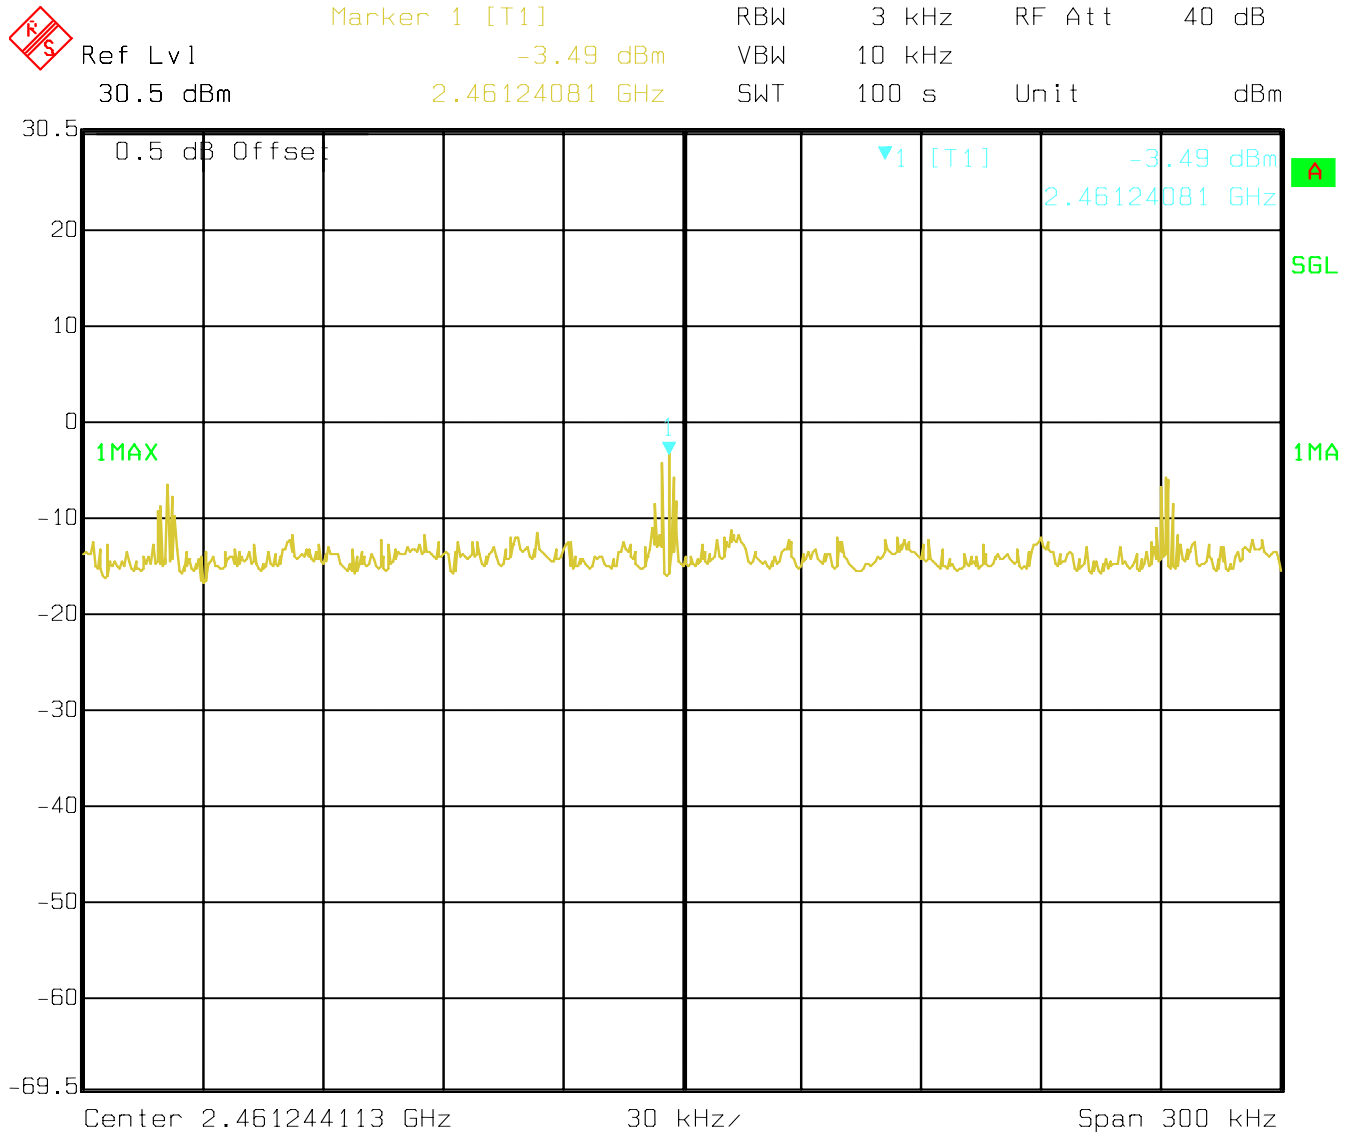

Date: 07.NOV.2006 15:19:57




(2412 MHz) 802.11g POWER SPECTRAL DENSITY

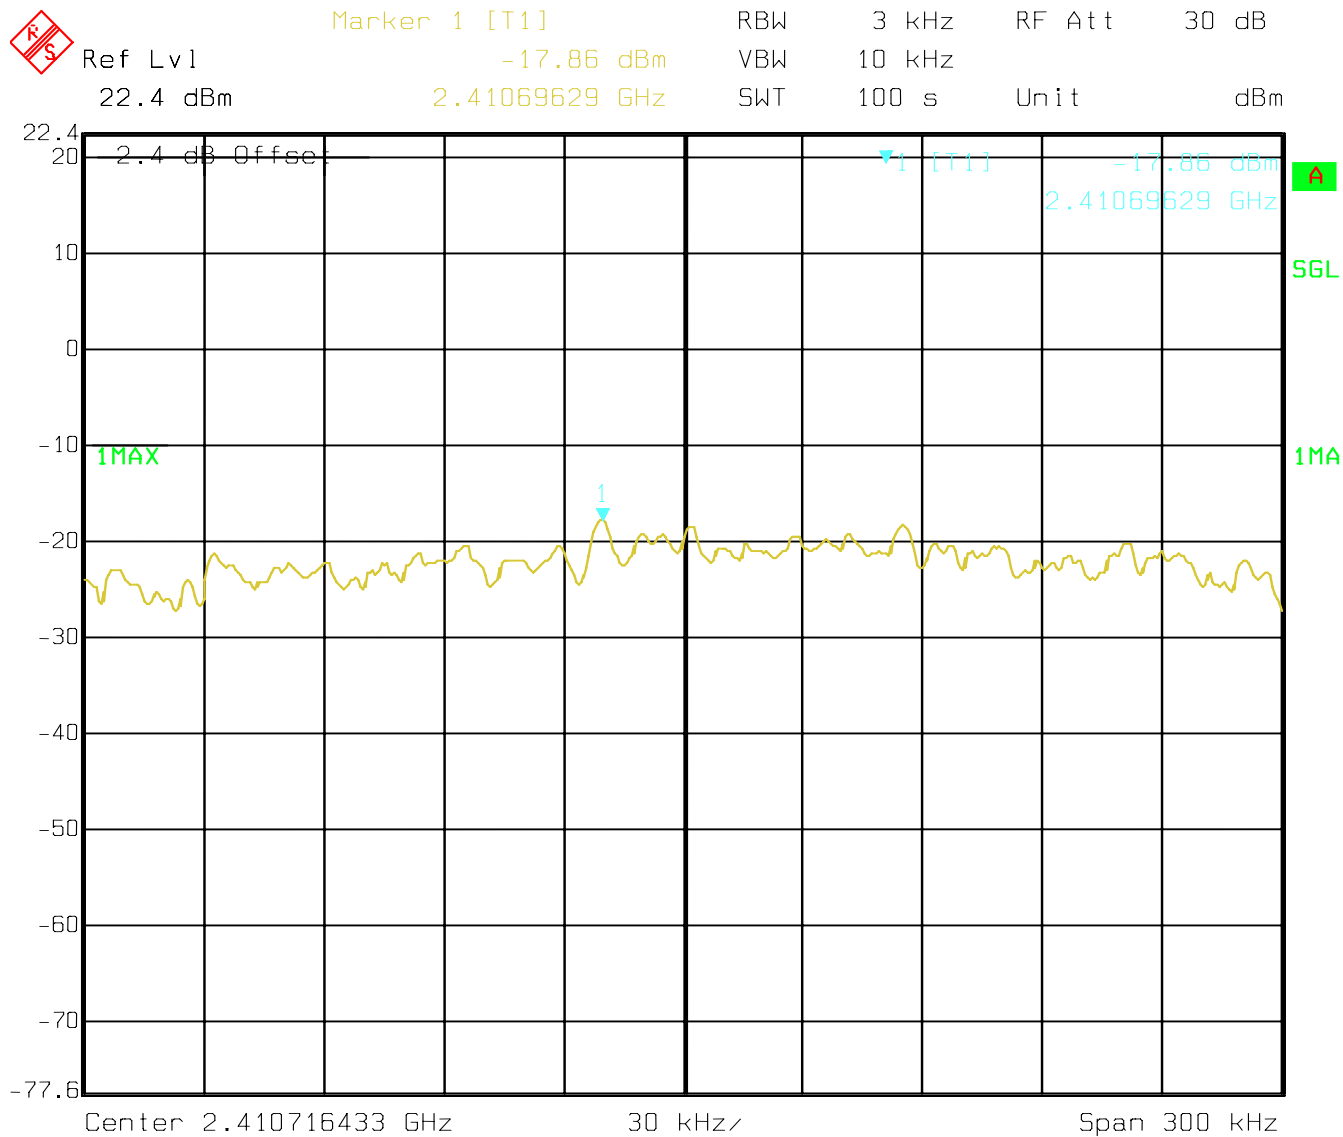

Date: 07.DEC.2006 18:33:47




(2437 MHz) 802.11g POWER SPECTRAL DENSITY

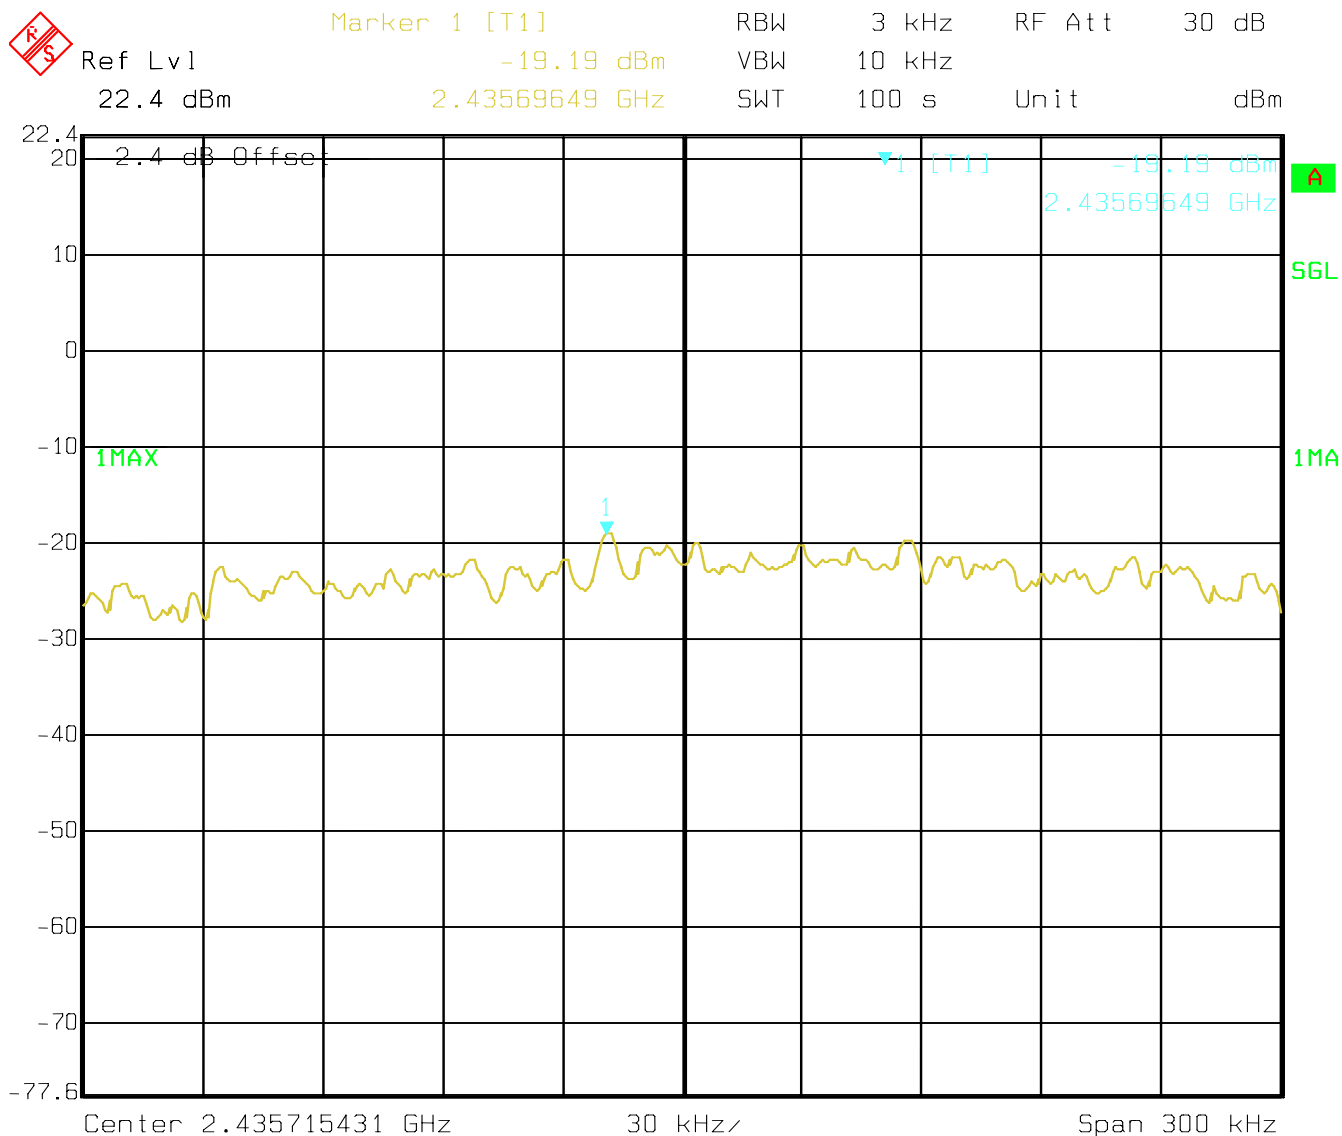

Date: 07.DEC.2006 18:40:29



(2462 MHz) 802.11g POWER SPECTRAL DENSITY

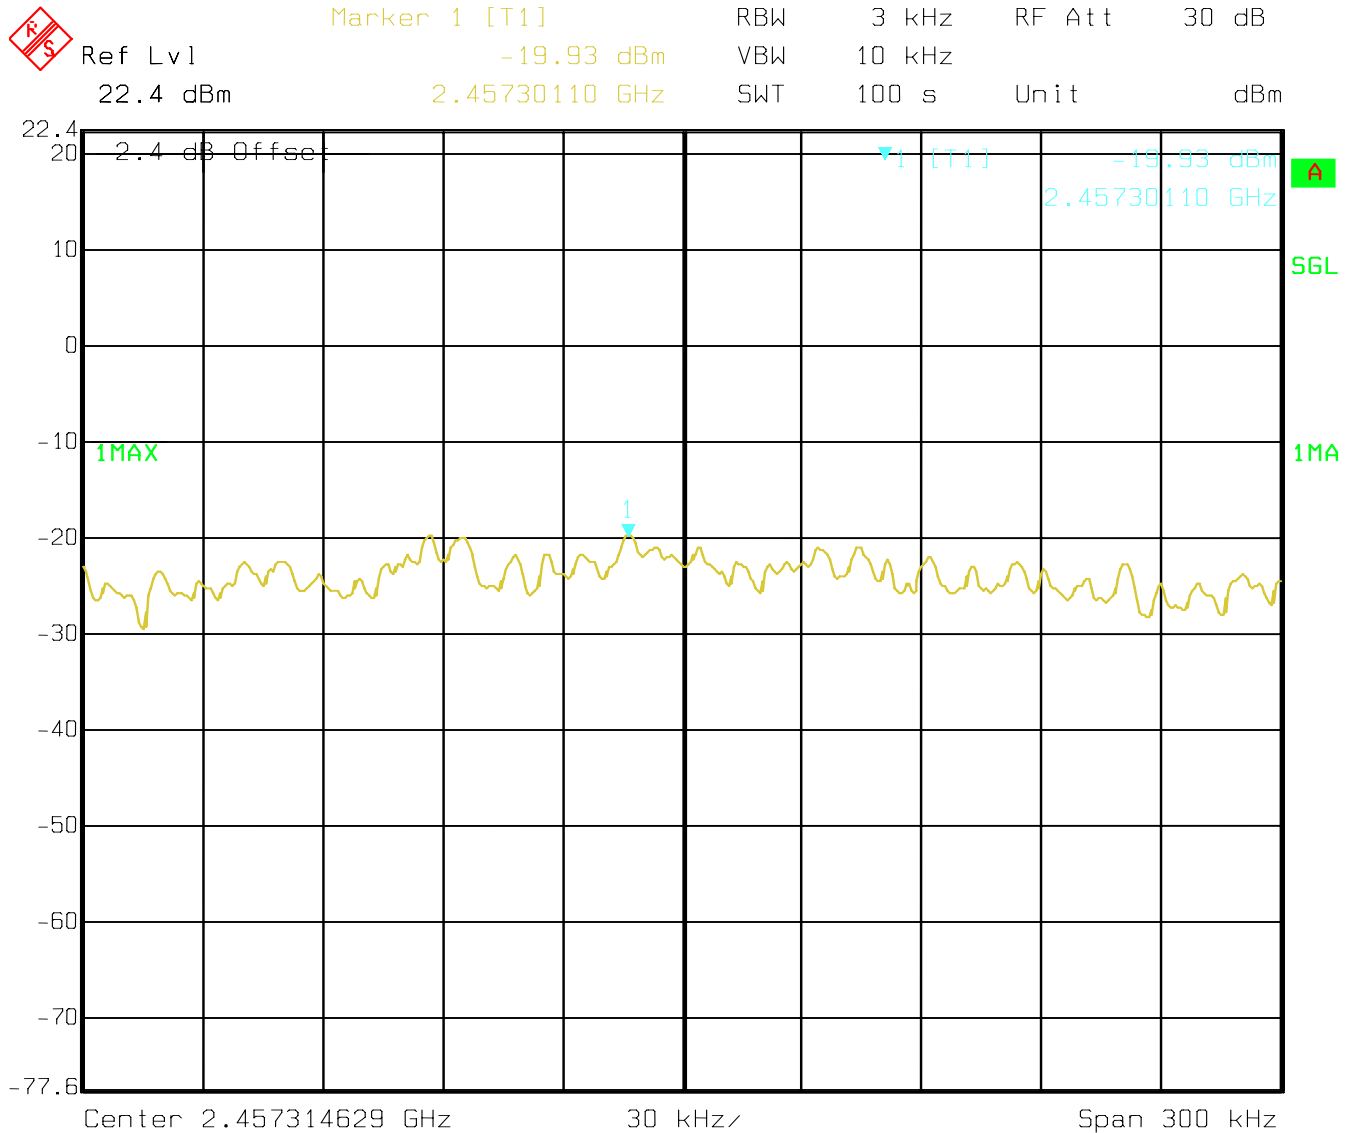

Date: 07.DEC.2006 18:44:31




6.5 CONDUCTED SPURIOUS EMISSION

6.5.1 LIMIT SUB CLAUSE § 15.247 (d)

FREQUENCY RANGE	limit
30M-25GHz	-20dBc

6.5.2 RESULTS: Tnom(23)°C VnomVDC


(2412MHz)

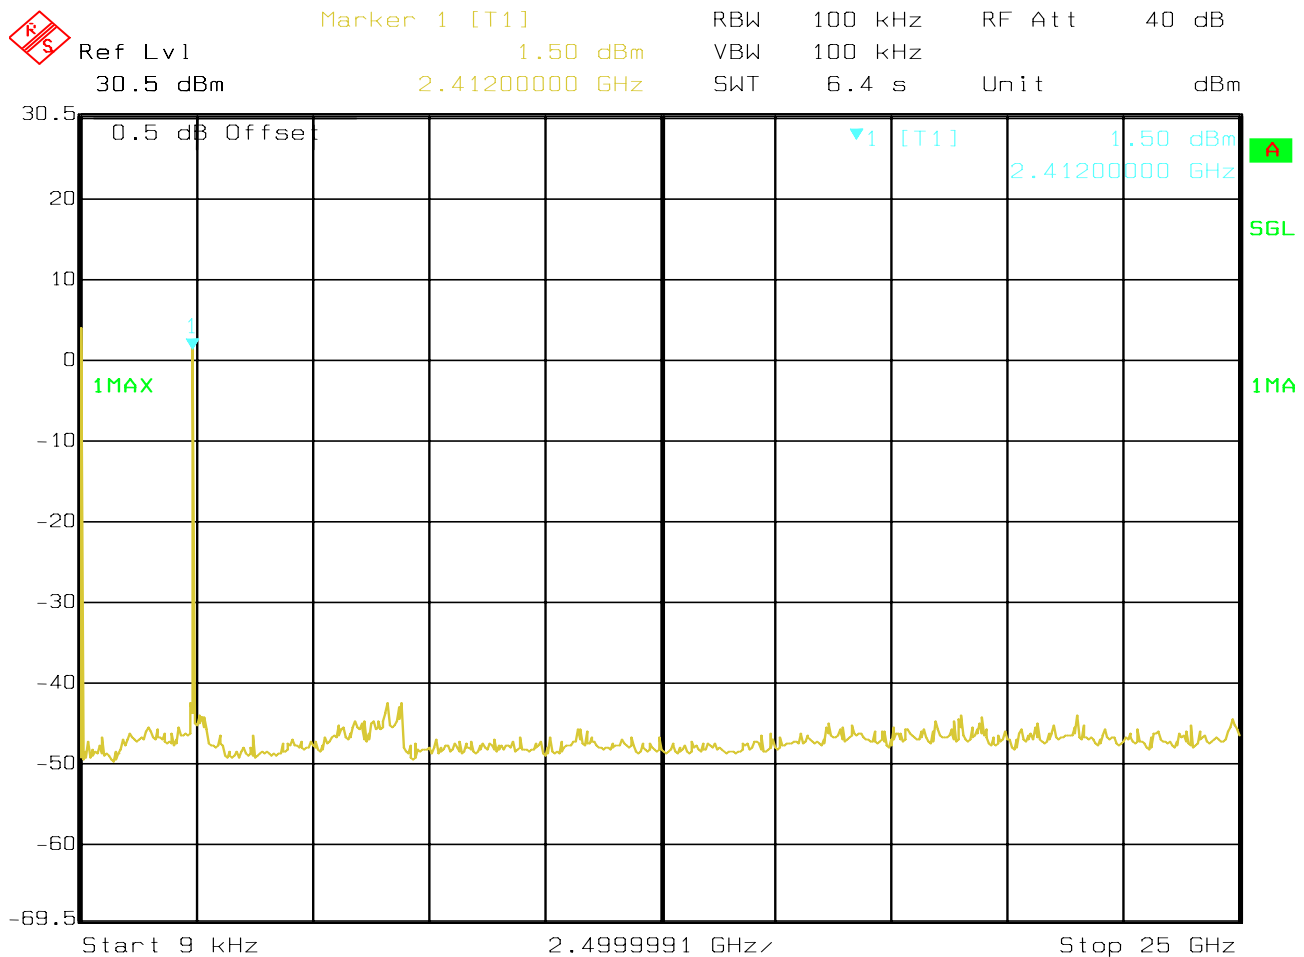

Date: 07.NOV.2006 13:06:37



(2437MHz)

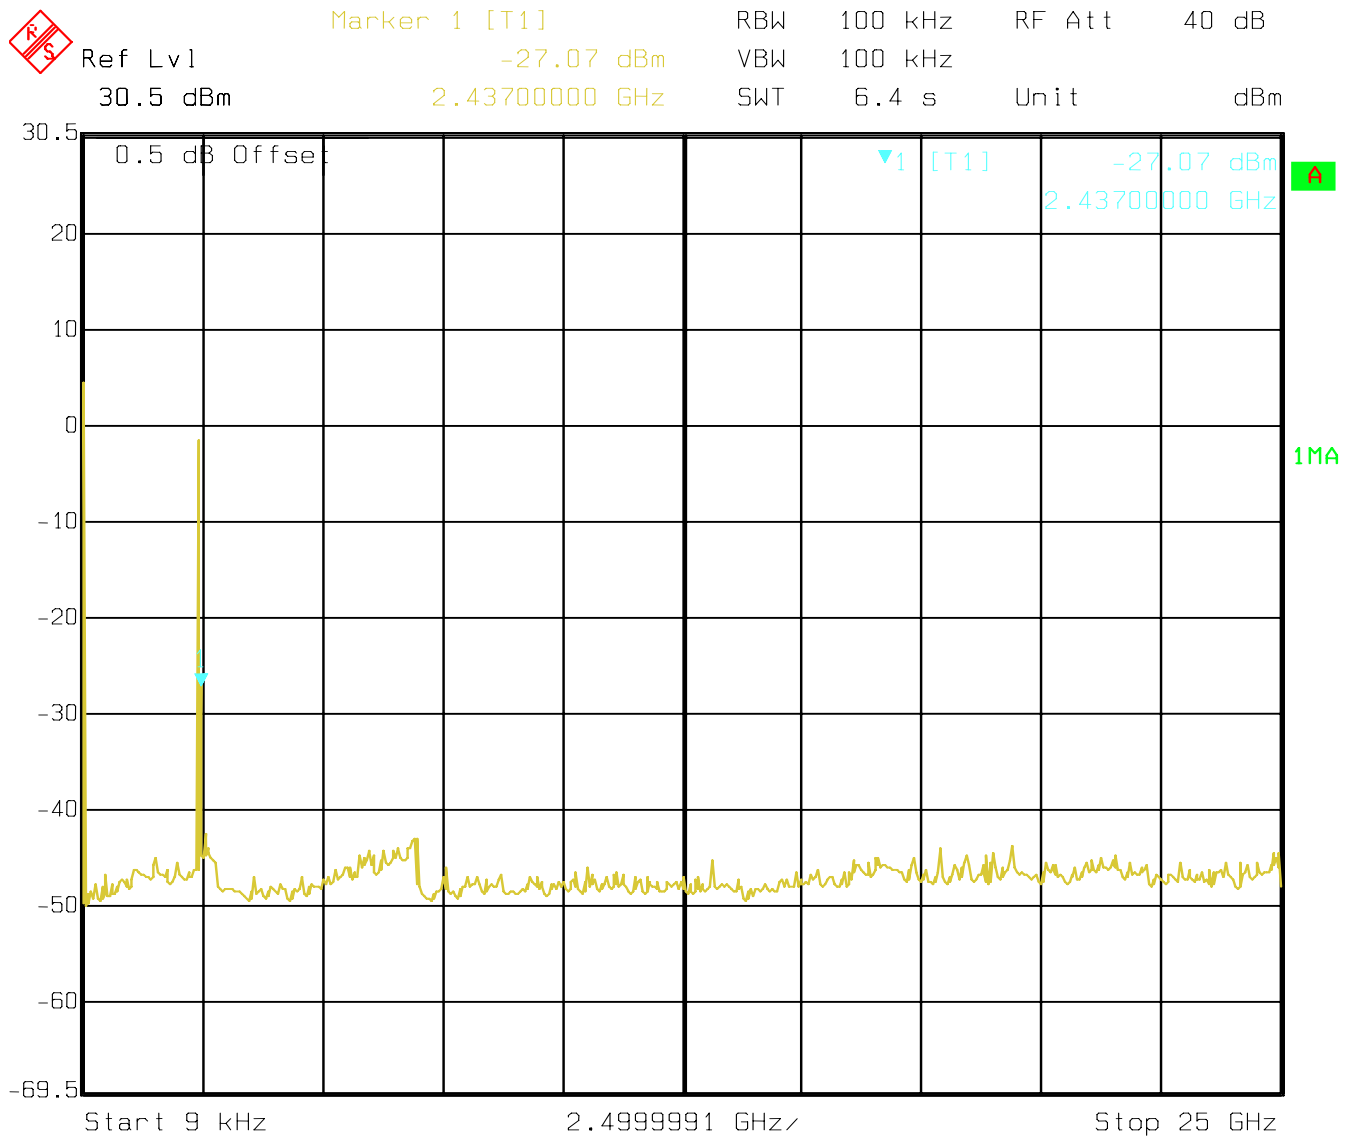


Date: 07.NOV.2006 13:23:41



(2462MHz)



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
 Ref Lvl -1.03 dBm VBW 100 kHz
 30.5 dBm 2.46200000 GHz SWT 6.4 s Unit dBm

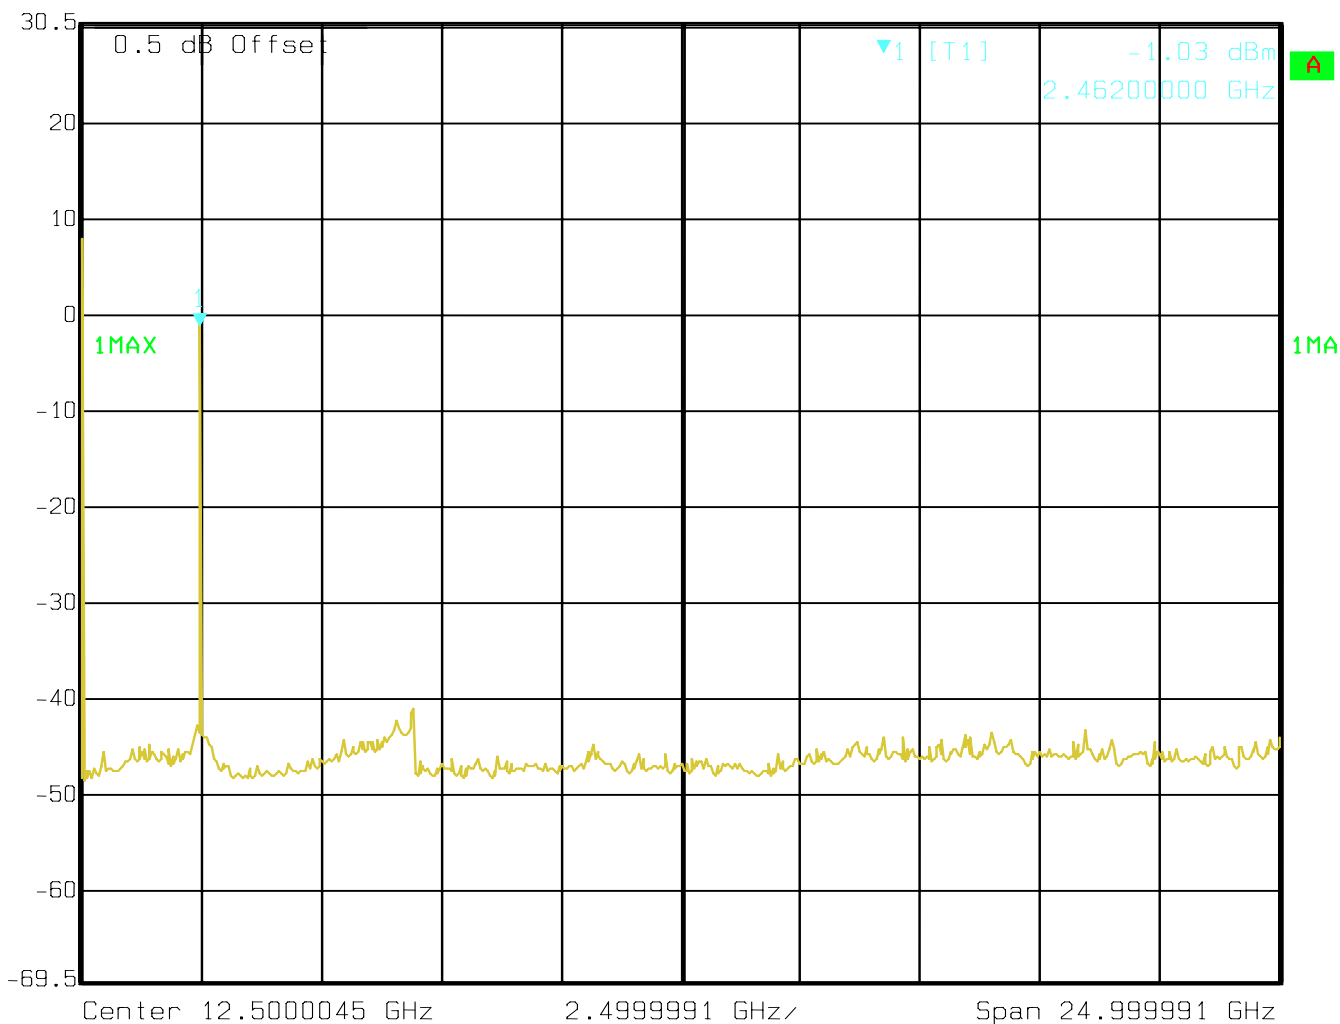

Date: 07.NOV.2006 13:12:28



6.6 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

6.6.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit



Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz



6.6.2 RESULTS

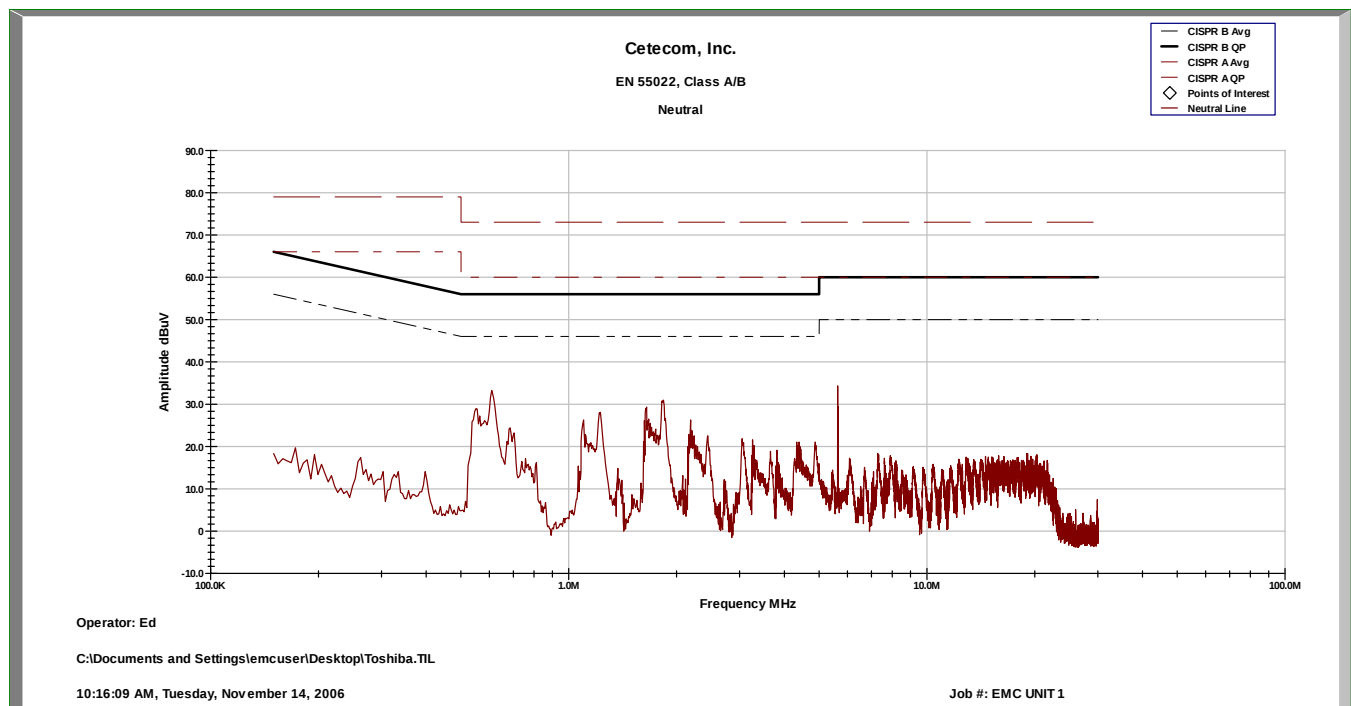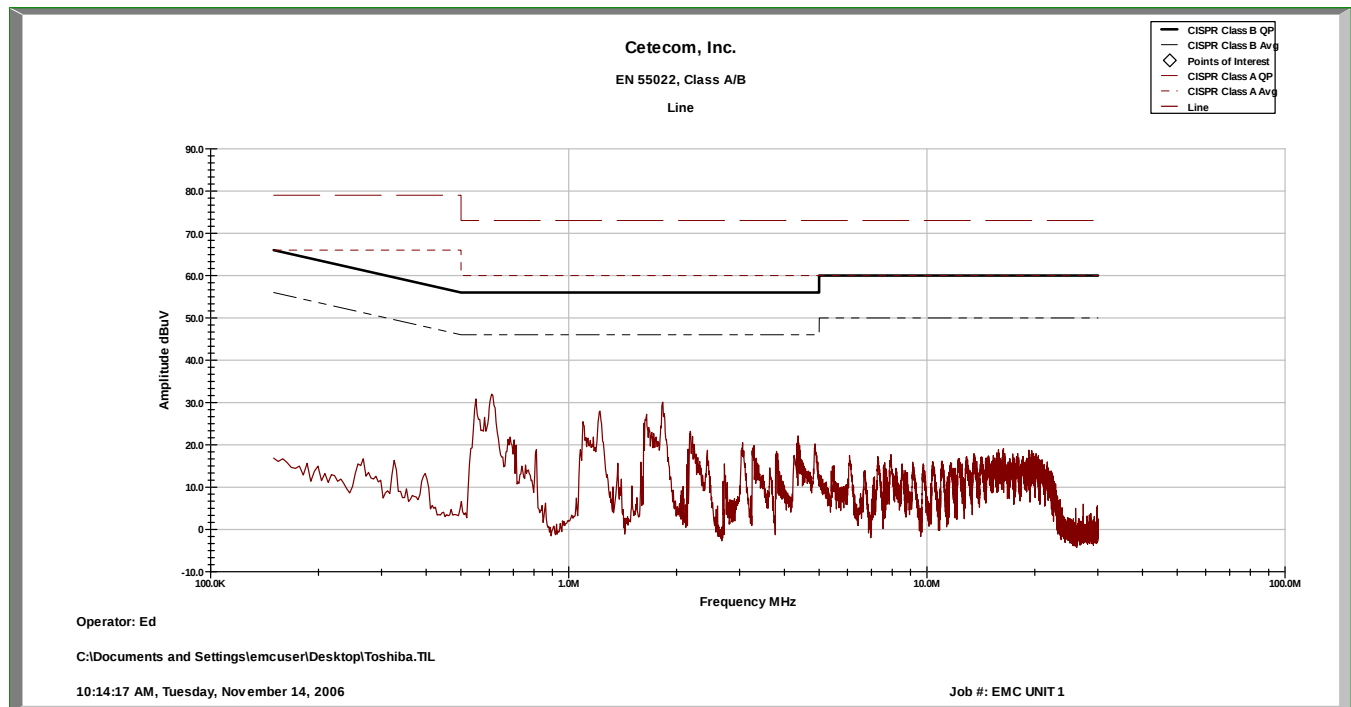



7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

8 BLOCK DIAGRAMS
Radiated Testing

ANECHOIC CHAMBER

