



Head SAR:


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 3:24:17 PM	DUT Battery Model/No:	
Filename:	lefttiltclsd661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.00 mm
DUT Position:	left tilt slider open	Max SAR Z-axis Location:	-136.00 mm
Antenna Configuration:	integral	Max E Field:	8.28 V/m
Test Frequency:	1880MHz	SAR 1g:	0.094 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.054 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.48 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

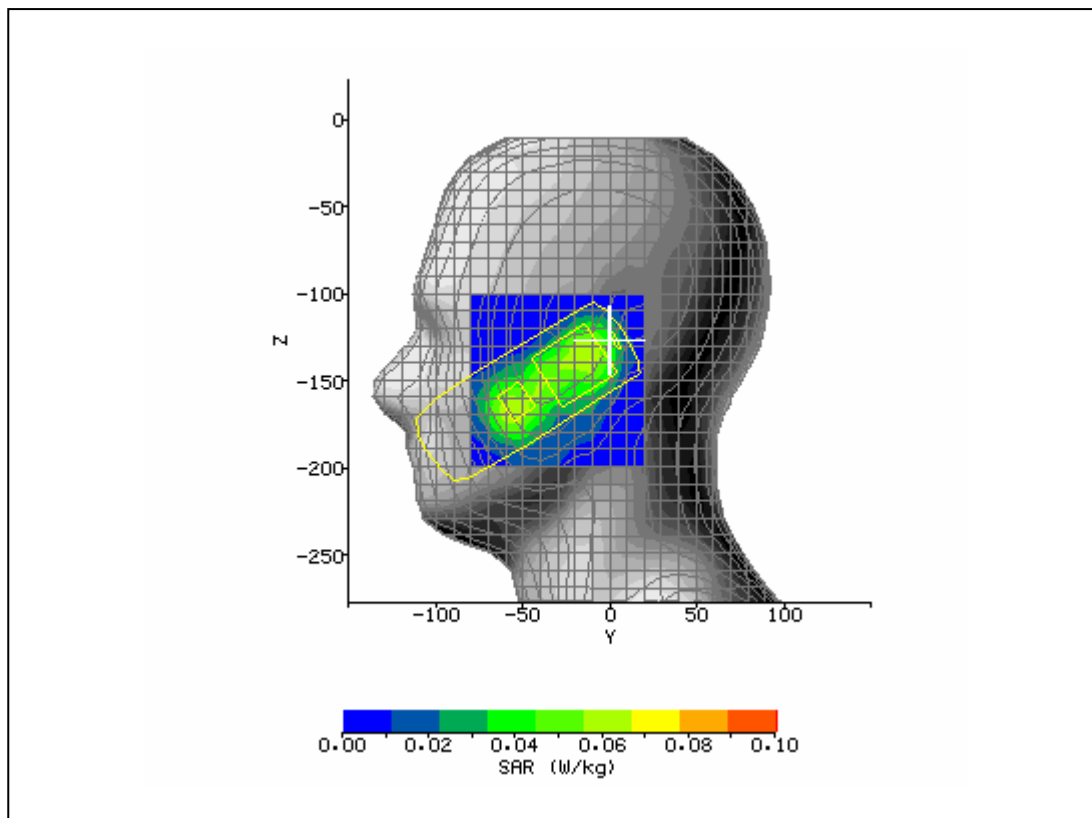


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 4:22:27 PM	DUT Battery Model/No:	
Filename:	lefttchc661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-1.00 mm
DUT Position:	left tilt slider open	Max SAR Z-axis Location:	-121.00 mm
Antenna Configuration:	integral	Max E Field:	7.42 V/m
Test Frequency:	1880MHz	SAR 1g:	0.065 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.038 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

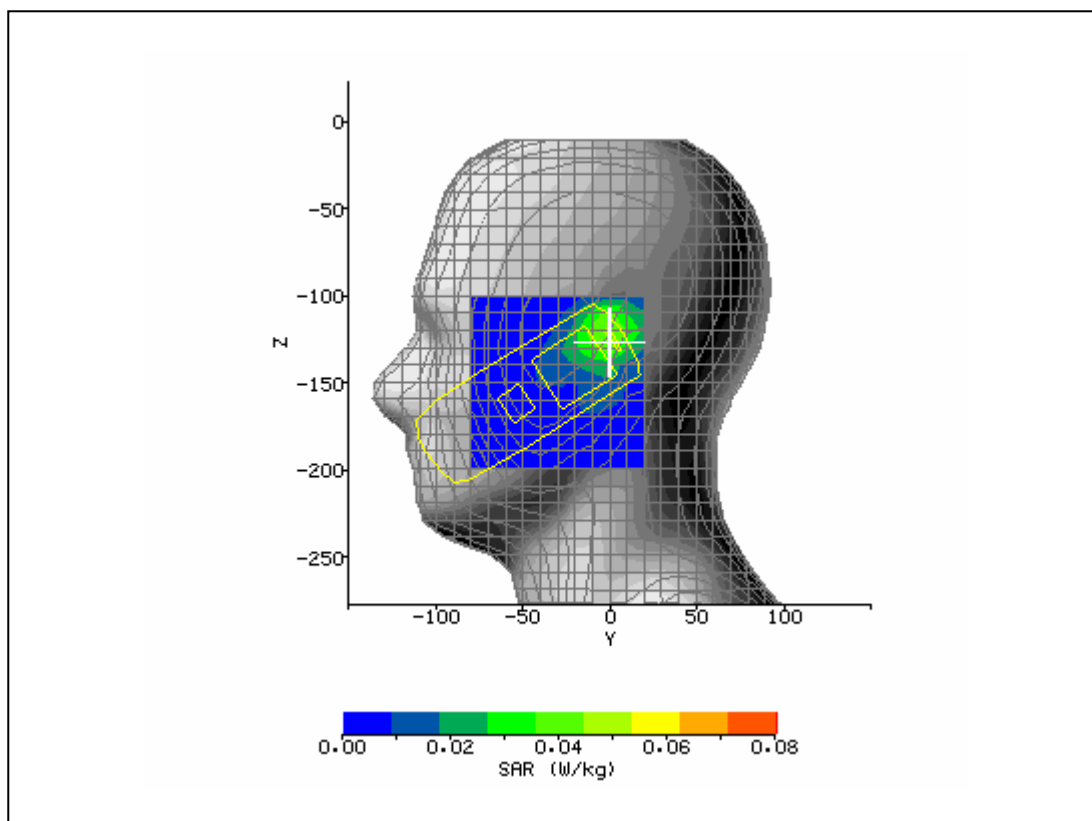


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 12:36:37 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	18.00 mm
DUT Position:	right touch slider open	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	integral	Max E Field:	6.15 V/m
Test Frequency:	1880MHz	SAR 1g:	0.053 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.033 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.38 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

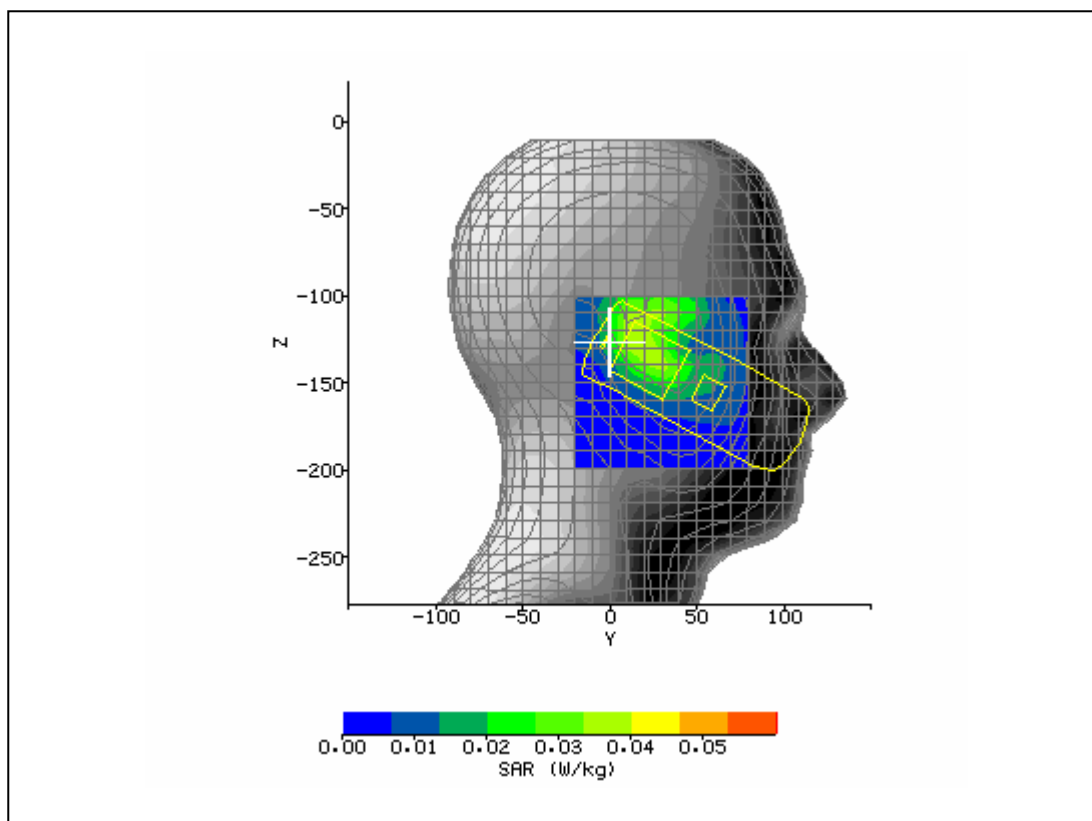


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 12:59:40 PM	DUT Battery Model/No:	
Filename:	righttch661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	right tilt slider open	Max SAR Z-axis Location:	-124.00 mm
Antenna Configuration:	integral	Max E Field:	6.67 V/m
Test Frequency:	1880MHz	SAR 1g:	0.057 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.032 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.45 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

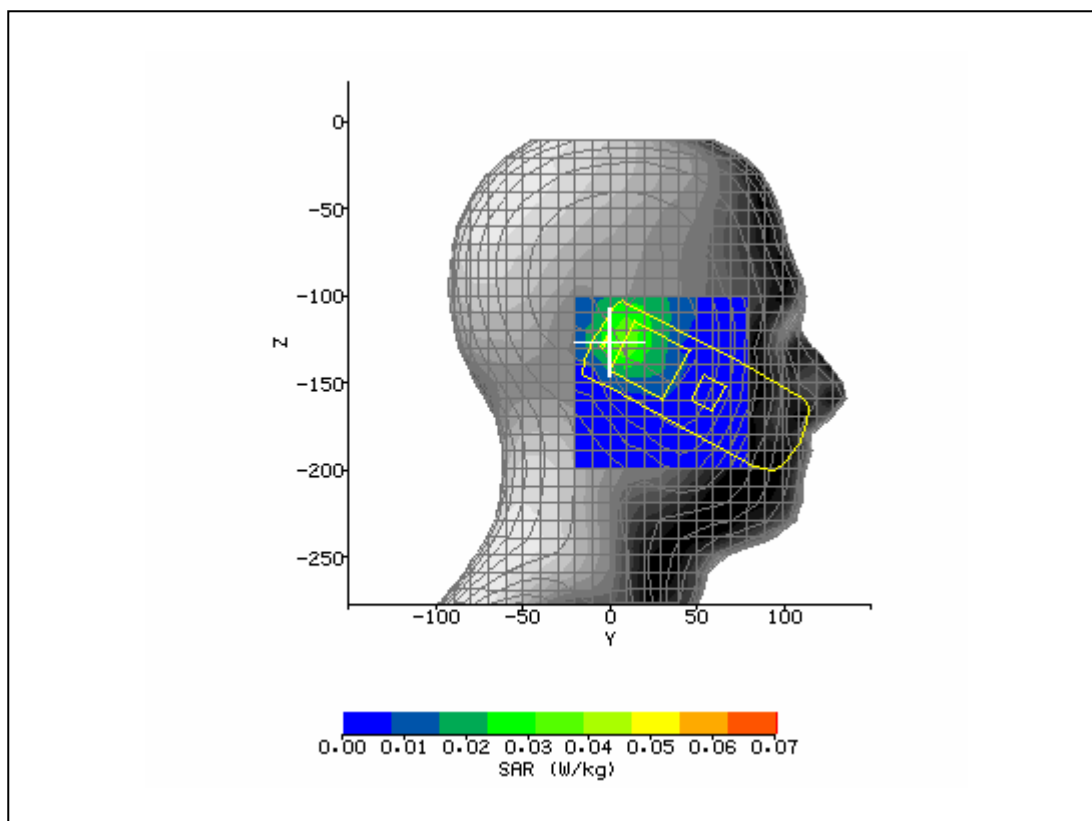


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 2:40:33 PM	DUT Battery Model/No:	
Filename:	righttlclsd661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-8.00 mm
DUT Position:	left touch slider closed	Max SAR Z-axis Location:	-129.00 mm
Antenna Configuration:	integral	Max E Field:	8.48 V/m
Test Frequency:	1880MHz	SAR 1g:	0.088 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.053 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.031 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.92 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

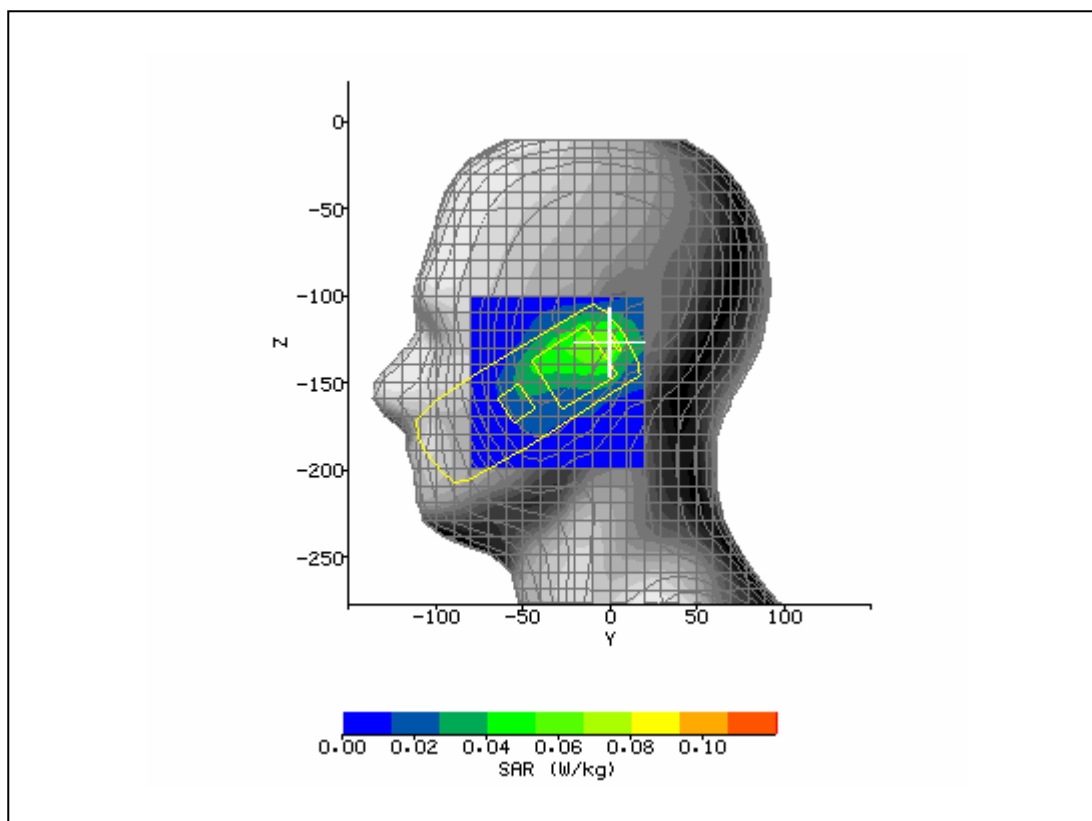


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 3:01:36 PM	DUT Battery Model/No:	
Filename:	lefttchcls661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	left tilt slider closed	Max SAR Z-axis Location:	-125.00 mm
Antenna Configuration:	integral	Max E Field:	8.32 V/m
Test Frequency:	1880MHz	SAR 1g:	0.085 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.048 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.66 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

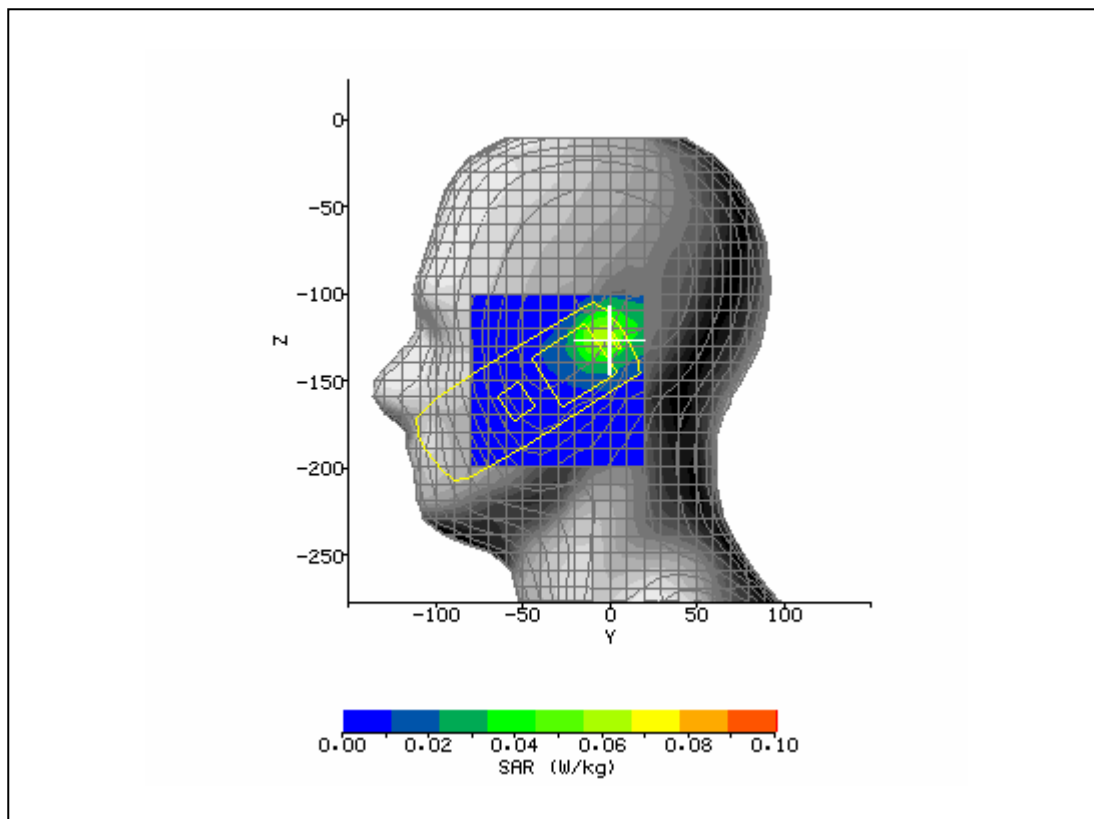


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 1:54:16 PM	DUT Battery Model/No:	
Filename:	righttil661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	right touch slider closed	Max SAR Z-axis Location:	-113.00 mm
Antenna Configuration:	integral	Max E Field:	8.52 V/m
Test Frequency:	1880MHz	SAR 1g:	0.103 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.054 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.028 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

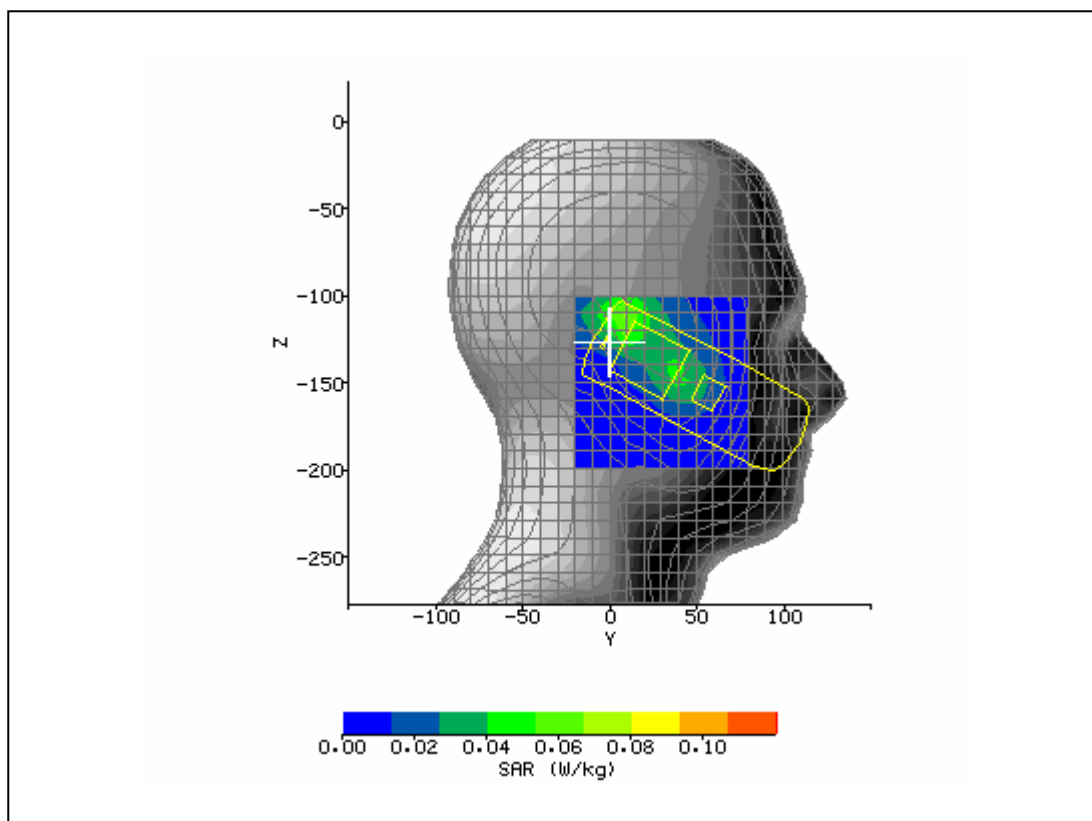


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 2:15:29 PM	DUT Battery Model/No:	
Filename:	righttchcls_d_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	right tilt slider closed	Max SAR Z-axis Location:	-112.00 mm
Antenna Configuration:	integral	Max E Field:	8.40 V/m
Test Frequency:	1880MHz	SAR 1g:	0.093 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.050 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.029 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.28 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

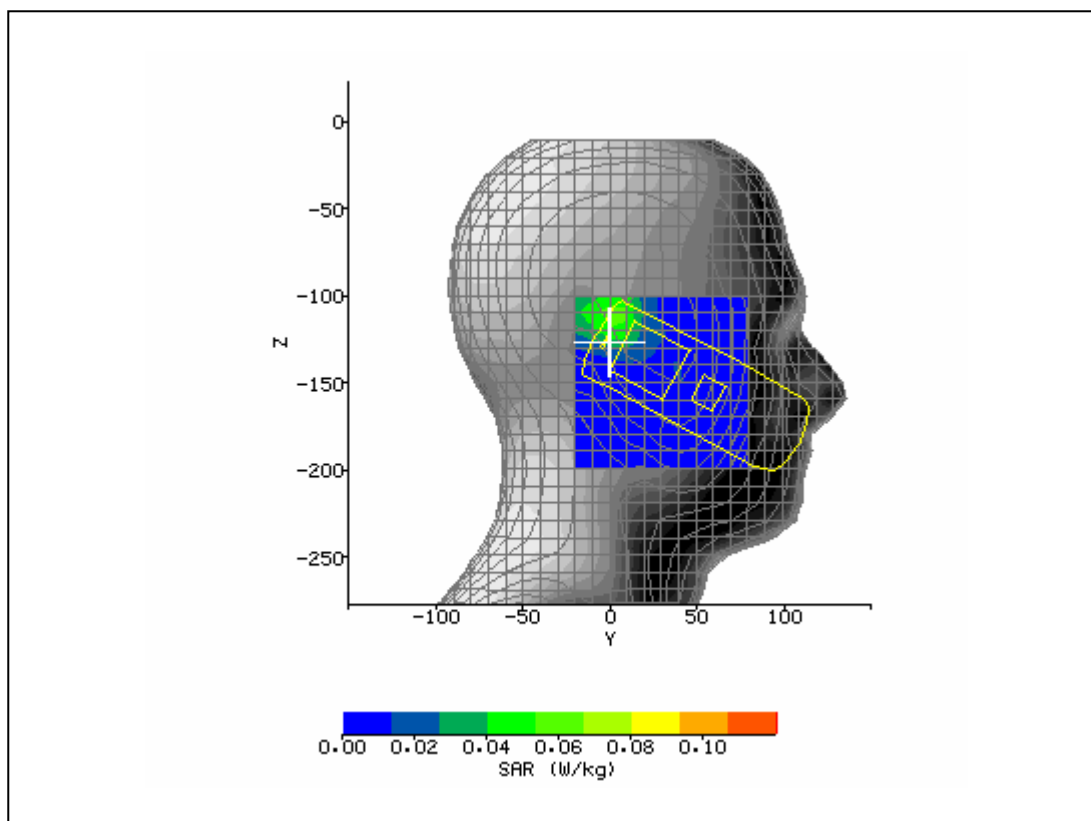

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 4:59:58 PM	DUT Battery Model/No:	
Filename:	lefttil661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.66
Relative Humidity:	30%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	right touch slider closed	Max SAR Z-axis Location:	-116.00 mm
Antenna Configuration:	integral	Max E Field:	12.24 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.203 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.104 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

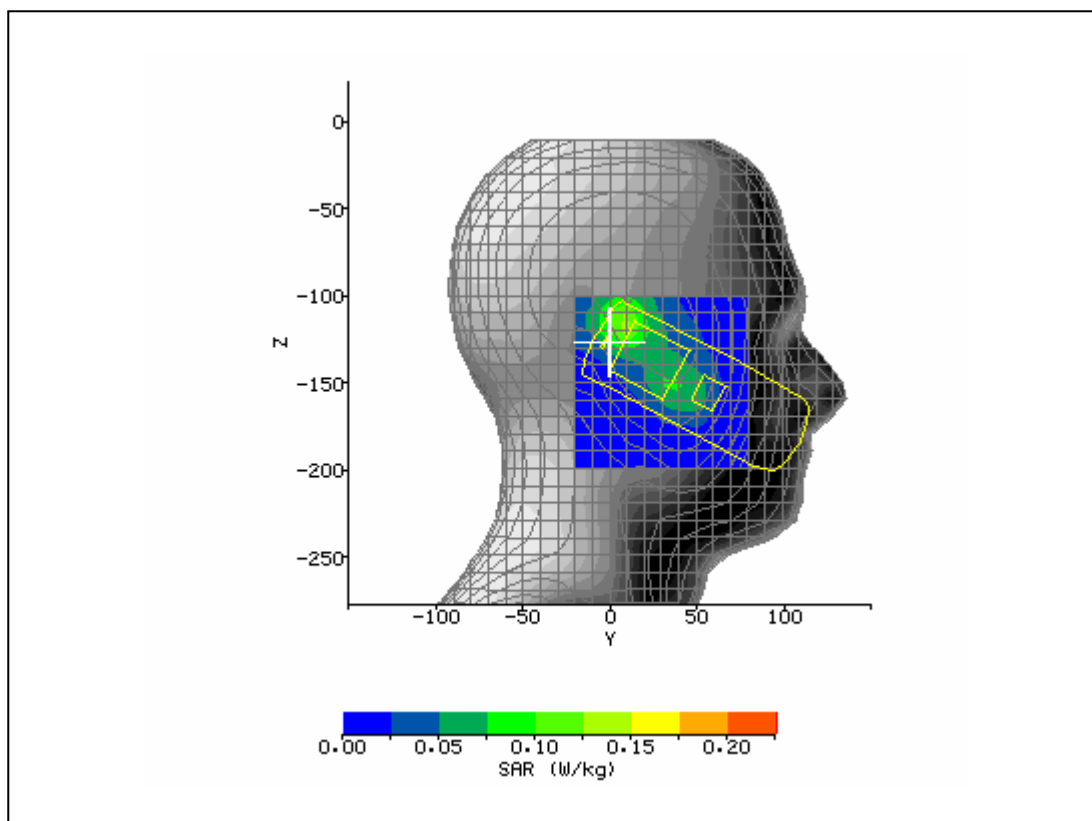


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 5:22:22 PM	DUT Battery Model/No:	
Filename:	righttchcls512_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.66
Relative Humidity:	30%	Conductivity:	1.45
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	right touch slider closed	Max SAR Z-axis Location:	-116.00 mm
Antenna Configuration:	integral	Max E Field:	7.08 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.067 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.036 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.019 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max	Extrapolation:	poly4

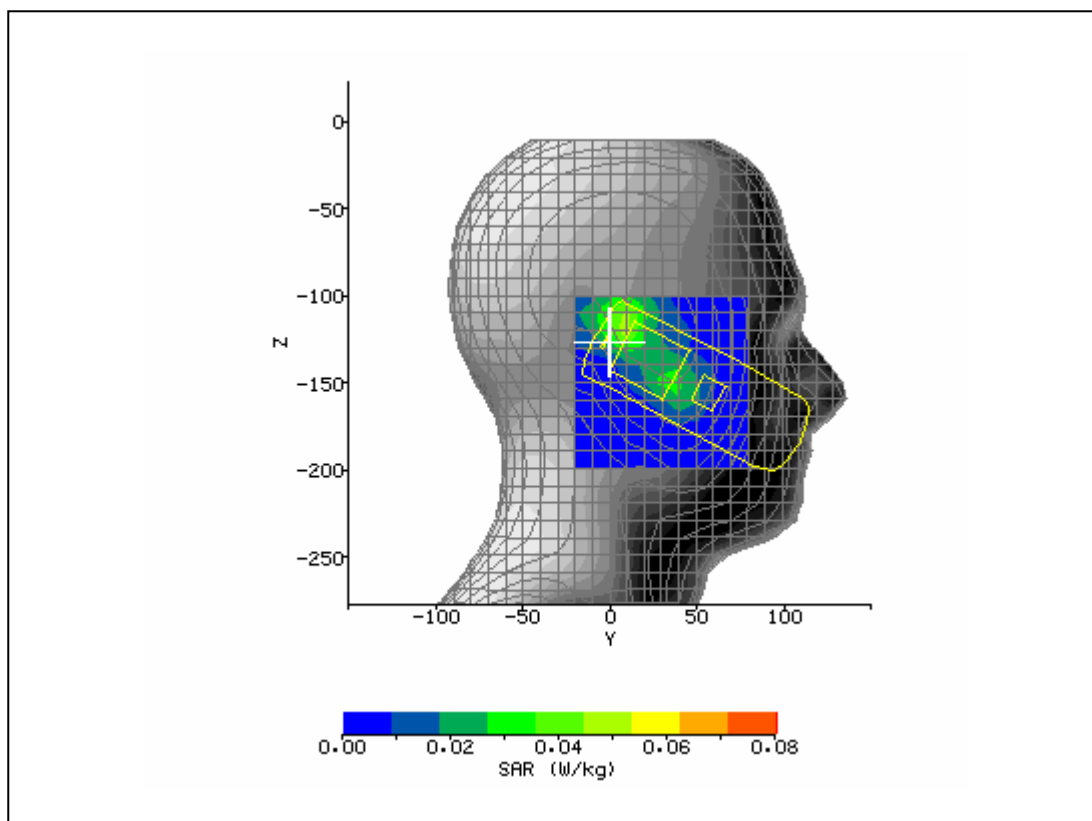


Head SAR Colocated:

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/7/2006 6:46:27 PM	DUT Battery Model/No:	
Filename:	body512_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	39.66
Relative Humidity:	30%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	right touch slider closed	Max SAR Z-axis Location:	-114.00 mm
Antenna Configuration:	integral	Max E Field:	12.96 V/m
Test Frequency:	1850.2 & 2412 WLAN & 2402 BTMHz	SAR 1g:	0.218 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.115 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.059 W/kg
Type of Modulation:		SAR End:	0.061 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max	Extrapolation:	poly4

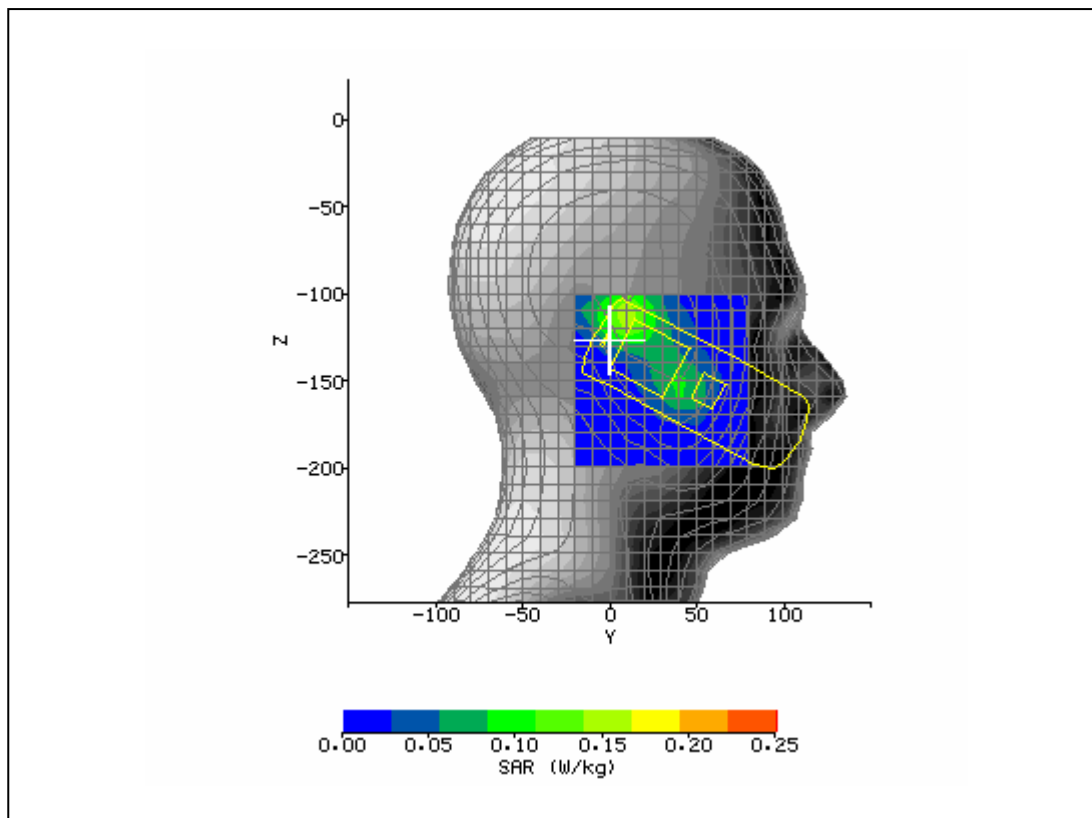


Body SAR:


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/8/2006 11:14:57 AM	DUT Battery Model/No:	
Filename:	661_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	53.05
Relative Humidity:	30%	Conductivity:	1.505
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	36.00 mm
DUT Position:	body 1.5 cm slider closed	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	integral	Max E Field:	26.01 V/m
Test Frequency:	1850.2MHz	SAR 1g:	1.377 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.696 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.117 W/kg
Type of Modulation:		SAR End:	0.117 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

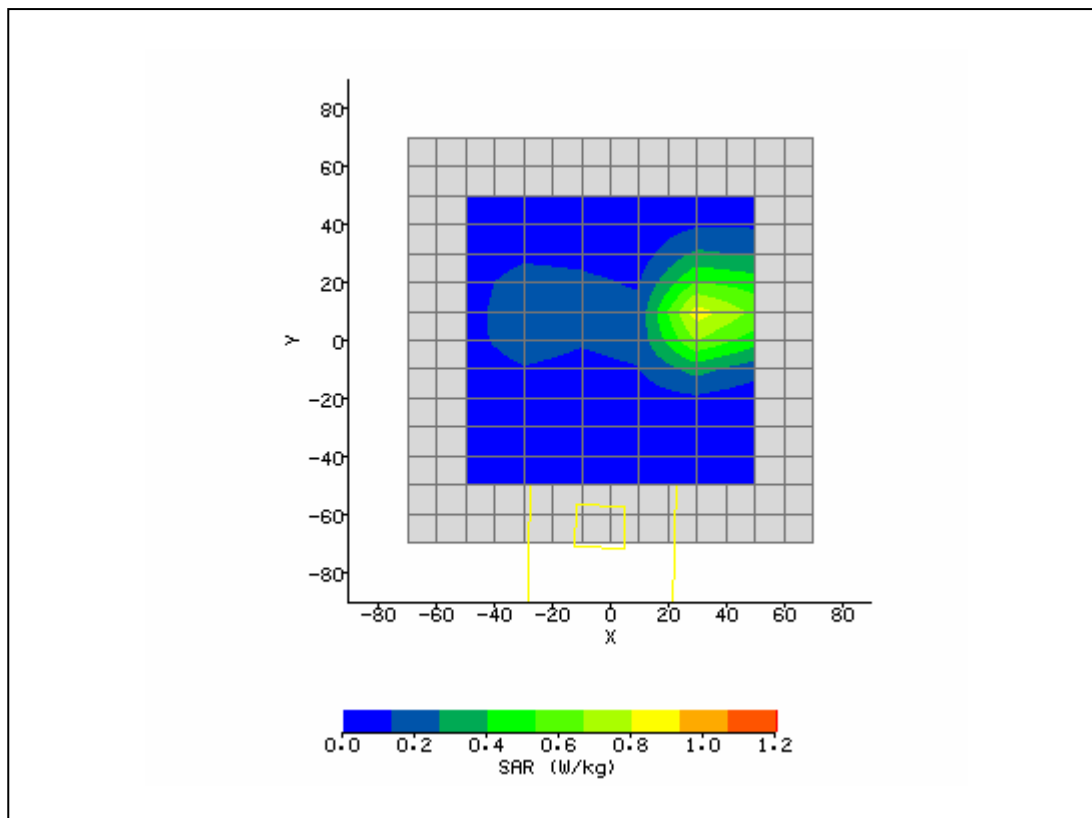

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/8/2006 10:56:30 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	52.75
Relative Humidity:	30%	Conductivity:	1.55
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	36.00 mm
DUT Position:	body 1.5 cm slider closed	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	integral	Max E Field:	20.67 V/m
Test Frequency:	1880MHz	SAR 1g:	0.870 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.436 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.072 W/kg
Type of Modulation:		SAR End:	0.073 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.65 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

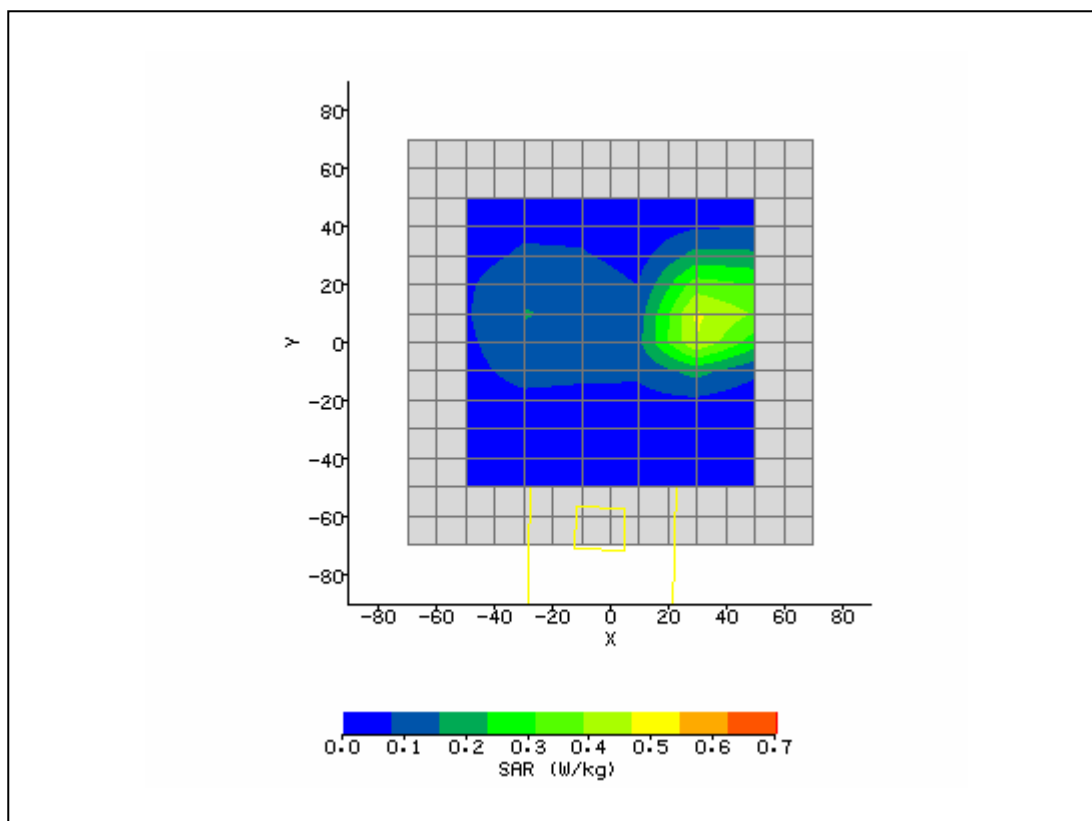

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/8/2006 11:31:09 AM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	52.48
Relative Humidity:	30%	Conductivity:	1.574
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	32.00 mm
DUT Position:	body 1.5 cm slider closed	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	integral	Max E Field:	16.86 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.574 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.296 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.044 W/kg
Type of Modulation:		SAR End:	0.045 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.34 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/07/06
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

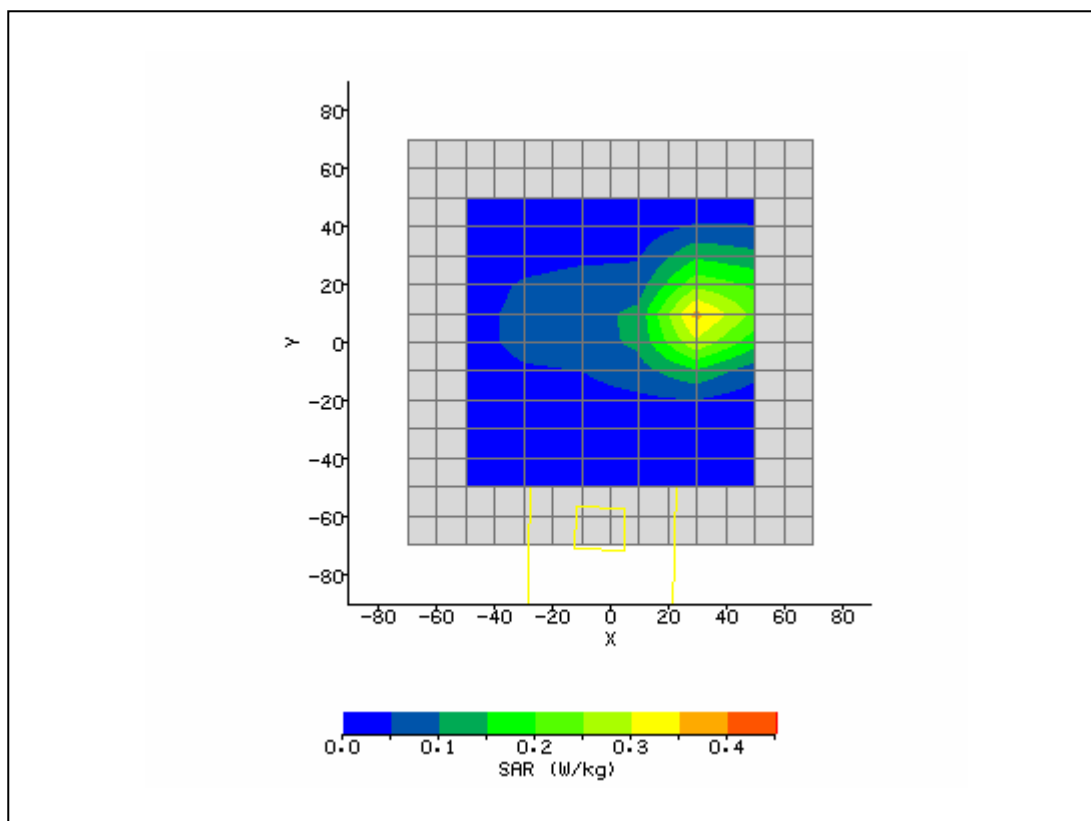

Body SAR Colocated:

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	12/8/2006 12:17:23 PM	DUT Battery Model/No:	
Filename:	body512_3da.txt	Probe Serial Number:	L0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Toshiba	Relative Permittivity:	53.05
Relative Humidity:	30%	Conductivity:	1.505
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	body 1.5 cm slider closed	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	integral	Max E Field:	27.20 V/m
Test Frequency:	1850.2 & 2412 WLAN & 2402 BTMHz	SAR 1g:	1.439 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.723 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.096 W/kg
Type of Modulation:		SAR End:	0.101 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.81 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	12/11/06
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

