




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 11:46:04 AM	DUT Battery Model/No:	
Filename:	A_Left_tch661_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	39.98
Relative Humidity:	30%	Conductivity:	1.447
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	10.00 mm
DUT Position:	Right Touch	Max SAR Z-axis Location:	-132.00 mm
Antenna Configuration:	Integral	Max E Field:	16.31 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.313 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.190 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.124 W/kg
Type of Modulation:		SAR End:	0.123 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.08 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

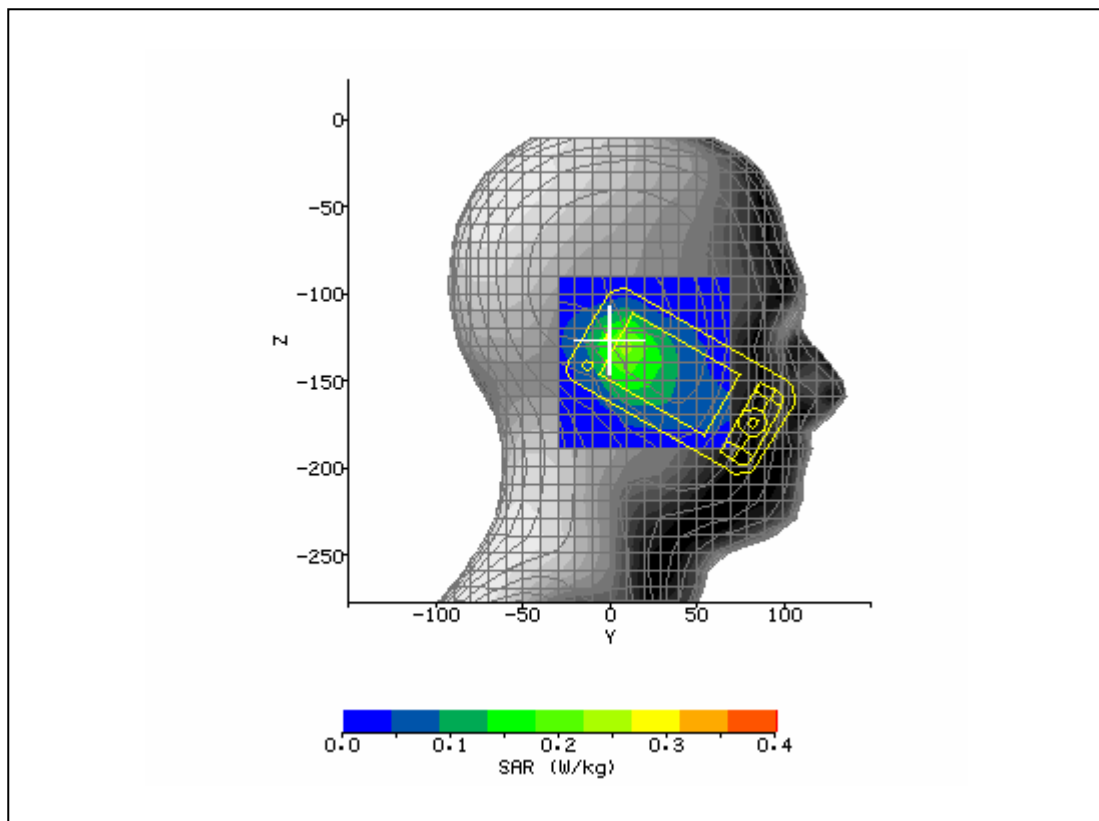


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 12:11:35 PM	DUT Battery Model/No:	
Filename:	A_Right_tch661_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	39.98
Relative Humidity:	30%	Conductivity:	1.447
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	7.00 mm
DUT Position:	Right Tilt	Max SAR Z-axis Location:	-128.00 mm
Antenna Configuration:	Integral	Max E Field:	17.06 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.363 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.203 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.136 W/kg
Type of Modulation:		SAR End:	0.137 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

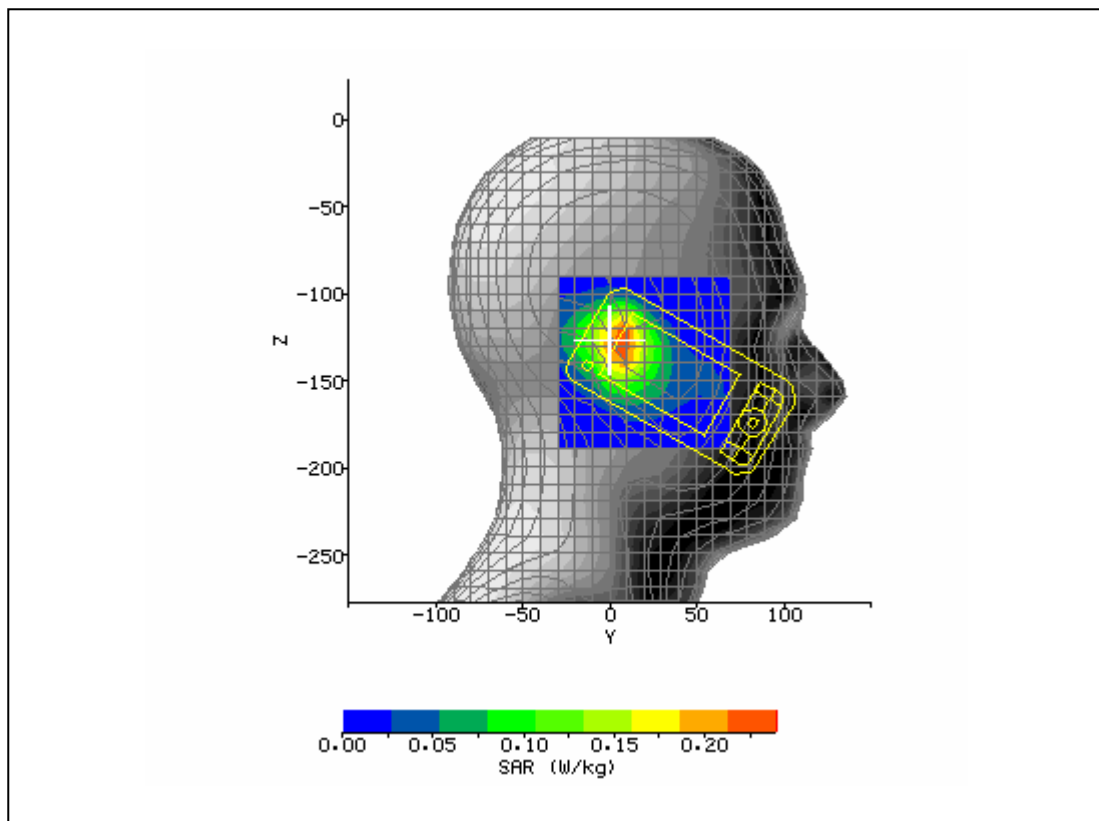


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 11:22:54 AM	DUT Battery Model/No:	
Filename:	A_Left_tch661_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	39.98
Relative Humidity:	30%	Conductivity:	1.447
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-19.00 mm
DUT Position:	Left Touch	Max SAR Z-axis Location:	-117.00 mm
Antenna Configuration:	Integral	Max E Field:	16.94 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.416 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.247 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.143 W/kg
Type of Modulation:		SAR End:	0.144 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.69 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

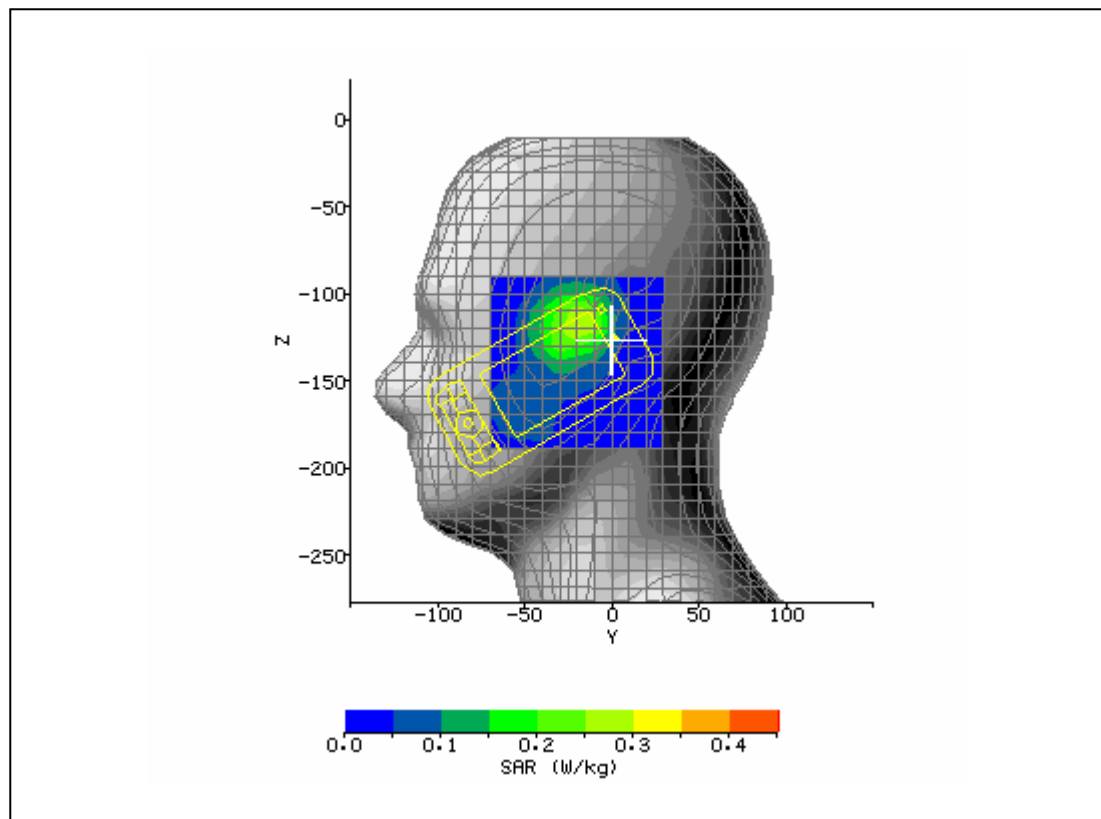


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 10:57:27 AM	DUT Battery Model/No:	
Filename:	A_Left_tlt512_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	39.98
Relative Humidity:	30%	Conductivity:	1.447
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-122.00 mm
Antenna Configuration:	Integral	Max E Field:	\18.16 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.444 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.257 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.165 W/kg
Type of Modulation:		SAR End:	0.163 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

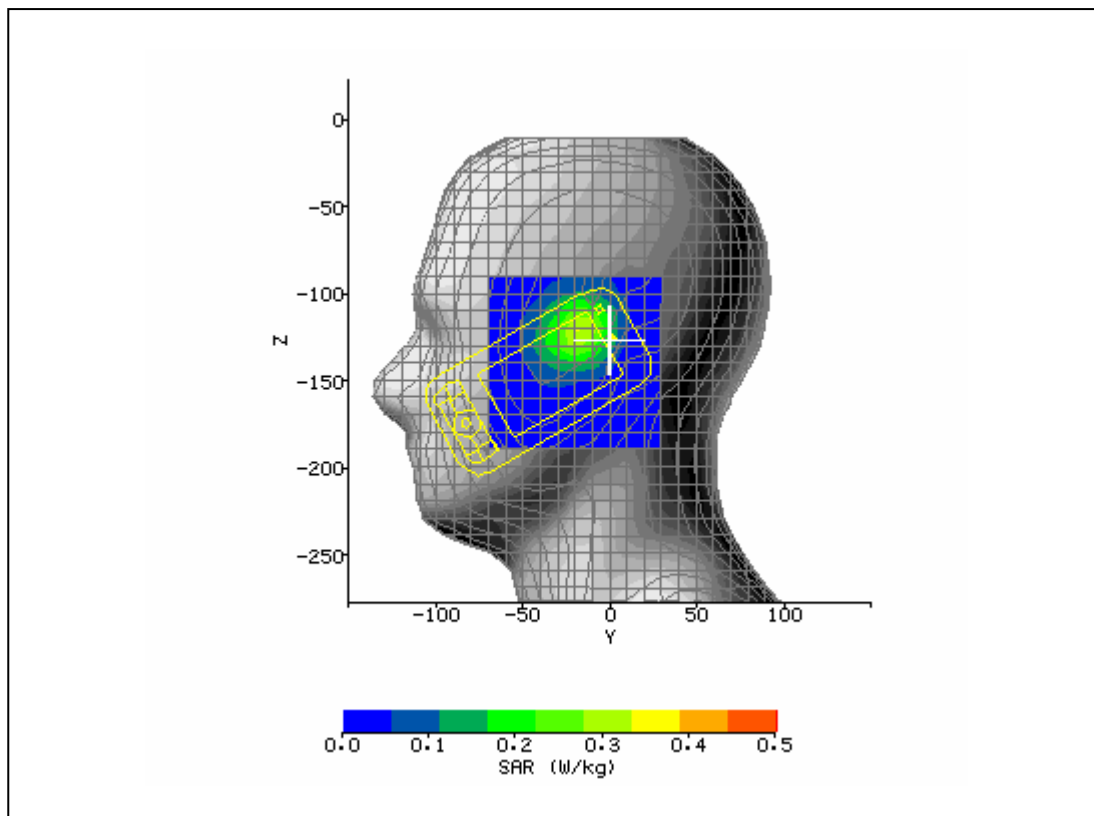


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 10:36:00 AM	DUT Battery Model/No:	
Filename:	A_Left_tch512_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	40.28
Relative Humidity:	30%	Conductivity:	1.44
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-122.00 mm
Antenna Configuration:	Integral	Max E Field:	18.70 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.497 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.282 W/kg
Conversion Factors:	.565 / .565 / .565	SAR Start:	0.177 W/kg
Type of Modulation:		SAR End:	0.173 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.50 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

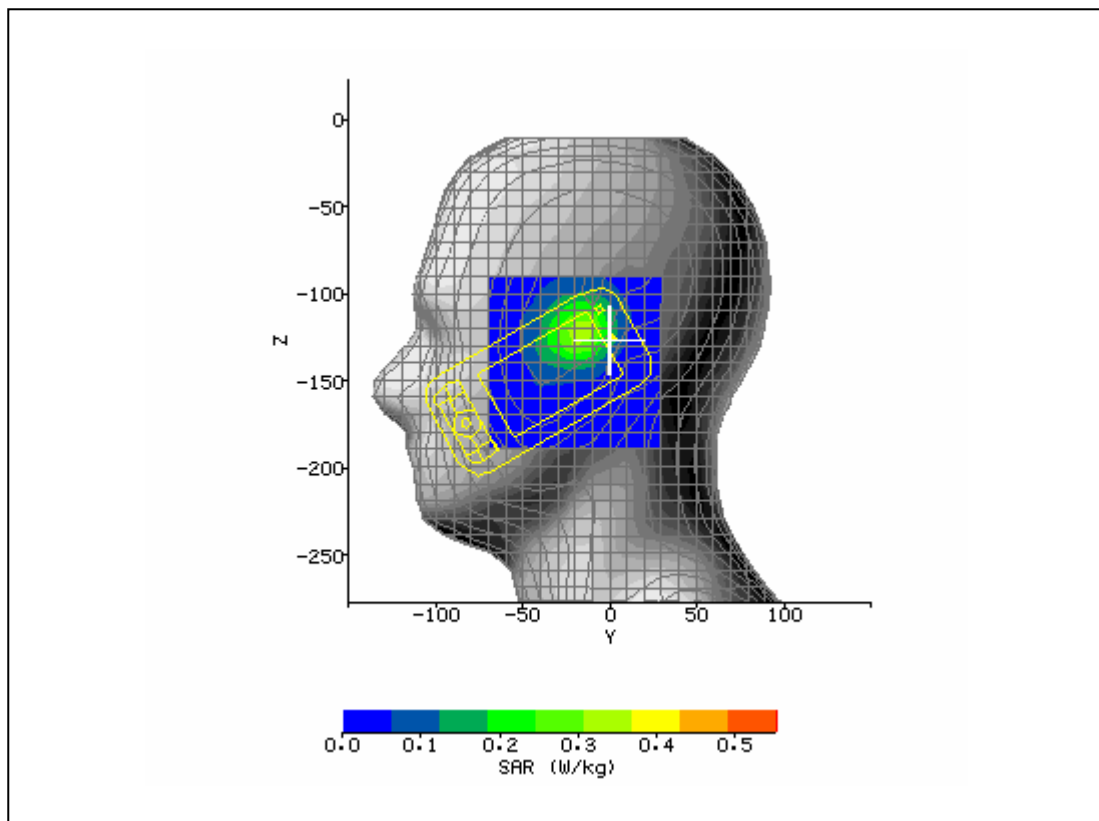


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 12:38:07 PM	DUT Battery Model/No:	
Filename:	A_Left_tlt810_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	40.02
Relative Humidity:	30%	Conductivity:	1.462
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-17.00 mm
DUT Position:	Left Tilt	Max SAR Z-axis Location:	-114.00 mm
Antenna Configuration:	Integral	Max E Field:	14.14 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.305 W/kg
Air Factors:	405 / 550 / 421	SAR 10g:	0.172 W/kg
Conversion Factors:	.255 / .255 / .255	SAR Start:	0.102 W/kg
Type of Modulation:		SAR End:	0.102 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	Max. UL power 30dBm	Extrapolation:	poly4

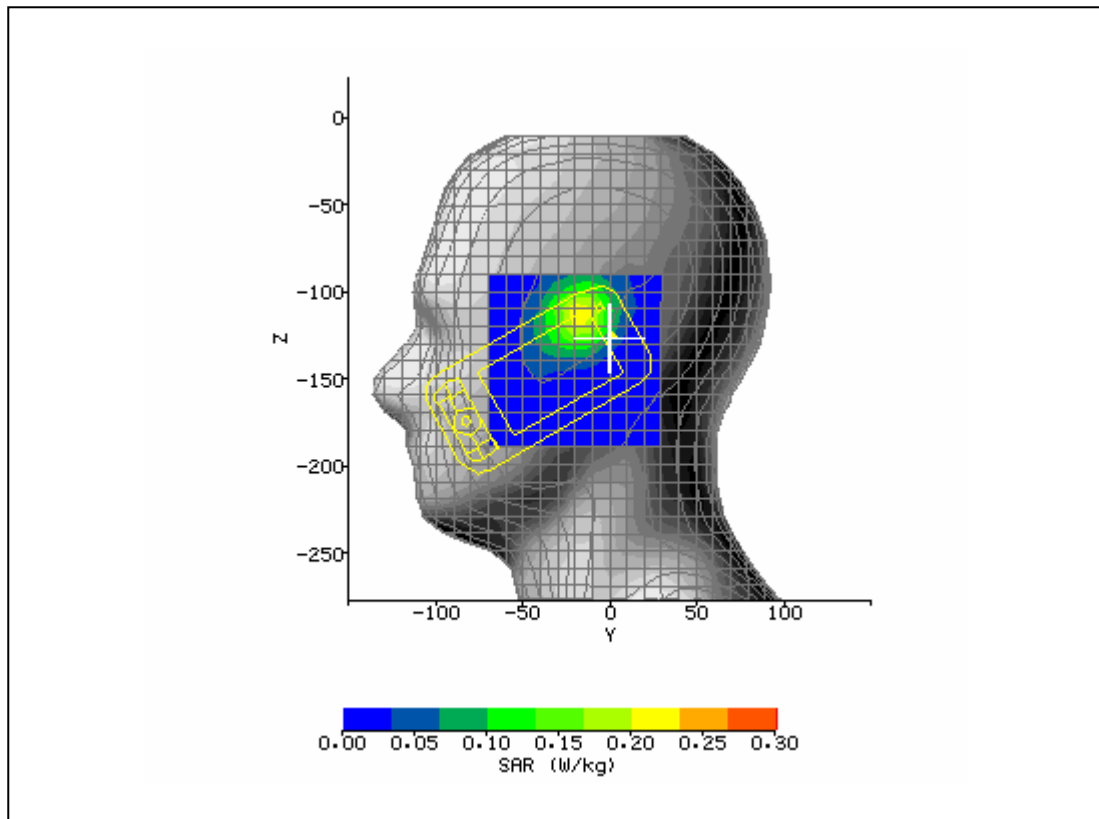


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 2:33:48 PM	DUT Battery Model/No:	
Filename:	A_Back661(15)_op_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	53.19
Relative Humidity:	30%	Conductivity:	1.573
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-26.00 mm
DUT Position:	Front closed	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Integral	Max E Field:	11.89 V/m
Test Frequency:	1880.0MHz	SAR 1g:	0.296 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.177 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.034 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	2 time slots up	Extrapolation:	poly4

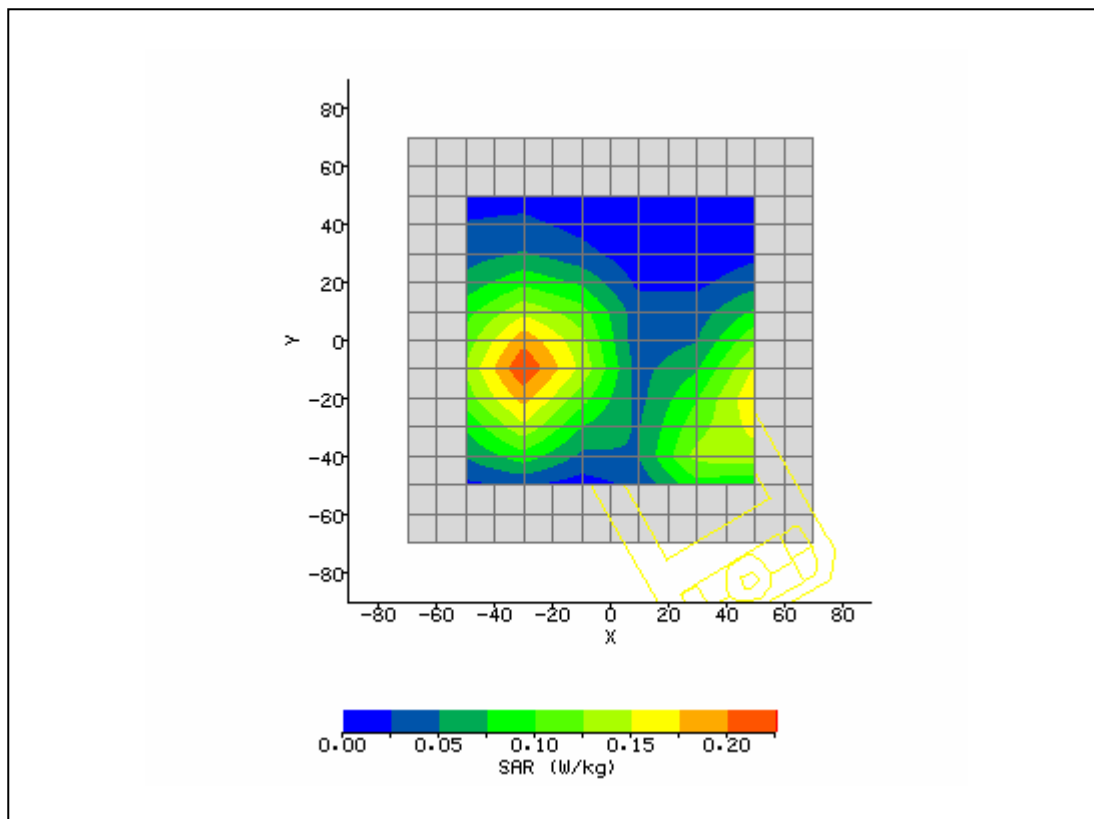


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 1:59:07 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	53.19
Relative Humidity:	30%	Conductivity:	1.573
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	Back closed	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Integral	Max E Field:	22.96 V/m
Test Frequency:	1880.0MHz	SAR 1g:	1.063 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.593 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.108 W/kg
Type of Modulation:		SAR End:	0.104 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	2 time slots up	Extrapolation:	poly4

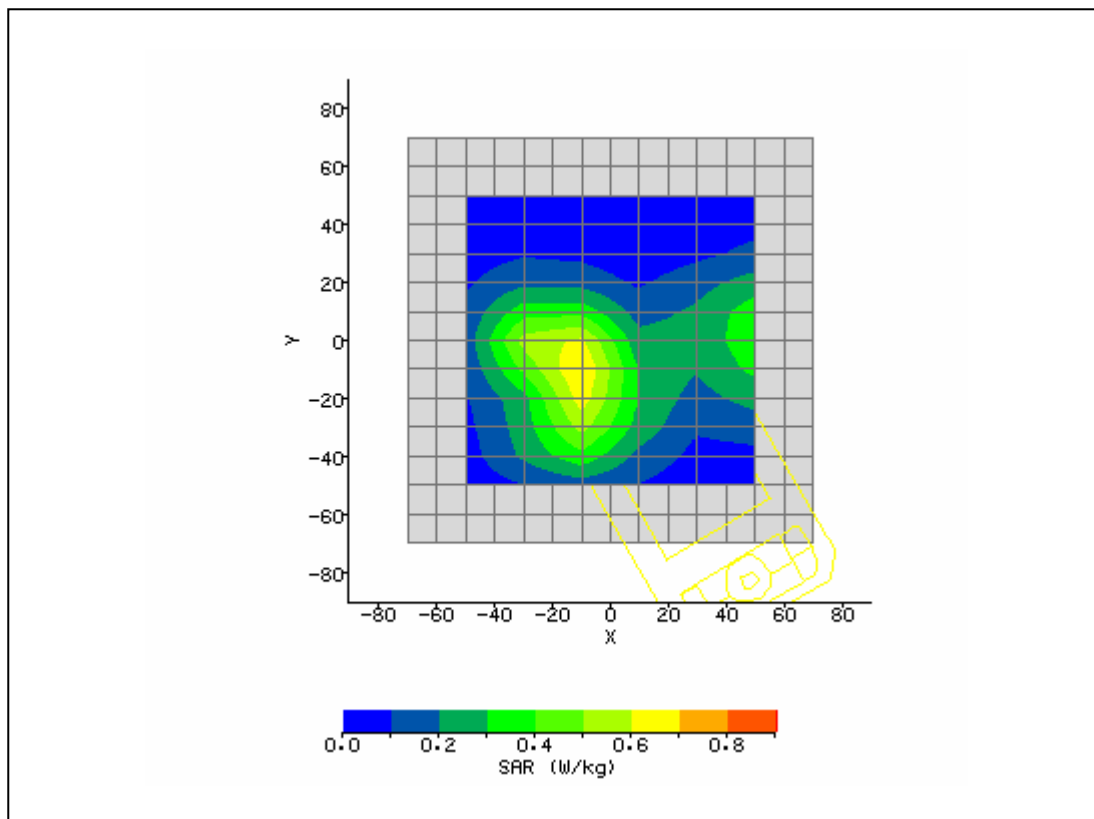


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 2:51:07 PM	DUT Battery Model/No:	
Filename:	A_Front661(15)_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	53.31
Relative Humidity:	30%	Conductivity:	1.573
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Back closed	Max SAR Y-axis Location:	-29.00 mm
Antenna Configuration:	Integral	Max E Field:	23.07 V/m
Test Frequency:	1850.2MHz	SAR 1g:	1.132 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.627 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.117 W/kg
Type of Modulation:		SAR End:	0.117 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	2 time slots up	Extrapolation:	poly4

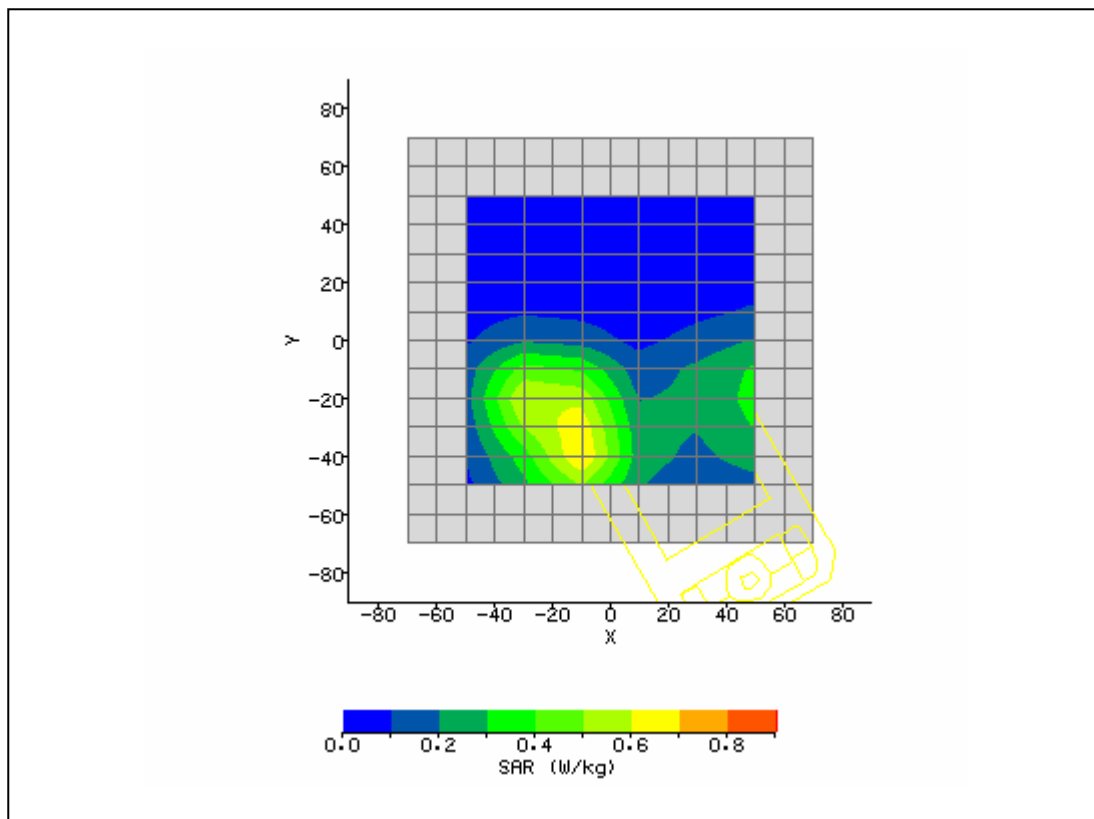


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 3:08:52 PM	DUT Battery Model/No:	
Filename:	A_Back512(15)_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	53.01
Relative Humidity:	30%	Conductivity:	1.579
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Back closed	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Integral	Max E Field:	20.42 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.872 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.482 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.082 W/kg
Type of Modulation:		SAR End:	0.082 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	2 time slots up	Extrapolation:	poly4

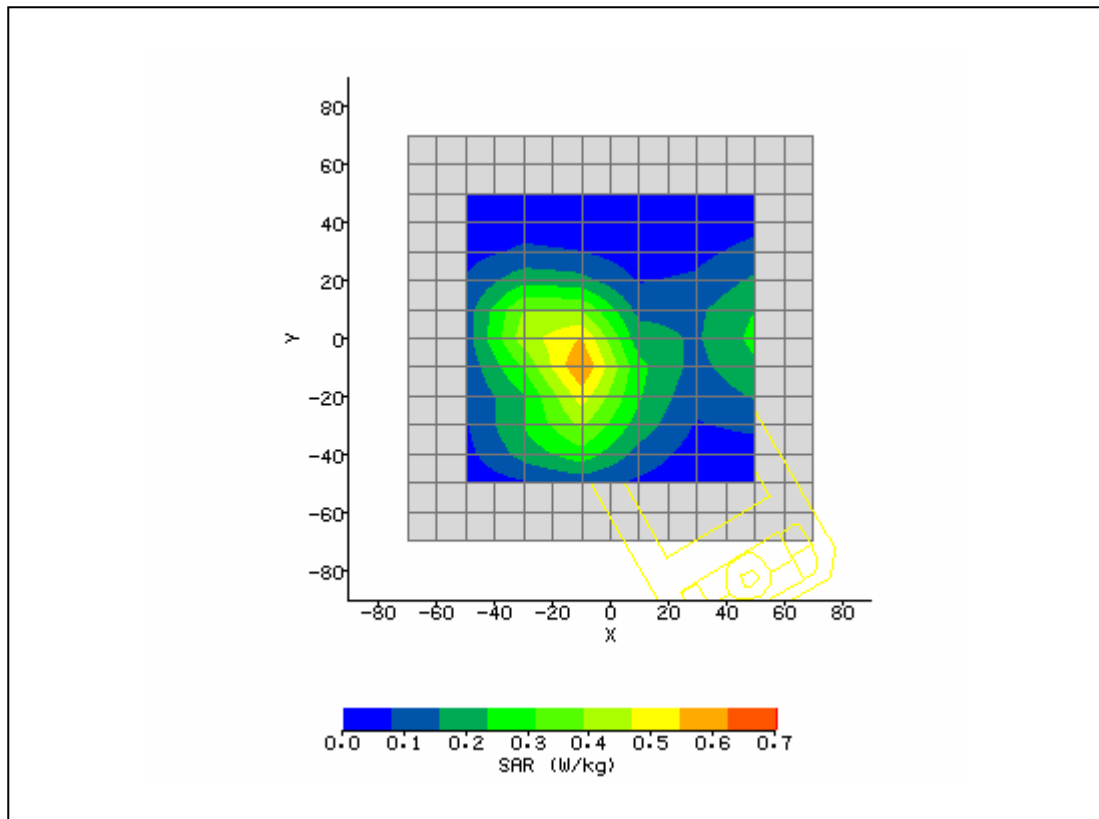


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/30/2007 3:08:52 PM	DUT Battery Model/No:	
Filename:	A_Back512(15)_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	DT1	Relative Permittivity:	53.31
Relative Humidity:	30%	Conductivity:	1.56
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Back closed	Max SAR Y-axis Location:	-23.00 mm
Antenna Configuration:	Integral	Max E Field:	23.15 V/m
Test Frequency:	1850.2MHz	SAR 1g:	1.178 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.631 W/kg
Conversion Factors:	.630 / .630 / .630	SAR Start:	0.113 W/kg
Type of Modulation:		SAR End:	0.112 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.10 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/30/07
Input Power Level:	2 time slots up + 802.11b ch.6	Extrapolation:	poly4

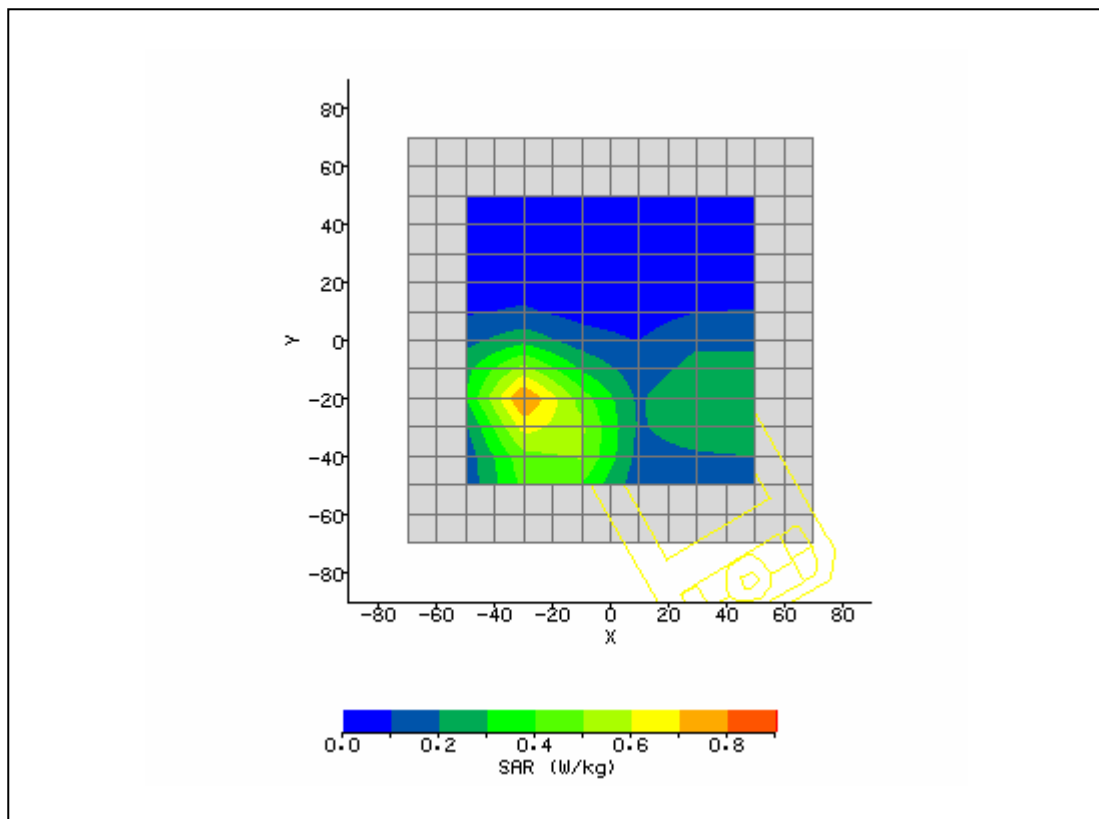


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/11/2007 5:44:33 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DT1 - 7016	Relative Permittivity:	50.59
Relative Humidity:	30%	Conductivity:	1.861
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	Back	Max SAR Y-axis Location:	-40.80 mm
Antenna Configuration:	Integral	Max E Field:	3.53 V/m
Test Frequency:	2412MHz	SAR 1g:	0.024 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.009 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/11/07
Input Power Level:	802.11b, 15mm.	Extrapolation:	poly4

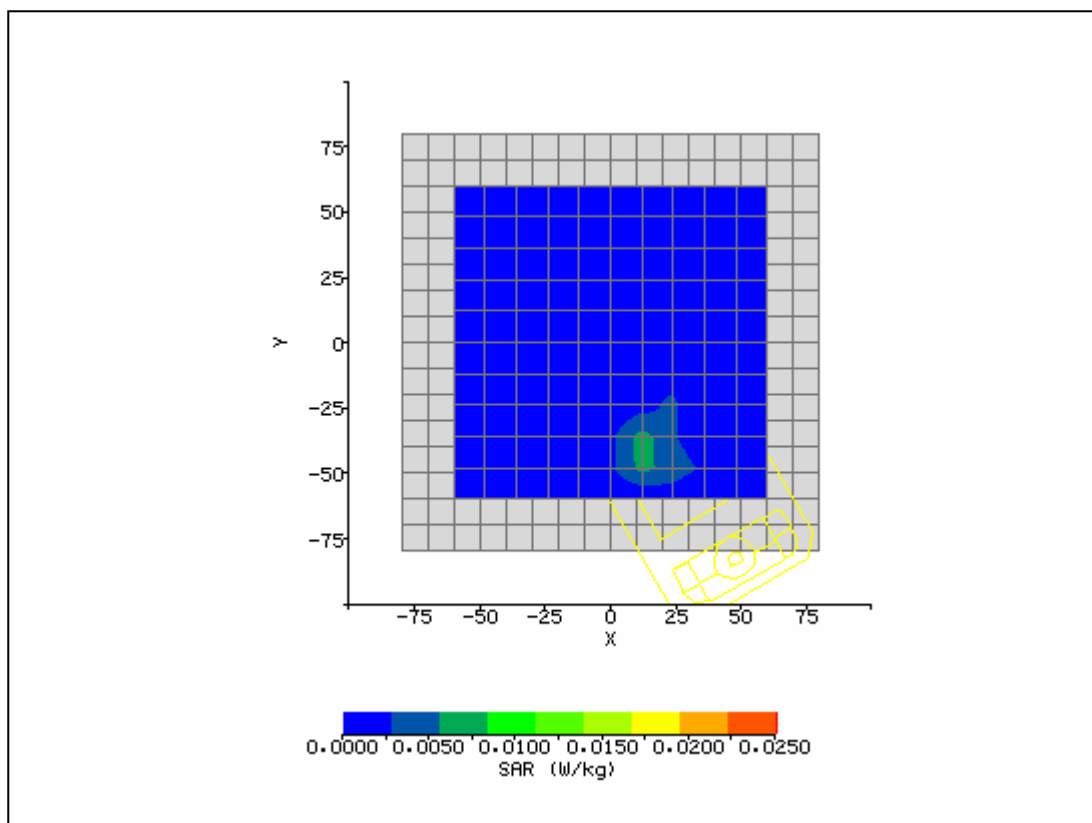

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2007 8:55:42 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DT1 - 7016	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	48.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Integral	Max E Field:	4.18 V/m
Test Frequency:	2437MHz	SAR 1g:	0.027 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.012 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.006 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/11/07
Input Power Level:	802.11b, 15mm.	Extrapolation:	poly4

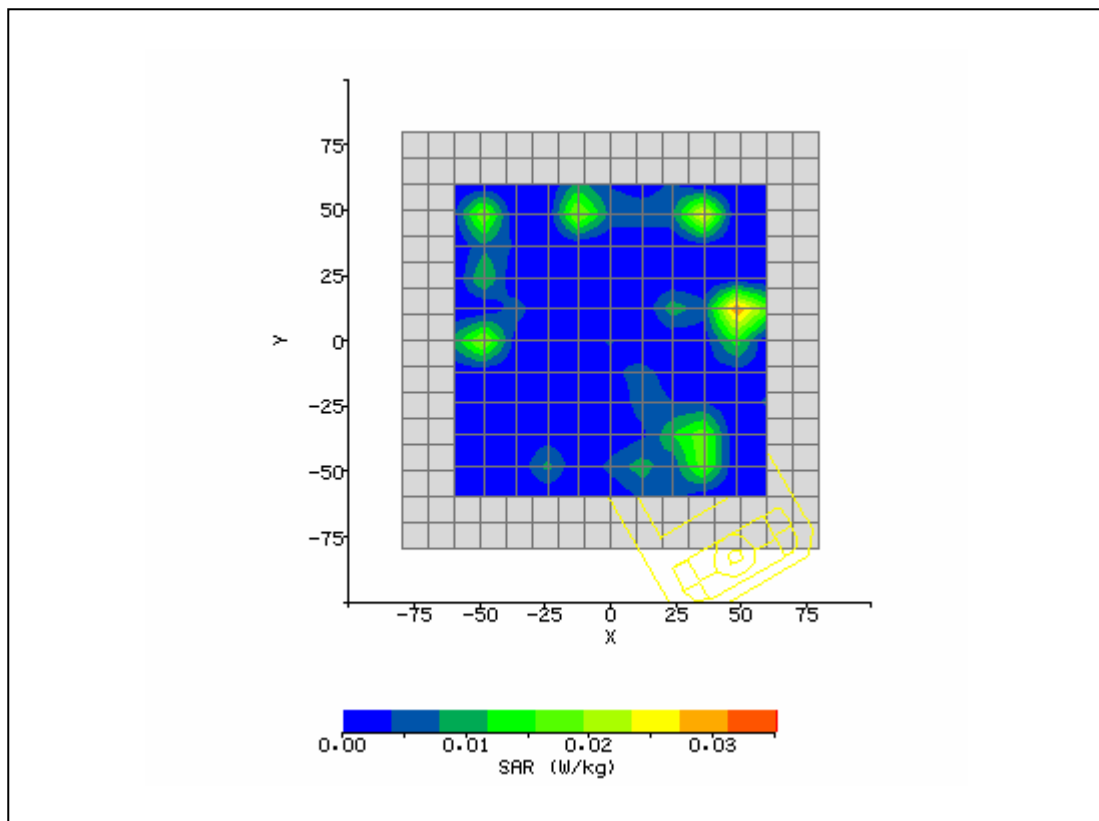

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2007 9:24:18 AM	DUT Battery Model/No:	
Filename:	Back6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DT1 - 7016	Relative Permittivity:	50.82
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	22.80 mm
DUT Position:	Front	Max SAR Y-axis Location:	45.60 mm
Antenna Configuration:	Integral	Max E Field:	4.02 V/m
Test Frequency:	2437MHz	SAR 1g:	0.021 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.010 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/11/07
Input Power Level:	802.11b, 15mm.	Extrapolation:	poly4

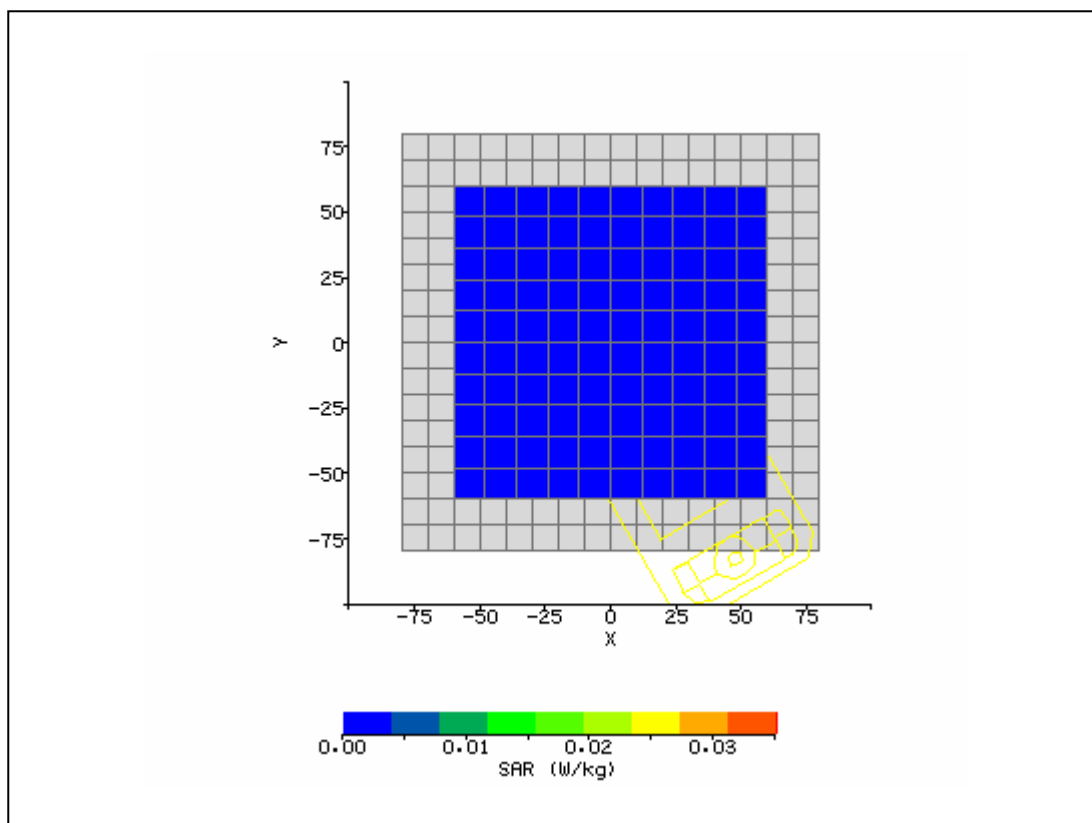

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2007 9:24:18 AM	DUT Battery Model/No:	
Filename:	Back6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	DT1 - 7016	Relative Permittivity:	50.82
Relative Humidity:	30%	Conductivity:	1.938
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.80 mm
DUT Position:	Back	Max SAR Y-axis Location:	-43.20 mm
Antenna Configuration:	Integral	Max E Field:	3.81 V/m
Test Frequency:	2462MHz	SAR 1g:	0.023 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.011 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	04/11/07
Input Power Level:	802.11b, 15mm.	Extrapolation:	poly4

