



No. DAT-P-114/01-01

TEST REPORT

No. 2007TAR030

Product	GSM/UMTS/HSDPA Mobile Phone
Model	SG4-E01
Client	Toshiba Information Systems (UK) Ltd.

**Telecommunication Metrology Center
of Ministry of Information Industry**

Notice

1. Copies of the test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
2. The test report shall be invalid if there are no signatures of the testing person, reviewing person and approving person on it.
3. The test report shall be invalid if it is altered.
4. Any demurral about the test shall be put forward to the testing organization within 15 days after the receiving of the test report.
5. This test report standalone dose not constitute or imply by its own an approval of the product by any Certification Authorities or Competent Bodies.
6. This report is only valid if complete, and test report shall not be reproduced except in full, without written approval of the laboratory.
7. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of MII and the Accreditation Bodies, if it applies.

Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
(Telecommunication Metrology Center of MII)

Post code: 100083

Telephone: +86 10 62302041 Fax: +86 10 62304793

Web site: <http://www.emcite.com>

E-mail: welcome@emcite.com

TABLE OF CONTENT

1. COMPETENCE AND WARRANTIES	5
2. Testing Laboratory	5
2.1 Testing Location	5
2.2 Testing Environment.....	5
2.3 Testing Period	6
3. Applicant Information	6
3.1 Client Information.....	6
3.2 Manufacture Information	7
4. Equipment Under Test (EUT) and Ancillary Equipment (AE).....	7
4.1 About EUT	7
4.2 Internal Identification of EUT used during the test.....	7
4.3 Photographs of EUT.....	7
5. SUMMARY OF TEST RESULTS	7
6. MAIN TEST INSTRUMENTS	8
ANNEX A MEASUREMENT RESULTS	9
ANNEX B PHOTOGRAPH OF EUT.....	12
ANNEX C TEST LAYOUT.....	18

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. 2007TAR030

Page 4 of 18

Product	GSM/UMTS/HSDPA Mobile Phone	Model	SG4-E01	
		Trade mark		
Client	Toshiba Information Systems (UK) Ltd.			
Manufacturer	TechFaith Wireless Technology Ltd.			
Arrival Date of sample	November 19 th , 2007	Carrier of the samples	Adrian Coyle	
Quantity of the samples	1	Date of product	/	
Series number	EUT1: 350102810001933			
Standard(s)	FCC Part 15 (10-1-06 Edition)			
Conclusion	<p>Final Judgment: Pass</p> <p style="text-align: right;">Date of issue: 2007-12-20</p>			
Comment	The test result relates only to the tested samples.			

Approved by 卢炳松 Reviewed by 宋忠文 Tested by 齐晓刚
 (Lu Bingsong) (Song Chongwen) (Zi Xiaogang)

(Lu Bingsong - Deputy Director of the laboratory)

1. COMPETENCE AND WARRANTIES

Telecommunication Metrology Center of Ministry of Information Industry(hereinafter **TMC**) is a test laboratory accredited by DAR (DATech) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik), for the tests indicated in the Certificate No. **DAT-P-114/01-01**.

TMC is a test laboratory accredited by CNAS–China national Accreditation Service for Conformity Assessment, for the tests indicated in the Certificate No. **L0442**.

TMC is FCC listed lab. FCC listed number is **733176**.

The test site in **TMC** is registered in Industry Canada. The IC registration number is **6629**.

TMC is a testing laboratory competent to carry out the tests described in this report.

TMC guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at TMC at the time of execution of the test.

TMC is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

2. Testing Laboratory

2.1 Testing Location

Company Name:	Telecommunication Metrology Center of Ministry of Information Industry
Address:	No 52, Huayuan beilu, Haidian District, Beijing,P.R.China
Postal Code:	100083
Telephone:	00861062303288
Fax:	00861062304793

2.2 Testing Environment

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

Telecommunication Metrology Center of Ministry of Information Industry

No. 2007TAR030

Page 6 of 18

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (6.8 meters × 3.08 meters × 3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

2.3 Testing Period

Testing Start Date:	December 2,2007
Testing End Date:	December 7,2007

3. Applicant Information

3.1 Client Information

Name or Company	Toshiba Information Systems (UK) Ltd.
Address/Post	Delta House, The Crescent, Southwood Business Park, Farnborough, GU14 0NL, UK
City	Farnborough
Postal Code	/
Country	UK
Telephone	+44 (0)1932 841 600
Fax	+44(0)1252 532 326

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. 2007TAR030

Page 7 of 18

3.2 Manufacture Information

Name or Company	TechFaith Wireless Technology Ltd.
Address/Post	No. 10A, Tower D2, IT Park, Electronic Town, Jiu Xian Qiao North Road, Chaoyang District, Beijing, 100015
City	Beijing
Postal Code	100015
Country	China
Telephone	+86-010-58229865
Fax	+86-010-58227200

4. Equipment under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Model	SG4-E01
FCC ID	SP2-SG4-E01
Hardware status	P3
Software status	P0190
Power supply	Battery or Charger (AC Adaptor)

4.2 Internal Identification of EUT used during the test

EUT ID	SN or IMEI	HW Version	SW Version
EUT1	350102810001933	P3	P0190

4.3 Photographs of EUT

Photographs of MS Hand Telephone Set and Charger are respectively shown in ANNEX B of this test report.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. 2007TAR030

Page 8 of 18

6. MAIN TEST INSTRUMENTS

NO.	Description	TYPE	SERIES NUMBER	MANUFACTUR E	CAL DUE DATE
1	Test Receiver	ESS	847151/015	R&S	2008-10-30
2	Test Receiver	ESI40	831564/002	R&S	2008-2-11
3	BiLog Antenna	3142B	9908-1403	EMCO	2008-1-16
4	BiLog Antenna	VUL9163	9163 175	Schwarzbeck	2009-9-19
5	Signal Generator	SMT06	831285/005	R&S	2007-12-26
6	Signal Generator	SMP04	100070	R&S	2008-4-20
7	LISN	ESH2-Z5	829991/012	R&S	2008-8-13
8	Spectrum Analyzer	E4440A	MY41000262	Agilent	2008-4-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2008-8-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2008-3
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2008-3
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2008-3
13	Climatic chamber	SH-241	92003546	ESPEC	2008-5-15
14	Spectrum Analyzer	FSU26	200030	R&S	2008-6-19
15	Bluetooth Tester	MT8852A	6K0002698	Anritsu	2009-3-19

ANNEX A MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS) at a distance of 3 meters is tested. The test set-up please refers to Annex C.1.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Measurement Results

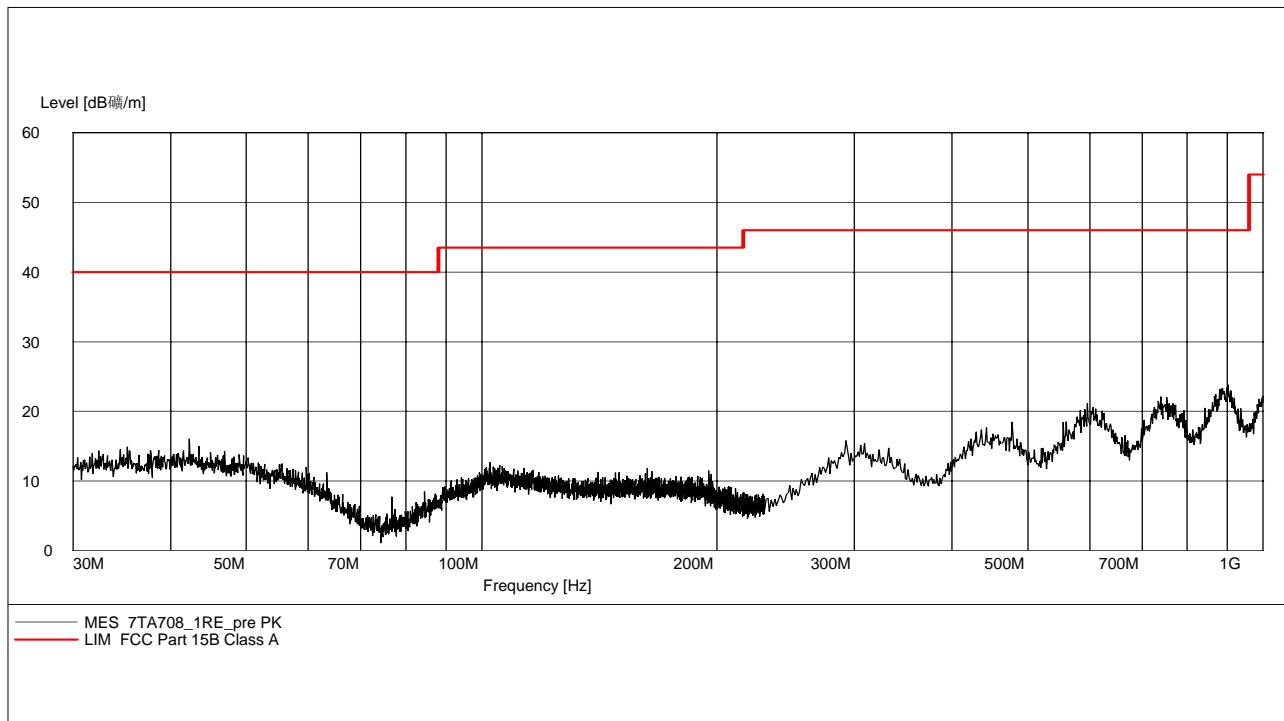


Figure A.1 Radiated Emission from 30MHz to 1GHz

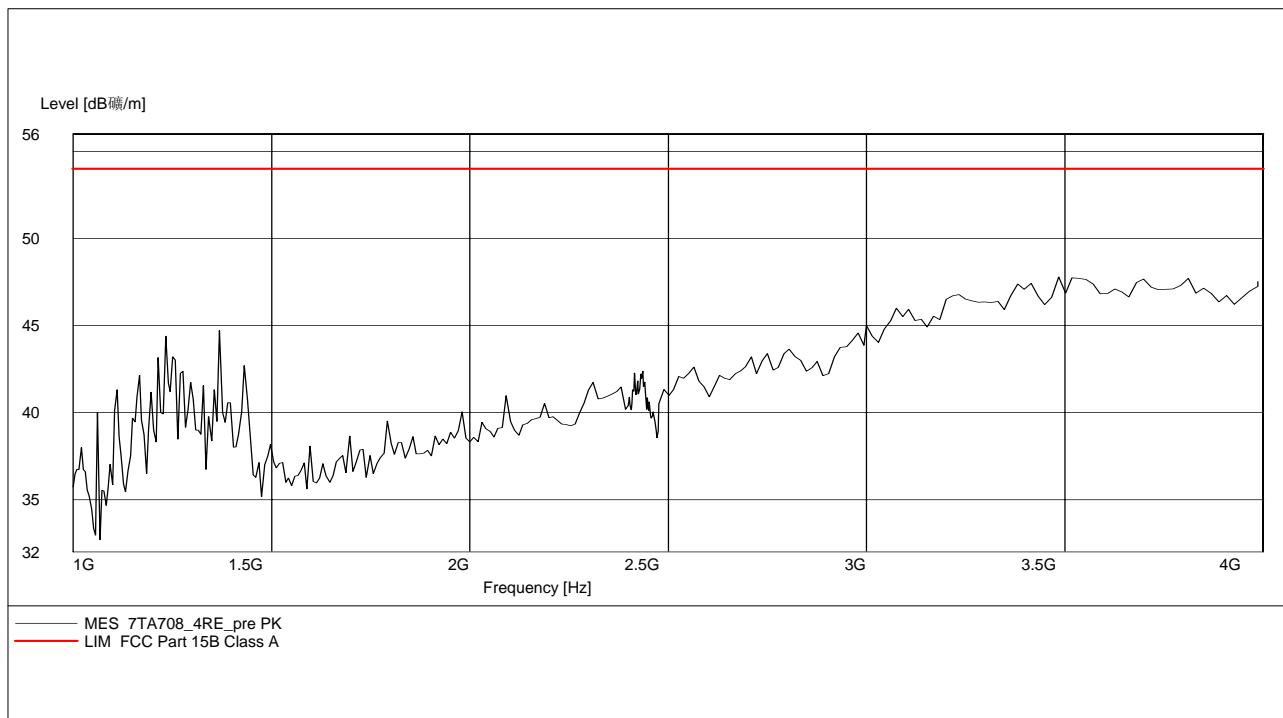


Figure A.2 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. The test set-up please refers to Annex C.2.

A.2.2 EUT Operating Mode:


The MS is operating in the USB mode. During the test MS is connected to a laptop via a USB cable. The model of the laptop is IBM T42 2373-M6C, and the serial number of the laptop is 99-FV6P2. The software is used to let the laptop keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Measurement Results

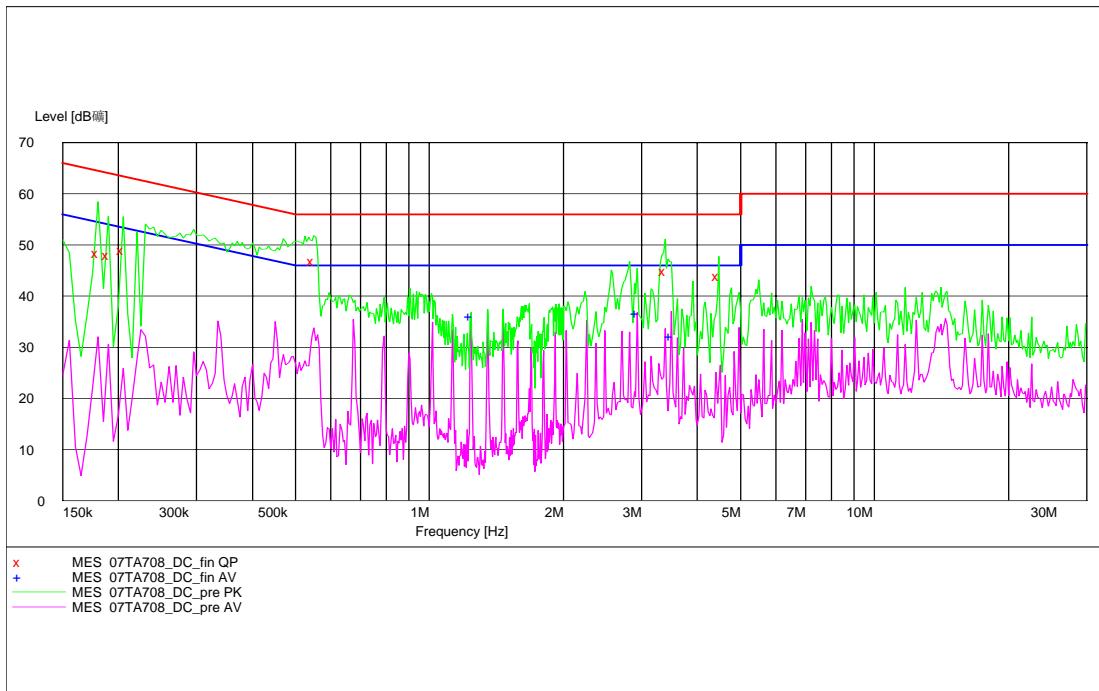

MEASUREMENT RESULT: "7TA708_DC_fin QP"

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.180000	48.40	10.1	65	16.1	L1	GND
0.190000	48.00	10.1	64	16.0	N	FLO
0.205000	49.00	10.1	63	14.4	N	GND
0.550000	46.90	10.1	56	9.1	N	GND
3.383959	44.80	10.1	56	11.2	L1	GND
4.472432	43.90	10.2	56	12.1	N	GND

MEASUREMENT RESULT: "7TA708_DC_fin AV"

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
1.240000	36.10	10.1	46	10.0	L1	GND
2.931808	36.60	10.1	46	9.4	L1	GND
3.493552	32.10	10.1	46	13.9	N	GND

ANNEX B PHOTOGRAPH OF EUT

External Photo



Mobile Phone



Mobile Phone

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. 2007TAR030

Page 13 of 18



Charger (AC/DC Adapter)



Label of Charger (AC/DC Adapter)



Battery

Internal Photo



Mobile phone Disassembly




Mobile phone Disassembly



Mobile phone Disassembly



Mobile phone Disassembly

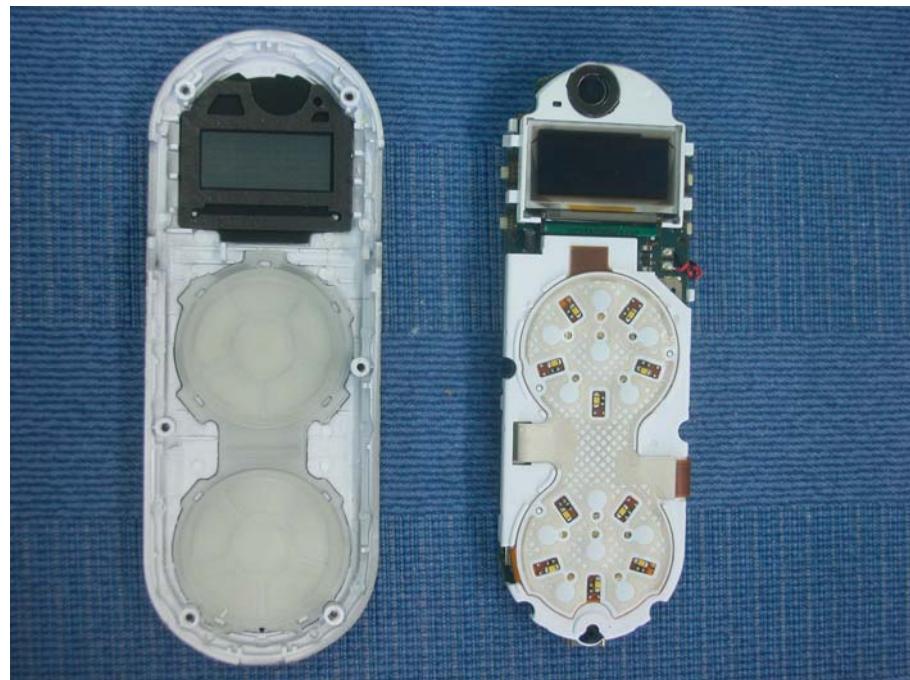

Mobile phone Disassembly

ANNEX C TEST LAYOUT



Pic C.1 Radiated Emission



Pic C.2 Conducted Emission

*****END OF REPORT BODY*****