


Portable Omni Directional Antenna for 2.4 GHz ANT-RSMA.KS-O-022-03-0,1m

Description:


This antenna can be used for special applications with devices with RSMA connector, where the standard antenna is either too big or for other reasons not suitable. The antenna can be mounted detachable at the housing.

Features:

Item	ANT-RSMA.KS-O-022-03-0,1m
Order No.	600527
Frequency range	2400 MHz - 2500 MHz
Polarization	Linear, vertical
VSWR	2.0 : 1 Max.
HPBW: horizontal / vertical	360° / 80°
Impedance	50 Ohms
Connector	RP SMA plug (different than shown on pictures)
Cable	RG 174, 10cm
Gain	2.2 dBi
Connector	RP SMA plug
Dimensions / Weight	70 x 18 x 6.4 mm / 15 g
Radome color - material	Black - ABS, UV resistant
Operating temperature	- 10 °C to +55 °C
Humidity	95% @ 25 °C

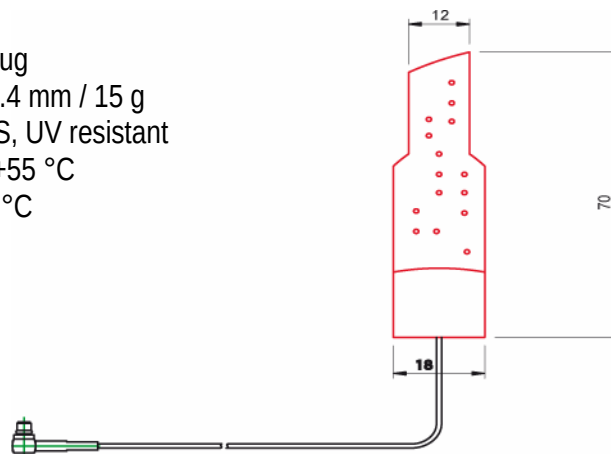

H-plane Co-polarization Pattern

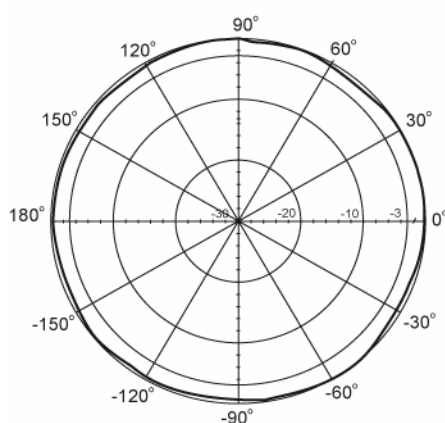

V-plane Co-polarization Pattern

