

# **ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT**

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT **CLASS II PC REPORT**

	OF
Applicant:	BitaTek Co., Ltd. 6F., No. 115, Wugong 3rd Rd., Wugu Dist., New Taipei City 248, Taiwan
Product Name:	Frey
Brand Name:	Bitatek
Model No.:	Frey M1-0000, Frey M1-0010
Model Difference:	Frey M1-0000 with GPS, Frey M1-0010 without GPS
FCC ID:	SPYIM0002
Report Number:	ER/2018/90171
FCC Rule Part:	§15.247, Cat: DTS
Issue Date:	Dec. 13, 2018
Date of Test:	Sep. 28, 2018 ~ Oct. 29, 2018
Date of EUT Received:	Sep. 28, 2018

#### We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:

CHUN, CHIZEH, CHIEN

Chun Chieh Chen / Asst. Supervisor





Approved By:

Jay Lin / Asst. Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiers Souther Was Stated un locate a micro in the test report for the first report for the first and fi tronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



# **Revision History**

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
ER/2018/90171	Rev.00	Initial creation of document	All	Nov. 22, 2018	Violetta Tang
ER/2018/90171	Rev.01	Add statements of worst case testing on page 9	All	Dec. 13, 2018	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未检公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

# **Table of Contents**

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	7
4	DESCRIPTION OF TEST MODES	
5	MEASUREMENT UNCERTAINTY	
6	RADIATED SPURIOUS EMISSION MEASUREMENT	



#### **GENERAL INFORMATION** 1

# **1.1 Product description**

#### General:

Product Name of Host:	Mobile Computers		
Brand Name of Host:	Opticon		
Model No. of Host:	H-28 NCS	A	
Model Difference:	N/A		
Hardware Version:	ES1		
Software Version:	0.1.25.12		
Scope:	The test report covers the radiated emissions requirements of the standards referenced in the report to allow system level approval of the module in this specific host.		
Class II Permissive change:	Frey INSTALLED IN Mobile Computers		
USB Cable:	Model No.: 3C10-00000583, Supplier: Bitatek		
	3.7Vdc from Rechargeable Li-polymer Battery or 5V from AC/DC Adapter		
Power Supply:	Battery:	<ol> <li>Model No.: BTBAT2, Supplier: Leung's Communi- cation &amp; Electric Products (Guangzhou) LTD.</li> <li>Model No.: BTBAT1, Supplier: Leung's Communi- cation &amp; Electric Products (Guangzhou) LTD.</li> </ol>	
	Adapter:	Model No.: S018BDV0900200, Supplier: Ten Pao Industrial Co., Ltd.	

#### WLAN 2.4GHz:

WLAN	Frequency Range	Channels	Modulation Technology	
11b/g	2412-2462	11	DSSS OFDM	
11n HT20	2412-2462	11	OFDM	
11n HT40	2422-2452	9	OFDM	
Antenna Designation:		IFA Antenna, Gain: 2dBi		
Modulation type		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM		
Transition Rate:		802.11 b: 1/2/5.5/11 802.11 g: 6/9/12/18/ 802.11 HT20: 6.5 – 802.11 HT40: 13.5 -	/24/36/48/54 Mbps 72.5Mbps	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **1.2 Test Methodology of Applied Standards**

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 DTS Meas. Guidance ANSI C63.10:2013 Note: All test items have been performed and record as per the above standards.

## **1.3 Test Facility**

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

## 1.4 Special Accessories

There are no special accessories used while test was conducted.

## 1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### SYSTEM TEST CONFIGURATION 2

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

## 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

#### 2.3 Test Procedure

# 2.3.1 Radiated Emissions for DSS & DTS

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

#### 2.3.2 Radiated Emissions (ERP/EIRP) for PCE

According to measurement procured TIA/EIA 603C, The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both Horizontal and Vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



# 2.4 Configuration of Tested System

# Fig. 2-1 Radiated Emission Configuration



# Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

#### SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### **DESCRIPTION OF TEST MODES** 4

# 4.1 Operated in 2400 ~ 2483.5MHz Band

#### 11 channels are provided for 802.11b, 802.11g and 802.11n\_HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n HT40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT
	RADIAT	ED EMISSIO	N TEST (BELOV	V 1 GHz)	
802.11g	1 to 11	6	OFDM	6	Main
	RADIATED EMISSION TEST (ABOVE 1 GHz)				
802.11b	1 to 11	1,6,11	DSSS	1	Main
802.11g	1 to 11	1,6,11	OFDM	6	Main
802.11n (HT20)	1 to 11	1,6,11	OFDM	MCS 0	Main
802.11n (HT40)	3 to 9	3,6,9	OFDM	MCS 0	Main
	RADIA	TED BAND	EDGE EMISSION	I TEST	
802.11b	1 to 11	1,11	DSSS	1	Main
802.11g	1 to 11	1,11	OFDM	6	Main
802.11n (HT20)	1 to 11	1,11	OFDM	MCS 0	Main
802.11n (HT40)	3 to 9	3,9	OFDM	MCS 0	Main

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Note: Pre-scanned was done on rechargeable Li-polymer battery model no.: BTBAT2 & BTBAT1 and BTBAT2 results higher emission. Therefore, the completed set of measurement was done on BTBAT2 to be presented on this test report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### MEASUREMENT UNCERTAINTY 5

Radiated Spurious Emission:

Measurement uncertainty (Polarization : <b>Vertical</b> )	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

Measurement uncertainty (Polarization : <b>Horizontal</b> )	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



#### RADIATED SPURIOUS EMISSION MEASUREMENT 6

# 6.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

# Note:

- The lower limit shall apply at the transition frequencies. 1.
- Emission level  $(dB\mu V/m) = 20 \log Emission level (dB\mu V/m)$ 2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only





## 6.2 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Bi-log Antenna	SCHWAZBECK	VULB9168	378	12/29/2017	12/28/2018
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/16/2018	08/15/2019
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2017	12/11/2018
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019
Spectrum Analyzer	Agilent	E4446A	MY51100003	05/15/2018	05/14/2019
EMI Test Receiver	R&S	ESCI7	100335	02/02/2018	02/01/2019
Pre-Amplifier	HP	8449B	3008A00578	01/02/2018	01/01/2019
Pre-Amplifier	HP	8447D	2944A07676	01/02/2018	01/01/2019
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	10/22/2018	10/21/2019
Attenuator	Mini-Circuit	BW-S10W2+	2	01/02/2018	01/01/2019
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2018	01/01/2019
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019
Notebook	Lenovo	L420	LR-7HXZA	N/A	N/A




# 6.3 Test SET-UP



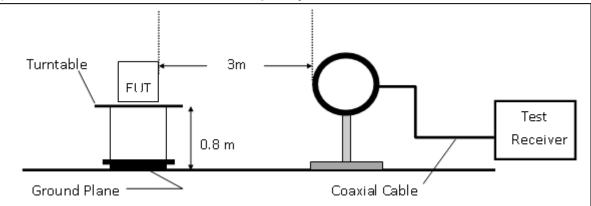

# (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

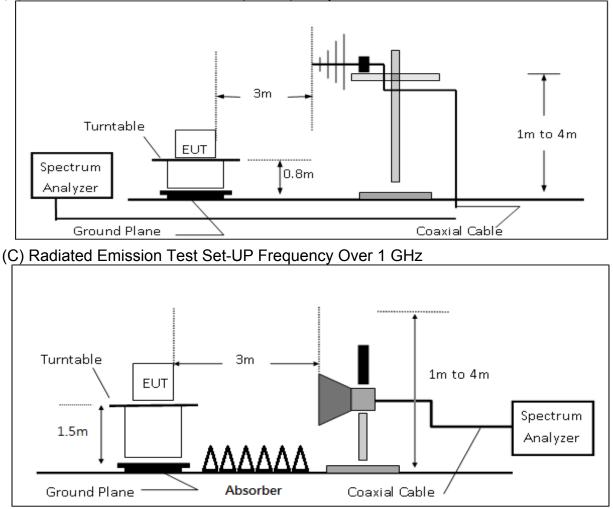

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 6.4 Measurement Procedure

## **Radiated Emission**

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 6. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 8. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10.And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11.Repeat above procedures until all default test channel measured were complete.

# 6.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

# FS = RA + AF + CL - AG

Where	Ū.	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre\_Amplifier Gain(dB)

# 6.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




#### 6.7 Measurement Result

#### 6.7.1 Radiated Band Edge Measurement Result

**Operation Band** :802.11b Fundamental Frequency :2412 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :VERTICAL

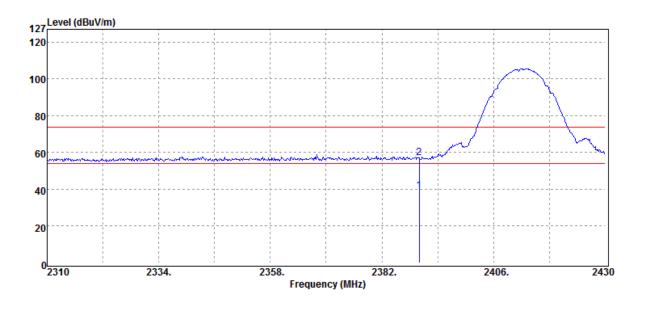

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	) Average	38.93	0.20	39.13	54.00	-14.87
2390.00	) Peak	56.90	0.20	57.10	74.00	-16.90

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 16 of 56




**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2412 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :HORIZONTAL

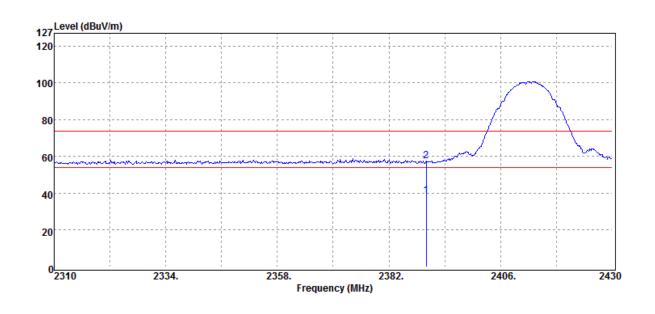

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	38.37	0.20	38.57	54.00	-15.43
2390.00	Peak	57.48	0.20	57.68	74.00	-16.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 17 of 56



**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz :Bandedge CH HIGH :H Plane

Test Date :2018-10-23 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

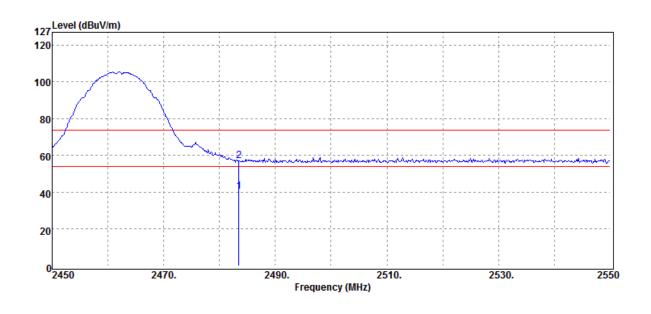

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.97	0.53	40.50	54.00	-13.50
2483.50	Peak	56.51	0.53	57.04	74.00	-16.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 18 of 56




**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11b :2462 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Wei Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :HORIZONTAL

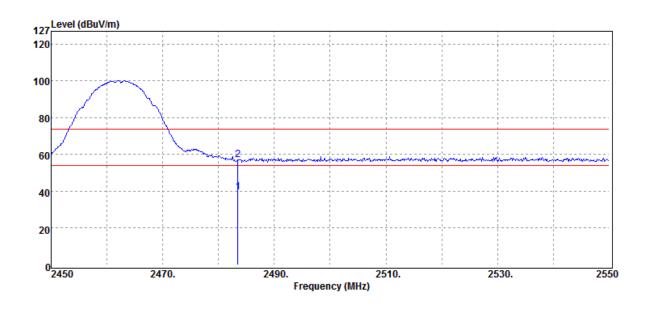

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	39.04	0.53	39.57	54.00	-14.43
2483.50	Peak	56.47	0.53	57.00	74.00	-17.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 19 of 56



**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2412 MHz :Bandedge CH LOW :H Plane

Test Date :2018-10-23 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

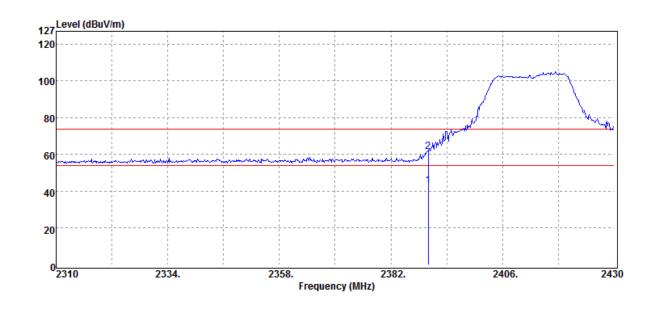

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	42.72	0.20	42.92	54.00	-11.08
2390.00	Peak	61.47	0.20	61.67	74.00	-12.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 20 of 56




**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11g :2412 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :HORIZONTAL

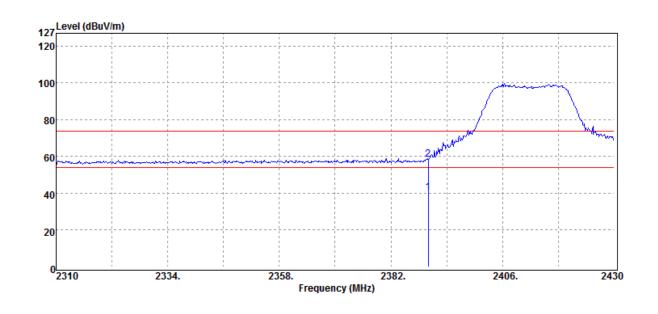

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	40.03	0.20	40.23	54.00	-13.77
2390.00	Peak	58.32	0.20	58.52	74.00	-15.48

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 21 of 56



**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:802.11g :2462 MHz :Bandedge CH HIGH :H Plane

Test Date :2018-10-23 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

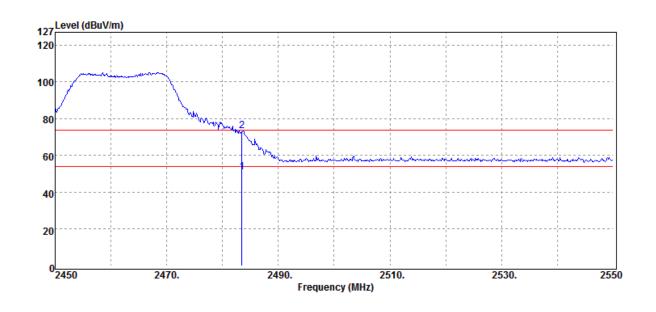

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	50.32	0.53	50.85	54.00	-3.15
2483.50	Peak	72.74	0.53	73.27	74.00	-0.73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 22 of 56




**Operation Band** :802.11g **Fundamental Frequency Operation Mode** EUT Pol.

:2462 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :HORIZONTAL

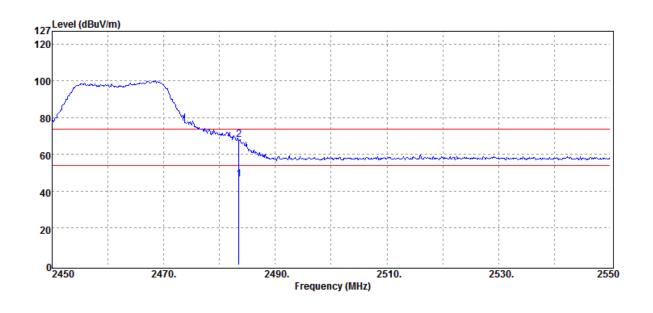

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.85	0.53	46.38	54.00	-7.62
2483.50	Peak	67.51	0.53	68.04	74.00	-5.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 23 of 56



**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2412 MHz :Bandedge CH LOW :H Plane

Test Date :2018-10-23 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

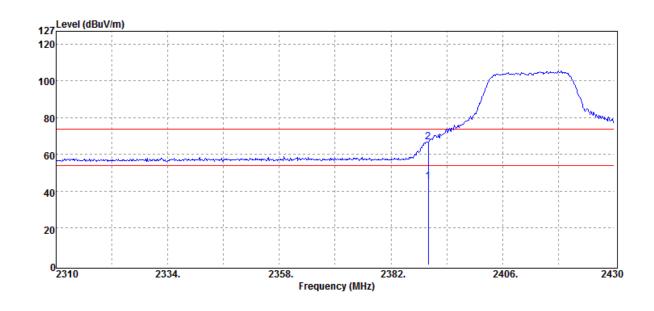

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	45.23	0.20	45.43	54.00	-8.57
2390.00	Peak	66.49	0.20	66.69	74.00	-7.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 24 of 56




**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n20 :2412 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :HORIZONTAL

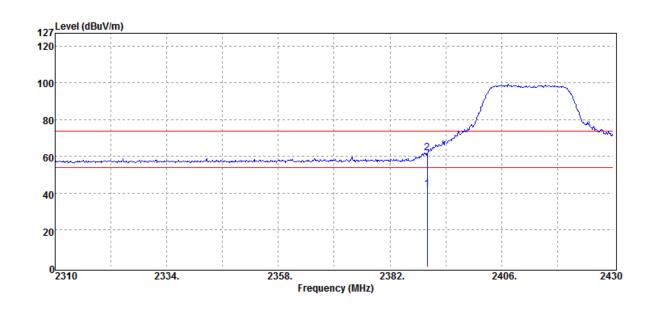

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	42.05	0.20	42.25	54.00	-11.75
2390.00	Peak	61.95	0.20	62.15	74.00	-11.85

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 25 of 56



**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:802.11n20 :2462 MHz :Bandedge CH HIGH :H Plane

Test Date :2018-10-24 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

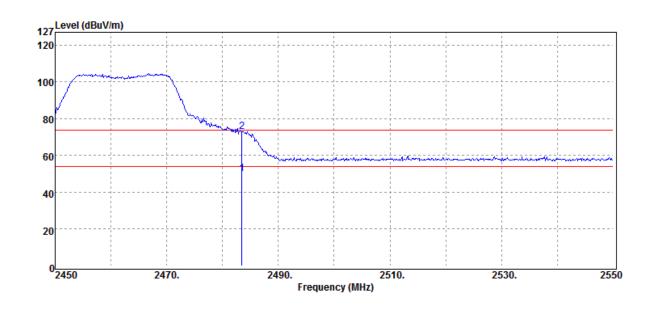

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	49.41	0.53	49.94	54.00	-4.06
2483.50	Peak	72.58	0.53	73.11	74.00	-0.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 26 of 56




**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:802.11n20 :2462 MHz :Bandedge CH HIGH :H Plane

Test Date Temp./Humi. Engineer :Wei Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :HORIZONTAL

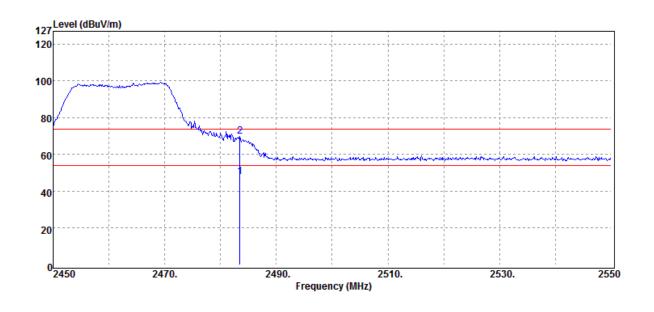

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	47.45	0.53	47.98	54.00	-6.02
2483.50	Peak	69.50	0.53	70.03	74.00	-3.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 27 of 56




**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2422 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :Wei :VERTICAL

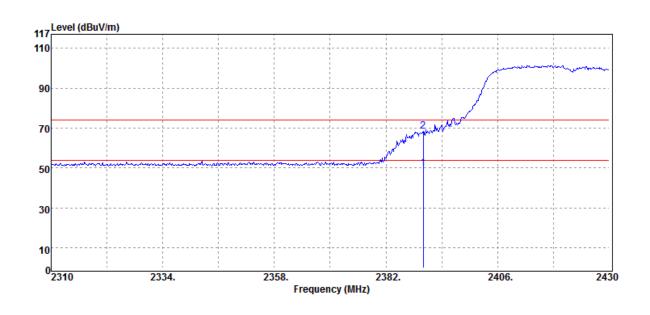

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	49.50	0.20	49.70	54.00	-4.30
2390.00	Peak	68.14	0.20	68.34	74.00	-5.66

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 28 of 56



**Operation Band** Fundamental Frequency **Operation Mode** EUT Pol.

:802.11n40 :2422 MHz :Bandedge CH LOW :H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol. :2018-10-23 :21 deg\_C / 62 RH :Wei :HORIZONTAL

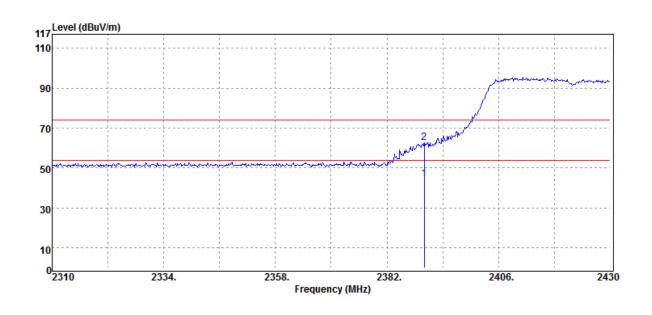

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	44.42	0.20	44.62	54.00	-9.38
2390.00	Peak	62.43	0.20	62.63	74.00	-11.37


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Report No.: ER/2018/90171 Page 29 of 56



**Operation Band** :802.11n40 **Fundamental Frequency Operation Mode** EUT Pol. :H Plane

:2452 MHz :Bandedge CH HIGH Test Date :2018-10-24 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

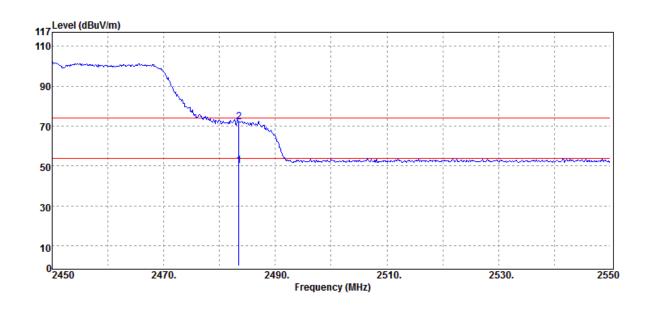

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	49.63	0.53	50.16	54.00	-3.84
2483.50	Peak	71.64	0.53	72.17	74.00	-1.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Report No.: ER/2018/90171 Page 30 of 56



**Operation Band** :802.11n40 **Fundamental Frequency Operation Mode** EUT Pol. :H Plane

:2452 MHz :Bandedge CH HIGH Test Date Temp./Humi. Engineer :Wei Measurement Antenna Pol.

:2018-10-23 :21 deg\_C / 62 RH :HORIZONTAL

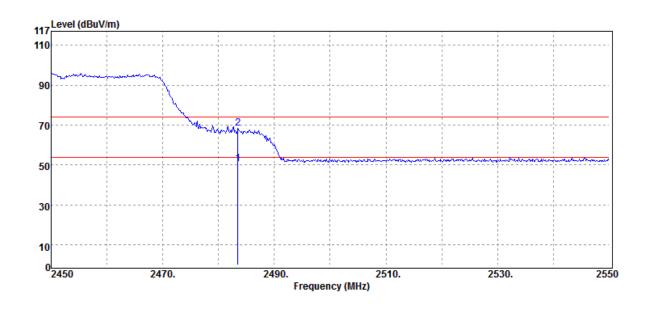

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	49.97	0.53	50.50	54.00	-3.50
2483.50	Peak	67.83	0.53	68.36	74.00	-5.64

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 6.7.2 Radiated Spurious Emission Measurement Result


#### For Frequency from 30MHz to 1000MHz

**Operation Band Fundamental Frequency Operation Mode** EUT Pol.

:802.11g :2437 MHz :Tx CH MID :H Plane

Test Date Temp./Humi. Engineer :Wei Measurement Antenna Pol.

:2018-10-26 :21 deg\_C / 62 RH :VERTICAL

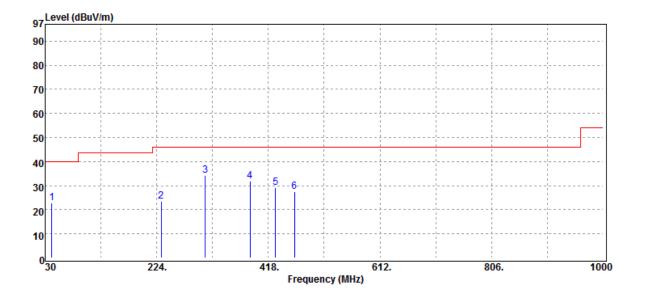

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
41.64	Peak	30.87	-8.12	22.75	40.00	-17.25
231.76	Peak	31.84	-8.42	23.42	46.00	-22.58
308.39	Peak	39.35	-5.28	34.07	46.00	-11.93
385.99	Peak	35.76	-3.77	31.99	46.00	-14.01
430.61	Peak	31.77	-2.73	29.04	46.00	-16.96
463.59	Peak	29.85	-2.16	27.69	46.00	-18.31


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Report No.: ER/2018/90171 Page 32 of 56

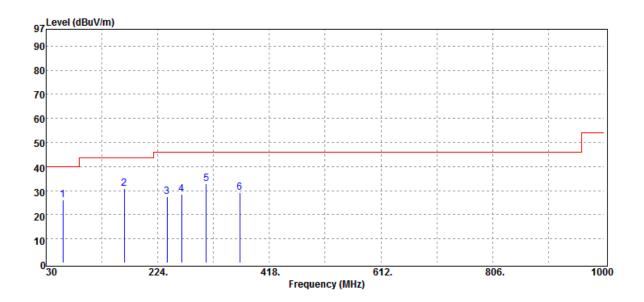

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
59.10	Peak	34.02	-7.77	26.25	40.00	-13.75
165.80	Peak	38.20	-7.32	30.88	43.50	-12.62
240.49	Peak	35.30	-7.79	27.51	46.00	-18.49
265.71	Peak	35.29	-6.80	28.49	46.00	-17.51
308.39	Peak	38.17	-5.28	32.89	46.00	-13.11
366.59	Peak	33.31	-4.02	29.29	46.00	-16.71


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### 6.7.3 Radiated Spurious Emission Measurement Result

#### For Frequency above 1GHz

Operation Band	:802.11b	Test Date	:2018-10-26
Fundamental Frequency	:2412 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

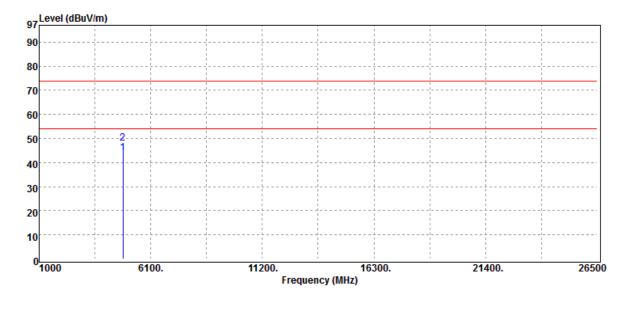

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	38.45	5.61	44.06	54.00	-9.94
4824.00	Peak	42.47	5.61	48.08	74.00	-25.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2018/90171 Page 34 of 56

Operation Band	:802.11b
Fundamental Frequency	:2412 MHz
Operation Mode	:Tx CH LOW
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-26 :21 deg\_C / 62 RH :Wei :HORIZONTAL

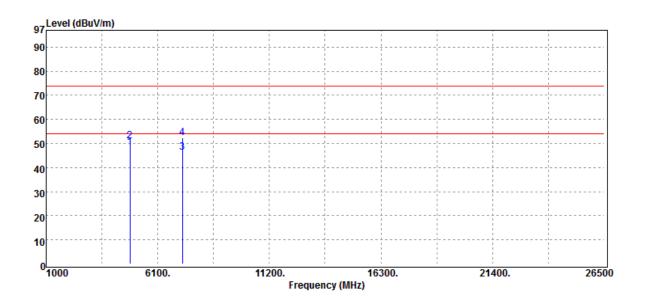


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4824.00	Average	42.67	5.61	48.28	54.00	-5.72
	4824.00	Peak	45.33	5.61	50.94	74.00	-23.06
	7236.00	Average	33.64	12.61	46.25	54.00	-7.75
	7236.00	Peak	39.78	12.61	52.39	74.00	-21.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 35 of 56

Operation Band	:802.11b	Test Date	:2018-10-26
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

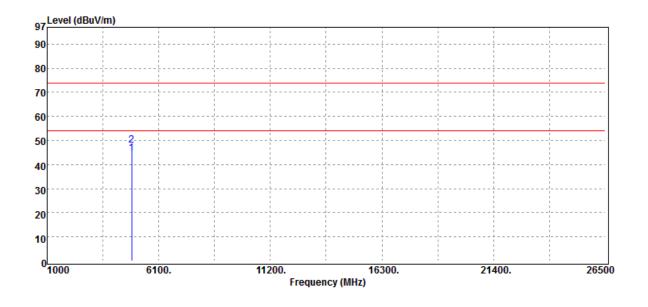


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	38.87	5.85	44.72	54.00	-9.28
4874.00	Peak	42.14	5.85	47.99	74.00	-26.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 36 of 56

Operation Band	:802.11b	Test Date	:2018-10-26
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

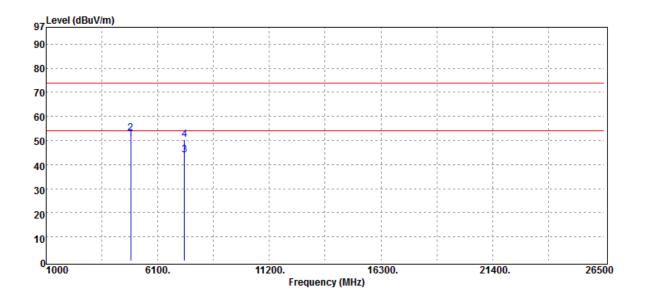

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.0	0 Average	44.74	5.85	50.59	54.00	-3.41
4874.0	0 Peak	47.08	5.85	52.93	74.00	-21.07
7311.0	0 Average	31.20	12.84	44.04	54.00	-9.96
7311.0	0 Peak	37.62	12.84	50.46	74.00	-23.54


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 37 of 56

:802.11b
:2462 MHz
:Tx CH HIGH
:H Plane

Test Date :2018-10-26 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

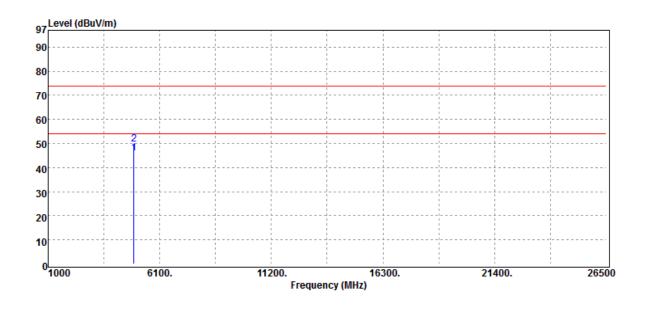

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	40.03	5.82	45.85	54.00	-8.15
4924.00	Peak	43.89	5.82	49.71	74.00	-24.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2018/90171 Page 38 of 56

Operation Band	:802.11b
Fundamental Frequency	:2462 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-26 :21 deg\_C / 62 RH :Wei :HORIZONTAL

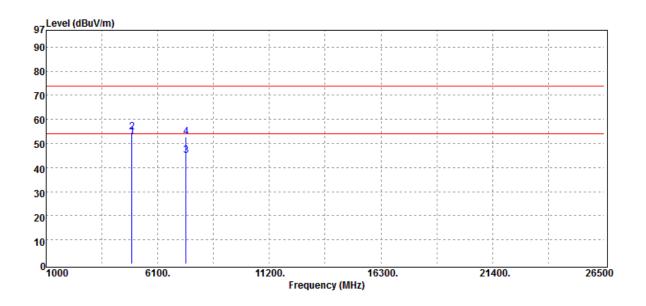


	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	4924.00	Average	46.86	5.82	52.68	54.00	-1.32
	4924.00	Peak	48.95	5.82	54.77	74.00	-19.23
	7386.00	Average	31.82	13.07	44.89	54.00	-9.11
	7386.00	Peak	39.64	13.07	52.71	74.00	-21.29

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 39 of 56

Operation Band Fundamental Frequency Operation Mode	:802.11g :2412 MHz :Tx CH LOW :H Plana	Test Date Temp./Humi. Engineer	:2018-10-26 :21 deg_C / 62 RH :Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

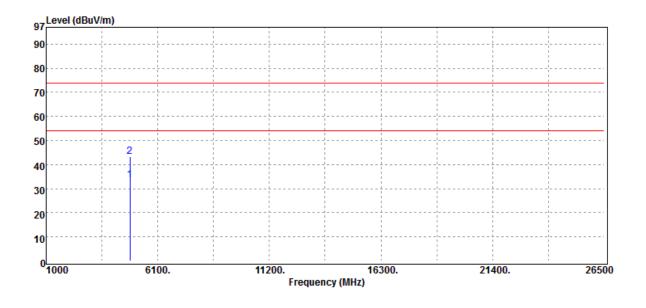

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.97	5.61	33.58	54.00	-20.42
4824.00	Peak	37.71	5.61	43.32	74.00	-30.68

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2018/90171 Page 40 of 56

Operation Band	:802.11g	•
Fundamental Frequency	:2412 MHz	•
Operation Mode	:Tx CH LOW	
EUT Pol.	:H Plane	I

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-26 :21 deg\_C / 62 RH :Wei :HORIZONTAL

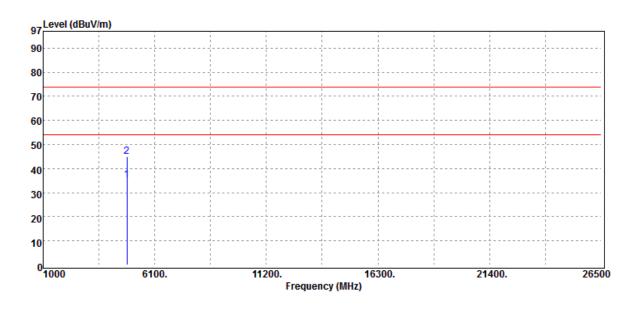


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	29.56	5.61	35.17	54.00	-18.83
4824.00	Peak	39.22	5.61	44.83	74.00	-29.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 41 of 56

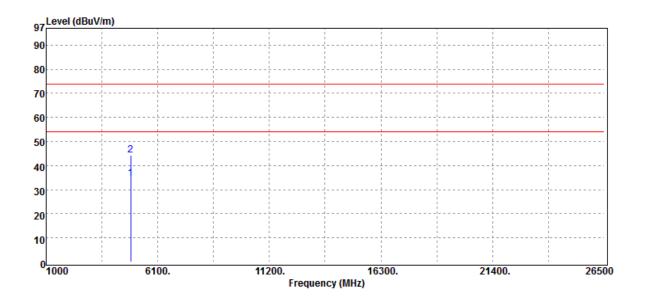


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	28.82	5.85	34.67	54.00	-19.33
4874.00	Peak	38.53	5.85	44.38	74.00	-29.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 42 of 56

Operation Band	:802.11g	Test Date	:2018-10-26
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL
		Measurement Antenna Pol.	

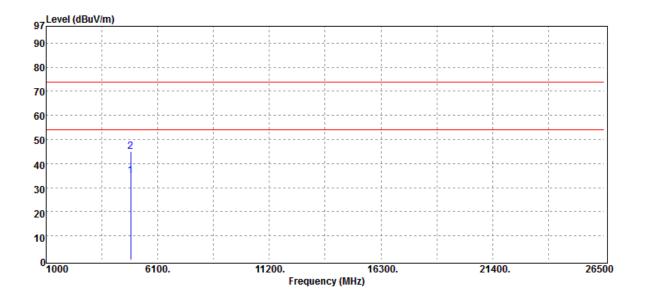

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	29.22	5.85	35.07	54.00	-18.93
4874.00	Peak	39.25	5.85	45.10	74.00	-28.90


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 43 of 56

Operation Band	:802.11g
Fundamental Frequency	:2462 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date :2018-10-26 Temp./Humi. :21 deg\_C / 62 RH Engineer :Wei :VERTICAL Measurement Antenna Pol.

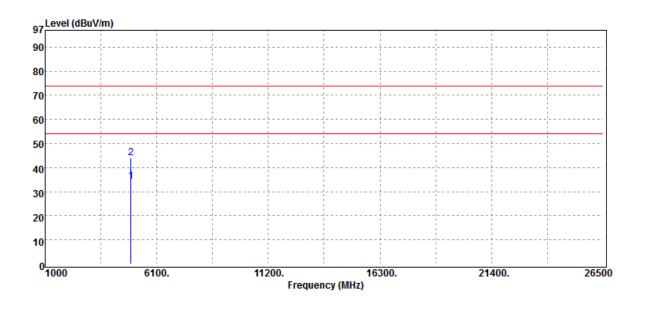

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	28.35	5.82	34.17	54.00	-19.83
4924.00	Peak	38.19	5.82	44.01	74.00	-29.99

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2018/90171 Page 44 of 56

Operation Band	:802.11g
Fundamental Frequency	:2462 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-26 :21 deg\_C / 62 RH :Wei :HORIZONTAL

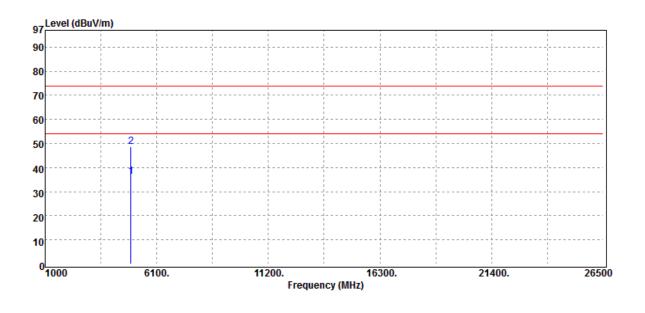


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	30.51	5.82	36.33	54.00	-17.67
4924.00	Peak	43.00	5.82	48.82	74.00	-25.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 45 of 56

Operation Band	:802.11n20	Test Date	:2018-10-26
Fundamental Frequency	:2412 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

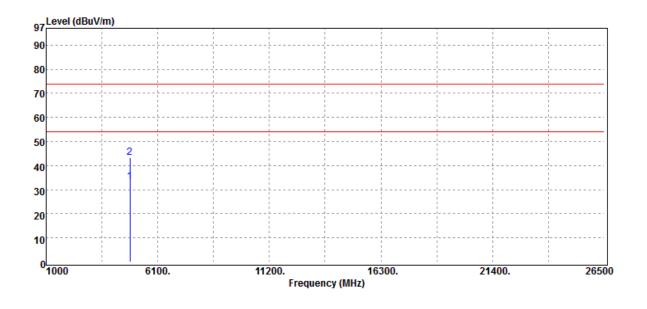


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	27.63	5.61	33.24	54.00	-20.76
4824.00	Peak	37.55	5.61	43.16	74.00	-30.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 46 of 56

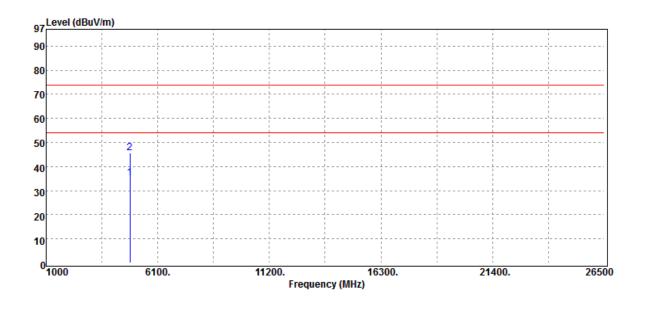


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4824.00	Average	29.55	5.61	35.16	54.00	-18.84
4824.00	Peak	39.89	5.61	45.50	74.00	-28.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 47 of 56

Operation Band	:802.11n20	Test Date	:2018-10-29
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

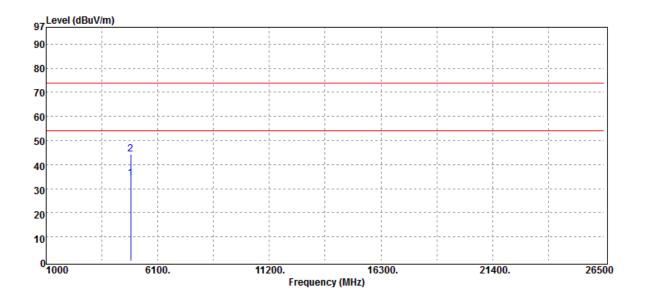


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	28.46	5.85	34.31	54.00	-19.69
4874.00	Peak	38.55	5.85	44.40	74.00	-29.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band	:802.11n20	Test Date	:2018-10-29
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

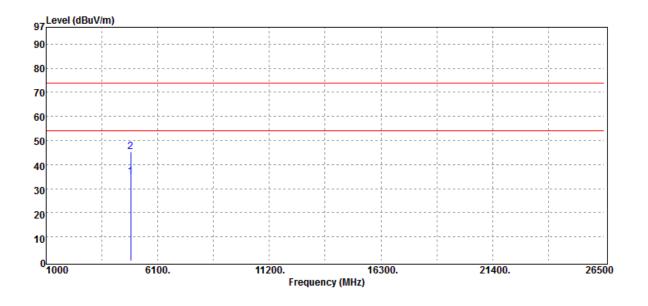


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	29.21	5.85	35.06	54.00	-18.94
4874.00	Peak	39.50	5.85	45.35	74.00	-28.65

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 49 of 56

Operation Band:802.11n20Test Date:2018-10-29Fundamental Frequency:2462 MHzTemp./Humi.:21 deg_C / 1Operation Mode:Tx CH HIGHEngineer:WeiEUT Pol.:H PlaneMeasurement Antenna Pol.:VERTICAL	/ 62 RH
--	---------

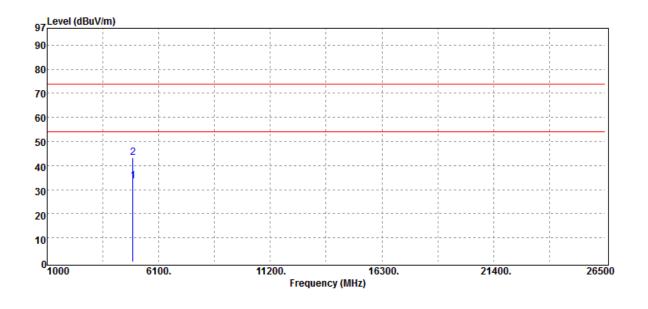

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	27.63	5.82	33.45	54.00	-20.55
4924.00	Peak	37.57	5.82	43.39	74.00	-30.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: ER/2018/90171 Page 50 of 56

Operation Band	:802.11n20
Fundamental Frequency	:2462 MHz
Operation Mode	:Tx CH HIGH
EUT Pol.	:H Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-10-29 :21 deg\_C / 62 RH :Wei :HORIZONTAL

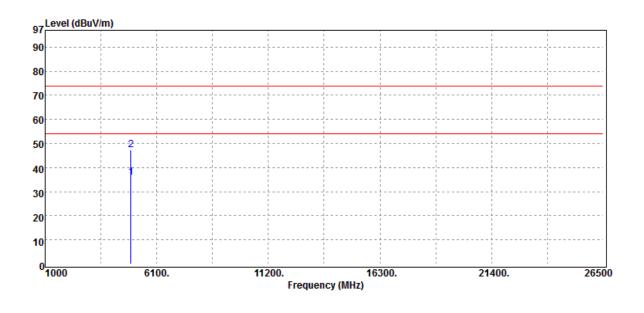


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4924.00	Average	30.24	5.82	36.06	54.00	-17.94
4924.00	Peak	41.39	5.82	47.21	74.00	-26.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 51 of 56

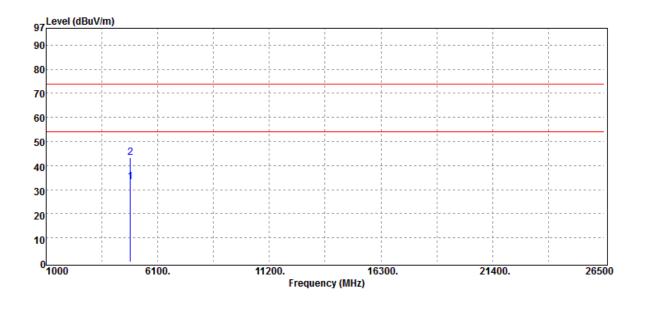


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.50	5.60	33.10	54.00	-20.90
4844.00	Peak	37.57	5.60	43.17	74.00	-30.83

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 52 of 56

Operation Band	:802.11n40	Test Date	:2018-10-29
Fundamental Frequency	:2422 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

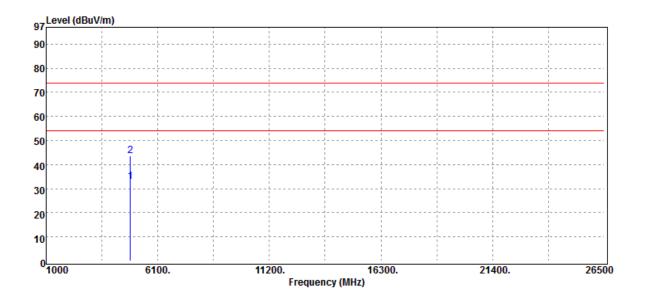


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4844.00	Average	27.25	5.60	32.85	54.00	-21.15
4844.00	Peak	37.93	5.60	43.53	74.00	-30.47

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 53 of 56

Operation Band	:802.11n40	Test Date	:2018-10-29
Fundamental Frequency	:2437 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH MID	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

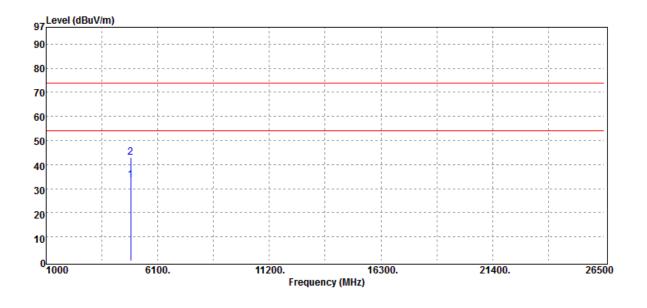


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.62	5.85	33.47	54.00	-20.53
4874.00	Peak	37.15	5.85	43.00	74.00	-31.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 54 of 56

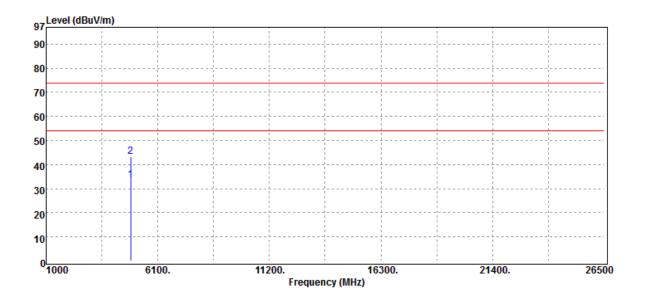


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4874.00	Average	27.79	5.85	33.64	54.00	-20.36
4874.00	Peak	37.48	5.85	43.33	74.00	-30.67

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 55 of 56

Operation Band	:802.11n40	Test Date	:2018-10-29
Fundamental Frequency	:2452 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH HIGH	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

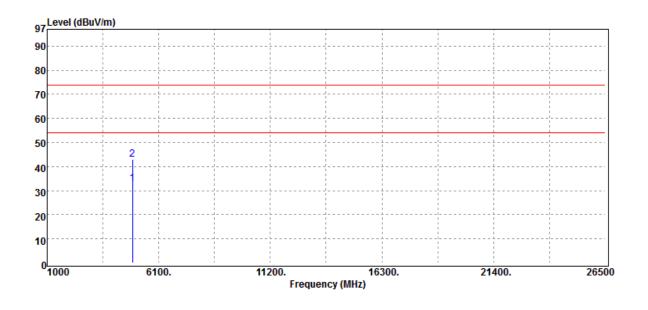


Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4904.00	Average	27.05	5.85	32.90	54.00	-21.10
4904.00	Peak	36.98	5.85	42.83	74.00	-31.17

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: ER/2018/90171 Page 56 of 56

Operation Band	:802.11n40	Test Date	:2018-10-29
Fundamental Frequency	:2452 MHz	Temp./Humi.	:21 deg_C / 62 RH
Operation Mode	:Tx CH HIGH	Engineer	:Wei
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

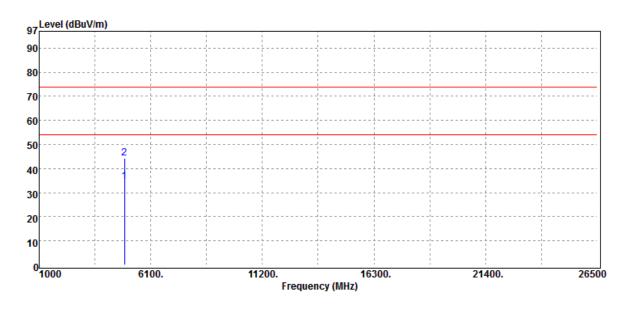

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4904.00	Average	28.86	5.85	34.71	54.00	-19.29
4904.00	Peak	38.40	5.85	44.25	74.00	-29.75

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.