


INTERTEK TESTING SERVICES

Report No.: HK10050762-1

Sample No.: 1/2

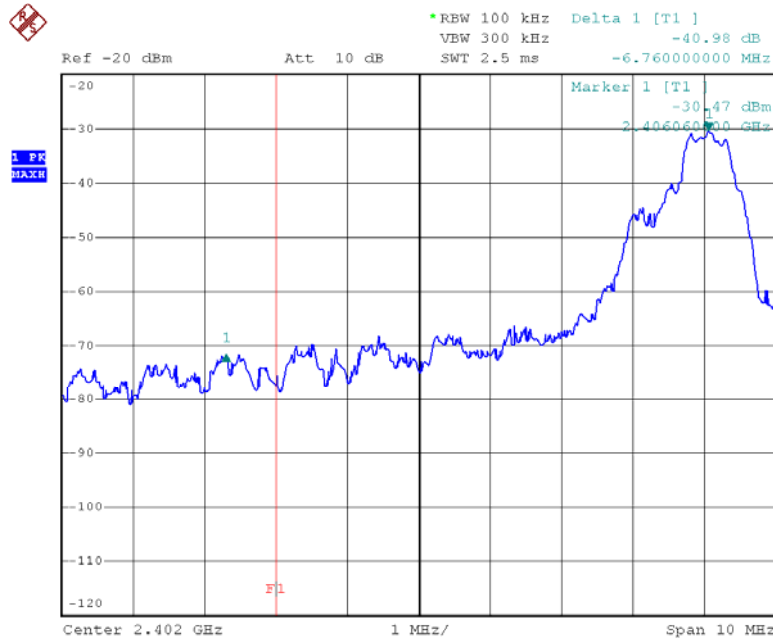


OATS = 93.7 dBuV/m

Field strength (Peak)
= 93.7 – 40.98 dBuV/m
= 52.72 dBuV/m
(Limit: 74 dBuV/m)

Field strength
(Average)
= 52.72 – AF dBuV/m
= 52.72 – 17.8 dBuV/m
= 34.92 dBuV/m
(Limit: 54 dBuV/m)

Date: 19.MAY.2010 10:42:26

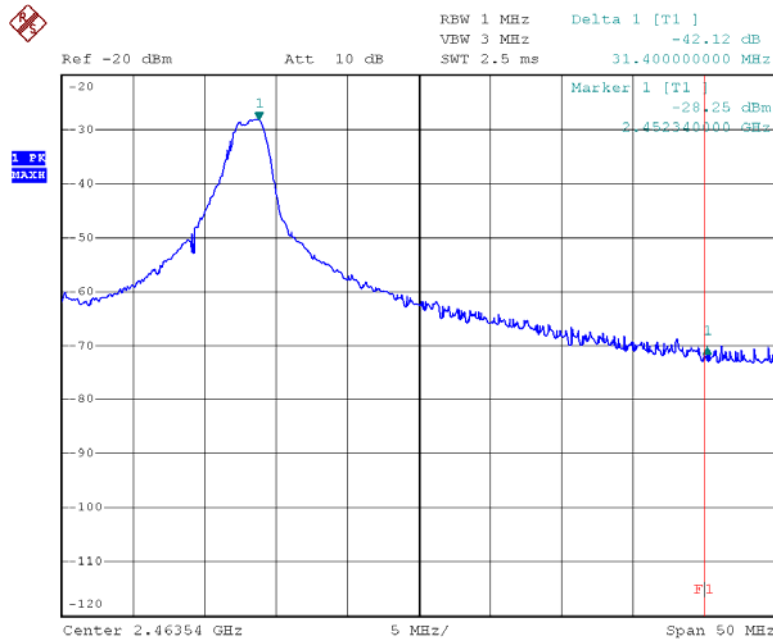

OATS = 93.5dBuV/m

Field strength (Peak)
= 93.5 – 42.12 dBuV/m
= 51.38 dBuV/m
(Limit: 74 dBuV/m)

Field strength
(Average)
= 51.38 - AF dBuV/m
= 51.38 – 17.8 dBuV/m
= 33.58 dBuV/m
(Limit: 54 dBuV/m)

Date: 19.MAY.2010 15:37:13

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass)