

INTERTEK TESTING SERVICES

Report No.: HK10051189-1
Sample No.: 1/2




OATS = 93.4dBuV/m

Field strength (Peak)
 = 93.4 – 40.42 dBuV/m
 = 52.98 dBuV/m
 (Limit: 74 dBuV/m)

Field strength
 (Average)
 = 52.98- AF dBuV/m
 = 52.98 – 17.8 dBuV/m
 = 35.18 dBuV/m
 (Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:26:12

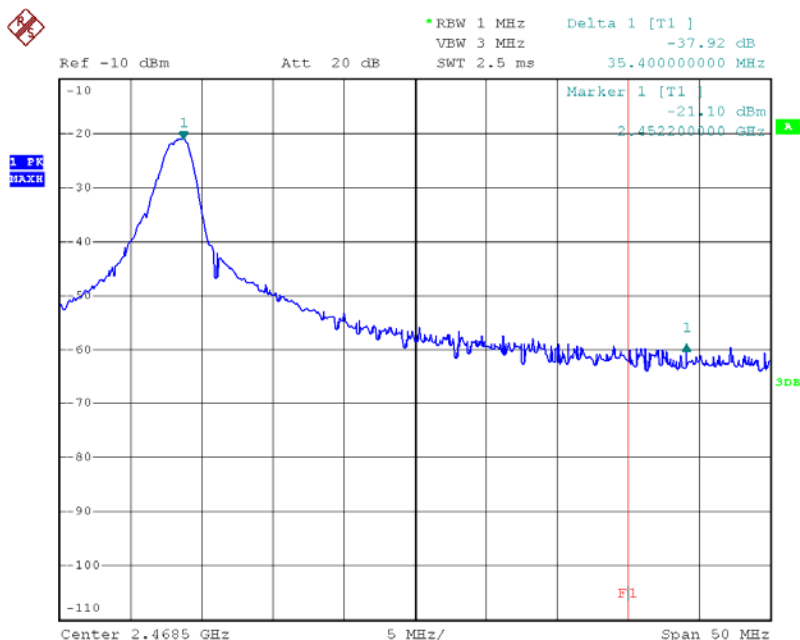

OATS = 93.3dBuV/m

Field strength (Peak)
 = 93.3 – 37.92 dBuV/m
 = 55.38 dBuV/m
 (Limit: 74 dBuV/m)

Field strength
 (Average)
 = 55.38- AF dBuV/m
 = 55.38 – 17.8 dBuV/m
 = 37.58 dBuV/m
 (Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:31:17

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass/Fail)