


INTERTEK TESTING SERVICES

Report No.: HK10051190-1
Sample No.: 1/2

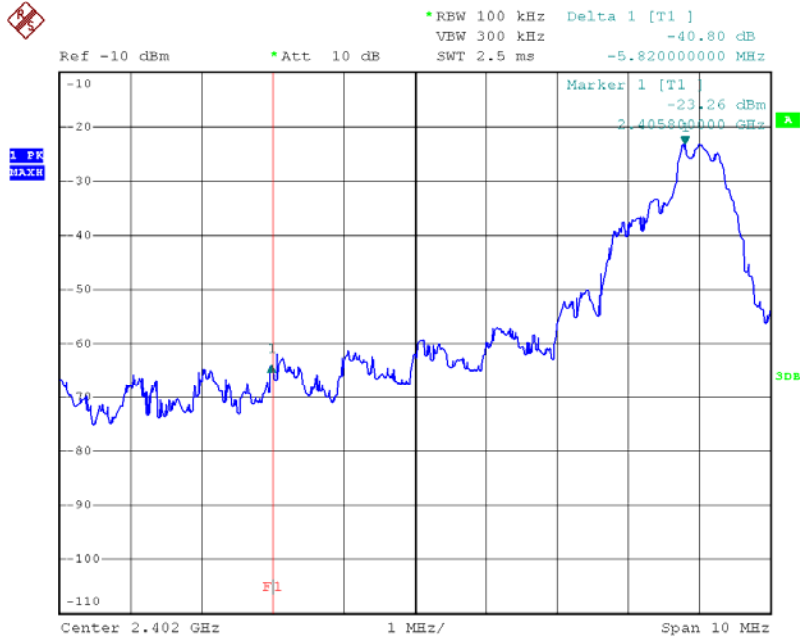


OATS = 92.7dBuV/m

Field strength (Peak)
= 92.7 – 40.8 dBuV/m
= 51.9 dBuV/m
(Limit: 74 dBuV/m)

Field strength
(Average)
= 51.9- AF dBuV/m
= 51.9 – 17.8 dBuV/m
= 34.1 dBuV/m
(Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:52:03

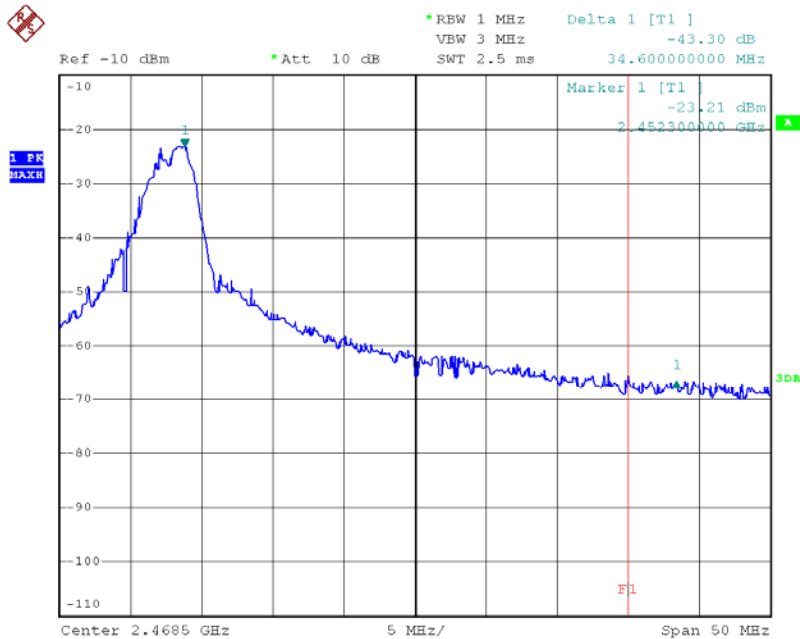

OATS = 92.9dBuV/m

Field strength (Peak)
= 92.9 – 43.3dBuV/m
= 49.6 dBuV/m
(Limit: 74 dBuV/m)

Field strength
(Average)
= 49.6– AF dBuV/m
= 49.6 – 17.8 dBuV/m
= 31.8 dBuV/m
(Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:34:30

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass/Fail)