


# INTERTEK TESTING SERVICES

Report No.: HK10051191-1  
Sample No.: 1/2

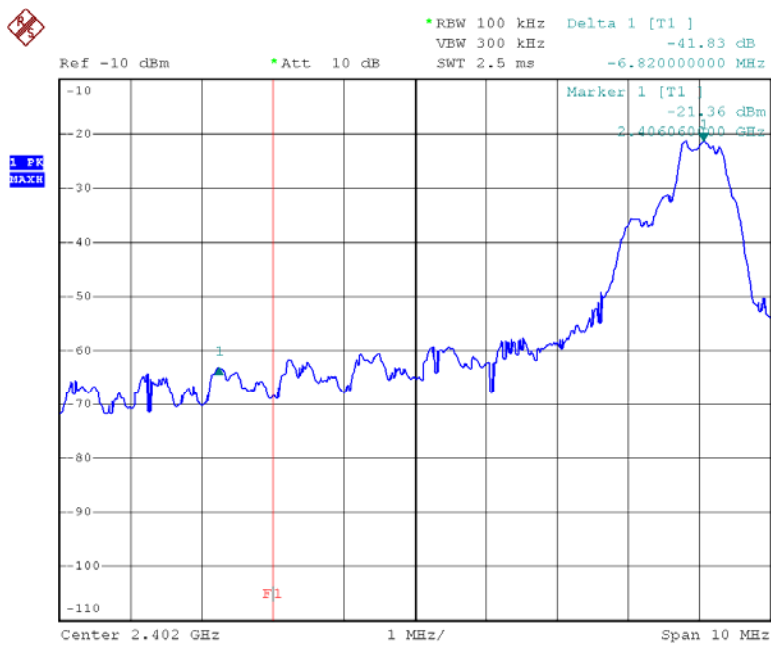


OATS = 92.6V/m

Field strength (Peak)  
 = 92.6 – 41.83 dBuV/m  
 = 50.77 dBuV/m  
 (Limit: 74 dBuV/m)

Field strength  
 (Average)  
 = 50.77 – AF dBuV/m  
 = 50.77 – 17.8 dBuV/m  
 = 32.97 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:44:52

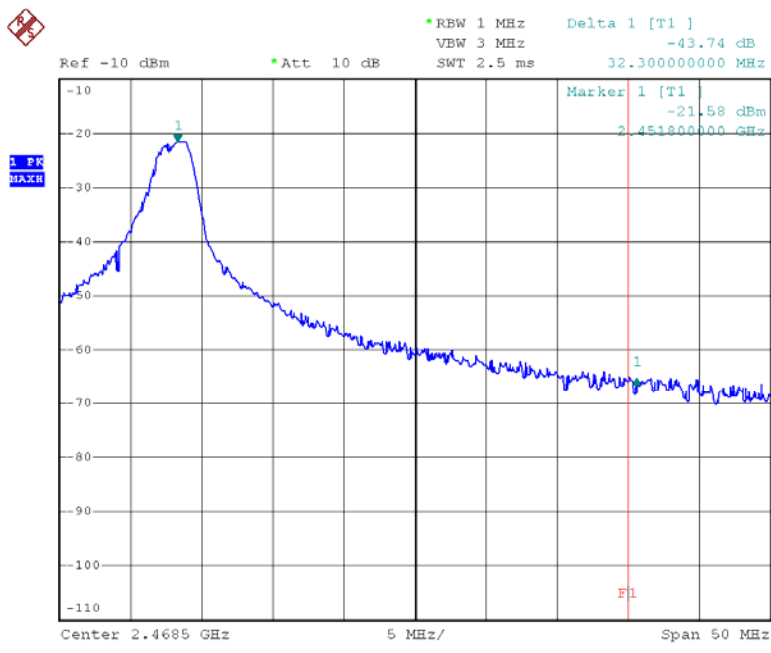

OATS = 93.3dBuV/m

Field strength (Peak)  
 = 93.3 – 43.74 dBuV/m  
 = 49.56 dBuV/m  
 (Limit: 74 dBuV/m)

Field strength  
 (Average)  
 = 49.56 – AF dBuV/m  
 = 49.56 – 17.8 dBuV/m  
 = 31.76 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 27.MAY.2010 10:40:19

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement (Pass/Fail)