

FCC Test Report

FCC ID : SQG-LWB5PLUS
Equipment : Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0
Model No. : Sterling LWB5+
Brand Name : Laird Connectivity
Applicant : Laird Connectivity
Address : W66N220 Commerce Court, Cedarburg, Wisconsin 53012, USA
Standard : 47 CFR FCC Part 15.247
Received Date : Jun. 11, 2020
Tested Date : Jul. 31 ~ Aug. 18, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	9
1.4	Test Equipment List and Calibration Data.....	13
1.5	Test Standards	14
1.6	Reference Guidance	14
1.7	Deviation from Test Standard and Measurement Procedure.....	14
1.8	Measurement Uncertainty	14
2	TEST CONFIGURATION	15
2.1	Testing Facility.....	15
2.2	The Worst Test Modes and Channel Details	15
3	TRANSMITTER TEST RESULTS.....	16
3.1	Conducted Emissions.....	16
3.2	6dB and Occupied Bandwidth	25
3.3	RF Output Power	28
3.4	Power Spectral Density	31
3.5	Emissions in Restricted Frequency Bands.....	34
3.6	Emissions in non-restricted Frequency Bands	62
4	TEST LABORATORY INFORMATION	66

Release Record

Report No.	Version	Description	Issued Date
FR061103AE	Rev. 01	Initial issue	Nov. 10, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 4.442MHz 49.51 (Margin -6.49dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 66.56MHz 36.35 (Margin -3.65dB) - PK	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 9.04	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

The device has 5 configurations as below:

Brand name	Model Name	Product Name	Part Number	Description
Laird Connectivity	Sterling LWB5+	Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0	453-00045	Chip Antenna
Laird Connectivity	Sterling LWB5+	Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0	453-00046	MHF4 Connector
Laird Connectivity	Sterling LWB5+	Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0	453-00047	RF Trace Pin
Laird Connectivity	Sterling LWB5+	Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0	453-00048	M.2 PCI-E Card w/SDIO and UART Interface
Laird Connectivity	Sterling LWB5+	Sterling-LWB5+ 802.11a/b/g/n/ac Module with Bluetooth 5.0	453-00049	M.2 PCI-E Card w/USB and USB Interface

† Part Number: 453-00046 was selected as a representative one for the final test

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.1 LE	2402-2480	0-39 [40]	1 Mbps

Note: Bluetooth LE (Low energy) uses GFSK modulation.

1.1.2 Antenna Details

Ant. No.	Manufacturer	Model	Laird Part Number	Type	Connector	Antenna Gain (dBi)
1	Laird	2.4/5.5 GHz Dipole Antenna	001-0009	Dipole	RP-SMA	2.0
2	Laird	FlexPIFA	001-0021	PIFA	IPEX MHF4L	2.5
3	Laird	Mini NanoBlade Flex	EMF2449A1-10MH4L	PCB Dipole	IPEX MHF4L	2.79
4	Laird	Nanoblade	ENB2449A1-10MH4L	PCB Dipole	IPEX MHF4L	2.0
5	ACX	AD1608-A2455AAT/LF	NA	Chip Antenna	N/A	1.0

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3 Vdc
--------------------------	---------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test Tool	Bluetool, Version: 1.9.8.6	
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)
BT-LE(1Mbps)	63.89%	1.95

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT-LE(1Mbps)	8	8	8

1.2 Local Support Equipment List

Support Equipment List (Part Number: 453-00046_ SDIO)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Carrier Board	Laird	DVK-LWB5+	---	Provided by applicant.
2	Fixture	Laird	SU60-SOMC	---	Provided by applicant.
3	DC Cable	ICC	DCC-10m-R	---	---
4	DC Cable	ICC	DCC-10m-B	---	---
5	Notebook	DELL	Latitude E6430	---	---
6	DC Power Supply	GWINSTEK	GPC-60300	---	---
7	50Ω terminator	---	---	---	---


Support Equipment List (Part Number: 453-00046_ USB)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Carrier Board	Laird	DVK-LWB5+	---	Provided by applicant.
2	DC Power Supply	GWINSTEK	GPC-60300	---	Provided by applicant.
3	USB Cable	I-Gota	micro to A	---	---
4	Notebook	DELL	Latitude E6430	---	---
5	50Ω terminator	---	---	---	---

Support Equipment List (Part Number: 453-00048_ SDIO)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Carrier Board	Laird	LWB5+,M.2	---	Provided by applicant.
2	Fixture	Laird	SU60-SOMC	---	Provided by applicant.
3	DC Cable	ICC	DCC-10m-R	---	---
4	DC Cable	ICC	DCC-10m-B	---	---
5	Notebook	DELL	Latitude E6430	---	---
6	DC Power Supply	GWINSTEK	GPC-60300	---	---
7	50Ω terminator	---	---	---	---


Support Equipment List (Part Number: 453-00049_ USB)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Carrier Board	Laird	LWB5+,M.2	---	Provided by applicant.
2	DC Power Supply	GWINSTEK	GPC-60300	---	Provided by applicant.
3	USB Cable	I-Gota	micro to A	---	---
4	Notebook	DELL	Latitude E6430	---	---
5	50Ω terminator	---	---	---	---

1.3 Test Setup Chart


For radiated emission

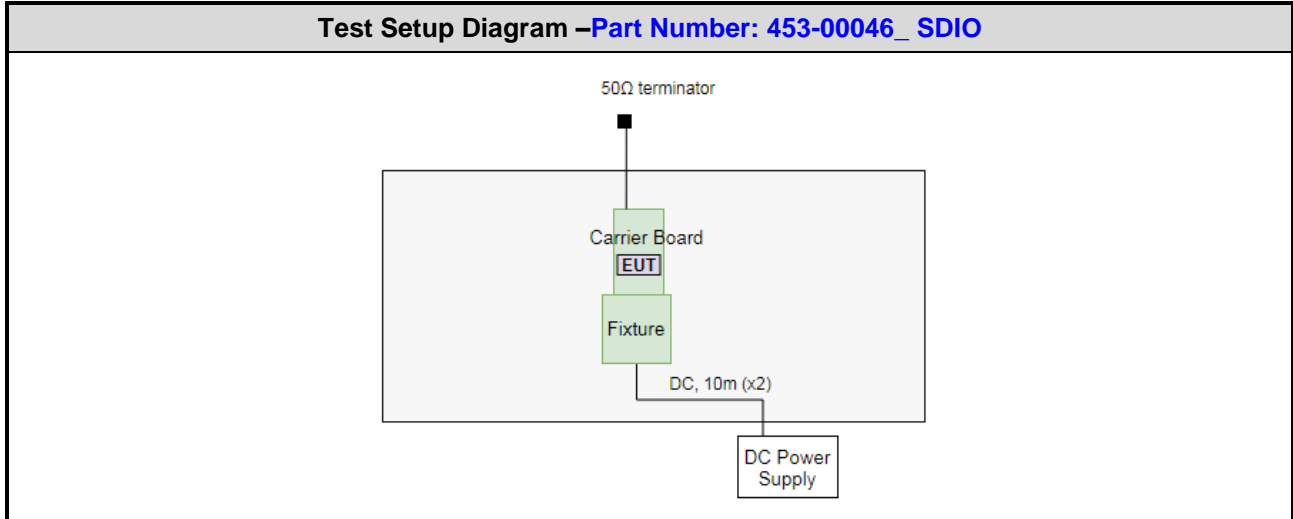

Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

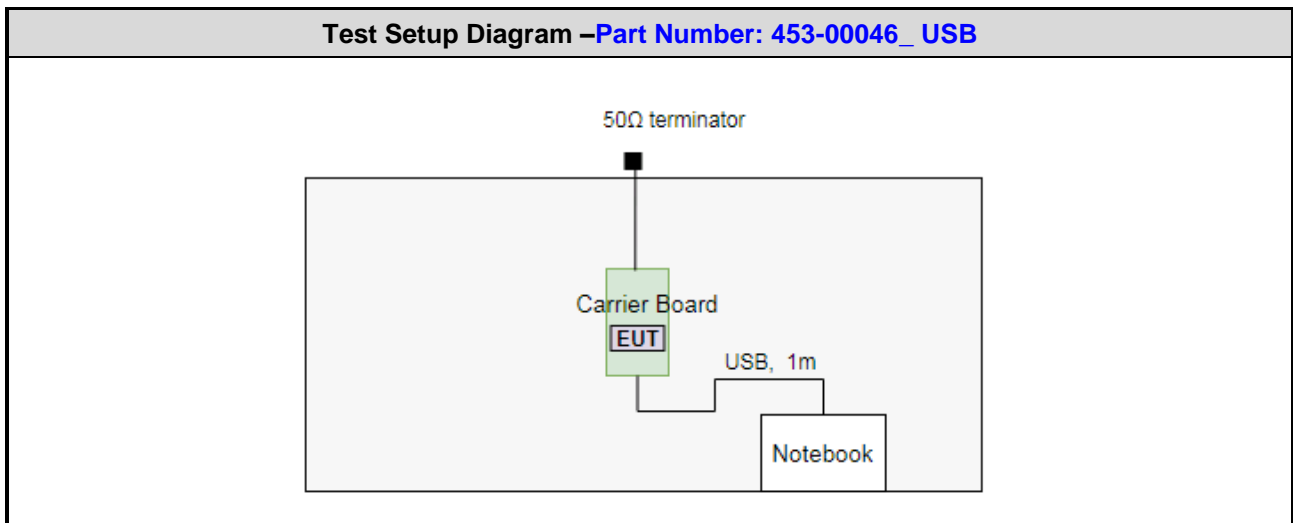


Test Setup Diagram –Part Number: 453-00048_ SDIO

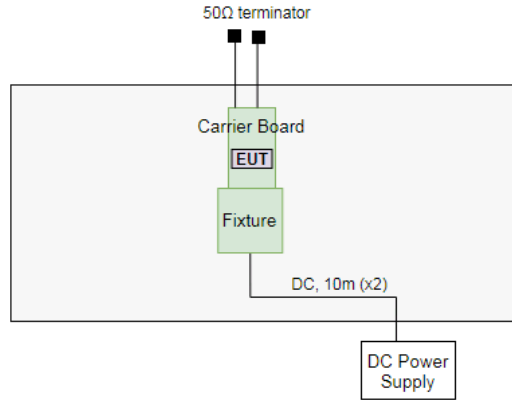


Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Test Setup Diagram –Part Number: 453-00049_ USB

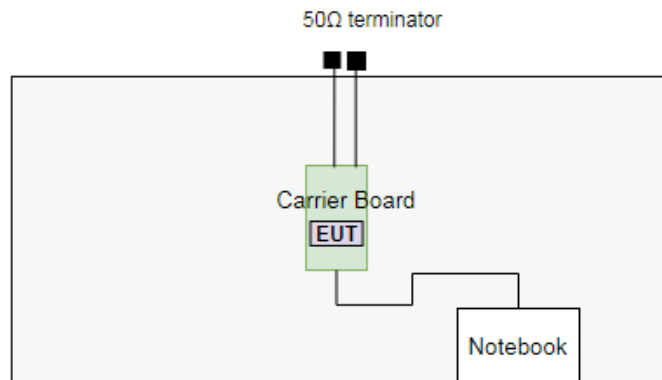


For conducted emission

Test Setup Diagram –Part Number: 453-00046_ SDIO

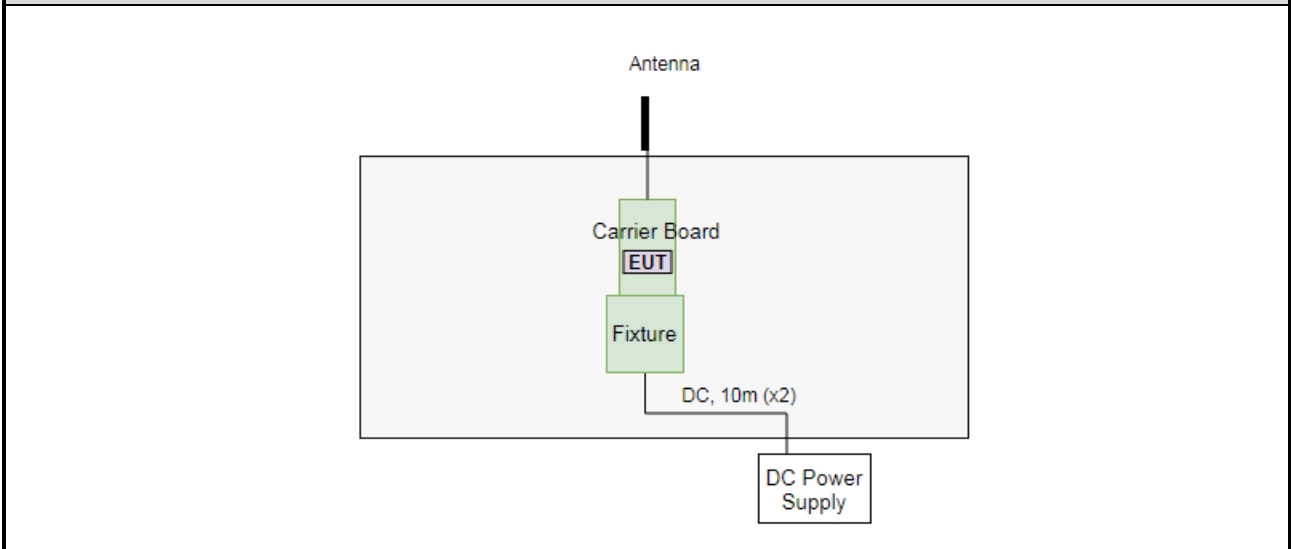


Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Test Setup Diagram –Part Number: 453-00046_ USB

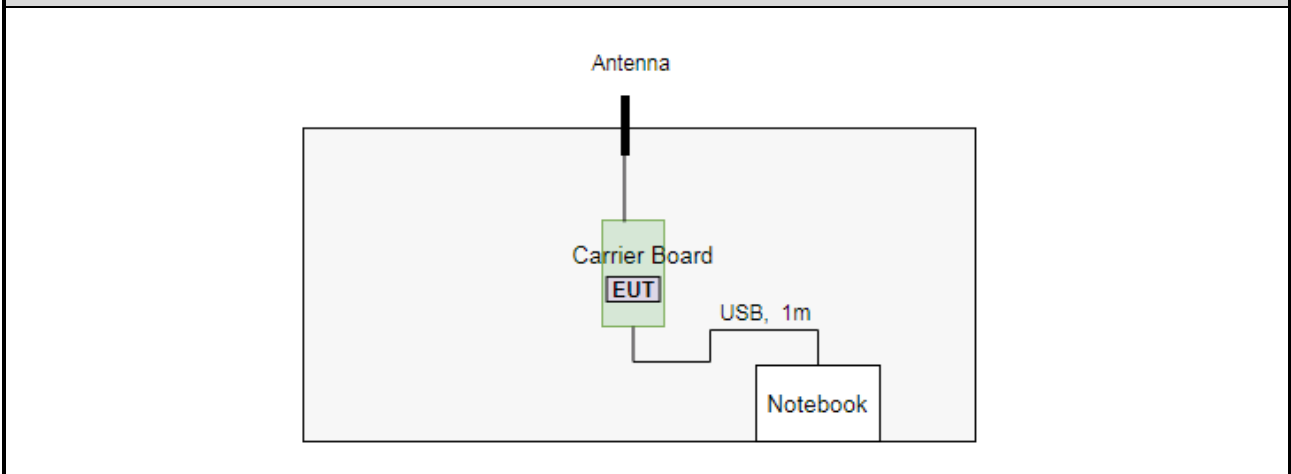


Test Setup Diagram –Part Number: 453-00048_ SDIO

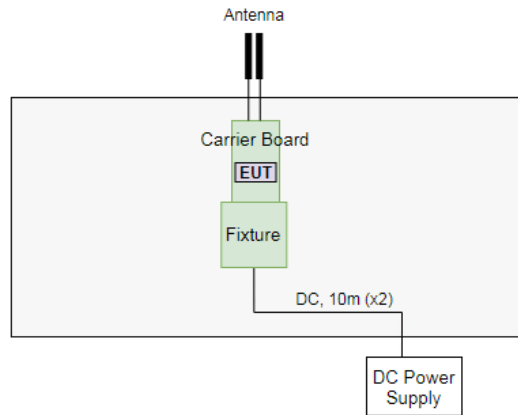

Note: The notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Test Setup Diagram –Part Number: 453-00049_ USB

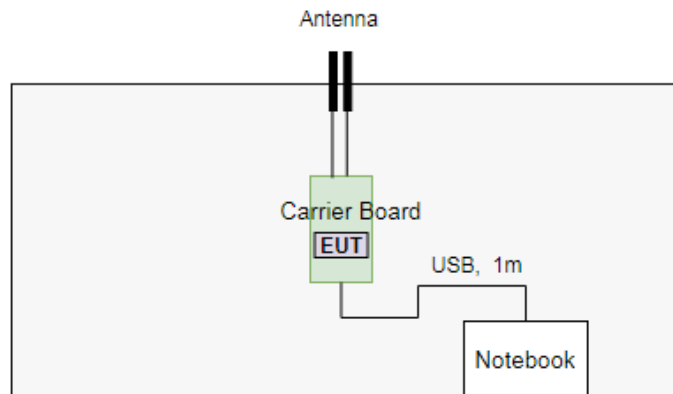

1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Test Date	Aug. 18, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Test Date	Jul. 31 ~ Aug. 11, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 10, 2020	Jul. 09, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 03, 2020	Jul. 02, 2021
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF Cable	EMC	EMC104-SM-SM-8000	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	EMC	CFD400-E	CFD400-001	Oct. 18, 2019	Oct. 17, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Test Date	Jul. 31 ~ Aug. 18, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.130 Hz
Conducted power	± 0.808 dB
Power density	± 0.583 dB
Conducted emission	± 2.715 dB
AC conducted emission	± 2.92 dB
Radiated emission ≤ 1 GHz	± 3.41 dB
Radiated emission > 1 GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2402	1Mbps	1, 2, 3, 4
Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	1, 2, 3, 4
Maximum Output Power	BT LE	2402, 2440, 2480	1Mbps	1, 3
6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	1Mbps	1
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1
		2402		3

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. Test configurations are as below
 Configuration 1: Part Number: 453-00046(SDIO) with PCB Dipole Antenna
 Configuration 2: Part Number: 453-00046(USB) with PCB Dipole Antenna
 Configuration 3: Part Number: 453-00048 with PCB Dipole Antenna
 Configuration 4: Part Number: 453-00049 with PCB Dipole Antenna
3. 50Ω terminator was connected to antenna port of EUT for radiated emission measurement.
4. Test antenna port of configuration 3 is worst antenna port found after pretest.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

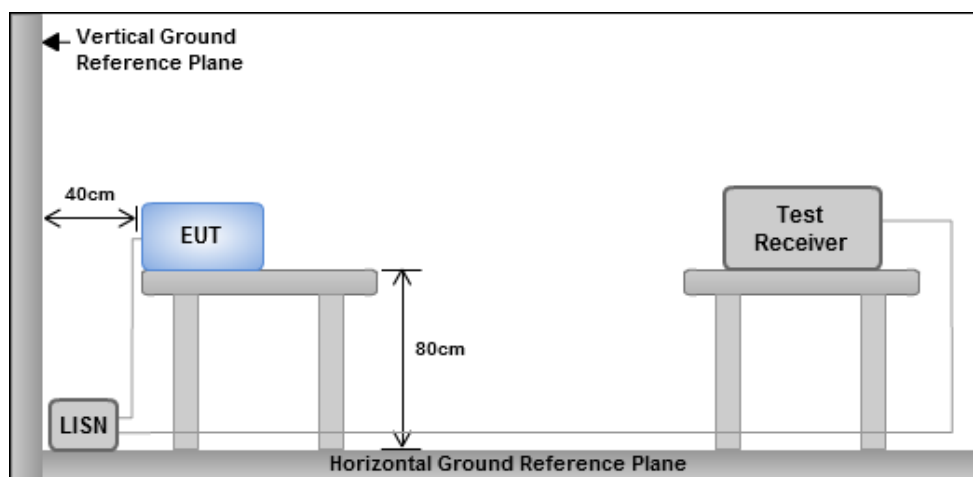


Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions

Configuration 1

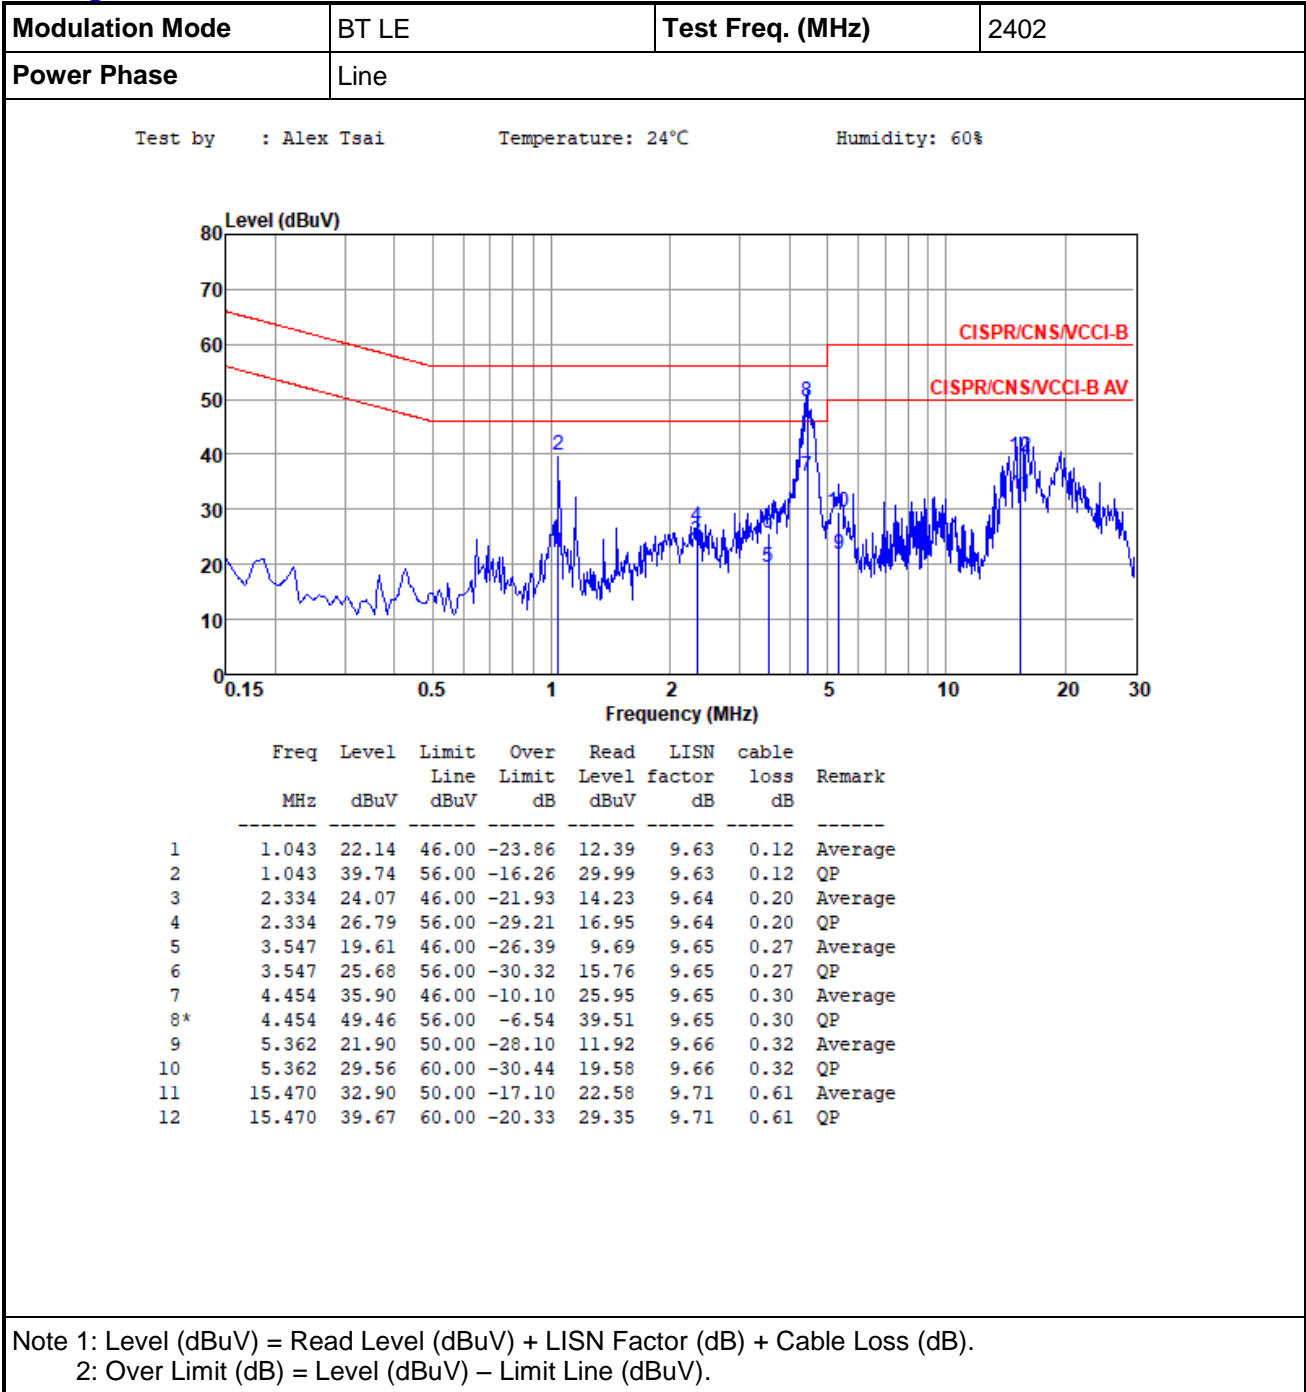

Modulation Mode	BT LE	Test Freq. (MHz)	2402
Power Phase	Neutral		


Test by : Alex Tsai Temperature: 24°C Humidity: 60%

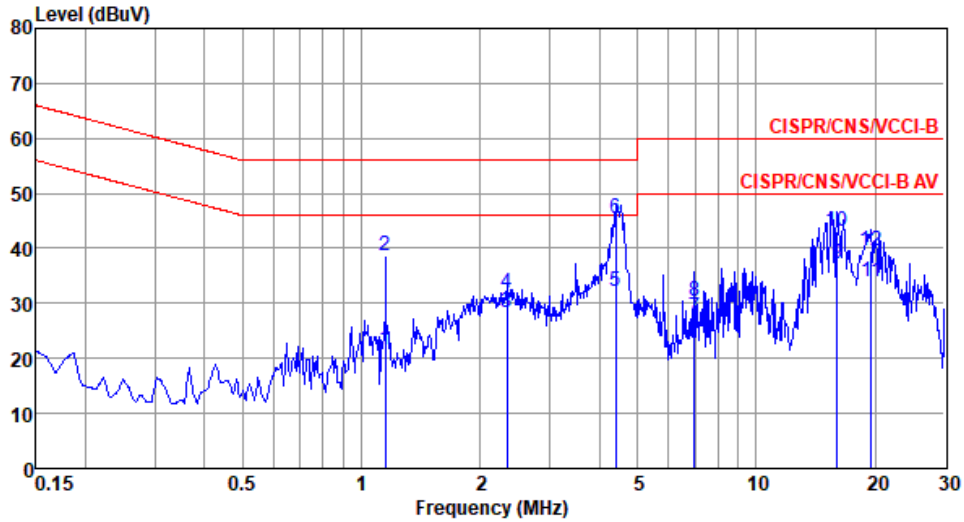

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	1.147	21.56	46.00	-24.44	11.78	9.65	0.13	Average
2	1.147	38.55	56.00	-17.45	28.77	9.65	0.13	QP
3	2.334	28.38	46.00	-17.62	18.52	9.66	0.20	Average
4	2.334	31.98	56.00	-24.02	22.12	9.66	0.20	QP
5	4.407	32.08	46.00	-13.92	22.10	9.68	0.30	Average
6*	4.407	45.56	56.00	-10.44	35.58	9.68	0.30	QP
7	6.988	27.40	50.00	-22.60	17.34	9.71	0.35	Average
8	6.988	30.55	60.00	-29.45	20.49	9.71	0.35	QP
9	16.055	37.12	50.00	-12.88	26.70	9.81	0.61	Average
10	16.055	43.16	60.00	-16.84	32.74	9.81	0.61	QP
11	19.532	34.06	50.00	-15.94	23.57	9.84	0.65	Average
12	19.532	39.46	60.00	-20.54	28.97	9.84	0.65	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Configuration 2

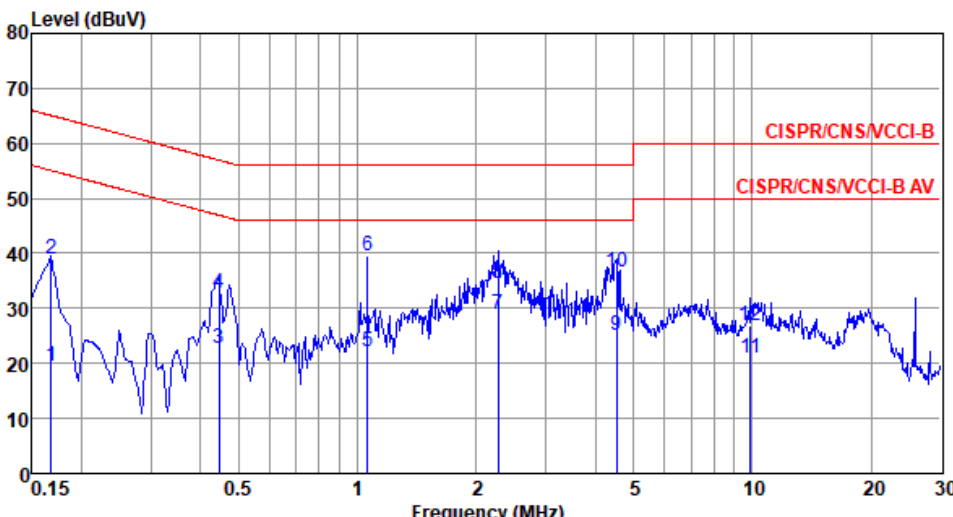Modulation Mode	BT LE	Test Freq. (MHz)	2402																																																																																																																					
Power Phase	Line																																																																																																																							
<p>Test by : Alex Tsai Temperature: 24°C Humidity: 60%</p>																																																																																																																								
																																																																																																																								
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>LISN factor dB</th> <th>cable loss dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>0.168</td><td>19.49</td><td>55.08</td><td>-35.59</td><td>9.80</td><td>9.64</td><td>0.05</td><td>Average</td></tr> <tr><td>2</td><td>0.168</td><td>38.89</td><td>65.08</td><td>-26.19</td><td>29.20</td><td>9.64</td><td>0.05</td><td>QP</td></tr> <tr><td>3</td><td>0.447</td><td>22.74</td><td>46.93</td><td>-24.19</td><td>13.03</td><td>9.63</td><td>0.08</td><td>Average</td></tr> <tr><td>4</td><td>0.447</td><td>32.91</td><td>56.93</td><td>-24.02</td><td>23.20</td><td>9.63</td><td>0.08</td><td>QP</td></tr> <tr><td>5</td><td>1.060</td><td>22.19</td><td>46.00</td><td>-23.81</td><td>12.44</td><td>9.63</td><td>0.12</td><td>Average</td></tr> <tr><td>6*</td><td>1.060</td><td>39.52</td><td>56.00</td><td>-16.48</td><td>29.77</td><td>9.63</td><td>0.12</td><td>QP</td></tr> <tr><td>7</td><td>2.273</td><td>28.84</td><td>46.00</td><td>-17.16</td><td>19.00</td><td>9.64</td><td>0.20</td><td>Average</td></tr> <tr><td>8</td><td>2.273</td><td>34.41</td><td>56.00</td><td>-21.59</td><td>24.57</td><td>9.64</td><td>0.20</td><td>QP</td></tr> <tr><td>9</td><td>4.525</td><td>25.16</td><td>46.00</td><td>-20.84</td><td>15.20</td><td>9.66</td><td>0.30</td><td>Average</td></tr> <tr><td>10</td><td>4.525</td><td>36.63</td><td>56.00</td><td>-19.37</td><td>26.67</td><td>9.66</td><td>0.30</td><td>QP</td></tr> <tr><td>11</td><td>9.913</td><td>20.99</td><td>50.00</td><td>-29.01</td><td>10.91</td><td>9.69</td><td>0.39</td><td>Average</td></tr> <tr><td>12</td><td>9.913</td><td>26.93</td><td>60.00</td><td>-33.07</td><td>16.85</td><td>9.69</td><td>0.39</td><td>QP</td></tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark	1	0.168	19.49	55.08	-35.59	9.80	9.64	0.05	Average	2	0.168	38.89	65.08	-26.19	29.20	9.64	0.05	QP	3	0.447	22.74	46.93	-24.19	13.03	9.63	0.08	Average	4	0.447	32.91	56.93	-24.02	23.20	9.63	0.08	QP	5	1.060	22.19	46.00	-23.81	12.44	9.63	0.12	Average	6*	1.060	39.52	56.00	-16.48	29.77	9.63	0.12	QP	7	2.273	28.84	46.00	-17.16	19.00	9.64	0.20	Average	8	2.273	34.41	56.00	-21.59	24.57	9.64	0.20	QP	9	4.525	25.16	46.00	-20.84	15.20	9.66	0.30	Average	10	4.525	36.63	56.00	-19.37	26.67	9.66	0.30	QP	11	9.913	20.99	50.00	-29.01	10.91	9.69	0.39	Average	12	9.913	26.93	60.00	-33.07	16.85	9.69	0.39	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	0.168	19.49	55.08	-35.59	9.80	9.64	0.05	Average																																																																																																																
2	0.168	38.89	65.08	-26.19	29.20	9.64	0.05	QP																																																																																																																
3	0.447	22.74	46.93	-24.19	13.03	9.63	0.08	Average																																																																																																																
4	0.447	32.91	56.93	-24.02	23.20	9.63	0.08	QP																																																																																																																
5	1.060	22.19	46.00	-23.81	12.44	9.63	0.12	Average																																																																																																																
6*	1.060	39.52	56.00	-16.48	29.77	9.63	0.12	QP																																																																																																																
7	2.273	28.84	46.00	-17.16	19.00	9.64	0.20	Average																																																																																																																
8	2.273	34.41	56.00	-21.59	24.57	9.64	0.20	QP																																																																																																																
9	4.525	25.16	46.00	-20.84	15.20	9.66	0.30	Average																																																																																																																
10	4.525	36.63	56.00	-19.37	26.67	9.66	0.30	QP																																																																																																																
11	9.913	20.99	50.00	-29.01	10.91	9.69	0.39	Average																																																																																																																
12	9.913	26.93	60.00	-33.07	16.85	9.69	0.39	QP																																																																																																																
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																								

Modulation Mode	BT LE	Test Freq. (MHz)	2402
Power Phase	Neutral		


Test by : Alex Tsai Temperature: 24°C Humidity: 60%

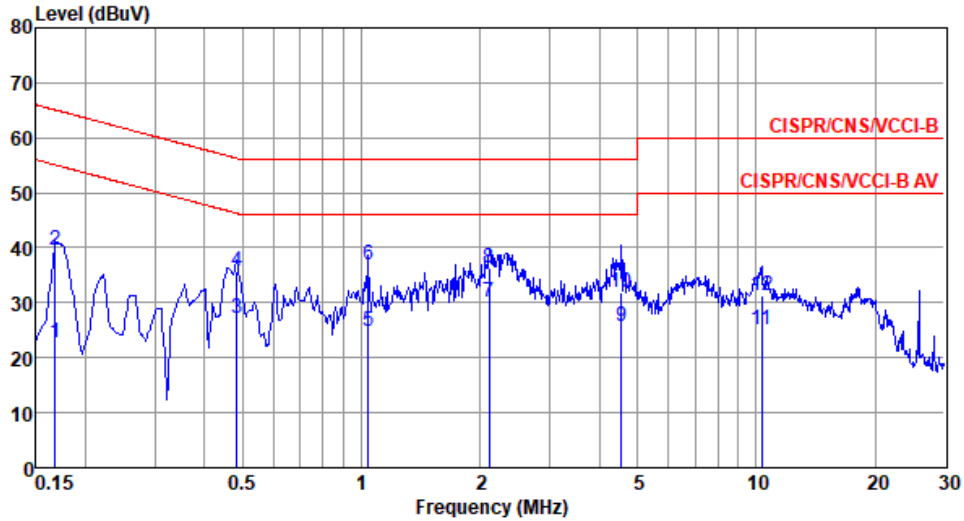

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.168	22.81	55.08	-32.27	13.10	9.66	0.05	Average
2	0.168	39.58	65.08	-25.50	29.87	9.66	0.05	QP
3	0.484	27.02	46.27	-19.25	17.28	9.65	0.09	Average
4	0.484	35.77	56.27	-20.50	26.03	9.65	0.09	QP
5	1.043	24.66	46.00	-21.34	14.89	9.65	0.12	Average
6	1.043	36.97	56.00	-19.03	27.20	9.65	0.12	QP
7*	2.110	30.22	46.00	-15.78	20.37	9.66	0.19	Average
8	2.110	36.36	56.00	-19.64	26.51	9.66	0.19	QP
9	4.549	25.78	46.00	-20.22	15.80	9.68	0.30	Average
10	4.549	31.85	56.00	-24.15	21.87	9.68	0.30	QP
11	10.342	24.96	50.00	-25.04	14.81	9.74	0.41	Average
12	10.342	31.43	60.00	-28.57	21.28	9.74	0.41	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Configuration 3

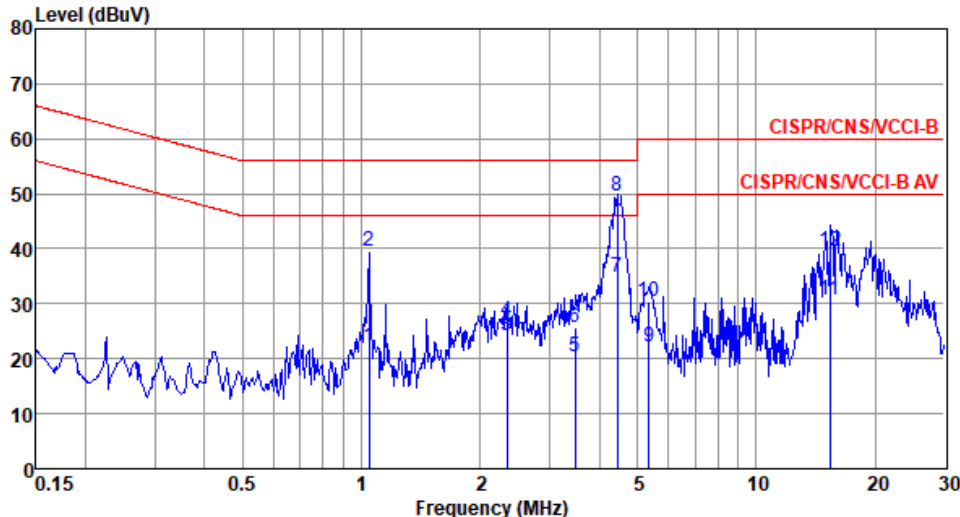Modulation Mode	BT LE	Test Freq. (MHz)	2402																																																																																																																					
Power Phase	Line																																																																																																																							
<p>Test by : Alex Tsai Temperature: 24°C Humidity: 60%</p>																																																																																																																								
																																																																																																																								
<table border="1"> <thead> <tr> <th></th> <th>Freq MHz</th> <th>Level dBuV</th> <th>Limit Line dBuV</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>LISN factor dB</th> <th>cable loss dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>1.048</td><td>22.12</td><td>46.00</td><td>-23.88</td><td>12.37</td><td>9.63</td><td>0.12</td><td>Average</td></tr> <tr><td>2</td><td>1.048</td><td>39.55</td><td>56.00</td><td>-16.45</td><td>29.80</td><td>9.63</td><td>0.12</td><td>QP</td></tr> <tr><td>3</td><td>2.337</td><td>24.19</td><td>46.00</td><td>-21.81</td><td>14.35</td><td>9.64</td><td>0.20</td><td>Average</td></tr> <tr><td>4</td><td>2.337</td><td>26.98</td><td>56.00</td><td>-29.02</td><td>17.14</td><td>9.64</td><td>0.20</td><td>QP</td></tr> <tr><td>5</td><td>3.482</td><td>20.25</td><td>46.00</td><td>-25.75</td><td>10.33</td><td>9.65</td><td>0.27</td><td>Average</td></tr> <tr><td>6</td><td>3.482</td><td>25.75</td><td>56.00</td><td>-30.25</td><td>15.83</td><td>9.65</td><td>0.27</td><td>QP</td></tr> <tr><td>7</td><td>4.442</td><td>34.98</td><td>46.00</td><td>-11.02</td><td>25.03</td><td>9.65</td><td>0.30</td><td>Average</td></tr> <tr><td>8*</td><td>4.442</td><td>49.51</td><td>56.00</td><td>-6.49</td><td>39.56</td><td>9.65</td><td>0.30</td><td>QP</td></tr> <tr><td>9</td><td>5.352</td><td>22.21</td><td>50.00</td><td>-27.79</td><td>12.23</td><td>9.66</td><td>0.32</td><td>Average</td></tr> <tr><td>10</td><td>5.352</td><td>30.51</td><td>60.00</td><td>-29.49</td><td>20.53</td><td>9.66</td><td>0.32</td><td>QP</td></tr> <tr><td>11</td><td>15.390</td><td>30.62</td><td>50.00</td><td>-19.38</td><td>20.30</td><td>9.71</td><td>0.61</td><td>Average</td></tr> <tr><td>12</td><td>15.390</td><td>39.57</td><td>60.00</td><td>-20.43</td><td>29.25</td><td>9.71</td><td>0.61</td><td>QP</td></tr> </tbody> </table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark	1	1.048	22.12	46.00	-23.88	12.37	9.63	0.12	Average	2	1.048	39.55	56.00	-16.45	29.80	9.63	0.12	QP	3	2.337	24.19	46.00	-21.81	14.35	9.64	0.20	Average	4	2.337	26.98	56.00	-29.02	17.14	9.64	0.20	QP	5	3.482	20.25	46.00	-25.75	10.33	9.65	0.27	Average	6	3.482	25.75	56.00	-30.25	15.83	9.65	0.27	QP	7	4.442	34.98	46.00	-11.02	25.03	9.65	0.30	Average	8*	4.442	49.51	56.00	-6.49	39.56	9.65	0.30	QP	9	5.352	22.21	50.00	-27.79	12.23	9.66	0.32	Average	10	5.352	30.51	60.00	-29.49	20.53	9.66	0.32	QP	11	15.390	30.62	50.00	-19.38	20.30	9.71	0.61	Average	12	15.390	39.57	60.00	-20.43	29.25	9.71	0.61	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark																																																																																																																
1	1.048	22.12	46.00	-23.88	12.37	9.63	0.12	Average																																																																																																																
2	1.048	39.55	56.00	-16.45	29.80	9.63	0.12	QP																																																																																																																
3	2.337	24.19	46.00	-21.81	14.35	9.64	0.20	Average																																																																																																																
4	2.337	26.98	56.00	-29.02	17.14	9.64	0.20	QP																																																																																																																
5	3.482	20.25	46.00	-25.75	10.33	9.65	0.27	Average																																																																																																																
6	3.482	25.75	56.00	-30.25	15.83	9.65	0.27	QP																																																																																																																
7	4.442	34.98	46.00	-11.02	25.03	9.65	0.30	Average																																																																																																																
8*	4.442	49.51	56.00	-6.49	39.56	9.65	0.30	QP																																																																																																																
9	5.352	22.21	50.00	-27.79	12.23	9.66	0.32	Average																																																																																																																
10	5.352	30.51	60.00	-29.49	20.53	9.66	0.32	QP																																																																																																																
11	15.390	30.62	50.00	-19.38	20.30	9.71	0.61	Average																																																																																																																
12	15.390	39.57	60.00	-20.43	29.25	9.71	0.61	QP																																																																																																																
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																								

Modulation Mode	BT LE	Test Freq. (MHz)	2402
Power Phase	Neutral		


Test by : Alex Tsai Temperature: 24°C Humidity: 60%

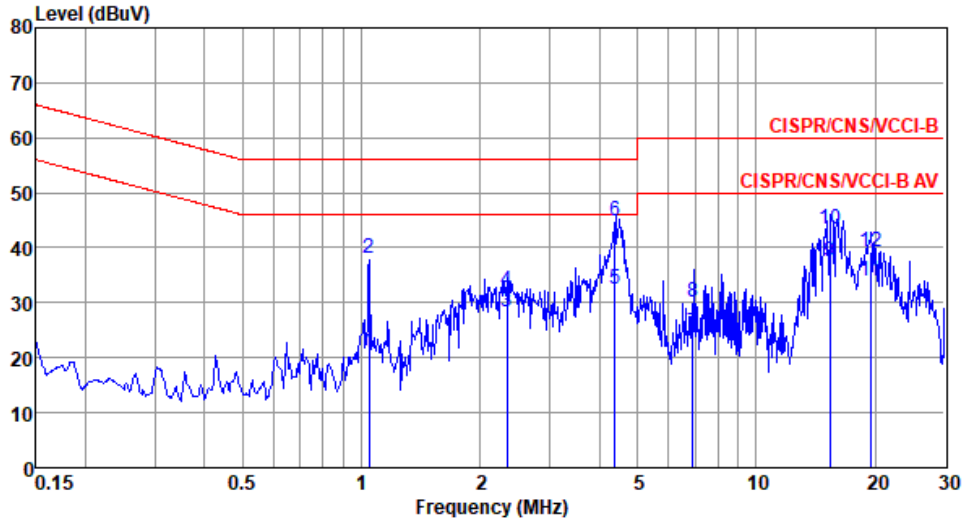

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	1.048	20.82	46.00	-25.18	11.05	9.65	0.12	Average
2	1.048	38.15	56.00	-17.85	28.38	9.65	0.12	QP
3	2.339	28.42	46.00	-17.58	18.56	9.66	0.20	Average
4	2.339	32.15	56.00	-23.85	22.29	9.66	0.20	QP
5	4.395	32.47	46.00	-13.53	22.49	9.68	0.30	Average
6*	4.395	45.01	56.00	-10.99	35.03	9.68	0.30	QP
7	6.918	24.59	50.00	-25.41	14.53	9.71	0.35	Average
8	6.918	30.12	60.00	-29.88	20.06	9.71	0.35	QP
9	15.338	37.42	50.00	-12.58	27.02	9.80	0.60	Average
10	15.338	43.52	60.00	-16.48	33.12	9.80	0.60	QP
11	19.447	33.95	50.00	-16.05	23.46	9.84	0.65	Average
12	19.447	39.22	60.00	-20.78	28.73	9.84	0.65	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Configuration 4

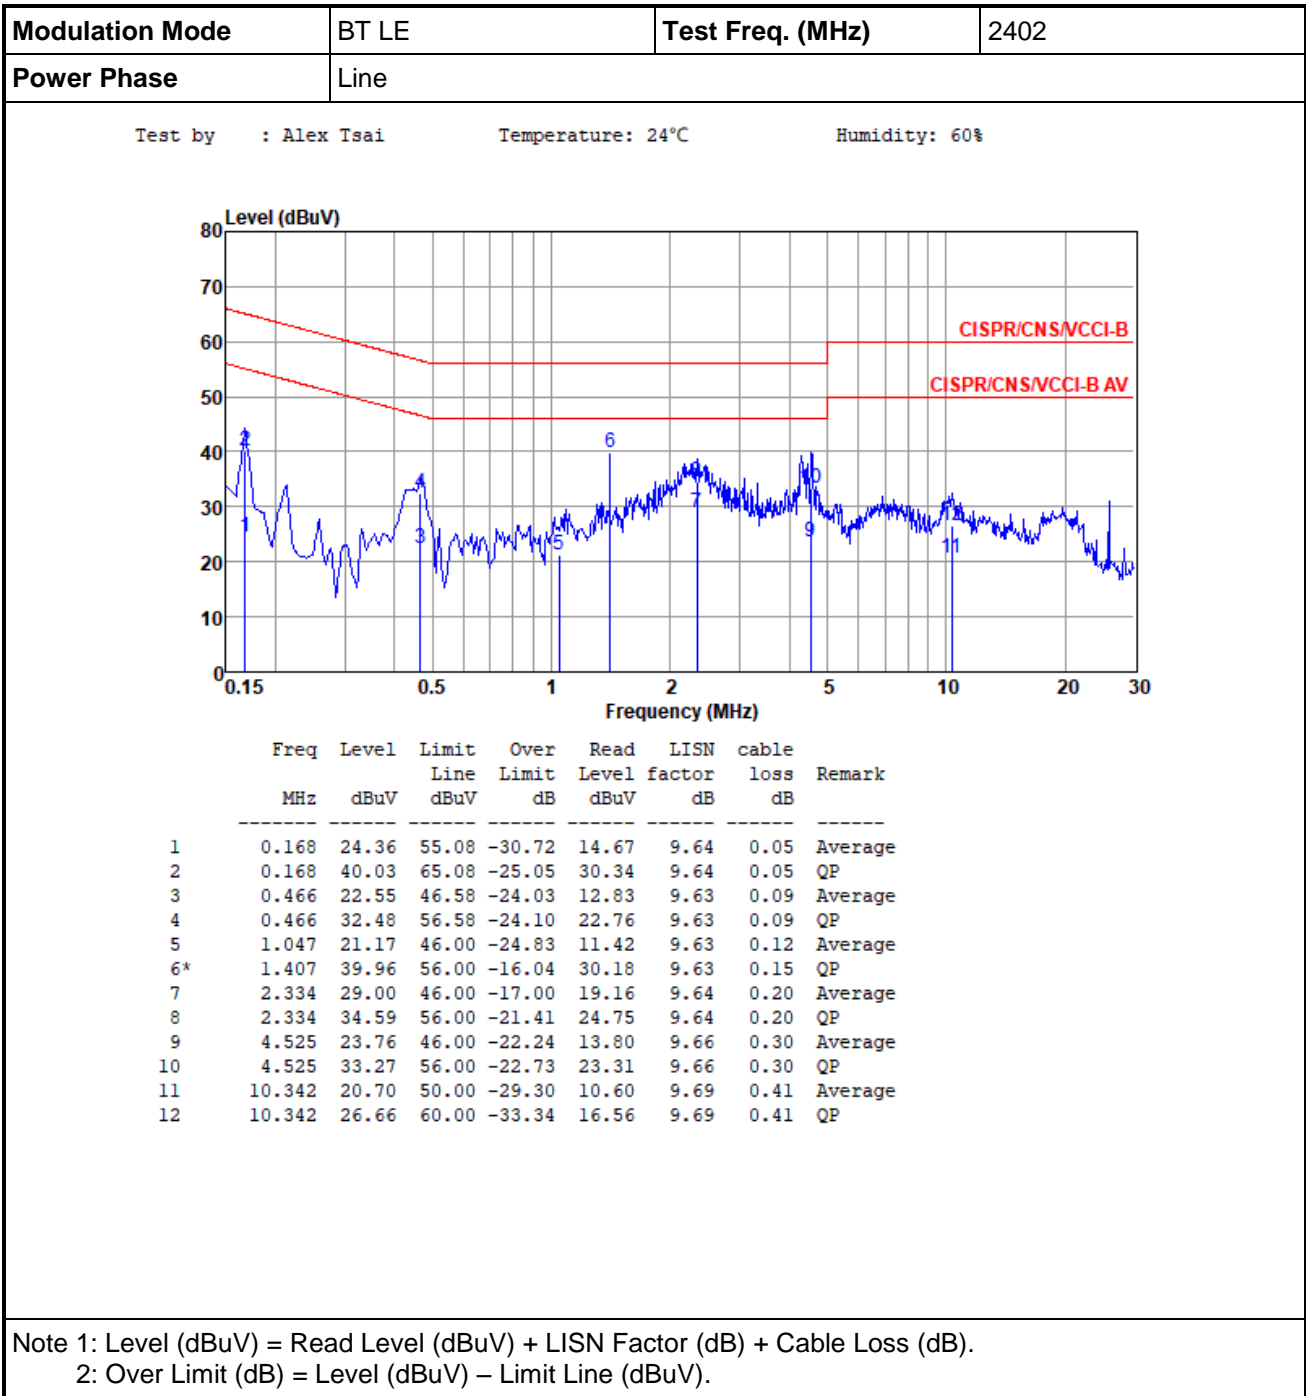

Modulation Mode	BT LE	Test Freq. (MHz)	2402
Power Phase	Neutral		

Test by : Alex Tsai Temperature: 24°C Humidity: 60%

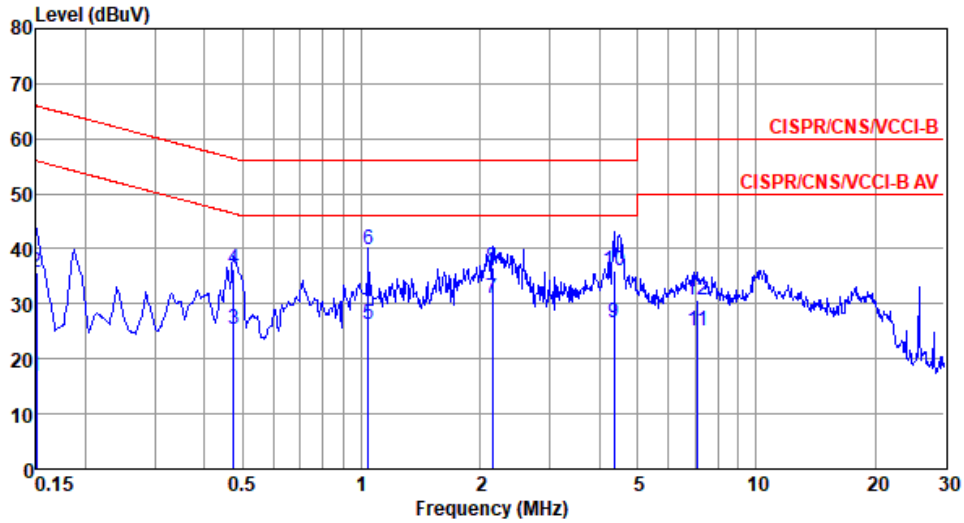

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	16.88	56.00	-39.12	7.17	9.66	0.05	Average
2	0.150	35.78	66.00	-30.22	26.07	9.66	0.05	QP
3	0.474	25.25	46.45	-21.20	15.51	9.65	0.09	Average
4	0.474	36.39	56.45	-20.06	26.65	9.65	0.09	QP
5	1.043	26.20	46.00	-19.80	16.43	9.65	0.12	Average
6	1.043	39.83	56.00	-16.17	30.06	9.65	0.12	QP
7*	2.144	30.98	46.00	-15.02	21.13	9.66	0.19	Average
8	2.144	36.63	56.00	-19.37	26.78	9.66	0.19	QP
9	4.361	26.69	46.00	-19.31	16.71	9.68	0.30	Average
10	4.361	35.91	56.00	-20.09	25.93	9.68	0.30	QP
11	7.100	25.23	50.00	-24.77	15.17	9.71	0.35	Average
12	7.100	30.81	60.00	-29.19	20.75	9.71	0.35	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup

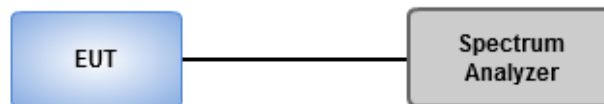

3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	23°C / 61%	Tested By	Brad Wu
--------------------------	------------	------------------	---------

Configuration 1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	721.014k	1.048M	1M05F1D	717.391k	1.048M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	717.391k	1.048M
2440MHz	Pass	500k	721.014k	1.048M
2480MHz	Pass	500k	717.391k	1.048M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

BT-LE(1Mbps)

EBW-DTS


2402MHz

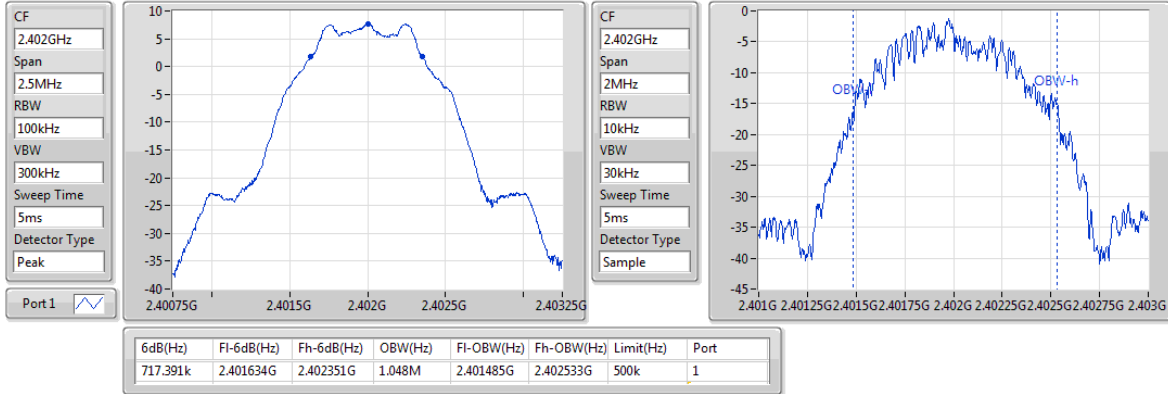

BT-LE(1Mbps)

EBW-DTS


2440MHz

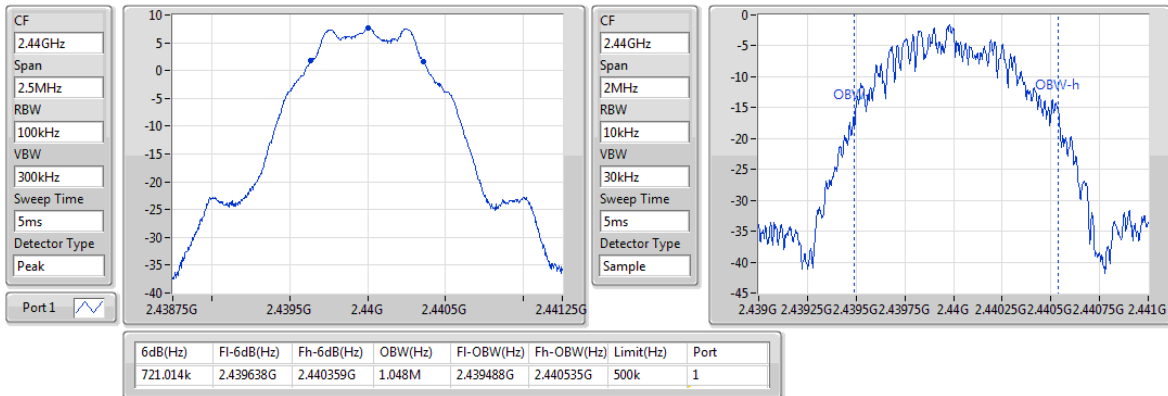

BT-LE(1Mbps)

EBW-DTS

2480MHz

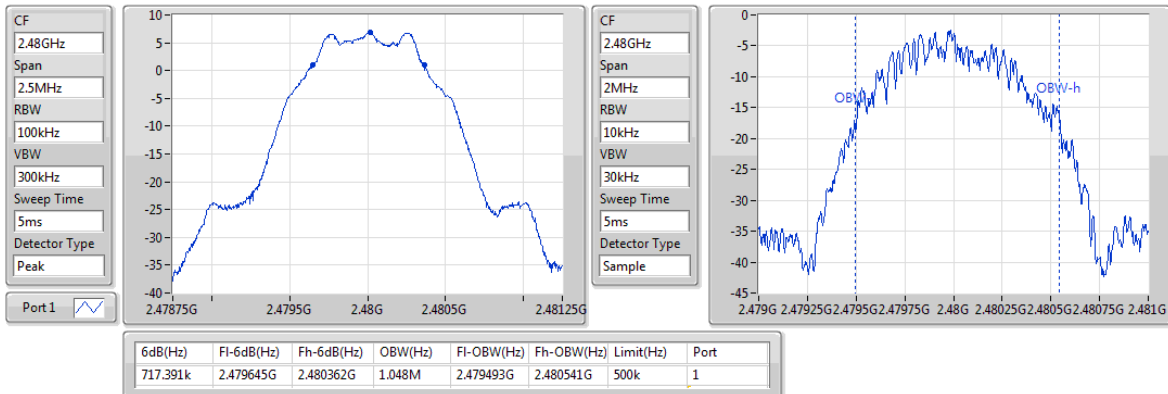

3.3 RF Output Power

3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup

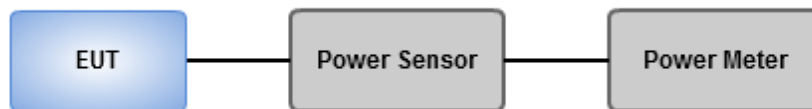

3.3.4 Test Result of Maximum Output Power

Ambient Condition	23°C / 61%	Tested By	Brad Wu
--------------------------	------------	------------------	---------

Configuration 1

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.04	0.00802

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.79	9.04	30.00
2440MHz	Pass	2.79	8.81	30.00
2480MHz	Pass	2.79	8.18	30.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	8.89	0.00774

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.79	8.89	-
2440MHz	Pass	2.79	8.64	-
2480MHz	Pass	2.79	8.00	-

Note: Average power is for reference only.

Configuration 3

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.99	0.00630

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.79	7.99	30.00
2440MHz	Pass	2.79	7.69	30.00
2480MHz	Pass	2.79	6.94	30.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	7.79	0.00601

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.79	7.79	-
2440MHz	Pass	2.79	7.50	-
2480MHz	Pass	2.79	6.76	-

Note: Average power is for reference only.

3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



3.4.4 Test Result of Power Spectral Density

Ambient Condition	23°C / 61%	Tested By	Brad Wu
--------------------------	------------	------------------	---------

Configuration 1

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-6.12


Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.79	-6.12	8.00
2440MHz	Pass	2.79	-6.41	8.00
2480MHz	Pass	2.79	-7.02	8.00

BT-LE(1Mbps)

PSD

2402MHz

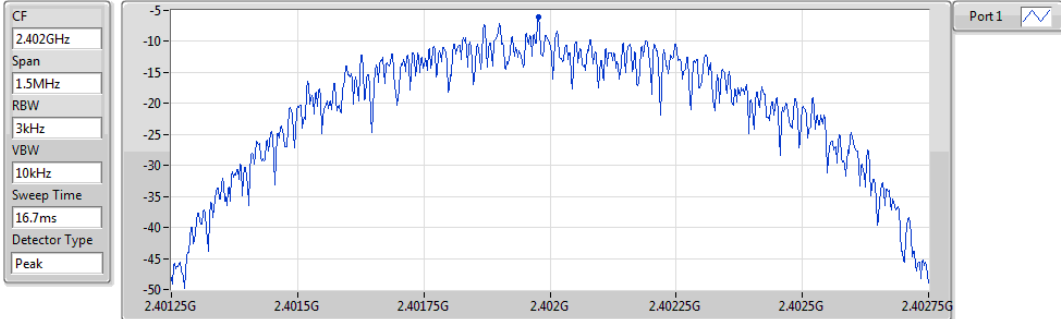


Sum	PD	Port 1
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-6.12	-6.12	-6.12

BT-LE(1Mbps)

PSD

2440MHz

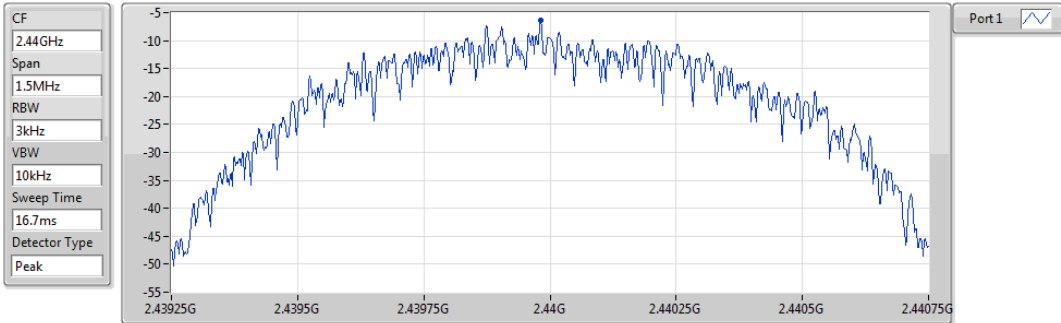


Sum	PD	Port 1
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-6.41	-6.41	-6.41

BT-LE(1Mbps)

PSD

2480MHz

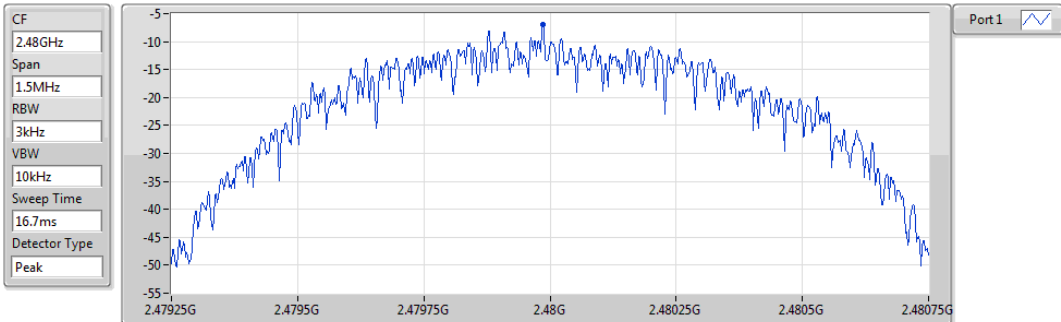

Sum	PD	Port 1
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-7.02	-7.02	-7.02

3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.5.3 Test Setup


Radiated Emissions below 1 GHz

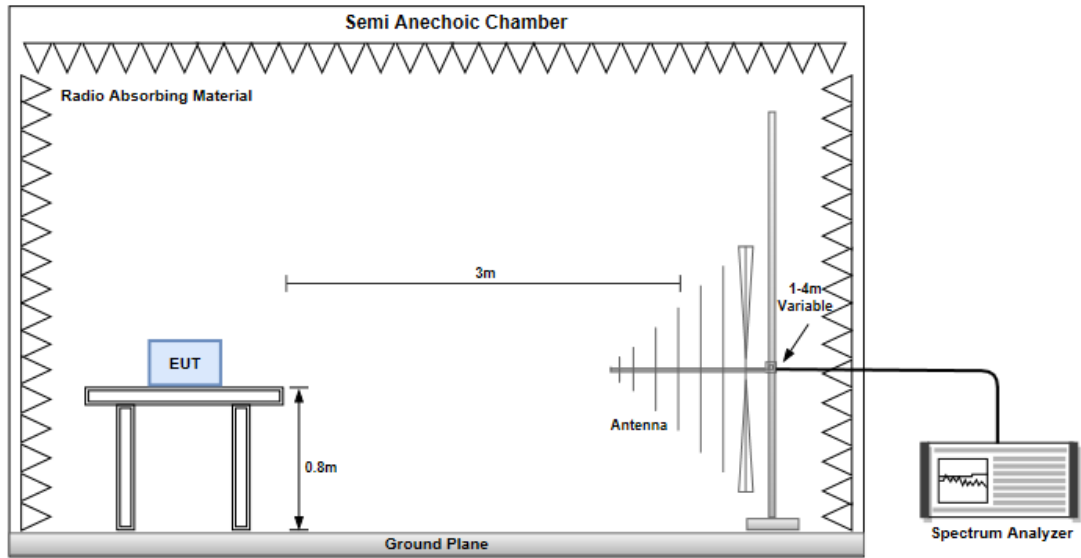

Radiated Emissions above 1 GHz

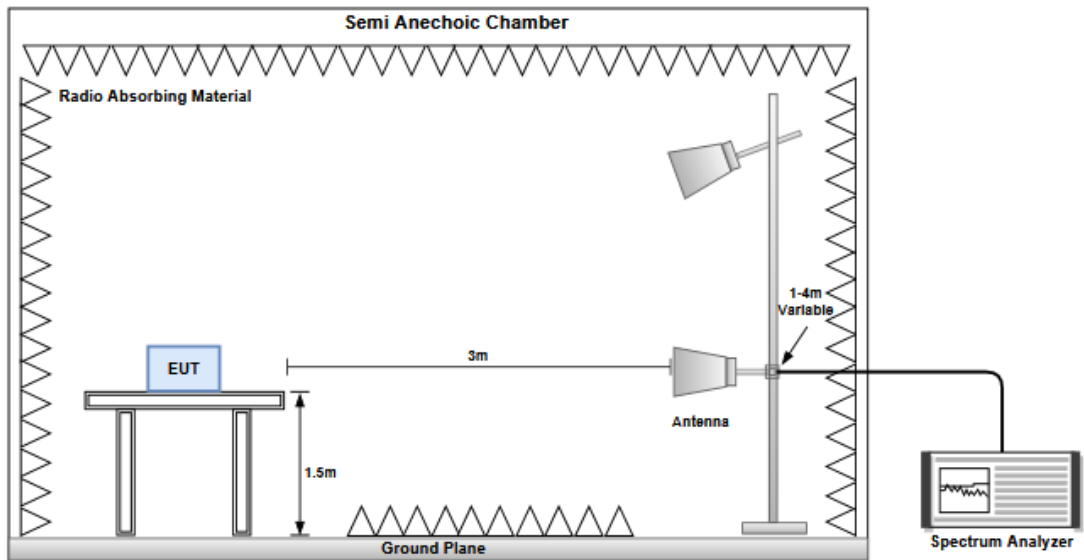


Transmitter Conducted Unwanted Emissions (30MHz~25GHz)




Configuration 1

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

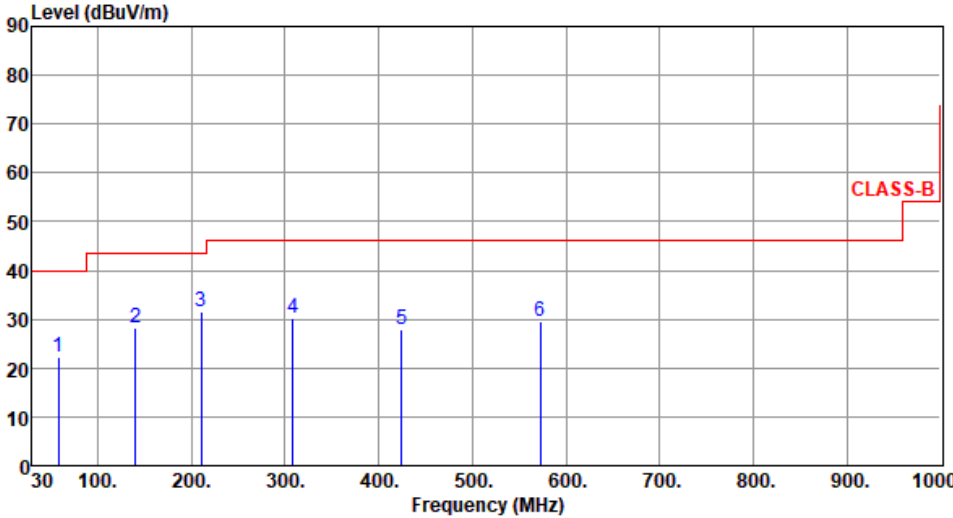Modulation	BT LE	Test Freq. (MHz)	2402																																																																																																																										
Polarization	Horizontal																																																																																																																												
Test By : Roger Lu Temperature(°C):23 Humidity(%):64																																																																																																																													
 <p>The graph displays the radiated unwanted emissions for a BT LE transmitter. The y-axis represents the emission level in dBuV/m, ranging from 0 to 90. The x-axis represents the frequency in MHz, ranging from 30 to 1000. A red line indicates the CLASS-B emission limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 43.5 dBuV/m from 100 MHz to 210 MHz, and finally to 46 dBuV/m from 210 MHz to 1000 MHz. Six blue vertical lines represent measured emission peaks at the following frequencies: 58.16 MHz, 140.62 MHz, 210.45 MHz, 308.32 MHz, 424.81 MHz, and 572.36 MHz. The measured levels are 22.34, 28.15, 31.48, 30.24, 27.88, and 29.42 dBuV/m, respectively. The margins relative to the limit are -17.66, -15.35, -12.02, -15.76, -18.12, and -16.58 dB.</p>																																																																																																																													
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>58.16</td> <td>140.62</td> <td>210.45</td> <td>308.32</td> <td>424.81</td> <td>572.36</td> </tr> <tr> <td>22.34</td> <td>28.15</td> <td>31.48</td> <td>30.24</td> <td>27.88</td> <td>29.42</td> </tr> <tr> <td>40.00</td> <td>43.50</td> <td>43.50</td> <td>46.00</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-17.66</td> <td>-15.35</td> <td>-12.02</td> <td>-15.76</td> <td>-18.12</td> <td>-16.58</td> </tr> <tr> <td>31.06</td> <td>37.19</td> <td>43.36</td> <td>37.98</td> <td>32.75</td> <td>31.05</td> </tr> <tr> <td>-8.72</td> <td>-9.04</td> <td>-11.88</td> <td>-7.74</td> <td>-4.87</td> <td>-1.63</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	1	2	3	4	5	6	58.16	140.62	210.45	308.32	424.81	572.36	22.34	28.15	31.48	30.24	27.88	29.42	40.00	43.50	43.50	46.00	46.00	46.00	-17.66	-15.35	-12.02	-15.76	-18.12	-16.58	31.06	37.19	43.36	37.98	32.75	31.05	-8.72	-9.04	-11.88	-7.74	-4.87	-1.63	Peak	Peak	Peak	Peak	Peak	Peak	---	---	---	---	---	---	---	---	---	---	---	---	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>58.16</td> <td>22.34</td> <td>40.00</td> <td>-17.66</td> <td>31.06</td> <td>-8.72</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>140.62</td> <td>28.15</td> <td>43.50</td> <td>-15.35</td> <td>37.19</td> <td>-9.04</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>210.45</td> <td>31.48</td> <td>43.50</td> <td>-12.02</td> <td>43.36</td> <td>-11.88</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>308.32</td> <td>30.24</td> <td>46.00</td> <td>-15.76</td> <td>37.98</td> <td>-7.74</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>424.81</td> <td>27.88</td> <td>46.00</td> <td>-18.12</td> <td>32.75</td> <td>-4.87</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>572.36</td> <td>29.42</td> <td>46.00</td> <td>-16.58</td> <td>31.05</td> <td>-1.63</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	58.16	22.34	40.00	-17.66	31.06	-8.72	Peak	---	---	140.62	28.15	43.50	-15.35	37.19	-9.04	Peak	---	---	210.45	31.48	43.50	-12.02	43.36	-11.88	Peak	---	---	308.32	30.24	46.00	-15.76	37.98	-7.74	Peak	---	---	424.81	27.88	46.00	-18.12	32.75	-4.87	Peak	---	---	572.36	29.42	46.00	-16.58	31.05	-1.63	Peak	---	---
1	2	3	4	5	6																																																																																																																								
58.16	140.62	210.45	308.32	424.81	572.36																																																																																																																								
22.34	28.15	31.48	30.24	27.88	29.42																																																																																																																								
40.00	43.50	43.50	46.00	46.00	46.00																																																																																																																								
-17.66	-15.35	-12.02	-15.76	-18.12	-16.58																																																																																																																								
31.06	37.19	43.36	37.98	32.75	31.05																																																																																																																								
-8.72	-9.04	-11.88	-7.74	-4.87	-1.63																																																																																																																								
Peak	Peak	Peak	Peak	Peak	Peak																																																																																																																								
---	---	---	---	---	---																																																																																																																								
---	---	---	---	---	---																																																																																																																								
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																																																																					
58.16	22.34	40.00	-17.66	31.06	-8.72	Peak	---	---																																																																																																																					
140.62	28.15	43.50	-15.35	37.19	-9.04	Peak	---	---																																																																																																																					
210.45	31.48	43.50	-12.02	43.36	-11.88	Peak	---	---																																																																																																																					
308.32	30.24	46.00	-15.76	37.98	-7.74	Peak	---	---																																																																																																																					
424.81	27.88	46.00	-18.12	32.75	-4.87	Peak	---	---																																																																																																																					
572.36	29.42	46.00	-16.58	31.05	-1.63	Peak	---	---																																																																																																																					
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																																																																													

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):64

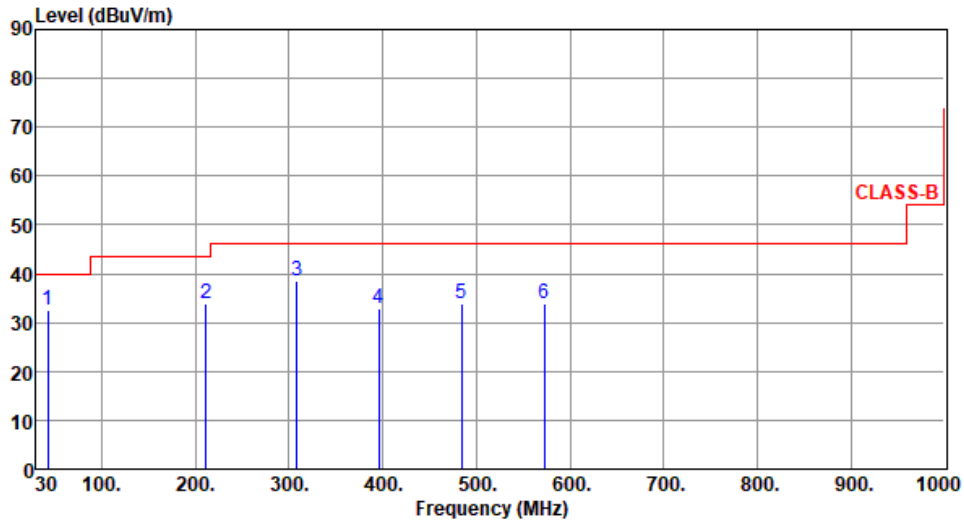

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.65	32.61	40.00	-7.39	40.61	-8.00	Peak	---	---
2	211.45	33.92	43.50	-9.58	45.80	-11.88	Peak	---	---
3	308.42	38.61	46.00	-7.39	46.33	-7.72	Peak	---	---
4	395.65	32.88	46.00	-13.12	38.55	-5.67	Peak	---	---
5	483.89	33.85	46.00	-12.15	37.27	-3.42	Peak	---	---
6	572.26	33.91	46.00	-12.09	35.54	-1.63	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

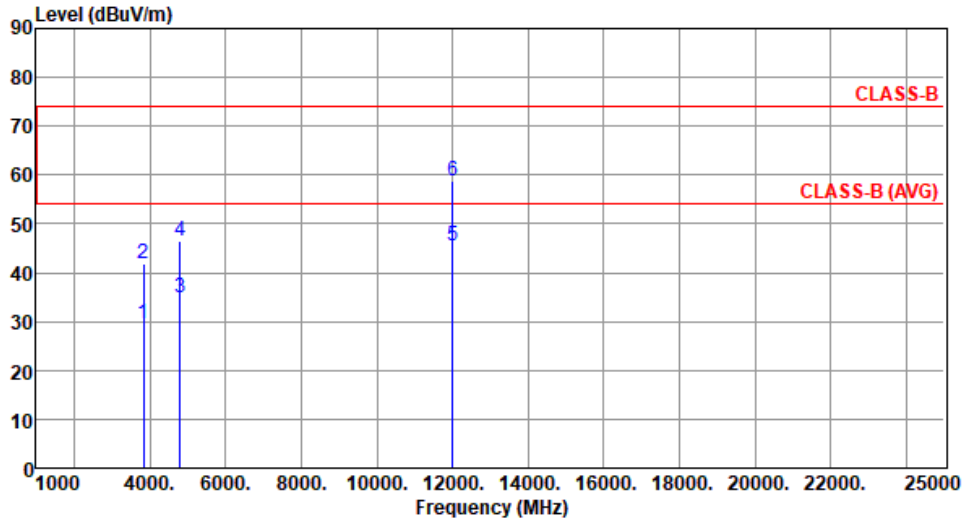Modulation	BT LE	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By :BRAD WU Temperature(°C):24 Humidity(%):63									
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	3843.20	29.41	54.00	-24.59	28.49	0.92	Average	100	25
2	3843.20	41.86	74.00	-32.14	40.94	0.92	Peak	100	25
3	4804.00	34.91	54.00	-19.09	31.38	3.53	Average	100	192
4	4804.00	46.39	74.00	-27.61	42.86	3.53	Peak	100	192
5	12010.00	45.43	54.00	-8.57	31.71	13.72	Average	100	29
6	12010.00	58.82	74.00	-15.18	45.10	13.72	Peak	100	29
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

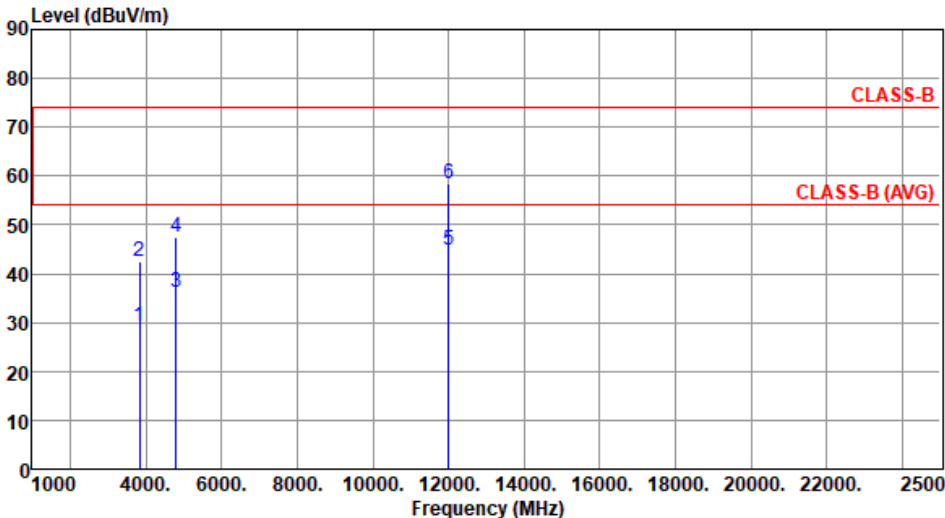Modulation	BT LE	Test Freq. (MHz)	2402						
Polarization	Vertical								
Test By : BRAD WU		Temperature(°C): 24	Humidity(%): 63						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	3843.20	29.15	54.00	-24.85	28.23	0.92	Average	100	31
2	3843.20	42.53	74.00	-31.47	41.61	0.92	Peak	100	31
3	4804.00	36.29	54.00	-17.71	32.76	3.53	Average	100	341
4	4804.00	47.58	74.00	-26.42	44.05	3.53	Peak	100	341
5	12010.00	44.94	54.00	-9.06	31.22	13.72	Average	100	55
6	12010.00	58.30	74.00	-15.70	44.58	13.72	Peak	100	55
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>									

Modulation	BT LE	Test Freq. (MHz)	2440
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

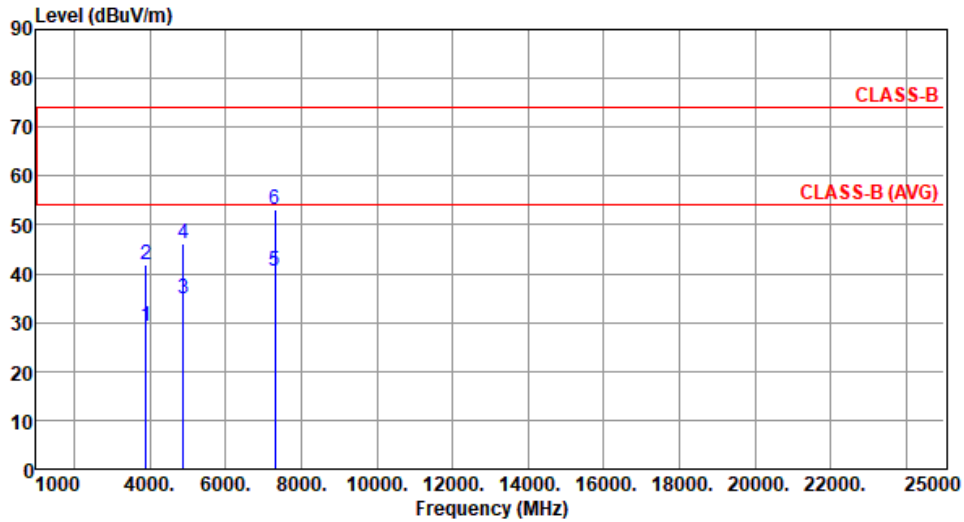

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3904.00	29.30	54.00	-24.70	28.09	1.21	Average	100	16
2	3904.00	41.73	74.00	-32.27	40.52	1.21	Peak	100	16
3	4880.00	34.85	54.00	-19.15	31.22	3.63	Average	100	189
4	4880.00	46.27	74.00	-27.73	42.64	3.63	Peak	100	189
5	7320.00	40.67	54.00	-13.33	31.45	9.22	Average	100	279
6	7320.00	53.12	74.00	-20.88	43.90	9.22	Peak	100	279


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT LE	Test Freq. (MHz)	2440
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

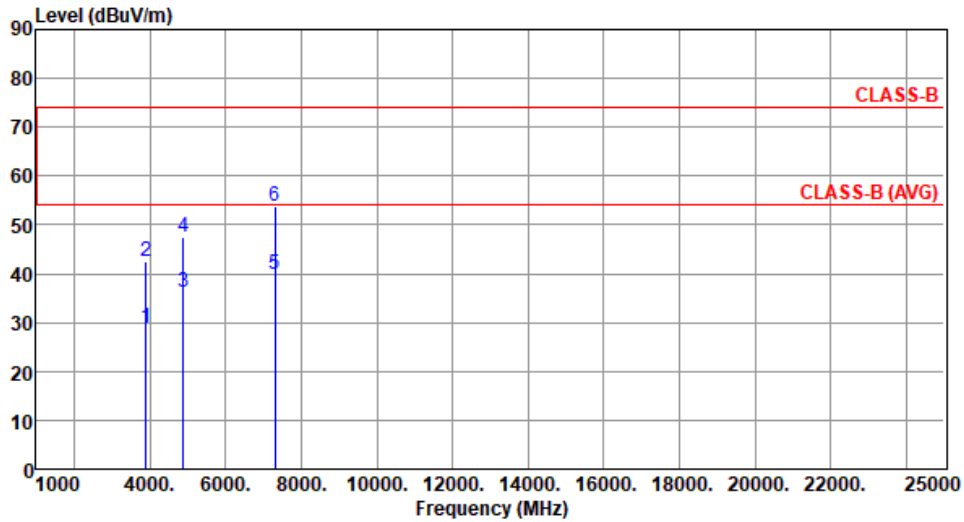

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3904.00	29.06	54.00	-24.94	27.85	1.21	Average	100	29
2	3904.00	42.44	74.00	-31.56	41.23	1.21	Peak	100	29
3	4880.00	36.15	54.00	-17.85	32.52	3.63	Average	100	348
4	4880.00	47.44	74.00	-26.56	43.81	3.63	Peak	100	348
5	7320.00	39.78	54.00	-14.22	30.56	9.22	Average	100	28
6	7320.00	53.65	74.00	-20.35	44.43	9.22	Peak	100	28


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT LE	Test Freq. (MHz)	2480
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

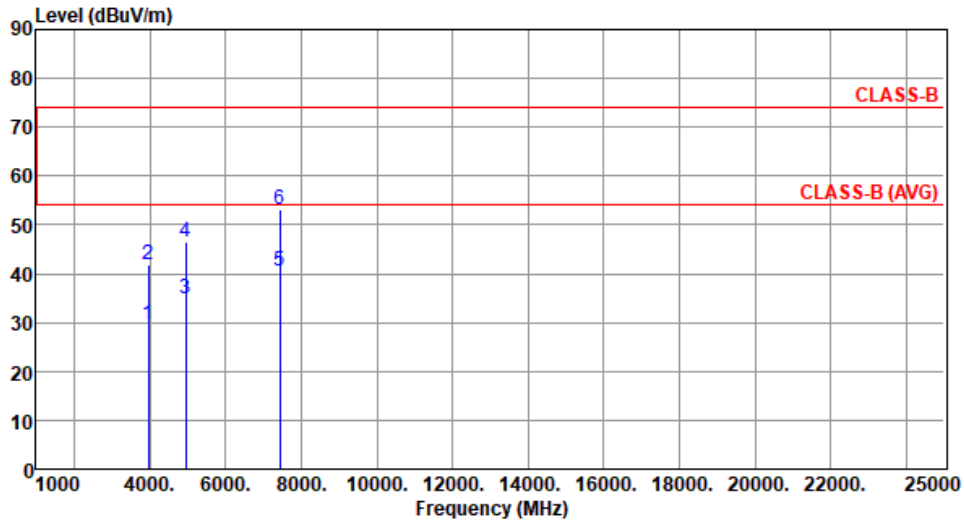

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3968.00	29.46	54.00	-24.54	28.32	1.14	Average	100	24
2	3968.00	41.88	74.00	-32.12	40.74	1.14	Peak	100	24
3	4960.00	35.02	54.00	-18.98	31.19	3.83	Average	100	191
4	4960.00	46.36	74.00	-27.64	42.53	3.83	Peak	100	191
5	7440.00	40.58	54.00	-13.42	31.37	9.21	Average	100	281
6	7440.00	53.06	74.00	-20.94	43.85	9.21	Peak	100	281


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	BT LE	Test Freq. (MHz)	2480
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

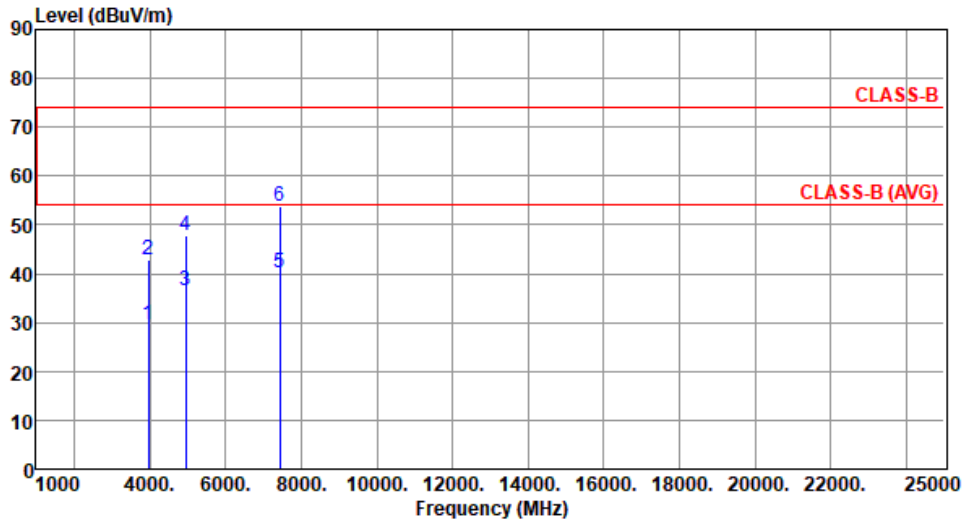

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3968.00	29.52	54.00	-24.48	28.38	1.14	Average	100	39
2	3968.00	42.83	74.00	-31.17	41.69	1.14	Peak	100	39
3	4960.00	36.42	54.00	-17.58	32.59	3.83	Average	100	352
4	4960.00	47.81	74.00	-26.19	43.98	3.83	Peak	100	352
5	7440.00	40.06	54.00	-13.94	30.85	9.21	Average	100	31
6	7440.00	53.92	74.00	-20.08	44.71	9.21	Peak	100	31


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Configuration 2

3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

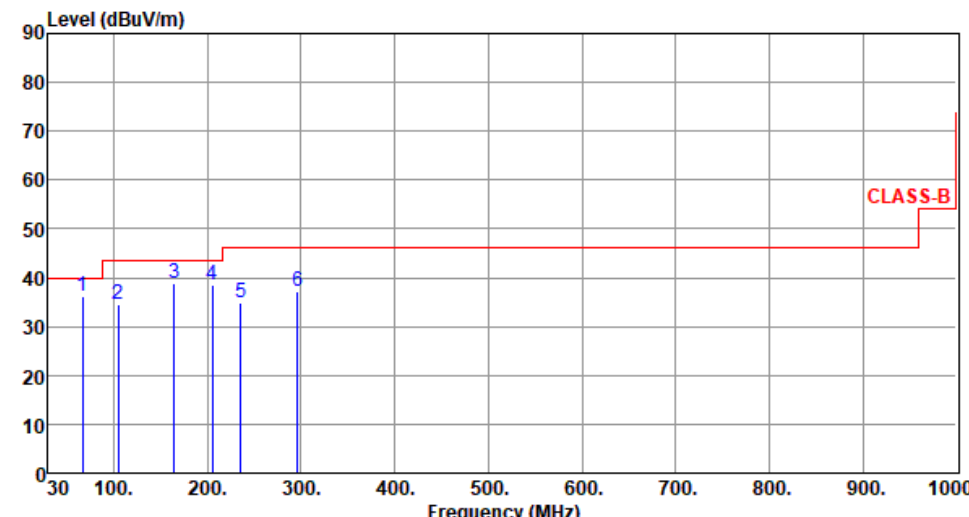Modulation	BT LE	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : BRAD WU Temperature(°C): 23 Humidity(%): 64									
									
1	2	3	4	5	6	7	8	9	10
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	
1	66.56	36.35	40.00	-3.65	46.27	-9.92	Peak	---	---
2	104.45	34.62	43.50	-8.88	46.99	-12.37	Peak	---	---
3	164.59	38.89	43.50	-4.61	47.72	-8.83	Peak	---	---
4	205.26	38.54	43.50	-4.96	50.34	-11.80	Peak	---	---
5	235.26	34.82	46.00	-11.18	45.64	-10.82	Peak	---	---
6	296.51	37.29	46.00	-8.71	45.48	-8.19	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):23 Humidity(%) :64

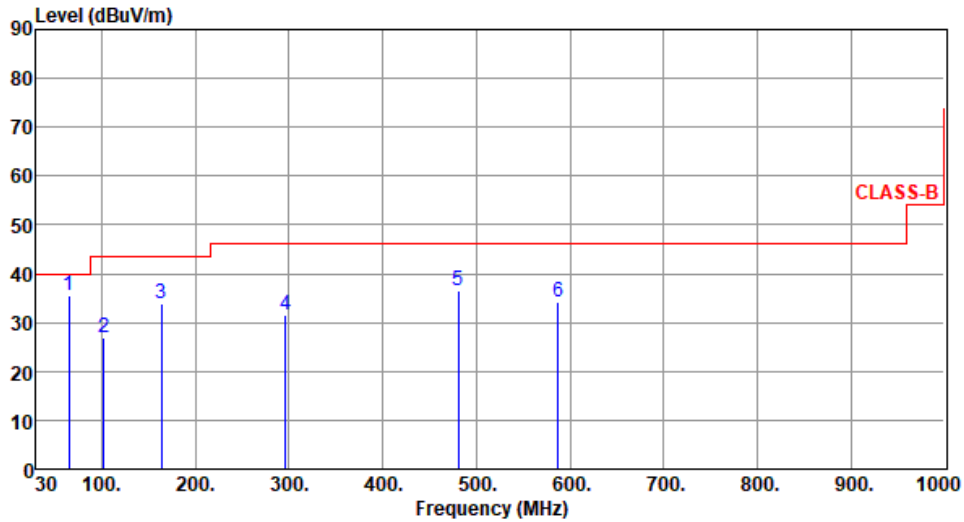

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	64.58	35.62	40.00	-4.38	45.01	-9.39	Peak	---	---
2	102.54	26.95	43.50	-16.55	39.69	-12.74	Peak	---	---
3	163.51	33.82	43.50	-9.68	42.61	-8.79	Peak	---	---
4	295.95	31.69	46.00	-14.31	39.89	-8.20	Peak	---	---
5	480.46	36.41	46.00	-9.59	39.85	-3.44	Peak	---	---
6	587.59	34.26	46.00	-11.74	35.40	-1.14	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


Configuration 3

3.5.7 Transmitter Radiated Unwanted Emissions (Below 1GHz)

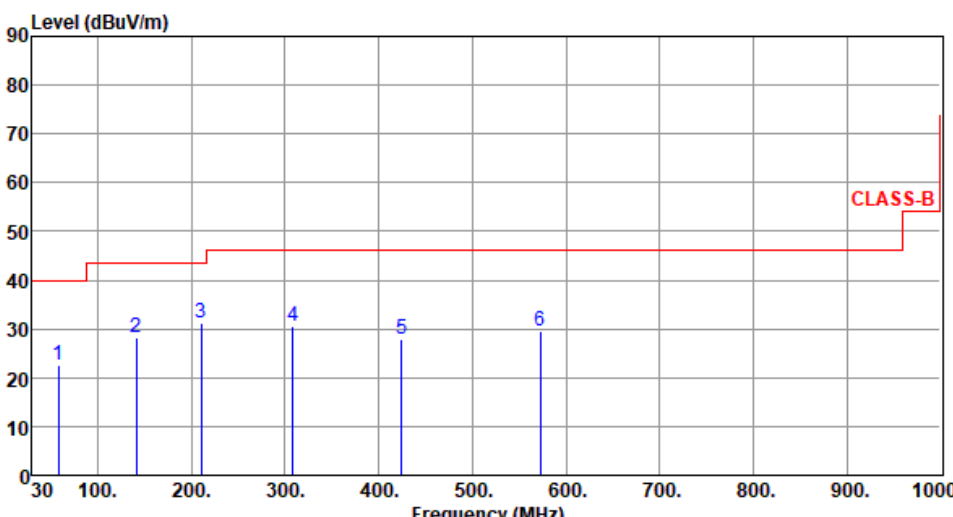Modulation	BT LE	Test Freq. (MHz)	2402																																																																							
Polarization	Horizontal																																																																									
Test By : Roger Lu Temperature(°C):23 Humidity(%):64																																																																										
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 43.5 dBuV/m at 100 MHz, 46 dBuV/m at 210.58 MHz, and 50 dBuV/m from 210.58 MHz to 1000 MHz. Six blue vertical lines indicate measured peaks at 58.36, 140.84, 210.58, 308.45, 424.66, and 572.44 MHz, with their respective levels and margins from the limit line.</p>																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>58.36</td> <td>22.45</td> <td>40.00</td> <td>-17.55</td> <td>31.21</td> <td>-8.76</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>140.84</td> <td>28.36</td> <td>43.50</td> <td>-15.14</td> <td>37.42</td> <td>-9.06</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>210.58</td> <td>31.36</td> <td>43.50</td> <td>-12.14</td> <td>43.24</td> <td>-11.88</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>308.45</td> <td>30.58</td> <td>46.00</td> <td>-15.42</td> <td>38.30</td> <td>-7.72</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>424.66</td> <td>27.92</td> <td>46.00</td> <td>-18.08</td> <td>32.79</td> <td>-4.87</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>572.44</td> <td>29.68</td> <td>46.00</td> <td>-16.32</td> <td>31.30</td> <td>-1.62</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	58.36	22.45	40.00	-17.55	31.21	-8.76	Peak	---	---	2	140.84	28.36	43.50	-15.14	37.42	-9.06	Peak	---	---	3	210.58	31.36	43.50	-12.14	43.24	-11.88	Peak	---	---	4	308.45	30.58	46.00	-15.42	38.30	-7.72	Peak	---	---	5	424.66	27.92	46.00	-18.08	32.79	-4.87	Peak	---	---	6	572.44	29.68	46.00	-16.32	31.30	-1.62	Peak	---	---			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																																	
1	58.36	22.45	40.00	-17.55	31.21	-8.76	Peak	---	---																																																																	
2	140.84	28.36	43.50	-15.14	37.42	-9.06	Peak	---	---																																																																	
3	210.58	31.36	43.50	-12.14	43.24	-11.88	Peak	---	---																																																																	
4	308.45	30.58	46.00	-15.42	38.30	-7.72	Peak	---	---																																																																	
5	424.66	27.92	46.00	-18.08	32.79	-4.87	Peak	---	---																																																																	
6	572.44	29.68	46.00	-16.32	31.30	-1.62	Peak	---	---																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																										

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):23 Humidity(%):64

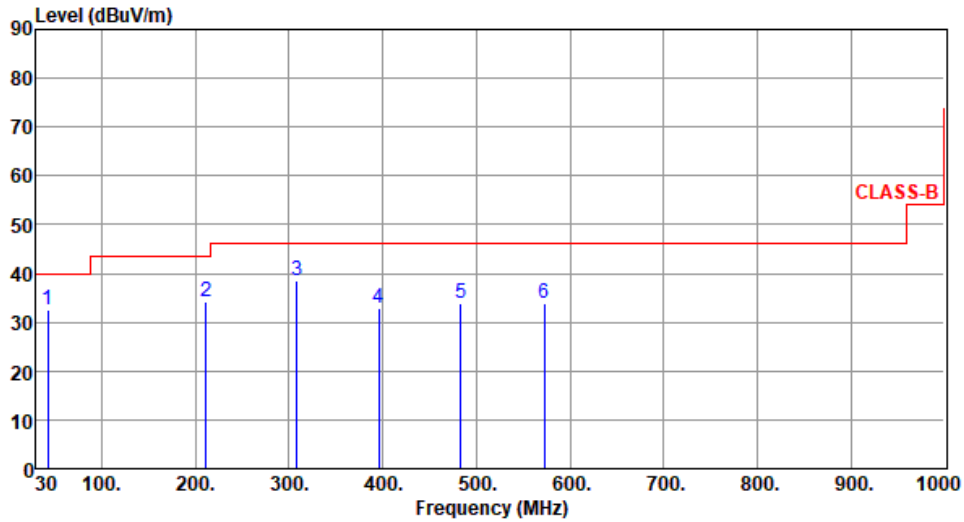

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.58	32.55	40.00	-7.45	40.56	-8.01	Peak	---	---
2	211.68	34.14	43.50	-9.36	46.02	-11.88	Peak	---	---
3	308.56	38.45	46.00	-7.55	46.17	-7.72	Peak	---	---
4	395.65	32.96	46.00	-13.04	38.63	-5.67	Peak	---	---
5	483.81	33.94	46.00	-12.06	37.37	-3.43	Peak	---	---
6	572.45	33.82	46.00	-12.18	35.44	-1.62	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz)

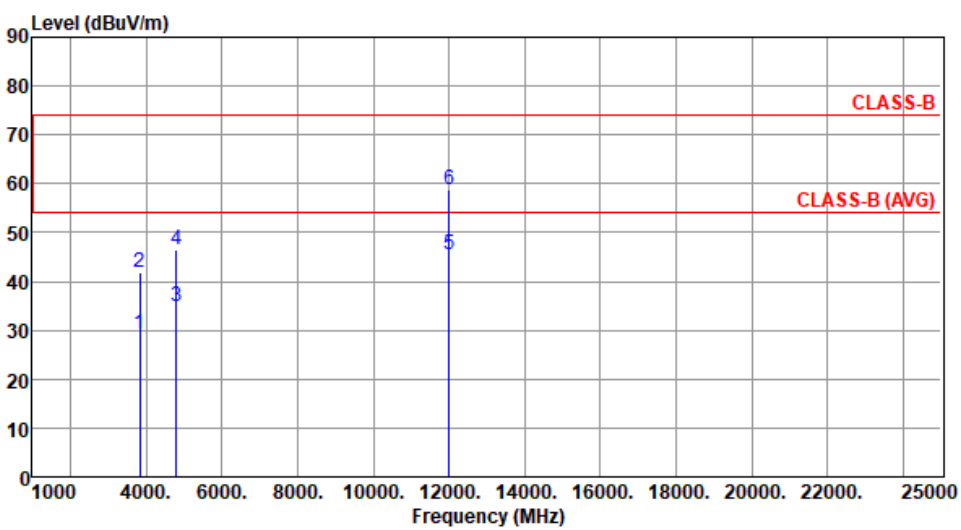Modulation	BT LE	Test Freq. (MHz)	2402																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By : BRAD WU Temperature(°C): 24 Humidity(%): 63																																																																																																																																						
																																																																																																																																						
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>3843.20</td> <td>3843.20</td> <td>4804.00</td> <td>4804.00</td> <td>12010.00</td> <td>12010.00</td> </tr> <tr> <td>29.35</td> <td>41.82</td> <td>34.86</td> <td>46.35</td> <td>45.36</td> <td>58.74</td> </tr> <tr> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> <td>54.00</td> <td>74.00</td> </tr> <tr> <td>-24.65</td> <td>-32.18</td> <td>-19.14</td> <td>-27.65</td> <td>-8.64</td> <td>-15.26</td> </tr> <tr> <td>28.43</td> <td>40.90</td> <td>31.33</td> <td>42.82</td> <td>31.64</td> <td>45.02</td> </tr> <tr> <td>0.92</td> <td>0.92</td> <td>3.53</td> <td>3.53</td> <td>13.72</td> <td>13.72</td> </tr> <tr> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> <td>Average</td> <td>Peak</td> </tr> <tr> <td>100</td> <td>100</td> <td>100</td> <td>100</td> <td>100</td> <td>100</td> </tr> <tr> <td>28</td> <td>28</td> <td>195</td> <td>195</td> <td>31</td> <td>31</td> </tr> </tbody> </table>	1	2	3	4	5	6	3843.20	3843.20	4804.00	4804.00	12010.00	12010.00	29.35	41.82	34.86	46.35	45.36	58.74	54.00	74.00	54.00	74.00	54.00	74.00	-24.65	-32.18	-19.14	-27.65	-8.64	-15.26	28.43	40.90	31.33	42.82	31.64	45.02	0.92	0.92	3.53	3.53	13.72	13.72	Average	Peak	Average	Peak	Average	Peak	100	100	100	100	100	100	28	28	195	195	31	31	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>3843.20</td> <td>29.35</td> <td>54.00</td> <td>-24.65</td> <td>28.43</td> <td>0.92</td> <td>Average</td> <td>100</td> <td>28</td> </tr> <tr> <td>3843.20</td> <td>41.82</td> <td>74.00</td> <td>-32.18</td> <td>40.90</td> <td>0.92</td> <td>Peak</td> <td>100</td> <td>28</td> </tr> <tr> <td>4804.00</td> <td>34.86</td> <td>54.00</td> <td>-19.14</td> <td>31.33</td> <td>3.53</td> <td>Average</td> <td>100</td> <td>195</td> </tr> <tr> <td>4804.00</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>42.82</td> <td>3.53</td> <td>Peak</td> <td>100</td> <td>195</td> </tr> <tr> <td>12010.00</td> <td>45.36</td> <td>54.00</td> <td>-8.64</td> <td>31.64</td> <td>13.72</td> <td>Average</td> <td>100</td> <td>31</td> </tr> <tr> <td>12010.00</td> <td>58.74</td> <td>74.00</td> <td>-15.26</td> <td>45.02</td> <td>13.72</td> <td>Peak</td> <td>100</td> <td>31</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				3843.20	29.35	54.00	-24.65	28.43	0.92	Average	100	28	3843.20	41.82	74.00	-32.18	40.90	0.92	Peak	100	28	4804.00	34.86	54.00	-19.14	31.33	3.53	Average	100	195	4804.00	46.35	74.00	-27.65	42.82	3.53	Peak	100	195	12010.00	45.36	54.00	-8.64	31.64	13.72	Average	100	31	12010.00	58.74	74.00	-15.26	45.02	13.72	Peak	100	31
1	2	3	4	5	6																																																																																																																																	
3843.20	3843.20	4804.00	4804.00	12010.00	12010.00																																																																																																																																	
29.35	41.82	34.86	46.35	45.36	58.74																																																																																																																																	
54.00	74.00	54.00	74.00	54.00	74.00																																																																																																																																	
-24.65	-32.18	-19.14	-27.65	-8.64	-15.26																																																																																																																																	
28.43	40.90	31.33	42.82	31.64	45.02																																																																																																																																	
0.92	0.92	3.53	3.53	13.72	13.72																																																																																																																																	
Average	Peak	Average	Peak	Average	Peak																																																																																																																																	
100	100	100	100	100	100																																																																																																																																	
28	28	195	195	31	31																																																																																																																																	
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																																																																																	
3843.20	29.35	54.00	-24.65	28.43	0.92	Average	100	28																																																																																																																														
3843.20	41.82	74.00	-32.18	40.90	0.92	Peak	100	28																																																																																																																														
4804.00	34.86	54.00	-19.14	31.33	3.53	Average	100	195																																																																																																																														
4804.00	46.35	74.00	-27.65	42.82	3.53	Peak	100	195																																																																																																																														
12010.00	45.36	54.00	-8.64	31.64	13.72	Average	100	31																																																																																																																														
12010.00	58.74	74.00	-15.26	45.02	13.72	Peak	100	31																																																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																						

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):24 Humidity(%):63

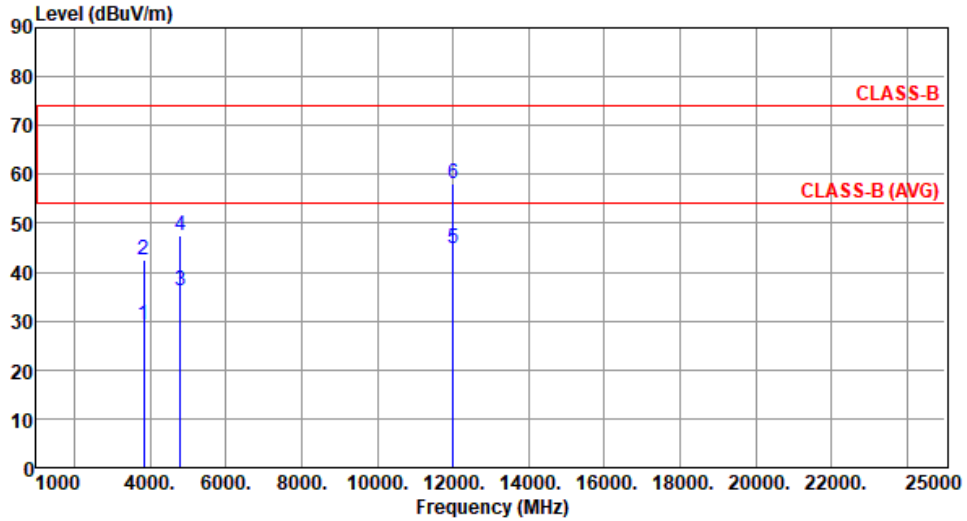

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3843.20	29.21	54.00	-24.79	28.29	0.92	Average	100	33
2	3843.20	42.58	74.00	-31.42	41.66	0.92	Peak	100	33
3	4804.00	36.32	54.00	-17.68	32.79	3.53	Average	100	342
4	4804.00	47.61	74.00	-26.39	44.08	3.53	Peak	100	342
5	12010.00	44.89	54.00	-9.11	31.17	13.72	Average	100	56
6	12010.00	58.25	74.00	-15.75	44.53	13.72	Peak	100	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Configuration 4

3.5.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Horizontal		

Test By :BRAD WU Temperature(°C):23 Humidity(%):64

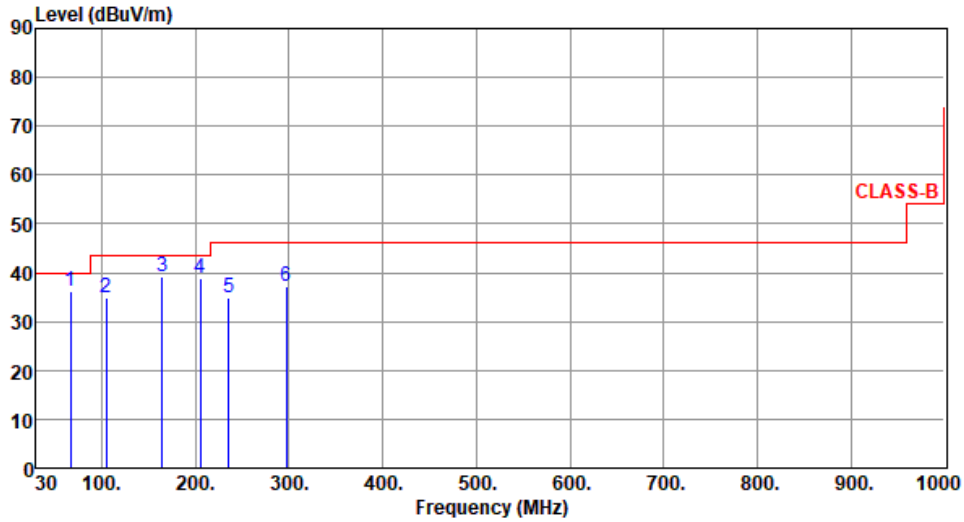

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	66.86	36.18	40.00	-3.82	46.13	-9.95	Peak	---	---
2	104.69	34.77	43.50	-8.73	47.04	-12.27	Peak	---	---
3	164.83	39.03	43.50	-4.47	47.86	-8.83	Peak	---	---
4	205.57	38.73	43.50	-4.77	50.53	-11.80	Peak	---	---
5	235.64	34.98	46.00	-11.02	45.77	-10.79	Peak	---	---
6	296.75	37.35	46.00	-8.65	45.53	-8.18	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	BT LE	Test Freq. (MHz)	2402
Polarization	Vertical		

Test By :BRAD WU Temperature(°C):23 Humidity(%):64

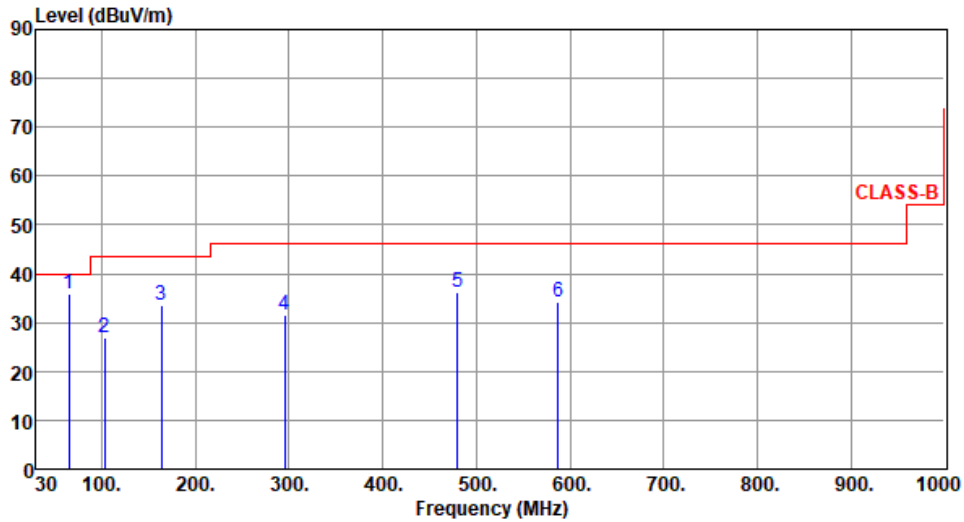

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	64.92	35.72	40.00	-4.28	45.17	-9.45	Peak	---	---
2	102.75	26.92	43.50	-16.58	39.66	-12.74	Peak	---	---
3	163.86	33.55	43.50	-9.95	42.37	-8.82	Peak	---	---
4	295.78	31.45	46.00	-14.55	39.65	-8.20	Peak	---	---
5	480.08	36.28	46.00	-9.72	39.72	-3.44	Peak	---	---
6	587.75	34.15	46.00	-11.85	35.29	-1.14	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.5.10 Transmitter Conducted Unwanted Emissions (Below 1 GHz)

Configuration 1

Modulation Mode		BT LE		Frequency		2402MHz	
Range (MHz)	Max Value (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000	-64.43	2.79	4.70	-56.94	38.32	40.00	-1.68

Note:

1. GRF = Ground Reflection Factor.
2. DG = Directional Gain.
3. Worst case of emission limit below 1GHz is selected to be limit.

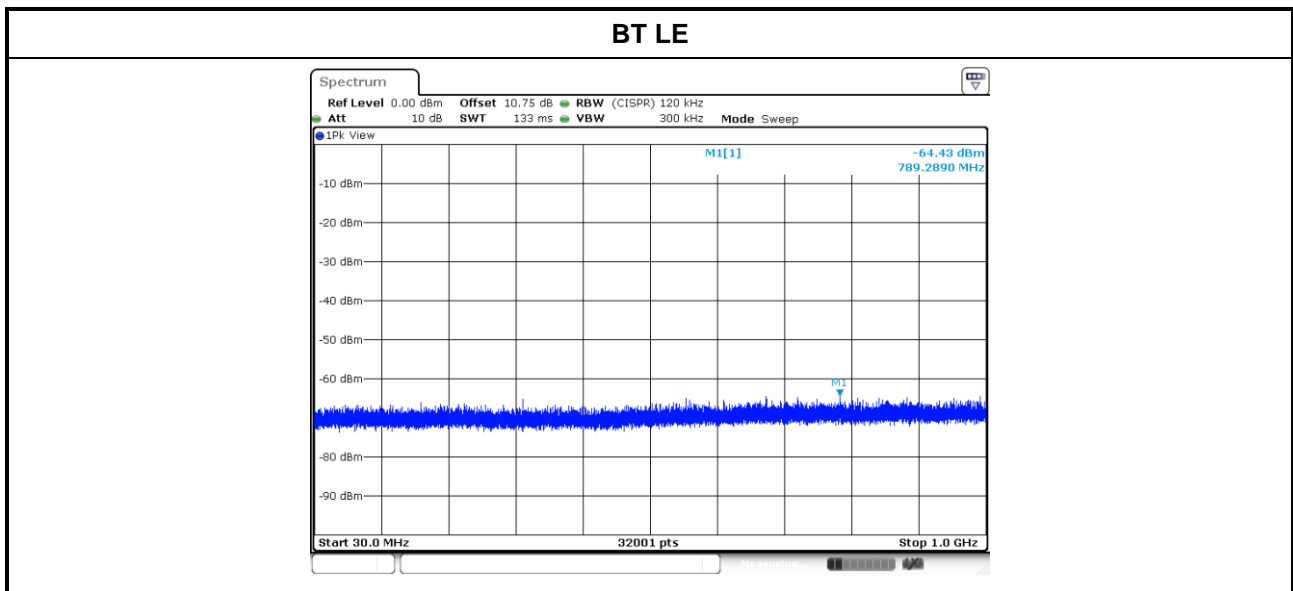


Configuration 3

Modulation Mode		BT LE		Frequency		2402MHz	
Range (MHz)	Max Value (dBm)	DG (dBi)	GRF (dB)	EIRP (dBm)	E-Field (dBuV/m)	Min E-Field Limit (dBuV/m)	E-Field Margin (dB)
30~1000	-65.04	2.79	4.70	-57.55	37.71	40.00	-2.29


Note:

1. GRF = Ground Reflection Factor.
2. DG = Directional Gain.
3. Worst case of emission limit below 1GHz is selected to be limit.

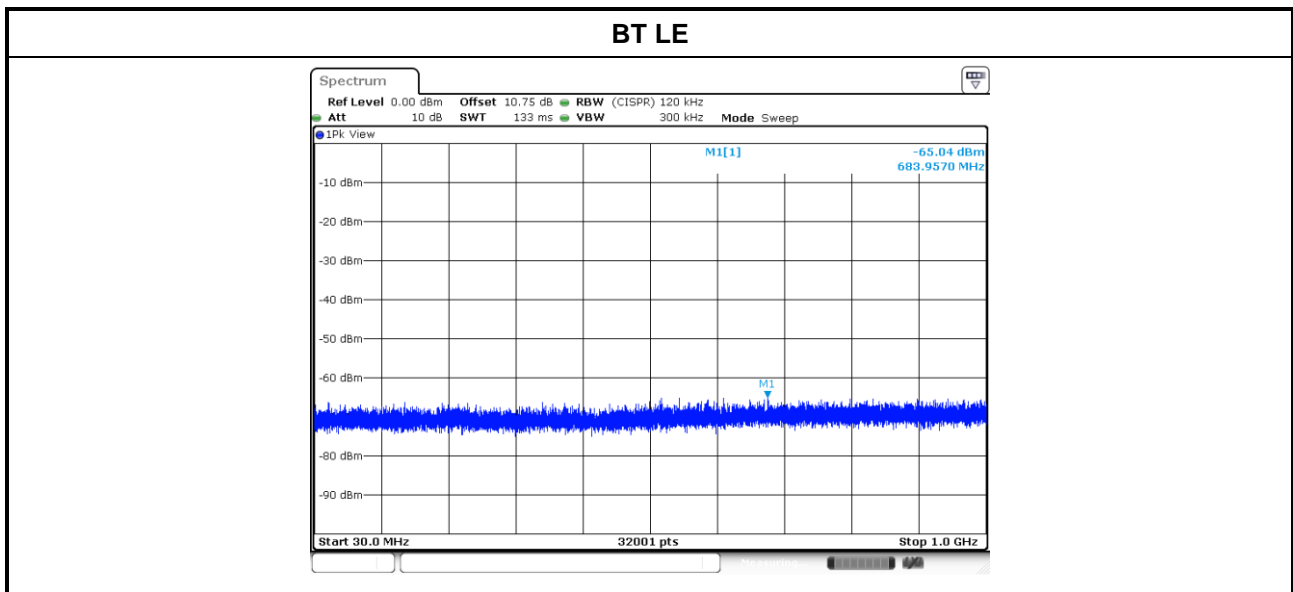


3.5.11 Transmitter Conducted Unwanted Emissions (Above 1GHz)

Configuration 1

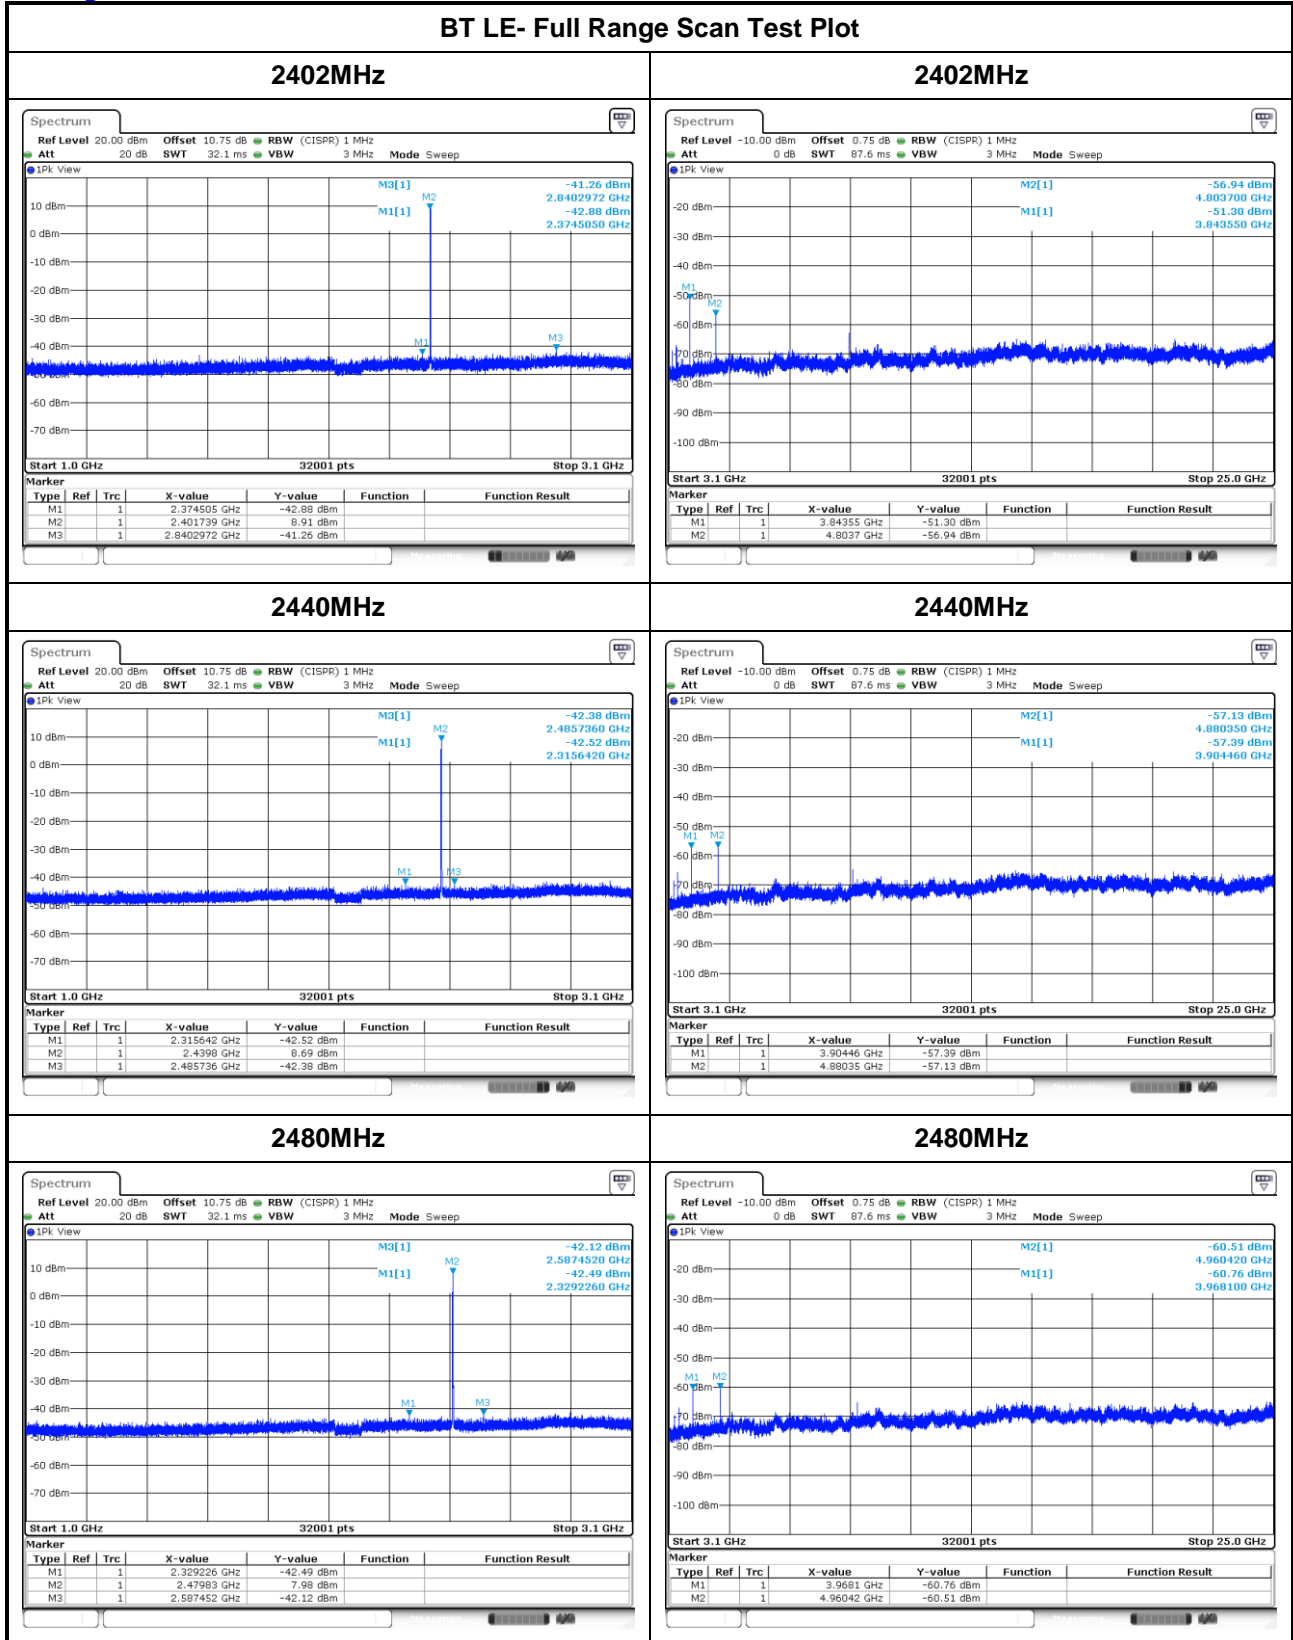

Configuration 3

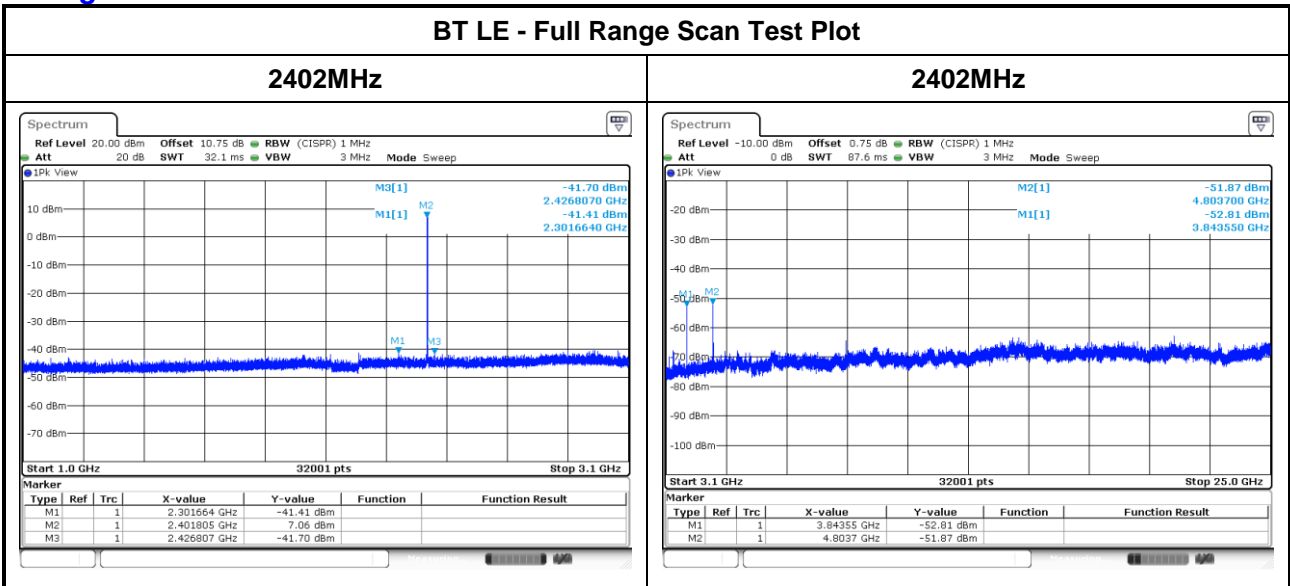

Configuration 1

Transmitter Conducted Unwanted Emissions Results in Band Edge								
Modulation Mode		BT LE						
Test ch. Freq. (MHz)	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark
2402	2310~2390	-43.55	2.79	-40.76	54.50	74.00	-19.50	PK
	2310~2390	-55.29	2.79	-52.50	42.76	54.00	-11.24	AV
	2483.5~2500	-43.06	2.79	-40.27	54.99	74.00	-19.01	PK
	2483.5~2500	-55.02	2.79	-52.23	43.03	54.00	-10.97	AV
2440	2310~2390	-43.48	2.79	-40.69	54.57	74.00	-19.43	PK
	2310~2390	-55.88	2.79	-53.09	42.17	54.00	-11.83	AV
	2483.5~2500	-43.28	2.79	-40.49	54.77	74.00	-19.23	PK
	2483.5~2500	-55.86	2.79	-53.07	42.19	54.00	-11.81	AV
2480	2310~2390	-43.08	2.79	-40.29	54.97	74.00	-19.03	PK
	2310~2390	-56.43	2.79	-53.64	41.62	54.00	-12.38	AV
	2485.5~2500	-43.48	2.79	-40.69	54.57	74.00	-19.43	PK
	2483.5~2500	-55.44	2.79	-52.65	42.61	54.00	-11.39	AV

Note: DG = Directional Gain.

Configuration 3


Transmitter Conducted Unwanted Emissions Results in Band Edge								
Modulation Mode		BT LE						
Test ch. Freq. (MHz)	Range (MHz)	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)	Remark
2402	2310~2390	-41.90	2.79	-39.11	56.15	74.00	-17.85	PK
	2310~2390	-55.14	2.79	-52.35	42.91	54.00	-11.09	AV
	2483.5~2500	-41.43	2.79	-38.64	56.62	74.00	-17.38	PK
	2483.5~2500	-55.15	2.79	-52.36	42.90	54.00	-11.10	AV

Note: DG = Directional Gain.


Configuration 1

Band Edge Test Plot - BT LE


2402MHz - AV

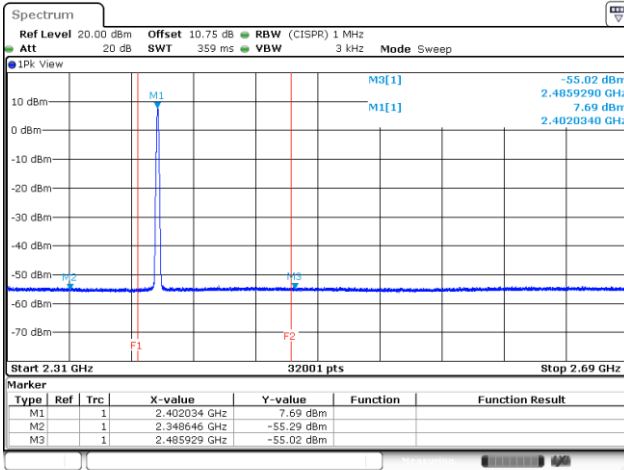


2402MHz - PK

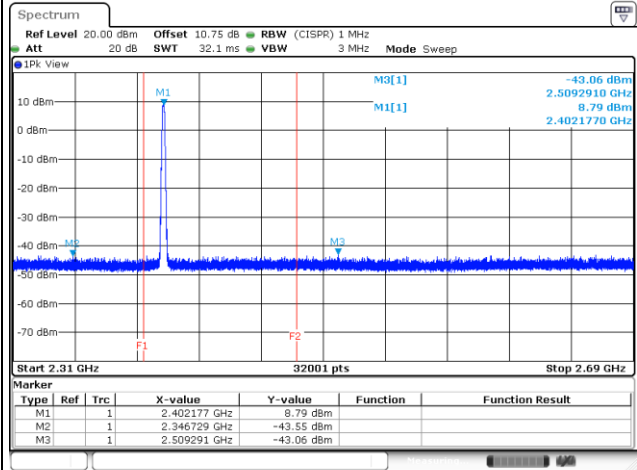


2440MHz - AV

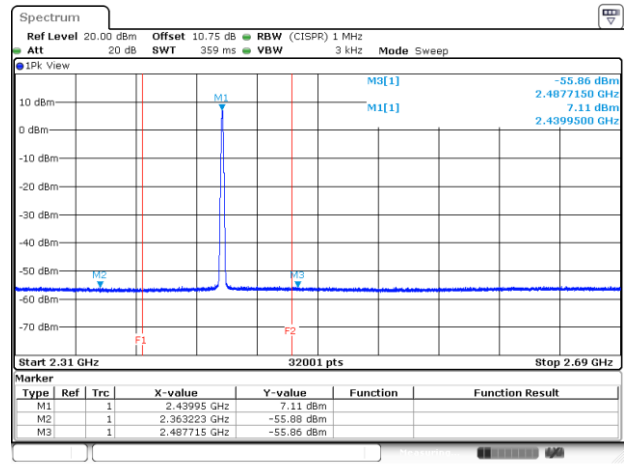


2440MHz - PK

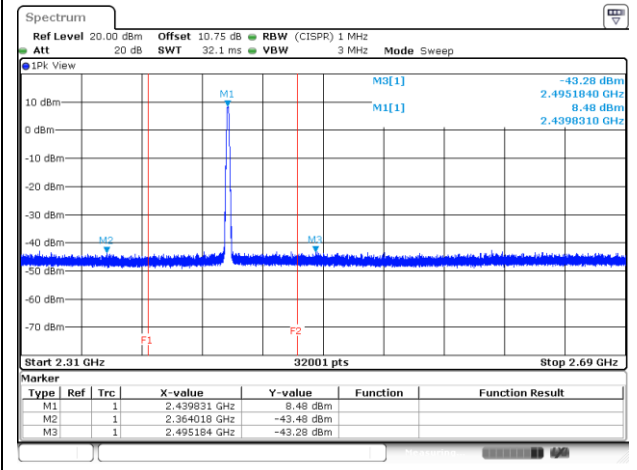


2480MHz - AV

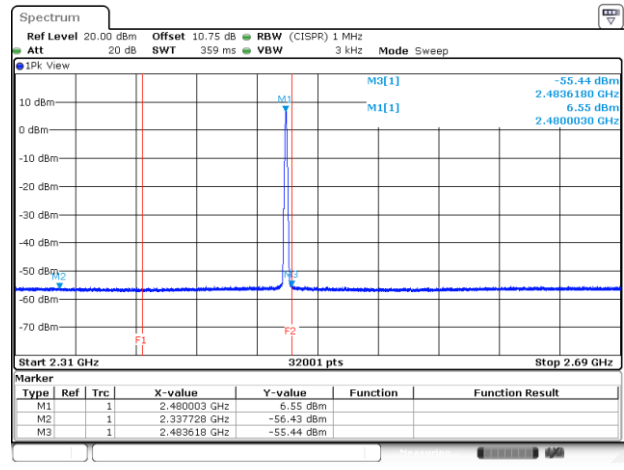

2480MHz - PK

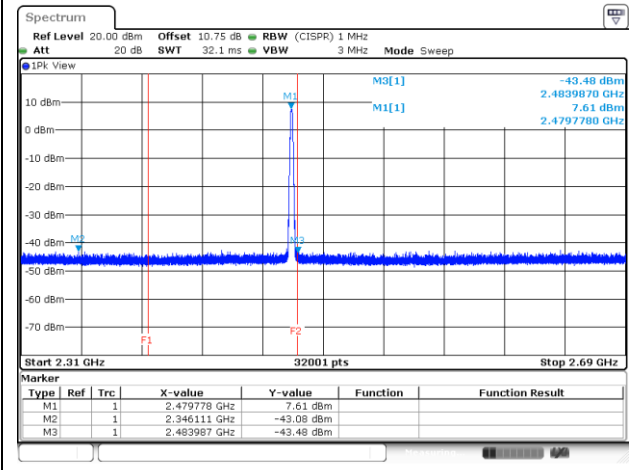

Configuration 3

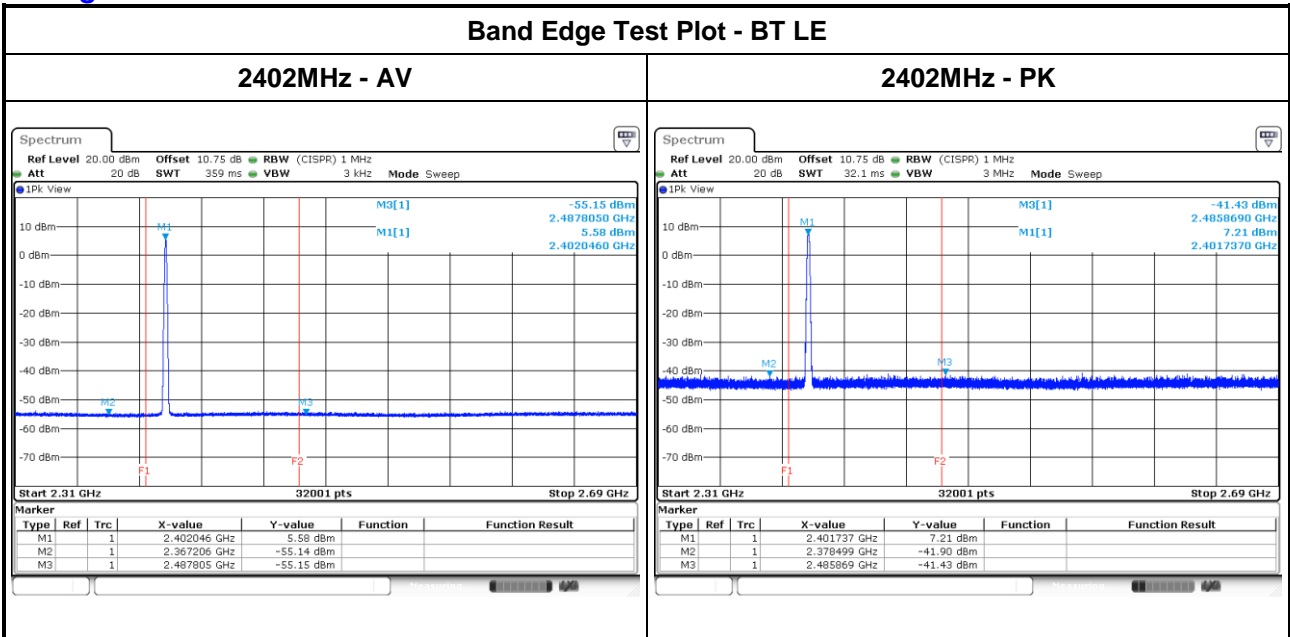

Configuration 1

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode		BT LE		Frequency		2402MHz	
Freq. (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
3843.20	PK	-50.74	2.79	-47.95	47.31	74.00	-26.69
4804.00	PK	-50.72	2.79	-47.93	47.33	74.00	-26.67

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode		BT LE		Frequency		2440MHz	
Freq. (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
3904.00	PK	-55.07	2.79	-52.28	42.98	74.00	-31.02
4880.00	PK	-57.05	2.79	-54.26	41.00	74.00	-33.00


Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode		BT LE		Frequency		2480MHz	
Freq. (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
3968.00	PK	-58.51	2.79	-55.72	39.54	74.00	-34.46
4960.00	PK	-59.72	2.79	-56.93	38.33	74.00	-35.67

Note:


1. If the PK margin greater than 20 dB, there is no need to get AVG reading.
2. DG = Directional Gain.

Test Plots


2402MHz - PK

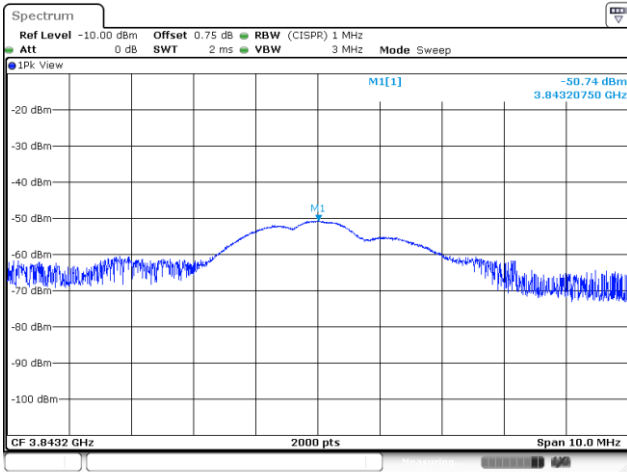


2402MHz - PK

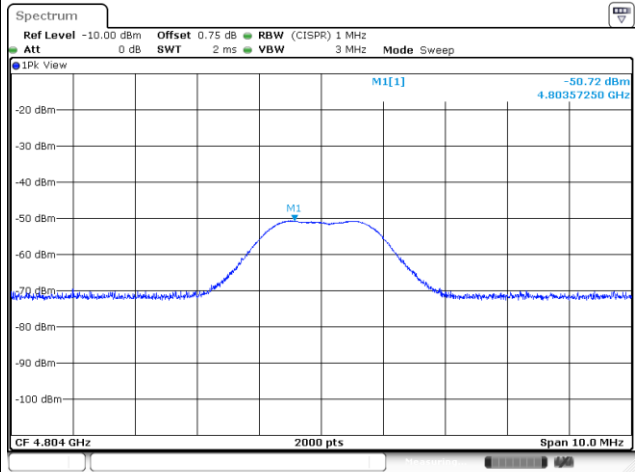


2440MHz - PK

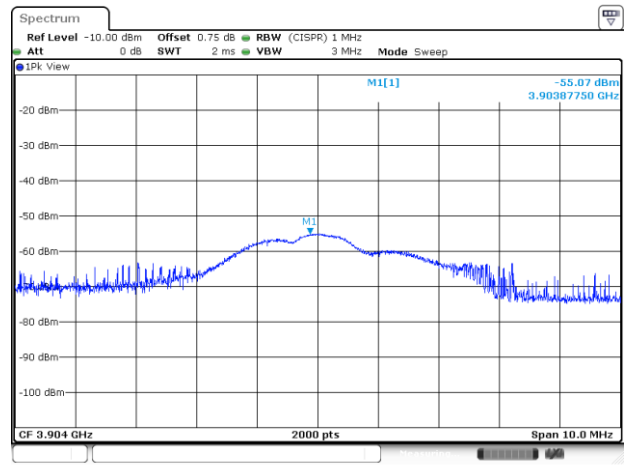


2440MHz - PK

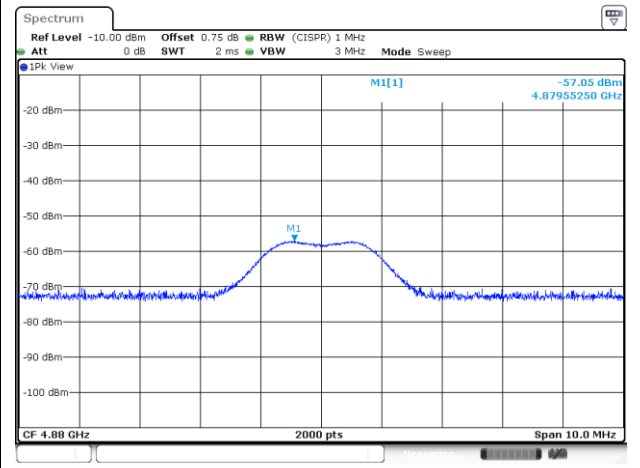

2480MHz - PK

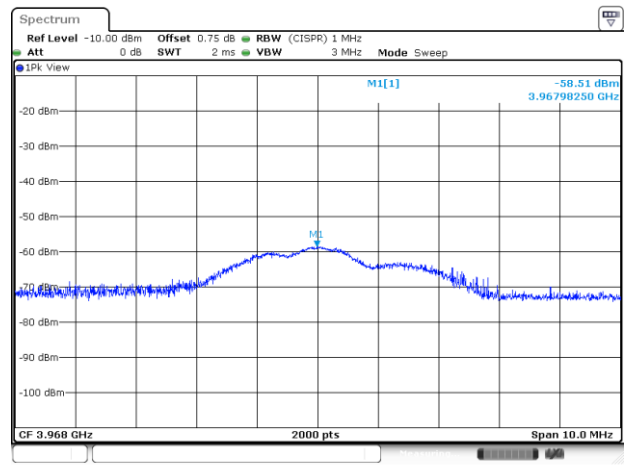

2480MHz - PK

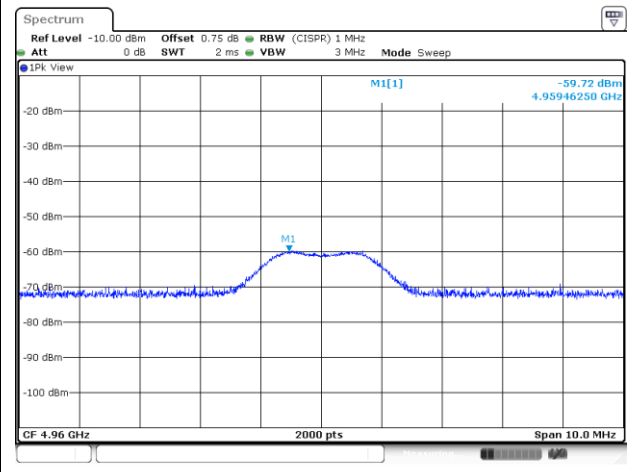


Configuration 3

Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band							
Modulation Mode		BT LE		Frequency		2402MHz	
Freq. (MHz)	Remark	Max Value (dBm)	DG (dBi)	EIRP (dBm)	E-Field (dBuV/m)	E-Field Limit (dBuV/m)	E-Field Margin (dB)
3843.20	PK	-51.66	2.79	-48.87	46.39	74.00	-27.61
4804.00	PK	-51.15	2.79	-48.36	46.90	74.00	-27.10

Note:

1. If the PK margin greater than 20 dB, there is no need to get AVG reading.
2. DG = Directional Gain.

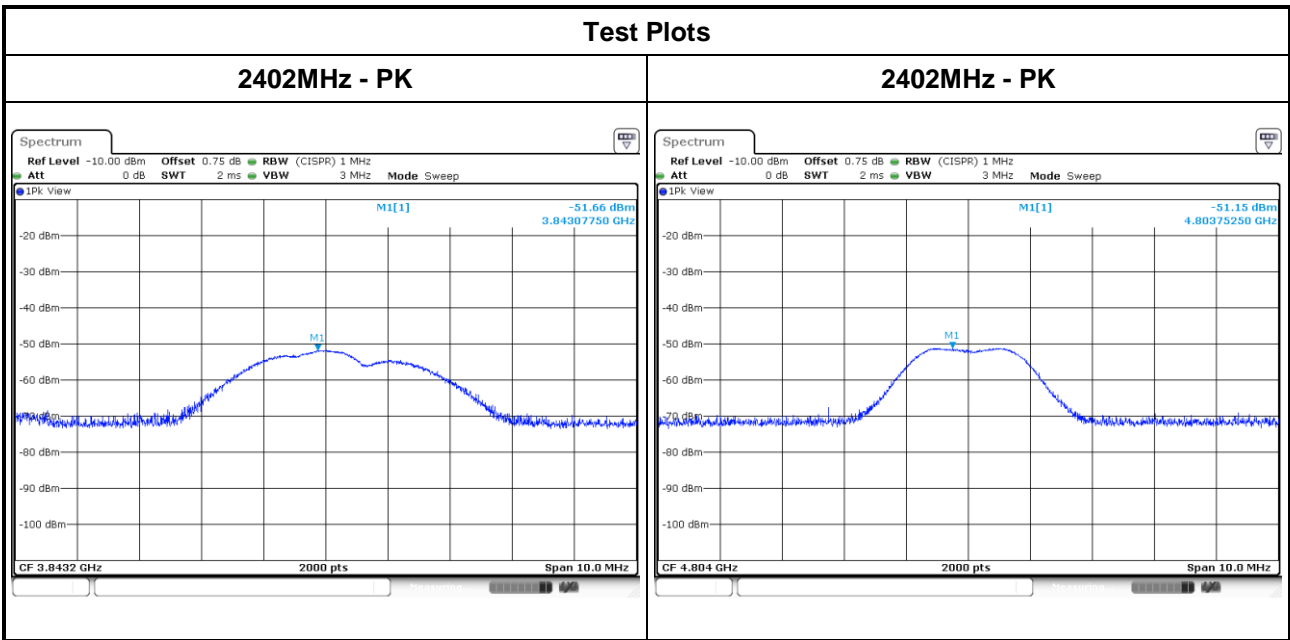

3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level


3.6.3 Test Setup

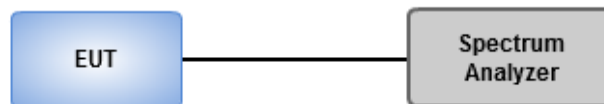


3.6.4 Test Result of Emissions in non-restricted Frequency Bands


Ambient Condition	23°C / 61%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Configuration 1

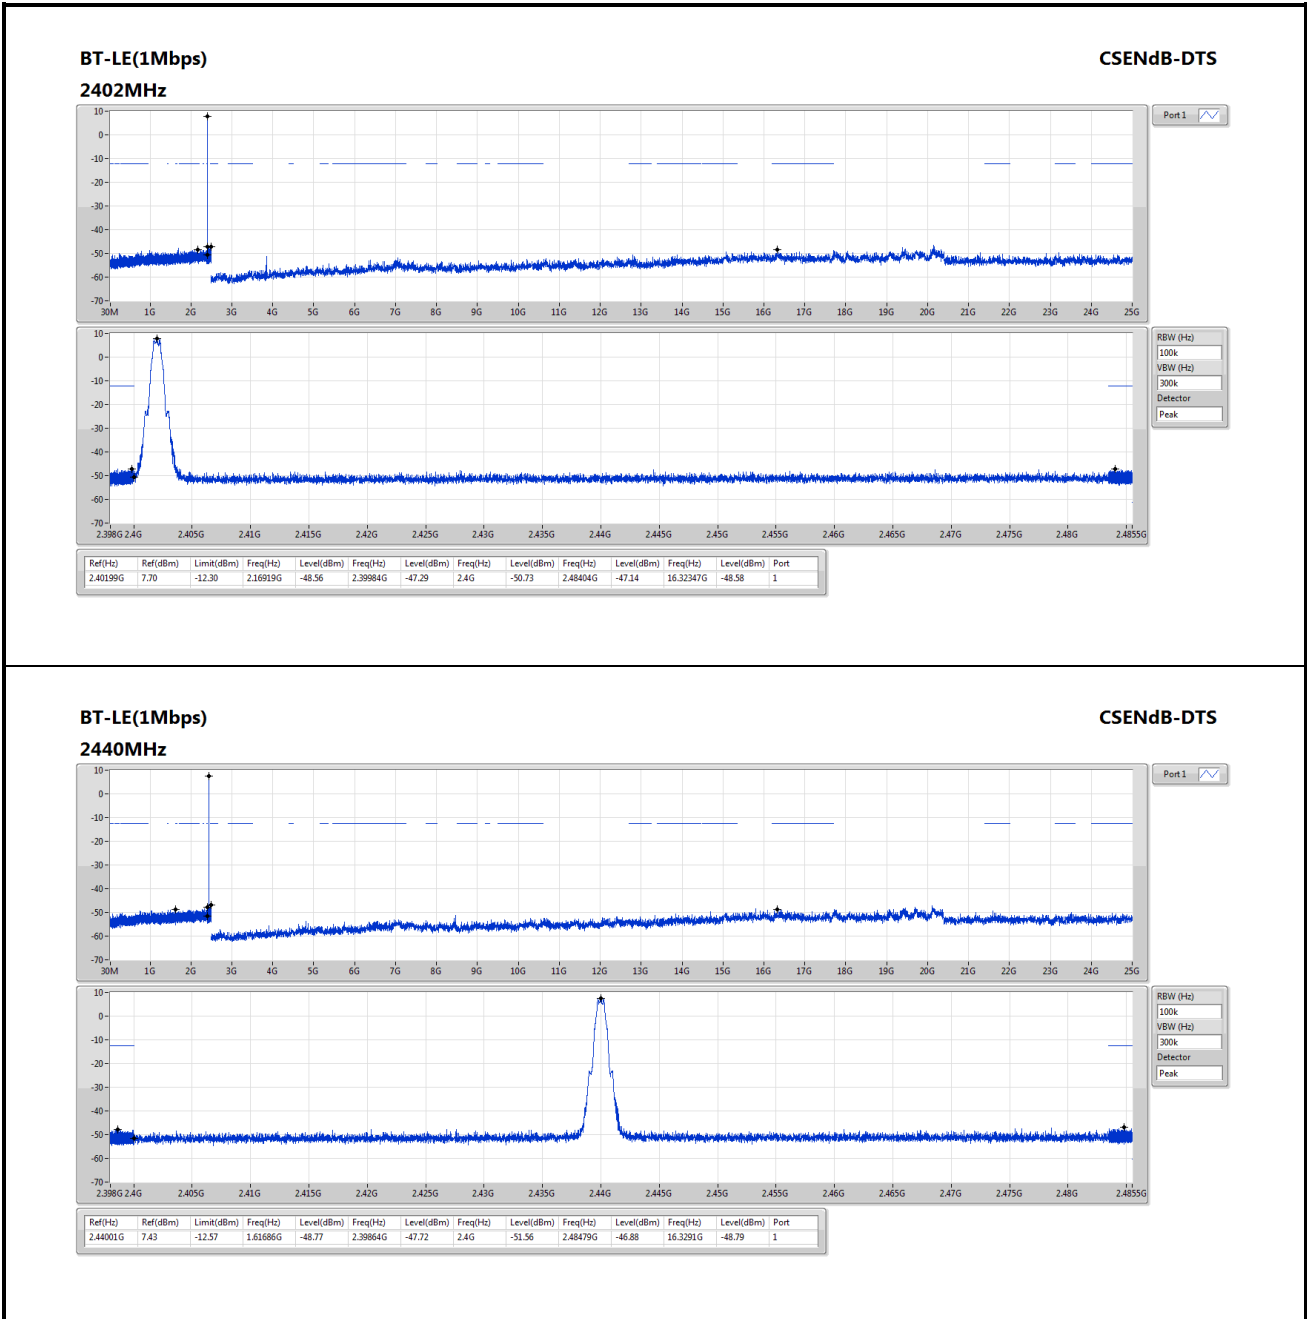

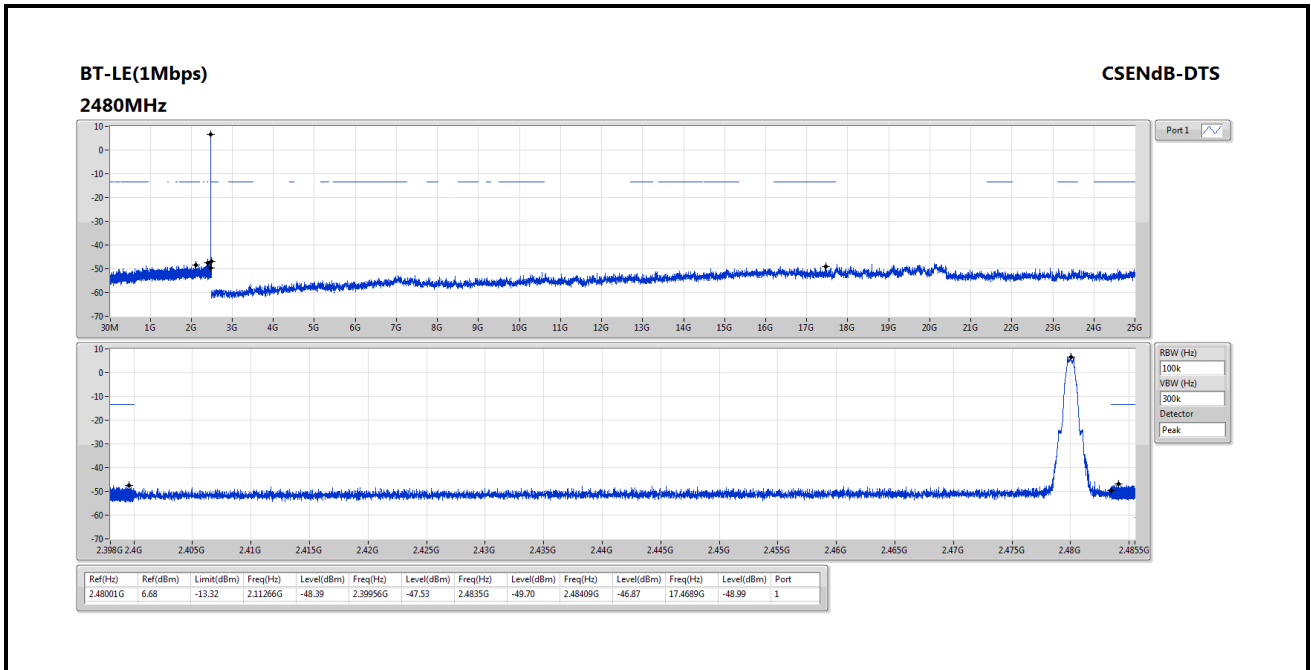

Configuration 3

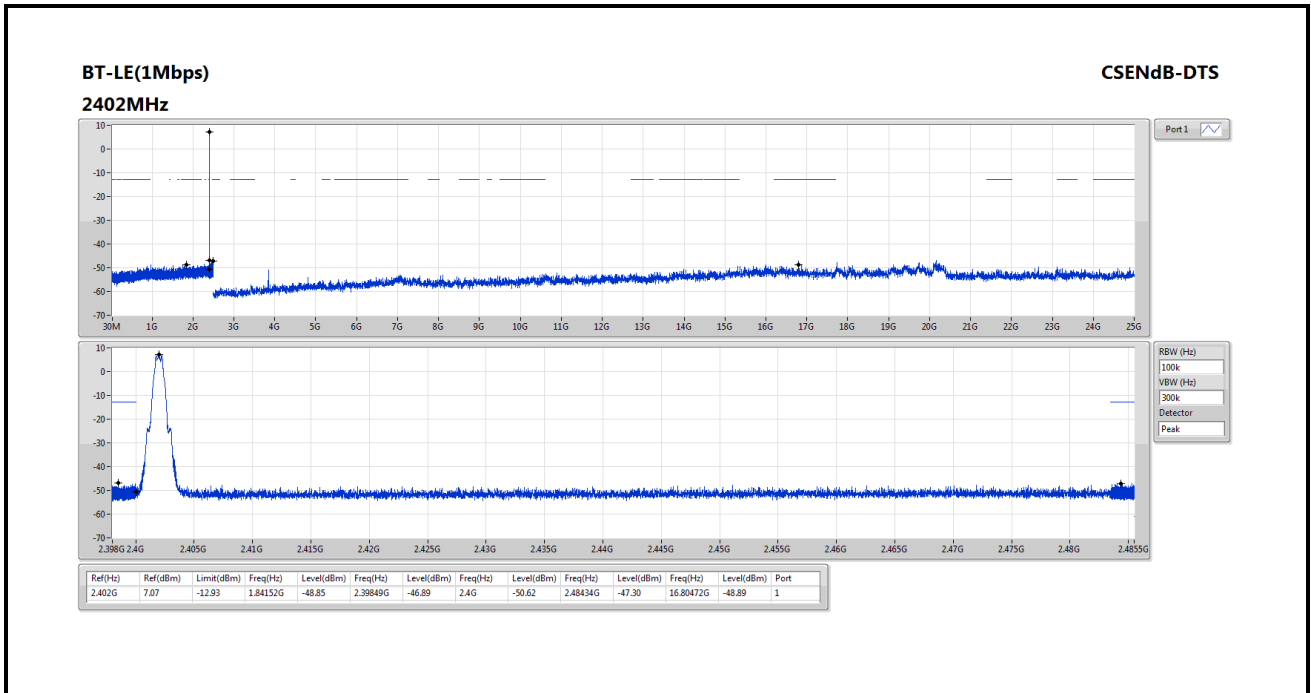

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==