




RADIO REPORT FCC 47 CFR Part 15C ISED Canada RSS-247 Digital transmission systems operating within the 902.0 - 928.0 MHz band	
Report Reference No	G0M-2002-8805-TFC247DT-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 <p>DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970</p>
Applicant	Laird Connectivity Inc
Address	50 South Main Street 44308 Akron, OH United States of America
Test Specification	47 CFR Part 15C RSS-247, Issue 2, 2017-02 RSS-Gen, Issue 5, Amendment 1, 2019-03
Non-Standard Test Method	None
Equipment under Test (EUT):	
Product Description	915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants
Model(s)	RG191+LTE Series
Additional Model(s)	None
Brand Name(s)	Laird Connectivity
Hardware Version(s)	v750.03.224
Software Version(s)	v93.9.5.1
FCC-ID	SQG-RG191NALTE
IC	3147A-RG191NALTE
Test Result	PASSED

Possible test case verdicts:		
Required by standard but not tested	N/T	
Not required by standard	N/R	
Not applicable to EUT	N/A	
Test object does meet the requirement	P(PASS)	
Test object does not meet the requirement	F(FAIL)	
Testing:		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2020-06-18 (sample ID 29796) 2020-08-12 (sample ID 30742)	
Report:		
Compiled by	Toralf Jahn	
Tested by (+ signature) (Responsible for Test)	Toralf Jahn	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2020-09-10	
Total number of pages	49	
General Remarks:		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
Additional Comments:		

VERSION HISTORY

Version History			
Version	Issue Date	Remarks	Revised By
01	2020-09-10	Initial Release	

ABBREVIATIONS AND ACRONYMS

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V _{NOM}	Nominal supply voltage



REPORT INDEX

1	Equipment (Test Item) Under Test.....	6
1.1	Photos – Equipment External.....	7
1.2	Photos – Equipment Internal.....	13
1.3	Photos – Test Setup.....	16
1.4	Support Equipment.....	18
1.5	Test Modes.....	19
1.6	Test Frequencies.....	20
1.7	Sample emission level calculation.....	21
2	Result Summary.....	22
3	Test Conditions and Results.....	23
3.1	Test Conditions and Results - AC powerline conducted emissions.....	23
3.2	Test Conditions and Results - Transmitter radiated emissions.....	26
3.3	Test Conditions and Results - Receiver radiated emissions.....	29
ANNEX A	Transmitter spurious emissions.....	32
ANNEX B	Receiver spurious emissions.....	42

1 Equipment (Test Item) Under Test

Description	915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants	
Model	RG191+LTE Series	
Additional Model(s)	None	
Brand Name(s)	Laird Connectivity	
Serial Number(s)	Sample ID 29796 and 30742	
Hardware Version(s)	v750.03.224	
Software Version(s)	v93.9.5.1	
PMN	RG191+LTE Series	
HVIN	RG191+LTE	
FVIN	v93.9.5.1	
HMN	N/A	
FCC-ID	SQG-RG191NALTE	
IC	3147A-RG191NALTE	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	902.0 - 928.0 MHz	
Radio technology	Digital Modulation	
Modulation	LORA	
Number of antenna ports	1	
Radio Module	Type	LORA
	Model	RG191-M2
	Manufacturer	Laird
	HW Version	Unspecified
	SW Version	Unspecified
	FCC-ID	SQG-1001
	IC	3147A-1001
Antenna	Type	External
	Model	001-0002
	Manufacturer	Laird
	Gain	2 dBi
Supply Voltage	V_{NOM}	12 VDC
Operating Temperature	T_{NOM}	25 °C
AC/DC-Adaptor	Model	GST25U12-P1J
	Vendor	Meanwell
	Input	115 VAC
	Output	12 VDC
Manufacturer	Laird Connectivity Inc 50 South Main Street 44308 Akron, OH United States of America	

1.1 Photos – Equipment External

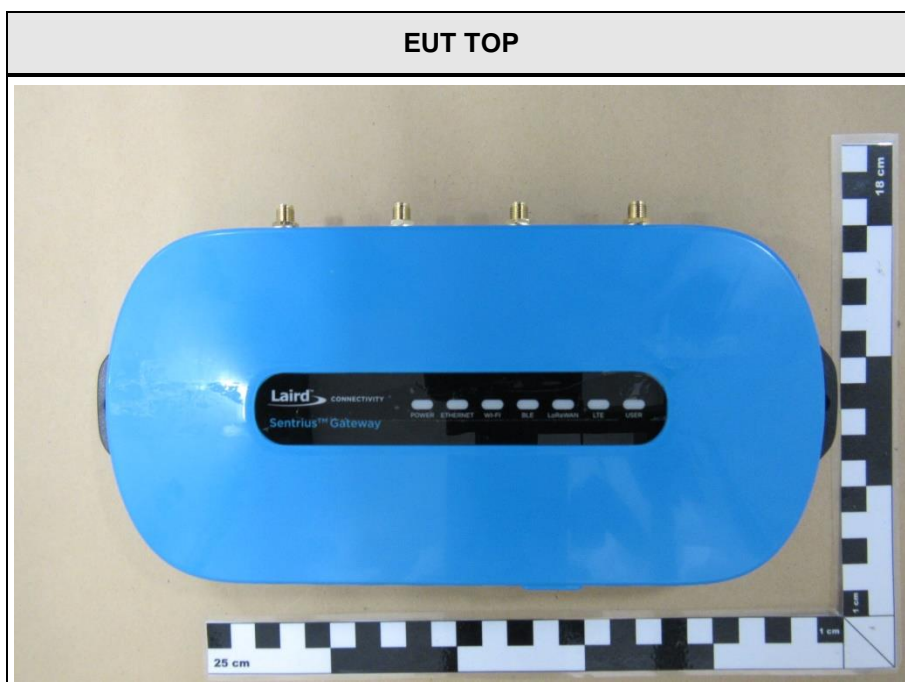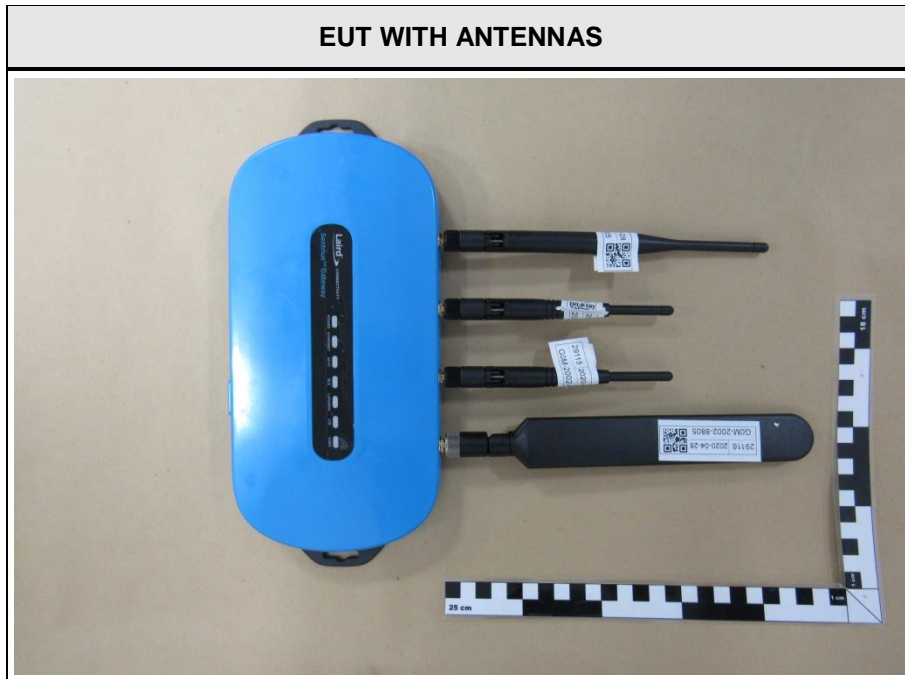




EUT ANTENNA CONNECTORS



EUT DC AND ETHERNET CONNECTOR

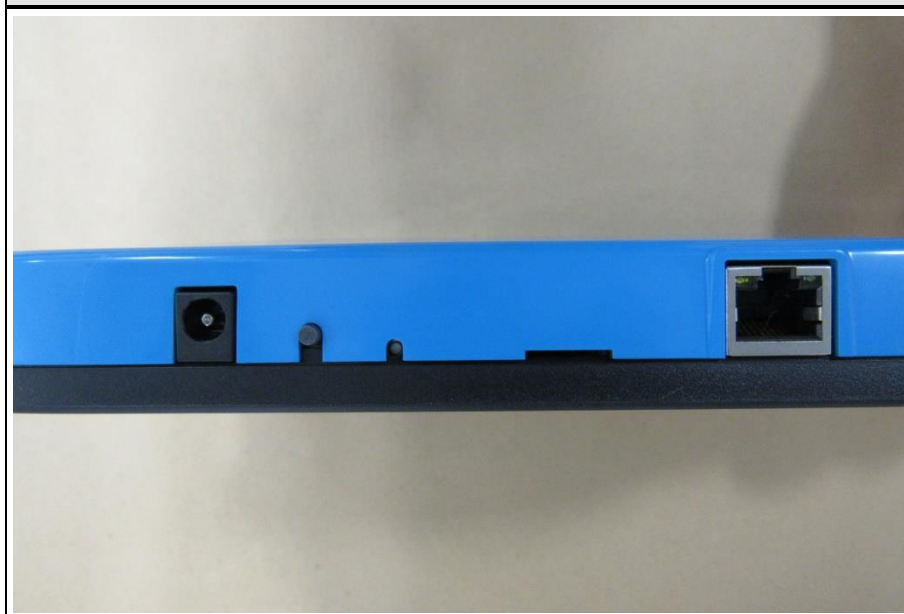

LTE ANTENNA



LoRa ANTENNA



WiFi ANTENNAS




AC/DC-ADAPTOR




AC/DC-ADAPTOR




1.2 Photos – Equipment Internal

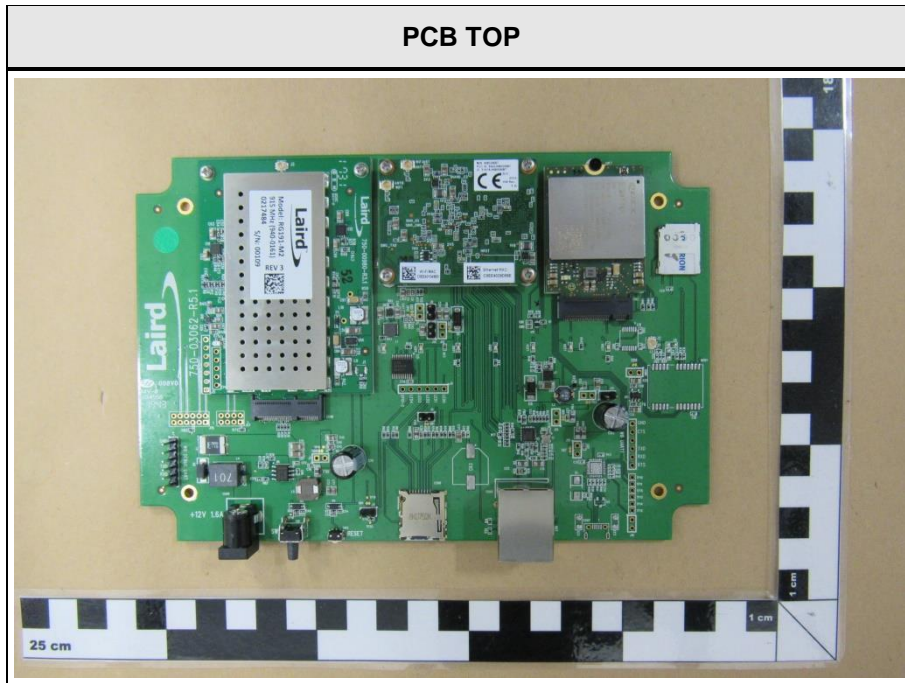


LTE AND WiFi


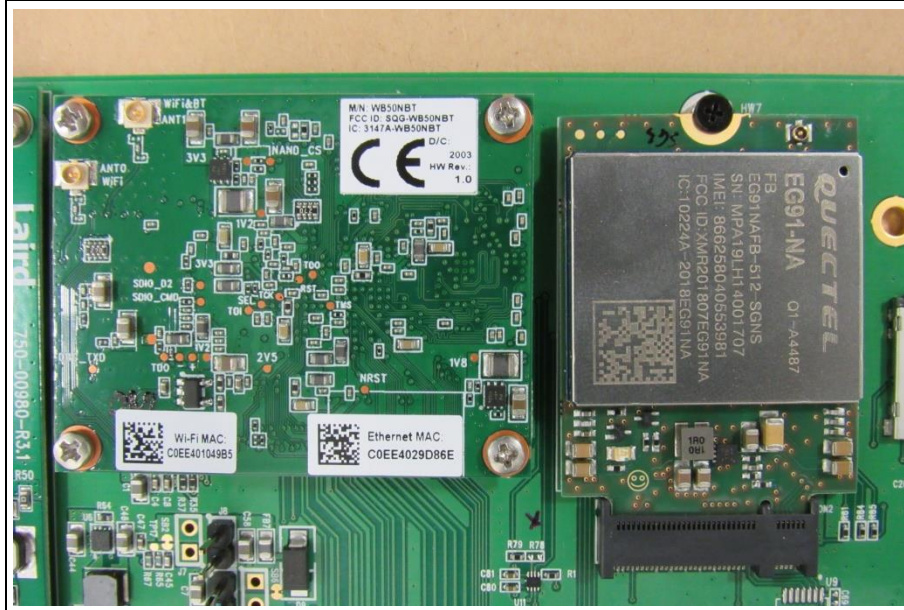


PCB BOTTOM

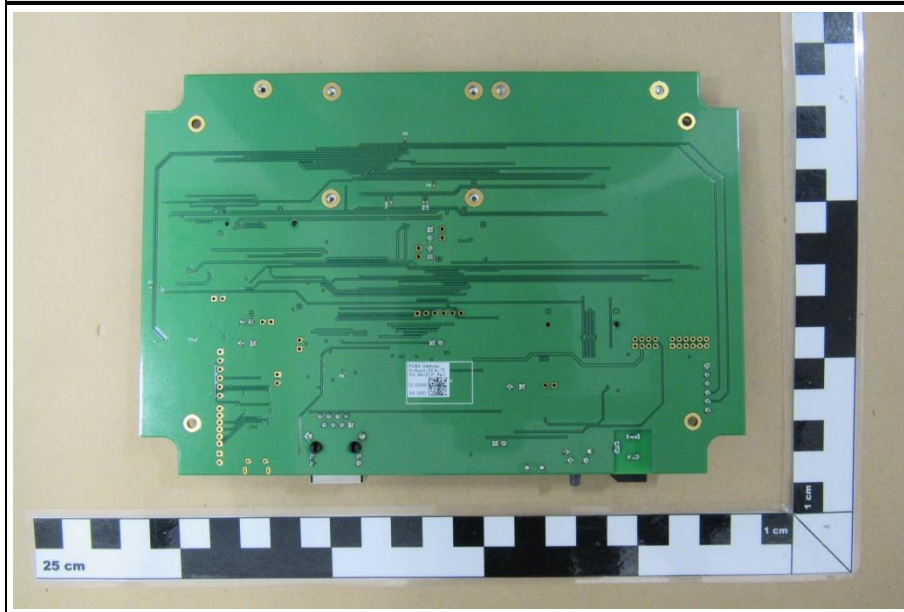

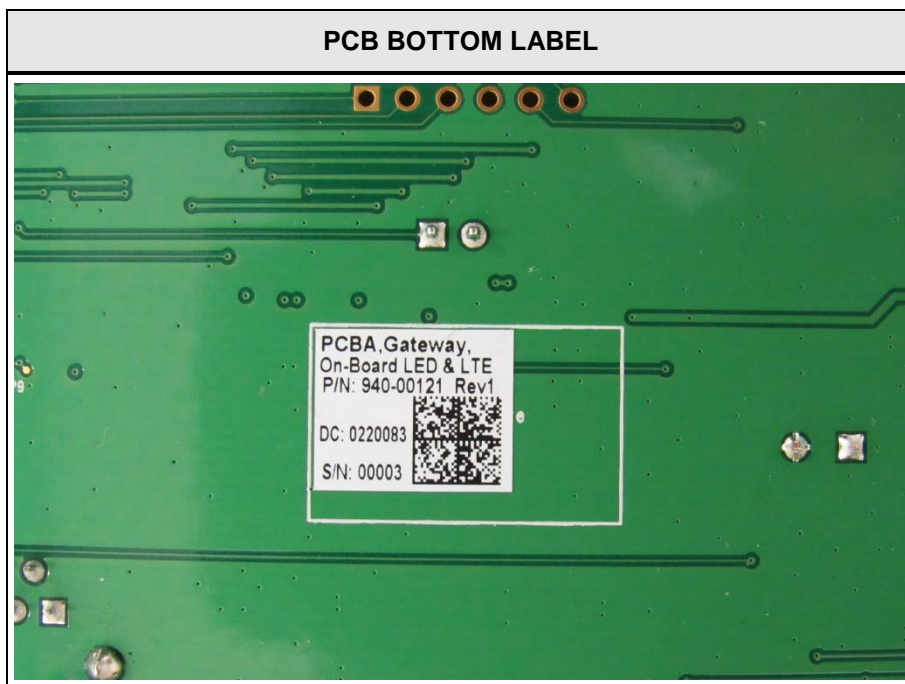

1.3 Photos – Test Setup

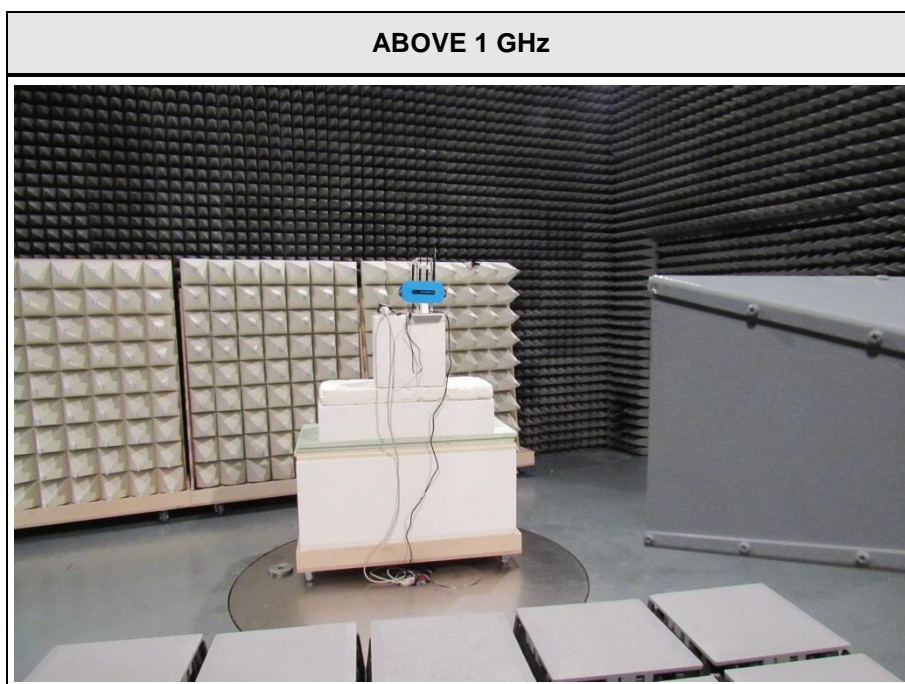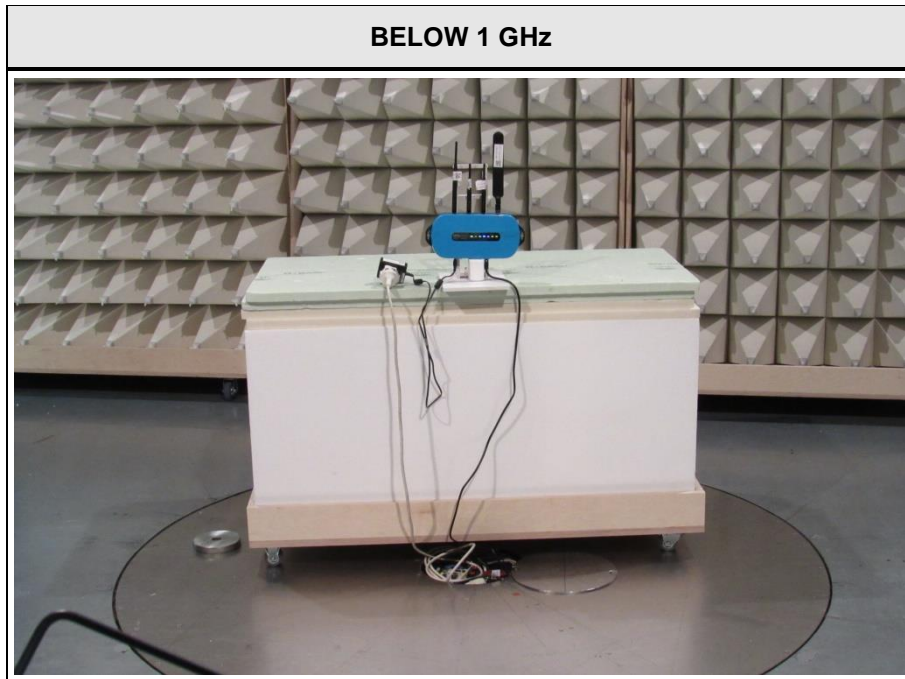

AC POWER LINE



1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
CBL	Ethernet Cable	Copartner	CAT 5.E	
AE	Ethernet Switch	Netgear	GS108	Termination of Ethernet Cable
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
SFT	Software			
Comment:				

1.5 Test Modes

Mode	Description
Transmit	Mode = Transmit Modulation = LORA Duty cycle = 100 % Radio type = SX1257 Digital gain trim = 0 Power amplifier gain trim = 3 Radio Tx mixer gain trim = 13 LoRa Spreading Factor = 12 LoRa bandwidth = 500 kHz
Receive	Mode = Receive Modulation = LORA
Comment: The above settings were found as worst case in FCC module test report # 317134 A of 2017-06-23 from Laird Technologies, Inc..	

1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	923.3

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
+21.5 dBµV + 26 dB/m		= 47.5 dBµV/m		47.5 dBµV/m - 57.0 dBµV/m		= -9.5 dB

2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
ISED RSS-Gen, Issue 5 (section 6.6)	Occupied Bandwidth	ANSI C63.10-2013	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247, Issue 2 (section 5.2)	6 dB Bandwidth	ANSI C63.10-2013	N/T	
FCC § 15.247(b)(1) ISED RSS-247, Issue 2 (section 5.4)	Maximum peak conducted power	ANSI C63.10-2013	N/T	
FCC § 15.247(e) ISED RSS-247, Issue 2 (section 5.2)	Power spectral density	ANSI C63.10-2013	N/T	
FCC § 15.207 ISED RSS-247, Issue 2 (section 3.1)	AC power line conducted emissions	ANSI C63.10-2013	PASS	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Band edge compliance	ANSI C63.10-2013	N/T	
FCC § 15.247(d) ISED RSS-247, Issue 2 (section 5.5)	Conducted spurious emissions	ANSI C63.10-2013	N/T	
FCC § 15.247(d) FCC § 15.209 ISED RSS-Gen, Issue 5 (section 6.13)	Transmitter radiated spurious emissions	ANSI C63.10-2013	PASS	
ISED RSS-247, Issue 2 (section 3.1)	Receiver radiated spurious emissions	ANSI C63.10-2013	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

3 Test Conditions and Results

3.1 Test Conditions and Results - AC powerline conducted emissions

3.1.1 Information


Test Information	
Reference	FCC § 15.207; ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.2
Measurement Uncertainty	± 3.82 dB
Operator	Toralf Jahn
Date	2020-06-30

3.1.2 Limits

Limits		
Frequency [MHz]	Quasi-Peak [dBµV]	Average [dBµV]
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Limit decreases linearly with the logarithm of the frequency

3.1.3 Setup

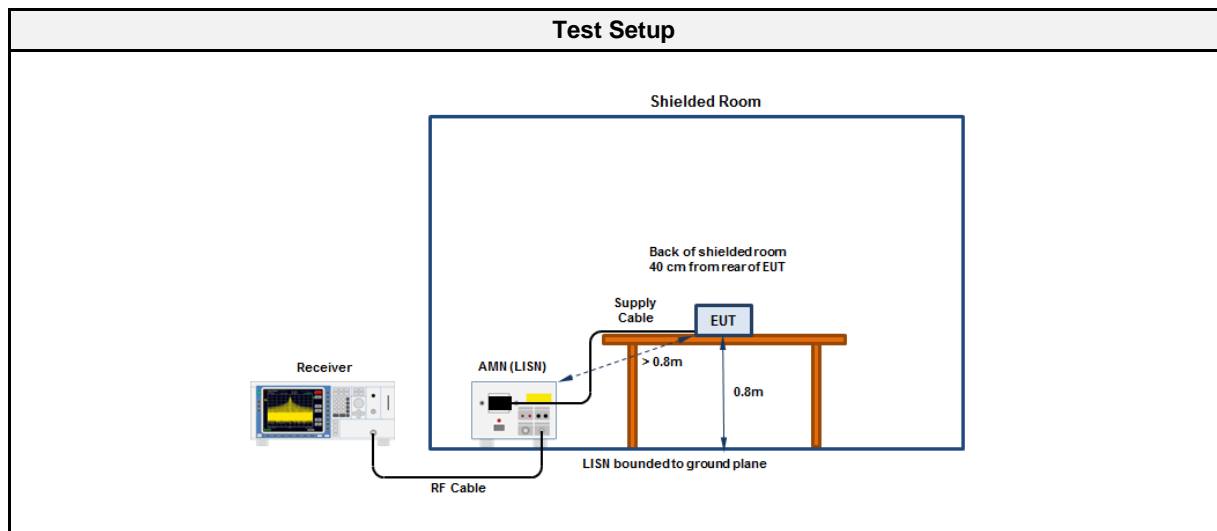

3.1.4 Equipment


Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
EMI Test Receiver	R&S	ESR7	EF00943	2020-07	2021-07
LISN	Schwarzbeck	NSLK 8127 RC	EF01592	2020-07	2021-07

Conducted emissions at the mains power port according to FCC part 15 C

Project Number: G0M-2002-8805
 Applicant: Laird Connectivity
 Model Description: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants
 Model: RG191+LTE Series
 Test Sample ID: 29796
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Test Date: 2020-06-30
 Operating Conditions: ambient temperature: 25°C
 power input: 12 VDC via AC/DC-Adaptor
 LISN: Schwarzbeck NSLK 8127 RC L
 Mode: Tx: 802.11n; 2437 MHz + LoRa 923.3 MHz + LTE FDD 2
 Applied to Port: AC mains
 Note 1: sample ID 29796


Index 40

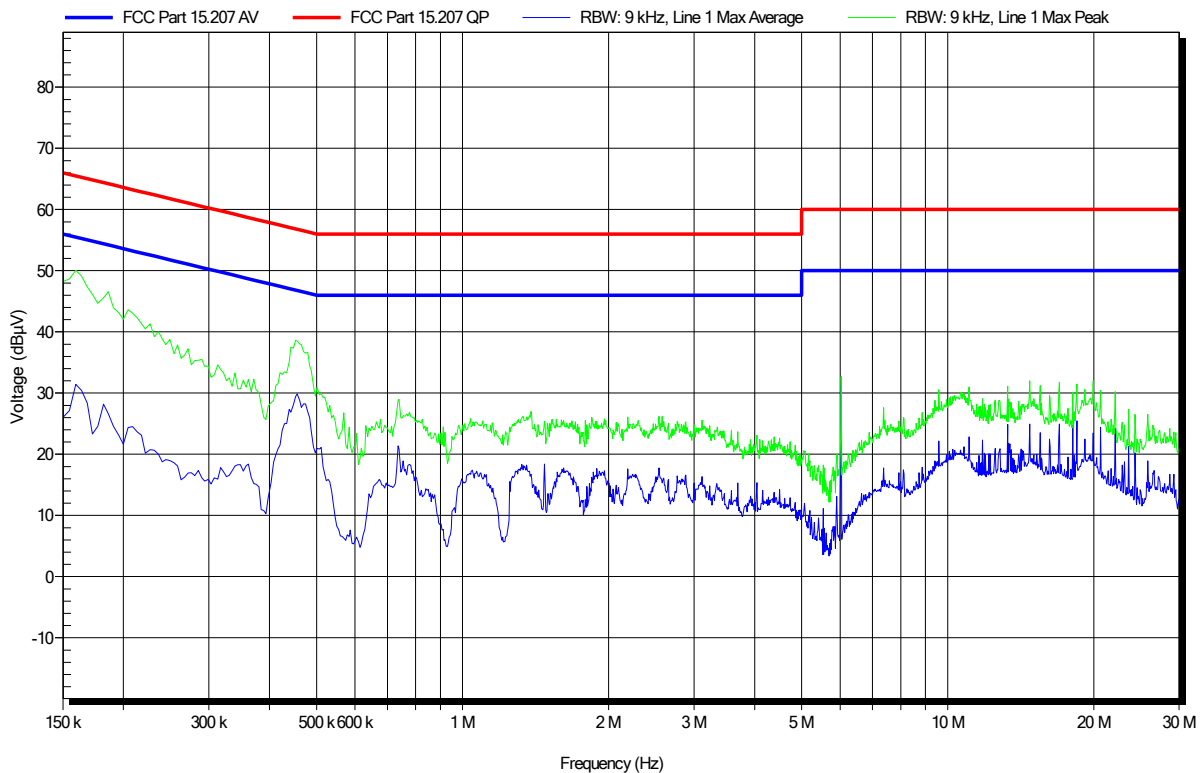

Conducted emissions at the mains power port according to FCC part 15 C

Project Number: G0M-2002-8805
 Applicant: Laird Connectivity
 Model Description: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants
 Model: RG191+LTE Series
 Test Sample ID: 29796
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Test Date: 2020-06-30
 Operating Conditions: ambient temperature: 25°C
 power input: 12 VDC via AC/DC-Adaptor
 LISN: Schwarzbeck NSLK 8127 RC N
 Mode: Tx: 802.11n; 2437 MHz + LoRa 923.3 MHz + LTE FDD 2
 Applied to Port: AC mains
 Note 1: sample ID 29796

Index 41

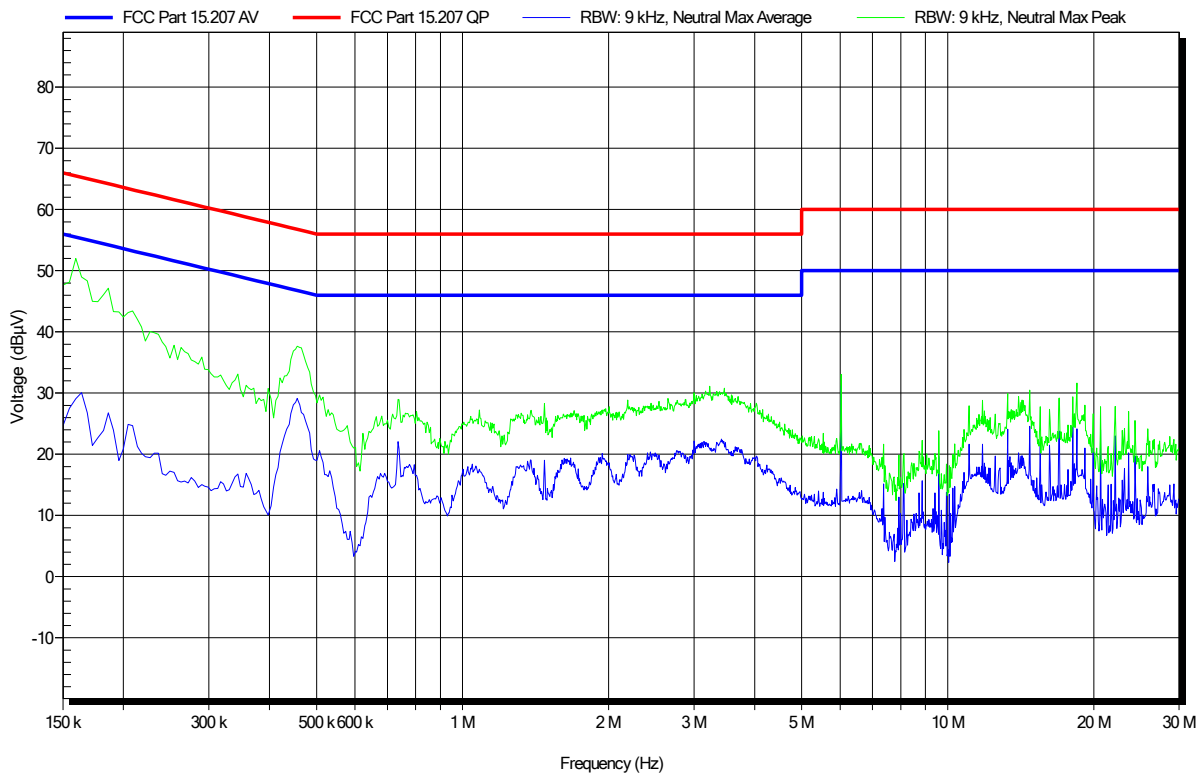

3.2 Test Conditions and Results - Transmitter radiated emissions


3.2.1 Information


Test Information	
Reference	FCC § 15.247(d); FCC § 15.209; ISED RSS-Gen, Issue 5 (section 6.13)
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Measurement Uncertainty	± 5.7 dB
Operator	Toralf Jahn
Date	2020-06-24 (sample ID 29796) + 2020-08-27 (sample ID 30742)

3.2.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V}/\text{m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.2.3 Setup

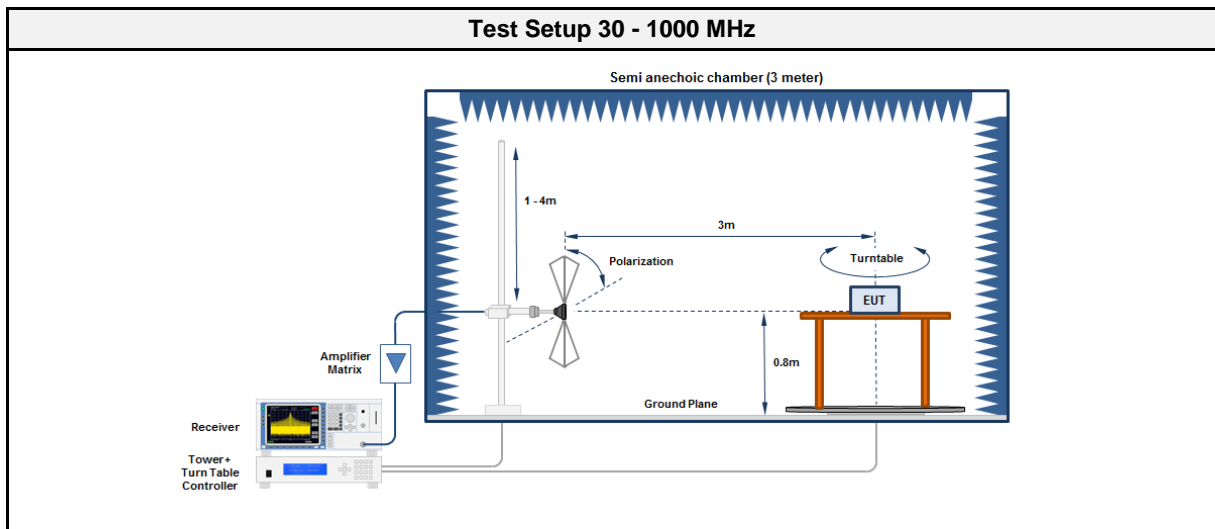

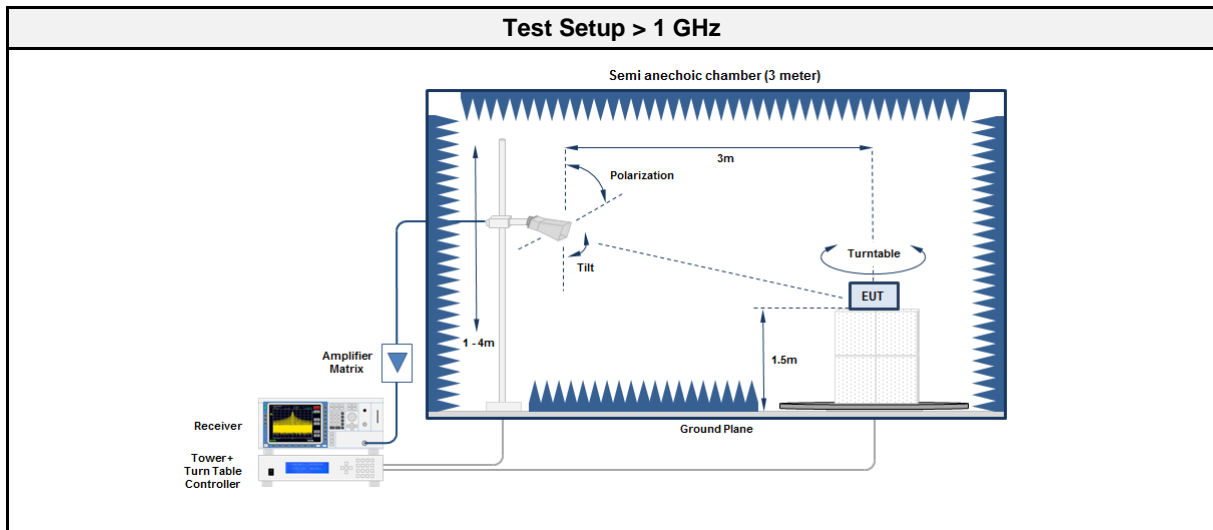

3.2.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	R&S	HK 116	EF00030	2019-04	2022-04
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2019-10	2022-10

3.2.5 Procedure

Test Procedure 30 - 1000 MHz	
1.	EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz	
1.	EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2.	EUT set to test mode
3.	The receiver is set to peak detection with max hold
4.	The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5.	Significant emissions are measured again using a video bandwidth of 10 Hz

3.2.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dBµV/m]	Det.	Pol.	Limit [dBµV/m]	Margin [dB]
923.3	118.8131	27.30	qpk	ver	43.50	-16.22
923.3	1462.9	48.48	pk	hor	74.00	-25.52
923.3	1462.9	46.09	avg	hor	54.00	-07.91
923.3	1462.9	48.44	pk	ver	74.00	-25.56
923.3	1462.9	46.12	avg	ver	54.00	-07.88
923.3	2769.7	53.38	pk	hor	74.00	-20.62
923.3	2769.7	49.00	avg	hor	54.00	-05.00
923.3	2770.1	48.43	pk	ver	74.00	-25.57
923.3	2770.1	42.49	avg	ver	54.00	-11.51
923.3	4615	48.61	pk	hor	74.00	-25.39
923.3	4615	39.25	avg	hor	54.00	-14.75
923.3	4617	44.46	pk	ver	74.00	-29.54
923.3	4617	34.17	avg	ver	54.00	-19.83
923.3	7386	47.04	pk	hor	74.00	-26.96
923.3	7386	36.00	avg	hor	54.00	-18.00
923.3	7386	47.12	pk	ver	74.00	-26.88
923.3	7386	36.80	avg	ver	54.00	-17.20
923.3	8308	61.46	pk	ver	74.00	-12.54
923.3	8308	48.60	avg	ver	54.00	-05.40
923.3	8310	61.12	pk	hor	74.00	-12.88
923.3	8310	47.00	avg	hor	54.00	-07.00

3.3 Test Conditions and Results - Receiver radiated emissions


3.3.1 Information


Test Information	
Reference	ISED RSS-247, Issue 2 (section 3.1)
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Measurement Uncertainty	± 5.7 dB
Operator	Toralf Jahn
Date	2020-06-25 (sample ID 29796) + 2020-08-27 (sample ID 30742)

3.3.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [$\mu\text{V}/\text{m}$]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

3.3.3 Setup

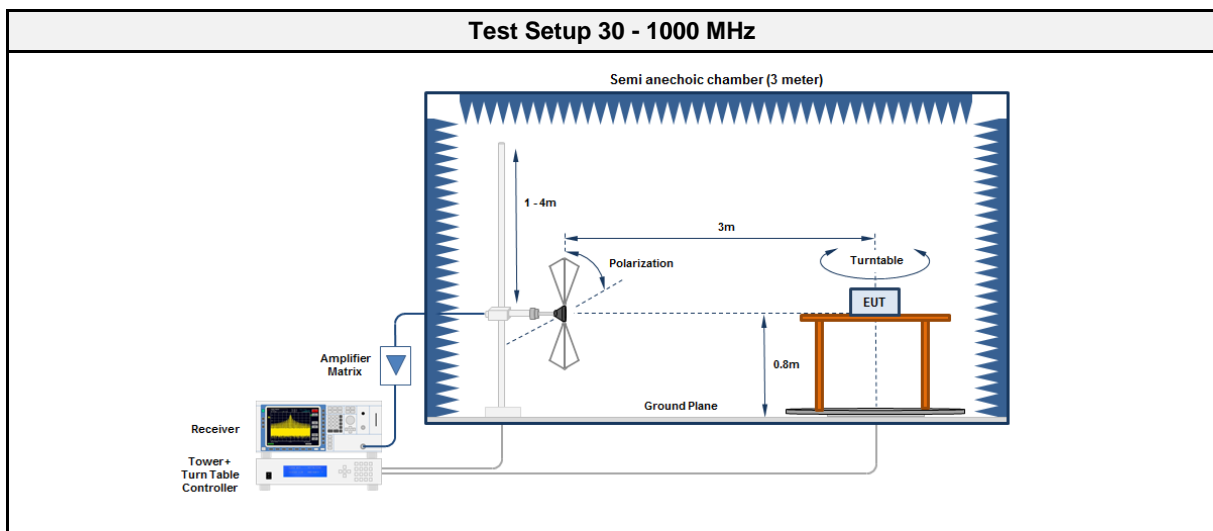

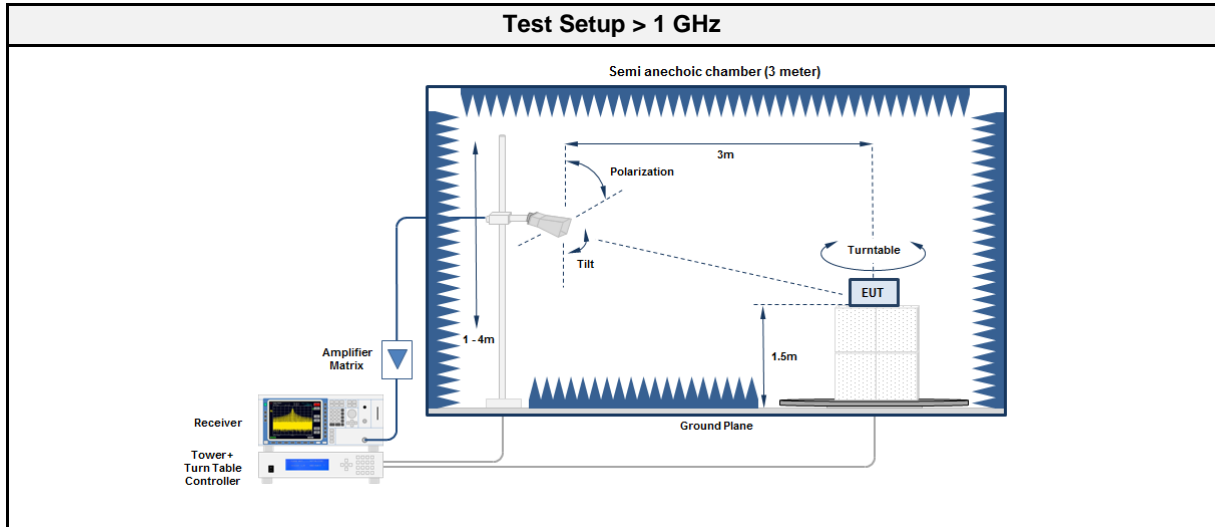

3.3.4 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	RadiMation	2016.1.10
EMC Software	DARE Instruments	RadiMation	2020.1.8

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	R&S	HK 116	EF00030	2019-04	2022-04
Antenna	R&S	HL 223	EF00187	2019-05	2022-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	2018-07	2021-07
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2020-06	2021-06
Antenna	Schwarzbeck	BBHA 9120D	EF00018	2019-10	2022-10

3.3.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground EUT set to test mode The receiver is set to peak detection with max hold The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m All significant emissions are measured again using the corresponding final detector

Test Procedure > 1 GHz

1. EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground
2. EUT set to test mode
3. The receiver is set to peak detection with max hold
4. The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m
5. All significant emissions are measured again using the corresponding final detector

3.3.6 Results

Test Results

Channel [MHz]	Emission [MHz]	Level [dB μ V/m]	Det.	Pol.	Limit [dB μ V/m]	Margin [dB]
scan mode	209.0962	30.10	qpk	hor	43.50	-13.36
scan mode	352.0683	32.50	qpk	ver	46.00	-13.49
scan mode	664.9835	36.30	qpk	ver	46.00	-09.75
scan mode	1463	45.58	pk	ver	53.98	-08.40
scan mode	1463	43.33	avg	ver	53.98	-10.65
scan mode	2660	48.27	pk	hor	53.98	-05.71
scan mode	2660	47.08	avg	hor	53.98	-06.90

ANNEX A Transmitter spurious emissions

Spurious emissions according to FCC 15.247


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 24

RadiMation

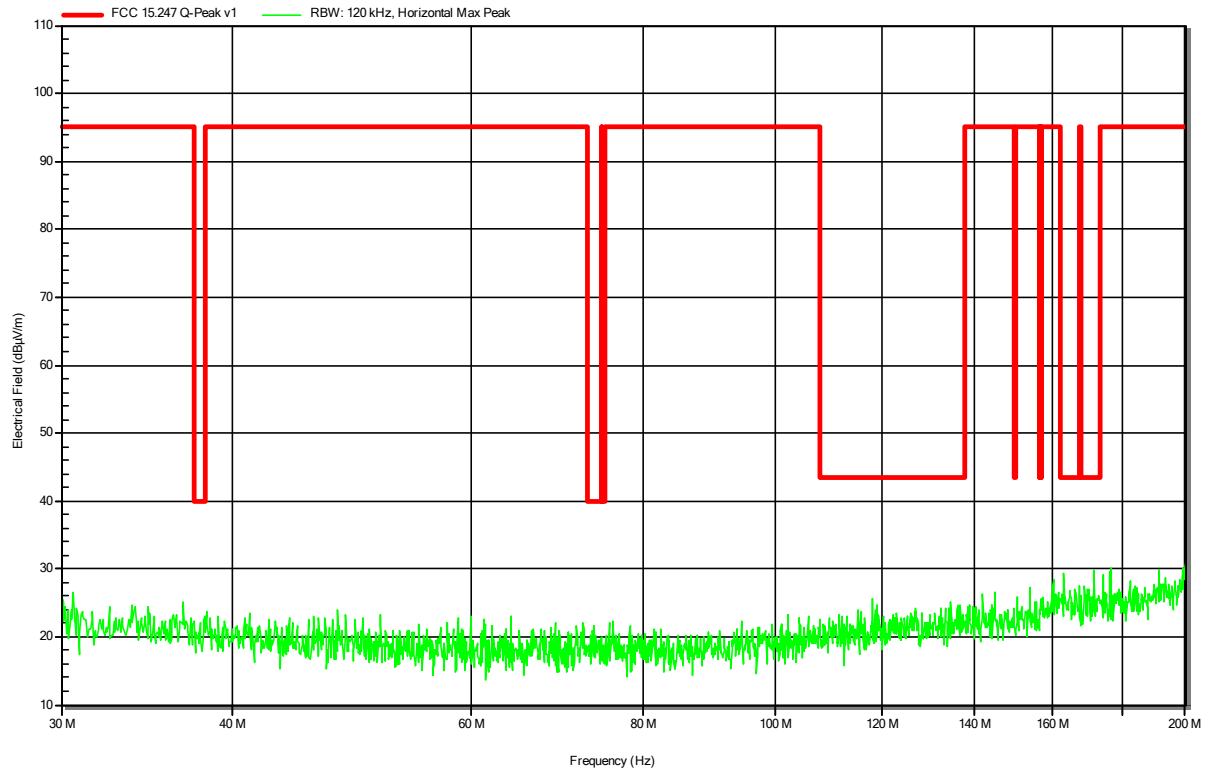

Spurious emissions according to FCC 15.247


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 23

RadiMation

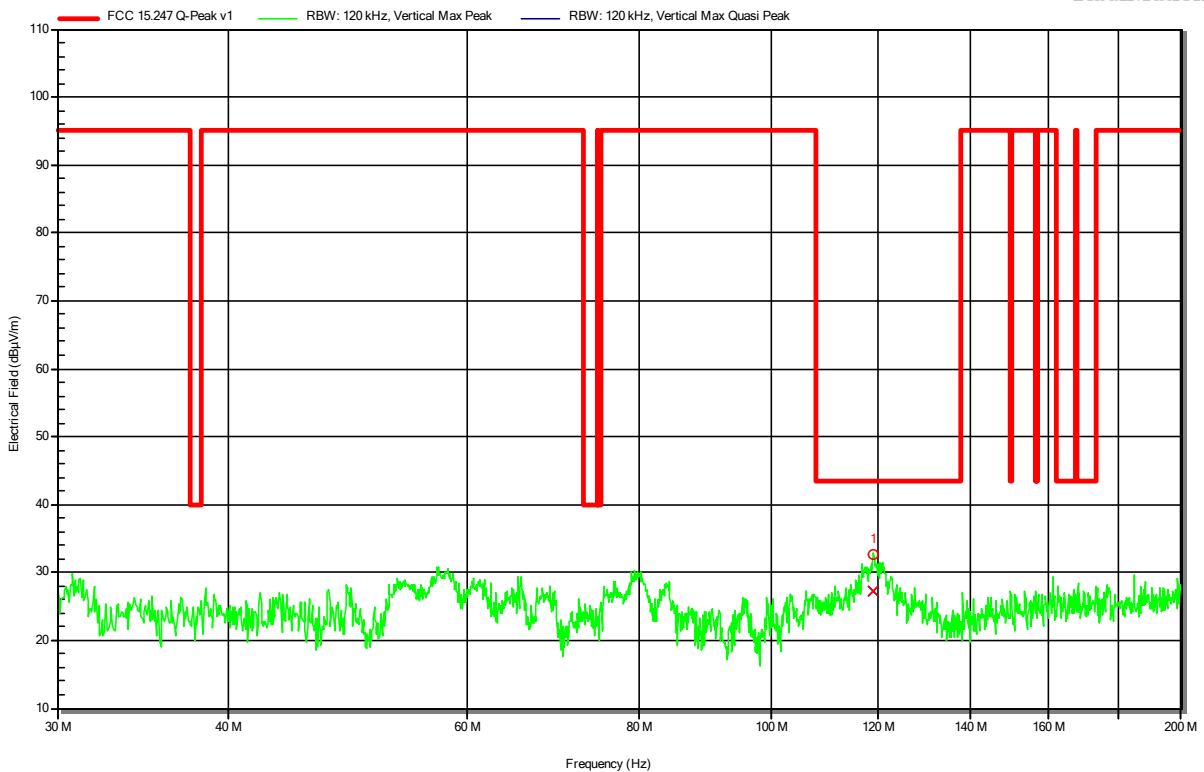

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status
118.8131 MHz	27.3 dBµV/m	43.5 dBµV/m	-16.22 dB	Pass

Spurious emissions according to FCC 15.247


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 18

RadiMation

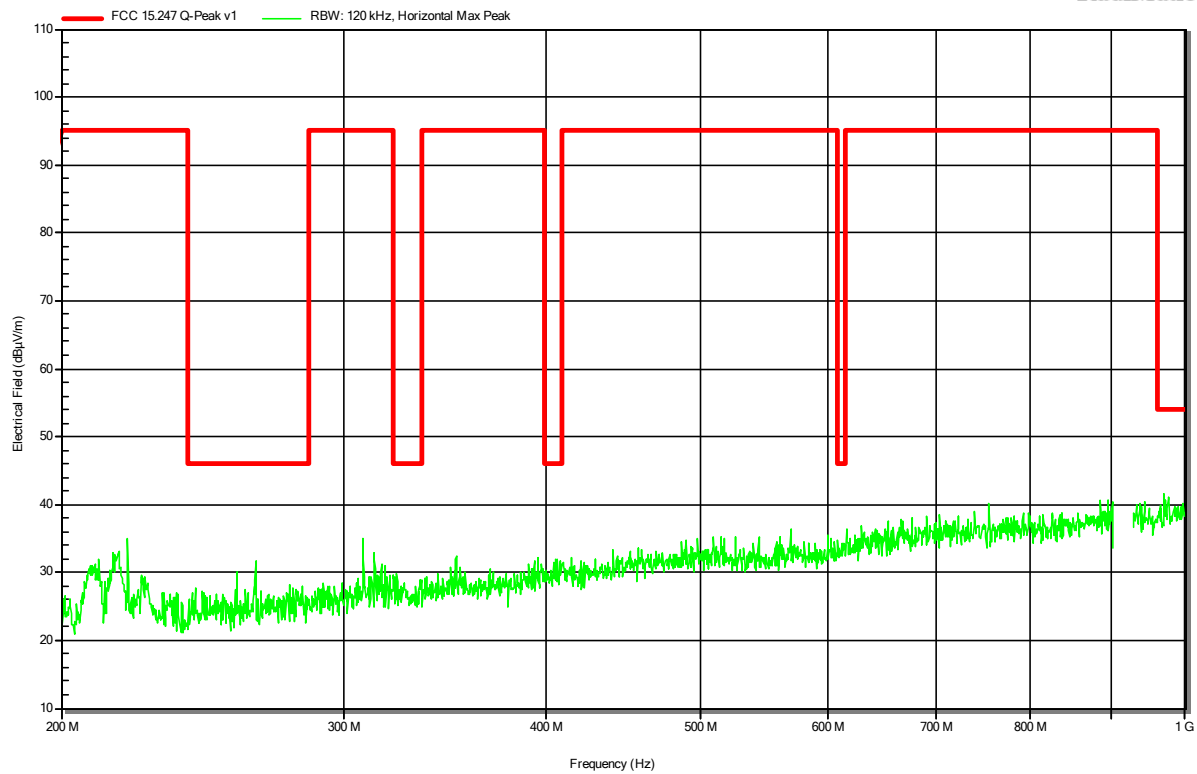

Spurious emissions according to FCC 15.247


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 17

RadiMation

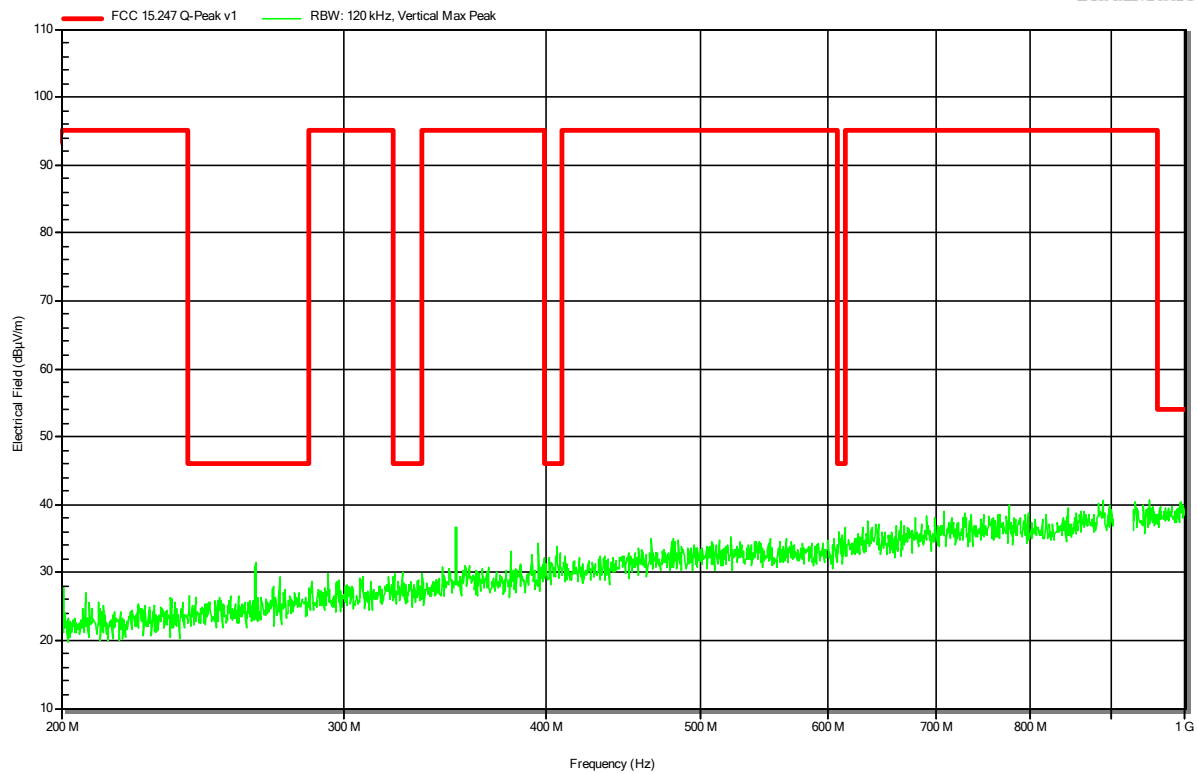


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 7

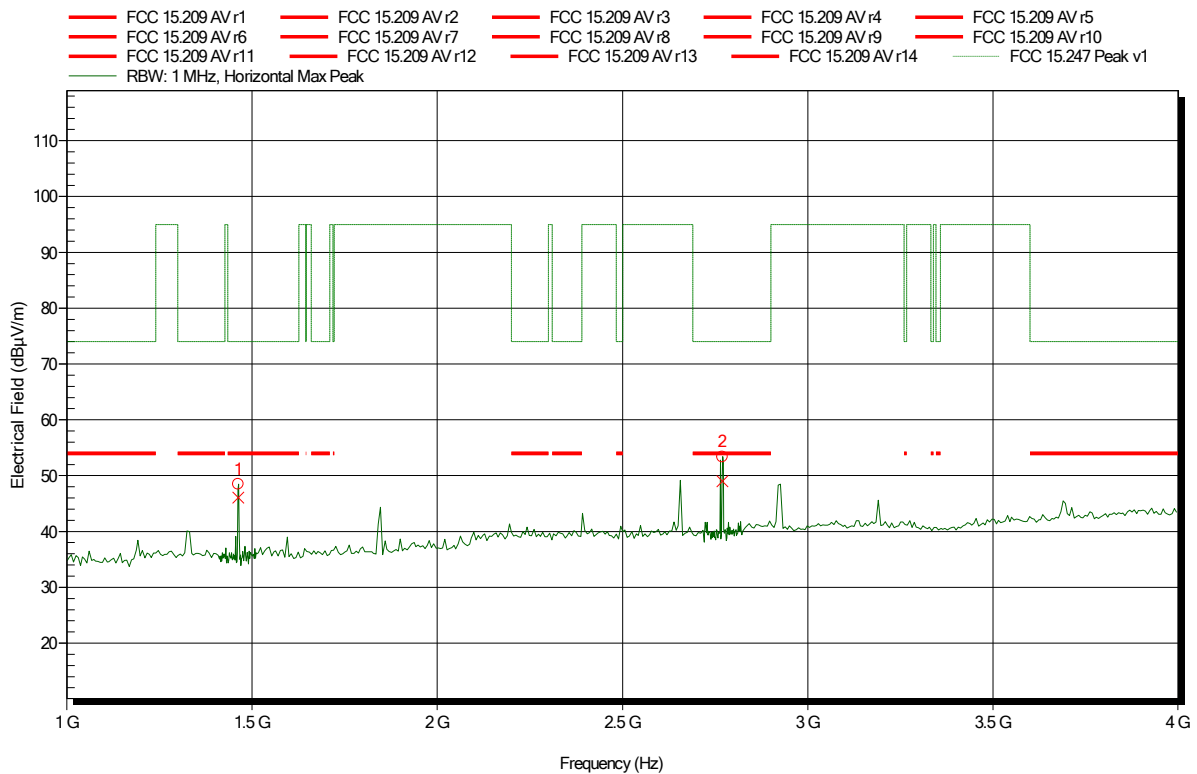

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.4629 GHz	48.48 dBµV/m	74 dBµV/m	-25.52 dB	Pass
2.7697 GHz	53.38 dBµV/m	74 dBµV/m	-20.62 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
1.4629 GHz	46.09 dBµV/m	54 dBµV/m	-7.91 dB	Pass
2.7697 GHz	49 dBµV/m	54 dBµV/m	-5 dB	Pass


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 3 m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 8

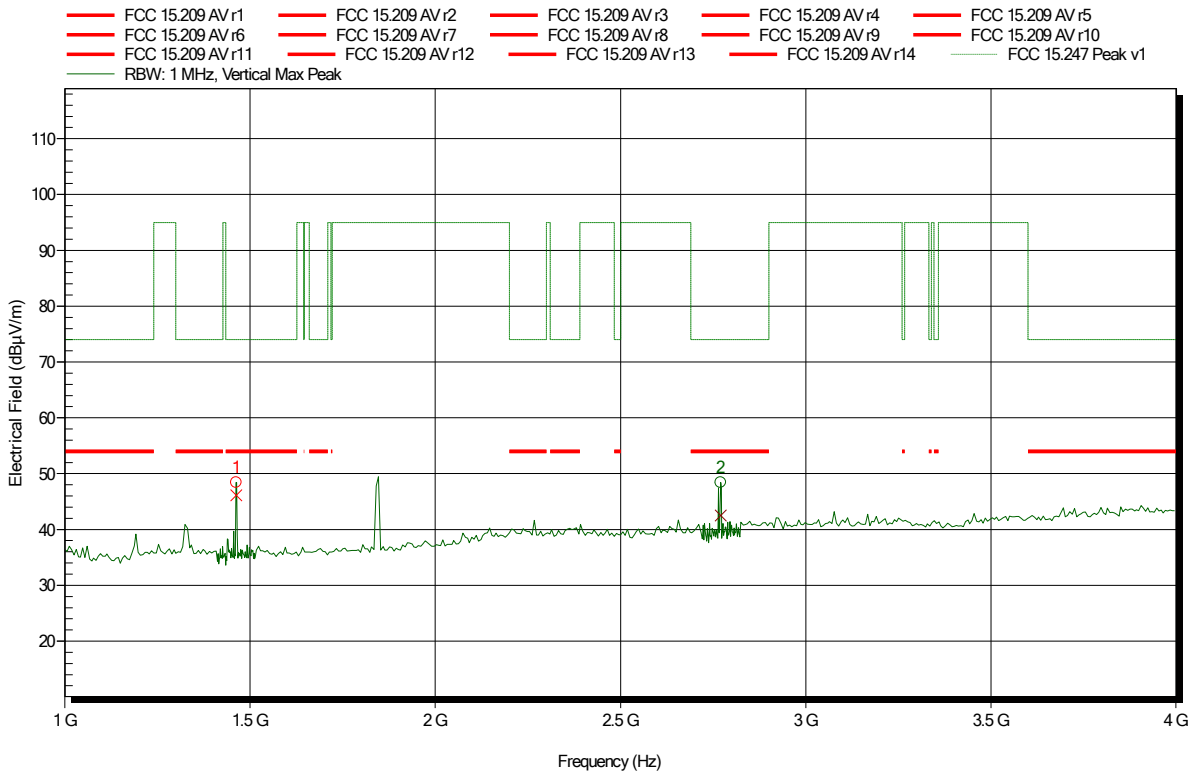

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
1.4629 GHz	48.44 dBµV/m	74 dBµV/m	-25.56 dB	Pass
2.7701 GHz	48.43 dBµV/m	74 dBµV/m	-25.57 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
1.4629 GHz	46.12 dBµV/m	54 dBµV/m	-7.88 dB	Pass
2.7701 GHz	42.49 dBµV/m	54 dBµV/m	-11.51 dB	Pass


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 4

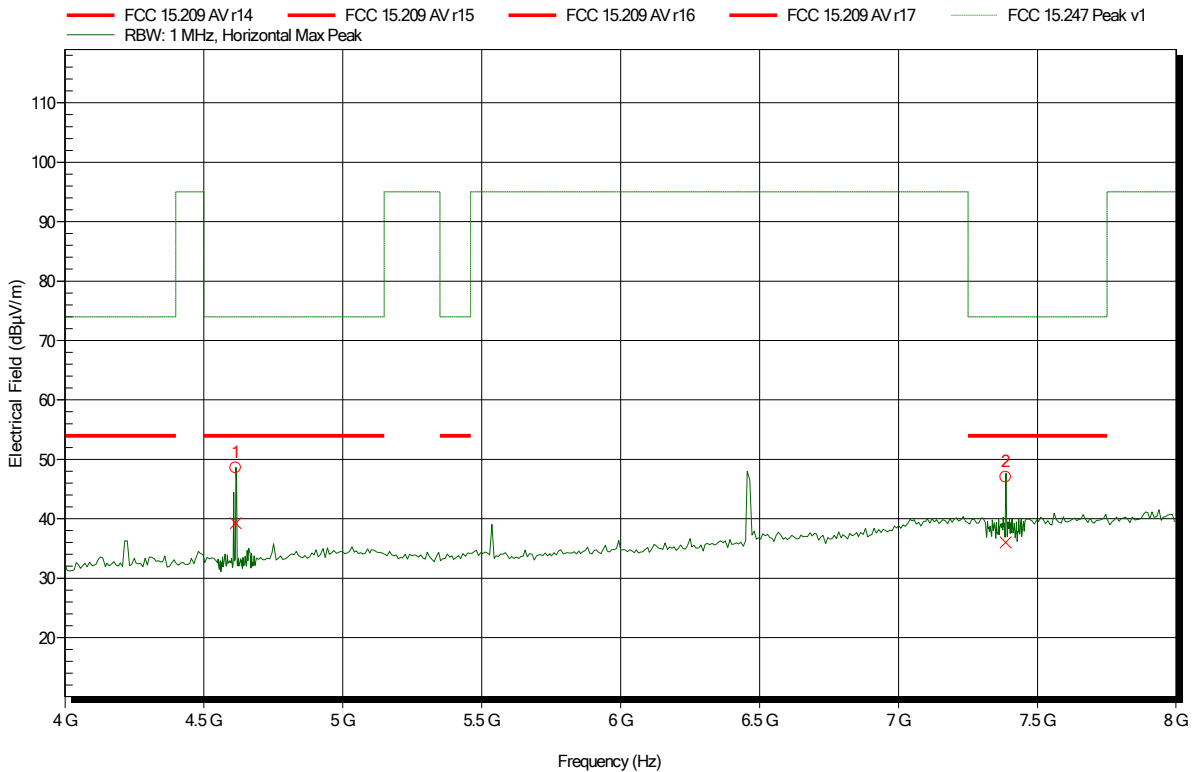

Frequency	Peak	Peak Limit	Peak Difference	Status
4.615 GHz	48.61 dBµV/m	74 dBµV/m	-25.39 dB	Pass
7.386 GHz	47.04 dBµV/m	74 dBµV/m	-26.96 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.615 GHz	39.25 dBµV/m	54 dBµV/m	-14.75 dB	Pass
7.386 GHz	36 dBµV/m	54 dBµV/m	-18 dB	Pass


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 5

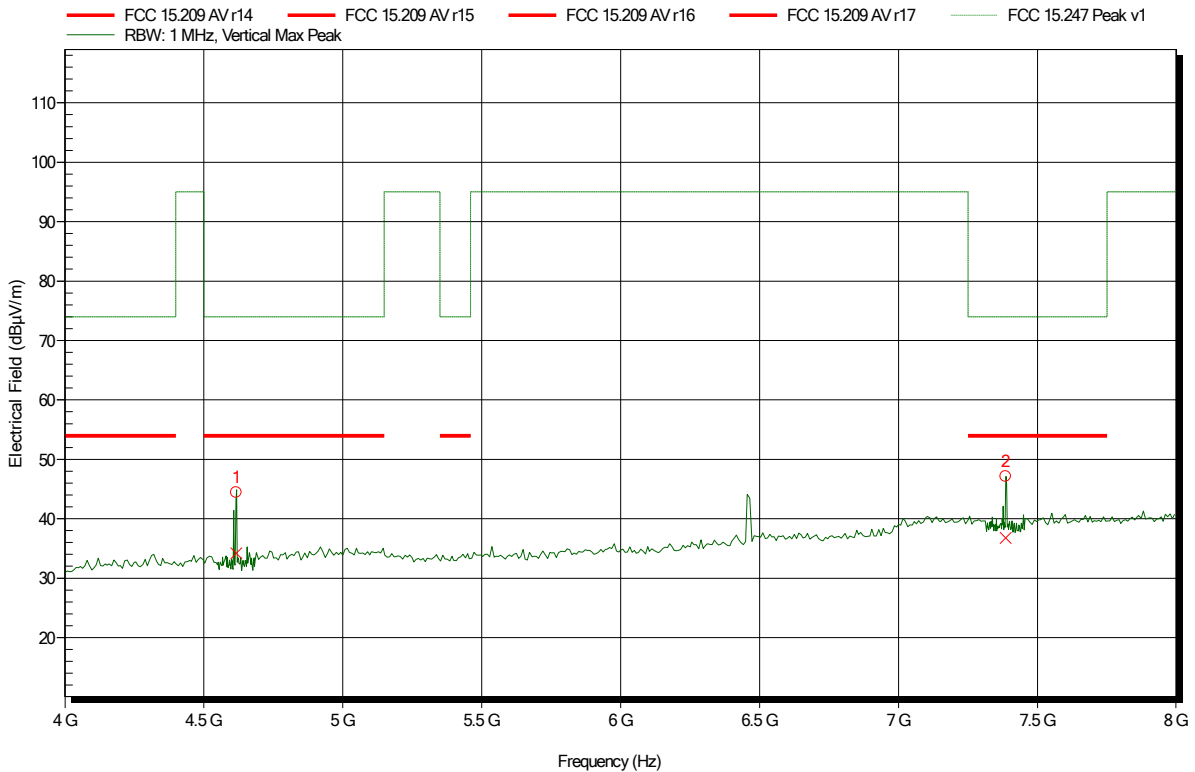

Frequency	Peak	Peak Limit	Peak Difference	Status
4.617 GHz	44.46 dBµV/m	74 dBµV/m	-29.54 dB	Pass
7.386 GHz	47.12 dBµV/m	74 dBµV/m	-26.88 dB	Pass

Frequency	Average	Average Limit	Average Difference	Average Status
4.617 GHz	34.17 dBµV/m	54 dBµV/m	-19.83 dB	Pass
7.386 GHz	36.8 dBµV/m	54 dBµV/m	-17.2 dB	Pass


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 3

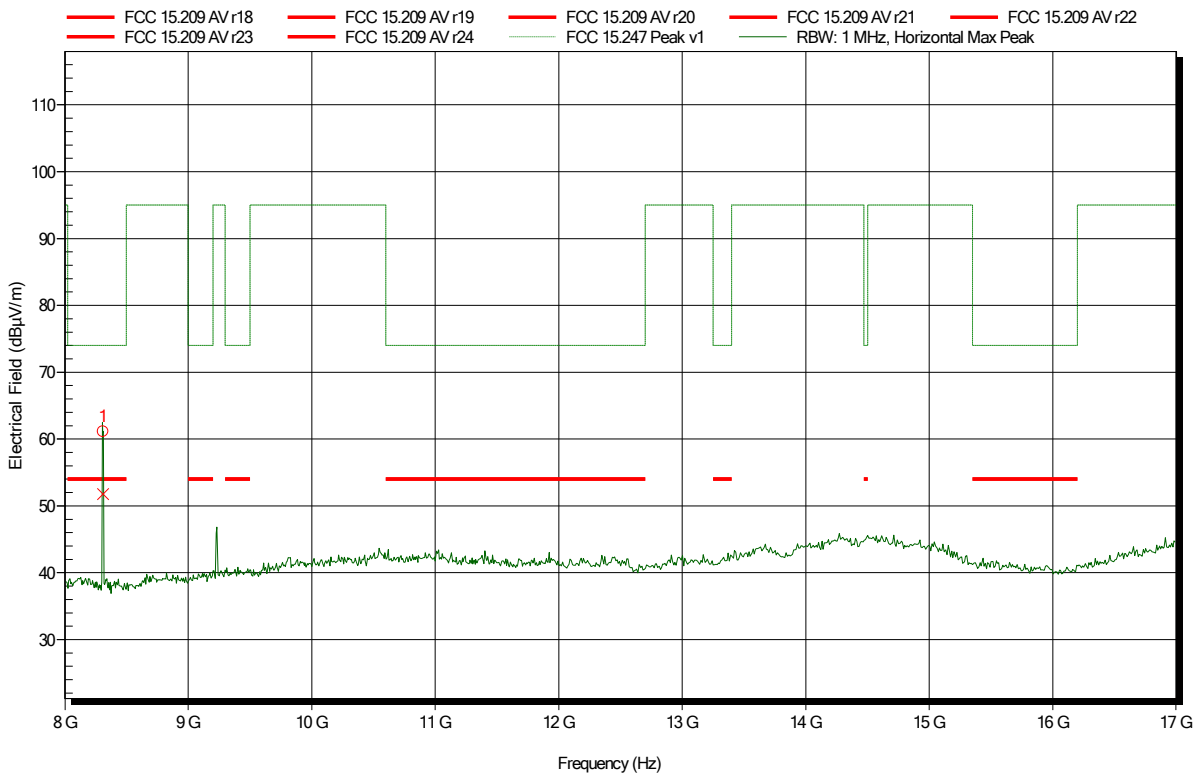

Frequency	Peak	Peak Limit	Peak Difference	Status
8.31 GHz	61.12 dBµV/m	74 dBµV/m	-12.88 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
8.31 GHz	47 dBµV/m	54 dBµV/m	-7 dB	Pass


Spurious emissions according to FCC 47 CFR § 15.247

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: TX; LORA, 923.3 MHz, Sample 29796
 Test Date: 2020-07-21
 Note:

Index 6

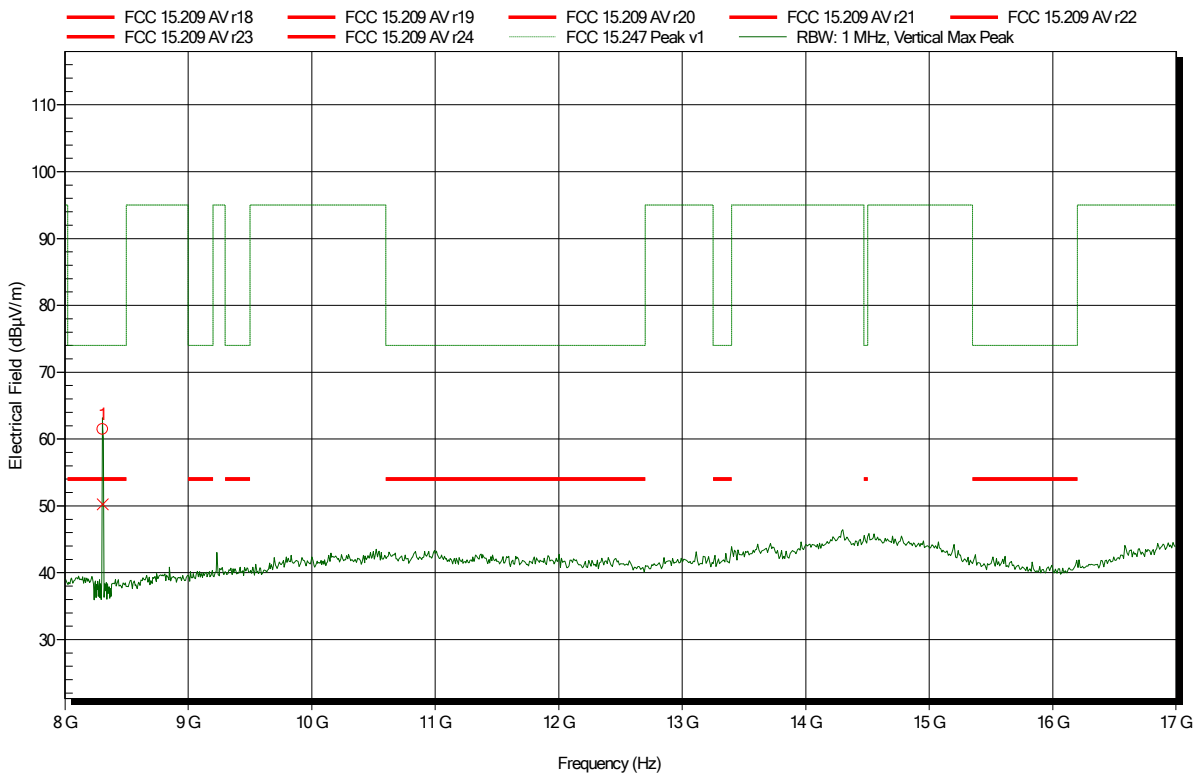

Frequency	Peak	Peak Limit	Peak Difference	Status
8.308 GHz	61.46 dBµV/m	74 dBµV/m	-12.54 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
8.308 GHz	48.6 dBµV/m	54 dBµV/m	-5.4 dB	Pass

ANNEX B Receiver spurious emissions

Spurious emissions according to RSS-Gen


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HK 116, Horizontal
 Measurement distance: 3 m
 Mode: RX; LORA, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 17

RadiMation

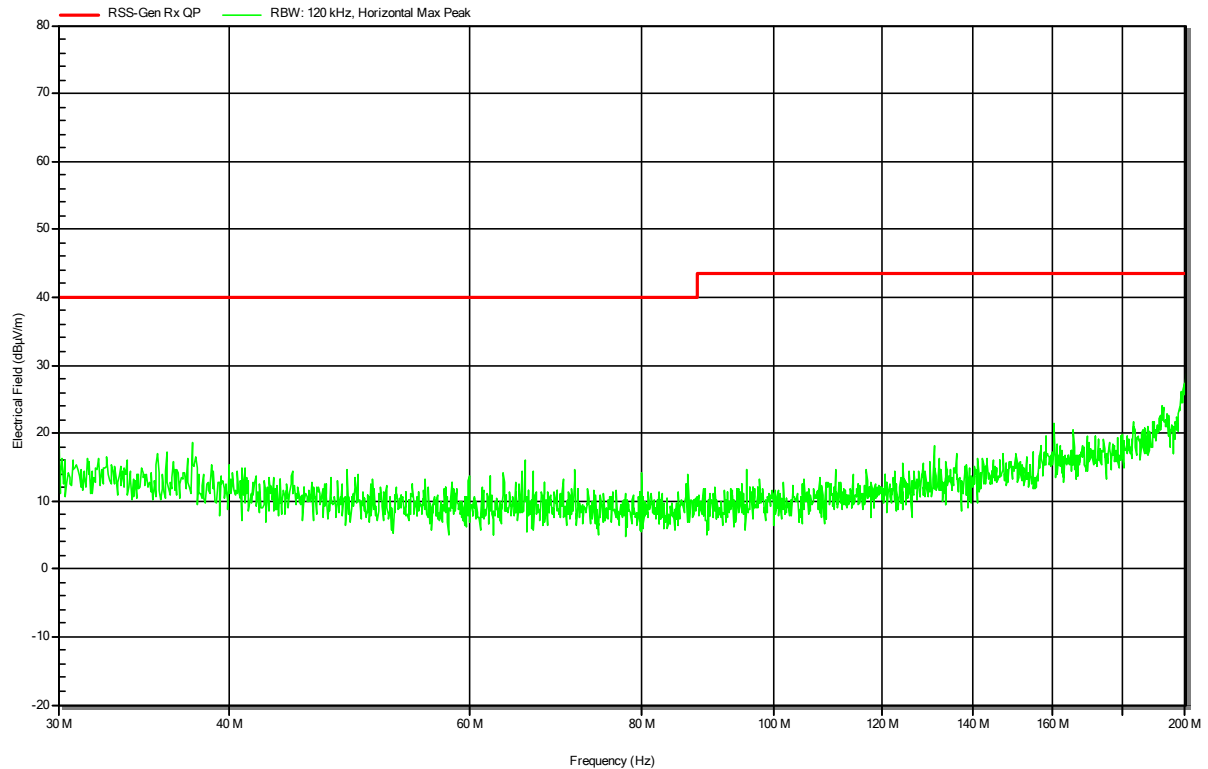

Spurious emissions according to RSS-Gen


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HK 116, Vertical
 Measurement distance: 3 m
 Mode: RX; LORA, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 18

RadiMation

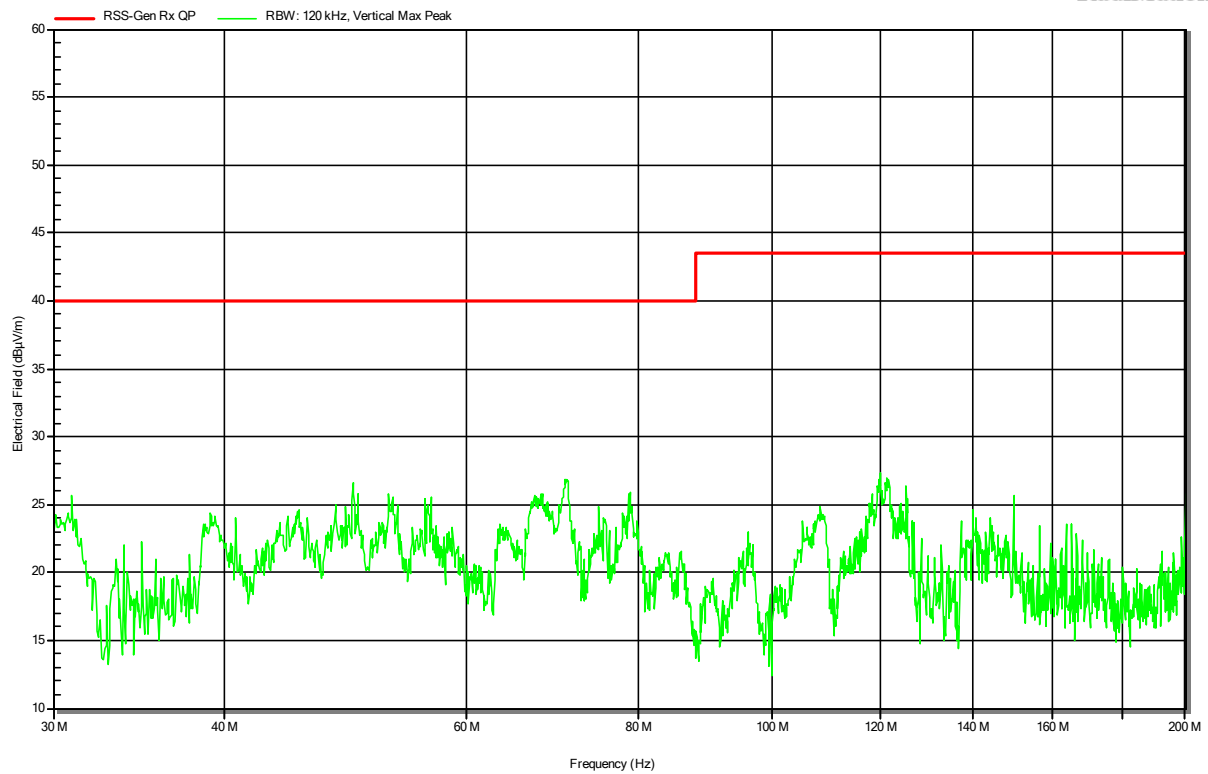

Spurious emissions according to RSS-Gen


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3 m
 Mode: RX; LORA, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 20

RadiMation

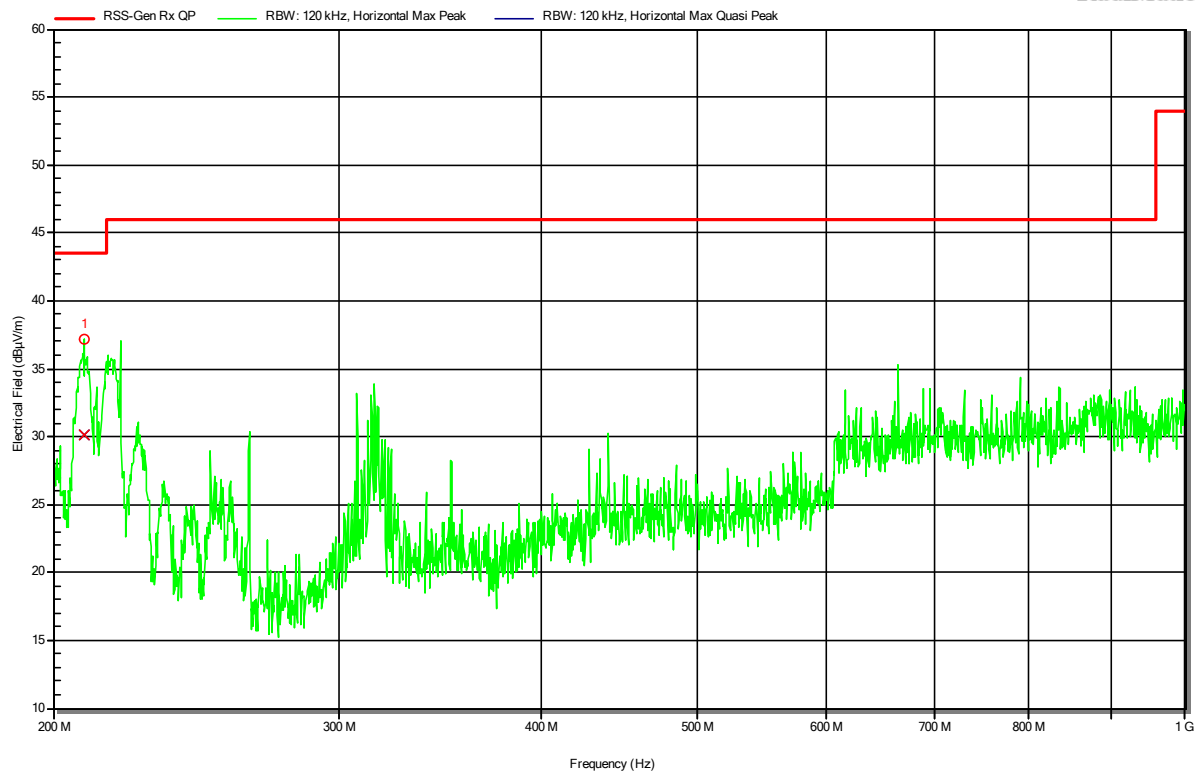

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
209.0962 MHz	30.1 dBµV/m	43.5 dBµV/m	-13.36 dB	Pass	0 degrees	1 m

Spurious emissions according to RSS-Gen


Project number: G0M-2002-8805

Applicant: Laird Connectivity Inc
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service Germany
 Operator: Mr. Jahn
 Measurement software: RadiMation, version 2020.1.8
 Test Conditions: Tnom: 23 °Celsius°C, Vnom: 12 VDC via AC/DC-Adaptor
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3 m
 Mode: RX; LORA, Sample 30742
 Test Date: 2020-08-27
 Note:

Index 19

RadiMation

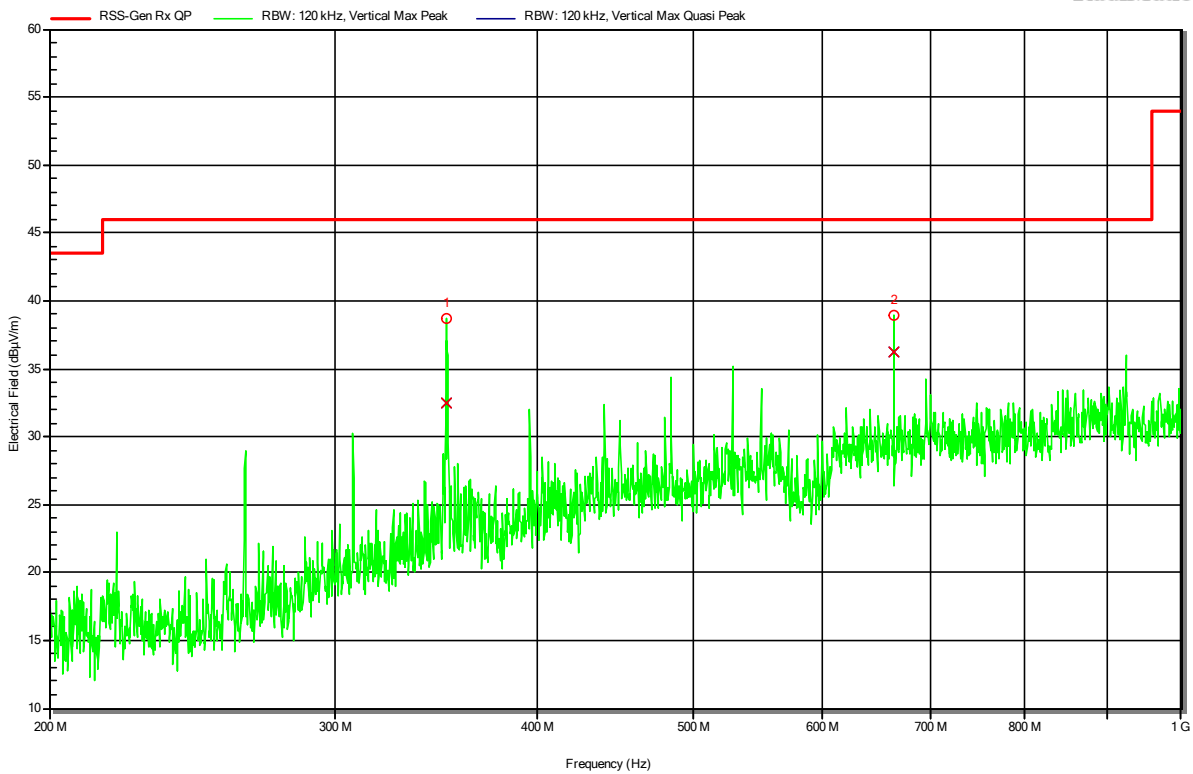

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
352.0683 MHz	32.5 dBµV/m	46 dBµV/m	-13.49 dB	Pass	0 degrees	1 m
664.9835 MHz	36.3 dBµV/m	46 dBµV/m	-9.75 dB	Pass	0 degrees	1 m


Spurious emissions according to ISED RSS-GEN

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Measurement software: RadiMation, version 2015.2.4
 Operator: Toralf Jahn
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m converted to 3m
 Mode: RX; LORA, SAMPLE 29796
 Test Date: 2020-07-21
 Note:

Index 10

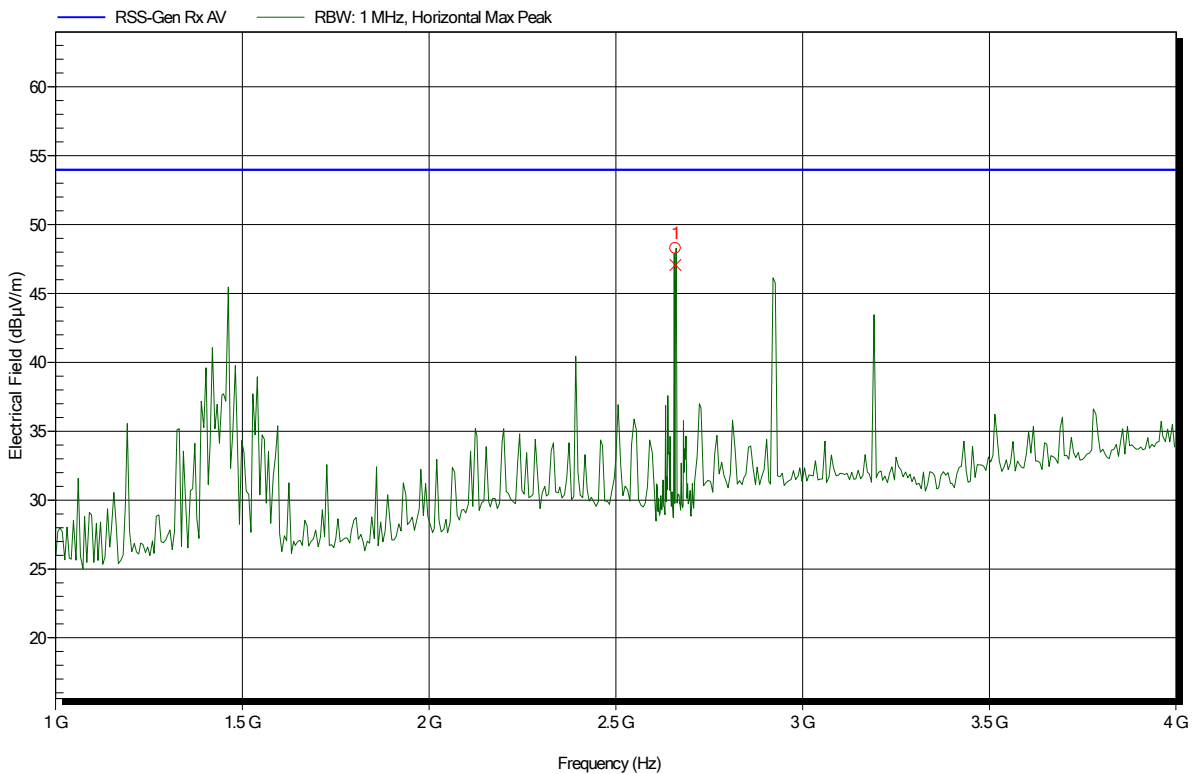

Frequency	Peak	Peak Limit	Peak Difference	Status
2.66 GHz	48.27 dBµV/m	53.98 dBµV/m	-5.71 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
2.66 GHz	47.08 dBµV/m	53.98 dBµV/m	-6.9 dB	Pass


Spurious emissions according to ISED RSS-GEN

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Measurement software: RadiMation, version 2015.2.4
 Operator: Toralf Jahn
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m converted to 3m
 Mode: RX; LORA, SAMPLE 29796
 Test Date: 2020-07-21
 Note:

Index 12

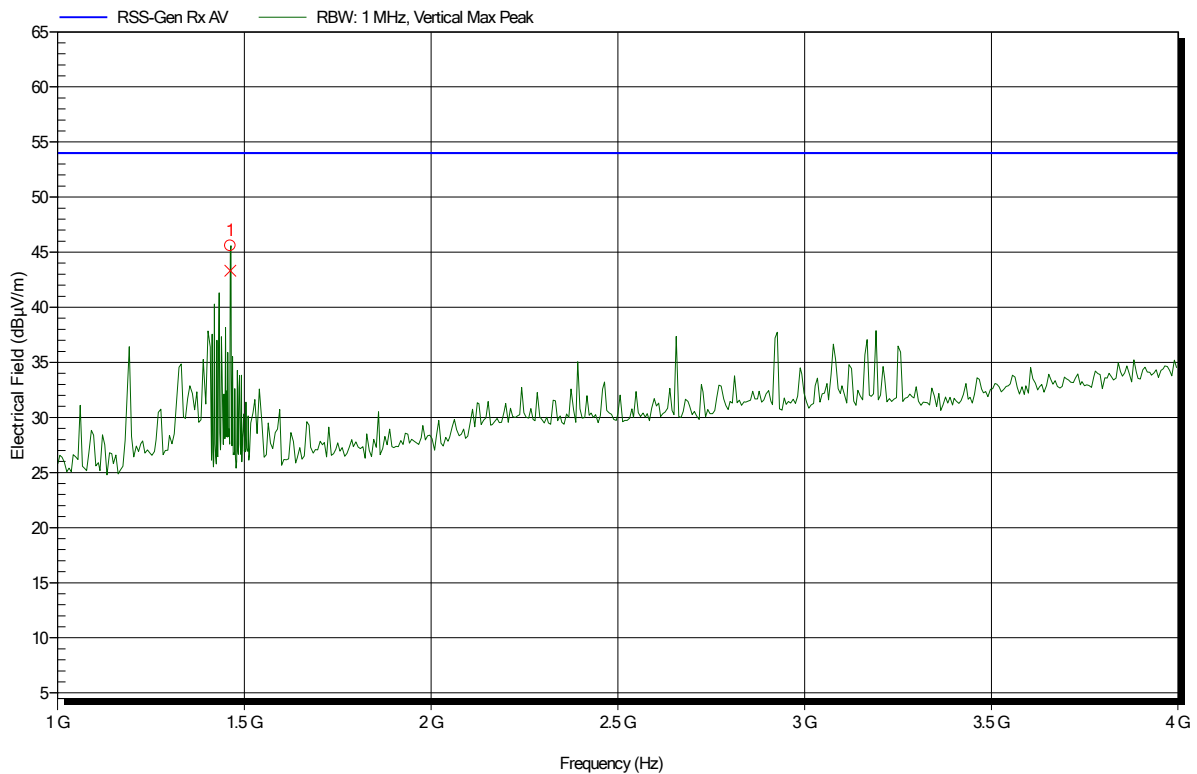

Frequency	Peak	Peak Limit	Peak Difference	Status
1.463 GHz	45.58 dBµV/m	53.98 dBµV/m	-8.4 dB	Pass
Frequency	Average	Average Limit	Average Difference	Average Status
1.463 GHz	43.33 dBµV/m	53.98 dBµV/m	-10.65 dB	Pass


Spurious emissions according to ISED RSS-GEN

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Horizontal
 Measurement distance: 1 m
 Mode: RX; LORA, SAMPLE 29796
 Test Date: 2020-07-21
 Note:

Index 11

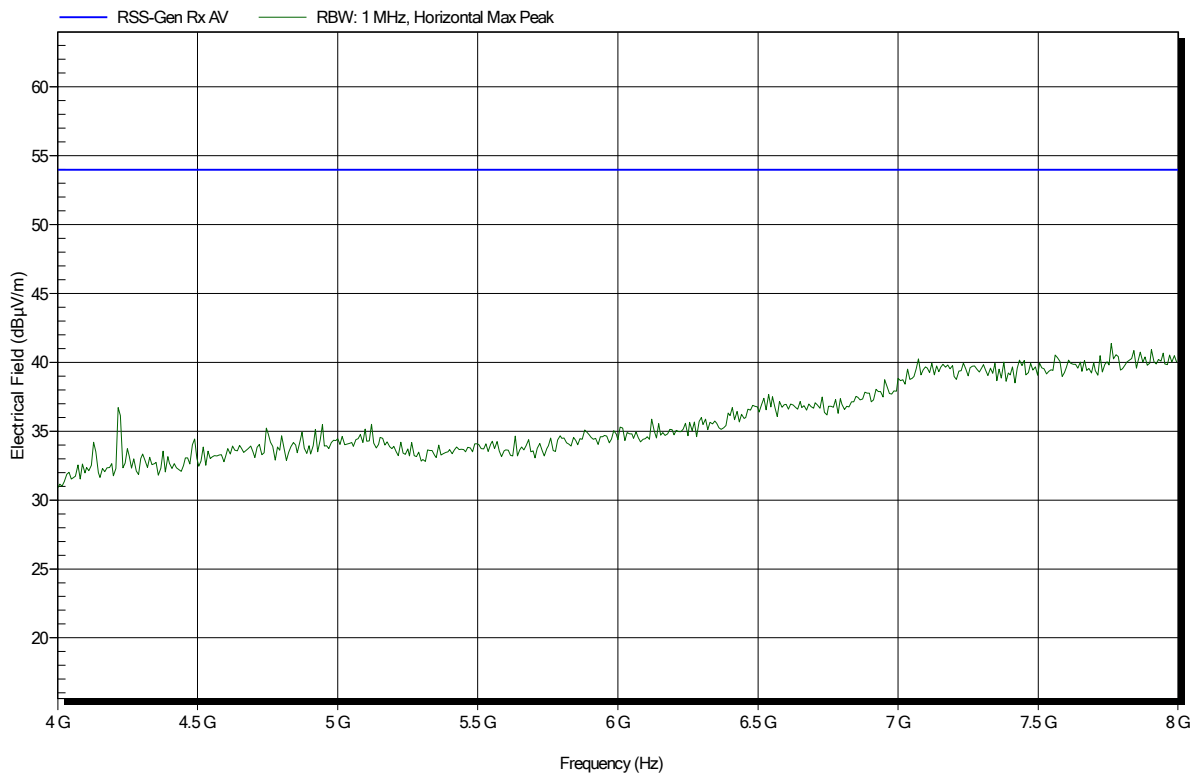


Spurious emissions according to ISED RSS-GEN

Project number: G0M-2002-8805

Applicant: Laird Connectivity
 EUT Name: 915MHz LoRaWAN Gateway incl Wi-Fi, Ethernet & LTE - Indoor and IP67 variants

Model: RG191+LTE Series
 Test Site: Eurofins Product Service GmbH
 Operator: Toralf Jahn
 Measurement software: RadiMation, version 2015.2.4
 Test Conditions: Tnom: 23°C, Vnom: 12 VDC
 Antenna: Schwarzbeck BBHA 9120D, Vertical
 Measurement distance: 1 m
 Mode: RX; LORA, SAMPLE 29796
 Test Date: 2020-07-21
 Note:

Index 13

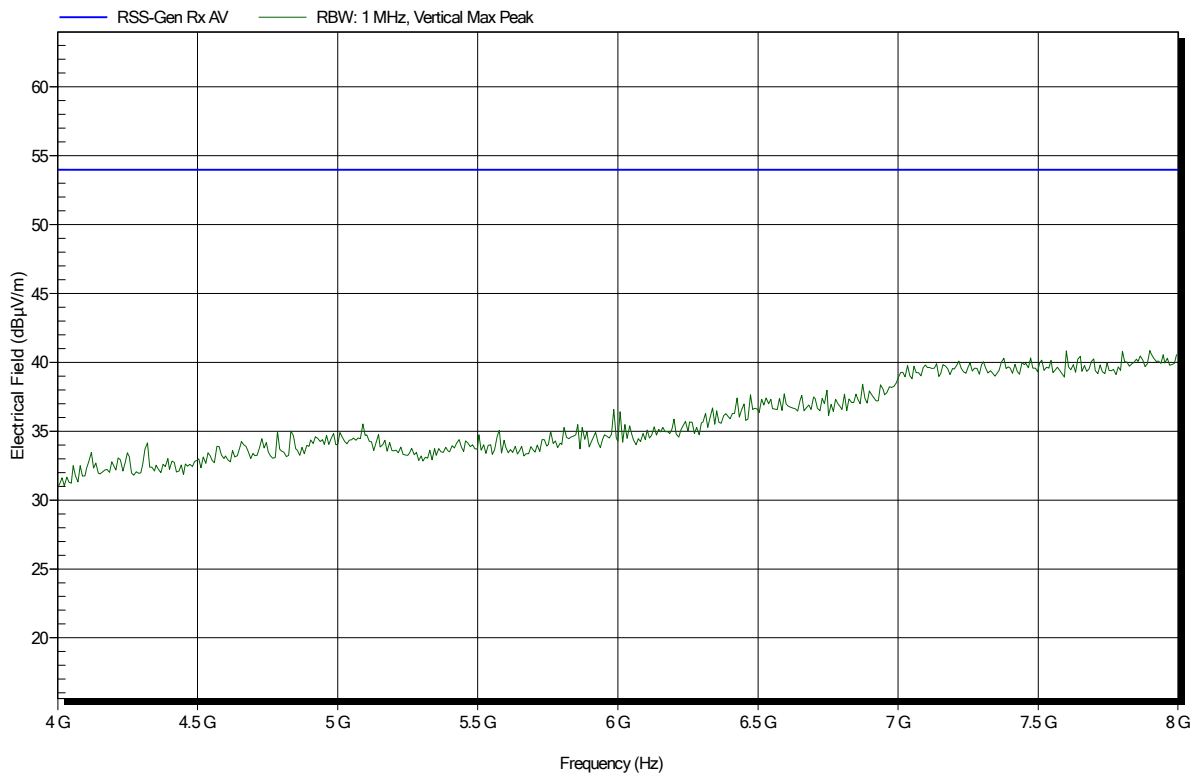

=== END OF TEST REPORT ===