




Modulation	ax HE80 RU484	Test Freq. (MHz)	6705
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

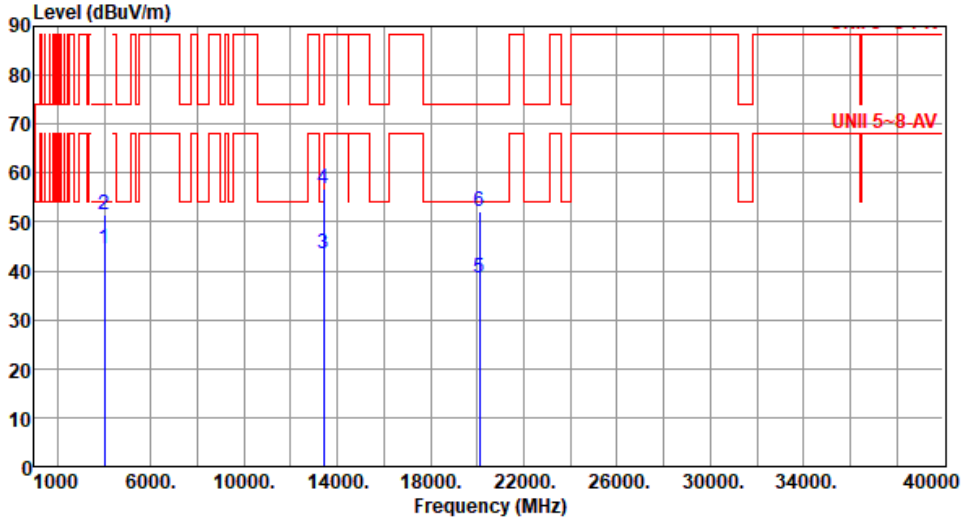

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.38	54.00	-9.62	46.62	-2.24	Average	306	201
2	4000.00	51.53	74.00	-22.47	53.77	-2.24	Peak	306	201
3	13410.00	43.55	68.20	-24.65	37.40	6.15	Average	100	163
4	13410.00	56.64	88.20	-31.56	50.49	6.15	Peak	100	163
5	20115.00	38.47	54.00	-15.53	36.91	1.56	Average	100	189
6	20115.00	52.23	74.00	-21.77	50.67	1.56	Peak	100	189

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6785
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

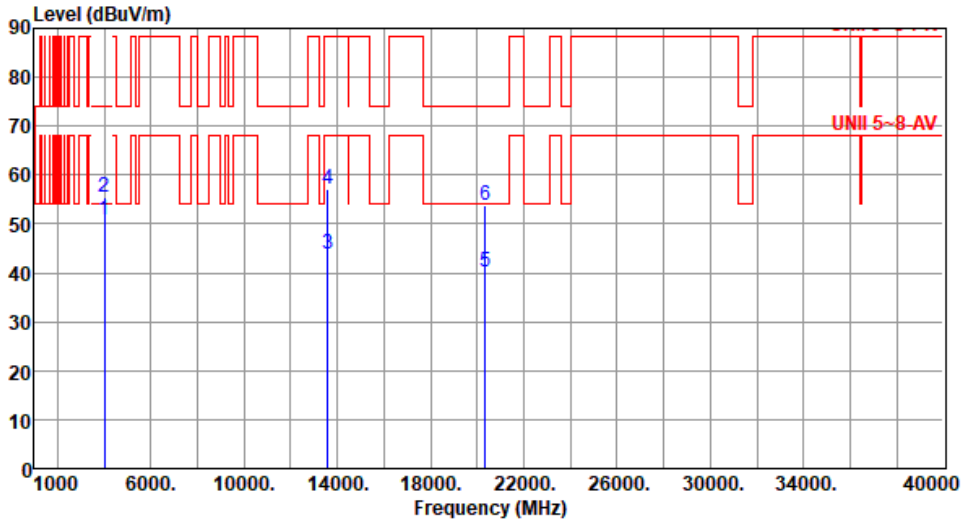

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.77	54.00	-3.23	53.01	-2.24	Average	289	134
2	4000.00	55.42	74.00	-18.58	57.66	-2.24	Peak	289	134
3	13570.00	43.85	68.20	-24.35	37.70	6.15	Average	100	215
4	13570.00	57.16	88.20	-31.04	51.01	6.15	Peak	100	215
5	20355.00	40.35	54.00	-13.65	38.53	1.82	Average	100	160
6	20355.00	53.91	74.00	-20.09	52.09	1.82	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE80-OFDMA	Test Freq. (MHz)	6785						
Polarization	Vertical								
Test By : Paul Lin		Temperature(°C): 24		Humidity(%): 65					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.72	54.00	-9.28	46.96	-2.24	Average	309	199
2	4000.00	51.75	74.00	-22.25	53.99	-2.24	Peak	309	199
3	13570.00	43.81	68.20	-24.39	37.66	6.15	Average	100	176
4	13570.00	57.16	88.20	-31.04	51.01	6.15	Peak	100	176
5	20355.00	40.56	54.00	-13.44	38.74	1.82	Average	100	207
6	20355.00	53.92	74.00	-20.08	52.10	1.82	Peak	100	207
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	ax HE80-OFDMA	Test Freq. (MHz)	6865
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

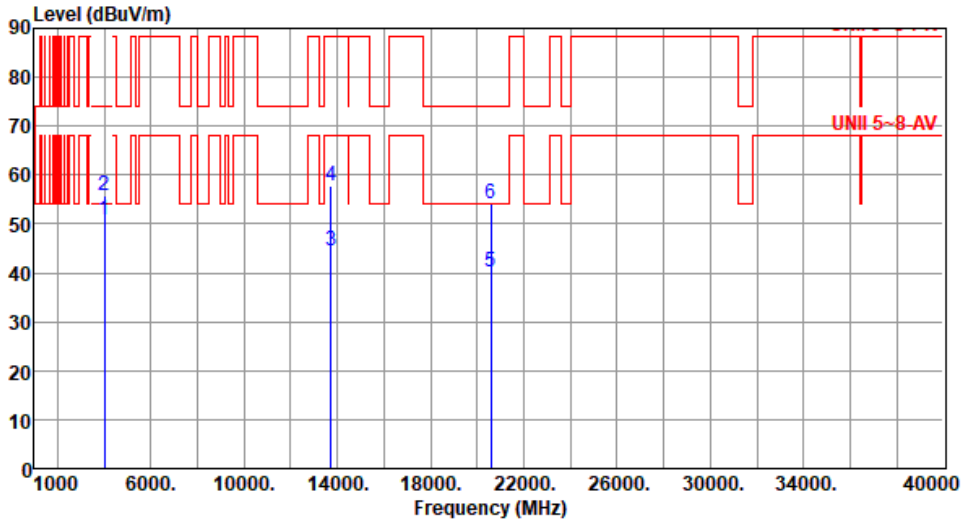

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.85	54.00	-3.15	53.09	-2.24	Average	284	138
2	4000.00	55.63	74.00	-18.37	57.87	-2.24	Peak	284	138
3	13730.00	44.35	68.20	-23.85	38.15	6.20	Average	100	211
4	13730.00	57.66	88.20	-30.54	51.46	6.20	Peak	100	211
5	20595.00	40.31	54.00	-13.69	38.12	2.19	Average	100	191
6	20595.00	54.15	74.00	-19.85	51.96	2.19	Peak	100	191

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6865
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

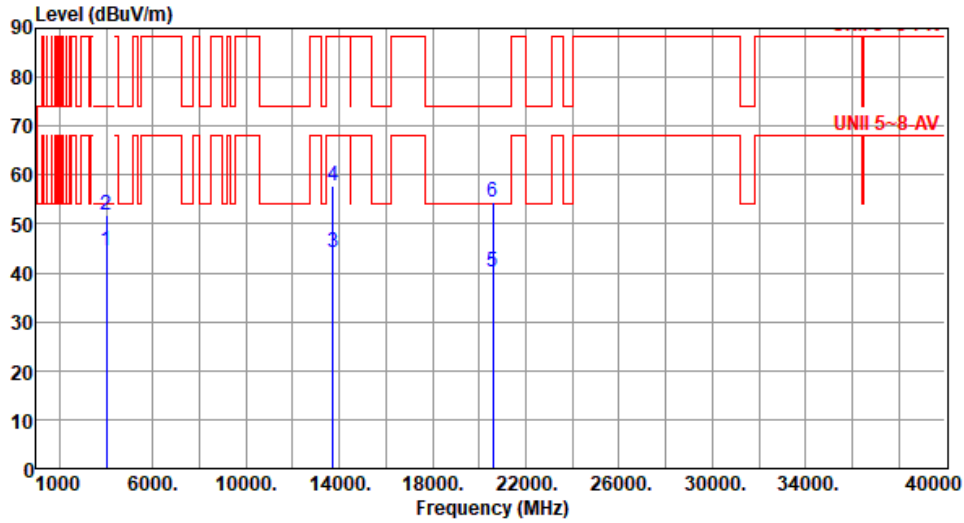

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.52	54.00	-9.48	46.76	-2.24	Average	310	202
2	4000.00	51.65	74.00	-22.35	53.89	-2.24	Peak	310	202
3	13730.00	44.32	68.20	-23.88	38.12	6.20	Average	100	134
4	13730.00	57.88	88.20	-30.32	51.68	6.20	Peak	100	134
5	20595.00	40.19	54.00	-13.81	38.00	2.19	Average	100	209
6	20595.00	54.41	74.00	-19.59	52.22	2.19	Peak	100	209

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6945
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

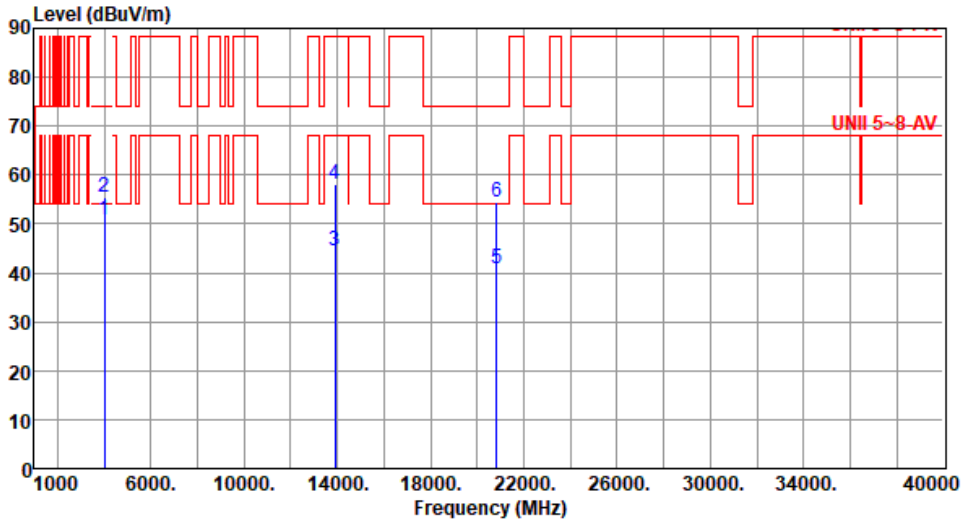

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.77	54.00	-3.23	53.01	-2.24	Average	284	132
2	4000.00	55.42	74.00	-18.58	57.66	-2.24	Peak	284	132
3	13890.00	44.63	68.20	-23.57	38.11	6.52	Average	100	239
4	13890.00	58.15	88.20	-30.05	51.63	6.52	Peak	100	239
5	20835.00	40.72	54.00	-13.28	38.10	2.62	Average	100	145
6	20835.00	54.56	74.00	-19.44	51.94	2.62	Peak	100	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

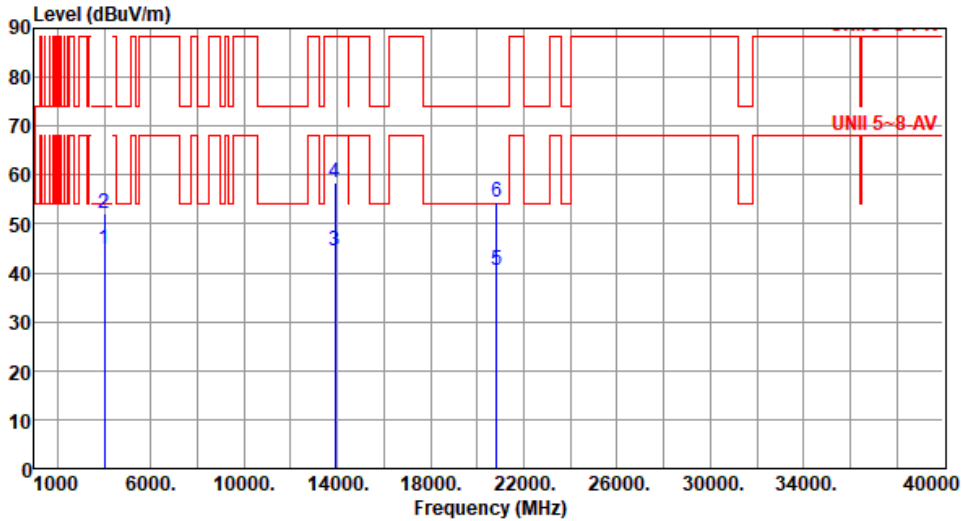

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.98	54.00	-9.02	47.22	-2.24	Average	308	210
2	4000.00	52.02	74.00	-21.98	54.26	-2.24	Peak	308	210
3	13890.00	44.34	68.20	-23.86	37.82	6.52	Average	100	158
4	13890.00	58.42	88.20	-29.78	51.90	6.52	Peak	100	158
5	20835.00	40.55	54.00	-13.45	37.93	2.62	Average	100	225
6	20835.00	54.41	74.00	-19.59	51.79	2.62	Peak	100	225

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	7025
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

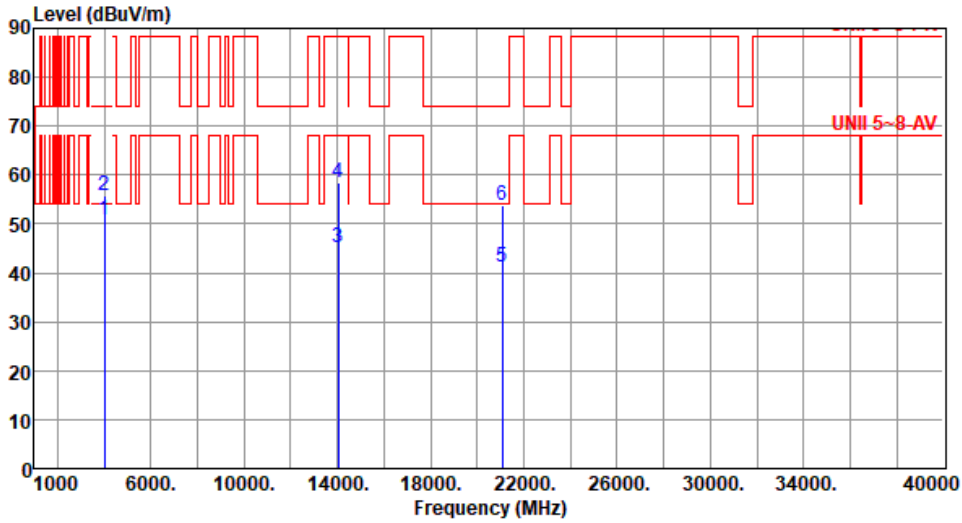

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.87	54.00	-3.13	53.11	-2.24	Average	288	136
2	4000.00	55.89	74.00	-18.11	58.13	-2.24	Peak	288	136
3	14050.00	45.31	68.20	-22.89	38.49	6.82	Average	100	168
4	14050.00	58.38	88.20	-29.82	51.56	6.82	Peak	100	168
5	21075.00	41.22	54.00	-12.78	38.09	3.13	Average	100	203
6	21075.00	53.94	74.00	-20.06	50.81	3.13	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484		Test Freq. (MHz)	7025					
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m			
1	4000.00	44.85	54.00	-9.15	47.09	-2.24	Average	307	208
2	4000.00	51.76	74.00	-22.24	54.00	-2.24	Peak	307	208
3	14050.00	45.11	68.20	-23.09	38.29	6.82	Average	100	102
4	14050.00	58.34	88.20	-29.86	51.52	6.82	Peak	100	102
5	21075.00	41.33	54.00	-12.67	38.20	3.13	Average	100	176
6	21075.00	54.03	74.00	-19.97	50.90	3.13	Peak	100	176
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




ST M.2, PCIe Module

Unwanted Emissions (Below 1GHz)

Modulation	ax HE80 RU484	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

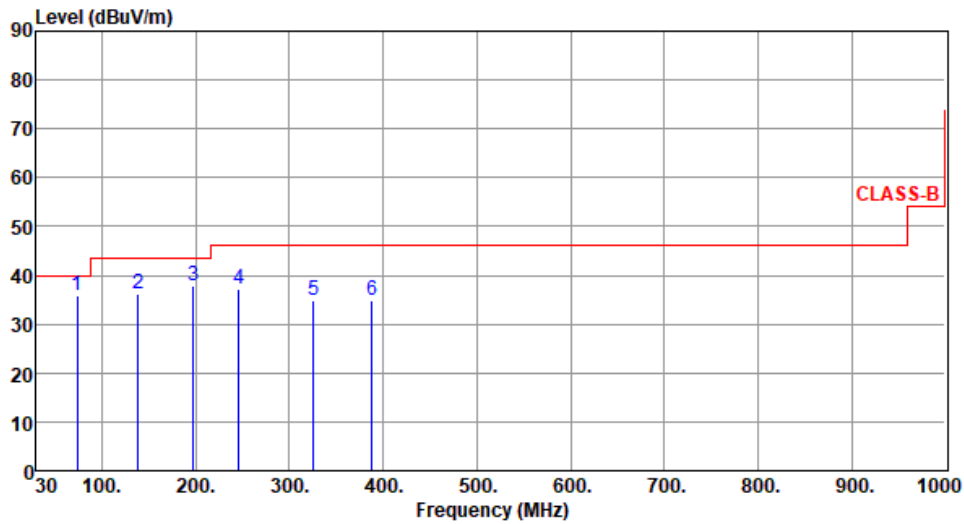

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	73.65	35.76	40.00	-4.24	47.86	-12.10	Peak	---	---
2	138.64	36.18	43.50	-7.32	45.67	-9.49	Peak	---	---
3	197.81	37.97	43.50	-5.53	49.76	-11.79	Peak	---	---
4	246.31	37.16	46.00	-8.84	47.31	-10.15	Peak	---	---
5	325.85	34.74	46.00	-11.26	42.23	-7.49	Peak	---	---
6	387.93	34.94	46.00	-11.06	40.77	-5.83	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	ax HE80 RU484	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

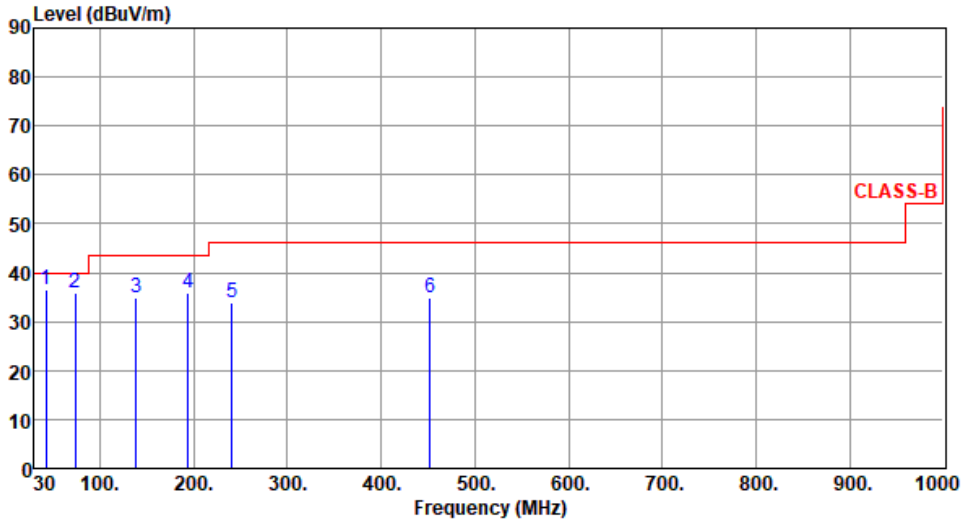

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.61	36.69	40.00	-3.31	45.03	-8.34	QP	100	133
2	73.65	35.84	40.00	-4.16	47.94	-12.10	Peak	---	---
3	138.64	34.89	43.50	-8.61	44.38	-9.49	Peak	---	---
4	193.93	35.79	43.50	-7.71	47.47	-11.68	Peak	---	---
5	240.49	33.75	46.00	-12.25	44.21	-10.46	Peak	---	---
6	451.95	34.80	46.00	-11.20	38.97	-4.17	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz)

Modulation	ax HE80 RU484	Test Freq. (MHz)	6145						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.70	54.00	-3.30	52.94	-2.24	Average	290	131
2	4000.00	55.34	74.00	-18.66	57.58	-2.24	Peak	290	131
3	12290.00	42.25	54.00	-11.75	36.11	6.14	Average	100	186
4	12290.00	55.41	74.00	-18.59	49.27	6.14	Peak	100	186
5	18435.00	40.28	54.00	-13.72	39.65	0.63	Average	100	201
6	18435.00	53.50	74.00	-20.50	52.87	0.63	Peak	100	201

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6145						
Polarization	Vertical								
Test By : Paul Lin		Temperature(°C): 24		Humidity(%): 65					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.52	54.00	-9.48	46.76	-2.24	Average	311	201
2	4000.00	51.72	74.00	-22.28	53.96	-2.24	Peak	311	201
3	12290.00	42.50	54.00	-11.50	36.36	6.14	Average	100	108
4	12290.00	55.78	74.00	-18.22	49.64	6.14	Peak	100	108
5	18435.00	41.28	54.00	-12.72	40.65	0.63	Average	100	201
6	18435.00	53.97	74.00	-20.03	53.34	0.63	Peak	100	201

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE80 RU484	Test Freq. (MHz)	6465						
Polarization	Horizontal								
Test By : Paul Lin		Temperature(°C): 24		Humidity(%): 65					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.73	54.00	-3.27	52.97	-2.24	Average	283	130
2	4000.00	55.08	74.00	-18.92	57.32	-2.24	Peak	283	130
3	12930.00	43.47	68.20	-24.73	37.07	6.40	Average	100	226
4	12930.00	56.65	88.20	-31.55	50.25	6.40	Peak	100	226
5	19395.00	40.95	54.00	-13.05	39.86	1.09	Average	100	112
6	19395.00	54.86	74.00	-19.14	53.77	1.09	Peak	100	112
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	ax HE80 RU484	Test Freq. (MHz)	6465
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

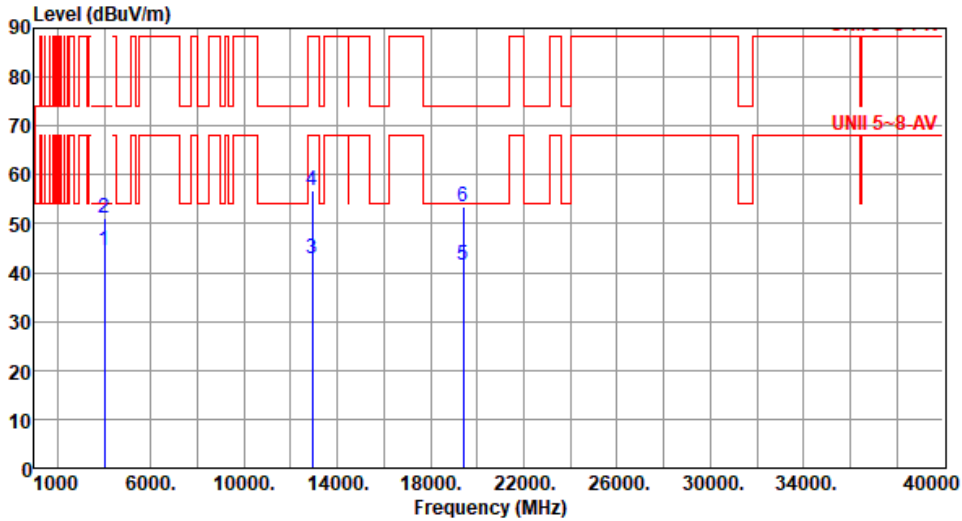

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.48	54.00	-9.52	46.72	-2.24	Average	301	200
2	4000.00	51.13	74.00	-22.87	53.37	-2.24	Peak	301	200
3	12930.00	42.94	68.20	-25.26	36.54	6.40	Average	100	186
4	12930.00	56.67	88.20	-31.53	50.27	6.40	Peak	100	186
5	19395.00	41.36	54.00	-12.64	40.27	1.09	Average	100	119
6	19395.00	53.56	74.00	-20.44	52.47	1.09	Peak	100	119

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6705						
Polarization	Horizontal								
Test By : Paul Lin Temperature(°C): 24 Humidity(%): 65									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	50.74	54.00	-3.26	52.98	-2.24	Average	281	132
2	4000.00	55.13	74.00	-18.87	57.37	-2.24	Peak	281	132
3	13410.00	43.33	68.20	-24.87	37.18	6.15	Average	100	201
4	13410.00	56.60	88.20	-31.60	50.45	6.15	Peak	100	201
5	20115.00	40.04	54.00	-13.96	38.48	1.56	Average	100	156
6	20115.00	54.03	74.00	-19.97	52.47	1.56	Peak	100	156
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE80 RU484	Test Freq. (MHz)	6705						
Polarization	Vertical								
Test By : Paul Lin		Temperature(°C): 24		Humidity(%): 65					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4000.00	44.27	54.00	-9.73	46.51	-2.24	Average	306	199
2	4000.00	51.22	74.00	-22.78	53.46	-2.24	Peak	306	199
3	13410.00	43.44	68.20	-24.76	37.29	6.15	Average	100	178
4	13410.00	56.49	88.20	-31.71	50.34	6.15	Peak	100	178
5	20115.00	38.38	54.00	-15.62	36.82	1.56	Average	100	200
6	20115.00	52.00	74.00	-22.00	50.44	1.56	Peak	100	200
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									




Modulation	ax HE80 RU484	Test Freq. (MHz)	6945						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):24 Humidity(%):65									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4000.00	50.75	54.00	-3.25	52.99	-2.24	Average	284	130
2	4000.00	55.30	74.00	-18.70	57.54	-2.24	Peak	284	130
3	13890.00	44.58	68.20	-23.62	38.06	6.52	Average	100	241
4	13890.00	58.11	88.20	-30.09	51.59	6.52	Peak	100	241
5	20835.00	40.68	54.00	-13.32	38.06	2.62	Average	100	152
6	20835.00	54.46	74.00	-19.54	51.84	2.62	Peak	100	152

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80 RU484	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):65

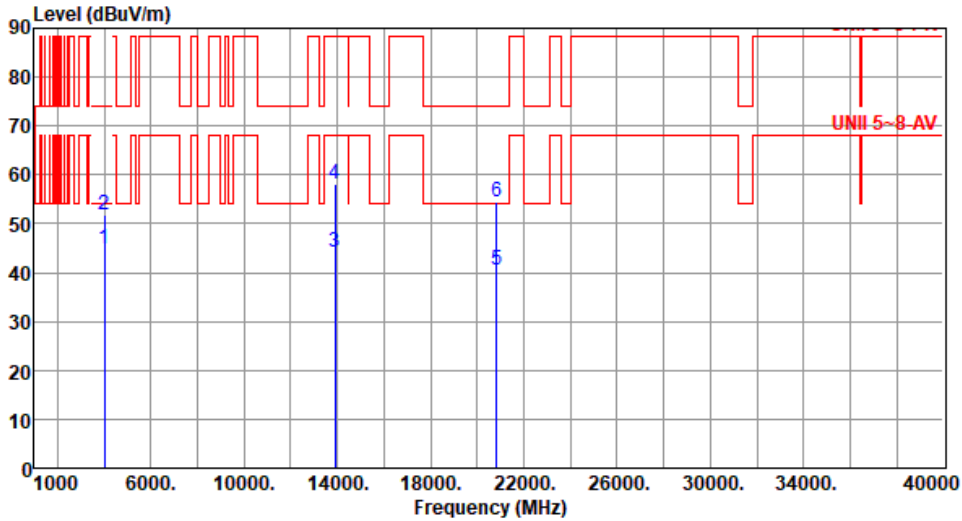

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4000.00	44.92	54.00	-9.08	47.16	-2.24	Average	308	213
2	4000.00	51.87	74.00	-22.13	54.11	-2.24	Peak	308	213
3	13890.00	44.28	68.20	-23.92	37.76	6.52	Average	100	165
4	13890.00	58.28	88.20	-29.92	51.76	6.52	Peak	100	165
5	20835.00	40.48	54.00	-13.52	37.86	2.62	Average	100	221
6	20835.00	54.32	74.00	-19.68	51.70	2.62	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




ST M.2, SDIO Module

Unwanted Emissions (Below 1GHz)

Modulation	ax HE80 RU484	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

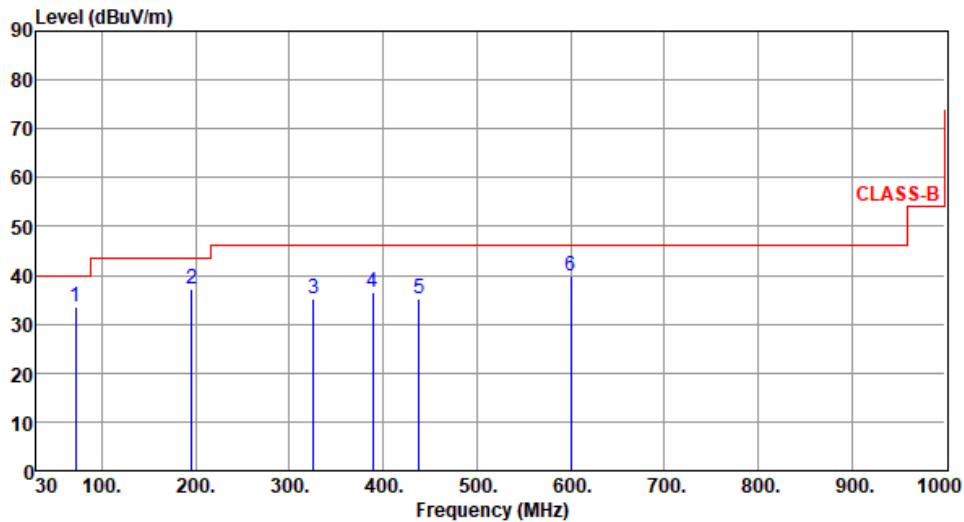

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.94	33.45	40.00	-6.55	44.95	-11.50	Peak	---	---
2	195.52	37.24	43.50	-6.26	48.93	-11.69	Peak	---	---
3	325.34	35.19	46.00	-10.81	42.69	-7.50	Peak	---	---
4	389.16	36.47	46.00	-9.53	42.28	-5.81	Peak	---	---
5	438.62	35.26	46.00	-10.74	39.74	-4.48	Peak	---	---
6	600.36	39.98	46.00	-6.02	40.90	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	ax HE80 RU484	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

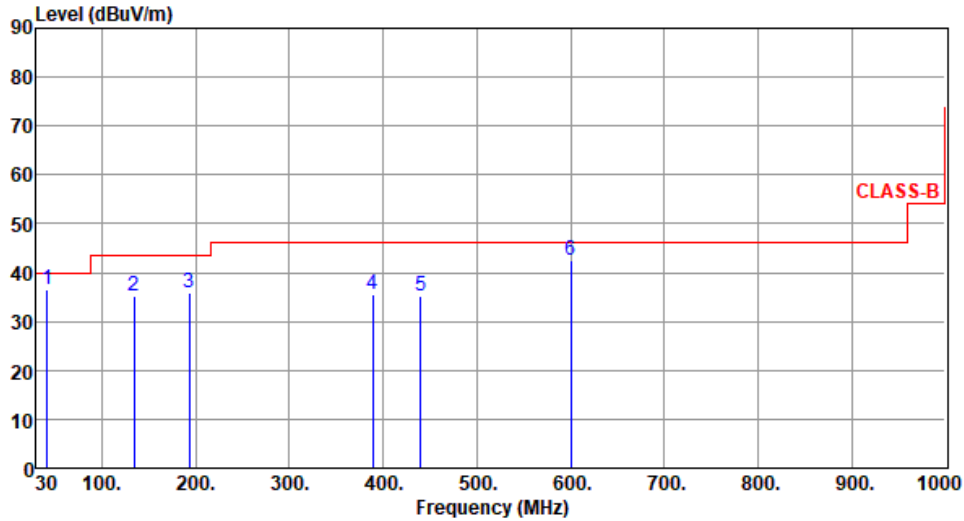

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	41.83	36.45	40.00	-3.55	45.07	-8.62	QP	100	173
2	134.31	35.22	43.50	-8.28	45.11	-9.89	Peak	---	---
3	193.46	35.97	43.50	-7.53	47.61	-11.64	Peak	---	---
4	388.56	35.62	46.00	-10.38	41.44	-5.82	Peak	---	---
5	440.15	35.17	46.00	-10.83	39.61	-4.44	Peak	---	---
6	600.36	42.58	46.00	-3.42	43.50	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_2TX	Pass	5.9519G	-18.24	5.9139G	-71.77	-58.24	-13.53	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_2TX	Pass	6.4132G	-19.79	6.4473G	-72.41	-59.79	-12.62	2
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_2TX	Pass	5.9525G	-19.03	5.9856G	-70.16	-59.03	-11.13	1
802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX	Pass	5.97279G	-18.68	5.9018G	-71.71	-58.68	-13.03	1
802.11ax HEW40_RU52_Index42_40MHz_Nss1,(MCS0)_2TX	Pass	5.97099G	-18.93	5.8876G	-71.80	-58.93	-12.87	1
802.11ax HEW40_RU106_Index54_40MHz_Nss1,(MCS0)_2TX	Pass	5.9642G	-18.81	6.034G	-71.72	-58.81	-12.91	1
802.11ax HEW40_RU242_Index61_40MHz_Nss1,(MCS0)_2TX	Pass	6.1602G	-17.89	6.0824G	-70.02	-57.89	-12.13	2
802.11ax HEW80_RU26_Index21_80MHz_Nss1,(MCS0)_2TX	Pass	6.15179G	-18.59	5.9494G	-71.73	-58.59	-13.14	2
802.11ax HEW80_RU52_Index50_80MHz_Nss1,(MCS0)_2TX	Pass	6.17097G	-18.23	5.9914G	-70.06	-58.23	-11.83	2
802.11ax HEW80_RU106_Index58_80MHz_Nss1,(MCS0)_2TX	Pass	6.15859G	-15.55	5.993G	-67.56	-55.55	-12.01	2
802.11ax HEW80_RU242_Index62_80MHz_Nss1,(MCS0)_2TX	Pass	6.13781G	-15.83	5.9502G	-66.76	-55.83	-10.93	2
802.11ax HEW80_RU484_Index65_80MHz_Nss1,(MCS0)_2TX	Pass	6.13421G	-15.83	5.9542G	-65.56	-55.83	-9.73	2
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_2TX	Pass	6.4725G	-19.32	6.4426G	-72.45	-59.32	-13.13	2
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_2TX	Pass	6.47G	-19.31	6.4426G	-72.34	-59.31	-13.03	2
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_2TX	Pass	6.4732G	-19.46	6.5056G	-70.66	-59.46	-11.20	2
802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX	Pass	6.53179G	-18.84	6.6224G	-72.37	-58.84	-13.53	1
802.11ax HEW40_RU52_Index42_40MHz_Nss1,(MCS0)_2TX	Pass	6.4498G	-18.89	6.3776G	-72.54	-58.89	-13.65	2
802.11ax HEW40_RU106_Index54_40MHz_Nss1,(MCS0)_2TX	Pass	6.47841G	-18.57	6.402G	-72.16	-58.57	-13.59	2
802.11ax HEW40_RU242_Index61_40MHz_Nss1,(MCS0)_2TX	Pass	6.5238G	-16.96	6.441G	-69.60	-56.96	-12.64	2
802.11ax HEW80_RU26_Index21_80MHz_Nss1,(MCS0)_2TX	Pass	6.47179G	-18.72	6.2994G	-72.14	-58.72	-13.42	2
802.11ax HEW80_RU52_Index50_80MHz_Nss1,(MCS0)_2TX	Pass	6.49337G	-17.14	6.6594G	-70.28	-57.14	-13.14	2
802.11ax HEW80_RU106_Index58_80MHz_Nss1,(MCS0)_2TX	Pass	6.47859G	-15.63	6.3298G	-67.95	-55.63	-12.32	2
802.11ax HEW80_RU242_Index62_80MHz_Nss1,(MCS0)_2TX	Pass	6.45341G	-15.71	6.2802G	-66.96	-55.71	-11.25	2
802.11ax	Pass	6.45781G	-15.36	6.2786G	-65.77	-55.36	-10.41	2



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
HEW80_RU484_Index65_80MHz_Nss1,(MCS0)_2TX								
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_2TX	Pass	6.8735G	-18.57	6.9122G	-71.36	-58.57	-12.79	2
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_2TX	Pass	6.872G	-18.42	6.9063G	-71.20	-58.42	-12.78	2
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_2TX	Pass	6.8519G	-18.56	6.8857G	-69.97	-58.56	-11.41	2
802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX	Pass	6.85179G	-18.45	6.9218G	-71.43	-58.45	-12.98	2
802.11ax HEW40_RU52_Index42_40MHz_Nss1,(MCS0)_2TX	Pass	6.85059G	-18.94	6.9328G	-71.36	-58.94	-12.42	2
802.11ax HEW40_RU106_Index54_40MHz_Nss1,(MCS0)_2TX	Pass	6.8404G	-18.60	6.9358G	-70.94	-58.60	-12.34	2
802.11ax HEW40_RU242_Index61_40MHz_Nss1,(MCS0)_2TX	Pass	6.83981G	-17.52	6.7746G	-68.94	-57.52	-11.42	2
802.11ax HEW80_RU26_Index21_80MHz_Nss1,(MCS0)_2TX	Pass	6.79099G	-18.99	6.9494G	-71.26	-58.99	-12.27	1
802.11ax HEW80_RU52_Index50_80MHz_Nss1,(MCS0)_2TX	Pass	6.81297G	-17.03	6.9518G	-69.40	-57.03	-12.37	1
802.11ax HEW80_RU106_Index58_80MHz_Nss1,(MCS0)_2TX	Pass	6.71859G	-15.93	6.8878G	-67.26	-55.93	-11.33	2
802.11ax HEW80_RU242_Index62_80MHz_Nss1,(MCS0)_2TX	Pass	6.85381G	-15.14	6.681G	-66.23	-55.14	-11.09	2
802.11ax HEW80_RU484_Index65_80MHz_Nss1,(MCS0)_2TX	Pass	6.85341G	-14.71	6.6714G	-64.86	-54.71	-10.15	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_2TX	Pass	7.0122G	-18.76	6.9724G	-71.55	-58.76	-12.79	1
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_2TX	Pass	7.0103G	-19.05	6.9837G	-71.18	-59.05	-12.13	1
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_2TX	Pass	7.00951G	-19.11	6.9832G	-70.19	-59.11	-11.08	1
802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX	Pass	7.01219G	-19.15	6.938G	-71.48	-59.15	-12.33	1
802.11ax HEW40_RU52_Index42_40MHz_Nss1,(MCS0)_2TX	Pass	6.93219G	-18.87	6.988G	-71.67	-58.87	-12.80	1
802.11ax HEW40_RU106_Index54_40MHz_Nss1,(MCS0)_2TX	Pass	6.99981G	-19.24	6.9282G	-71.19	-59.24	-11.95	1
802.11ax HEW40_RU242_Index61_40MHz_Nss1,(MCS0)_2TX	Pass	6.99881G	-18.76	6.9444G	-69.46	-58.76	-10.70	1
802.11ax HEW80_RU26_Index21_80MHz_Nss1,(MCS0)_2TX	Pass	7.03219G	-18.92	6.8906G	-71.77	-58.92	-12.85	1
802.11ax HEW80_RU52_Index50_80MHz_Nss1,(MCS0)_2TX	Pass	7.05057G	-18.33	6.8766G	-70.27	-58.33	-11.94	2
802.11ax HEW80_RU106_Index58_80MHz_Nss1,(MCS0)_2TX	Pass	7.03819G	-15.57	6.867G	-66.15	-55.57	-10.58	2
802.11ax HEW80_RU242_Index62_80MHz_Nss1,(MCS0)_2TX	Pass	7.01221G	-15.88	6.837G	-64.80	-55.88	-8.92	2



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11ax HEW80_RU484_Index65_80MHz_Nss1,(MCS0)_2TX	Pass	6.99543G	-15.39	6.8258G	-63.57	-55.39	-8.18	2



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11ax HEW20_RU26_Index3_20MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9519G	-18.24	5.9139G	-71.77	-58.24	-13.53	1
5955MHz	Pass	5.9533G	-17.83	5.9126G	-71.78	-57.83	-13.95	2
6175MHz	Pass	6.1727G	-17.70	6.1341G	-72.50	-57.70	-14.80	1
6175MHz	Pass	6.1729G	-18.48	6.1437G	-72.38	-58.48	-13.90	2
6415MHz	Pass	6.4124G	-17.62	6.4451G	-72.51	-57.62	-14.89	1
6415MHz	Pass	6.4133G	-19.02	6.4563G	-72.60	-59.02	-13.58	2
6435MHz	Pass	6.4321G	-17.18	6.4711G	-72.54	-57.18	-15.36	1
6435MHz	Pass	6.4326G	-18.08	6.4693G	-72.26	-58.08	-14.18	2
6475MHz	Pass	6.472G	-18.32	6.4438G	-72.33	-58.32	-14.01	1
6475MHz	Pass	6.4725G	-19.32	6.4426G	-72.45	-59.32	-13.13	2
6515MHz	Pass	6.5122G	-18.03	6.482G	-72.44	-58.03	-14.41	1
6515MHz	Pass	6.5132G	-18.31	6.4839G	-72.39	-58.31	-14.08	2
6535MHz	Pass	6.533G	-18.57	6.4957G	-72.48	-58.57	-13.91	1
6535MHz	Pass	6.5334G	-18.81	6.4965G	-72.39	-58.81	-13.58	2
6715MHz	Pass	6.7132G	-18.78	6.7587G	-72.05	-58.78	-13.27	1
6715MHz	Pass	6.7125G	-18.59	6.7587G	-71.94	-58.59	-13.35	2
6855MHz	Pass	6.8533G	-18.69	6.9044G	-71.66	-58.69	-12.97	1
6855MHz	Pass	6.8527G	-18.76	6.9024G	-71.59	-58.76	-12.83	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8734G	-18.45	6.9062G	-71.47	-58.45	-13.02	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8735G	-18.57	6.9122G	-71.36	-58.57	-12.79	2
6895MHz	Pass	6.8927G	-17.87	6.933G	-71.26	-57.87	-13.39	1
6895MHz	Pass	6.8928G	-17.80	6.9316G	-71.26	-57.80	-13.46	2
7015MHz	Pass	7.0122G	-18.76	6.9724G	-71.55	-58.76	-12.79	1
7015MHz	Pass	7.0128G	-18.00	6.9833G	-71.58	-58.00	-13.58	2
7095MHz	Pass	7.0928G	-19.13	7.0642G	-76.83	-59.13	-17.70	1
7095MHz	Pass	7.0934G	-18.40	7.0637G	-76.14	-58.40	-17.74	2
7115MHz	Pass	7.1125G	-19.57	7.0842G	-77.11	-59.57	-17.54	1
7115MHz	Pass	7.1131G	-18.89	7.0846G	-76.60	-58.89	-17.71	2
802.11ax HEW20_RU52_Index38_20MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9531G	-18.86	5.923G	-71.57	-58.86	-12.71	1
5955MHz	Pass	5.9528G	-18.20	5.9167G	-71.44	-58.20	-13.24	2
6175MHz	Pass	6.1712G	-18.21	6.145G	-71.86	-58.21	-13.65	1
6175MHz	Pass	6.1702G	-18.18	6.1444G	-72.04	-58.18	-13.86	2
6415MHz	Pass	6.4126G	-18.20	6.3842G	-72.26	-58.20	-14.06	1
6415MHz	Pass	6.4132G	-19.79	6.4473G	-72.41	-59.79	-12.62	2
6435MHz	Pass	6.4316G	-18.15	6.4042G	-72.35	-58.15	-14.20	1
6435MHz	Pass	6.4332G	-19.22	6.4849G	-72.30	-59.22	-13.08	2
6475MHz	Pass	6.4725G	-18.51	6.4439G	-72.37	-58.51	-13.86	1
6475MHz	Pass	6.47G	-19.31	6.4426G	-72.34	-59.31	-13.03	2
6515MHz	Pass	6.5122G	-18.46	6.4849G	-71.82	-58.46	-13.36	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6515MHz	Pass	6.5131G	-18.49	6.4819G	-72.03	-58.49	-13.54	2
6535MHz	Pass	6.5321G	-18.17	6.5033G	-72.16	-58.17	-13.99	1
6535MHz	Pass	6.5313G	-18.73	6.505G	-71.97	-58.73	-13.24	2
6715MHz	Pass	6.7119G	-18.30	6.7616G	-71.74	-58.30	-13.44	1
6715MHz	Pass	6.7131G	-18.44	6.7506G	-71.83	-58.44	-13.39	2
6855MHz	Pass	6.85G	-17.75	6.888G	-71.55	-57.75	-13.80	1
6855MHz	Pass	6.8501G	-18.05	6.8246G	-71.10	-58.05	-13.05	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8704G	-17.99	6.911G	-71.26	-57.99	-13.27	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.872G	-18.42	6.9063G	-71.20	-58.42	-12.78	2
6895MHz	Pass	6.8918G	-18.58	6.9301G	-71.15	-58.58	-12.57	1
6895MHz	Pass	6.8922G	-18.29	6.9317G	-70.95	-58.29	-12.66	2
7015MHz	Pass	7.0103G	-19.05	6.9837G	-71.18	-59.05	-12.13	1
7015MHz	Pass	7.0106G	-18.47	6.9827G	-70.95	-58.47	-12.48	2
7095MHz	Pass	7.08991G	-19.32	7.0648G	-75.92	-59.32	-16.60	1
7095MHz	Pass	7.0927G	-18.64	7.063G	-75.38	-58.64	-16.74	2
7115MHz	Pass	7.1116G	-19.66	7.0849G	-76.28	-59.66	-16.62	1
7115MHz	Pass	7.113G	-19.14	7.0849G	-75.68	-59.14	-16.54	2
802.11ax HEW20_RU106_Index53_20MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9525G	-19.03	5.9856G	-70.16	-59.03	-11.13	1
5955MHz	Pass	5.9514G	-18.26	5.9856G	-70.00	-58.26	-11.74	2
6175MHz	Pass	6.1714G	-18.21	6.2056G	-70.80	-58.21	-12.59	1
6175MHz	Pass	6.173G	-18.61	6.2058G	-71.03	-58.61	-12.42	2
6415MHz	Pass	6.4106G	-18.42	6.4457G	-70.47	-58.42	-12.05	1
6415MHz	Pass	6.413G	-19.41	6.4457G	-71.25	-59.41	-11.84	2
6435MHz	Pass	6.4319G	-17.96	6.4658G	-70.57	-57.96	-12.61	1
6435MHz	Pass	6.431G	-18.67	6.4656G	-70.73	-58.67	-12.06	2
6475MHz	Pass	6.4726G	-18.69	6.5059G	-70.50	-58.69	-11.81	1
6475MHz	Pass	6.4732G	-19.46	6.5056G	-70.66	-59.46	-11.20	2
6515MHz	Pass	6.5123G	-17.75	6.5456G	-70.40	-57.75	-12.65	1
6515MHz	Pass	6.5112G	-18.06	6.5456G	-70.20	-58.06	-12.14	2
6535MHz	Pass	6.52951G	-17.90	6.5657G	-70.25	-57.90	-12.35	1
6535MHz	Pass	6.5328G	-18.37	6.5657G	-70.61	-58.37	-12.24	2
6715MHz	Pass	6.7115G	-18.21	6.7455G	-70.33	-58.21	-12.12	1
6715MHz	Pass	6.7112G	-18.42	6.7457G	-69.99	-58.42	-11.57	2
6855MHz	Pass	6.8506G	-18.16	6.8855G	-69.91	-58.16	-11.75	1
6855MHz	Pass	6.8519G	-18.56	6.8857G	-69.97	-58.56	-11.41	2
6875MHz Straddle 6.525-6.875GHz	Pass	6.8701G	-18.21	6.9057G	-69.89	-58.21	-11.68	1
6875MHz Straddle 6.525-6.875GHz	Pass	6.8729G	-18.59	6.9056G	-70.02	-58.59	-11.43	2
6895MHz	Pass	6.8919G	-18.66	6.9256G	-69.78	-58.66	-11.12	1
6895MHz	Pass	6.88691G	-18.56	6.9256G	-69.74	-58.56	-11.18	2
7015MHz	Pass	7.00951G	-19.11	6.9832G	-70.19	-59.11	-11.08	1
7015MHz	Pass	7.0111G	-18.46	6.9844G	-70.01	-58.46	-11.55	2



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7095MHz	Pass	7.08961G	-19.25	7.084G	-53.00	-39.25	-13.75	1
7095MHz	Pass	7.0933G	-18.44	7.084G	-51.22	-38.44	-12.78	2
7115MHz	Pass	7.1131G	-19.89	7.104G	-52.85	-39.89	-12.96	1
7115MHz	Pass	7.1132G	-18.96	7.104G	-52.92	-38.96	-13.96	2
802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97279G	-18.68	5.9018G	-71.71	-58.68	-13.03	1
5965MHz	Pass	5.97279G	-18.41	5.8902G	-71.58	-58.41	-13.17	2
6165MHz	Pass	6.17259G	-18.32	6.0996G	-72.43	-58.32	-14.11	1
6165MHz	Pass	6.17259G	-18.47	6.0742G	-72.36	-58.47	-13.89	2
6405MHz	Pass	6.41199G	-17.86	6.4798G	-72.58	-57.86	-14.72	1
6405MHz	Pass	6.41199G	-18.62	6.337G	-72.42	-58.62	-13.80	2
6445MHz	Pass	6.45279G	-17.70	6.5308G	-72.46	-57.70	-14.76	1
6445MHz	Pass	6.45239G	-18.03	6.5072G	-72.46	-58.03	-14.43	2
6485MHz	Pass	6.49199G	-18.48	6.4174G	-72.67	-58.48	-14.19	1
6485MHz	Pass	6.49299G	-18.68	6.423G	-72.66	-58.68	-13.98	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.53179G	-18.84	6.6224G	-72.37	-58.84	-13.53	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.53299G	-18.67	6.6204G	-72.38	-58.67	-13.71	2
6565MHz	Pass	6.57199G	-18.19	6.6376G	-72.35	-58.19	-14.16	1
6565MHz	Pass	6.57319G	-18.53	6.6472G	-72.33	-58.53	-13.80	2
6725MHz	Pass	6.73179G	-18.65	6.7882G	-71.92	-58.65	-13.27	1
6725MHz	Pass	6.73319G	-18.28	6.8072G	-71.94	-58.28	-13.66	2
6845MHz	Pass	6.85199G	-18.16	6.9436G	-71.45	-58.16	-13.29	1
6845MHz	Pass	6.85179G	-18.45	6.9218G	-71.43	-58.45	-12.98	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.89179G	-18.28	6.954G	-71.46	-58.28	-13.18	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.89239G	-18.05	6.9744G	-71.40	-58.05	-13.35	2
6925MHz	Pass	6.93219G	-18.25	6.9956G	-71.81	-58.25	-13.56	1
6925MHz	Pass	6.93199G	-18.67	6.9876G	-71.74	-58.67	-13.07	2
7005MHz	Pass	7.01219G	-19.15	6.938G	-71.48	-59.15	-12.33	1
7005MHz	Pass	7.01199G	-18.73	6.9248G	-71.23	-58.73	-12.50	2
7085MHz	Pass	7.09239G	-20.60	7.167G	-77.59	-60.60	-16.99	1
7085MHz	Pass	7.09279G	-19.99	7.1678G	-77.44	-59.99	-17.45	2
802.11ax HEW40_RU52_Index42_40MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97099G	-18.93	5.8876G	-71.80	-58.93	-12.87	1
5965MHz	Pass	5.97019G	-18.51	5.904G	-71.76	-58.51	-13.25	2
6165MHz	Pass	6.17139G	-18.72	6.0728G	-72.37	-58.72	-13.65	1
6165MHz	Pass	6.17079G	-18.81	6.0768G	-72.37	-58.81	-13.56	2
6405MHz	Pass	6.41079G	-18.10	6.3366G	-72.52	-58.10	-14.42	1
6405MHz	Pass	6.41119G	-19.10	6.308G	-72.53	-59.10	-13.43	2
6445MHz	Pass	6.45199G	-18.22	6.5254G	-72.50	-58.22	-14.28	1
6445MHz	Pass	6.4498G	-18.89	6.3776G	-72.54	-58.89	-13.65	2
6485MHz	Pass	6.4898G	-18.26	6.415G	-72.65	-58.26	-14.39	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6485MHz	Pass	6.49139G	-18.06	6.413G	-72.49	-58.06	-14.43	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.53259G	-18.63	6.605G	-72.47	-58.63	-13.84	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.53019G	-18.32	6.623G	-72.34	-58.32	-14.02	2
6565MHz	Pass	6.57119G	-18.25	6.5024G	-72.33	-58.25	-14.08	1
6565MHz	Pass	6.57159G	-18.54	6.646G	-72.18	-58.54	-13.64	2
6725MHz	Pass	6.73019G	-18.29	6.8072G	-71.84	-58.29	-13.55	1
6725MHz	Pass	6.73059G	-18.28	6.8054G	-71.84	-58.28	-13.56	2
6845MHz	Pass	6.85079G	-18.73	6.9376G	-71.49	-58.73	-12.76	1
6845MHz	Pass	6.85059G	-18.94	6.9328G	-71.36	-58.94	-12.42	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.89079G	-18.13	6.9588G	-71.42	-58.13	-13.29	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.89059G	-18.03	6.9522G	-71.22	-58.03	-13.19	2
6925MHz	Pass	6.93219G	-18.87	6.988G	-71.67	-58.87	-12.80	1
6925MHz	Pass	6.93079G	-18.54	6.9946G	-71.62	-58.54	-13.08	2
7005MHz	Pass	7.01G	-18.63	6.9368G	-71.46	-58.63	-12.83	1
7005MHz	Pass	7.01119G	-18.13	6.9114G	-71.10	-58.13	-12.97	2
7085MHz	Pass	7.09079G	-19.16	7.1656G	-77.29	-59.16	-18.13	1
7085MHz	Pass	7.09059G	-18.28	7.0158G	-76.36	-58.28	-18.08	2
802.11ax HEW40_RU106_Index54_40MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.9642G	-18.81	6.034G	-71.72	-58.81	-12.91	1
5965MHz	Pass	5.9612G	-18.10	5.8916G	-71.44	-58.10	-13.34	2
6165MHz	Pass	6.15801G	-18.49	6.0798G	-72.24	-58.49	-13.75	1
6165MHz	Pass	6.1608G	-18.61	6.066G	-72.00	-58.61	-13.39	2
6405MHz	Pass	6.39941G	-17.78	6.3356G	-72.29	-57.78	-14.51	1
6405MHz	Pass	6.401G	-18.50	6.3194G	-72.06	-58.50	-13.56	2
6445MHz	Pass	6.4406G	-18.03	6.514G	-72.47	-58.03	-14.44	1
6445MHz	Pass	6.4404G	-18.37	6.3654G	-72.08	-58.37	-13.71	2
6485MHz	Pass	6.481G	-18.52	6.4238G	-72.34	-58.52	-13.82	1
6485MHz	Pass	6.47841G	-18.57	6.402G	-72.16	-58.57	-13.59	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.51961G	-18.53	6.4438G	-72.27	-58.53	-13.74	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.5206G	-18.19	6.461G	-72.08	-58.19	-13.89	2
6565MHz	Pass	6.5628G	-18.55	6.6346G	-71.96	-58.55	-13.41	1
6565MHz	Pass	6.5604G	-18.41	6.6374G	-71.86	-58.41	-13.45	2
6725MHz	Pass	6.7212G	-18.79	6.7938G	-71.55	-58.79	-12.76	1
6725MHz	Pass	6.7206G	-18.41	6.7922G	-71.42	-58.41	-13.01	2
6845MHz	Pass	6.83901G	-18.22	6.941G	-71.14	-58.22	-12.92	1
6845MHz	Pass	6.8404G	-18.60	6.9358G	-70.94	-58.60	-12.34	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.87961G	-18.76	6.945G	-71.24	-58.76	-12.48	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.87901G	-18.50	6.954G	-71.04	-58.50	-12.54	2
6925MHz	Pass	6.9202G	-18.81	6.9866G	-71.58	-58.81	-12.77	1
6925MHz	Pass	6.92G	-18.40	6.9968G	-71.29	-58.40	-12.89	2
7005MHz	Pass	6.99981G	-19.24	6.9282G	-71.19	-59.24	-11.95	1
7005MHz	Pass	6.99921G	-18.75	6.9336G	-70.84	-58.75	-12.09	2



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
7085MHz	Pass	7.07881G	-18.77	7.1546G	-76.66	-58.77	-17.89	1
7085MHz	Pass	7.0812G	-17.95	6.9978G	-74.98	-57.95	-17.03	2
802.11ax HEW40_RU242_Index61_40MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.95801G	-17.27	5.9046G	-69.56	-57.27	-12.29	1
5965MHz	Pass	5.9606G	-16.56	5.8826G	-69.09	-56.56	-12.53	2
6165MHz	Pass	6.1618G	-17.66	6.1024G	-70.21	-57.66	-12.55	1
6165MHz	Pass	6.1602G	-17.89	6.0824G	-70.02	-57.89	-12.13	2
6405MHz	Pass	6.4028G	-16.35	6.3426G	-69.95	-56.35	-13.60	1
6405MHz	Pass	6.4036G	-16.86	6.344G	-69.87	-56.86	-13.01	2
6445MHz	Pass	6.4424G	-16.70	6.5064G	-70.10	-56.70	-13.40	1
6445MHz	Pass	6.4408G	-17.08	6.5062G	-69.85	-57.08	-12.77	2
6485MHz	Pass	6.4814G	-17.68	6.419G	-70.41	-57.68	-12.73	1
6485MHz	Pass	6.47901G	-17.11	6.3992G	-69.81	-57.11	-12.70	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.51941G	-17.20	6.5874G	-70.16	-57.20	-12.96	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.5238G	-16.96	6.441G	-69.60	-56.96	-12.64	2
6565MHz	Pass	6.55981G	-17.41	6.6266G	-69.93	-57.41	-12.52	1
6565MHz	Pass	6.56G	-17.38	6.6374G	-69.66	-57.38	-12.28	2
6725MHz	Pass	6.7208G	-17.57	6.7862G	-69.56	-57.57	-11.99	1
6725MHz	Pass	6.7224G	-16.98	6.7854G	-69.34	-56.98	-12.36	2
6845MHz	Pass	6.83901G	-17.38	6.9066G	-69.33	-57.38	-11.95	1
6845MHz	Pass	6.83981G	-17.52	6.7746G	-68.94	-57.52	-11.42	2
6885MHz Straddle 6.525-6.875GHz	Pass	6.87921G	-16.55	6.9454G	-69.20	-56.55	-12.65	1
6885MHz Straddle 6.525-6.875GHz	Pass	6.883G	-16.32	6.7914G	-68.69	-56.32	-12.37	2
6925MHz	Pass	6.9214G	-17.22	6.987G	-69.54	-57.22	-12.32	1
6925MHz	Pass	6.92G	-17.28	6.8464G	-69.29	-57.28	-12.01	2
7005MHz	Pass	6.99881G	-18.76	6.9444G	-69.46	-58.76	-10.70	1
7005MHz	Pass	6.99601G	-18.17	6.939G	-68.93	-58.17	-10.76	2
7085MHz	Pass	7.07941G	-18.90	7.0242G	-74.37	-58.90	-15.47	1
7085MHz	Pass	7.07861G	-18.16	6.9856G	-72.39	-58.16	-14.23	2
802.11ax HEW80_RU26_Index21_80MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.99179G	-18.48	5.8618G	-71.93	-58.48	-13.45	1
5985MHz	Pass	5.99139G	-18.09	5.863G	-71.83	-58.09	-13.74	2
6145MHz	Pass	6.15179G	-18.36	5.9778G	-71.99	-58.36	-13.63	1
6145MHz	Pass	6.15179G	-18.59	5.9494G	-71.73	-58.59	-13.14	2
6385MHz	Pass	6.39219G	-17.47	6.5398G	-72.51	-57.47	-15.04	1
6385MHz	Pass	6.39139G	-18.63	6.2134G	-72.28	-58.63	-13.65	2
6465MHz	Pass	6.47219G	-17.67	6.6206G	-72.24	-57.67	-14.57	1
6465MHz	Pass	6.47179G	-18.72	6.2994G	-72.14	-58.72	-13.42	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.55219G	-18.25	6.7418G	-72.23	-58.25	-13.98	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.55219G	-18.00	6.7326G	-72.01	-58.00	-14.01	2
6625MHz	Pass	6.63179G	-18.23	6.7794G	-71.80	-58.23	-13.57	1




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6625MHz	Pass	6.63219G	-17.96	6.7918G	-71.60	-57.96	-13.64	2
6705MHz	Pass	6.71099G	-18.56	6.9022G	-71.34	-58.56	-12.78	1
6705MHz	Pass	6.71219G	-18.45	6.8974G	-71.49	-58.45	-13.04	2
6785MHz	Pass	6.79099G	-18.99	6.9494G	-71.26	-58.99	-12.27	1
6785MHz	Pass	6.79179G	-18.68	6.9354G	-71.11	-58.68	-12.43	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.87179G	-18.60	6.9862G	-71.93	-58.60	-13.33	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.87179G	-18.36	6.9878G	-71.91	-58.36	-13.55	2
6945MHz	Pass	6.95139G	-18.21	6.767G	-72.10	-58.21	-13.89	1
6945MHz	Pass	6.95179G	-18.18	6.787G	-71.70	-58.18	-13.52	2
7025MHz	Pass	7.03219G	-18.92	6.8906G	-71.77	-58.92	-12.85	1
7025MHz	Pass	7.03139G	-18.23	6.8942G	-71.36	-58.23	-13.13	2
802.11ax HEW80_RU52_Index50_80MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.01097G	-17.58	5.8626G	-70.08	-57.58	-12.50	1
5985MHz	Pass	6.01297G	-17.20	5.859G	-69.80	-57.20	-12.60	2
6145MHz	Pass	6.17217G	-18.12	5.9686G	-70.11	-58.12	-11.99	1
6145MHz	Pass	6.17097G	-18.23	5.9914G	-70.06	-58.23	-11.83	2
6385MHz	Pass	6.41297G	-17.32	6.5242G	-70.79	-57.32	-13.47	1
6385MHz	Pass	6.41057G	-18.01	6.2066G	-70.66	-58.01	-12.65	2
6465MHz	Pass	6.49057G	-16.75	6.6138G	-70.51	-56.75	-13.76	1
6465MHz	Pass	6.49337G	-17.14	6.6594G	-70.28	-57.14	-13.14	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.57297G	-16.30	6.743G	-70.53	-56.30	-14.23	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.57017G	-16.37	6.423G	-70.22	-56.37	-13.85	2
6625MHz	Pass	6.65217G	-16.43	6.789G	-70.06	-56.43	-13.63	1
6625MHz	Pass	6.65297G	-16.66	6.7806G	-69.86	-56.66	-13.20	2
6705MHz	Pass	6.73137G	-16.57	6.8978G	-69.71	-56.57	-13.14	1
6705MHz	Pass	6.73017G	-16.13	6.9046G	-69.34	-56.13	-13.21	2
6785MHz	Pass	6.81297G	-17.03	6.9518G	-69.40	-57.03	-12.37	1
6785MHz	Pass	6.81177G	-16.78	6.941G	-69.31	-56.78	-12.53	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.89097G	-18.89	6.9946G	-71.88	-58.89	-12.99	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.89297G	-18.83	6.985G	-71.68	-58.83	-12.85	2
6945MHz	Pass	6.97217G	-16.71	6.7822G	-70.11	-56.71	-13.40	1
6945MHz	Pass	6.97177G	-16.01	6.7886G	-69.26	-56.01	-13.25	2
7025MHz	Pass	7.05017G	-18.84	6.8994G	-71.40	-58.84	-12.56	1
7025MHz	Pass	7.05057G	-18.33	6.8766G	-70.27	-58.33	-11.94	2
802.11ax HEW80_RU106_Index58_80MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.99739G	-15.09	5.861G	-67.99	-55.09	-12.90	1
5985MHz	Pass	5.99899G	-14.57	5.8546G	-67.47	-54.57	-12.90	2
6145MHz	Pass	6.15899G	-15.60	6.0106G	-68.09	-55.60	-12.49	1
6145MHz	Pass	6.15859G	-15.55	5.993G	-67.56	-55.55	-12.01	2
6385MHz	Pass	6.39899G	-14.59	6.5254G	-68.52	-54.59	-13.93	1
6385MHz	Pass	6.39979G	-15.57	6.2206G	-68.04	-55.57	-12.47	2





Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6465MHz	Pass	6.48298G	-15.10	6.6286G	-68.36	-55.10	-13.26	1
6465MHz	Pass	6.47859G	-15.63	6.3298G	-67.95	-55.63	-12.32	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.55739G	-15.06	6.7406G	-68.48	-55.06	-13.42	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.55859G	-15.19	6.3866G	-67.99	-55.19	-12.80	2
6625MHz	Pass	6.63859G	-15.05	6.7746G	-68.03	-55.05	-12.98	1
6625MHz	Pass	6.63939G	-15.33	6.7842G	-67.38	-55.33	-12.05	2
6705MHz	Pass	6.71819G	-16.03	6.905G	-67.89	-56.03	-11.86	1
6705MHz	Pass	6.71859G	-15.93	6.8878G	-67.26	-55.93	-11.33	2
6785MHz	Pass	6.79779G	-15.38	6.9302G	-67.32	-55.38	-11.94	1
6785MHz	Pass	6.79779G	-14.99	6.9722G	-67.10	-54.99	-12.11	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.87899G	-15.50	6.9882G	-67.85	-55.50	-12.35	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.87739G	-15.39	6.9986G	-67.47	-55.39	-12.08	2
6945MHz	Pass	6.96058G	-15.56	6.8022G	-67.73	-55.56	-12.17	1
6945MHz	Pass	6.95899G	-14.95	6.775G	-66.67	-54.95	-11.72	2
7025MHz	Pass	7.03779G	-16.22	6.9046G	-67.40	-56.22	-11.18	1
7025MHz	Pass	7.03819G	-15.57	6.867G	-66.15	-55.57	-10.58	2
802.11ax HEW80_RU242_Index62_80MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.97741G	-15.04	5.8658G	-67.38	-54.80	-12.58	1
5985MHz	Pass	5.97741G	-14.23	5.8618G	-66.78	-54.23	-12.55	2
6145MHz	Pass	6.13341G	-15.68	6.0242G	-67.90	-55.68	-12.22	1
6145MHz	Pass	6.13781G	-15.83	5.9502G	-66.76	-55.83	-10.93	2
6385MHz	Pass	6.36982G	-14.42	6.513G	-68.25	-54.42	-13.83	1
6385MHz	Pass	6.37381G	-15.40	6.1906G	-67.13	-55.40	-11.73	2
6465MHz	Pass	6.45341G	-15.05	6.3362G	-68.23	-55.05	-13.18	1
6465MHz	Pass	6.45341G	-15.71	6.2802G	-66.96	-55.71	-11.25	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.53341G	-15.62	6.6682G	-68.21	-55.62	-12.59	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.53621G	-15.62	6.3698G	-67.27	-55.62	-11.65	2
6625MHz	Pass	6.61141G	-15.40	6.7706G	-67.64	-55.40	-12.24	1
6625MHz	Pass	6.61021G	-15.44	6.7862G	-66.71	-55.44	-11.27	2
6705MHz	Pass	6.69381G	-15.05	6.891G	-67.84	-55.05	-12.79	1
6705MHz	Pass	6.69661G	-14.94	6.853G	-66.69	-54.94	-11.75	2
6785MHz	Pass	6.77341G	-15.49	6.9322G	-67.20	-55.49	-11.71	1
6785MHz	Pass	6.77381G	-15.12	6.941G	-66.31	-55.12	-11.19	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.85221G	-15.33	6.7358G	-67.71	-55.33	-12.38	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.85381G	-15.14	6.681G	-66.23	-55.14	-11.09	2
6945MHz	Pass	6.93221G	-15.43	6.7942G	-67.35	-55.43	-11.92	1
6945MHz	Pass	6.93381G	-14.61	6.7582G	-65.19	-54.61	-10.58	2
7025MHz	Pass	7.01141G	-16.35	6.889G	-67.16	-56.35	-10.81	1
7025MHz	Pass	7.01221G	-15.88	6.837G	-64.80	-55.88	-8.92	2
802.11ax HEW80_RU484_Index65_80MHz_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.97541G	-15.48	5.859G	-67.13	-55.48	-11.65	1






Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5985MHz	Pass	5.97581G	-14.87	5.8594G	-66.15	-54.87	-11.28	2
6145MHz	Pass	6.13381G	-15.96	6.023G	-66.88	-55.96	-10.92	1
6145MHz	Pass	6.13421G	-15.83	5.9542G	-65.56	-55.83	-9.73	2
6385MHz	Pass	6.37461G	-14.78	6.2522G	-67.46	-54.78	-12.68	1
6385MHz	Pass	6.37421G	-15.76	6.1914G	-66.23	-55.76	-10.47	2
6465MHz	Pass	6.45421G	-14.52	6.3434G	-67.38	-54.52	-12.86	1
6465MHz	Pass	6.45781G	-15.36	6.2786G	-65.77	-55.36	-10.41	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.53301G	-15.12	6.667G	-67.56	-55.12	-12.44	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.53861G	-15.12	6.3514G	-65.98	-55.12	-10.86	2
6625MHz	Pass	6.61501G	-15.86	6.747G	-67.28	-55.86	-11.42	1
6625MHz	Pass	6.61141G	-15.82	6.779G	-66.06	-55.82	-10.24	2
6705MHz	Pass	6.7026G	-15.25	6.897G	-67.32	-55.25	-12.07	1
6705MHz	Pass	6.69541G	-14.86	6.519G	-65.64	-54.86	-10.78	2
6785MHz	Pass	6.77461G	-15.66	6.9378G	-66.98	-55.66	-11.32	1
6785MHz	Pass	6.77301G	-15.10	6.5982G	-65.60	-55.10	-10.50	2
6865MHz Straddle 6.525-6.875GHz	Pass	6.85541G	-14.89	6.9874G	-67.18	-54.89	-12.29	1
6865MHz Straddle 6.525-6.875GHz	Pass	6.85341G	-14.71	6.6714G	-64.86	-54.71	-10.15	2
6945MHz	Pass	6.93421G	-14.85	6.7706G	-66.84	-54.85	-11.99	1
6945MHz	Pass	6.93221G	-14.83	6.7522G	-64.00	-54.83	-9.17	2
7025MHz	Pass	6.99623G	-15.91	6.8998G	-66.88	-55.91	-10.97	1
7025MHz	Pass	6.99543G	-15.39	6.8258G	-63.57	-55.39	-8.18	2

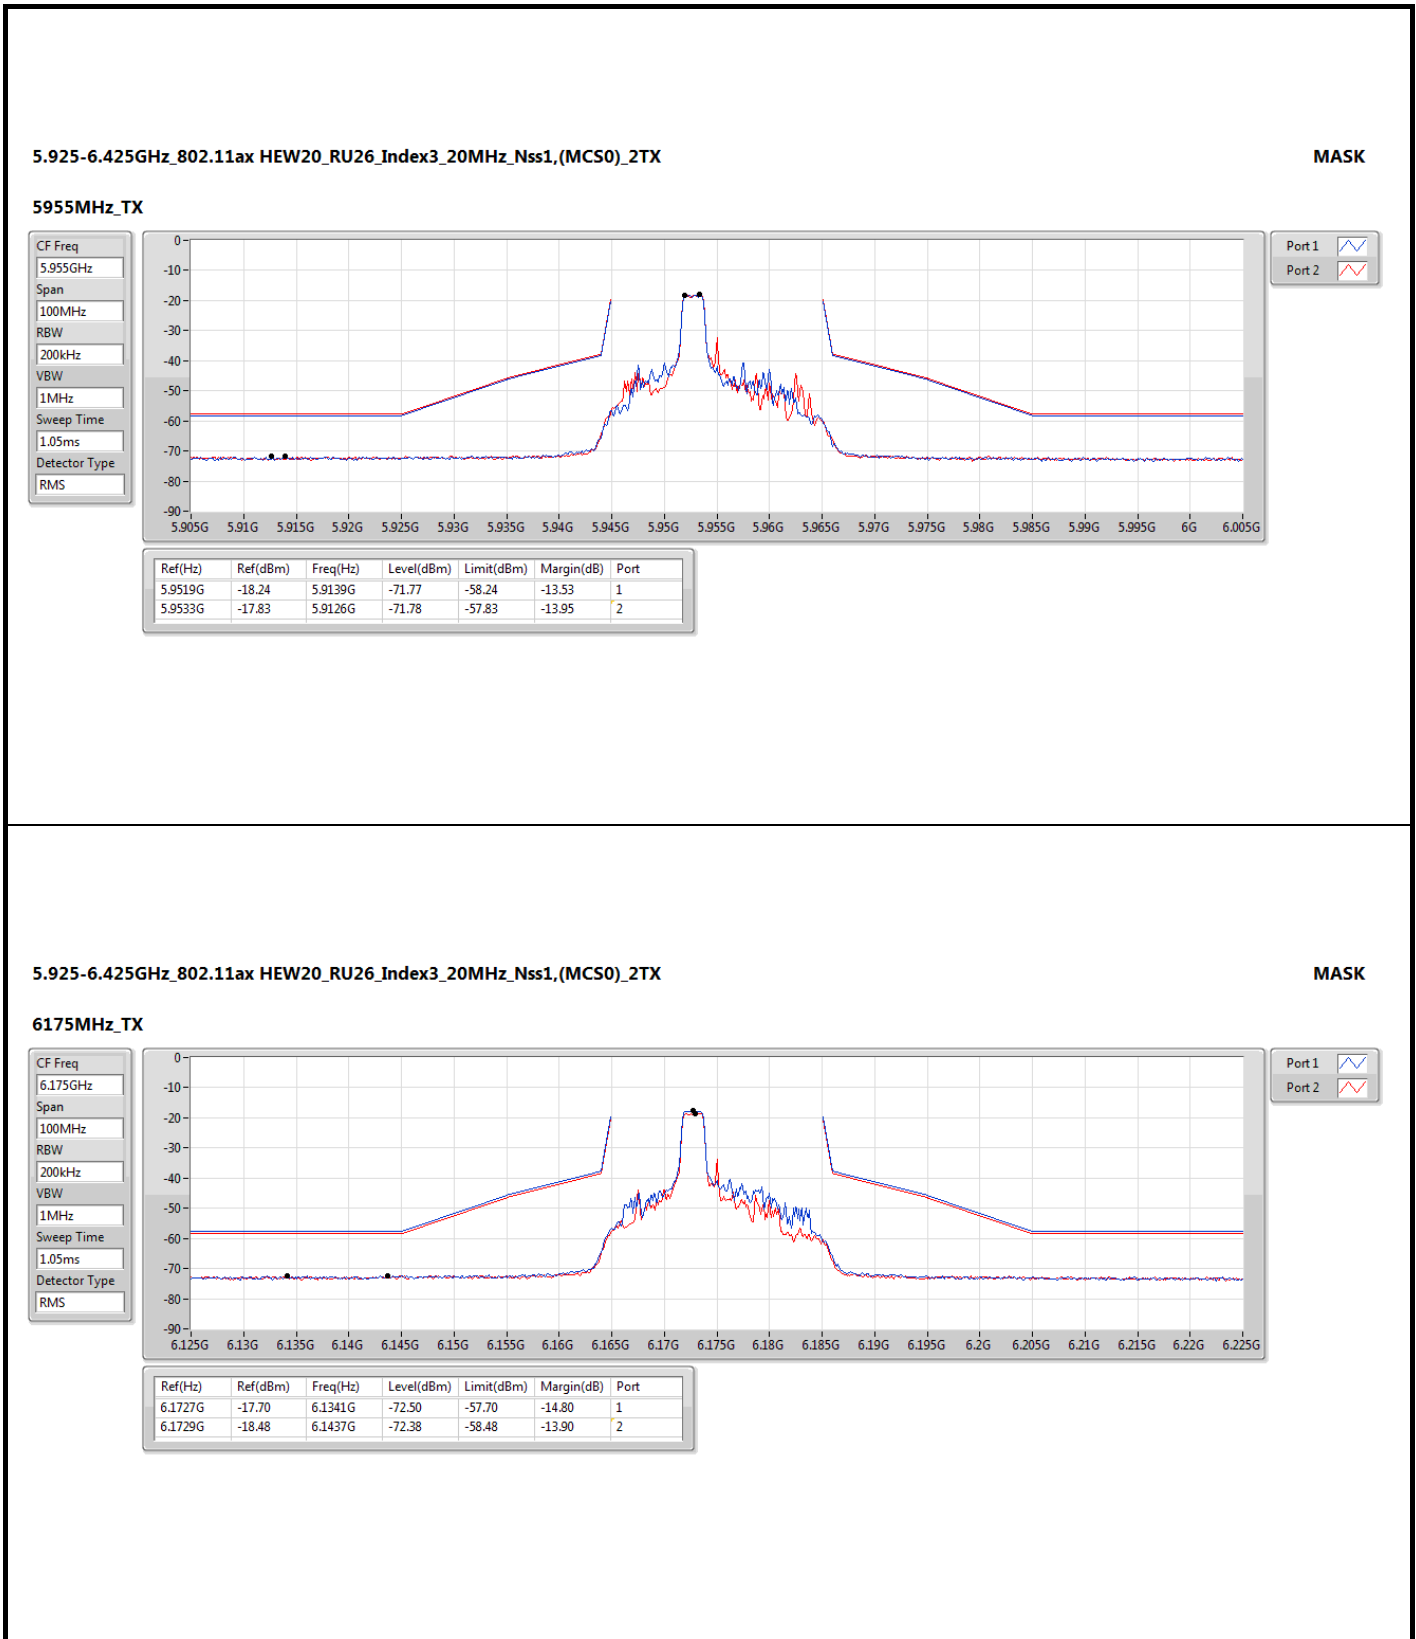


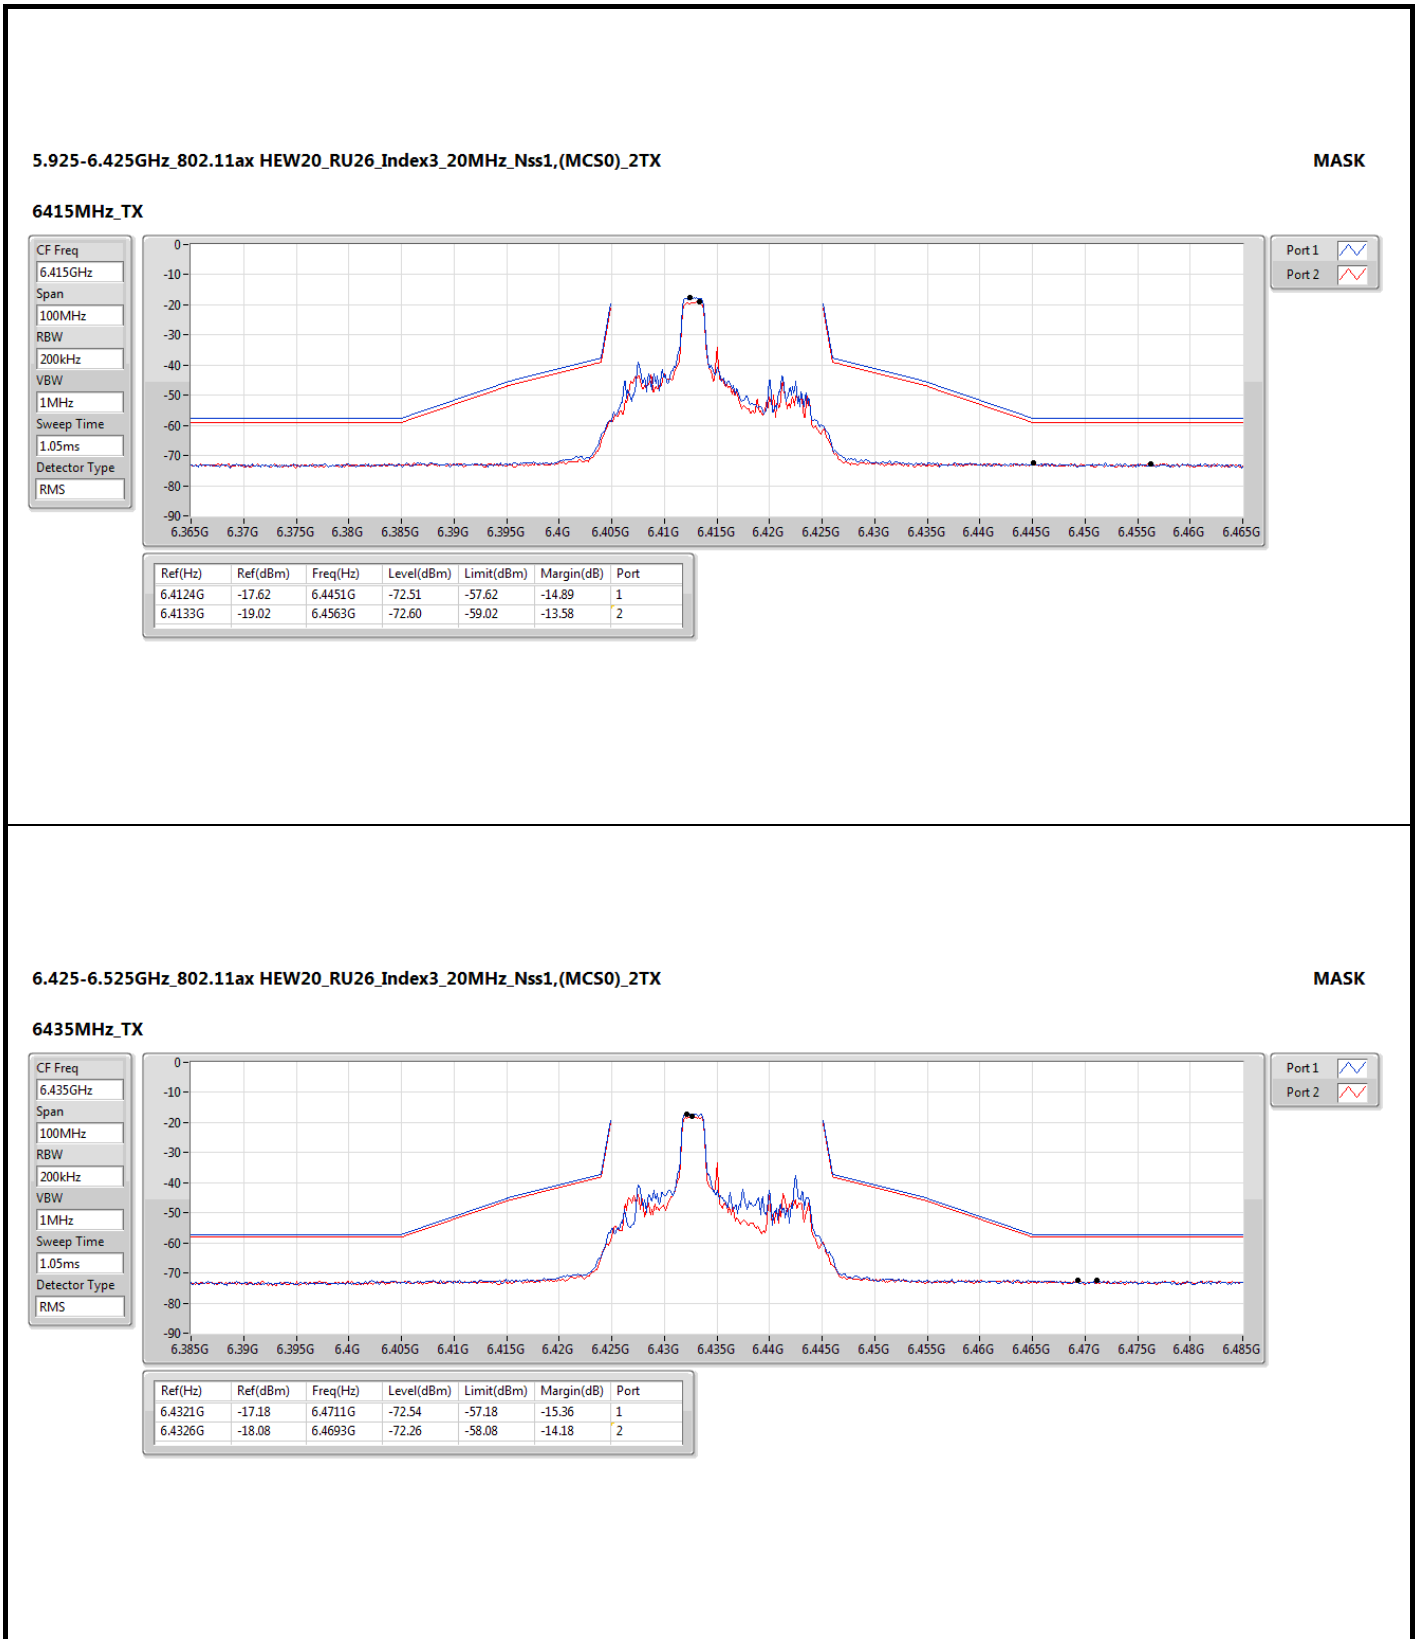


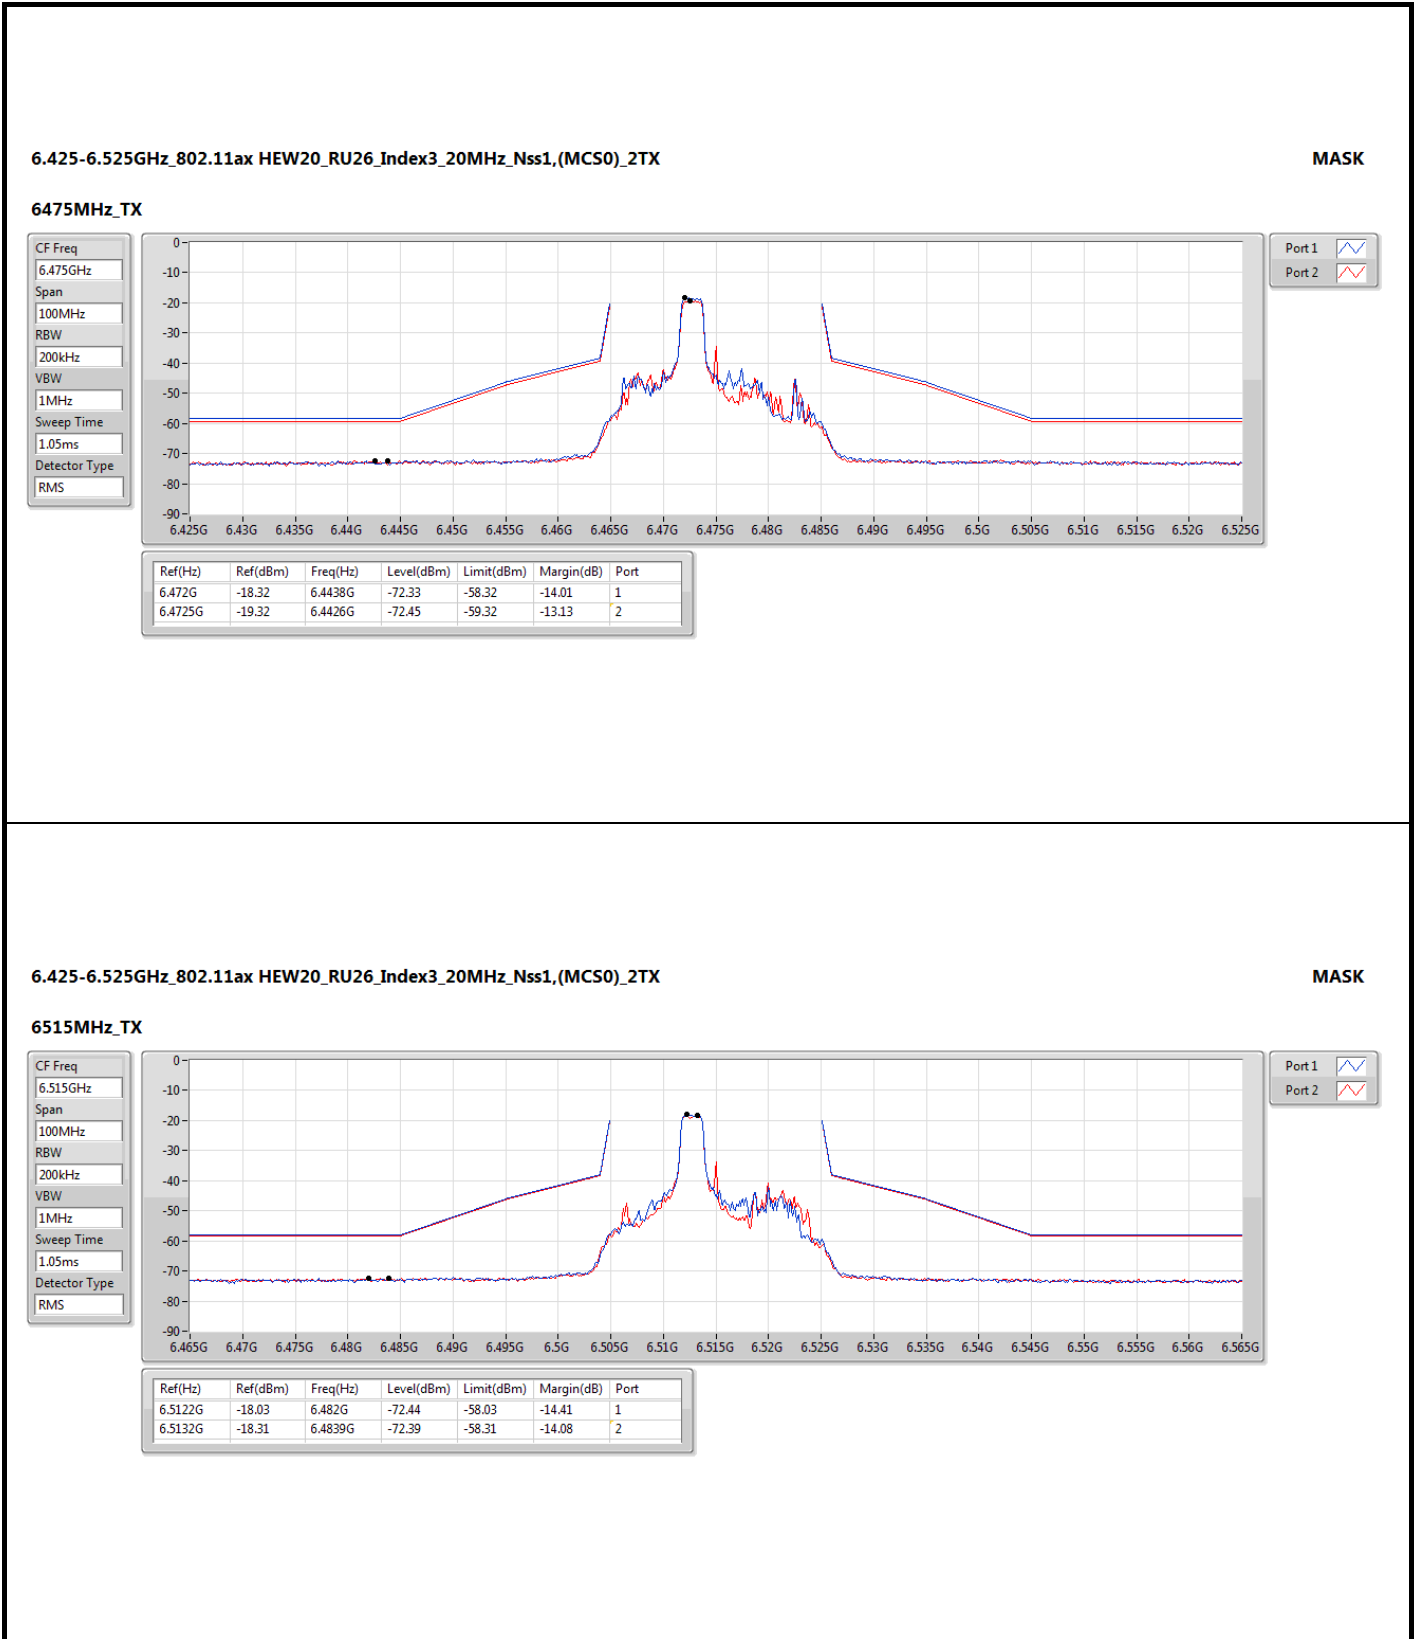


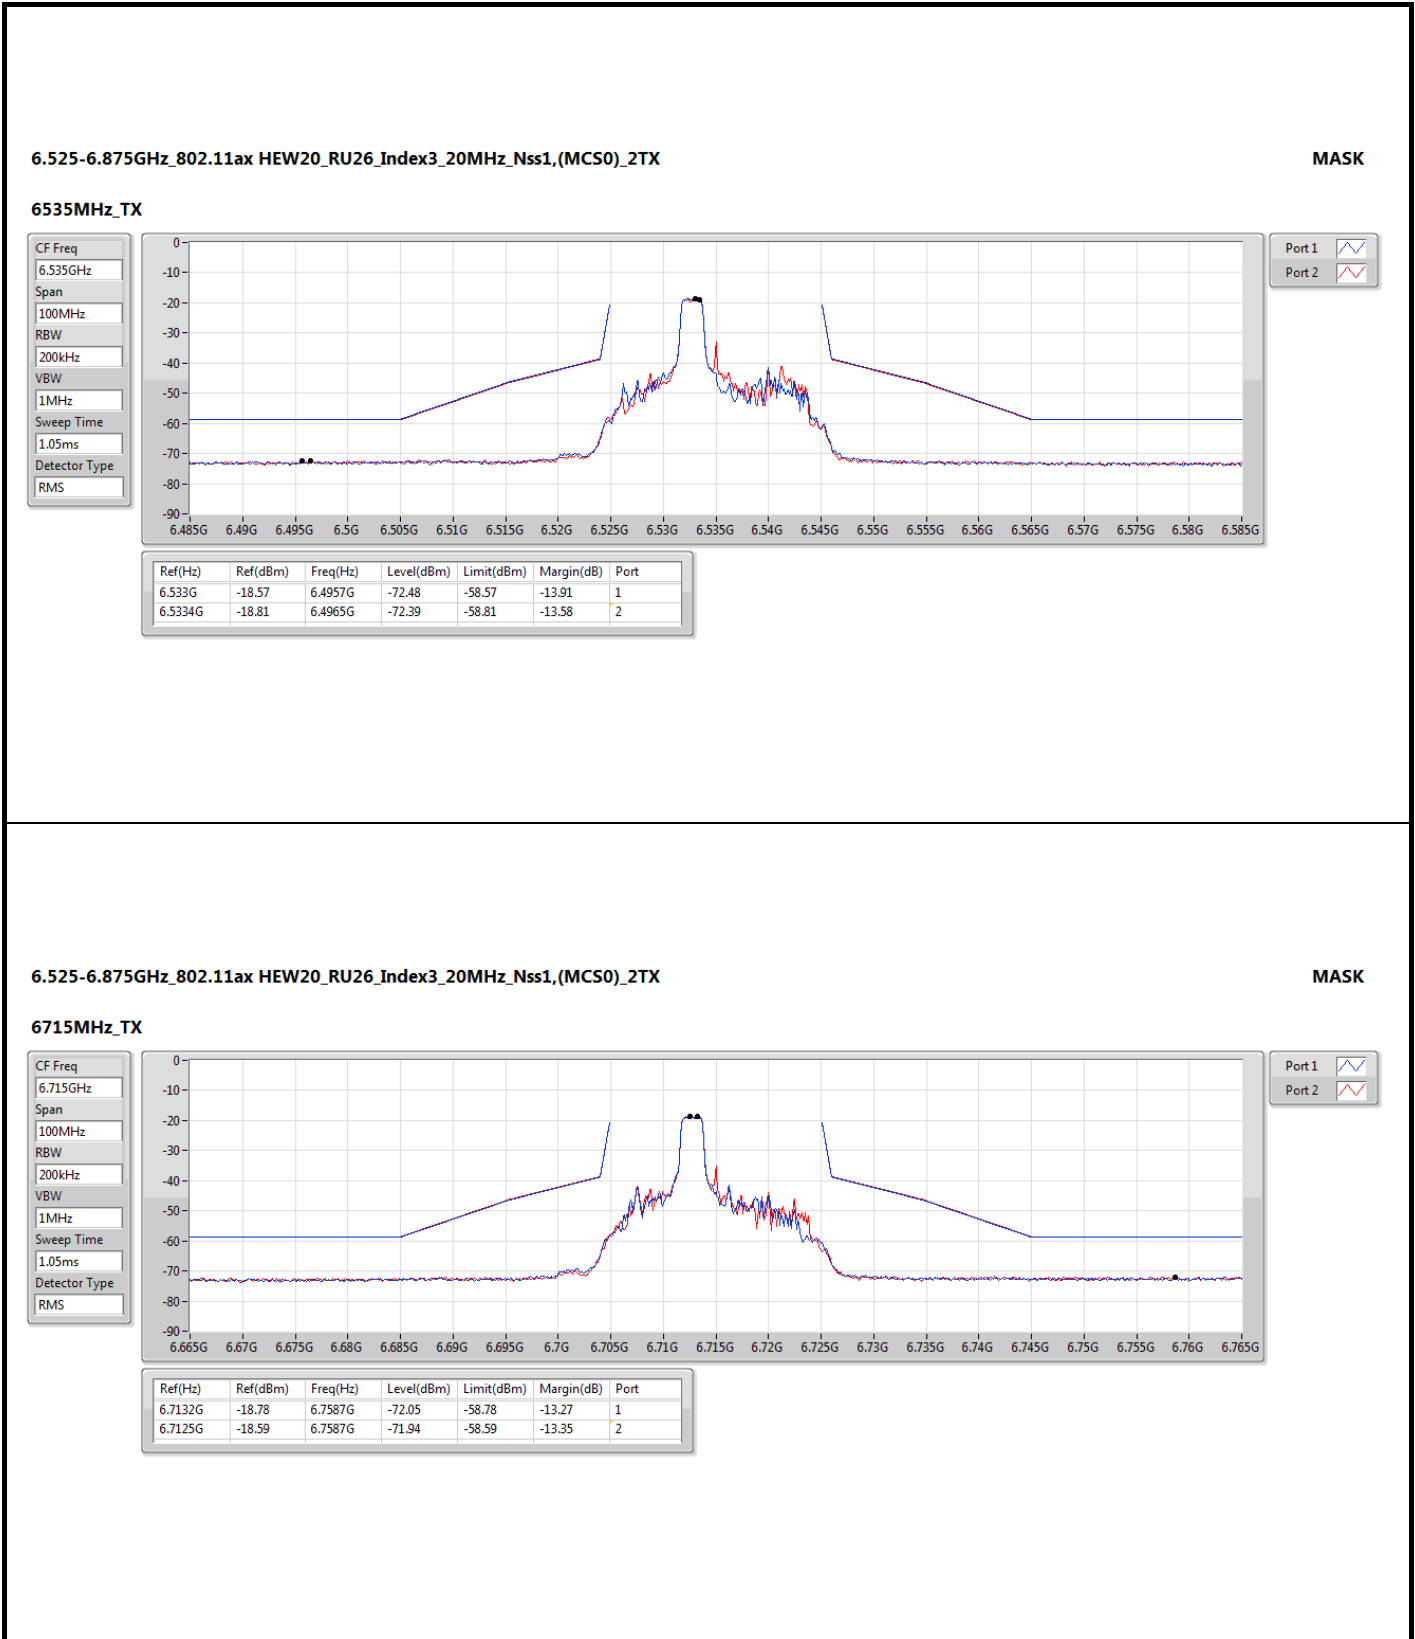


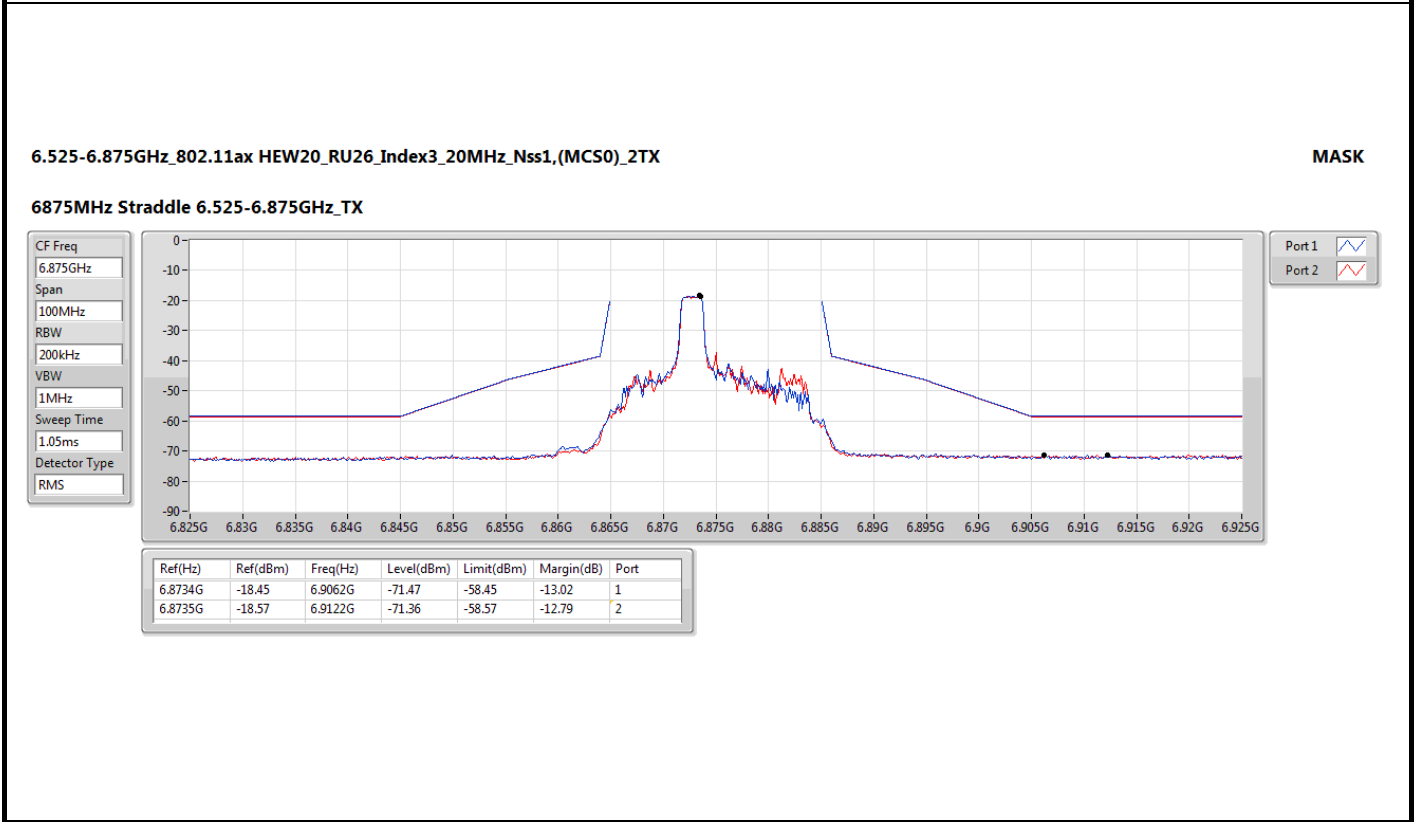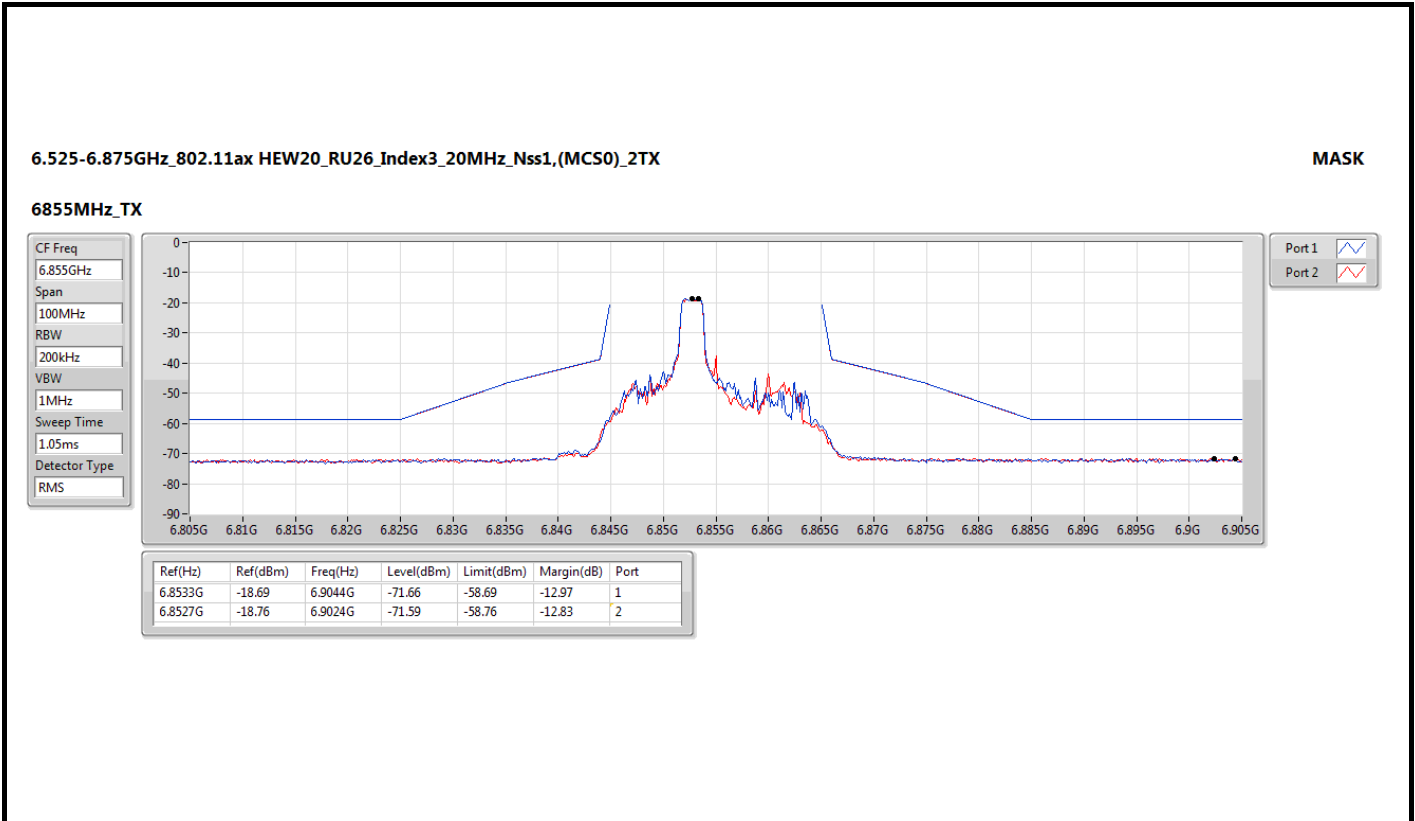


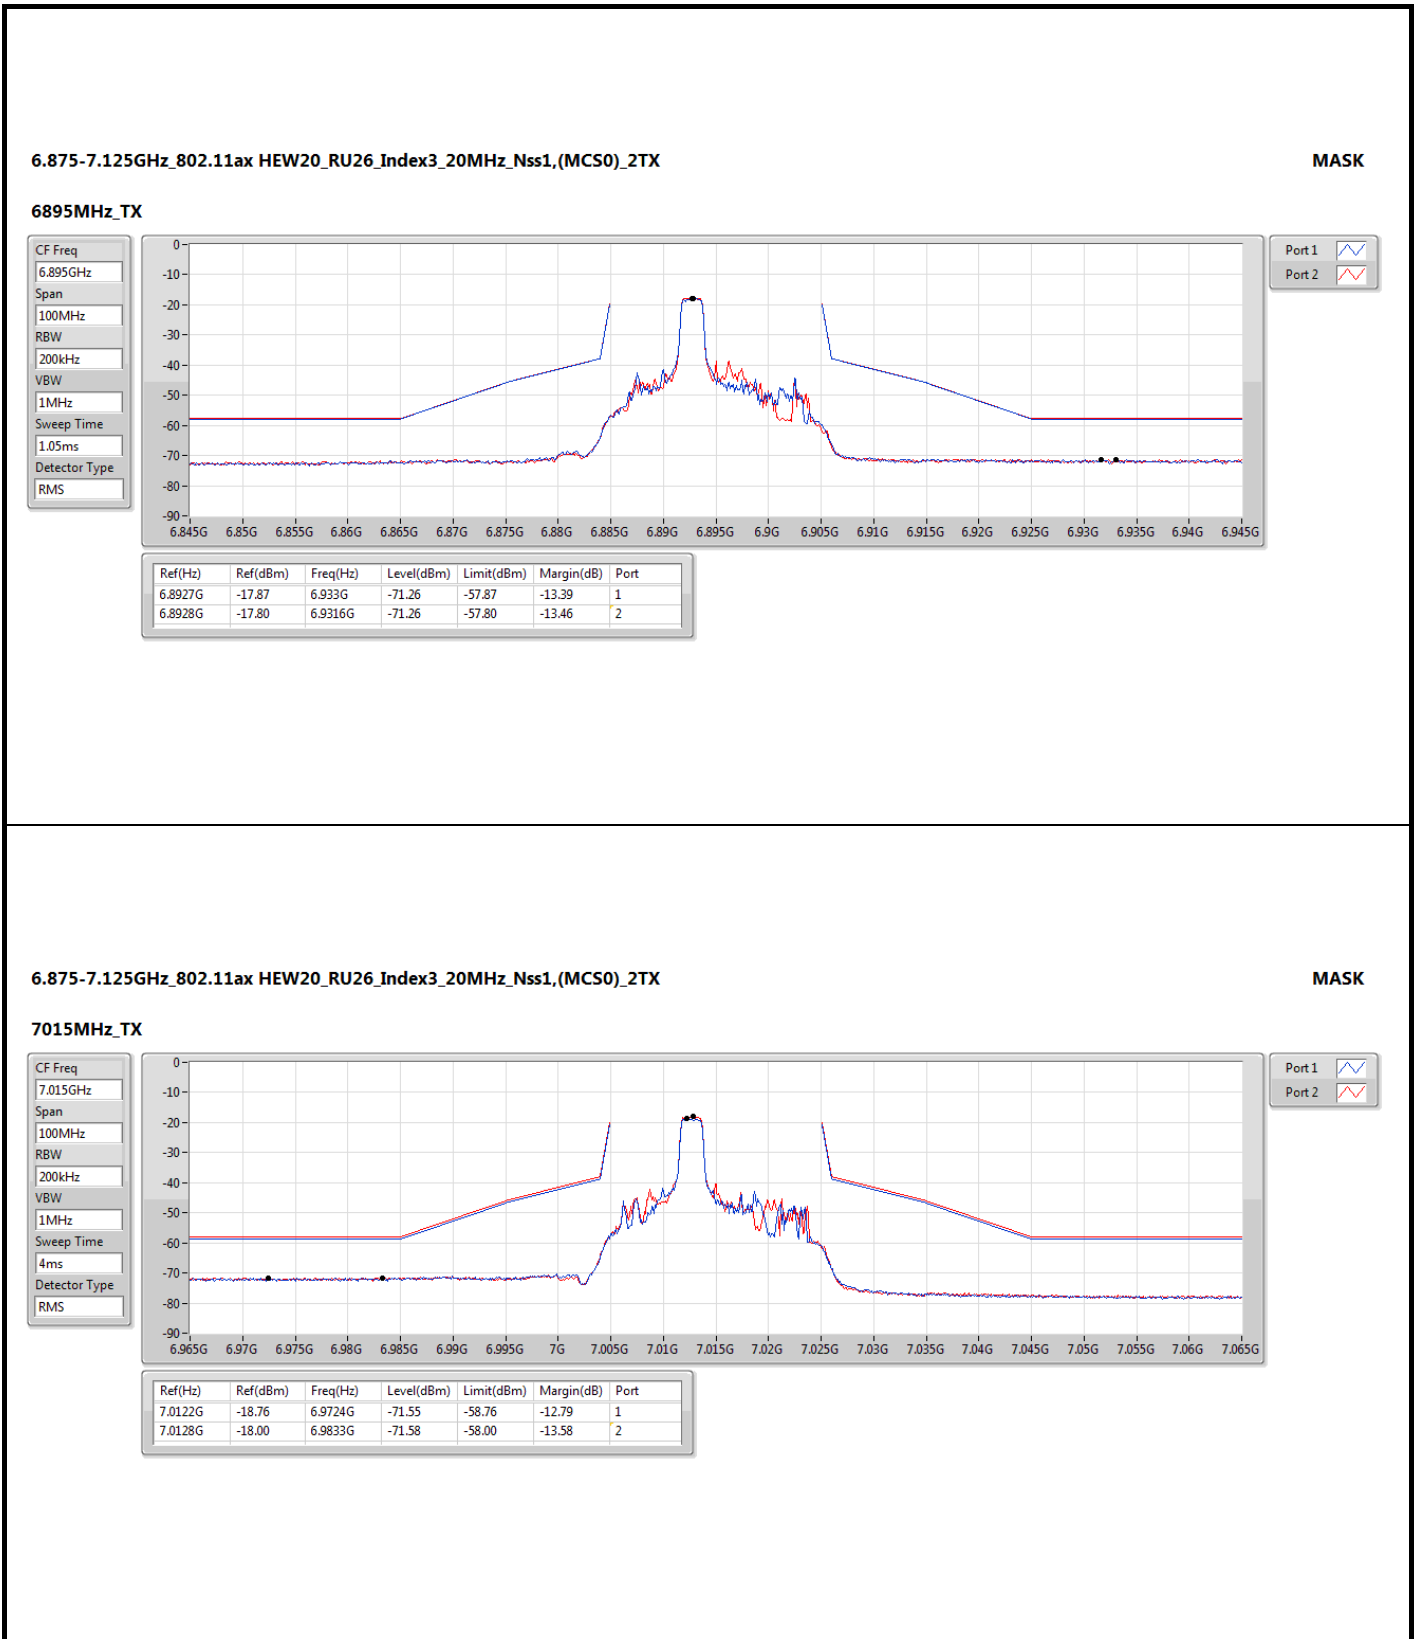


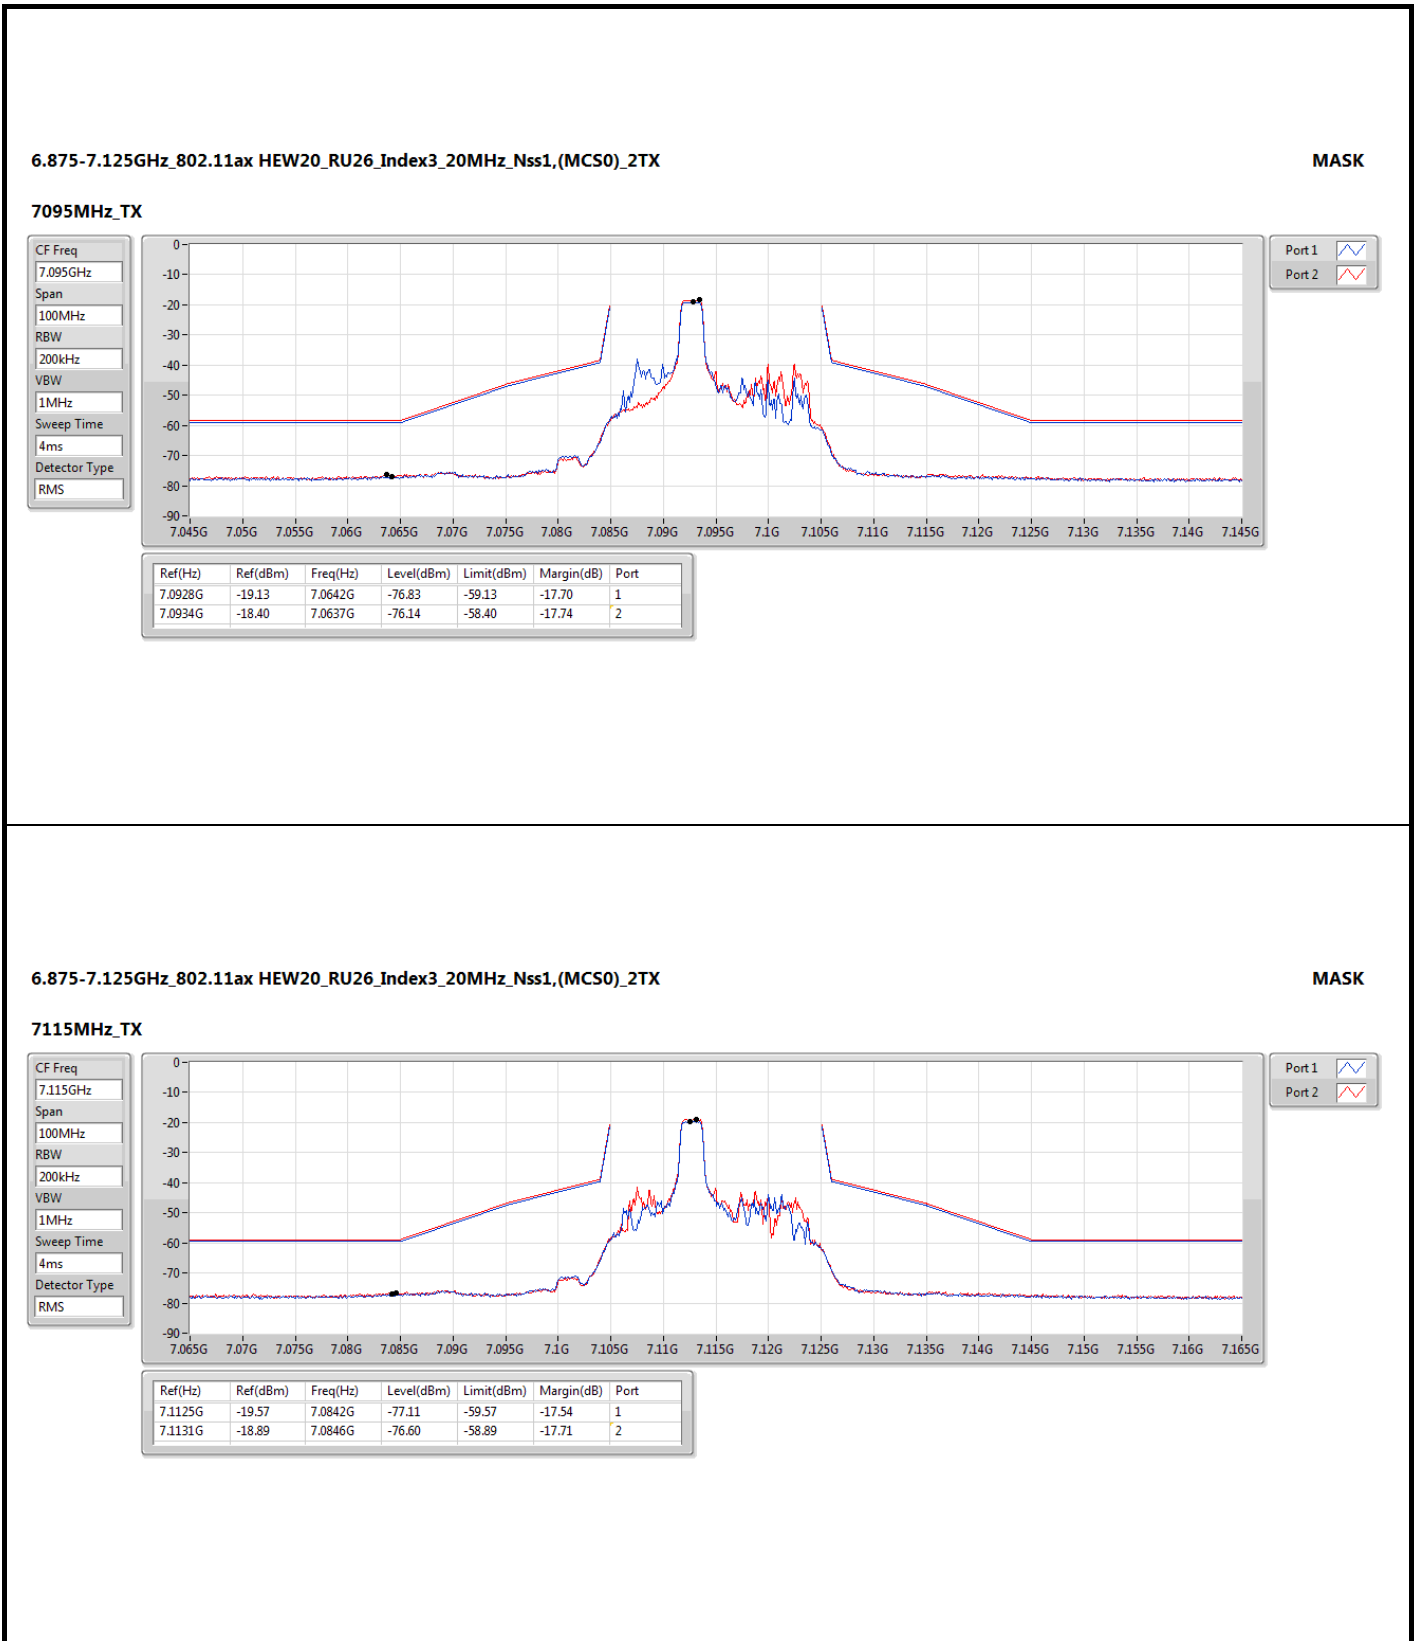


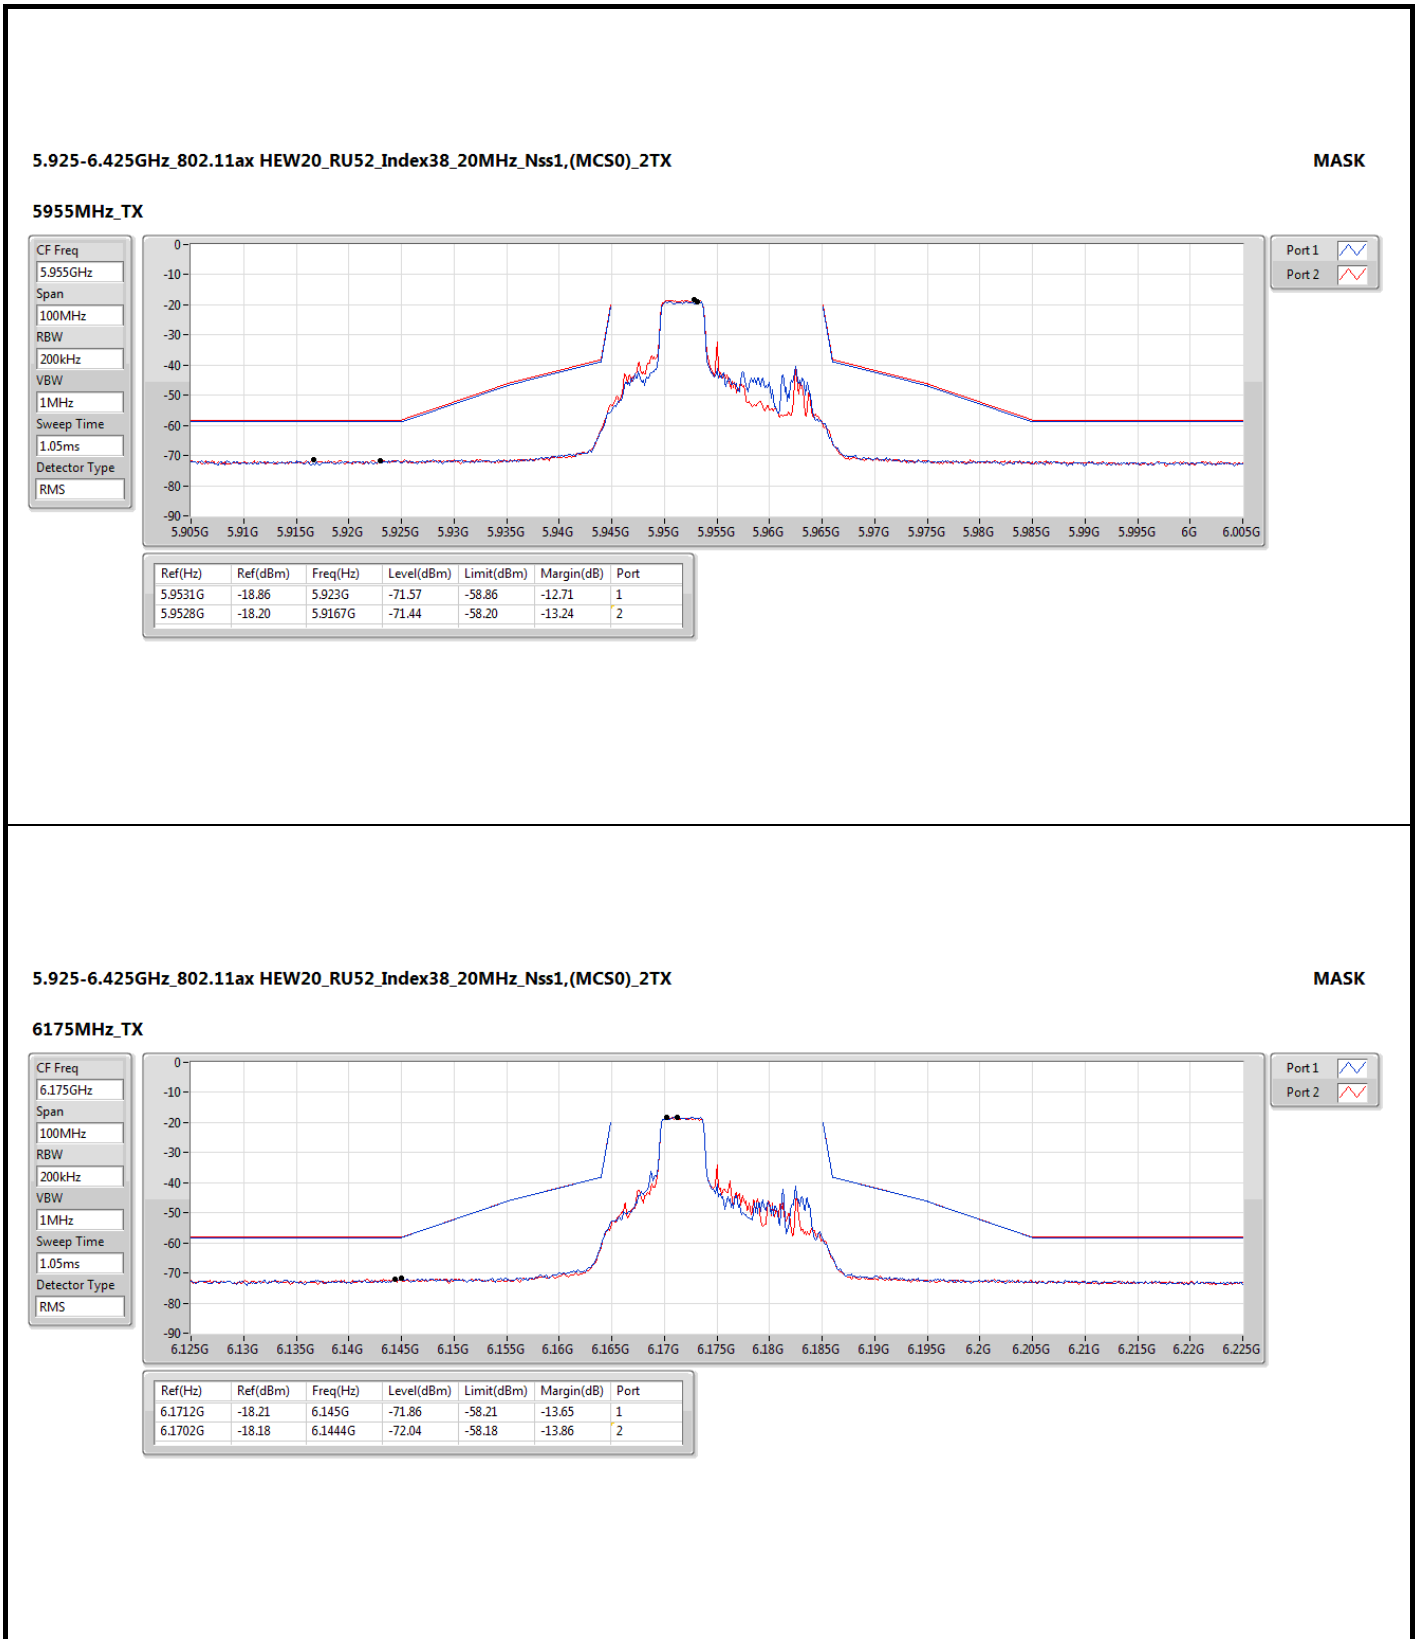


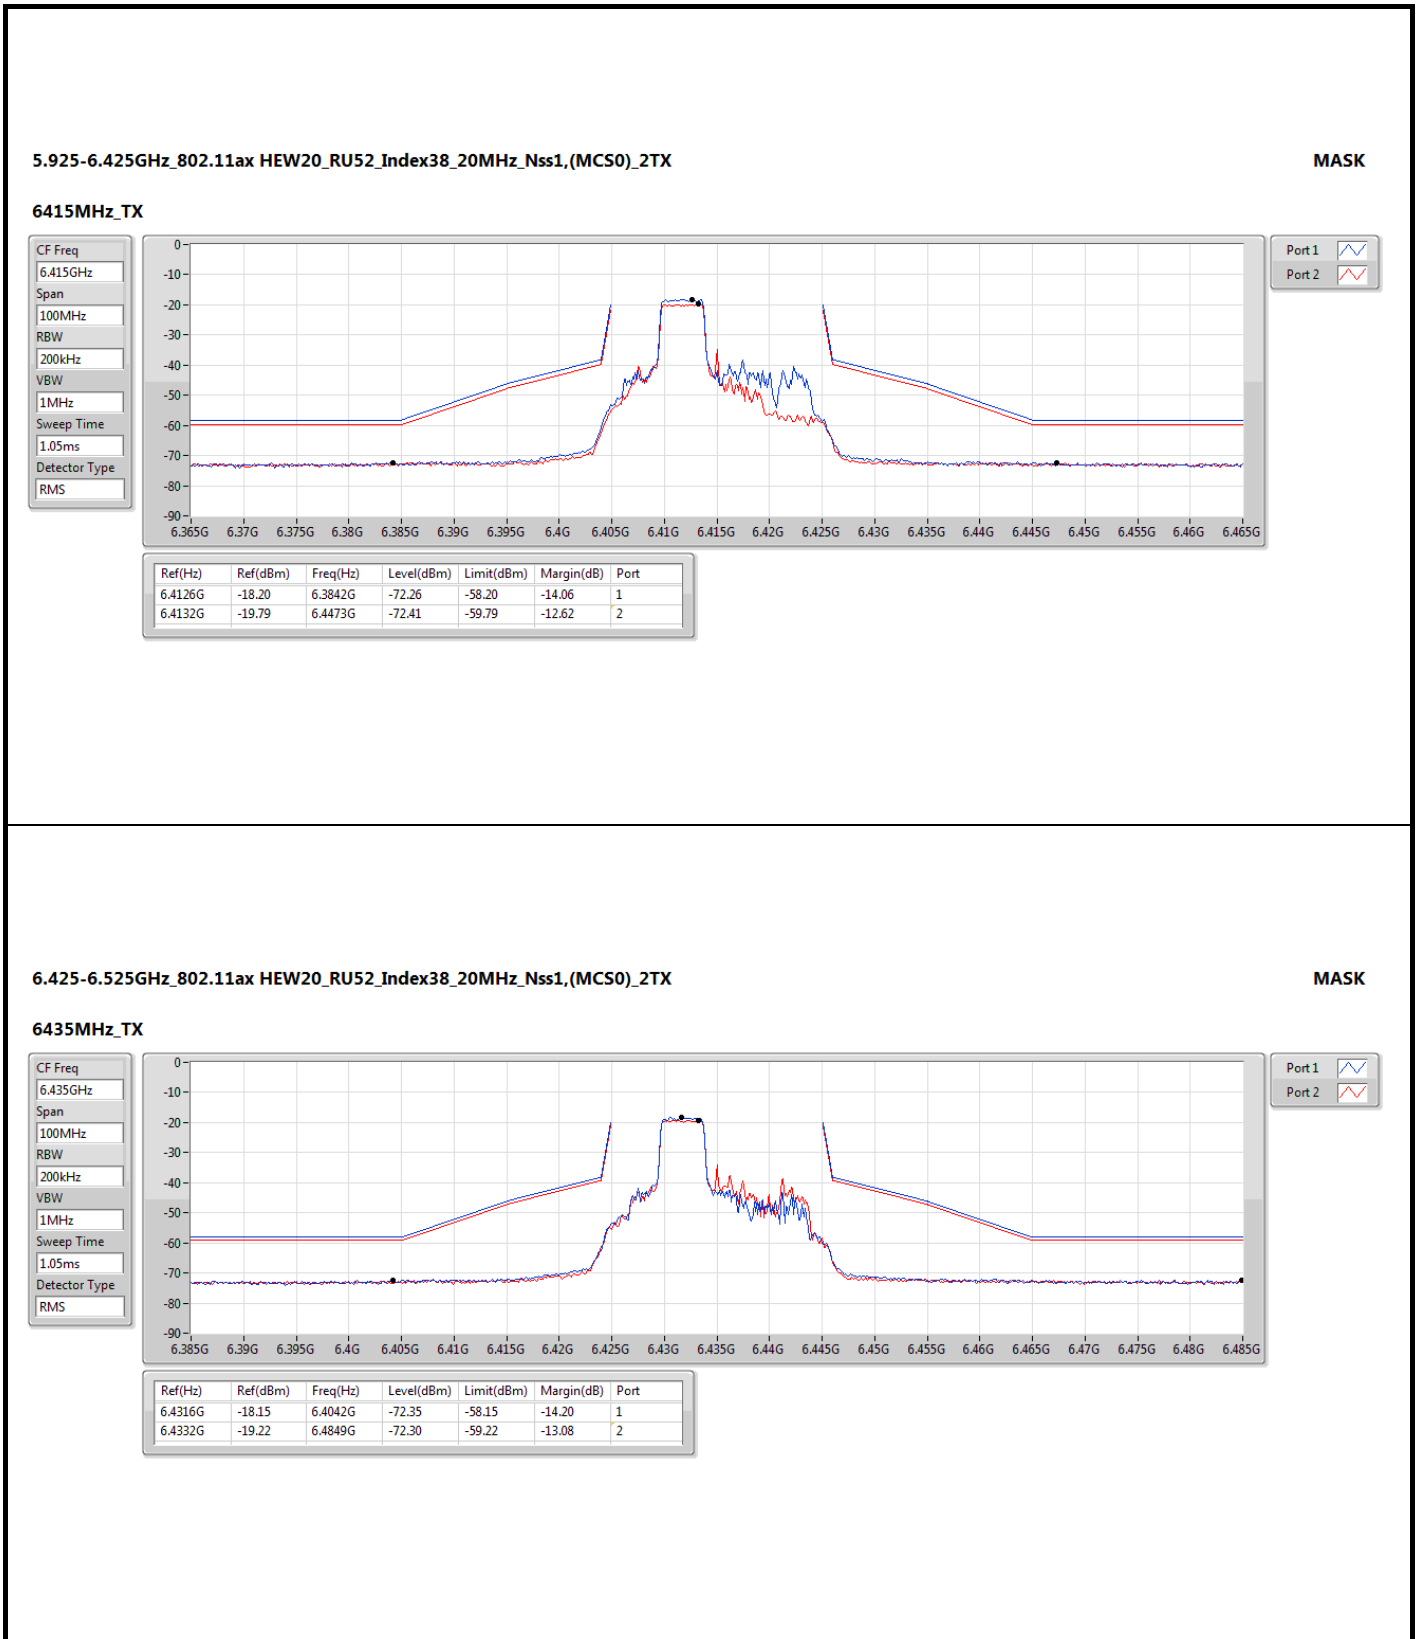


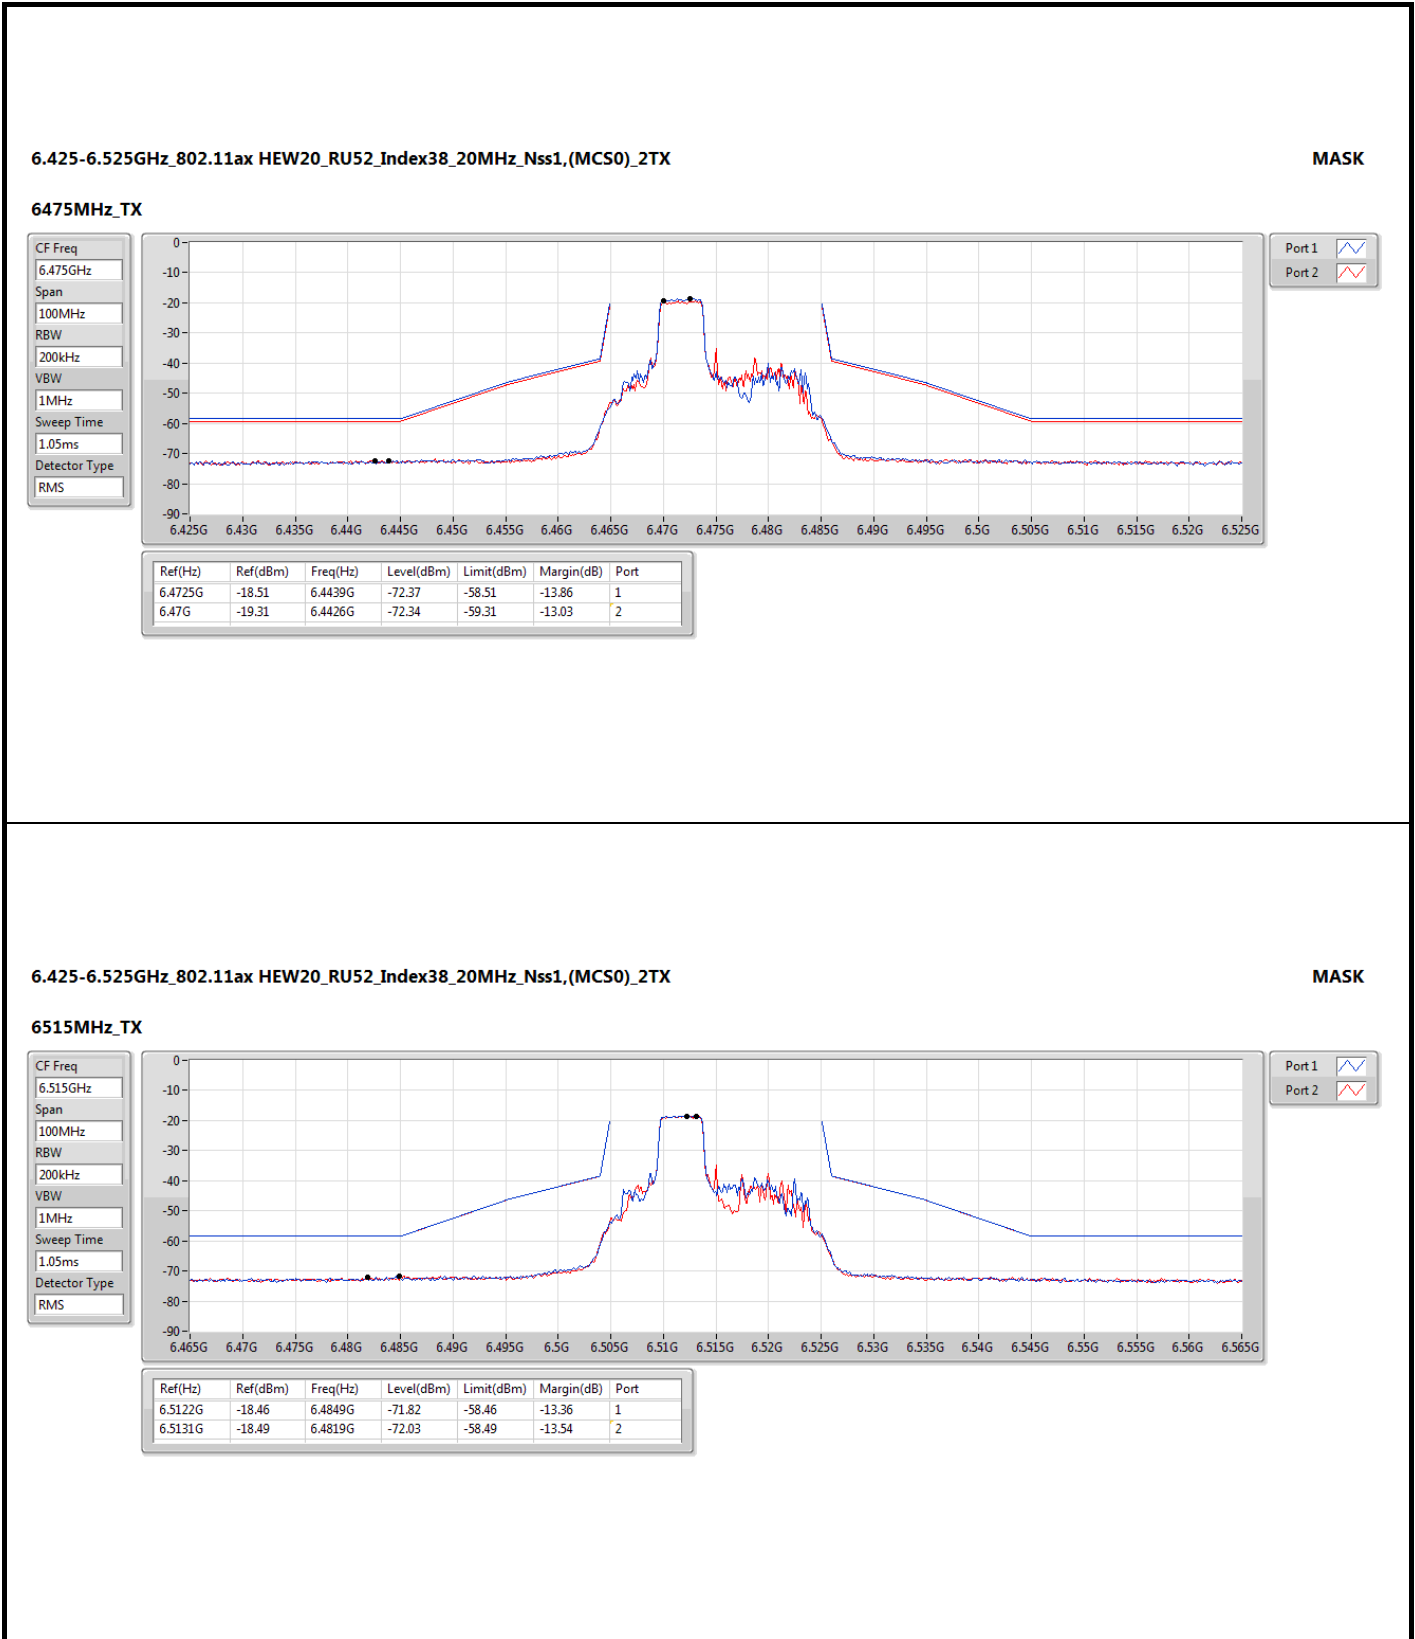


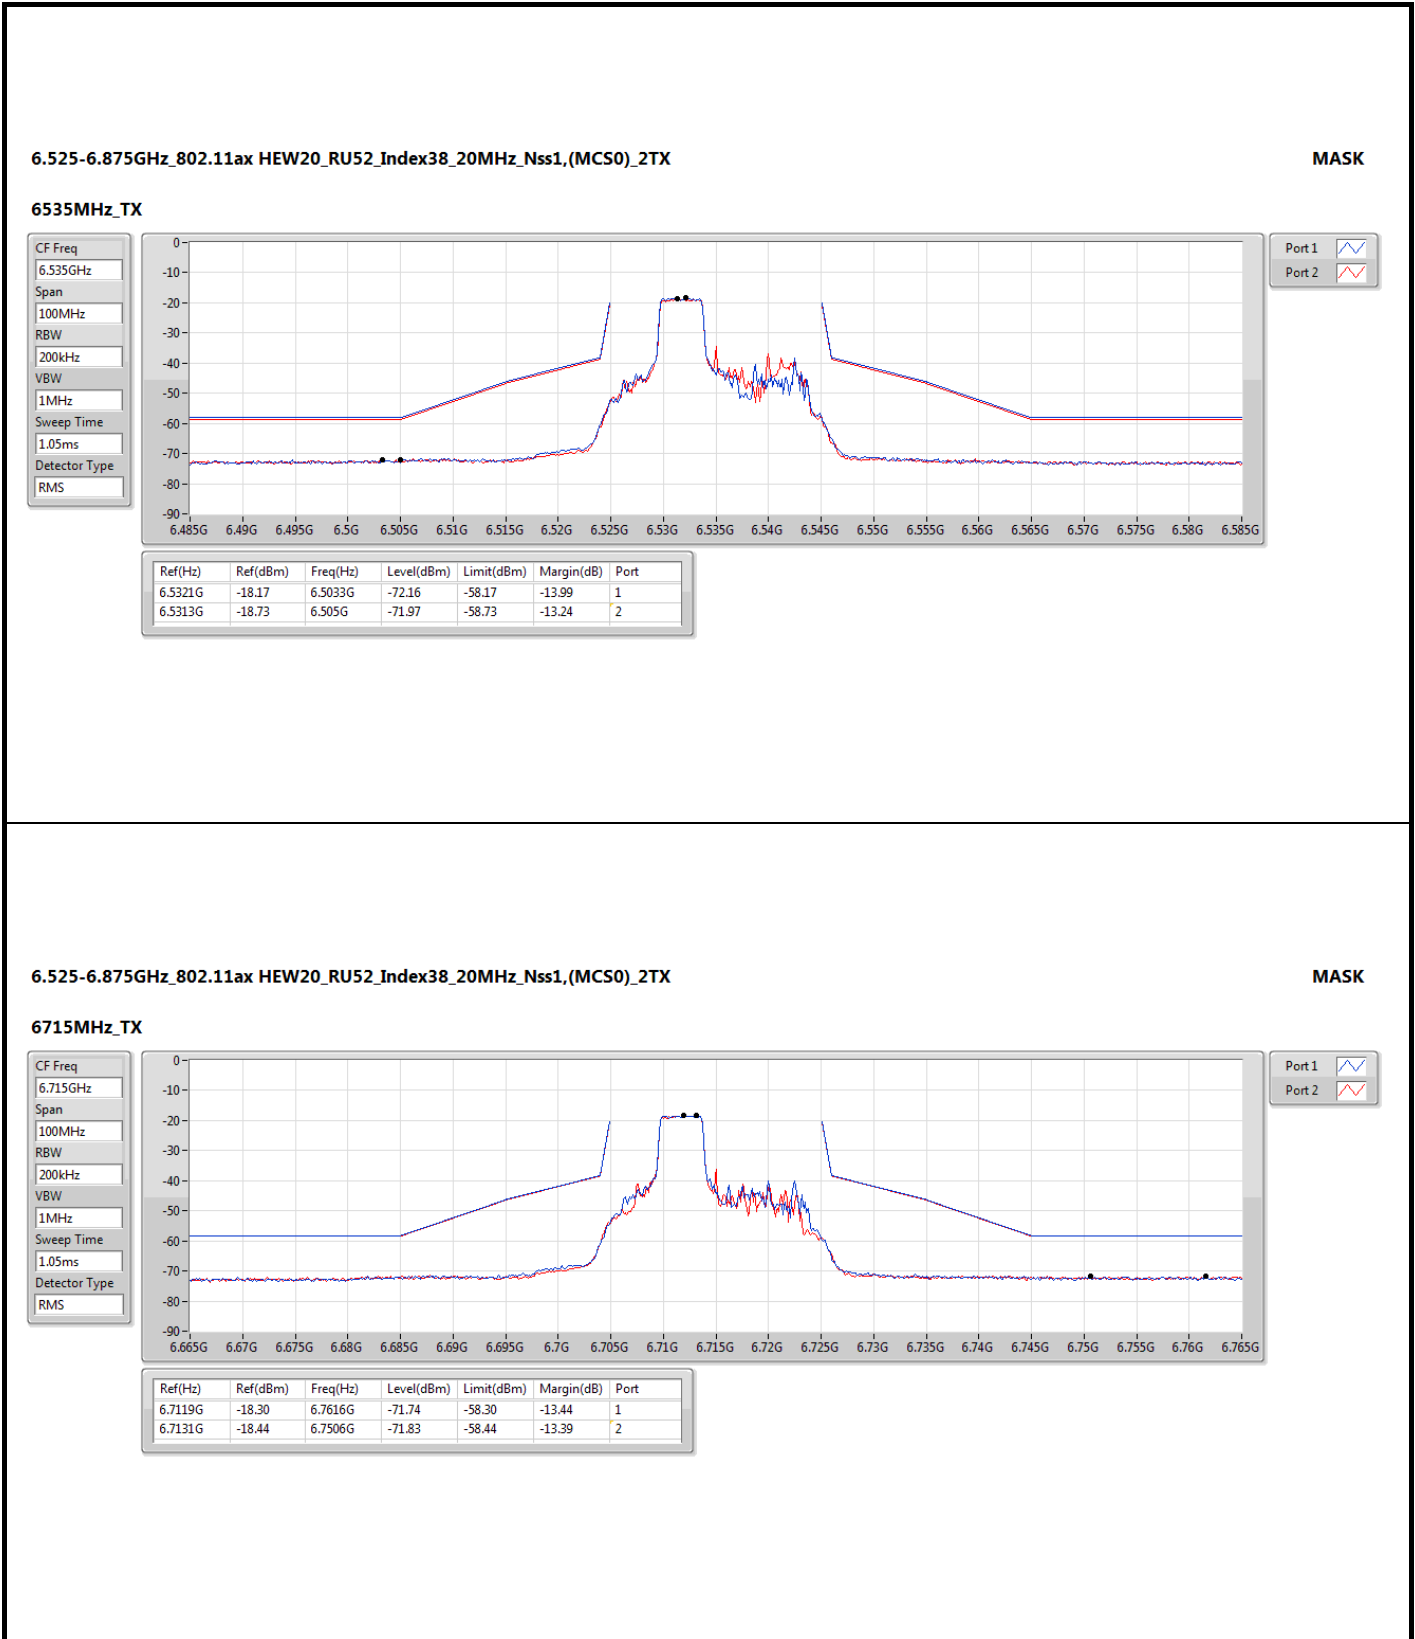


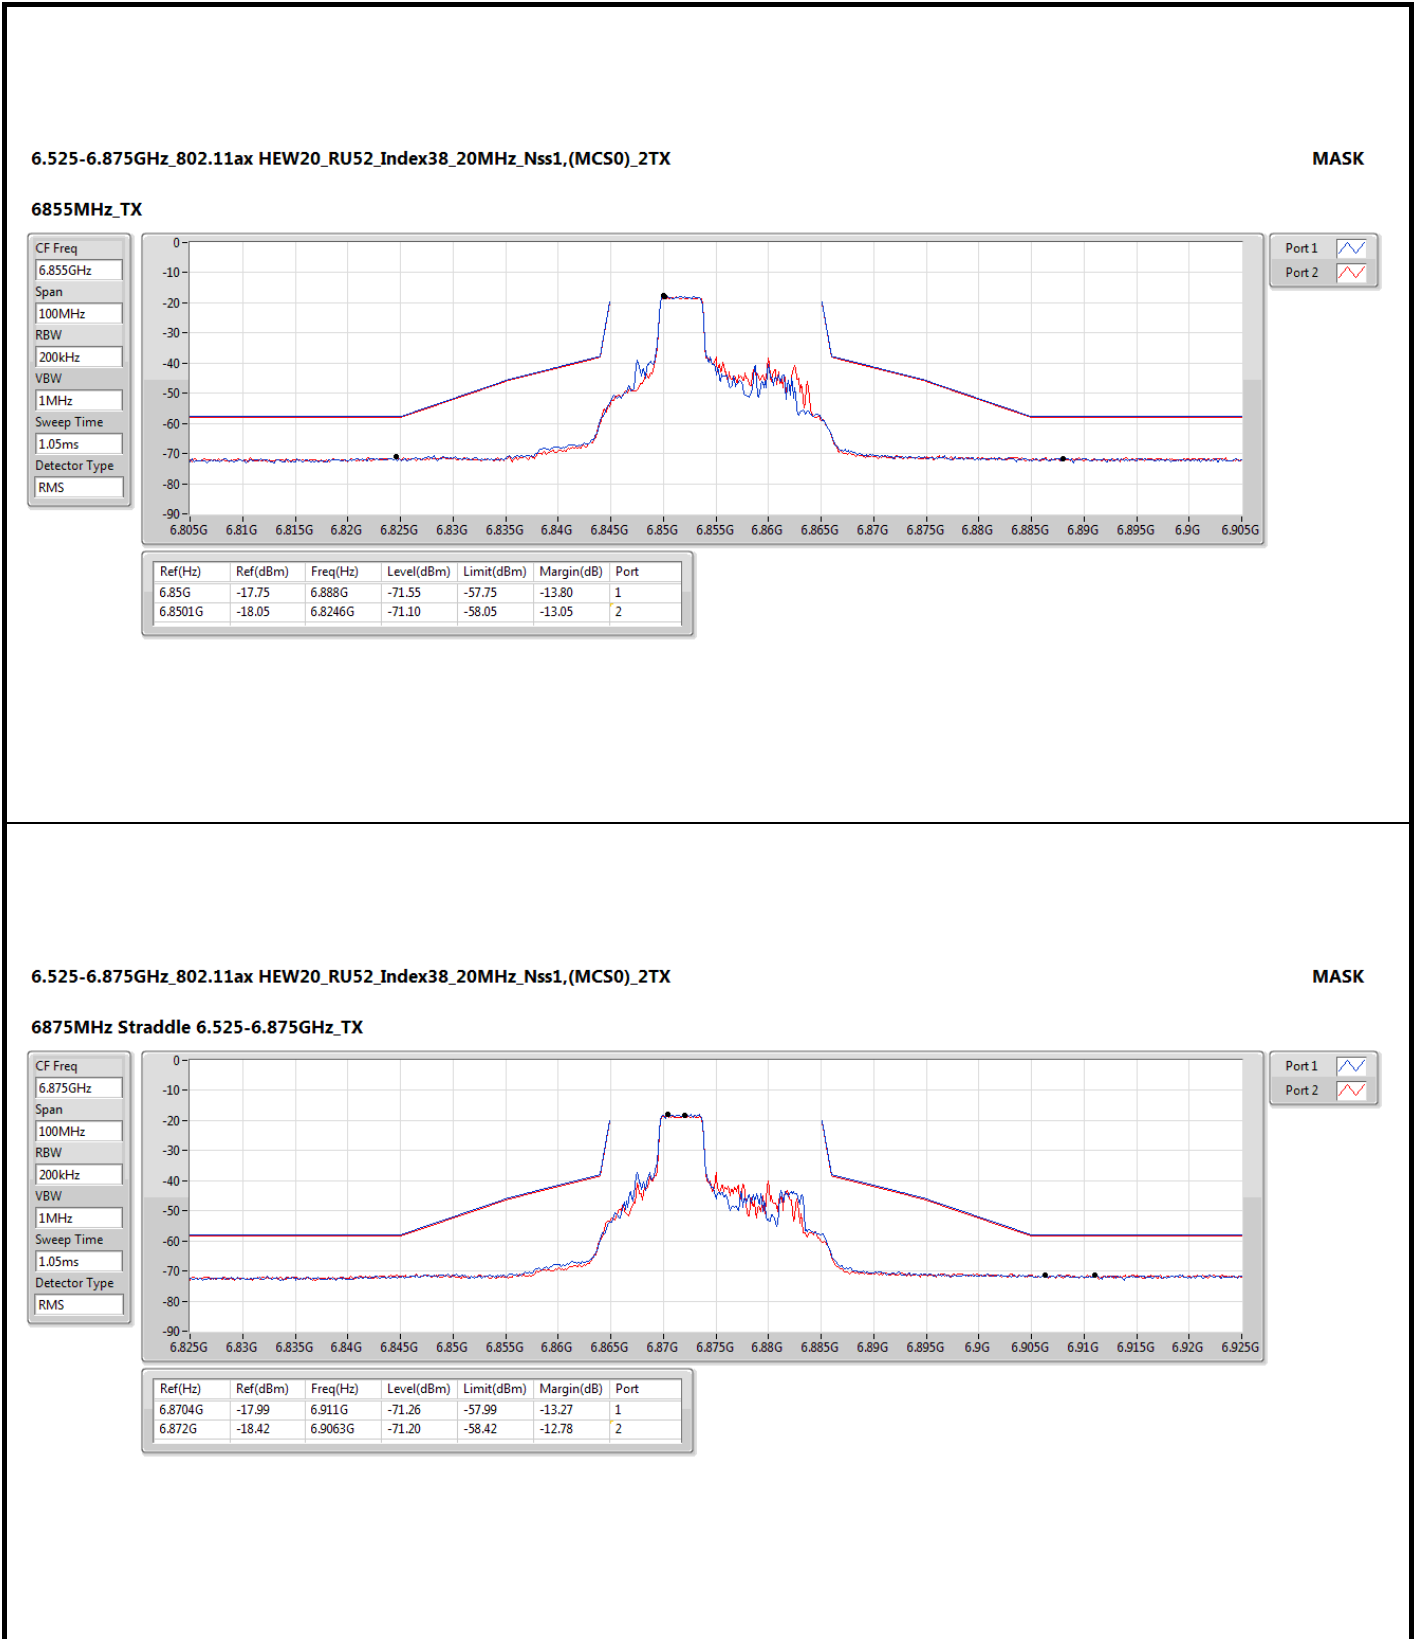


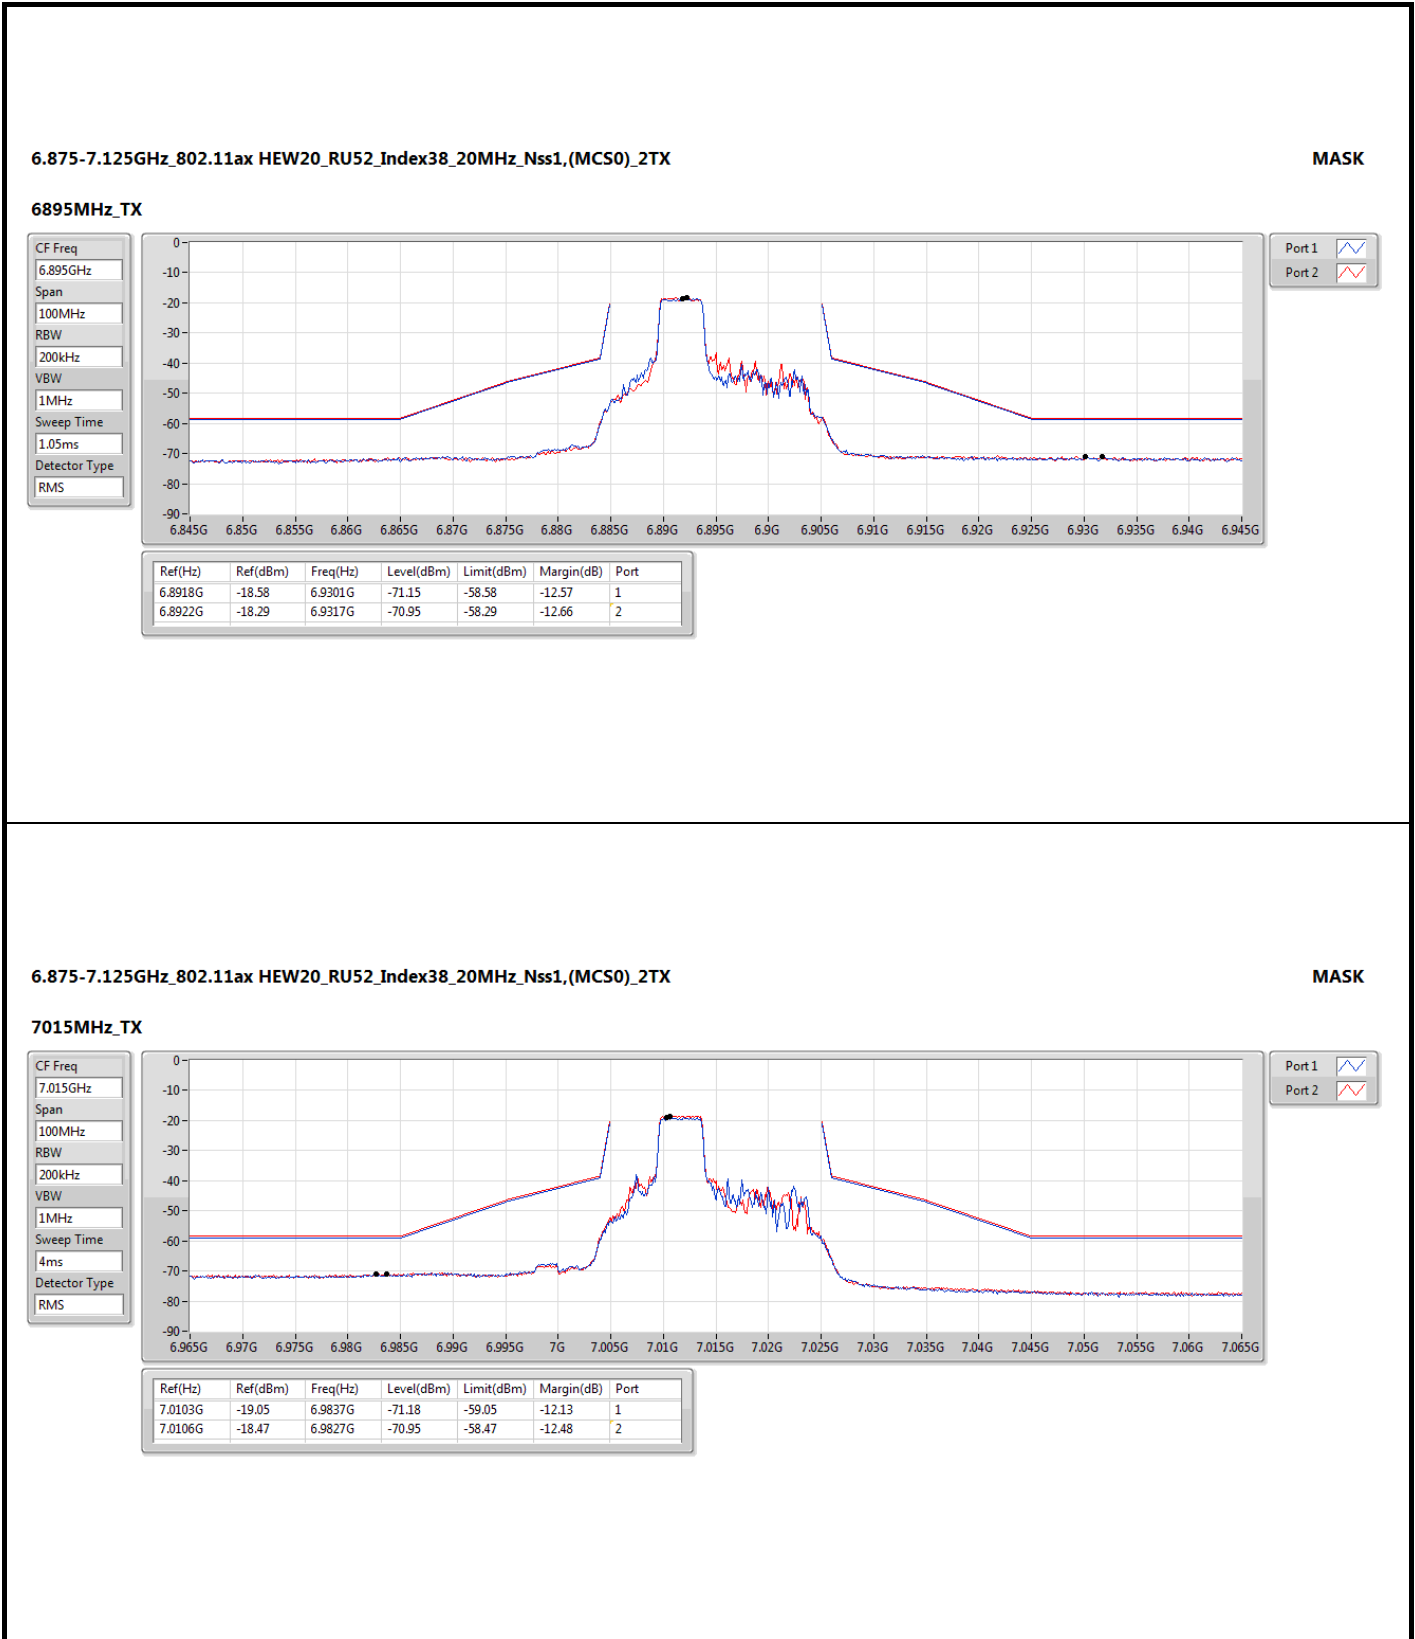


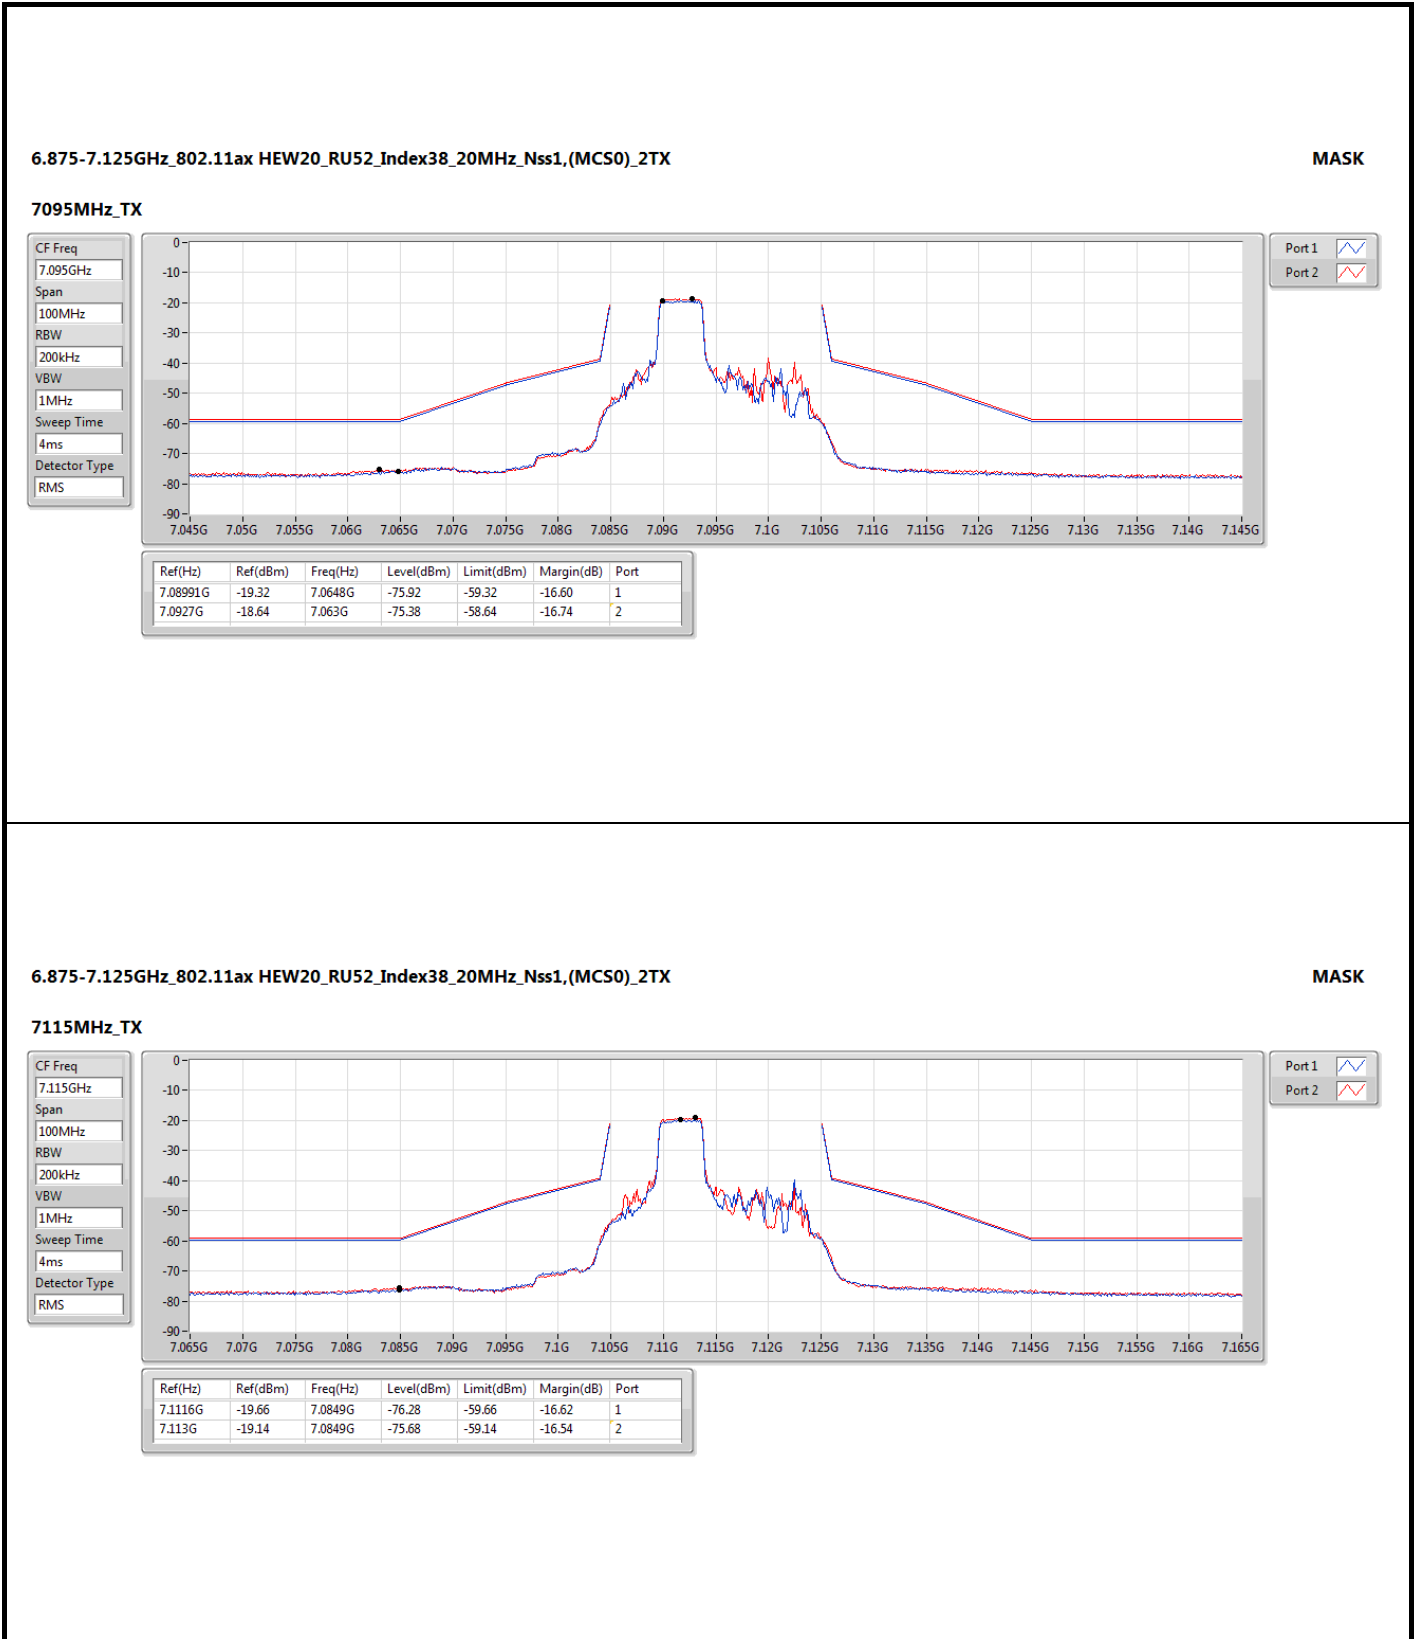


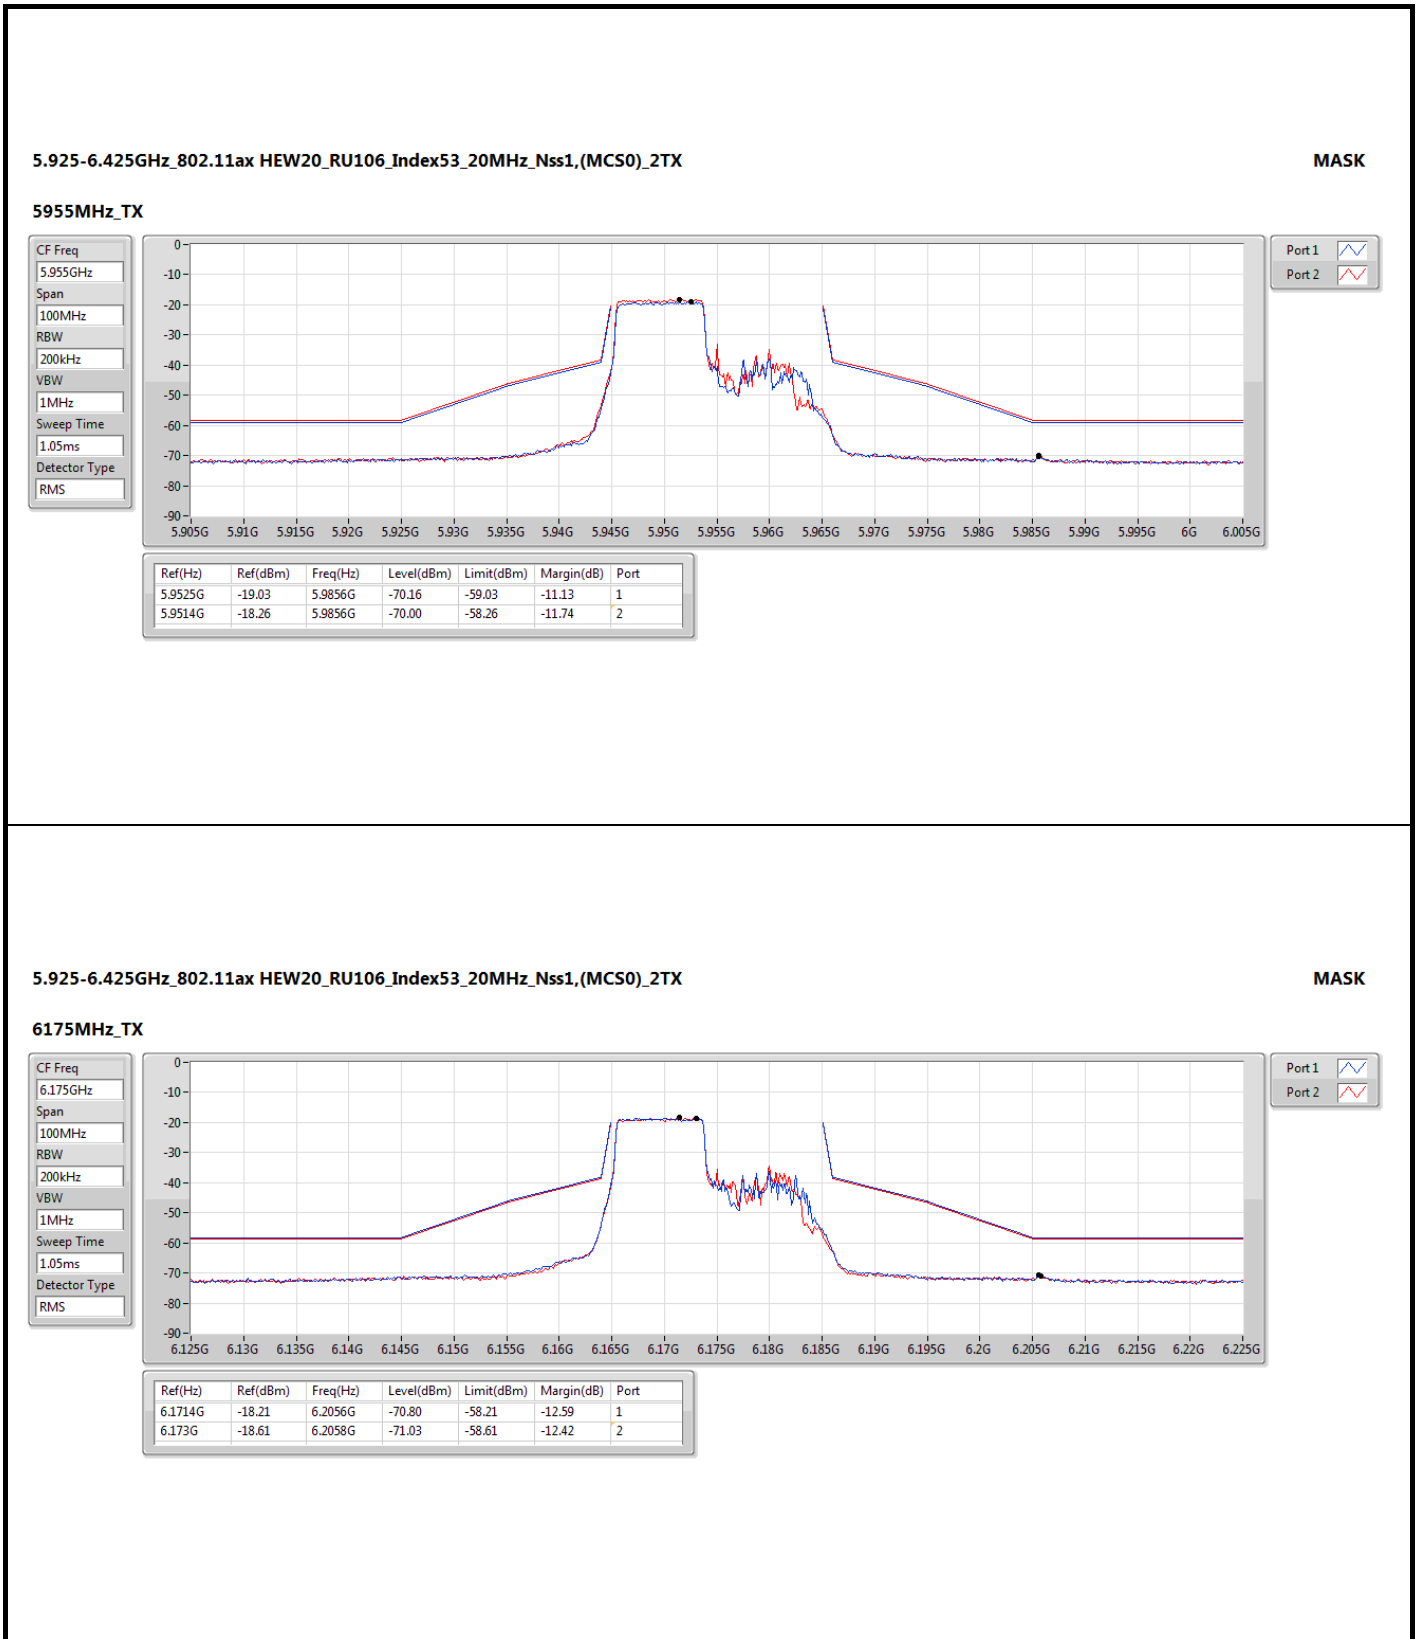


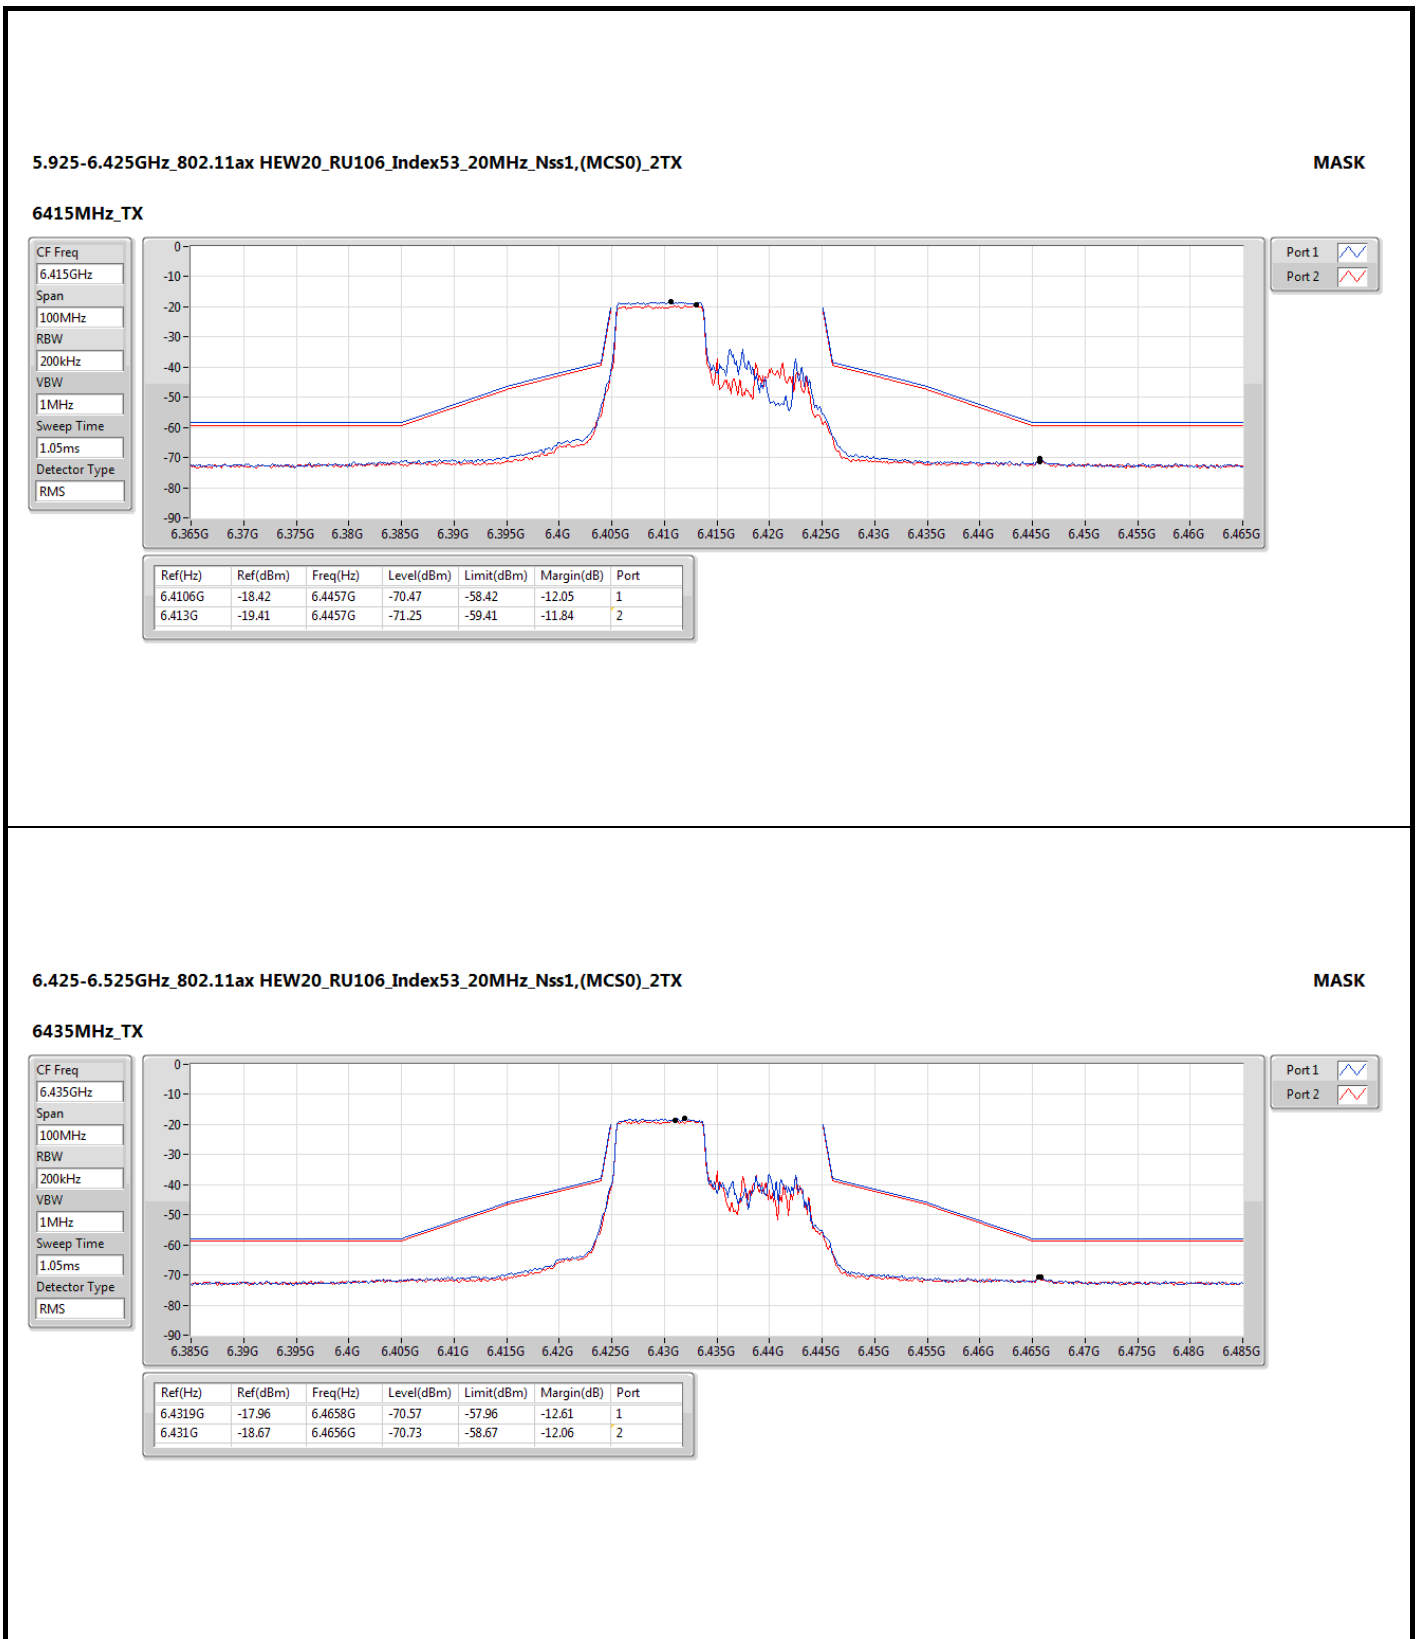


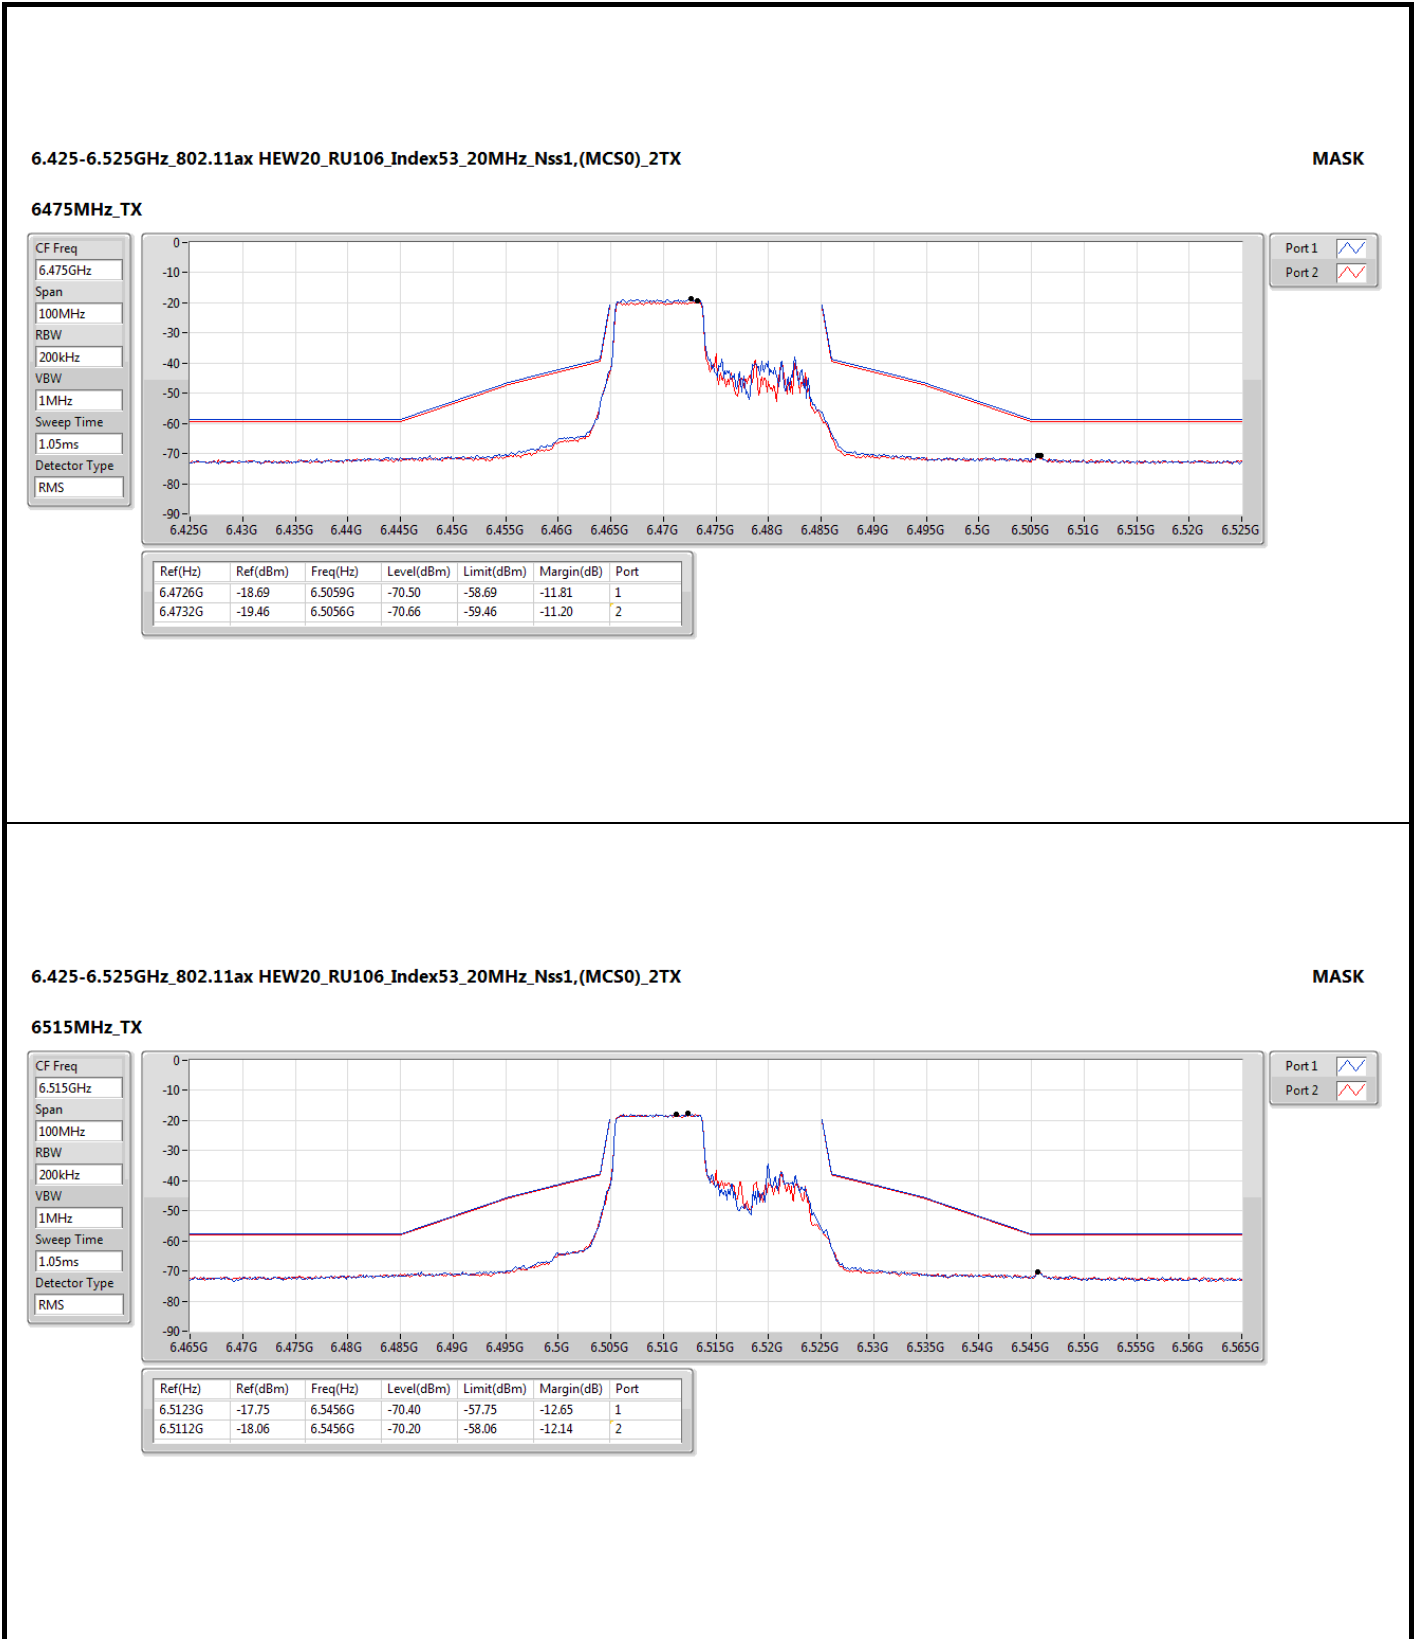

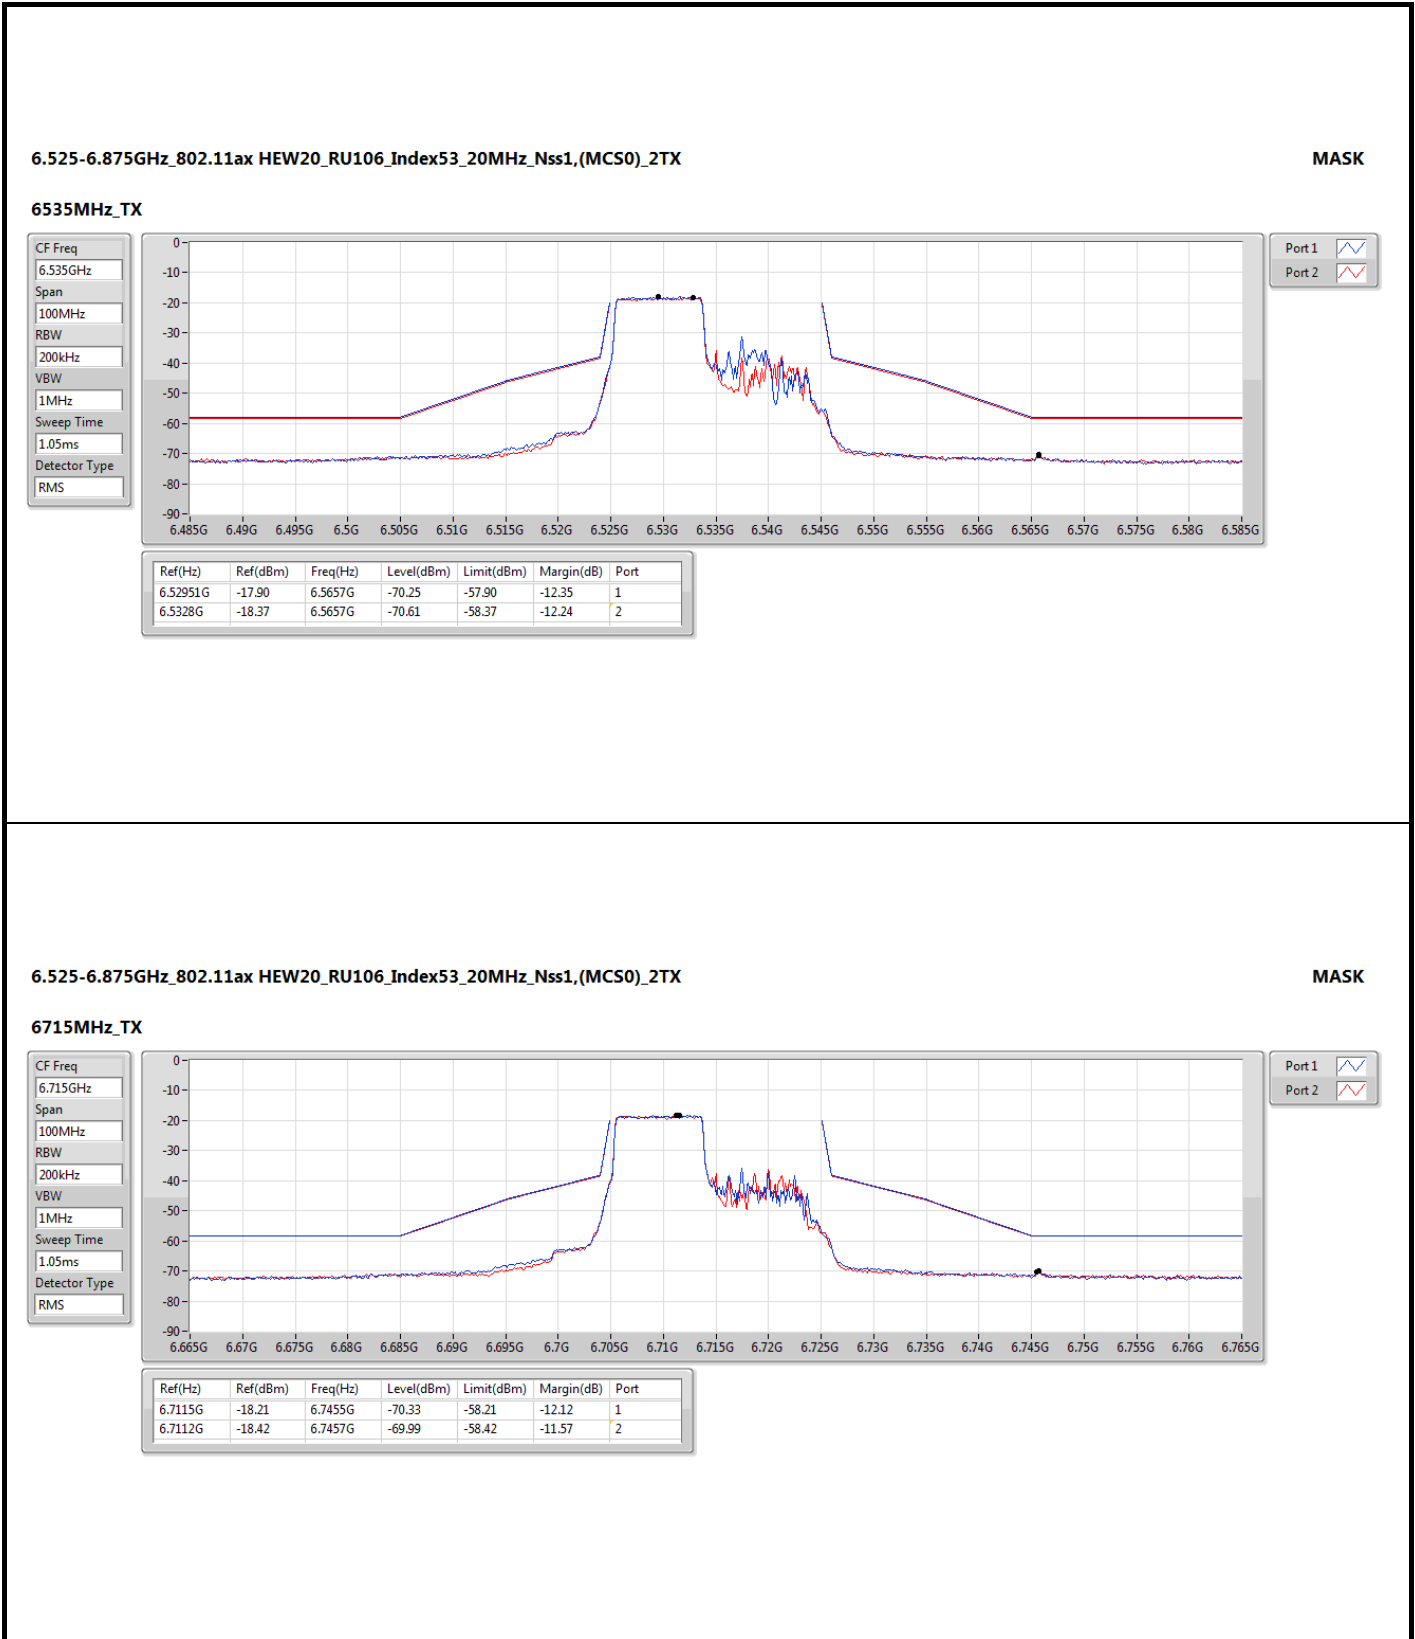

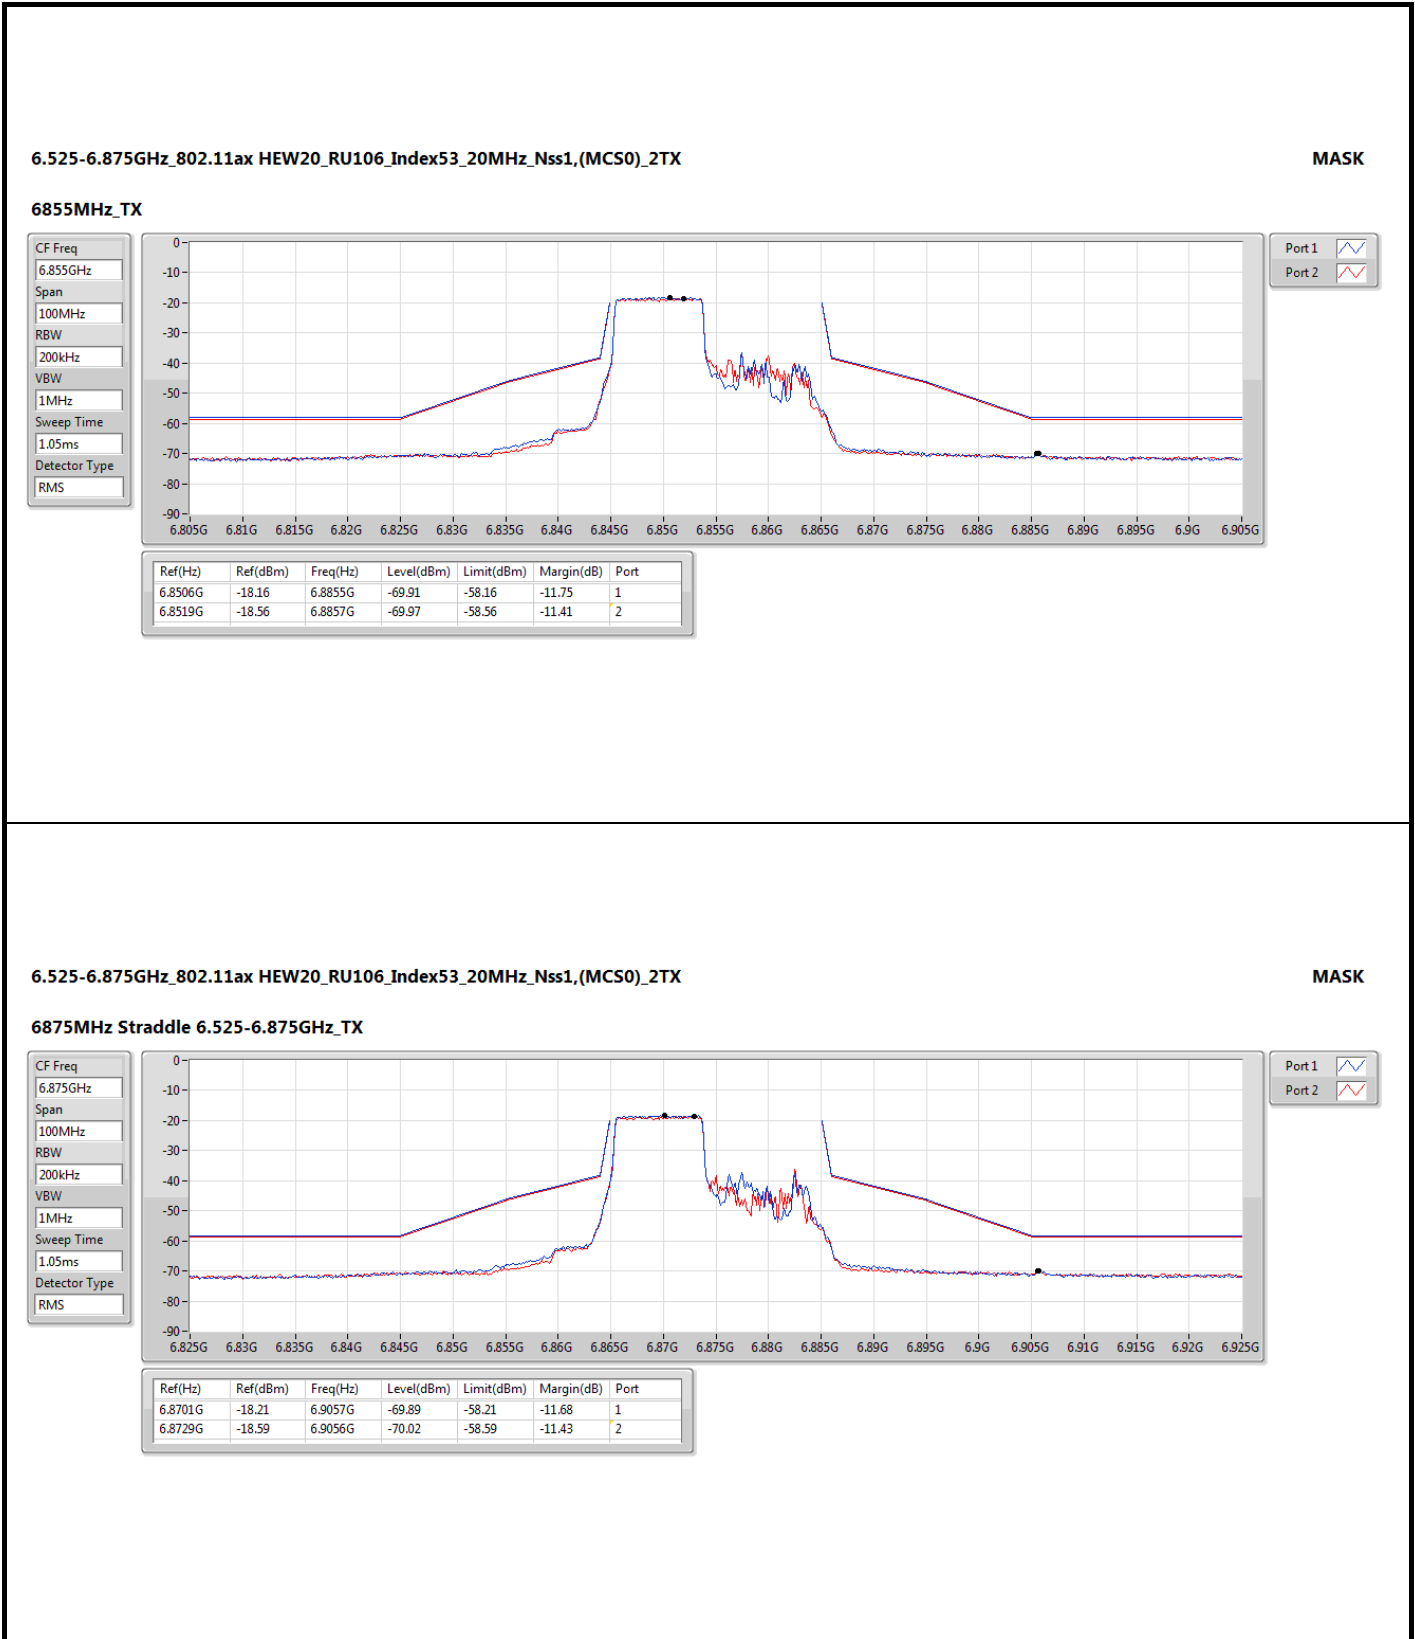

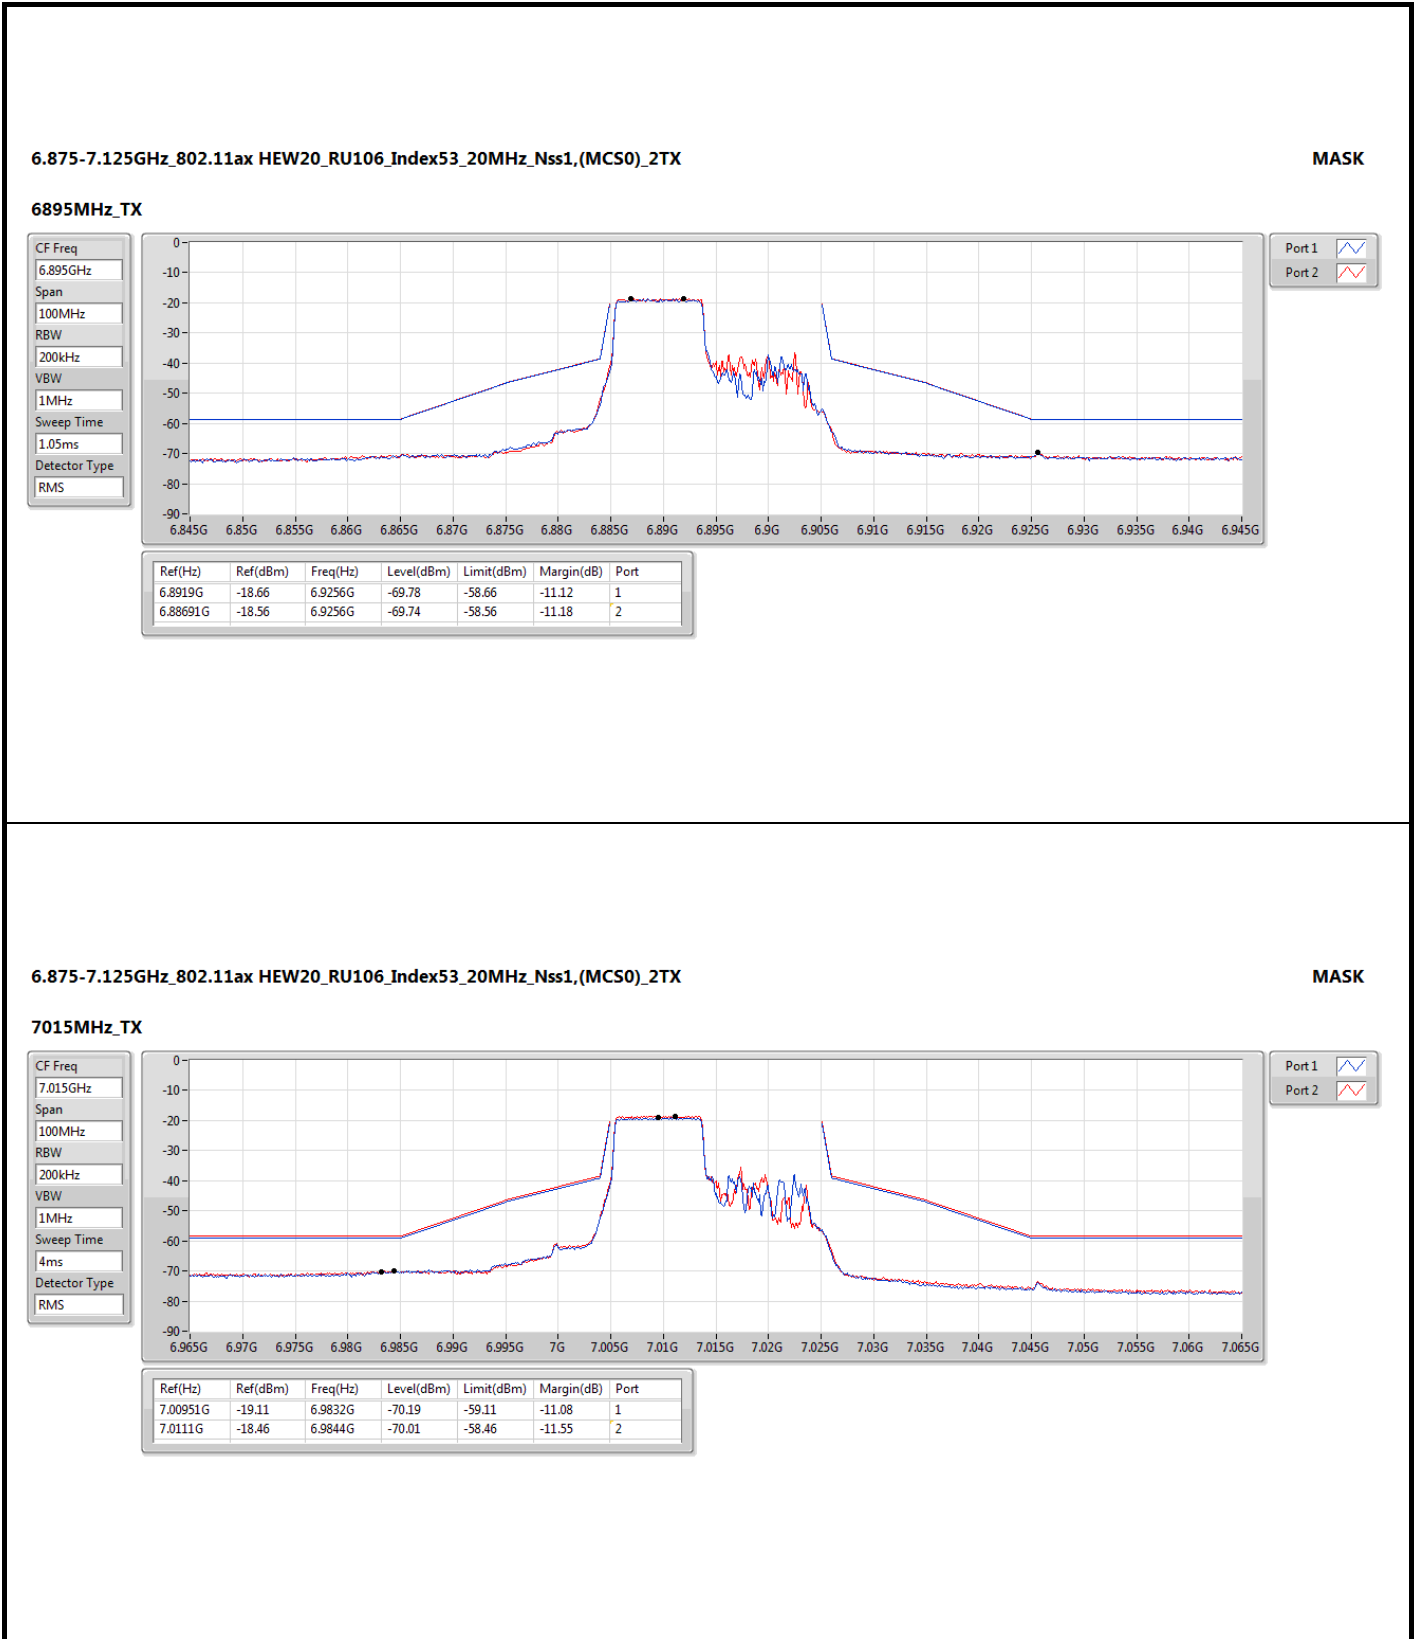

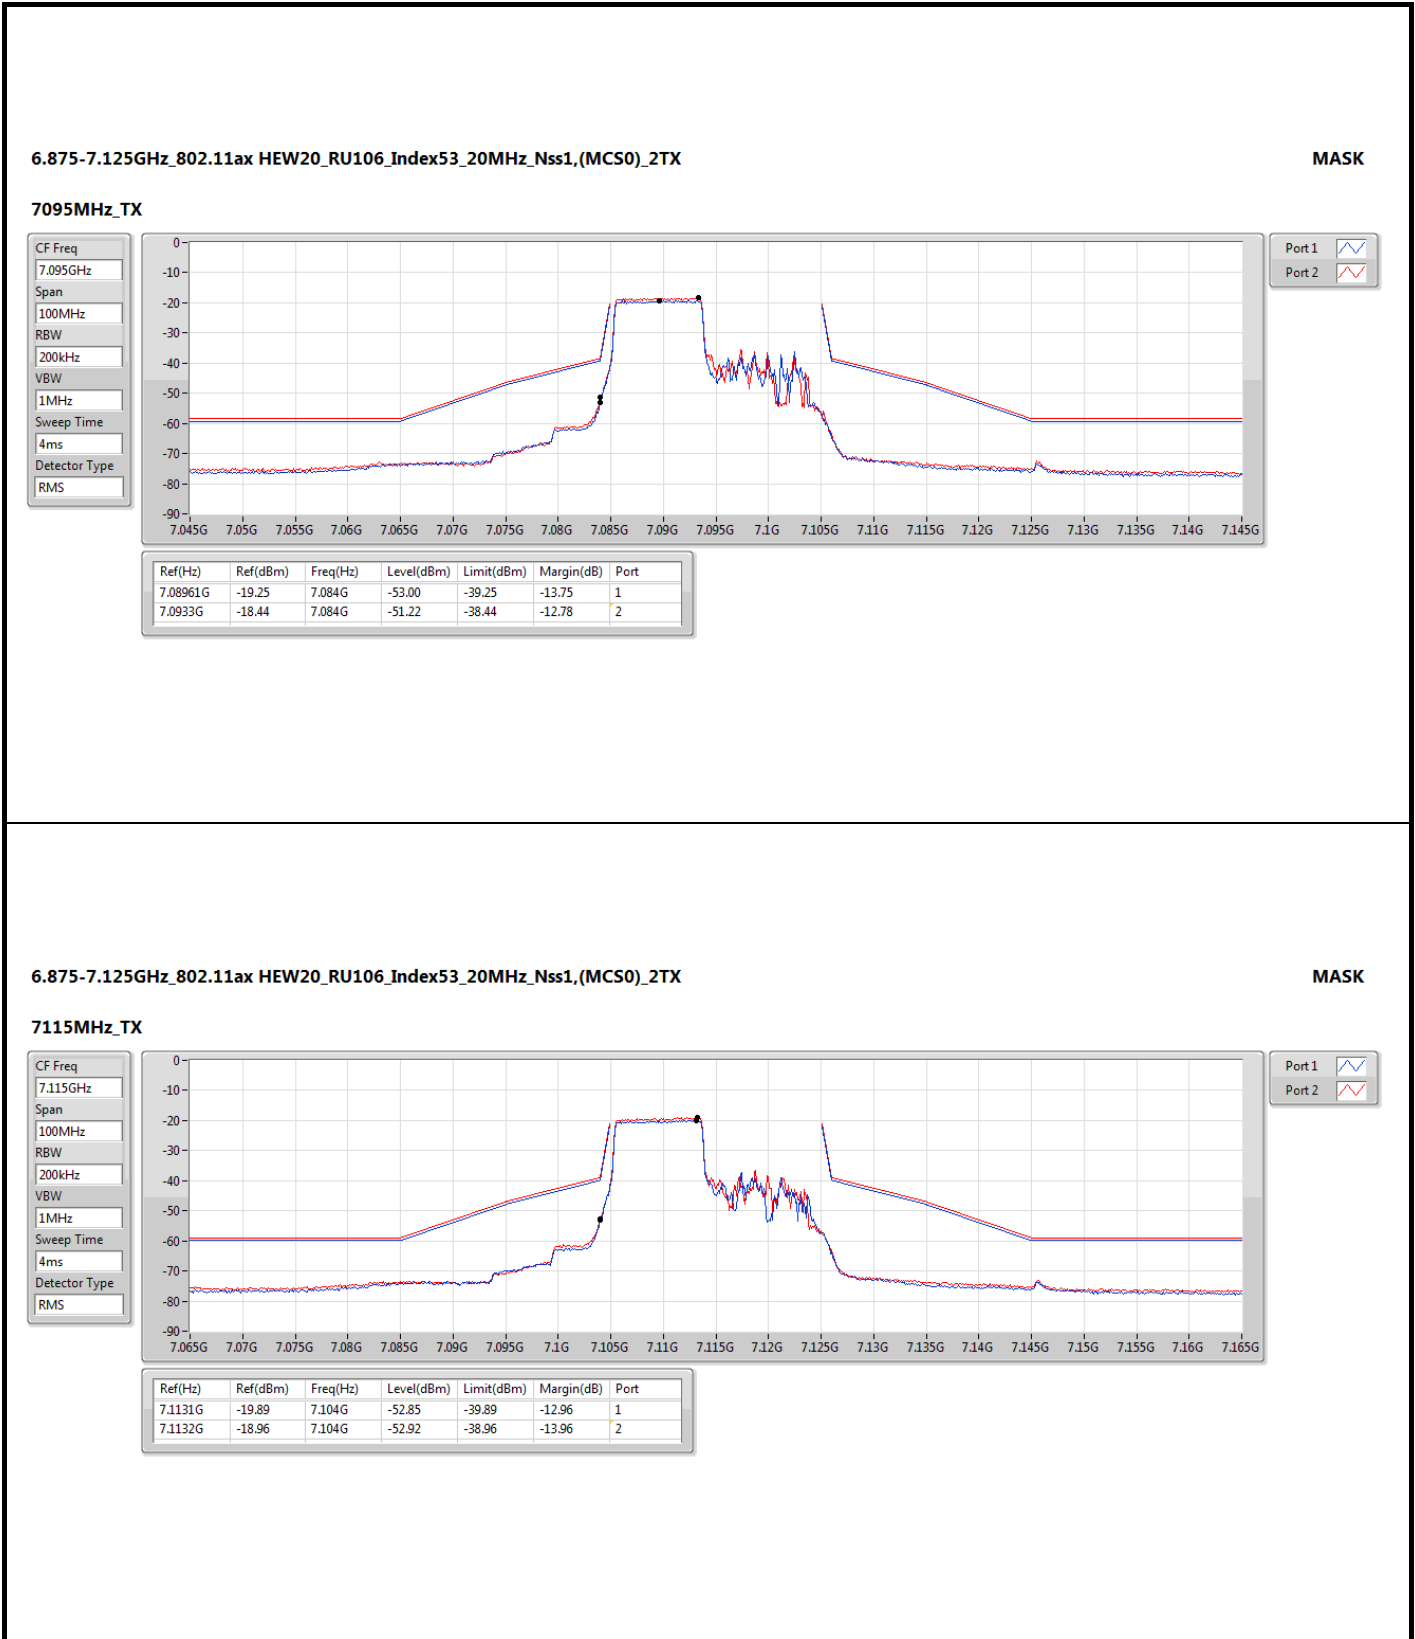



5.925-6.425GHz_802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

CF Freq
5.965GHz


Span
200MHz

RBW
200kHz

VBW
1MHz

Sweep Time
1.08ms

Detector Type
RMS

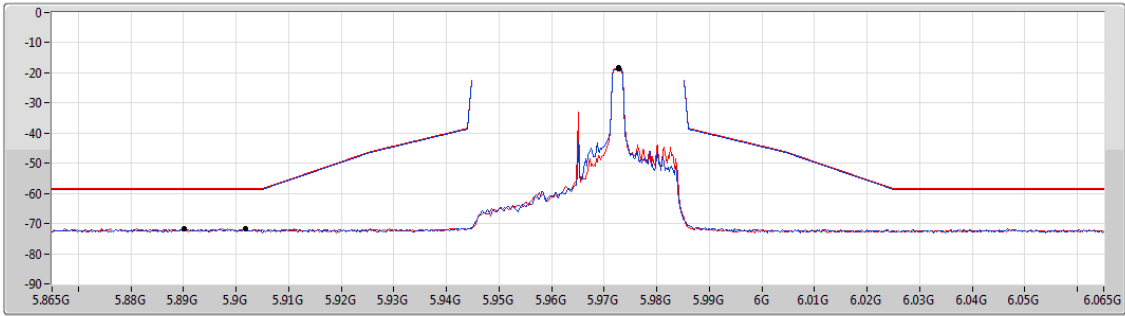

Port 1

Port 2

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.97279G	-18.68	5.9018G	-71.71	-58.68	-13.03	1
5.97279G	-18.41	5.8902G	-71.58	-58.41	-13.17	2

5.925-6.425GHz_802.11ax HEW40_RU26_Index12_40MHz_Nss1,(MCS0)_2TX

MASK

6165MHz_TX

CF Freq
6.165GHz


Span
200MHz

RBW
200kHz

VBW
1MHz

Sweep Time
1.08ms

Detector Type
RMS

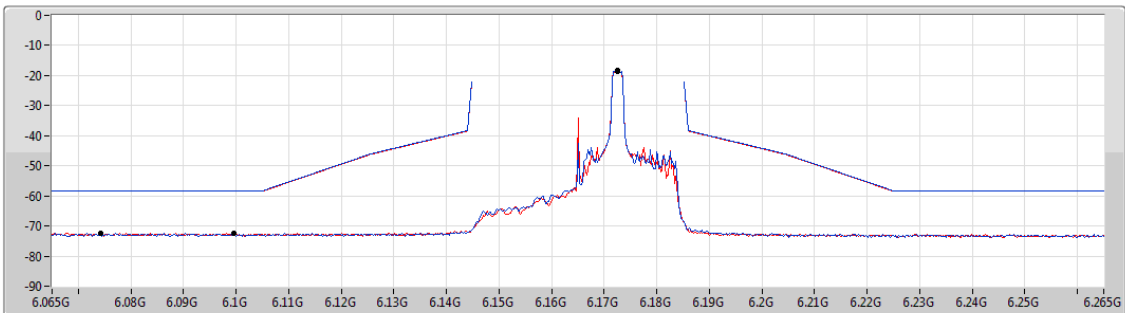

Port 1

Port 2

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.17259G	-18.32	6.0996G	-72.43	-58.32	-14.11	1
6.17259G	-18.47	6.0742G	-72.36	-58.47	-13.89	2

