

FCC Co-Location Test Report

FCC ID : SQG-SONAIF573
Equipment : Sona IF573 802.11ax Wi-Fi 6E Module with Bluetooth 5.4
Model No. : Sona IF573
Brand Name : Laird Connectivity
Applicant : Laird Connectivity LLC
Address : W66N220 Commerce Court, Cedarburg, WI 53012 United States Of America
Standard : 47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
Received Date : Jan. 17, 2023
Tested Date : Apr. 17 ~ Apr. 27, 2023

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	The Equipment List	6
1.3	Test Standards	7
1.4	Reference Guidance	7
1.5	Deviation from Test Standard and Measurement Procedure.....	7
1.6	Measurement Uncertainty	7
2	TEST CONFIGURATION.....	8
2.1	Testing Facility	8
2.2	The Worst Test Modes and Channel Details	8
3	TRANSMITTER TEST RESULTS	9
3.1	Unwanted Emissions into Restricted Frequency Bands	9
4	TEST LABORATORY INFORMATION	12

Appendix A. Unwanted Emissions Into Restricted Frequency Bands

Release Record

Report No.	Version	Description	Issued Date
FR311701CO	Rev. 01	Initial issue	Jul. 28, 2023

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 36.79MHz 36.95 (Margin -3.05dB) - QP	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The four configurations of the EUT are shown on the following:

Model Name	Part No.	Description
Sona IF573	453-00117	Module, Sona IF573, MIMO, MHF4
	453-00118	Module, Sona IF573, MIMO, Trace Pin
	453-00119	Module, Sona IF573, MIMO, M.2, Key E, SDIO, UART
	453-00120	Module, Sona IF573, MIMO, M.2, Key E, PCIe, UART

1.1.2 Specification of the Equipment under Test (EUT)

WLAN	
Operating Frequency	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 MHz ~ 5825 MHz 802.11a/ax: 5925 MHz ~ 6425 MHz; 6425 MHz ~ 6525 MHz; 6525 MHz ~ 6875 MHz; 6875 MHz ~ 7125 MHz
Modulation Type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)
BT	
Operating Frequency	2402 MHz ~ 2480 MHz
Modulation Type	Bluetooth LE: GFSK Bluetooth BR(1Mbps): GFSK Bluetooth EDR (2Mbps): $\pi/4$ -DQPSK Bluetooth EDR (3Mbps): 8-DPSK

1.1.3 Antenna Details

Ant. No.	Manufacturer	Model	Part Number	Type	Connector	Operating Frequencies / Gain (dBi)		
						2.4GHz	5GHz	6GHz
1	JOYMAX	TWX-100B RSAX-2001	NA	Dipole	RP-SMA	2	4	4
2	Laird	FlexMIMO 6E	EFD2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.8	3.3
3	Laird	Mini NanoBlade Flex 6 GHz	EMF2471A 3S-10MH4L	PCB Dipole	MHF4L	2.4	4.4	5.2
4	Laird	FlexPIFA 6E	EFB2471A3 S-10MH4L	PIFA	MHF4L	2.2	3.9	3.8

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host
--------------------------	------------------

1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Tested Date	Apr. 17 ~ Apr. 27, 2023				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101498	Nov. 21, 2022	Nov. 20, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 03, 2022	Aug. 02, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 25, 2022	Nov. 24, 2023
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 27, 2022	Oct. 26, 2023
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2022	Jun. 27, 2023
Preamplifier	EMC	EMC118A45SE	980898	Jul. 16, 2022	Jul. 15, 2023
Preamplifier	EMC	EMC184045SE	980903	Jul. 16, 2022	Jul. 15, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 04, 2022	Oct. 03, 2023
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 04, 2022	Oct. 03, 2023
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 04, 2022	Oct. 03, 2023
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 04, 2022	Oct. 03, 2023
HIGHPASS FILTER 7.5-18G	warison	WFIL-H7500-18000 F	WRIA9FWC2B2	Oct. 06, 2022	Oct. 05, 2023
HIGHPASS FILTER 7-18G	K&L	11SH10-7000/T1800 0-O/OP	18	Oct. 06, 2022	Oct. 05, 2023
LOWPASS FILTER	WI	WLKS5000-12SS	1	Oct. 06, 2022	Oct. 05, 2023
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 06, 2022	Oct. 05, 2023
Attenuator	woken	PE7013-10	10-1	Oct. 14, 2022	Oct. 13, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.3 Test Standards

47 CFR FCC Part 15.247
47 CFR FCC Part 15.407
ANSI C63.10-2013

1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01
FCC KDB 412172 D01 Determining ERP and EIRP v01r01
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

1.5 Deviation from Test Standard and Measurement Procedure

None

1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission \leq 1GHz	± 3.41 dB
Unwanted Emission $>$ 1GHz	± 4.59 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Configuration
Unwanted Emissions	Mode 1: BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz Mode 2: BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz	1, 2, 3, 4, 5, 6, 7, 8, 9 1, 2, 3, 4, 5, 6, 7, 8, 9

NOTE:

1. The selected channel is the maximum power channel of Wi-Fi & BT mode.
2. Test configurations are listed as below:
 - Configuration 1:
Laird part number: 453-00117 (SC module) with Dipole antenna (model: TWX-100BRSAX-2001)
 - Configuration 2:
Laird part number: 453-00117 (SC module) with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
 - Configuration 3:
Laird part number: 453-00117 (SC module) with PIFA antenna (model: FlexPIFA 6E)
 - Configuration 4:
Laird part number: 453-00119 (ST M.2, SDIO Module) with Dipole antenna (model: TWX-100BRSAX-2001)
 - Configuration 5:
Laird part number: 453-00119 (ST M.2, SDIO Module) with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
 - Configuration 6:
Laird part number: 453-00119 (ST M.2, SDIO Module) with PIFA antenna (model: FlexPIFA 6E)
 - Configuration 7:
Laird part number: 453-00120 (ST M.2, PCIe Module) with Dipole antenna (model: TWX-100BRSAX-2001)
 - Configuration 8:
Laird part number: 453-00120 (ST M.2, PCIe Module) with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
 - Configuration 9:
Laird part number: 453-00120 (ST M.2, PCIe Module) with PIFA antenna (model: FlexPIFA 6E)

3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
<p>Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</p>		

3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.1.3 Test Setup

Radiated Emissions below 1 GHz

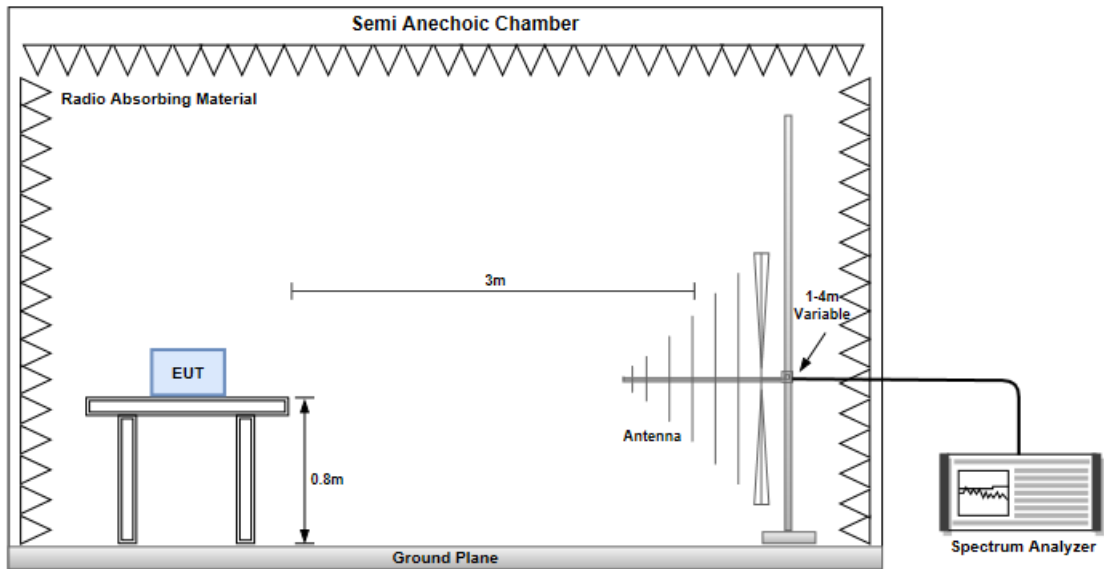

Radiated Emissions above 1 GHz

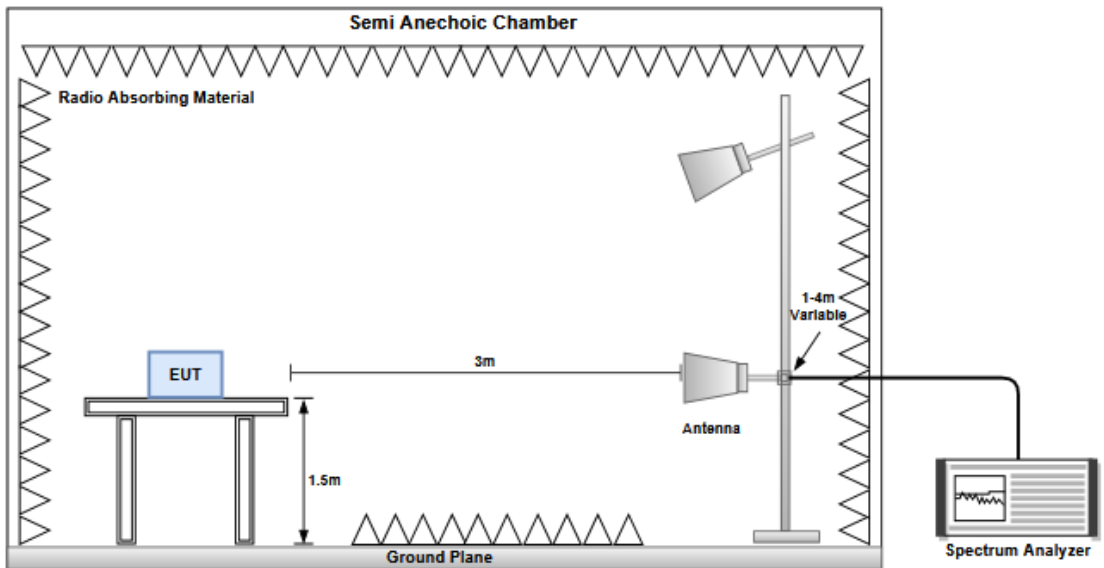

3.1.4 Test Results

Refer to Appendix A.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==




SC Module

Unwanted Emissions (Below 1GHz)

Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Brad Wu Temperature(°C):24 Humidity(%):64

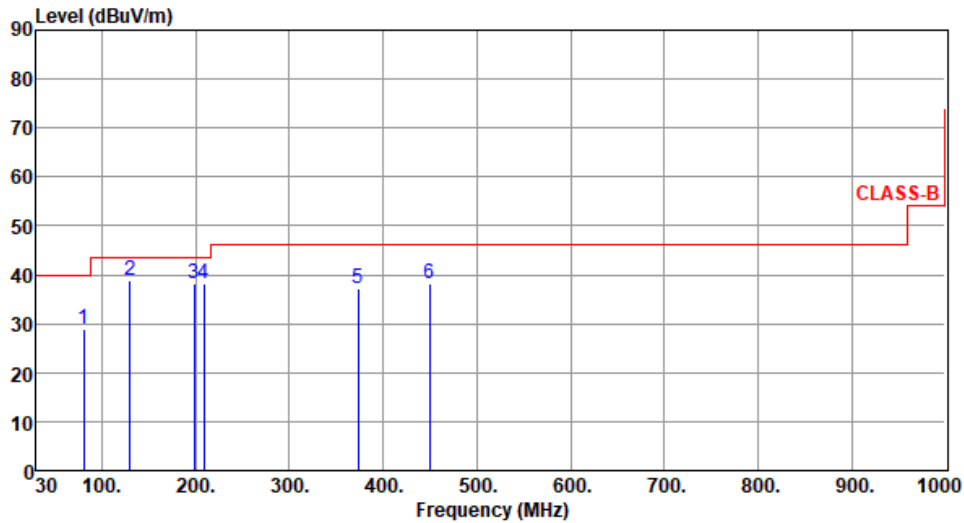

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	80.44	28.86	40.00	-11.14	42.60	-13.74	Peak	---	---
2	129.91	38.91	43.50	-4.59	49.23	-10.32	Peak	---	---
3	198.78	38.32	43.50	-5.18	50.09	-11.77	Peak	---	---
4	208.48	38.21	43.50	-5.29	50.15	-11.94	Peak	---	---
5	373.38	37.14	46.00	-8.86	43.45	-6.31	Peak	---	---
6	450.01	38.26	46.00	-7.74	42.48	-4.22	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)										
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz										
Polarization	Vertical										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six peaks are labeled with blue numbers 1 through 6, corresponding to the data table below.</p>											
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m			dBuV			cm	deg		
1	38.73	36.69	40.00	-3.31	45.59	-8.90	QP	100	126		
2	77.53	31.74	40.00	-8.26	44.81	-13.07	Peak	---	---		
3	126.03	34.25	43.50	-9.25	44.85	-10.60	Peak	---	---		
4	195.87	37.12	43.50	-6.38	48.80	-11.68	Peak	---	---		
5	370.47	34.36	46.00	-11.64	40.81	-6.45	Peak	---	---		
6	447.10	38.34	46.00	-7.66	42.62	-4.28	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz										
Polarization	Horizontal										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six blue vertical lines indicate measured peaks at frequencies 130.88, 196.84, 210.42, 311.30, 374.35, and 446.13 MHz. The emission levels are 38.42, 37.84, 36.18, 37.26, 38.63, and 37.41 dBuV/m respectively. The limit values are 43.50, 43.50, 43.50, 46.00, 46.00, and 46.00 dBuV/m. Margins are -5.08, -5.66, -7.32, -8.74, -7.37, and -8.59 dB. SA readings are 48.53, 49.69, 48.12, 45.07, 44.91, and 41.72 dBuV. Factors are -10.11, -11.85, -11.94, -7.81, -6.28, and -4.31 dB/m.</p>											
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m			dBuV			cm	deg		
1	130.88	38.42	43.50	-5.08	48.53	-10.11	Peak	---	---		
2	196.84	37.84	43.50	-5.66	49.69	-11.85	Peak	---	---		
3	210.42	36.18	43.50	-7.32	48.12	-11.94	Peak	---	---		
4	311.30	37.26	46.00	-8.74	45.07	-7.81	Peak	---	---		
5	374.35	38.63	46.00	-7.37	44.91	-6.28	Peak	---	---		
6	446.13	37.41	46.00	-8.59	41.72	-4.31	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											




Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz										
Polarization	Vertical										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six peaks are labeled with blue numbers 1 through 6, corresponding to the data table below.</p>											
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m	dBuV/m		dBuV			cm	deg		
1	36.79	36.15	40.00	-3.85	45.33	-9.18	QP	100	135		
2	79.47	31.00	40.00	-9.00	44.40	-13.40	Peak	---	---		
3	127.00	31.64	43.50	-11.86	42.34	-10.70	Peak	---	---		
4	194.90	35.02	43.50	-8.48	46.70	-11.68	Peak	---	---		
5	388.90	34.69	46.00	-11.31	40.50	-5.81	Peak	---	---		
6	440.31	36.69	46.00	-9.31	41.12	-4.43	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Brad Wu Temperature(°C):24 Humidity(%):64

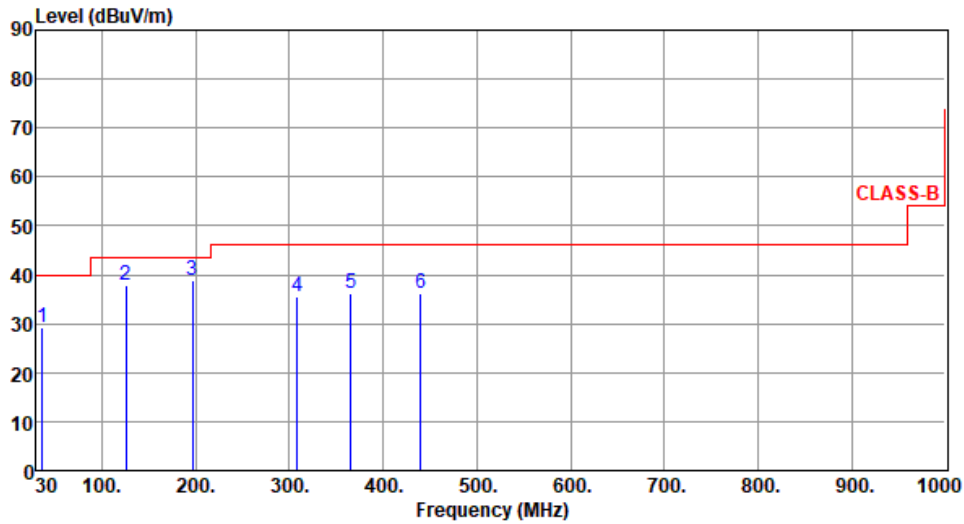

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	36.79	29.33	40.00	-10.67	38.51	-9.18	Peak	---	---
2	126.03	37.98	43.50	-5.52	48.58	-10.60	Peak	---	---
3	196.84	38.82	43.50	-4.68	50.67	-11.85	QP	100	202
4	308.39	35.63	46.00	-10.37	43.55	-7.92	Peak	---	---
5	365.62	36.10	46.00	-9.90	42.76	-6.66	Peak	---	---
6	440.31	36.25	46.00	-9.75	40.68	-4.43	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)										
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz										
Polarization	Vertical										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m						cm	deg		
1	38.73	36.51	40.00	-3.49	45.41	-8.90	QP	100	131		
2	77.53	33.28	40.00	-6.72	46.35	-13.07	Peak	---	---		
3	124.09	33.01	43.50	-10.49	44.00	-10.99	Peak	---	---		
4	195.87	38.40	43.50	-5.10	50.08	-11.68	Peak	---	---		
5	371.44	34.29	46.00	-11.71	40.68	-6.39	Peak	---	---		
6	449.04	38.66	46.00	-7.34	42.90	-4.24	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz										
Polarization	Horizontal										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m			dBuV			cm	deg		
1	36.79	31.32	40.00	-8.68	40.50	-9.18	Peak	---	---		
2	132.82	38.77	43.50	-4.73	48.91	-10.14	Peak	---	---		
3	196.84	38.93	43.50	-4.57	50.78	-11.85	QP	100	199		
4	243.40	37.48	46.00	-8.52	47.76	-10.28	Peak	---	---		
5	305.48	36.65	46.00	-9.35	44.70	-8.05	Peak	---	---		
6	374.35	36.21	46.00	-9.79	42.49	-6.28	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Vertical									
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64				
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m						cm	deg	
1	36.79	36.79	40.00	-3.21	45.97	-9.18	QP	100	135	
2	77.53	33.12	40.00	-6.88	46.19	-13.07	Peak	---	---	
3	149.31	32.54	43.50	-10.96	41.47	-8.93	Peak	---	---	
4	196.84	38.49	43.50	-5.01	50.34	-11.85	Peak	---	---	
5	242.43	36.81	46.00	-9.19	47.14	-10.33	Peak	---	---	
6	374.35	33.62	46.00	-12.38	39.90	-6.28	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)										
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz										
Polarization	Horizontal										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six blue vertical lines indicate measured peaks at frequencies 80.44, 127.97, 195.87, 307.42, 370.47, and 445.16 MHz. The emission levels are 30.80, 38.74, 40.18, 35.31, 36.24, and 37.02 dBuV/m respectively. All peaks are below the CLASS-B limit.</p>											
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m			dBuV			cm	deg		
1	80.44	30.80	40.00	-9.20	44.54	-13.74	Peak	---	---		
2	127.97	38.74	43.50	-4.76	49.15	-10.41	Peak	---	---		
3	195.87	40.18	43.50	-3.32	51.86	-11.68	Peak	---	---		
4	307.42	35.31	46.00	-10.69	43.28	-7.97	Peak	---	---		
5	370.47	36.24	46.00	-9.76	42.69	-6.45	Peak	---	---		
6	445.16	37.02	46.00	-8.98	41.36	-4.34	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)																																																																														
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz																																																																														
Polarization	Vertical																																																																														
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):64</p>																																																																															
<p>The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red step function represents the CLASS-B emission limit. Six specific peaks are identified and numbered 1 through 6. Peak 1 is at 36.79 MHz, peak 2 at 77.53 MHz, peak 3 at 127.00 MHz, peak 4 at 194.90 MHz, peak 5 at 374.35 MHz, and peak 6 at 437.40 MHz. All peaks are well below the CLASS-B limit.</p>																																																																															
<table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>36.79</td> <td>36.95</td> <td>40.00</td> <td>-3.05</td> <td>46.13</td> <td>-9.18</td> <td>QP</td> <td>100</td> <td>129</td> </tr> <tr> <td>2</td> <td>77.53</td> <td>33.00</td> <td>40.00</td> <td>-7.00</td> <td>46.07</td> <td>-13.07</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>127.00</td> <td>33.44</td> <td>43.50</td> <td>-10.06</td> <td>44.14</td> <td>-10.70</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>194.90</td> <td>39.41</td> <td>43.50</td> <td>-4.09</td> <td>51.09</td> <td>-11.68</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>374.35</td> <td>36.24</td> <td>46.00</td> <td>-9.76</td> <td>42.52</td> <td>-6.28</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>437.40</td> <td>39.88</td> <td>46.00</td> <td>-6.12</td> <td>44.39</td> <td>-4.51</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	36.79	36.95	40.00	-3.05	46.13	-9.18	QP	100	129	2	77.53	33.00	40.00	-7.00	46.07	-13.07	Peak	---	---	3	127.00	33.44	43.50	-10.06	44.14	-10.70	Peak	---	---	4	194.90	39.41	43.50	-4.09	51.09	-11.68	Peak	---	---	5	374.35	36.24	46.00	-9.76	42.52	-6.28	Peak	---	---	6	437.40	39.88	46.00	-6.12	44.39	-4.51	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	36.79	36.95	40.00	-3.05	46.13	-9.18	QP	100	129																																																																						
2	77.53	33.00	40.00	-7.00	46.07	-13.07	Peak	---	---																																																																						
3	127.00	33.44	43.50	-10.06	44.14	-10.70	Peak	---	---																																																																						
4	194.90	39.41	43.50	-4.09	51.09	-11.68	Peak	---	---																																																																						
5	374.35	36.24	46.00	-9.76	42.52	-6.28	Peak	---	---																																																																						
6	437.40	39.88	46.00	-6.12	44.39	-4.51	Peak	---	---																																																																						
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																															



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz										
Polarization	Horizontal										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six peaks are marked with blue vertical lines and numbered 1 through 6. Peak 1 is at 80.44 MHz, peak 2 at 127.97 MHz, peak 3 at 194.90 MHz, peak 4 at 308.39 MHz, peak 5 at 386.96 MHz, and peak 6 at 440.31 MHz. All peaks are below the CLASS-B limit.</p>											
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table		
		dBuV/m			dBuV			cm	deg		
1	80.44	30.73	40.00	-9.27	44.47	-13.74	Peak	---	---		
2	127.97	36.81	43.50	-6.69	47.22	-10.41	Peak	---	---		
3	194.90	39.49	43.50	-4.01	51.17	-11.68	Peak	---	---		
4	308.39	38.48	46.00	-7.52	46.40	-7.92	Peak	---	---		
5	386.96	38.27	46.00	-7.73	44.13	-5.86	Peak	---	---		
6	440.31	35.15	46.00	-10.85	39.58	-4.43	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz										
Polarization	Vertical										
Test By :Brad Wu			Temperature(°C):24			Humidity(%):64					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg		
1	36.79	36.42	40.00	-3.58	45.60	-9.18	QP	100	131		
2	79.47	32.95	40.00	-7.05	46.35	-13.40	Peak	---	---		
3	127.00	32.25	43.50	-11.25	42.95	-10.70	Peak	---	---		
4	196.84	37.27	43.50	-6.23	49.12	-11.85	Peak	---	---		
5	374.35	36.52	46.00	-9.48	42.80	-6.28	Peak	---	---		
6	437.40	37.41	46.00	-8.59	41.92	-4.51	Peak	---	---		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>											



Unwanted Emissions (Above 1GHz)

Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)								
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz								
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):24 Humidity(%):62									
<p>The graph displays emission levels in dBuV/m against frequency in MHz. The y-axis ranges from 0 to 90 dBuV/m, and the x-axis ranges from 1000 to 40000 MHz. Two horizontal red lines indicate limits: CLASS-B at approximately 75 dBuV/m and CLASS-B (AVG) at approximately 55 dBuV/m. Four peaks are identified: Peak 1 at 3265 MHz (32.50 dBuV), Peak 2 at 3265 MHz (42.19 dBuV), Peak 3 at 8225 MHz (39.76 dBuV), and Peak 4 at 8225 MHz (52.88 dBuV).</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1	3265.00	29.33	54.00	-24.67	32.50	-3.17	Average	100	26
2	3265.00	42.19	74.00	-31.81	45.36	-3.17	Peak	100	26
3	8225.00	39.76	54.00	-14.24	34.51	5.25	Average	100	18
4	8225.00	52.88	74.00	-21.12	47.63	5.25	Peak	100	18
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Vertical									
Test By :Brad Wu			Temperature(°C):24			Humidity(%):62				
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	3265.00	29.26	54.00	-24.74	32.43	-3.17	Average	100	42	
2	3265.00	41.77	74.00	-32.23	44.94	-3.17	Peak	100	42	
3	8225.00	39.34	54.00	-14.66	34.09	5.25	Average	100	28	
4	8225.00	52.61	74.00	-21.39	47.36	5.25	Peak	100	28	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										



Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)								
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz								
Polarization	Horizontal								
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p>									
<p>The graph displays the emission level in dBuV/m across a frequency range from 1000 to 40000 MHz. Two horizontal red lines indicate the limits for CLASS-B (at approximately 74 dBuV/m) and CLASS-B (AVG) (at approximately 54 dBuV/m). Four peaks are identified: Peak 1 at 4145 MHz (30.78 dBuV/m), Peak 2 at 4145 MHz (42.90 dBuV/m), Peak 3 at 9105 MHz (41.73 dBuV/m), and Peak 4 at 9105 MHz (54.96 dBuV/m).</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m						cm	deg
1	4145.00	30.78	54.00	-23.22	32.65	-1.87	Average	100	48
2	4145.00	42.90	74.00	-31.10	44.77	-1.87	Peak	100	48
3	9105.00	41.73	54.00	-12.27	35.61	6.12	Average	100	54
4	9105.00	54.96	74.00	-19.04	48.84	6.12	Peak	100	54
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									




Configuration	1. SC Module with Dipole antenna (model: TWX-100BRSAX-2001)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Vertical									
Test By :Brad Wu			Temperature(°C):24			Humidity(%):62				
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
								cm	deg	
1	4145.00	30.46	54.00	-23.54	32.33	-1.87	Average	100	36	
2	4145.00	43.77	74.00	-30.23	45.64	-1.87	Peak	100	36	
3	9105.00	41.68	54.00	-12.32	35.56	6.12	Average	100	22	
4	9105.00	54.66	74.00	-19.34	48.54	6.12	Peak	100	22	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Brad Wu Temperature(°C):24 Humidity(%):62

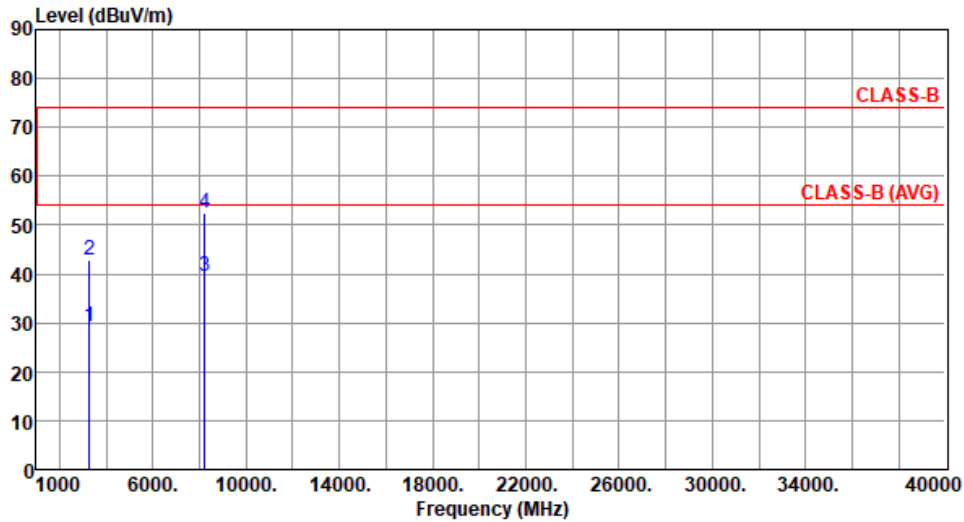

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	3265.00	29.11	54.00	-24.89	32.28	-3.17	Average	100	43
2	3265.00	42.90	74.00	-31.10	46.07	-3.17	Peak	100	43
3	8225.00	39.46	54.00	-14.54	34.21	5.25	Average	100	29
4	8225.00	52.61	74.00	-21.39	47.36	5.25	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)																																																										
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz																																																										
Polarization	Vertical																																																										
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p> <table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3265.00</td> <td>29.11</td> <td>54.00</td> <td>-24.89</td> <td>32.28</td> <td>-3.17</td> <td>Average</td> <td>100</td> <td>39</td> </tr> <tr> <td>2</td> <td>3265.00</td> <td>42.49</td> <td>74.00</td> <td>-31.51</td> <td>45.66</td> <td>-3.17</td> <td>Peak</td> <td>100</td> <td>39</td> </tr> <tr> <td>3</td> <td>8225.00</td> <td>39.45</td> <td>54.00</td> <td>-14.55</td> <td>34.20</td> <td>5.25</td> <td>Average</td> <td>100</td> <td>48</td> </tr> <tr> <td>4</td> <td>8225.00</td> <td>52.45</td> <td>74.00</td> <td>-21.55</td> <td>47.20</td> <td>5.25</td> <td>Peak</td> <td>100</td> <td>48</td> </tr> </tbody> </table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	3265.00	29.11	54.00	-24.89	32.28	-3.17	Average	100	39	2	3265.00	42.49	74.00	-31.51	45.66	-3.17	Peak	100	39	3	8225.00	39.45	54.00	-14.55	34.20	5.25	Average	100	48	4	8225.00	52.45	74.00	-21.55	47.20	5.25	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	3265.00	29.11	54.00	-24.89	32.28	-3.17	Average	100	39																																																		
2	3265.00	42.49	74.00	-31.51	45.66	-3.17	Peak	100	39																																																		
3	8225.00	39.45	54.00	-14.55	34.20	5.25	Average	100	48																																																		
4	8225.00	52.45	74.00	-21.55	47.20	5.25	Peak	100	48																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																											



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)																																																										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz																																																										
Polarization	Horizontal																																																										
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p> <table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4145.00</td> <td>30.77</td> <td>54.00</td> <td>-23.23</td> <td>32.64</td> <td>-1.87</td> <td>Average</td> <td>100</td> <td>28</td> </tr> <tr> <td>2</td> <td>4145.00</td> <td>43.98</td> <td>74.00</td> <td>-30.02</td> <td>45.85</td> <td>-1.87</td> <td>Peak</td> <td>100</td> <td>28</td> </tr> <tr> <td>3</td> <td>9105.00</td> <td>41.70</td> <td>54.00</td> <td>-12.30</td> <td>35.58</td> <td>6.12</td> <td>Average</td> <td>100</td> <td>33</td> </tr> <tr> <td>4</td> <td>9105.00</td> <td>55.73</td> <td>74.00</td> <td>-18.27</td> <td>49.61</td> <td>6.12</td> <td>Peak</td> <td>100</td> <td>33</td> </tr> </tbody> </table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4145.00	30.77	54.00	-23.23	32.64	-1.87	Average	100	28	2	4145.00	43.98	74.00	-30.02	45.85	-1.87	Peak	100	28	3	9105.00	41.70	54.00	-12.30	35.58	6.12	Average	100	33	4	9105.00	55.73	74.00	-18.27	49.61	6.12	Peak	100	33
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	4145.00	30.77	54.00	-23.23	32.64	-1.87	Average	100	28																																																		
2	4145.00	43.98	74.00	-30.02	45.85	-1.87	Peak	100	28																																																		
3	9105.00	41.70	54.00	-12.30	35.58	6.12	Average	100	33																																																		
4	9105.00	55.73	74.00	-18.27	49.61	6.12	Peak	100	33																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																											



Configuration	2. SC Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)								
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz								
Polarization	Vertical								
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p>									
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 40000). Two horizontal red lines represent limits: CLASS-B at approximately 74 dBuV/m and CLASS-B (AVG) at approximately 54 dBuV/m. Four peaks are labeled: 1 (at ~4145 MHz, level ~30.73), 2 (at ~4145 MHz, level ~43.31), 3 (at ~9105 MHz, level ~41.36), and 4 (at ~9105 MHz, level ~54.38).</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m						cm	deg
1	4145.00	30.73	54.00	-23.27	32.60	-1.87	Average	100	29
2	4145.00	43.31	74.00	-30.69	45.18	-1.87	Peak	100	29
3	9105.00	41.36	54.00	-12.64	35.24	6.12	Average	100	51
4	9105.00	54.38	74.00	-19.62	48.26	6.12	Peak	100	51
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)																																																										
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz																																																										
Polarization	Horizontal																																																										
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p> <table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3265.00</td> <td>29.11</td> <td>54.00</td> <td>-24.89</td> <td>32.28</td> <td>-3.17</td> <td>Average</td> <td>100</td> <td>36</td> </tr> <tr> <td>2</td> <td>3265.00</td> <td>42.21</td> <td>74.00</td> <td>-31.79</td> <td>45.38</td> <td>-3.17</td> <td>Peak</td> <td>100</td> <td>36</td> </tr> <tr> <td>3</td> <td>8225.00</td> <td>39.38</td> <td>54.00</td> <td>-14.62</td> <td>34.13</td> <td>5.25</td> <td>Average</td> <td>100</td> <td>15</td> </tr> <tr> <td>4</td> <td>8225.00</td> <td>52.88</td> <td>74.00</td> <td>-21.12</td> <td>47.63</td> <td>5.25</td> <td>Peak</td> <td>100</td> <td>15</td> </tr> </tbody> </table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	3265.00	29.11	54.00	-24.89	32.28	-3.17	Average	100	36	2	3265.00	42.21	74.00	-31.79	45.38	-3.17	Peak	100	36	3	8225.00	39.38	54.00	-14.62	34.13	5.25	Average	100	15	4	8225.00	52.88	74.00	-21.12	47.63	5.25	Peak	100	15
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	3265.00	29.11	54.00	-24.89	32.28	-3.17	Average	100	36																																																		
2	3265.00	42.21	74.00	-31.79	45.38	-3.17	Peak	100	36																																																		
3	8225.00	39.38	54.00	-14.62	34.13	5.25	Average	100	15																																																		
4	8225.00	52.88	74.00	-21.12	47.63	5.25	Peak	100	15																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																											



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)								
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz								
Polarization	Vertical								
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m						cm	deg
1	3265.00	29.17	54.00	-24.83	32.34	-3.17	Average	100	44
2	3265.00	42.48	74.00	-31.52	45.65	-3.17	Peak	100	44
3	8225.00	39.25	54.00	-14.75	34.00	5.25	Average	100	38
4	8225.00	52.49	74.00	-21.51	47.24	5.25	Peak	100	38
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)								
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz								
Polarization	Horizontal								
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p>									
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 40000). Two horizontal red lines represent limits: CLASS-B at approximately 74 dBuV/m and CLASS-B (AVG) at approximately 54 dBuV/m. Two vertical blue lines indicate peaks at 4145 MHz (labeled '2') and 9105 MHz (labeled '4').</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
								cm	deg
1	4145.00	30.50	54.00	-23.50	32.37	-1.87	Average	100	23
2	4145.00	43.78	74.00	-30.22	45.65	-1.87	Peak	100	23
3	9105.00	41.63	54.00	-12.37	35.51	6.12	Average	100	28
4	9105.00	53.99	74.00	-20.01	47.87	6.12	Peak	100	28
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									




Configuration	3. SC Module with PIFA antenna (model: FlexPIFA 6E)																																																										
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz																																																										
Polarization	Vertical																																																										
<p>Test By :Brad Wu Temperature(°C):24 Humidity(%):62</p> <table border="1"> <thead> <tr> <th></th> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB/m</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4145.00</td> <td>30.55</td> <td>54.00</td> <td>-23.45</td> <td>32.42</td> <td>-1.87</td> <td>Average</td> <td>100</td> <td>56</td> </tr> <tr> <td>2</td> <td>4145.00</td> <td>43.64</td> <td>74.00</td> <td>-30.36</td> <td>45.51</td> <td>-1.87</td> <td>Peak</td> <td>100</td> <td>56</td> </tr> <tr> <td>3</td> <td>9105.00</td> <td>41.09</td> <td>54.00</td> <td>-12.91</td> <td>34.97</td> <td>6.12</td> <td>Average</td> <td>100</td> <td>24</td> </tr> <tr> <td>4</td> <td>9105.00</td> <td>55.01</td> <td>74.00</td> <td>-18.99</td> <td>48.89</td> <td>6.12</td> <td>Peak</td> <td>100</td> <td>24</td> </tr> </tbody> </table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4145.00	30.55	54.00	-23.45	32.42	-1.87	Average	100	56	2	4145.00	43.64	74.00	-30.36	45.51	-1.87	Peak	100	56	3	9105.00	41.09	54.00	-12.91	34.97	6.12	Average	100	24	4	9105.00	55.01	74.00	-18.99	48.89	6.12	Peak	100	24
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																		
1	4145.00	30.55	54.00	-23.45	32.42	-1.87	Average	100	56																																																		
2	4145.00	43.64	74.00	-30.36	45.51	-1.87	Peak	100	56																																																		
3	9105.00	41.09	54.00	-12.91	34.97	6.12	Average	100	24																																																		
4	9105.00	55.01	74.00	-18.99	48.89	6.12	Peak	100	24																																																		
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																											



ST M.2, SDIO Module

Configuration	4. ST M.2, SDIO Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 66

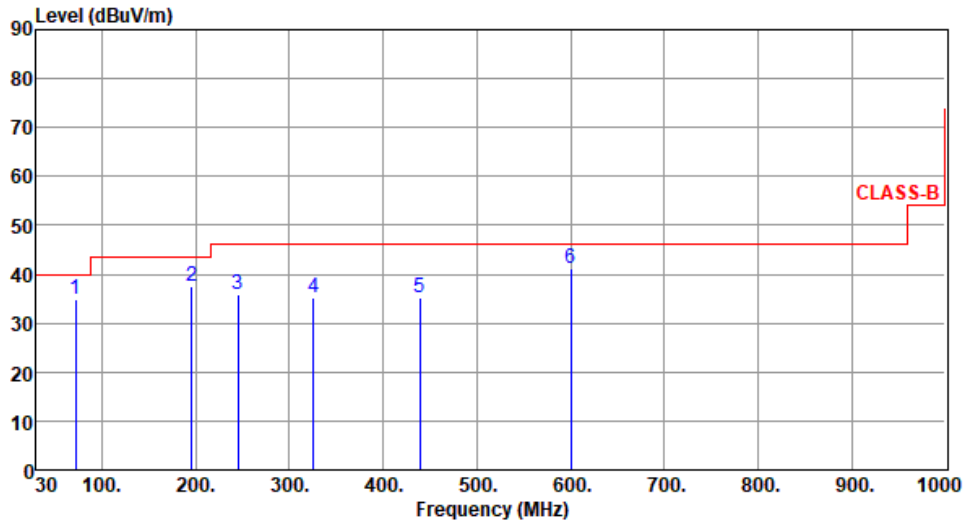

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.51	34.92	40.00	-5.08	46.33	-11.41	Peak	---	---
2	195.57	37.41	43.50	-6.09	49.10	-11.69	Peak	---	---
3	244.76	35.92	46.00	-10.08	46.11	-10.19	Peak	---	---
4	325.34	35.16	46.00	-10.84	42.66	-7.50	Peak	---	---
5	438.97	35.22	46.00	-10.78	39.69	-4.47	Peak	---	---
6	600.36	41.08	46.00	-4.92	42.00	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	4. ST M.2, SDIO Module with Dipole antenna (model: TWX-100BRSAX-2001)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Vertical									
Test By :Paul Lin			Temperature(°C):24			Humidity(%):66				
<p>The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the CLASS-B limit, which is constant at 46 dBuV/m from 30 MHz to 1000 MHz. Six specific peaks are identified and labeled with numbers 1 through 6. Peak 1 is at 42.34 MHz, peak 2 at 134.28 MHz, peak 3 at 193.41 MHz, peak 4 at 390.43 MHz, peak 5 at 440.29 MHz, and peak 6 at 600.36 MHz. The emission levels for these peaks are 36.57, 36.33, 36.54, 35.27, 35.34, and 42.64 dBuV/m respectively.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	42.34	36.57	40.00	-3.43	45.02	-8.45	QP	100	170	
2	134.28	36.33	43.50	-7.17	46.22	-9.89	Peak	---	---	
3	193.41	36.54	43.50	-6.96	48.17	-11.63	Peak	---	---	
4	390.43	35.27	46.00	-10.73	41.04	-5.77	Peak	---	---	
5	440.29	35.34	46.00	-10.66	39.77	-4.43	Peak	---	---	
6	600.36	42.64	46.00	-3.36	43.56	-0.92	Peak	---	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	4. ST M.2, SDIO Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

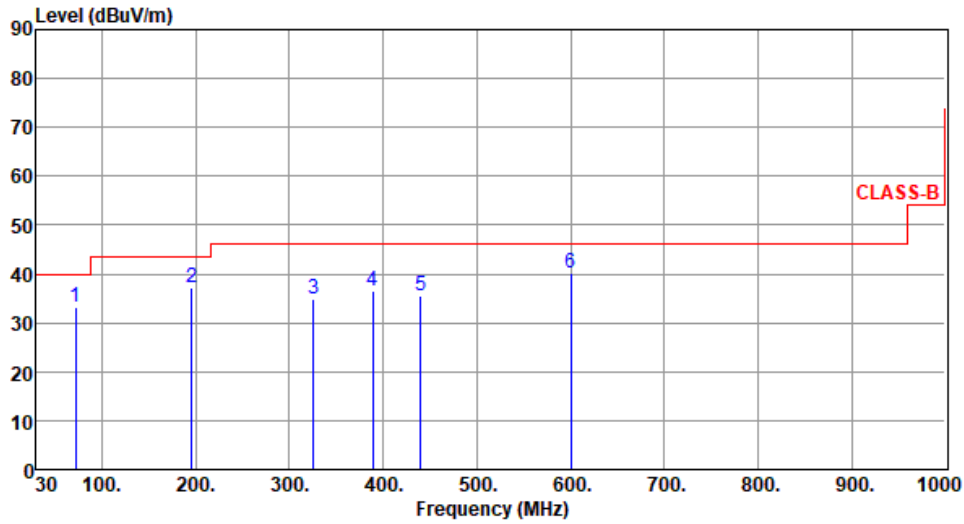

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.95	33.26	40.00	-6.74	44.76	-11.50	Peak	---	---
2	195.42	37.22	43.50	-6.28	48.90	-11.68	Peak	---	---
3	325.34	34.89	46.00	-11.11	42.39	-7.50	Peak	---	---
4	389.12	36.64	46.00	-9.36	42.45	-5.81	Peak	---	---
5	440.13	35.47	46.00	-10.53	39.91	-4.44	Peak	---	---
6	600.36	40.34	46.00	-5.66	41.26	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	4. ST M.2, SDIO Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

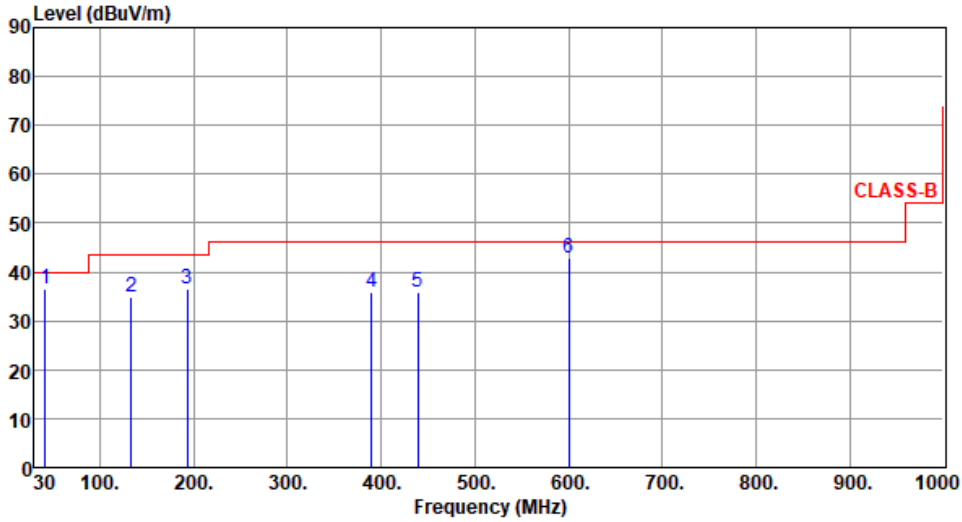

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	41.78	36.49	40.00	-3.51	45.12	-8.63	QP	100	182
2	133.42	34.92	43.50	-8.58	44.94	-10.02	Peak	---	---
3	193.34	36.47	43.50	-7.03	48.09	-11.62	Peak	---	---
4	389.95	35.98	46.00	-10.02	41.77	-5.79	Peak	---	---
5	439.18	35.96	46.00	-10.04	40.43	-4.47	Peak	---	---
6	600.36	42.75	46.00	-3.25	43.67	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	5. ST M.2, SDIO Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

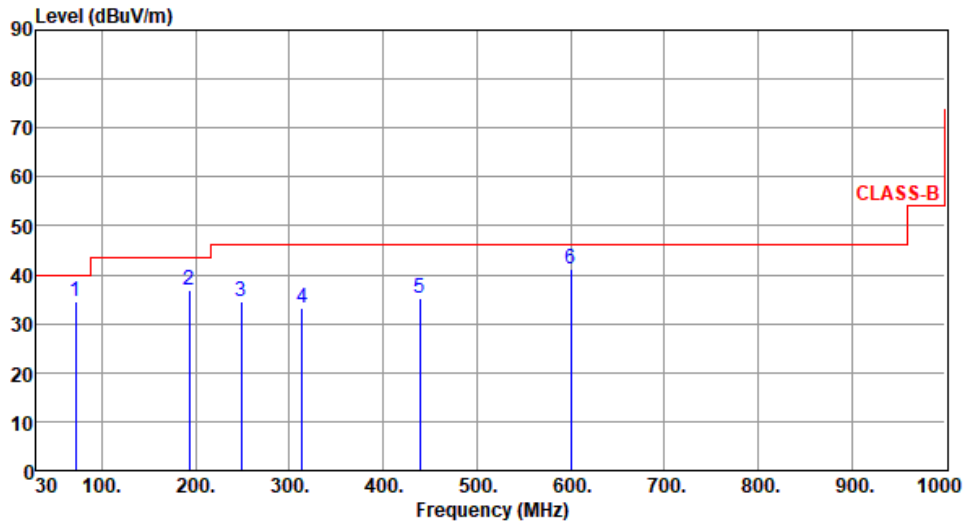

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.96	34.65	40.00	-5.35	46.15	-11.50	Peak	---	---
2	192.96	36.82	43.50	-6.68	48.41	-11.59	Peak	---	---
3	248.25	34.41	46.00	-11.59	44.51	-10.10	Peak	---	---
4	313.24	33.24	46.00	-12.76	40.96	-7.72	Peak	---	---
5	439.34	35.07	46.00	-10.93	39.52	-4.45	Peak	---	---
6	600.36	41.28	46.00	-4.72	42.20	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	5. ST M.2, SDIO Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

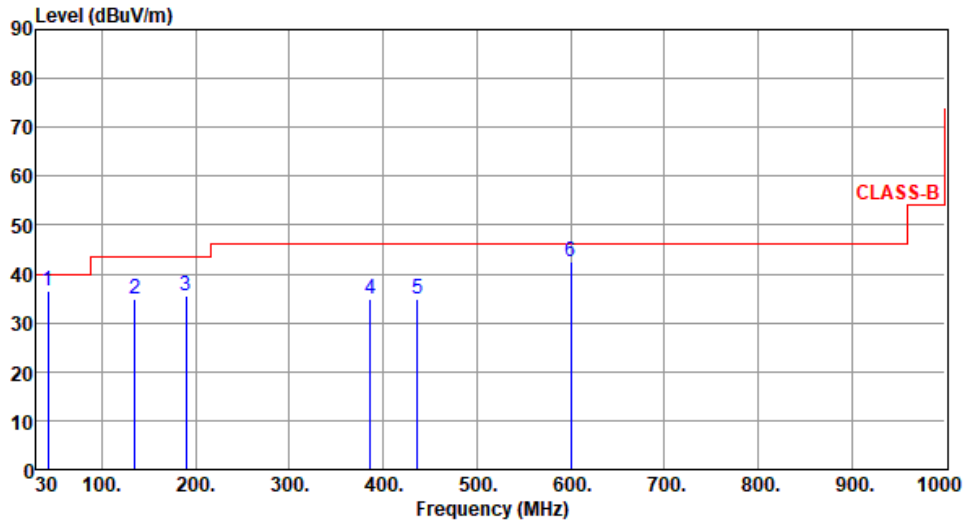

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.48	36.55	40.00	-3.45	44.95	-8.40	QP	100	172
2	134.76	34.75	43.50	-8.75	44.64	-9.89	Peak	---	---
3	190.05	35.38	43.50	-8.12	46.90	-11.52	Peak	---	---
4	385.99	34.73	46.00	-11.27	40.62	-5.89	Peak	---	---
5	436.43	34.81	46.00	-11.19	39.34	-4.53	Peak	---	---
6	600.36	42.67	46.00	-3.33	43.59	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	5. ST M.2, SDIO Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

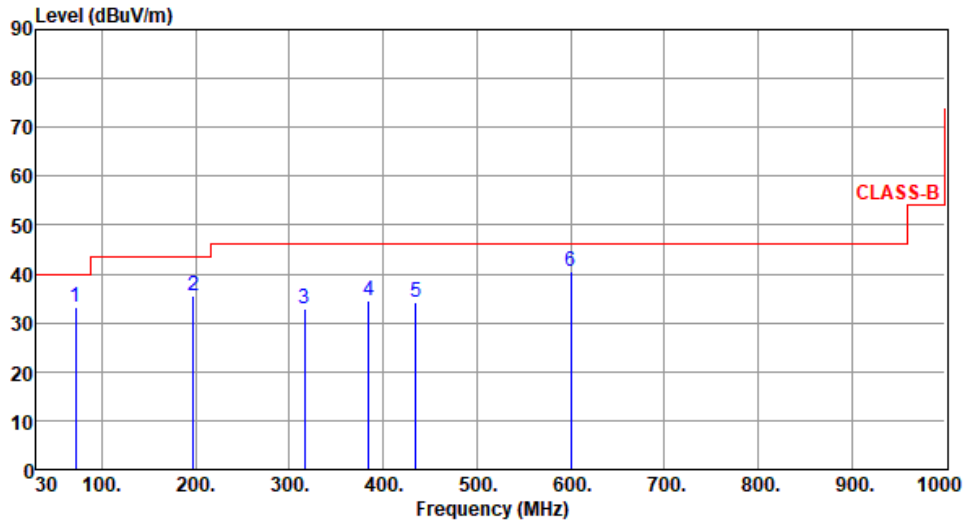

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.86	33.36	40.00	-6.64	44.84	-11.48	Peak	---	---
2	197.81	35.41	43.50	-8.09	47.20	-11.79	Peak	---	---
3	316.15	32.90	46.00	-13.10	40.52	-7.62	Peak	---	---
4	385.02	34.64	46.00	-11.36	40.55	-5.91	Peak	---	---
5	434.49	34.20	46.00	-11.80	38.78	-4.58	Peak	---	---
6	600.36	40.68	46.00	-5.32	41.60	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	5. ST M.2, SDIO Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):24 Humidity(%):66

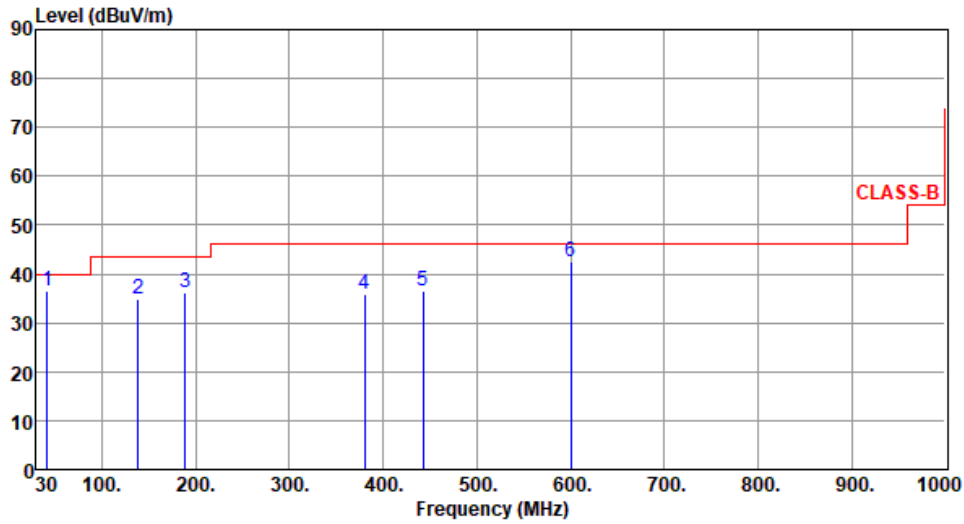

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	41.75	36.51	40.00	-3.49	45.15	-8.64	QP	100	173
2	138.64	34.97	43.50	-8.53	44.46	-9.49	Peak	---	---
3	189.08	36.34	43.50	-7.16	47.86	-11.52	Peak	---	---
4	380.17	35.80	46.00	-10.20	41.82	-6.02	Peak	---	---
5	442.25	36.46	46.00	-9.54	40.85	-4.39	Peak	---	---
6	600.36	42.58	46.00	-3.42	43.50	-0.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	6. ST M.2, SDIO Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Horizontal									
Test By : Paul Lin			Temperature(°C): 24			Humidity(%): 66				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six peaks are identified with blue vertical lines and labeled 1 through 6. Peak 1 is at 72.05 MHz, peak 2 at 196.18 MHz, peak 3 at 246.37 MHz, peak 4 at 326.15 MHz, peak 5 at 432.58 MHz, and peak 6 at 600.36 MHz. All peaks are below the CLASS-B limit.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	72.05	34.62	40.00	-5.38	46.15	-11.53	Peak	---	---	
2	196.18	37.31	43.50	-6.19	49.03	-11.72	Peak	---	---	
3	246.37	35.86	46.00	-10.14	46.01	-10.15	Peak	---	---	
4	326.15	35.16	46.00	-10.84	42.65	-7.49	Peak	---	---	
5	432.58	35.63	46.00	-10.37	40.29	-4.66	Peak	---	---	
6	600.36	41.34	46.00	-4.66	42.26	-0.92	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	6. ST M.2, SDIO Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Vertical									
Test By : Paul Lin			Temperature(°C): 24			Humidity(%): 66				
<p>The graph displays the emission spectrum with a red line representing the CLASS-B limit. The y-axis is Level (dBuV/m) from 0 to 90, and the x-axis is Frequency (MHz) from 30 to 1000. Six peaks are labeled 1 through 6, corresponding to the data table below.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	42.46	36.38	40.00	-3.62	44.79	-8.41	QP	100	171	
2	134.19	36.37	43.50	-7.13	46.26	-9.89	Peak	---	---	
3	193.61	36.45	43.50	-7.05	48.10	-11.65	Peak	---	---	
4	390.02	35.66	46.00	-10.34	41.45	-5.79	Peak	---	---	
5	437.19	35.24	46.00	-10.76	39.76	-4.52	Peak	---	---	
6	600.36	42.55	46.00	-3.45	43.47	-0.92	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	6. ST M.2, SDIO Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Horizontal									
Test By : Paul Lin			Temperature(°C): 24			Humidity(%): 66				
<p>The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the CLASS-B limit, which is constant at 40 dBuV/m until 100 MHz, then steps up to 45 dBuV/m at 200 MHz, and finally to 55 dBuV/m at 1000 MHz. Six blue vertical lines indicate specific emission peaks labeled 1 through 6, with their corresponding data listed in the table below.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	72.18	33.49	40.00	-6.51	45.08	-11.59	Peak	---	---	
2	196.25	37.81	43.50	-5.69	49.54	-11.73	Peak	---	---	
3	325.27	35.16	46.00	-10.84	42.66	-7.50	Peak	---	---	
4	386.59	36.44	46.00	-9.56	42.31	-5.87	Peak	---	---	
5	438.94	35.46	46.00	-10.54	39.93	-4.47	Peak	---	---	
6	600.36	40.84	46.00	-5.16	41.76	-0.92	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	6. ST M.2, SDIO Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Vertical									
Test By : Paul Lin			Temperature(°C): 24			Humidity(%): 66				
<p>The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the CLASS-B limit, which is constant at 46 dBuV/m from 30 MHz to 950 MHz and then rises to 75 dBuV/m at 1000 MHz. Six specific peaks are identified with blue vertical lines and numbered 1 through 6. Peak 1 is at 41.88 MHz, peak 2 at 134.49 MHz, peak 3 at 192.57 MHz, peak 4 at 389.48 MHz, peak 5 at 438.12 MHz, and peak 6 at 600.36 MHz. The emission levels for these peaks are 36.43, 35.36, 36.34, 35.46, 35.41, and 42.47 dBuV/m respectively.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	41.88	36.43	40.00	-3.57	45.04	-8.61	QP	100	174	
2	134.49	35.36	43.50	-8.14	45.25	-9.89	Peak	---	---	
3	192.57	36.34	43.50	-7.16	47.89	-11.55	Peak	---	---	
4	389.48	35.46	46.00	-10.54	41.26	-5.80	Peak	---	---	
5	438.12	35.41	46.00	-10.59	39.90	-4.49	Peak	---	---	
6	600.36	42.47	46.00	-3.53	43.39	-0.92	Peak	---	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



ST M.2, PCIe Module

Configuration	7. ST M.2, PCIe Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

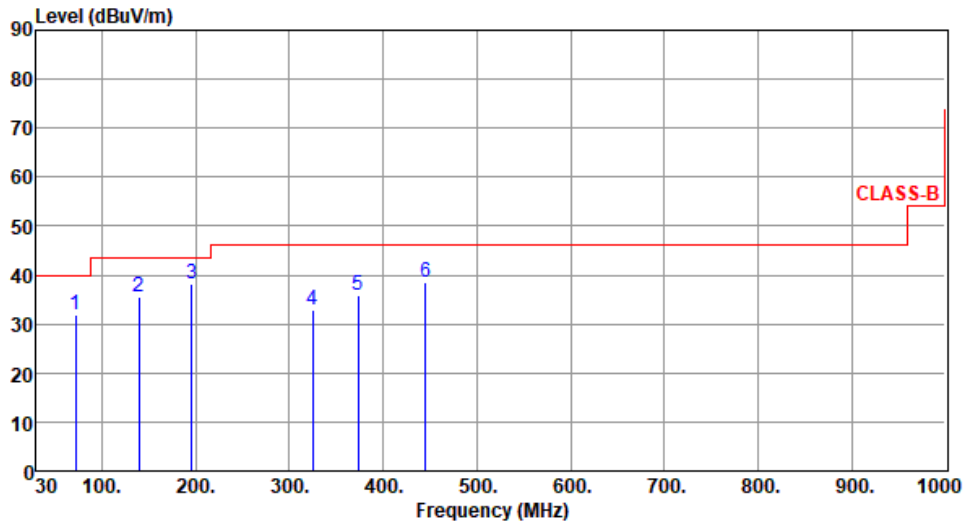

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.71	32.03	40.00	-7.97	43.48	-11.45	Peak	---	---
2	139.61	35.49	43.50	-8.01	44.93	-9.44	Peak	---	---
3	195.87	38.35	43.50	-5.15	50.03	-11.68	Peak	---	---
4	324.88	32.99	46.00	-13.01	40.51	-7.52	Peak	---	---
5	373.38	35.96	46.00	-10.04	42.27	-6.31	Peak	---	---
6	445.16	38.41	46.00	-7.59	42.75	-4.34	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	7. ST M.2, PCIe Module with Dipole antenna (model: TWX-100BRSAX-2001)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Vertical									
Test By : Paul Lin			Temperature(°C): 25			Humidity(%): 66				
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m						cm	deg	
1	42.61	36.62	40.00	-3.38	44.96	-8.34	QP	100	134	
2	70.74	30.98	40.00	-9.02	42.30	-11.32	Peak	---	---	
3	127.00	36.85	43.50	-6.65	47.55	-10.70	Peak	---	---	
4	191.99	34.98	43.50	-8.52	46.48	-11.50	Peak	---	---	
5	388.90	35.82	46.00	-10.18	41.63	-5.81	Peak	---	---	
6	443.22	37.28	46.00	-8.72	41.66	-4.38	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										




Configuration	7. ST M.2, PCIe Module with Dipole antenna (model: TWX-100BRSAX-2001)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Horizontal									
Test By : Paul Lin			Temperature(°C): 25			Humidity(%): 66				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit, starting at 40 dBuV/m from 30 MHz to 100 MHz, rising to 45 dBuV/m at 100 MHz, and then to 55 dBuV/m at 1000 MHz. Six blue vertical lines represent emission peaks, labeled 1 through 6, with their respective frequencies and levels indicated in the table below.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	73.65	31.74	40.00	-8.26	43.85	-12.11	Peak	---	---	
2	136.70	34.54	43.50	-8.96	44.30	-9.76	Peak	---	---	
3	195.87	38.35	43.50	-5.15	50.03	-11.68	Peak	---	---	
4	322.94	32.19	46.00	-13.81	39.71	-7.52	Peak	---	---	
5	385.02	34.84	46.00	-11.16	40.75	-5.91	Peak	---	---	
6	444.19	37.43	46.00	-8.57	41.79	-4.36	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	7. ST M.2, PCIe Module with Dipole antenna (model: TWX-100BRSAX-2001)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

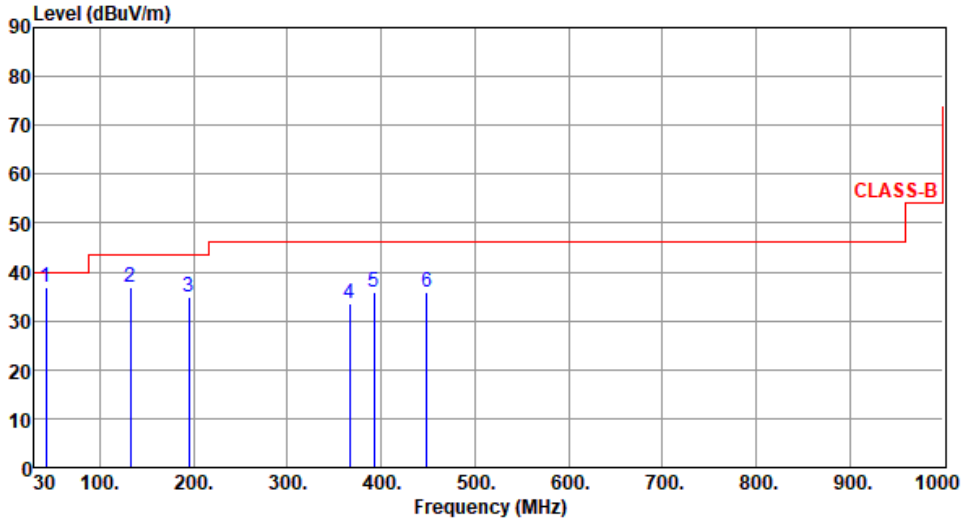

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.59	36.72	40.00	-3.28	45.06	-8.34	QP	100	132
2	132.82	36.76	43.50	-6.74	46.90	-10.14	Peak	---	---
3	195.19	35.01	43.50	-8.49	46.69	-11.68	Peak	---	---
4	366.59	33.55	46.00	-12.45	40.17	-6.62	Peak	---	---
5	392.78	35.91	46.00	-10.09	41.63	-5.72	Peak	---	---
6	449.04	35.82	46.00	-10.18	40.06	-4.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	8. ST M.2, PCIe Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

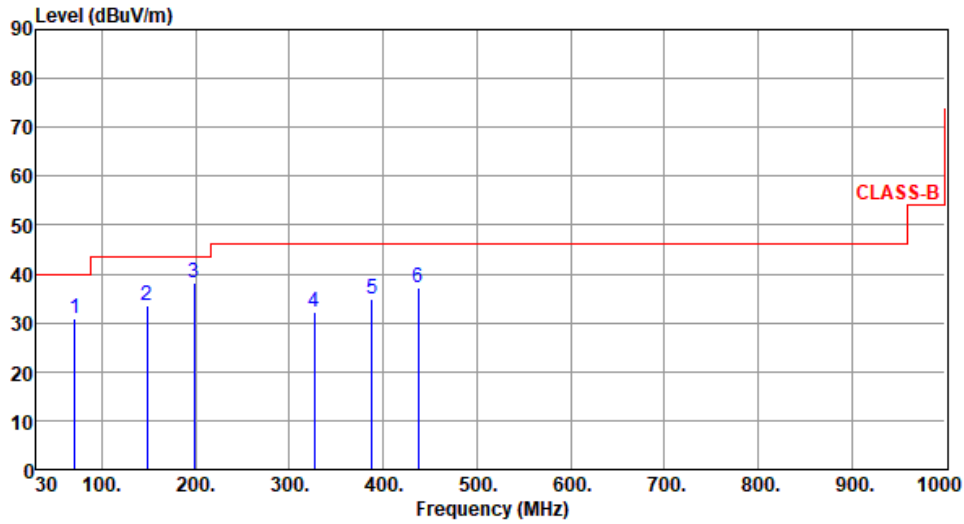

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	70.74	30.79	40.00	-9.21	42.11	-11.32	Peak	---	---
2	148.34	33.69	43.50	-9.81	42.65	-8.96	Peak	---	---
3	198.78	38.24	43.50	-5.26	50.01	-11.77	Peak	---	---
4	326.82	32.30	46.00	-13.70	39.77	-7.47	Peak	---	---
5	387.93	34.85	46.00	-11.15	40.68	-5.83	Peak	---	---
6	437.40	37.21	46.00	-8.79	41.72	-4.51	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	8. ST M.2, PCIe Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

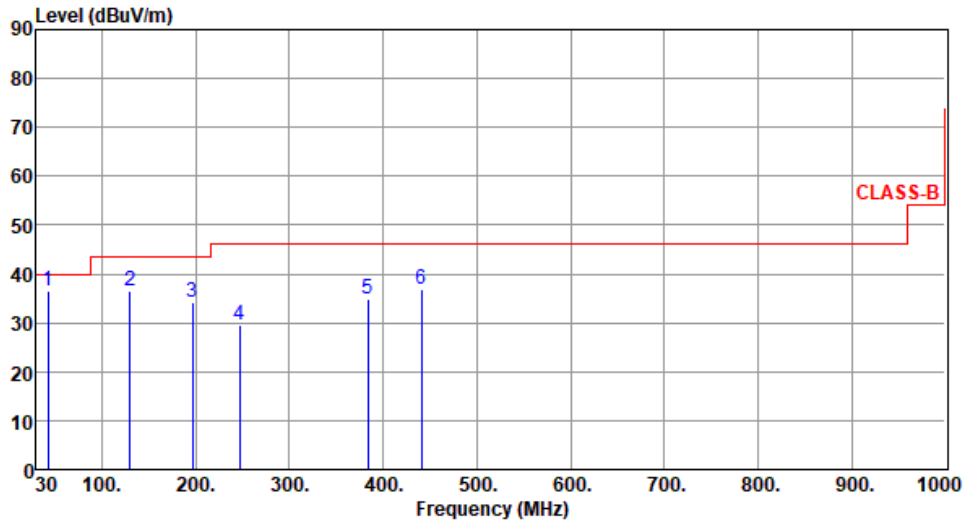

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.61	36.57	40.00	-3.43	44.91	-8.34	QP	100	136
2	129.91	36.58	43.50	-6.92	46.90	-10.32	Peak	---	---
3	196.84	34.13	43.50	-9.37	45.98	-11.85	Peak	---	---
4	247.28	29.65	46.00	-16.35	39.77	-10.12	Peak	---	---
5	384.05	34.90	46.00	-11.10	40.83	-5.93	Peak	---	---
6	441.28	36.78	46.00	-9.22	41.19	-4.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	8. ST M.2, PCIe Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

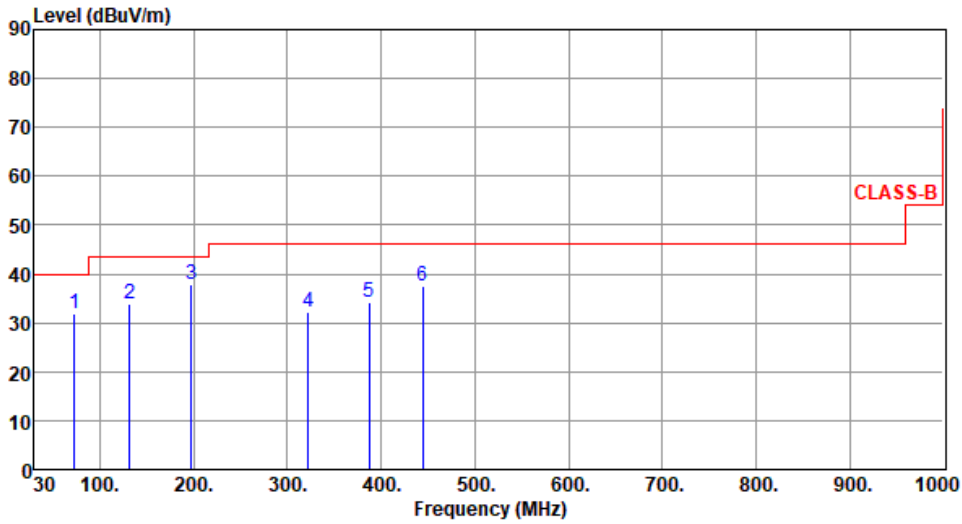

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	72.68	31.88	40.00	-8.12	43.66	-11.78	Peak	---	---
2	131.85	33.79	43.50	-9.71	44.06	-10.27	Peak	---	---
3	197.81	37.97	43.50	-5.53	49.76	-11.79	Peak	---	---
4	321.97	32.36	46.00	-13.64	39.88	-7.52	Peak	---	---
5	386.96	34.21	46.00	-11.79	40.07	-5.86	Peak	---	---
6	444.19	37.43	46.00	-8.57	41.79	-4.36	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	8. ST M.2, PCIe Module with PCB Dipole antenna (model: Mini NanoBlade Flex 6 GHz)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Vertical

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

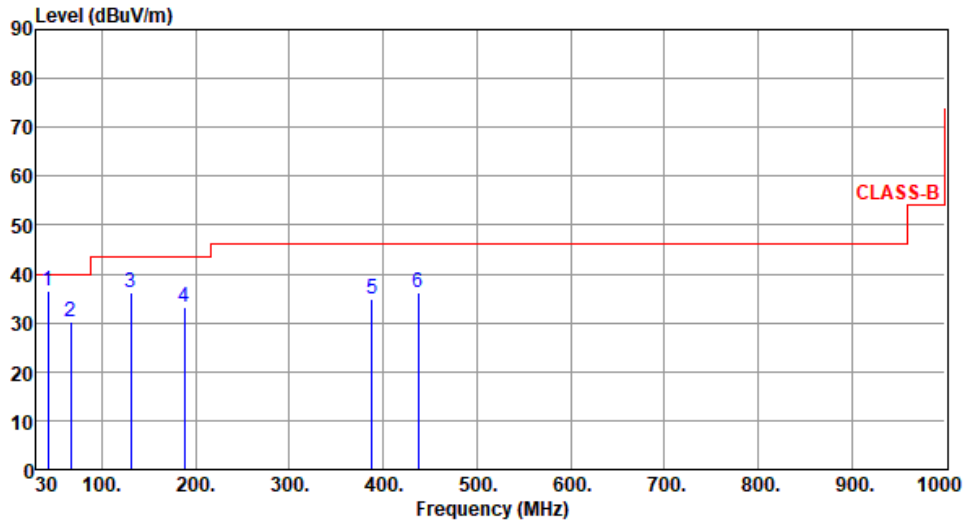

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	42.41	36.48	40.00	-3.52	44.91	-8.43	QP	100	137
2	66.86	30.19	40.00	-9.81	40.81	-10.62	Peak	---	---
3	130.88	36.36	43.50	-7.14	46.47	-10.11	Peak	---	---
4	188.11	33.25	43.50	-10.25	44.59	-11.34	Peak	---	---
5	387.93	34.79	46.00	-11.21	40.62	-5.83	Peak	---	---
6	437.40	36.36	46.00	-9.64	40.87	-4.51	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	9. ST M.2, PCIe Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz									
Polarization	Horizontal									
Test By : Paul Lin			Temperature(°C): 25			Humidity(%): 66				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six blue vertical lines indicate measured peaks at frequencies 72.68, 133.79, 194.90, 324.95, 387.93, and 446.13 MHz. The emission levels are 31.88, 33.92, 37.16, 32.46, 34.85, and 37.20 dBuV/m respectively. All peaks are below the CLASS-B limit.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m			dBuV			cm	deg	
1	72.68	31.88	40.00	-8.12	43.66	-11.78	Peak	---	---	
2	133.79	33.92	43.50	-9.58	43.86	-9.94	Peak	---	---	
3	194.90	37.16	43.50	-6.34	48.84	-11.68	Peak	---	---	
4	324.95	32.46	46.00	-13.54	39.98	-7.52	Peak	---	---	
5	387.93	34.85	46.00	-11.15	40.68	-5.83	Peak	---	---	
6	446.13	37.20	46.00	-8.80	41.51	-4.31	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										



Configuration	9. ST M.2, PCIe Module with PIFA antenna (model: FlexPIFA 6E)								
Mode	1. BLE 2Mbps 2440MHz + 5G 11ax HE20 5745MHz								
Polarization	Vertical								
<p>Test By :Paul Lin Temperature(°C):25 Humidity(%):66</p>									
<p>The graph displays the emission level in dBuV/m across a frequency range from 30 MHz to 1000 MHz. A red line represents the CLASS-B limit, which is constant at 40 dBuV/m from 30 MHz to 100 MHz, then steps up to 45 dBuV/m from 100 MHz to 1000 MHz. Six blue vertical lines indicate measured peaks at the following frequencies: 42.58 MHz, 134.76 MHz, 194.55 MHz, 328.76 MHz, 390.84 MHz, and 449.04 MHz. The emission levels for these peaks are 36.37, 35.76, 34.76, 30.51, 34.97, and 35.82 dBuV/m, respectively.</p>									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m						cm	deg
1	42.58	36.37	40.00	-3.63	44.72	-8.35	QP	100	136
2	134.76	35.76	43.50	-7.74	45.65	-9.89	Peak	---	---
3	194.55	34.76	43.50	-8.74	46.44	-11.68	Peak	---	---
4	328.76	30.51	46.00	-15.49	37.94	-7.43	Peak	---	---
5	390.84	34.97	46.00	-11.03	40.73	-5.76	Peak	---	---
6	449.04	35.82	46.00	-10.18	40.06	-4.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	9. ST M.2, PCIe Module with PIFA antenna (model: FlexPIFA 6E)
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz
Polarization	Horizontal

Test By :Paul Lin Temperature(°C):25 Humidity(%):66

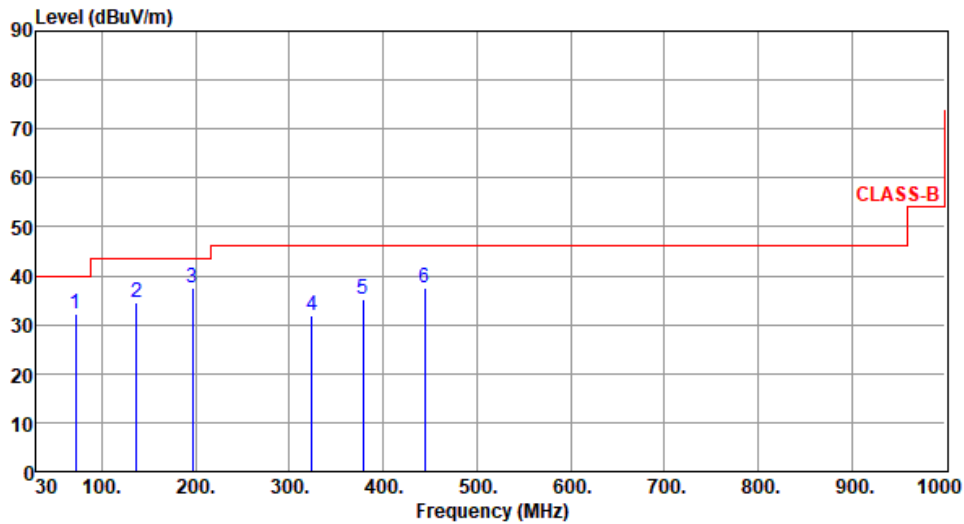

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	71.86	32.16	40.00	-7.84	43.64	-11.48	Peak	---	---
2	136.78	34.69	43.50	-8.81	44.46	-9.77	Peak	---	---
3	196.84	37.66	43.50	-5.84	49.51	-11.85	Peak	---	---
4	323.91	32.01	46.00	-13.99	39.53	-7.52	Peak	---	---
5	378.23	35.19	46.00	-10.81	41.30	-6.11	Peak	---	---
6	444.19	37.43	46.00	-8.57	41.79	-4.36	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration	9. ST M.2, PCIe Module with PIFA antenna (model: FlexPIFA 6E)									
Mode	2. BLE 2Mbps 2440MHz + 6G 11ax HE80 6385MHz									
Polarization	Vertical									
Test By : Paul Lin			Temperature(°C): 25			Humidity(%): 66				
<p>The spectrum plot displays emission levels in dBuV/m across a frequency range from 30 MHz to 500 MHz. A red step function represents the CLASS-B emission limit. Six peaks are identified and numbered 1 through 6. Peak 1 is at 42.54 MHz, peak 2 at 71.71 MHz, peak 3 at 126.03 MHz, peak 4 at 194.90 MHz, peak 5 at 383.08 MHz, and peak 6 at 436.43 MHz. The CLASS-B limit is 40 dBuV/m from 30 MHz to 100 MHz, 43.5 dBuV/m from 100 MHz to 220 MHz, and 46 dBuV/m from 220 MHz to 500 MHz.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m						cm	deg	
1	42.54	36.75	40.00	-3.25	45.11	-8.36	QP	100	137	
2	71.71	29.88	40.00	-10.12	41.33	-11.45	Peak	---	---	
3	126.03	35.75	43.50	-7.75	46.35	-10.60	Peak	---	---	
4	194.90	34.82	43.50	-8.68	46.50	-11.68	Peak	---	---	
5	383.08	34.57	46.00	-11.43	40.52	-5.95	Peak	---	---	
6	436.43	36.27	46.00	-9.73	40.80	-4.53	Peak	---	---	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>										