

In 2020 the FCC announced the allocation of a new frequency spectrum for Wi-Fi applications, extending the frequencies up to 7125 MHz.

FlexPIFA 6E antennas support the full Wi-Fi spectrum of 2400-2500, 4900-5925, and 5925-7125 MHz frequency bands. This makes them an ideal solution for coverage of traditional Wi-Fi frequencies with the addition of futureproofing for newly emerging Wi-Fi 6E applications.

Designed for rapid integration into space-constrained devices and housings, the flexible, adhesive-backed antennas are available with MHF1 or MHF4L connectors, providing multiple installation solutions for IoT device manufacturers.

PIFA antenna technology provides consistent, stable performance across all three Wi-Fi bands, ensuring a solid and reliable connection at all times.

## 1 Features and Benefits

- **Full Coverage** – Operates over all three Wi-Fi bands
- **Performance** – Exceptional performance across all bands
- **Versatile** – Flexible, peel-and-stick adhesive-backed antenna for a variety of space-constrained IoT devices
- **Future-Proofed** – Coverage for emerging Wi-Fi 6E applications
- **Reliable** – PIFA technology is easy to integrate into IoT devices and less likely to detune in proximity of metal or a human body
- **Quality** – Designed and built to exacting specifications

## 2 Applications

- Smart metering and utilities
- Industrial IoT
- Agricultural and rural (Farm sense and control)
- Quick service restaurants
- Smart lockers
- Medical devices

### ELECTRICAL SPECIFICATIONS

Number of Ports	1		
Operating Frequency (MHz)	2400-2500	4900-5925	5925-7125
VSWR – Avg	1.4:1	1.9:1	1.6:1
VSWR – Max	<2.5:1	<3.0:1	<3.0:1
Peak Gain – (dBi) *	2.2	3.9	3.8
Efficiency – Avg (%)	59	60	60
Efficiency – Avg (dB)	-2.3	-2.2	-2.2
Nominal Impedance (ohms)	50		
Max Power - Ambient 25°C (W)	5		
Polarization	Linear		
Azimuth Beamwidth	360°, Omnidirectional		

**Note:** Measured on a 100 mm x 100 mm x 1.7 mm thick polycarbonate sheet.

\* Actual peak gain values can be influenced by measurement variation and other uncertainties.

### MECHANICAL SPECIFICATIONS

Dimensions – length x width x height – mm (inches)	16 x 36 x 2.5 (0.62 x 1.41 x .098)
Weight – g (oz.)	0.6
Adhesive	3M 467MP


### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Storage Temperature – °C (°F)	-40 to +85°C (-40 to +185°F)
Material Substance Compliance	RoHS


## 3 Configuration

PART NUMBER	EXPOSED CABLE LENGTH/DIAMETER	CONNECTOR
EFB2471A3S-10MHF1	100 mm/1.13 mm	MHF1
EFB2471A3S-10MH4L	100 mm/1.13 mm	MHF4L


## 4 Mechanical Drawing

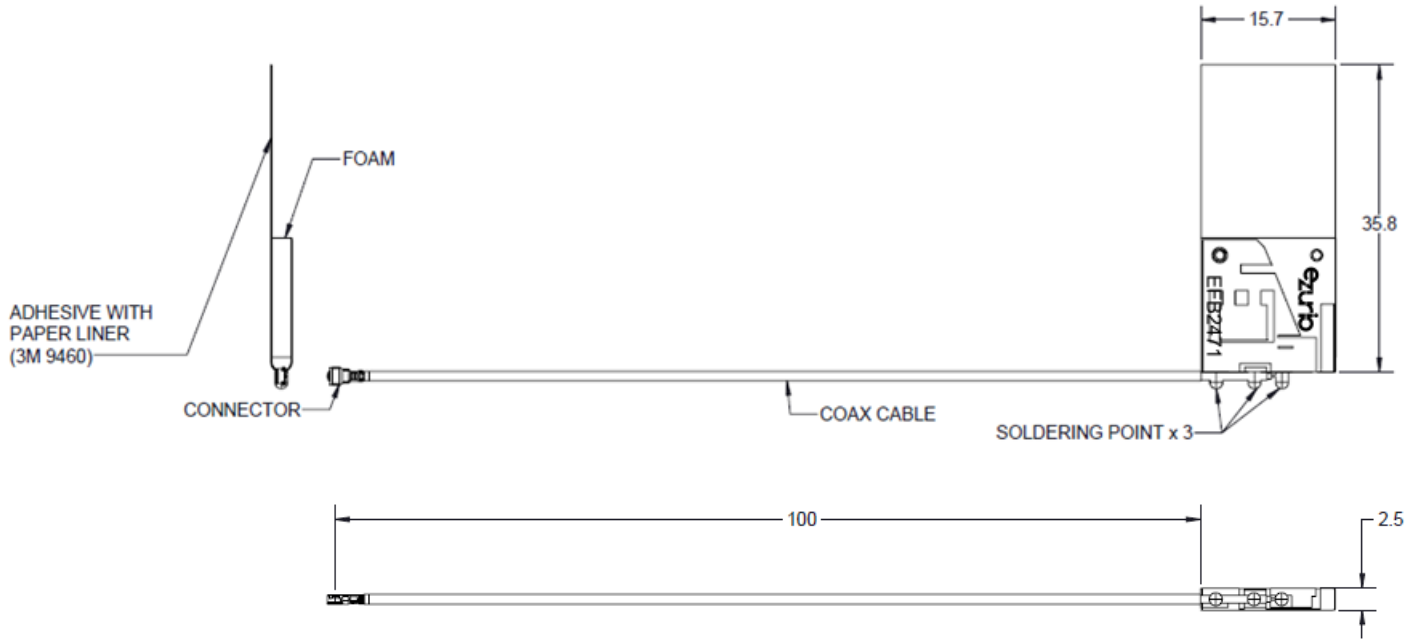


VSWR

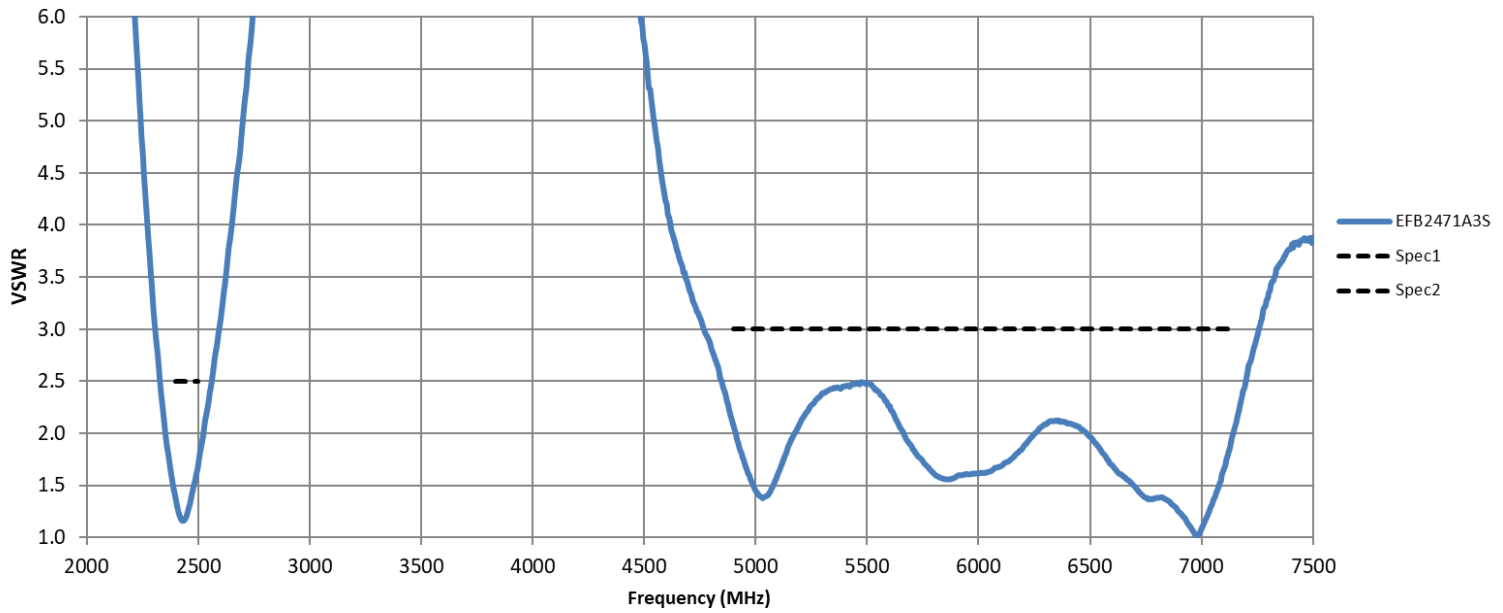


TOTAL EFFICIENCY

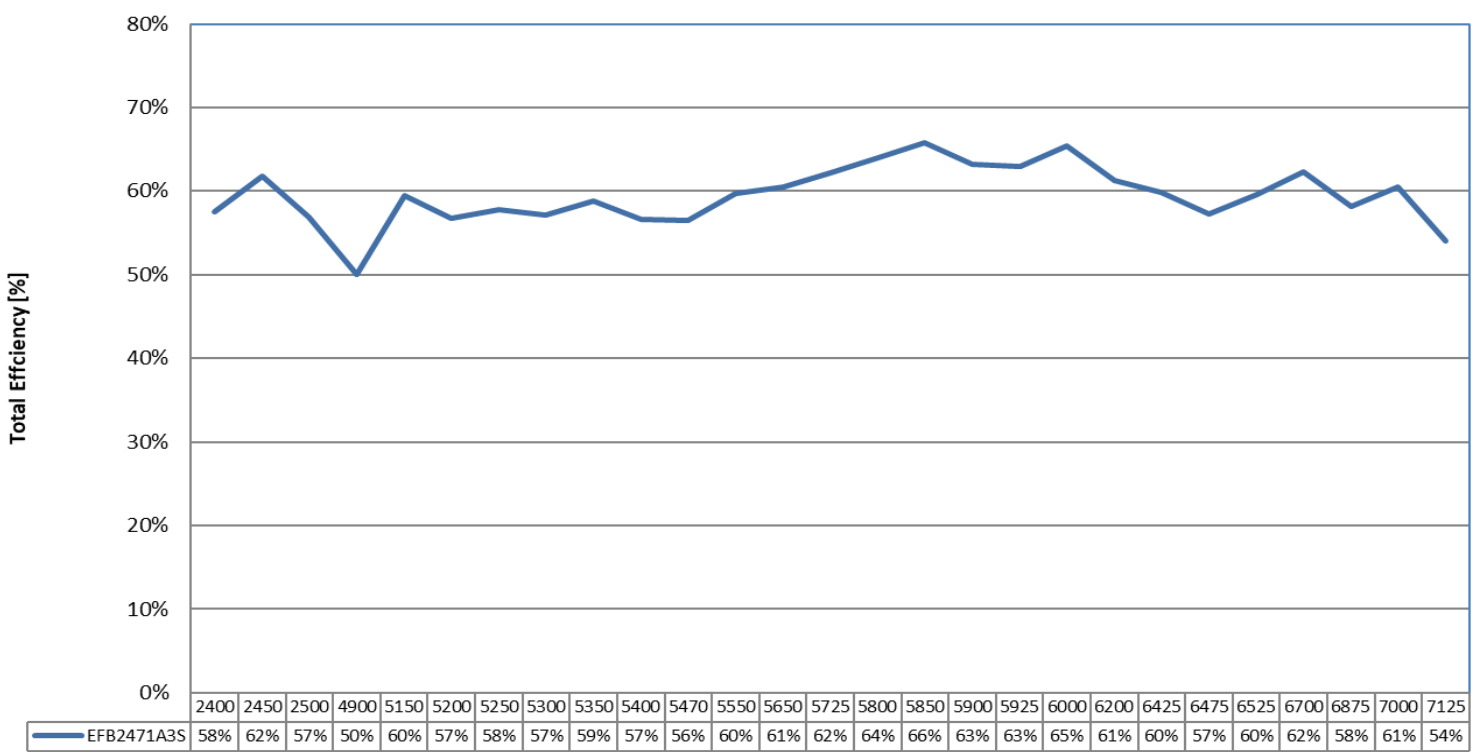




RADIATION PATTERNS

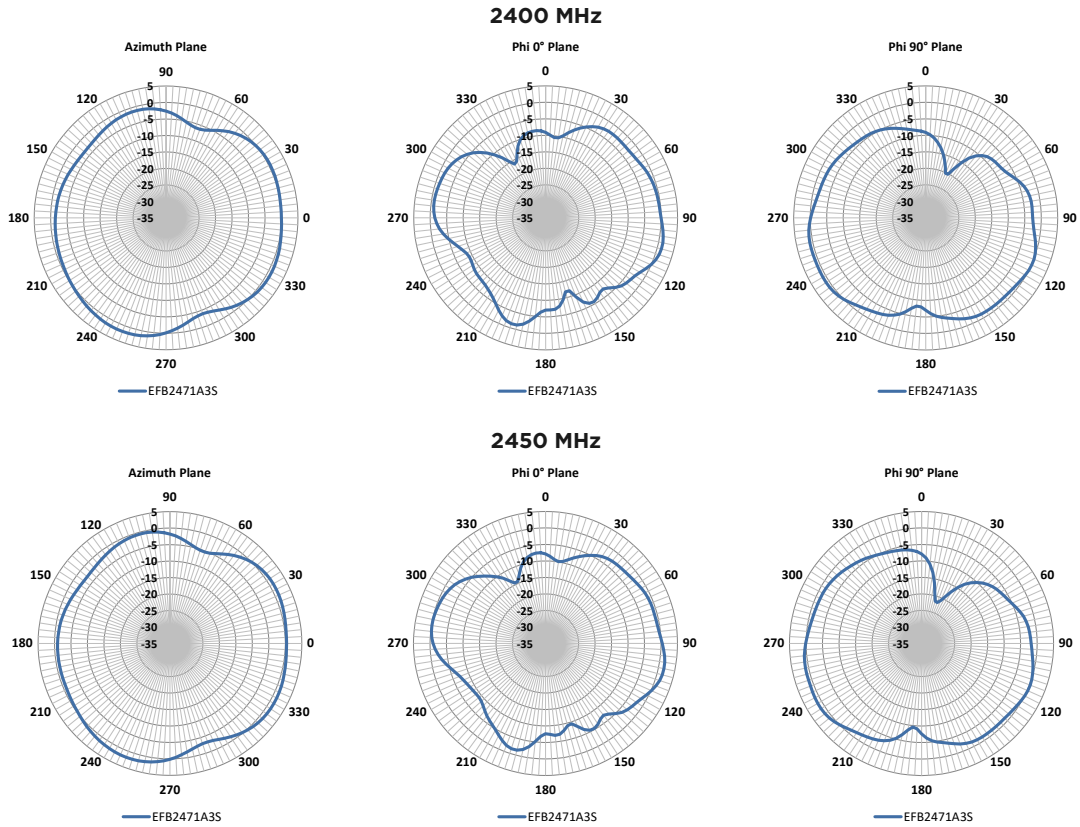




5 Radiation Patterns

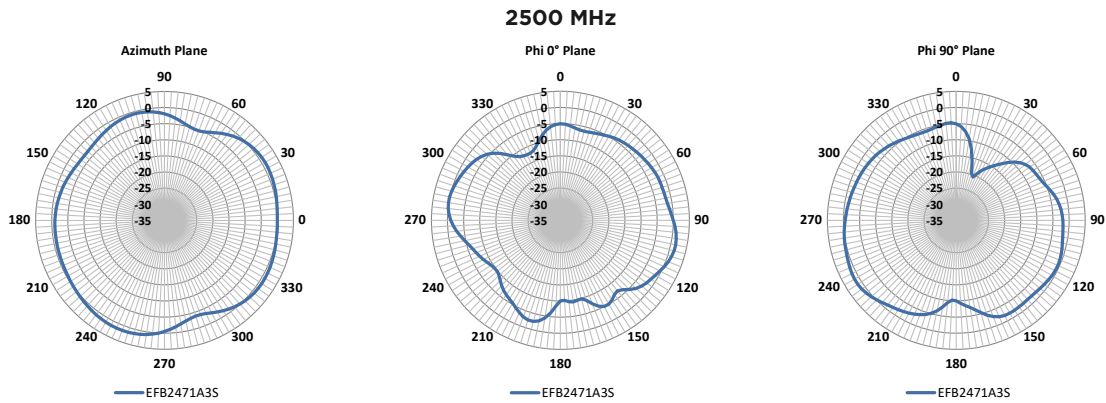




**4900 MHz**

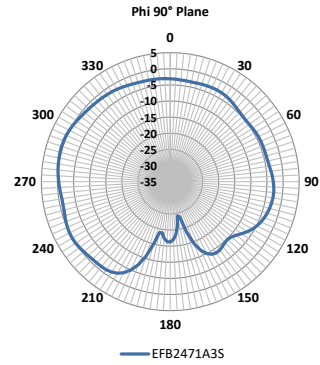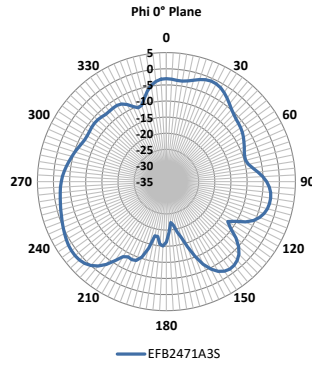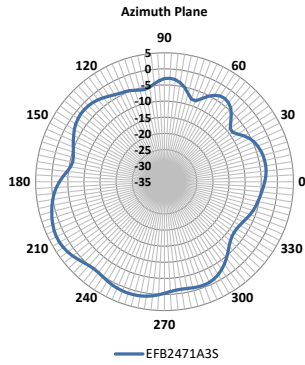




**5150 MHz**

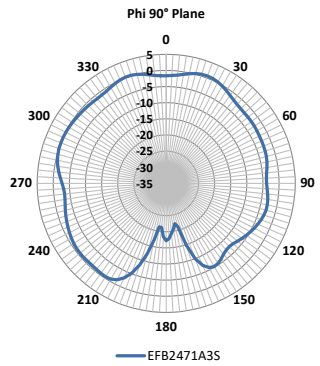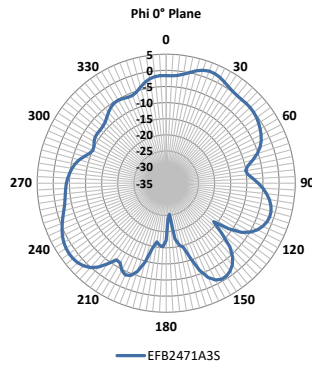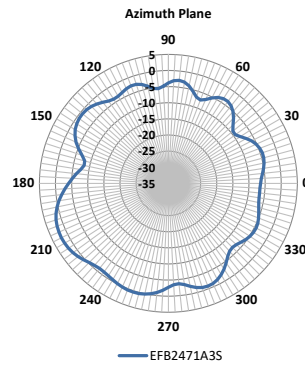




**5470 MHz**

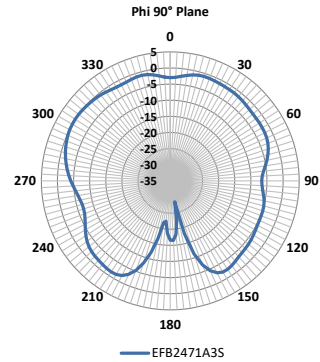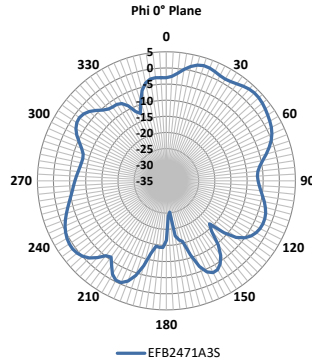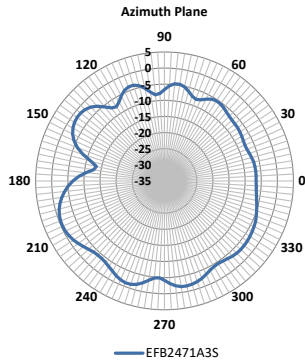




**5500 MHz**

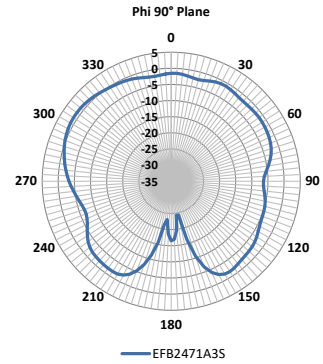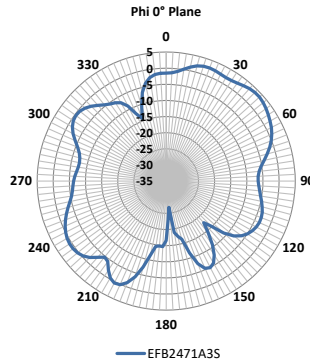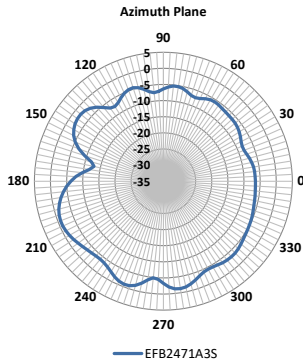




**5850 MHz**

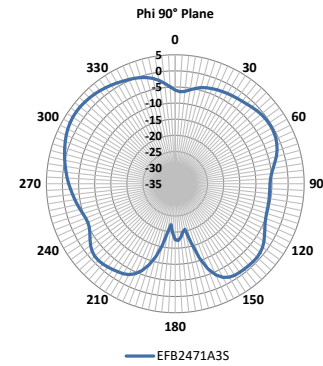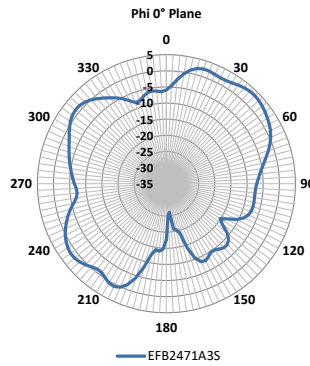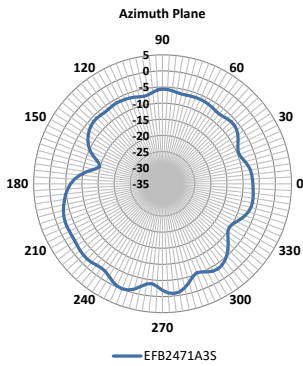

**5925 MHz**

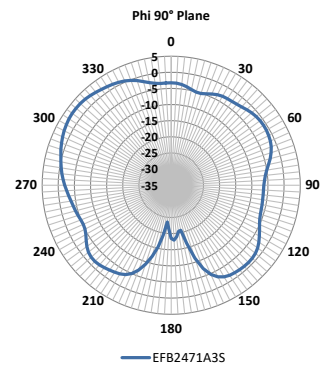
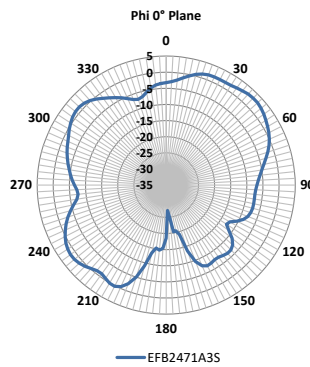
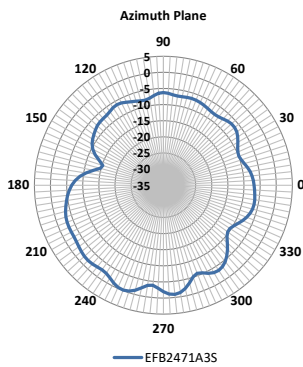


**6425 MHz**

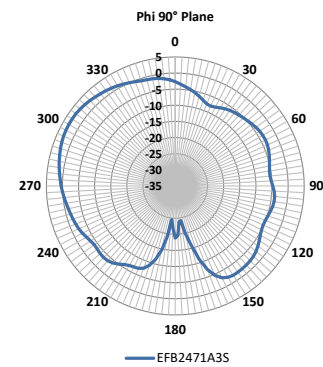
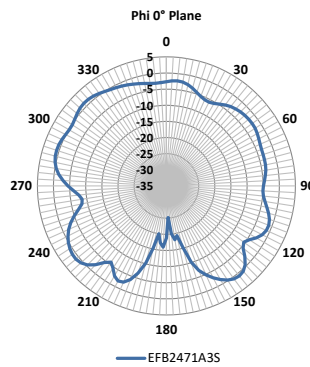
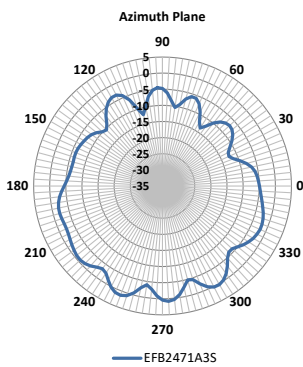







**6525 MHz**

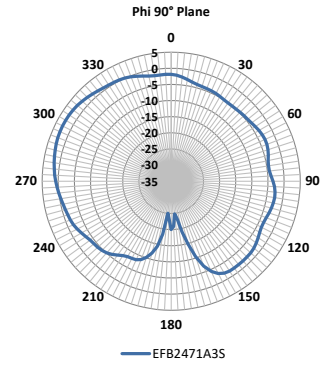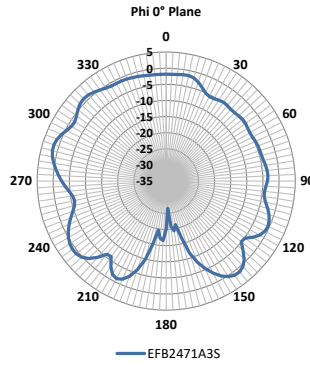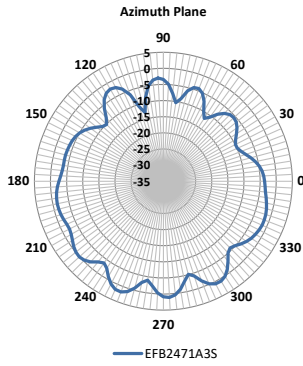

**6875 MHz**

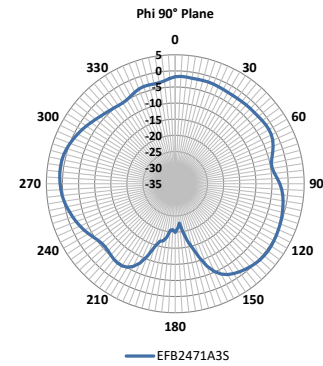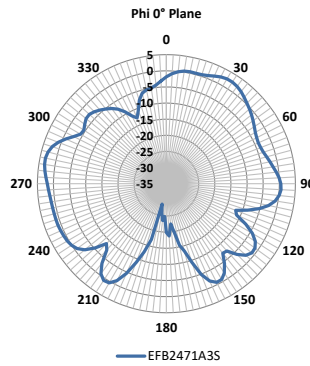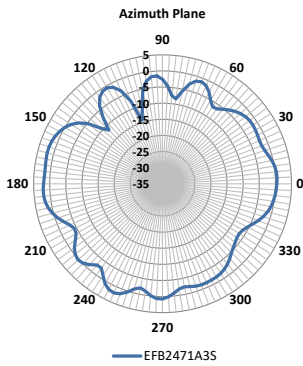


**7125 MHz**

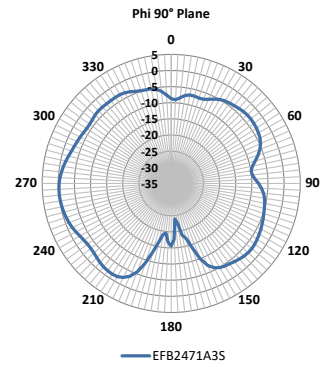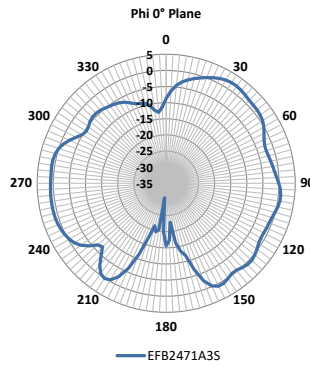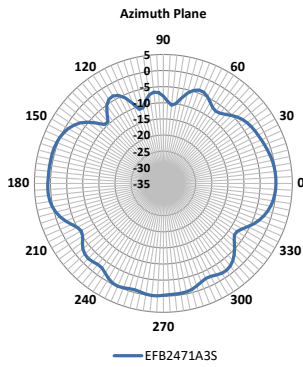

## 6 Packaging Information


### Carton Layout

#### Unit Carton

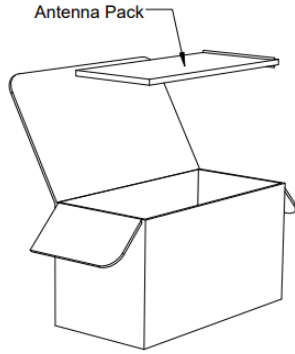

- Dimensions: 245 mm x 120 mm x 135 mm
- Weight: 0.22 kg
- Zipper bag 152 mm x 229 mm (10 antennas per bag)
- 20x zipper bags per carton (200 antennas total)


#### Master Carton

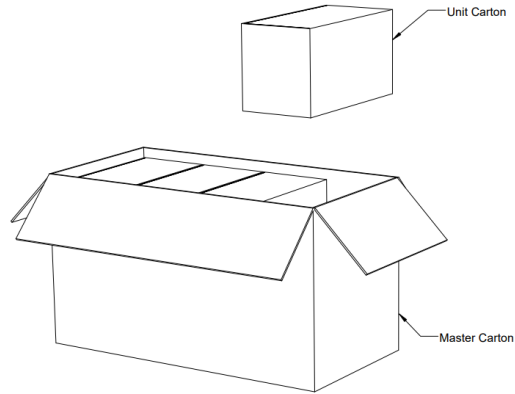

- Dimensions: 520 mm x 260 mm x 295 mm
- Weight: 2.4 kg
- Total of 8-unit cartons per master carton
- Total of 1600 antennas per master carton


### Pallet Layout

#### Ocean Shipping Pallet

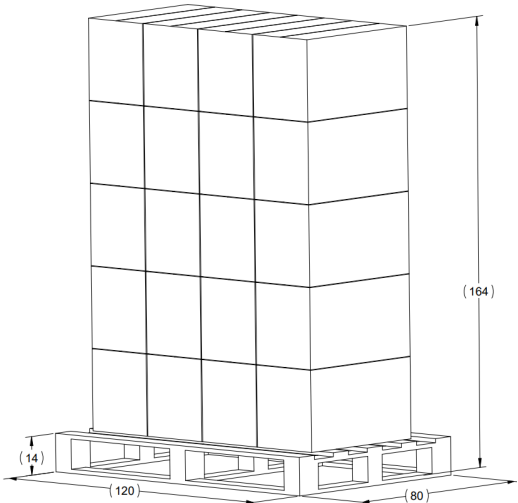

- Pallet base dimensions: 120 cm x 80 cm x 14 cm
- Full loaded dimensions: 120 cm x 80 cm x 164 cm
- 20 master cartons (4 x 5 layout), 60 kg total
- 32000 antennas per pallet

#### Air Shipping Pallet

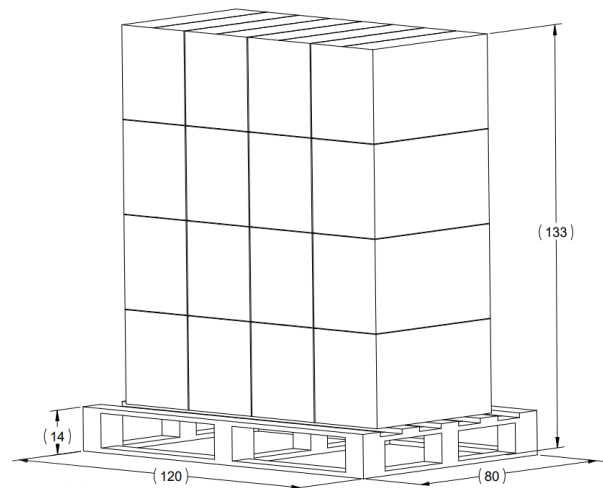

- Pallet base dimensions: 120 cm x 80 cm x 14 cm
- Full loaded dimensions: 120 cm x 80 cm x 133 cm
- 16 master cartons (4 x 4 layout), 50.4 kg total
- 25600 antennas per pallet



## 7 Additional Information

Please contact your local sales representative or our support team for further assistance:

<b>Headquarters</b>	Ezurio 50 S. Main St. Suite 1100 Akron, OH 44308 USA
<b>Phone</b>	Americas: +1-800-492-2320 Europe: +44-1628-858-940 Hong Kong: +852-2762-4823
<b>Website</b>	<a href="http://www.ezurio.com">http://www.ezurio.com</a>
<b>Technical Support</b>	<a href="http://www.ezurio.com/resources/support">http://www.ezurio.com/resources/support</a>
<b>Sales Contact</b>	<a href="http://www.ezurio.com/contact">http://www.ezurio.com/contact</a>

**Note:** Information contained in this document is subject to change.