



Nemko Test Report: 4077RUS1rev1

Applicant: STEMCO LP
300 Industrial Blvd.
Longview, TX 75604
USA

**Equipment Under Test:
(E.U.T.)** 8200000

In Accordance With: **FCC Part 15, Subpart C, 15.247**
Digital Transmission System Transmitter

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, Texas 75057-3136

TESTED BY:

David Light, Senior Wireless Engineer

DATE:

08 May 2007

APPROVED BY:

Harry Ward, Verificator

DATE:

8th May 2007

Number of Pages: 35

Table of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	EQUIPMENT UNDER TEST (E.U.T.)	5
SECTION 3.	OCCUPIED BANDWIDTH	7
SECTION 5.	MAXIMUM PEAK OUTPUT POWER	12
SECTION 5.	SPURIOUS EMISSIONS	14
SECTION 6.	PEAK POWER SPECTRAL DENSITY	22
SECTION 7.	TEST EQUIPMENT LIST	25
ANNEX A -	TEST DETAILS	26
ANNEX B -	TEST DIAGRAMS	34

Section 1. Summary of Test Results

Manufacturer: STEMCO LP

Model No.: 8200000

Serial No.: None

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Digital Transmission Systems. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

New Submission

Production Unit

Class II Permissive Change

Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: 8200000**Summary Of Test Data**

NAME OF TEST	PARA. NO.	RESULT
Powerline Conducted Emissions	15.207(a)	NA
Minimum 6 dB Bandwidth	15.247(a)(2)	Complies
Maximum Peak Power Output	15.247(b)(3)	Complies
Spurious Emissions (Antenna Conducted)	15.247(d)	NA
Spurious Emissions (Radiated)	15.247(d)/15.209(a)	Complies
Peak Power Spectral Density	15.247(e)	Complies

Footnotes:

- 1) The device is Battery powered.
- 2) The device has an integral antenna

EQUIPMENT: 8200000

Section 2. Equipment Under Test (E.U.T.)

General Equipment Information

Frequency Band (MHz):	902-928	2400-2483.5	5725-5850
	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Operating Frequency of Test Sample: 2402 to 2479 MHz

Channel Spacing: 1 MHz


User Frequency Adjustment: Software controlled

EQUIPMENT: 8200000

Description of EUT

Handheld RF reader for monitoring tire air pressure sensors.

System Diagram

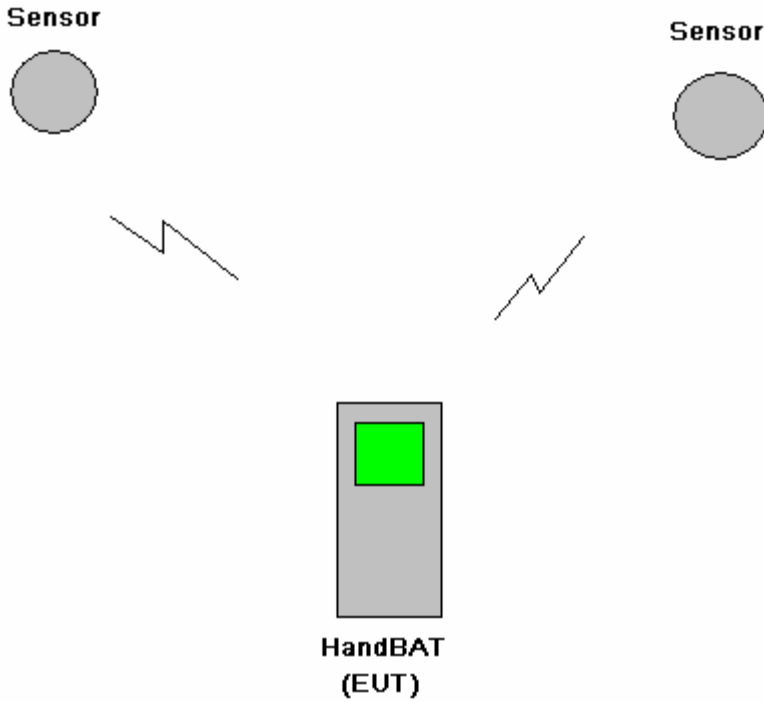

EQUIPMENT: 8200000

Section 3. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(2)
TESTED BY: David Light	DATE: 08 May 2007

Test Results: Complies.

Measurement Data: See 6 dB BW plot

Measured 6 dB bandwidth:

622 KHZ MAX

Channel Separation:

1 MHZ


Test Conditions: 23 %RH
45 °C

Measurement Uncertainty: +/-1x10⁻⁷ ppm

Test Equipment Used: 1036-1082-802

EQUIPMENT: 8200000

Test Data – Occupied Bandwidth

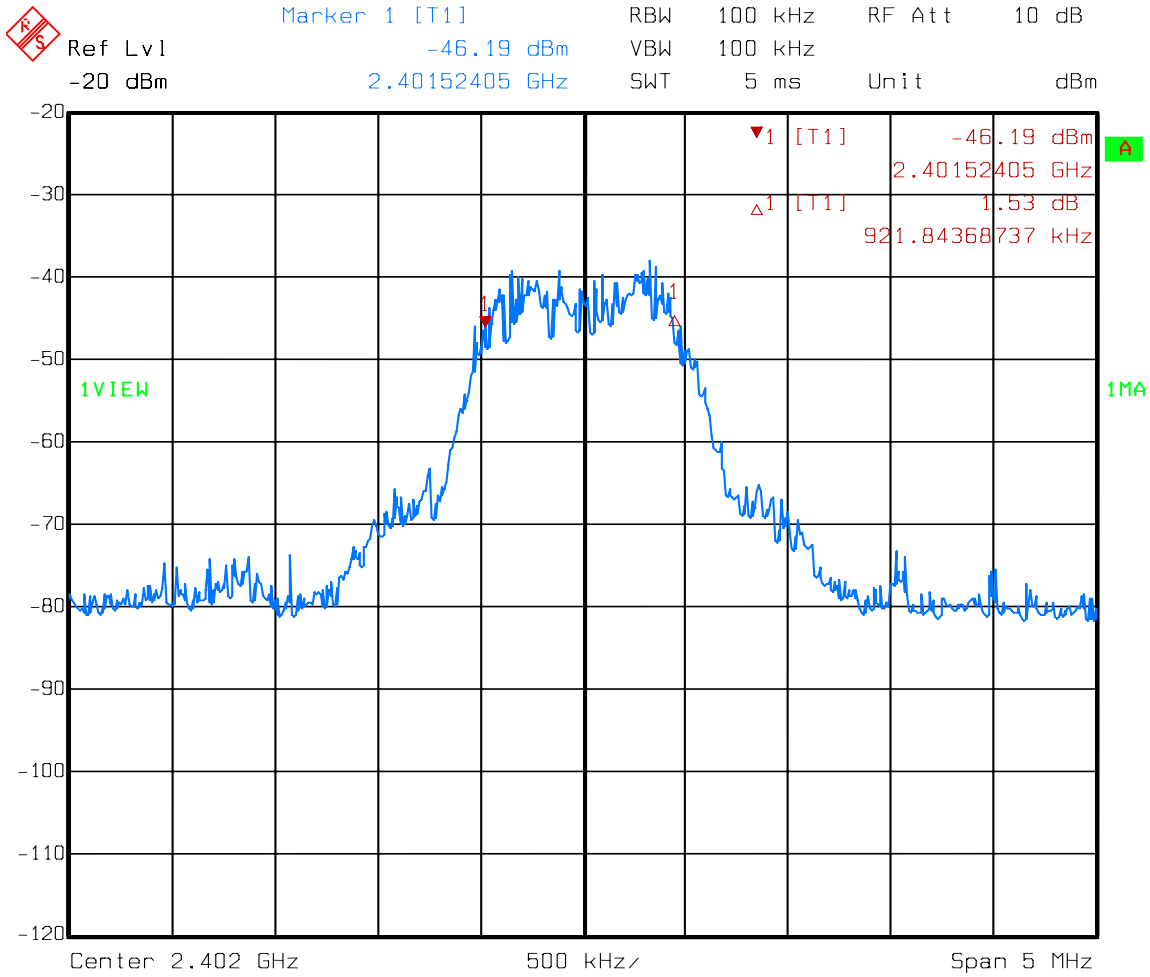


Date: 08.MAY 2007 13:57:30

EQUIPMENT: 8200000

Test Data – Occupied Bandwidth




Delta 1 [T1] RBW 100 kHz RF Att 10 dB
Ref Lvl 0.43 dB VBW 100 kHz
-20 dBm 871.74348697 kHz SWT 5 ms Unit dBm

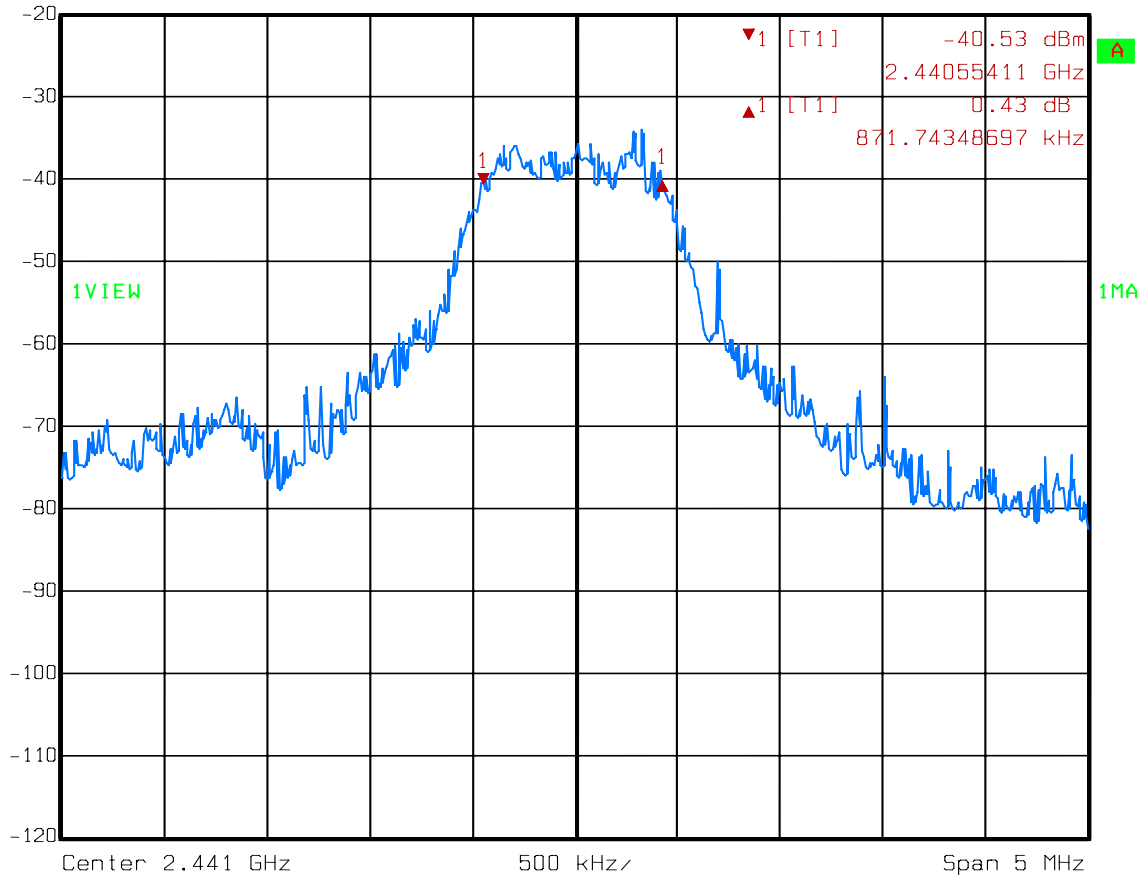

Date: 08.MAY 2007 13:58:50

EQUIPMENT: 8200000


Test Data – Occupied Bandwidth

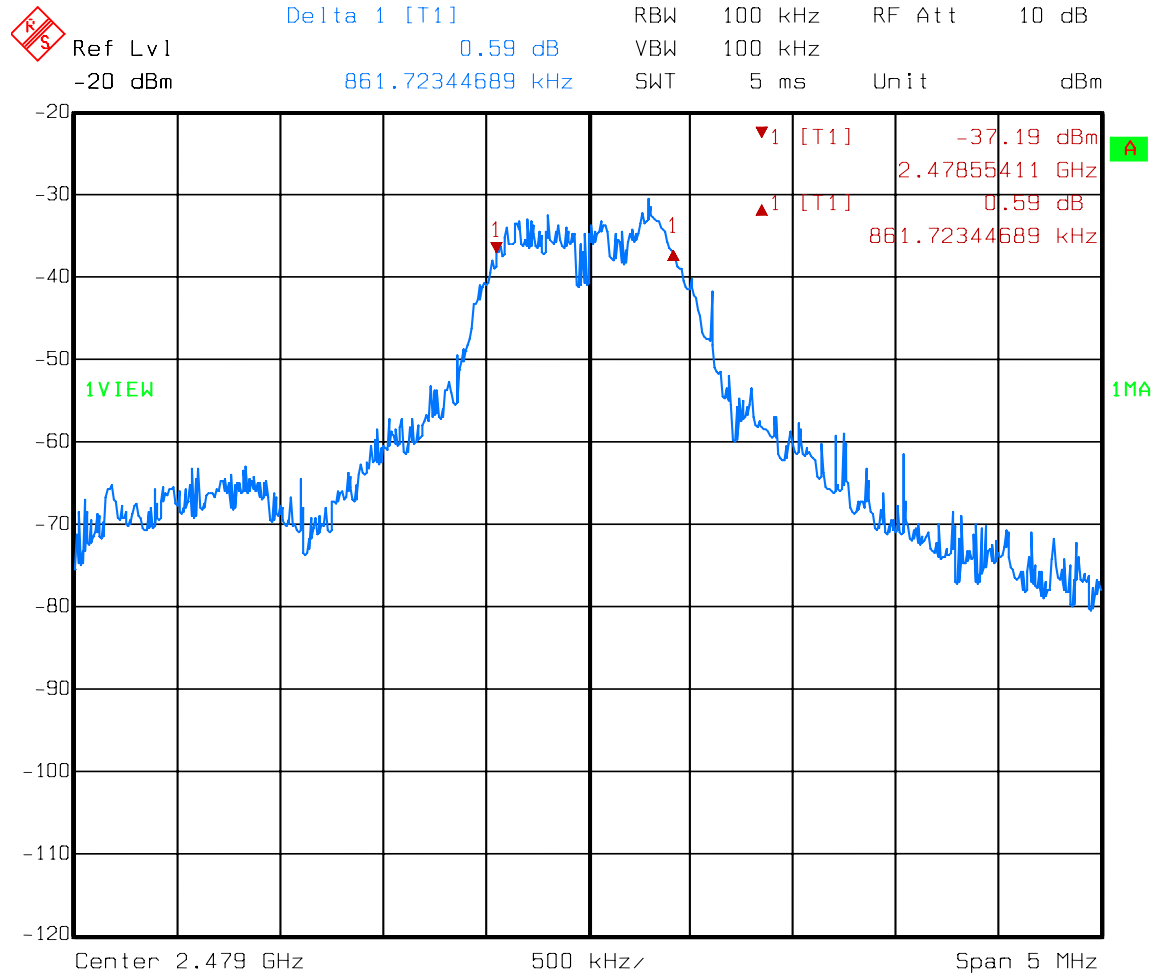


Date: 08.MAY 2007 14:00:10

Test Data – Occupied Bandwidth

20 dB Bandwidth for Emission Designator

 Ref Lvl -20 dBm Delta 1 [T1] -0.25 dB RBW 100 kHz RF Att 10 dB
1.35270541 MHz SWT 5 ms VBW 100 kHz Unit dBm

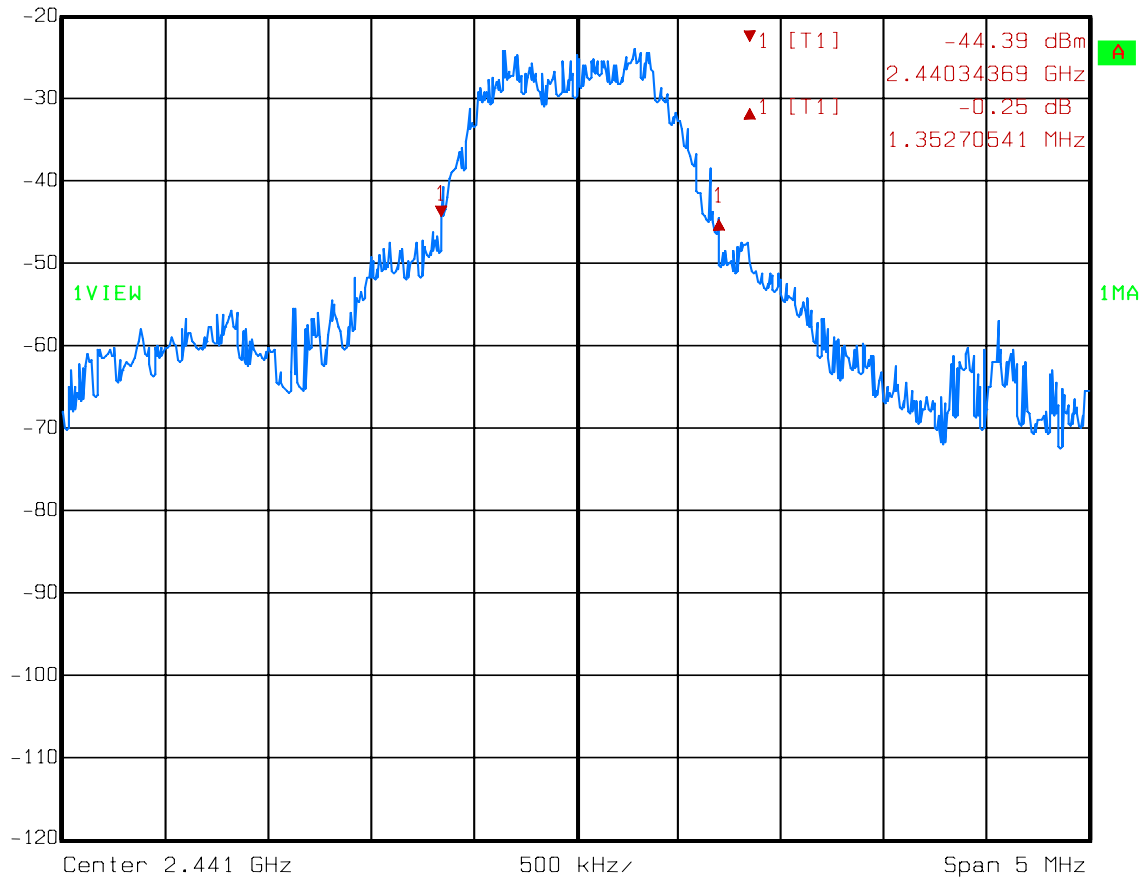

Date: 08.MAY 2007 14:01:36

Section 5. Maximum Peak Output Power

NAME OF TEST: Maximum Peak Output power	PARA. NO.: 15.247(b)(3)
TESTED BY: David Light	DATE: 08 May 2007

Test Results: Complies.

Measurement Data: Refer to attached data

Test Conditions: 23 %RH
45 °C

Measurement Uncertainty: +/-1.7 dB

Test Equipment Used: 1464-1484-1485-1016-993

- This device was tested at +/- 15% input power per 15.31(e), with no variation in output power.
- For battery powered equipment, the device was tested with a fresh battery per 15.31(e).
- The device was tested on three channels per 15.31(l).
- [This test was performed radiated.](#)
- For handheld devices, the EUT was tested on three orthogonal axis'

EQUIPMENT: 8200000

Test Data – Peak Power

Frequency (MHz)	Meter Reading (dBm)	Substitution Level (dBm)	Pre-Amp Gain (dB)	Substitution Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2402.0	-19.2	-15.2	32.8	7.8	-7.4	36.0	-43.4
2441.0	-14.0	-10.0	32.8	7.8	-2.2	36.0	-38.2
2479.0	-15.8	-11.8	32.8	7.8	-4.0	36.0	-40.0
Notes: _____							

RBW = VBW = 1 MHz
 Peak detector

Maximum Antenna Gain = 3 dBi

Maximum Peak Conducted Power (Calculated) = -5.2 dBm (0.3 mW)

EQUIPMENT: 8200000

Section 5. Spurious Emissions

NAME OF TEST: Radiated Emissions	PARA. NO.: 15.247 (d)
TESTED BY:	DATE:

Test Results: Complies.

Measurement Data: See attached table.

Test Conditions: 23 %RH
45 °C

Measurement Uncertainty: +/-3.6 dB

Test Equipment Used: 1464-1484-1485-993-759-760-1016-791

Notes:

- For handheld devices, the EUT was tested on three orthogonal axis'
- The device was tested from 30 MHz to the tenth harmonic of the highest fundamental frequency per 15.33
- The device was tested on three channels per 15.31(l).
- No emissions were detected within 20 dB of the specification limit therefore none are reported per 15.31(o). Band edge data is presented below.

RBW=VBW=100 kHz below 1000 MHz
RBW=VBW=1 MHz above 1000 MHz (Peak)
RBW= 1 MHz VBW=kHz (Average)


All measurements made with PEAK detector. Duty cycle correction was made for average measurements.

EQUIPMENT: 8200000

Radiated Emissions

Pulse Width = 1.402806 mS

Ref Lvl -20 dBm
Marker 1 [T1] -36.85 dBm
0.000000 s
RBW 100 kHz RF Att 10 dB
VBW 100 kHz
SWT 10 ms Unit dBm

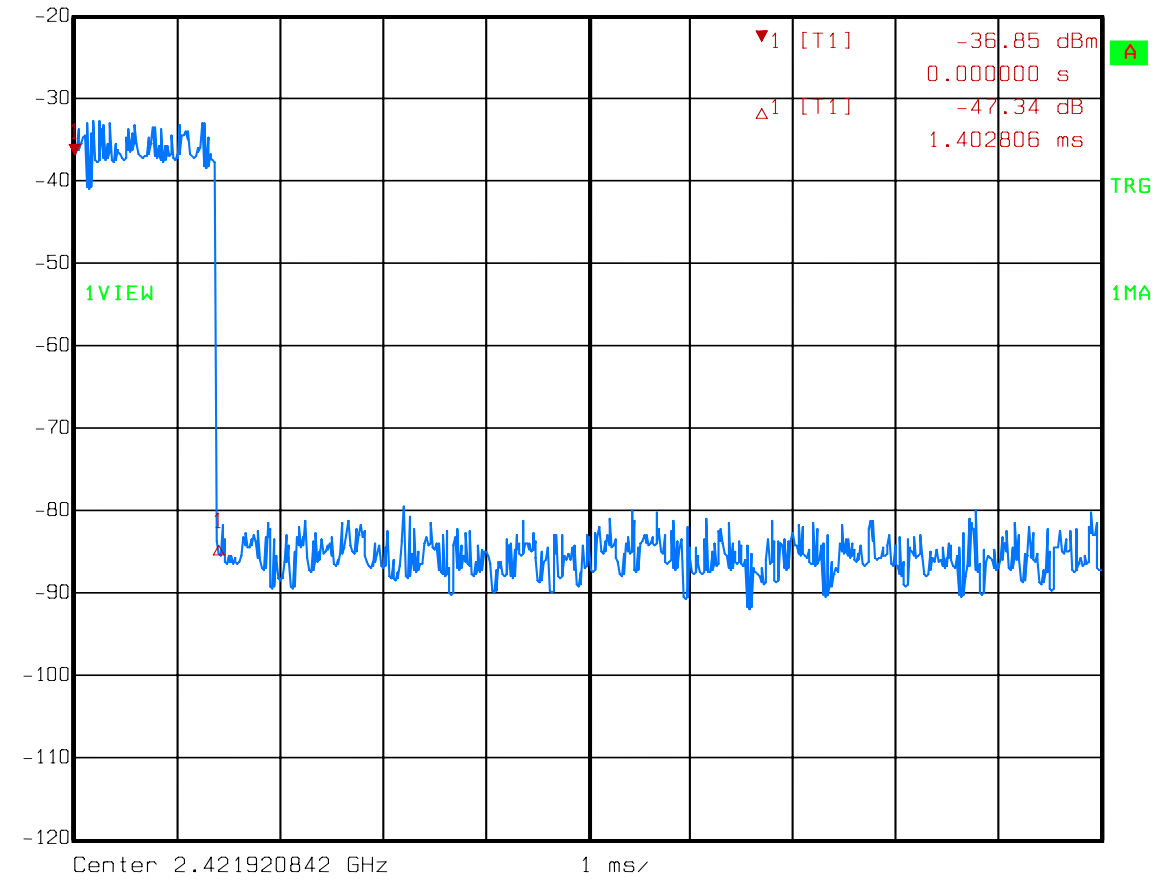

Date: 08.MAY 2007 08:24:21

EQUIPMENT: 8200000


Radiated Emissions

ON Time



Ref Lvl
-20 dBm

RBW 100 kHz RF Att 10 dB
VBW 100 kHz
SWT 100 ms Unit dBm

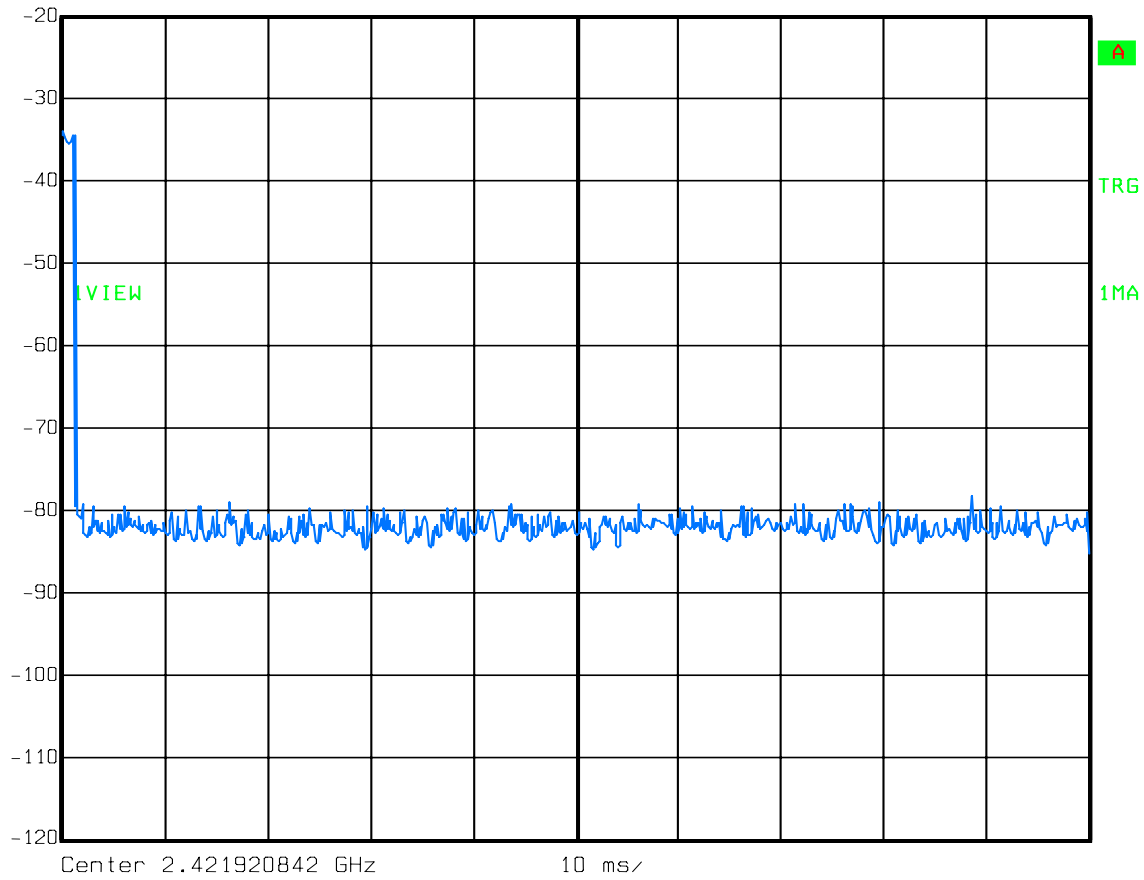

Date: 08.MAY 2007 08:26:20

$20 \log (1.402806\text{mS}/100\text{mS}) = -37.06 \text{ dB}$ duty cycle correction

Radiated Emissions

Low channel

Freq MHz	Rdng dBµV	Horn Duty dB	Cable dB	Cable dB	Pre-A dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
4804.0	53.3	+33.1	+1.0	-3.2	-32.5	+0.0	58.1	74.0	-15.9	Vert
Peak		+0.0								
4804.0	53.3	+33.1	+1.0	-3.2	-32.5	+0.0	21.1	54.0	-32.9	Vert
Average		-37.0								
7206.0	42.5	+35.8	+1.2	-3.9	-32.1	+0.0	51.3	54.0	-2.7	Vert
Peak		+0.0								
9608.0	41.5	+37.1	+1.1	-4.7	-35.8	+0.0	48.6	54.0	-5.4	Vert
Peak		+0.0								
12010.0	41.5	+39.6	+1.8	-5.5	-35.3	+0.0	53.1	54.0	-0.9	Vert
Peak		+0.0								
14412.0	41.0	+41.2	+1.6	-5.6	-31.6	+0.0	57.8	74.0	-16.2	Vert
Peak		+0.0								
14412.0	41.0	+41.2	+1.6	-5.6	-31.6	+0.0	20.8	54.0	-33.2	Vert
Average		-37.0								
16814.0	42.0	+41.1	+2.0	-6.3	-33.8	+0.0	57.6	74.0	-16.4	Vert
Peak		+0.0								
16814.0	42.0	+41.1	+2.0	-6.3	-33.8	+0.0	20.6	54.0	-33.4	Vert
Average		-37.0								
4804.0	58.8	+33.1	+1.0	-3.2	-32.5	+0.0	63.6	74.0	-10.4	Horiz
Peak		+0.0								
4804.0	58.8	+33.1	+1.0	-3.2	-32.5	+0.0	26.6	54.0	-27.4	Horiz
Average		-37.0								
7206.0	44.3	+35.8	+1.2	-3.9	-32.1	+0.0	53.1	54.0	-0.9	Horiz
Peak		+0.0								
9608.0	42.0	+37.1	+1.1	-4.7	-35.8	+0.0	49.1	54.0	-4.9	Horiz
Peak		+0.0								
12010.0	41.7	+39.6	+1.8	-5.5	-35.3	+0.0	53.3	54.0	-0.7	Horiz
Peak		+0.0								
14412.0	39.8	+41.2	+1.6	-5.6	-31.6	+0.0	56.6	74.0	-17.4	Horiz
Peak		+0.0								
14412.0	39.8	+41.2	+1.6	-5.6	-31.6	+0.0	19.6	54.0	-34.4	Horiz
Average		-37.0								
16814.0	41.0	+41.1	+2.0	-6.3	-33.8	+0.0	56.6	74.0	-17.4	Horiz
Peak		+0.0								
16814.0	41.0	+41.1	+2.0	-6.3	-33.8	+0.0	19.6	54.0	-34.4	Horiz
Average		-37.0								

Radiated Emissions

Mid Channel

Freq MHz	Rdng dBµV	Horn Duty dB	Cable dB	Cable dB	Pre-A dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
4882.0	55.7	+33.4	+1.0	+3.3	-32.6	+0.0	60.8	74.0	-13.2	Horiz
Peak		+0.0								
4882.0	55.7	+33.4	+1.0	+3.3	-32.6	+0.0	23.8	54.0	-30.2	Horiz
Average		-37.0								
7323.0	46.3	+35.8	+1.2	+4.0	-32.3	+0.0	55.0	74.0	-19.0	Horiz
Peak		+0.0								
7323.0	46.3	+35.8	+1.2	+4.0	-32.3	+0.0	18.0	54.0	-36.0	Horiz
Average		-37.0								
9764.0	41.7	+37.2	+1.1	+4.9	-36.1	+0.0	48.8	54.0	-5.2	Horiz
Peak		+0.0								
12205.0	41.0	+39.8	+1.8	+5.5	-34.8	+0.0	53.3	54.0	-0.7	Horiz
Peak		+0.0								
14646.0	40.0	+40.9	+1.5	+5.7	-31.8	+0.0	56.3	74.0	-17.7	Horiz
Peak		+0.0								
14646.0	40.0	+40.9	+1.5	+5.7	-31.8	+0.0	19.3	54.0	-34.7	Horiz
Average		-37.0								
17087.0	38.5	+41.8	+2.1	+6.4	-33.3	+0.0	55.5	74.0	-18.5	Horiz
Peak		+0.0								
17087.0	38.5	+41.8	+2.1	+6.4	-33.3	+0.0	18.5	54.0	-35.5	Horiz
Average		-37.0								
4882.0	52.0	+33.4	+1.0	+3.3	-32.6	+0.0	57.1	74.0	-16.9	Vert
Peak		+0.0								
4882.0	52.0	+33.4	+1.0	+3.3	-32.6	+0.0	20.1	54.0	-33.9	Vert
Average		-37.0								
7323.0	43.8	+35.8	+1.2	+4.0	-32.3	+0.0	52.5	54.0	-1.5	Vert
Peak		+0.0								
9764.0	41.5	+37.2	+1.1	+4.9	-36.1	+0.0	48.6	54.0	-5.4	Vert
Peak		+0.0								
12205.0	40.8	+39.8	+1.8	+5.5	-34.8	+0.0	53.1	54.0	-0.9	Vert
Peak		+0.0								
14646.0	39.2	+40.9	+1.5	+5.7	-31.8	+0.0	55.5	74.0	-18.5	Vert
Peak		+0.0								
14646.0	39.2	+40.9	+1.5	+5.7	-31.8	+0.0	18.5	54.0	-35.5	Vert
Average		-37.0								
17087.0	40.2	+41.8	+2.1	+6.4	-33.3	+0.0	57.2	74.0	-16.8	Vert
Peak		+0.0								
17087.0	40.2	+41.8	+2.1	+6.4	-33.3	+0.0	20.2	54.0	-33.8	Vert
Average		-37.0								

Radiated Emissions

High Channel

Freq MHz	Rdng dBµV	Horn Duty dB	Cable dB	Cable dB	Pre-A dB	Dist Table	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar Ant
2483.5	59.7	+29.0	+0.8	+2.3	-32.8	+0.0	59.0	74.0	-15.0	Vert
Peak		+0.0								
2483.5	59.7	+29.0	+0.8	+2.3	-32.8	+0.0	22.0	54.0	-32.0	Vert
Average		-37.0								
4958.0	46.2	+33.7	+1.0	+3.3	-32.6	+0.0	51.6	54.0	-2.4	Vert
Peak		+0.0								
7437.0	44.0	+35.9	+1.2	+4.1	-32.5	+0.0	52.7	54.0	-1.3	Vert
Peak		+0.0								
9916.0	43.3	+37.2	+1.1	+5.0	-35.7	+0.0	50.9	54.0	-3.1	Vert
Peak		+0.0								
12395.0	42.2	+40.1	+1.8	+5.5	-34.5	+0.0	55.1	74.0	-18.9	Vert
Peak		+0.0								
12395.0	42.2	+40.1	+1.8	+5.5	-34.5	+0.0	18.1	54.0	-35.9	Vert
Average		-37.0								
14874.0	40.8	+40.7	+1.5	+5.8	-32.1	+0.0	56.7	74.0	-17.3	Vert
Peak		+0.0								
14874.0	40.8	+40.7	+1.5	+5.8	-32.1	+0.0	19.7	54.0	-34.3	Vert
Average		-37.0								
17353.0	40.3	+42.6	+2.1	+6.6	-33.3	+0.0	58.3	74.0	-15.7	Vert
Peak		+0.0								
17353.0	40.3	+42.6	+2.1	+6.6	-33.3	+0.0	21.3	54.0	-32.7	Vert
Average		-37.0								
2483.5	64.2	+29.0	+0.8	+2.3	-32.8	+0.0	63.5	74.0	-10.5	Horiz
Peak		+0.0								
2483.5	64.2	+29.0	+0.8	+2.3	-32.8	+0.0	26.5	54.0	-27.5	Horiz
Average		-37.0								
4958.0	50.3	+33.7	+1.0	+3.3	-32.6	+0.0	55.7	74.0	-18.3	Horiz
Peak		+0.0								
4958.0	50.3	+33.7	+1.0	+3.3	-32.6	+0.0	18.7	54.0	-35.3	Horiz
Average		-37.0								
7437.0	43.2	+35.9	+1.2	+4.1	-32.5	+0.0	51.9	54.0	-2.1	Horiz
Peak		+0.0								
9916.0	42.0	+37.2	+1.1	+5.0	-35.7	+0.0	49.6	54.0	-4.4	Horiz
Peak		+0.0								
12395.0	42.2	+40.1	+1.8	+5.5	-34.5	+0.0	55.1	74.0	-18.9	Horiz
Peak		+0.0								
12395.0	42.2	+40.1	+1.8	+5.5	-34.5	+0.0	18.1	54.0	-35.9	Horiz
Average		-37.0								
14874.0	40.2	+40.7	+1.5	+5.8	-32.1	+0.0	56.1	74.0	-17.9	Horiz
Peak		+0.0								
14874.0	40.2	+40.7	+1.5	+5.8	-32.1	+0.0	19.1	54.0	-34.9	Horiz
Average		-37.0								
17353.0	40.5	+42.6	+2.1	+6.6	-33.3	+0.0	58.5	74.0	-15.5	Horiz
Peak		+0.0								


EQUIPMENT: 8200000

17353.0	40.5	+42.6	+2.1	+6.6	-33.3	+0.0	21.5	54.0	-32.5	Horiz
Average		-37.0								

EQUIPMENT: 8200000

Radiated Emissions

Lower Band Edge

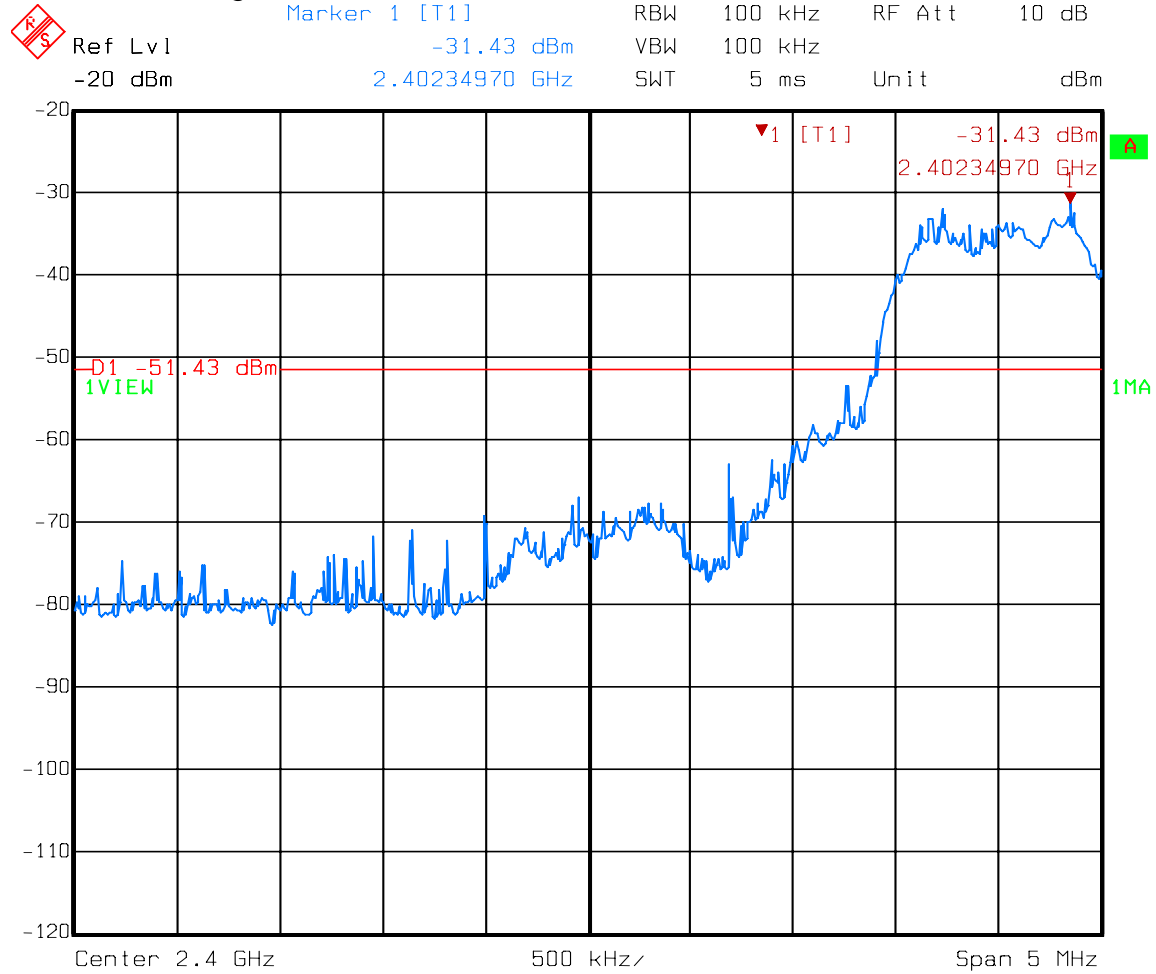

Date: 08.MAY 2007 15:32:34

EQUIPMENT: 8200000

Section 6. Peak Power Spectral Density

NAME OF TEST: Peak Power Spectral Density	PARA. NO.: 15.247(e)
TESTED BY: David Light	DATE: 08 May 2007

Test Results: Complies.

Measurement Data: See attached data..

Test Conditions: 23 %RH
45 °C

Measurement Uncertainty: +/-1.7 dB

Test Equipment Used: 1464-1484-1485-1016-993

Note – This test was performed radiated.

Section 7. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1464	Spectrum analyzer	Hewlett Packard 8563E	3551A04428	01/24/07	01/24/09
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	05/26/06	05/26/08
1484	Cable	Storm PR90-010-072	N/A	10/02/06	10/02/07
1485	Cable	Storm PR90-010-216	N/A	10/02/06	10/02/07
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
802	Near Field Probe Set	EMCO 7405	103	N/A	N/A
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	05/01/07	05/01/08
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/01/07	05/01/08
759	ANTENNA, LOG PERIODIC	A.H. SYSTEMS SAS-200/510	556	03/30/07	03/29/08
760	Antenna biconical	Electro Metrics MFC-25	477	01/19/07	01/19/08
993	Horn antenna	A.H. Systems SAS-200/571	XXX	08/01/05	08/02/07

ANNEX A - TEST DETAILS

NAME OF TEST: Powerline Conducted Emissions	PARA. NO.: 15.207(a)
---	----------------------

Minimum Standard: §15.207 Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 mH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Conducted Emission (MHz)	Limit (dBmV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 mV within the frequency band 535-1705 kHz, as measured using a 50 mH/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits as provided in §15.205 and §§15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

Nemko USA, Inc.

FCC PART 15, SUBPART C
Digital Transmission Systems
Test Report No.: 4077RUS1rev1

EQUIPMENT: 8200000

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 15.247(a)(2)
----------------------------------	-------------------------

Minimum Standard: The minimum 6 dB bandwidth shall be at least 500 kHz

NAME OF TEST: Maximum Peak Output Power	PARA. NO.: 15.247(b)(3)
---	-------------------------

Minimum Standard: The maximum peak output power shall not exceed 1 watt.

If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point to point operation may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceed 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operation may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Direct Measurement Method For Detachable Antennas:

If the antenna is detachable, a peak power meter is used to measure the power output with the transmitter operating into a 50 ohm load. The dBi gain of the antenna(s) employed shall be reported.

Substitution Antenna Method for Integral Antennas:

The peak field strength of the carrier is measured in a worst-case configuration with a RBW > 5 times the occupied bandwidth of the transmitted waveform. For cases where the RBW of the test instrument is not sufficient, the power is measured using a peak power meter instead of the spectrum analyzer.

The RBW of the spectrum analyzer shall be set to a value greater than the measured 6 dB occupied bandwidth of the E.U.T.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 15.247(a)(2)

Minimum Standard:

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Method Of Measurement:

The spectrum analyzer is set as follows:

RBW = VBW = 100 kHz.

Span: Sufficient to display 6 dB bandwidth

LOG dB/div.: 10 dB

Sweep: Auto

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Spurious Emissions(conducted)	PARA. NO.: 15.247(d)
---	----------------------

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits. Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ @ 3m)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM IS SEARCHED TO THE 10th HARMONIC OF THE HIGHEST FREQUENCY GENERATED IN THE EUT.

Method Of Measurement:

30 MHz - 10th harmonic plot

RBW: 100 kHz

VBW: 300 kHz

Sweep: Auto

Display line: -20 dBc

Lower Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 902 MHz, 2400 MHz, or 5725 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level below center frequency.

Upper Band Edge

RBW: At least 1% of span/div.

VBW: >RBW

Span: As necessary to display any spurious at band edge.

Sweep: Auto

Center Frequency: 928 MHz, 2483.5 MHz, or 5850 MHz

Marker: Peak of fundamental emission

Marker Δ : Peak of highest spurious level above center frequency.

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Radiated Spurious Emissions	PARA. NO.: 15.247(c)
---	----------------------

Minimum Standard: In any 100kHz bandwidth outside the frequency band in which the transmitter is operating, emissions shall be at least 20 dB below the fundamental emission or shall not exceed the following field strength limits:

Emissions falling in the restricted bands of 15.205 shall not exceed the following field strength limits:

Frequency (MHz)	Field Strength ($\mu\text{V/m @ 3m}$)	Field Strength (dB @ 3m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

THE SPECTRUM WAS SEARCHED TO THE 10th HARMONIC

15.205 Restricted Bands

MHz	MHz	MHz	GHz
0.09-0.11	16.42-16.423	399.9-410	4.5-5.25
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.125-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41	1718		

Number of channels tested:

Tuning range	Number of channels tested	Channel location in band
1 MHz or less	1	middle
1 to 10 MHz	2	top and bottom
more than 10 MHz	3	top, middle, bottom

NAME OF TEST: Transmitter Power Density	PARA. NO.: 15.247(d)
---	----------------------

Minimum Standard: The transmitted power density averaged over any 1 second interval shall not be greater than +8 dBm in any 3 kHz bandwidth.

Method Of Measurement: The spectrum analyzer is set as follows:

- RBW: 3 kHz
- VBW: >3 kHz
- Span: => measured 6 dB bandwidth
- Sweep: Span(kHz)/3 (i.e. for a span of 1.5 MHz the sweep rate is 1500/3 = 500 sec.
- LOG dB/div.: 2 dB

Note: For devices with spectrum line spacing ≤ 3 kHz, the RBW of the analyzer is reduced until the spectral lines are resolved. The measurement data is normalized to 3 kHz by summing the power of all the individual spectral lines within a 3 kHz band in linear power units.

For Devices With Integral Antenna:


For devices with non-detachable antennas, the received field strength is peaked and the spectrum analyzer is set as above. The peak emission level is then measured and converted to a field strength by adding the appropriate antenna factor and cable loss. This field strength is then converted to an equivalent isotropic radiated power using the same method as described for Peak Power output.

Number of channels tested:


Tuning Range	Number Of Channels Tested	Channel Location In Band
1 MHz or Less	1	Middle
1 to 10 MHz	2	Top And Bottom
More Than 10 MHz	3	Top, Middle, Bottom

ANNEX B - TEST DIAGRAMS


Test Site For Radiated Emissions

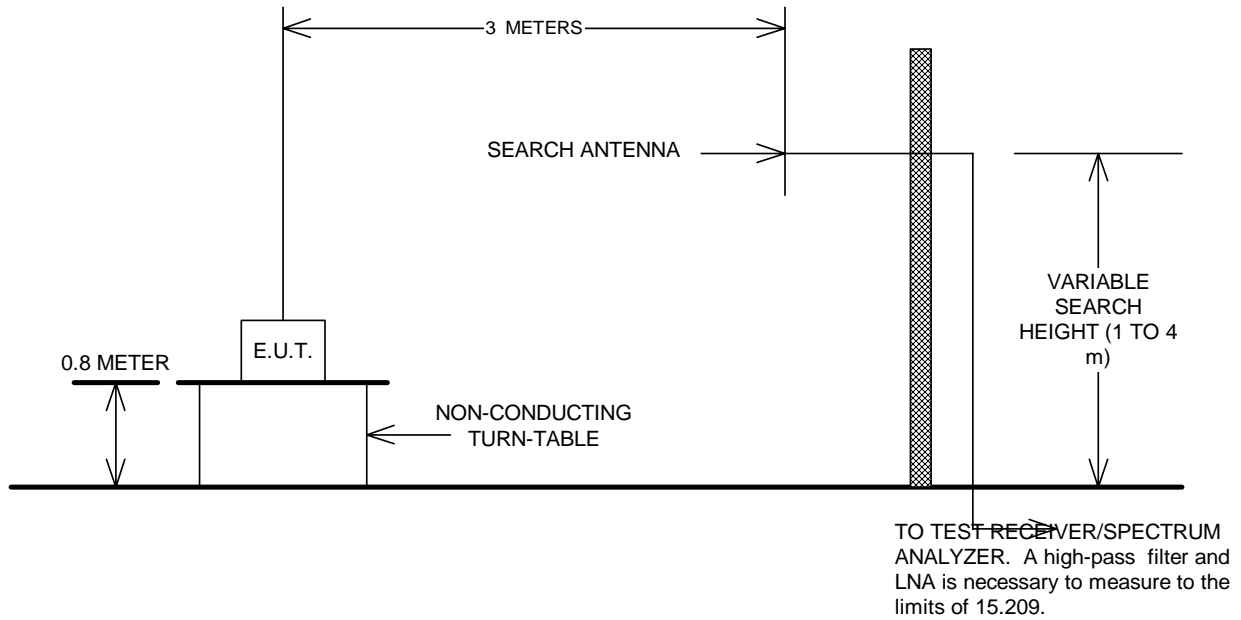

Conducted Emissions

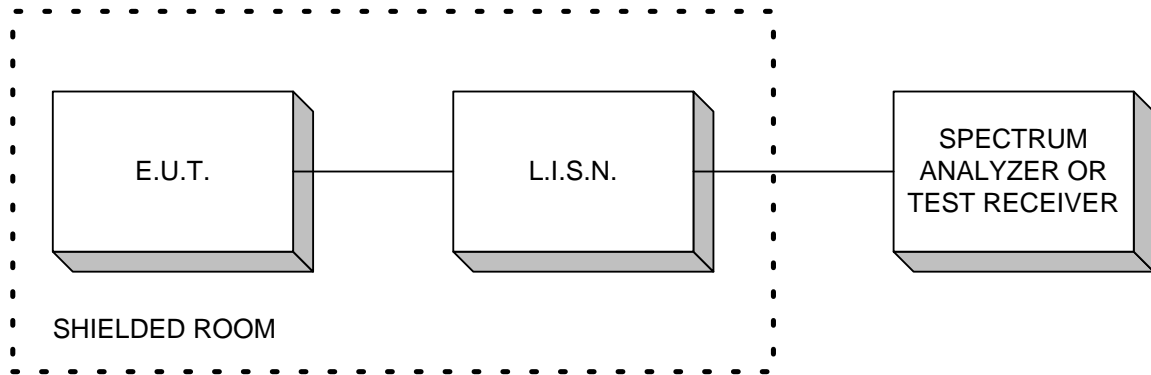

Peak Power At Antenna Terminals

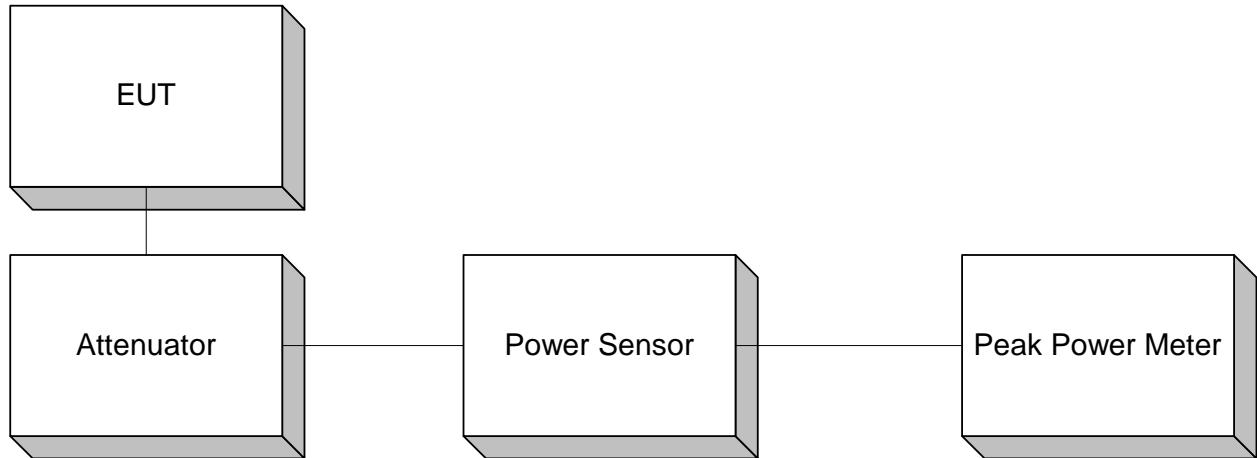

Note: A spectrum analyzer may be substituted for Peak Power Meter given that the measurement bandwidth is sufficient to capture the 60 dB bandwidth of the transmitter.

**Minimum 6 dB Bandwidth
Peak Power Spectral Density
Spurious Emissions (conducted)**

