



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

**FCC PART 15.247 AND IC ICES-003
TEST REPORT
DIGITAL SPREAD SPECTRUM**

Applicant	T&D CORPORATION
Address	817-1 SHIMADACHI MATSUMOTO 390-0852 JAPAN
FCC ID	SRD50020
IC	5558A-50020
Model Number	RTR-505
Product Description	WIRELESS DATA RECORDER
Date Sample Received	4/21/2011
Date Tested	5/17/2011
Tested By	Joe Scoglio
Approved By	Mario R. de Aranzeta
Report Number	809AUT11TestReport.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



Testing Certificate # 0955-01

TABLE OF CONTENT

GENERAL REMARKS.....	3
GENERAL INFORMATION.....	4
EMC EQUIPMENT LIST.....	5
TEST PROCEDURES.....	6
RADIATION INTERFERENCE.....	7
POWER LINE CONDUCTED INTERFERENCE.....	10
OCCUPIED BANDWIDTH.....	11
POWER OUTPUT.....	13
SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	14
RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND.....	16
POWER SPECTRAL DENSITY.....	20

APPLICANT: T&D CORPORATION
FCC ID: SRD50020
IC: 5558A-50020
REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, Fl 32669

Authorized Signatory Name:



Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: June 13, 2011

APPLICANT: T&D CORPORATION
FCC ID: SRD50020
IC: 5558A-50020
REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

GENERAL INFORMATION

DUT Specification

Applicable Standard	Part 15.247, RSS-210, RSS-GEN		
DUT Description	WIRELESS DATA RECORDER		
FCC ID	SRD50020		
IC:	5558A-50020		
Model	RTR-505		
Operating Frequency	TX: 902 – 928 MHz		
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable
Antenna	Helical Antenna		
Test Facility	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
Test Conditions	Temperature: 26°C Relative humidity: 50%		
Test Exercise	The DUT was placed in continuous transmit mode of operation.		

Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	Listed 3/10/10	3/10/12
Antenna: Dipole Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 6/10/09	6/10/11
Antenna: Passive Loop	EMC Test Systems	EMCO 6512	9706-1211	CAL. 6/1/09	6/2/11
Frequency Counter	HP	5385A	2730A03025	CAL 8/4/09	8/4/11
Hygro-Thermometer	Extech	445703	0602	CAL 1/30/10	1/30/12
Modulation Analyzer	HP	8901A	3435A06868	CAL 5/26/09	5/26/11
Analyzer Tan Tower Preamplifier	HP	8449B-H02	3008A00372	CAL 11/21/09	11/21/11
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 11/22/09	11/22/11
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 11/21/09	11/21/11
Analyzer Tan Tower Spectrum Analyzer	HP	8566B Opt 462	3138A07786 3144A20661	CAL 11/24/09	11/24/11
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 4/25/10	4/25/12

APPLICANT: T&D CORPORATION

FCC ID: SRD50020

IC: 5558A-50020

REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

TEST PROCEDURES

Radiation Interference: ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBμV) to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dBμV	+ 10.36 dB	+ 0.5 = 30.86 dBμV/m @ 3m

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

Bandwidth 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW)=1 MHz and the video bandwidth (VBW) =3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW=100 kHz, VBW=300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

ANSI C63.4-2003 10.1 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: T&D CORPORATION

FCC ID: SRD50020

IC: 5558A-50020

REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

RADIATION INTERFERENCE

Rules Part No.: 15.247, 15.209, RSS-210, RSS-GEN

Requirements:

Frequency	Limits
Part 15.209, RSS-210	
9 to 490 kHz	2400/F (kHz) $\mu\text{V}/\text{m}$ @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu\text{V}/\text{m}$ @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu\text{V}/\text{m}$ @ 30 meters
30 – 88	40.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
80 – 216	43.5 dB $\mu\text{V}/\text{m}$ @ 3 meters
216 – 960	46.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
Above 960	54.0 dB $\mu\text{V}/\text{m}$ @ 3 meters
Part 15.247, RSS-210	
Fundamental 902 – 928 MHz	127.37 dB $\mu\text{V}/\text{m}$ @ 3 meters
Fundamental 2.4 – 2.4835 MHz	127.37 dB $\mu\text{V}/\text{m}$ @ 3 meters
Harmonics	54.0 dB $\mu\text{V}/\text{m}$ @ 3 meters

Any emissions that fall in the restricted bands (15.205) must be less than or equal to 54 dB $\mu\text{V}/\text{m}$. Spurious emissions not in a restricted band must be 20 dBc. Harmonics were checked through the 10th harmonic.

Test Data: All values are peak unless noted.
Items mark with an * designate a frequency in a restricted band.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dB $\mu\text{V}/\text{m}$	Margin dB
902.9	902.90	72.3	H	1.95	23.16	97.41	29.97
902.9	902.90	82.4	V	1.95	22.56	106.91	20.47
902.9	1,805.80	16.1	V	2.74	29.96	48.80	78.58
902.9	1,805.80	20.1	H	2.74	29.96	52.80	74.58
902.9	2,708.70	17.0	H	3.40	32.54	52.94	1.06
902.9	2,708.70	17.2	V	3.40	32.54	53.14	0.86
902.9	3,611.70	9.8	H	4.15	32.98	46.93	7.07
902.9	3,611.70	10.1	V	4.15	32.98	47.23	6.77
902.9	6,320.50	7.1	V	5.40	35.66	48.16	5.84
902.9	6,320.50	10.0	H	5.40	35.66	51.06	2.94
914.4	914.40	65.3	H	1.97	23.80	91.07	36.31
914.4	914.40	80.1	V	1.97	23.80	105.87	21.51
914.4	1,828.90	15.1	H	2.76	30.10	47.96	79.42
914.4	2,743.30	12.0	V	3.42	32.55	47.97	6.03
914.4	2,743.30	14.0	H	3.42	32.55	49.97	4.03
914.4	3,657.80	5.0	V	4.19	33.05	42.24	11.76

APPLICANT: T&D CORPORATION

FCC ID: SRD50020

IC: 5558A-50020

REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

TEST DATA CONTD.


Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBμV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBμV/m	Margin dB
914.4	3,657.80	7.7	H	4.19	33.05	44.94	9.06
927.1	927.10	64.1	H	1.99	23.94	90.03	37.35
927.1	927.10	71.7	V	1.99	23.94	97.63	29.75
927.1	2,781.30	6.4	H	3.45	32.56	42.41	11.59
927.1	2,781.30	9.4	V	3.45	32.56	45.41	8.59

Note: Emissions 20 dB or more below the FCC limit are not shown.

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

Method of Measuring Radiated Spurious Emissions

Antenna is Calibrated
and appropriate one.
Raised from 1 to 4 M.

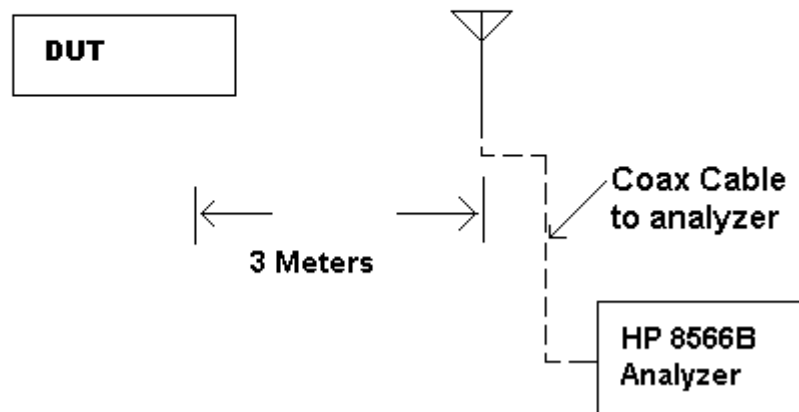

METHOD OF MEASUREMENT: The procedure used was ANSI standard C63.4-2003 & the FCC/OET Guidance on Measurements for Spread Spectrum Systems – Public Notice DA 00-705 dated March 30th, 2000.

APPLICANT: T&D CORPORATION
FCC ID: SRD50020
IC: 5558A-50020
REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.207, RSS-210

Requirements:

Frequency (MHz)	Quasi Peak Limits (dB μ V)	Average Limits (dB μ V)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50
* Decrease with logarithm of frequency		

Test Data: Not applicable. Battery operated device.

OCCUPIED BANDWIDTH

Rules Part No.: 15.247(a)(2), RSS-210, RSS-GEN


Test Data:

Three places in the band were measured and the worst case reported.



Occupied Bandwidth
6 dB bandwidth

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

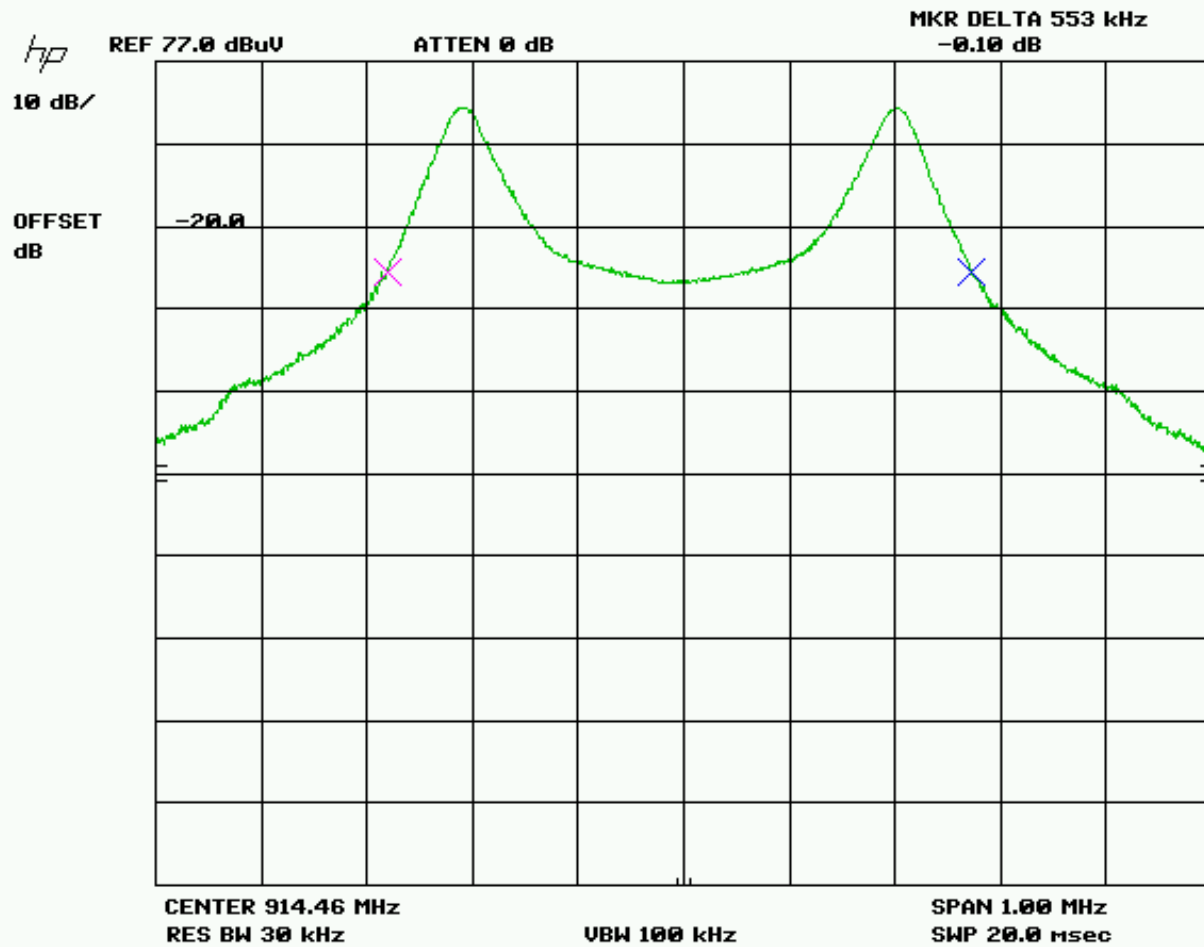


Occupied Bandwidth 20 dB bandwidth

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

POWER OUTPUT

Rules Part #: 15.247(b), RSS-210, RSS-GEN 1 Watt conducted, 4W ERP

TEST SET UP:



Harmonics were checked through the 10th harmonic

Test Results:

Frequency MHz	Po dBm	Po Watts
902.9	5.57	.0036
914.4	5.57	.0036
927.1	3.96	.0025

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Requirements: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


Test Data:

Tuned Frequency	EF	dB below carrier		Tuned Frequency	EF	dB below carrier
902.9	1805.5	72.97		914.4	1828.9	74.07
	2708.9	68.37			2743.4	69.17
	3611.9	72.07			3657.9	72.87
	4514.8	67.27			4572.4	69.77
	5417.9	66.97			5486.9	63.27
	6320.9	68.87			6401.4	69.07
	7223.9	76.17			7315.9	72.87
	8126.9	80.07			8230.4	80.07
	9029.9	81.07			9144.9	80.37

Tuned Frequency	EF	dB below carrier
927.1	1854.3	73.56
	2781.5	69.16
	3708.7	73.66
	4635.9	69.36
	5563.1	60.46
	6490.3	73.66
	7417.5	74.66
	8344.7	78.36
	9271.9	80.16

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

15.247(c) Method of Measuring RF Conducted Spurious Emissions

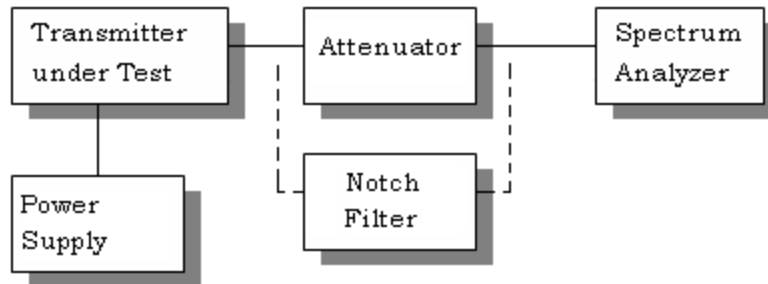


RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND

Requirements: Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 $\mu\text{V}/\text{m}$ (54 $\text{dB}\mu\text{V}/\text{m}$).

Test Procedure: An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector and a plot made. The calculated field strength in the adjacent restricted band is presented below.


Lower bandedge peak

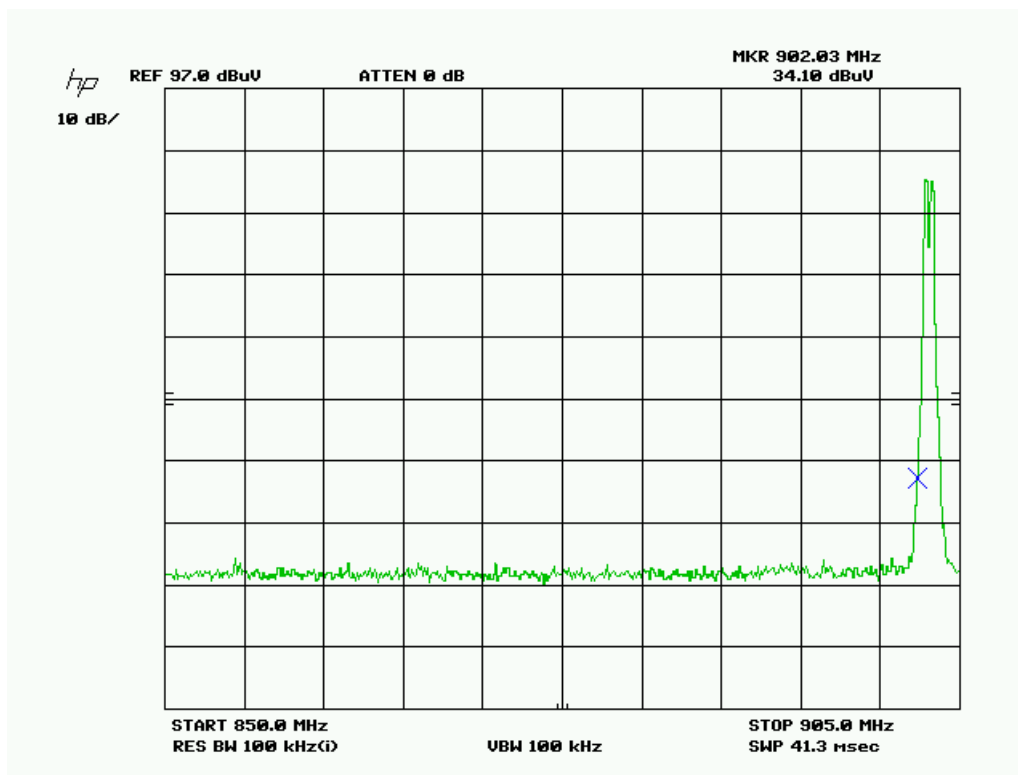

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading $\text{dB}\mu\text{V}$	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength $\text{dB}\mu\text{V}/\text{m}$
902.9	902.00	34.1	V	1.95	23.80	59.85

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc


Lower bandedge Average

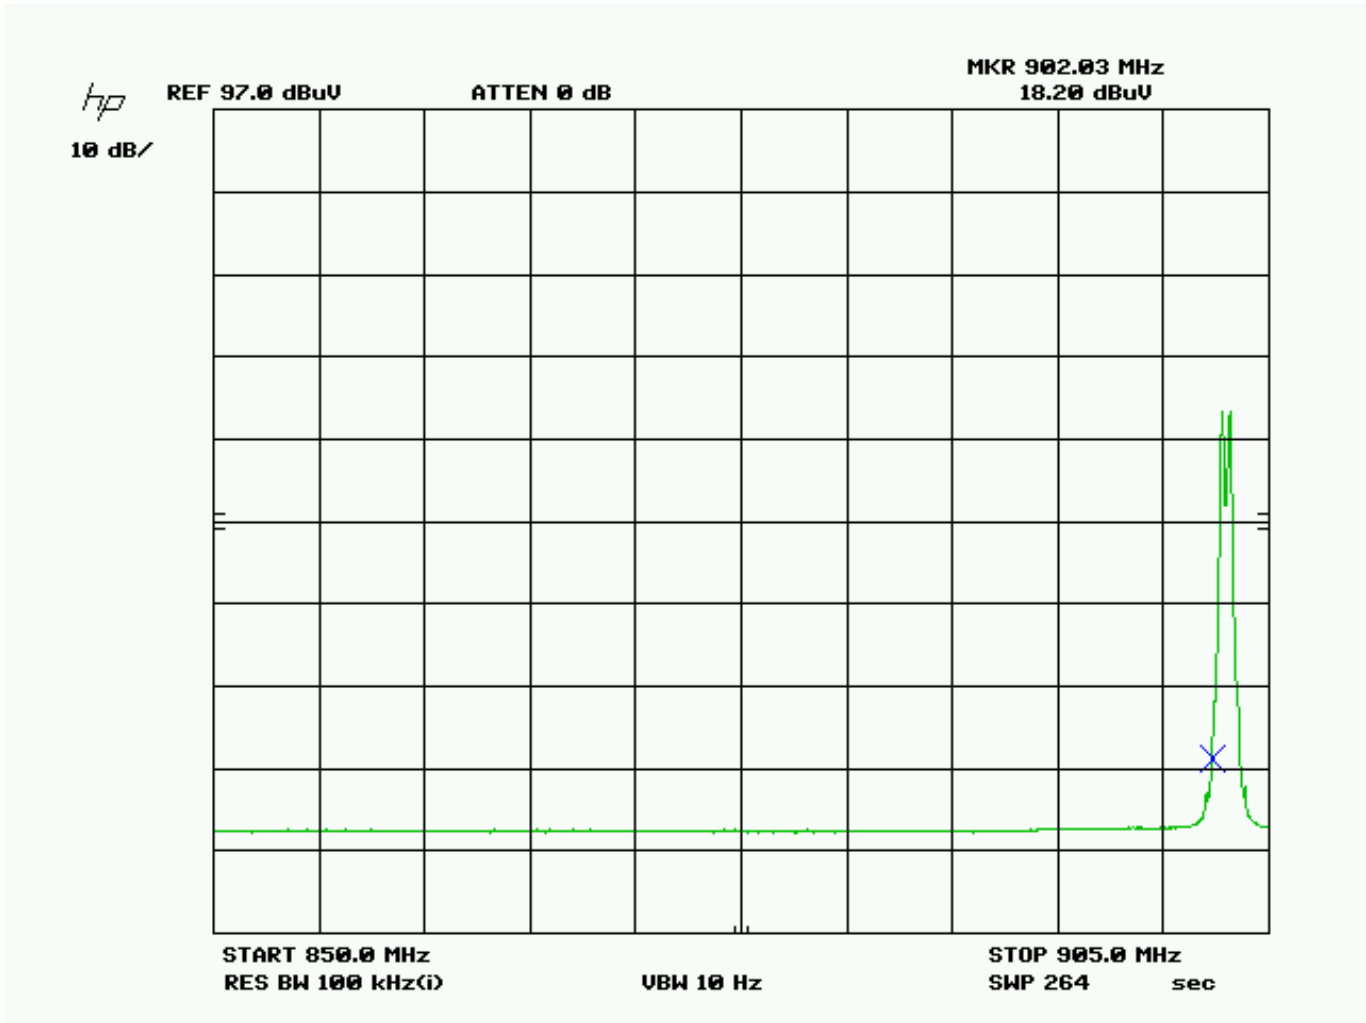

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m
902.9	902.00	18.2	V	1.95	23.80	43.95

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc


Upper bandedge Peak.

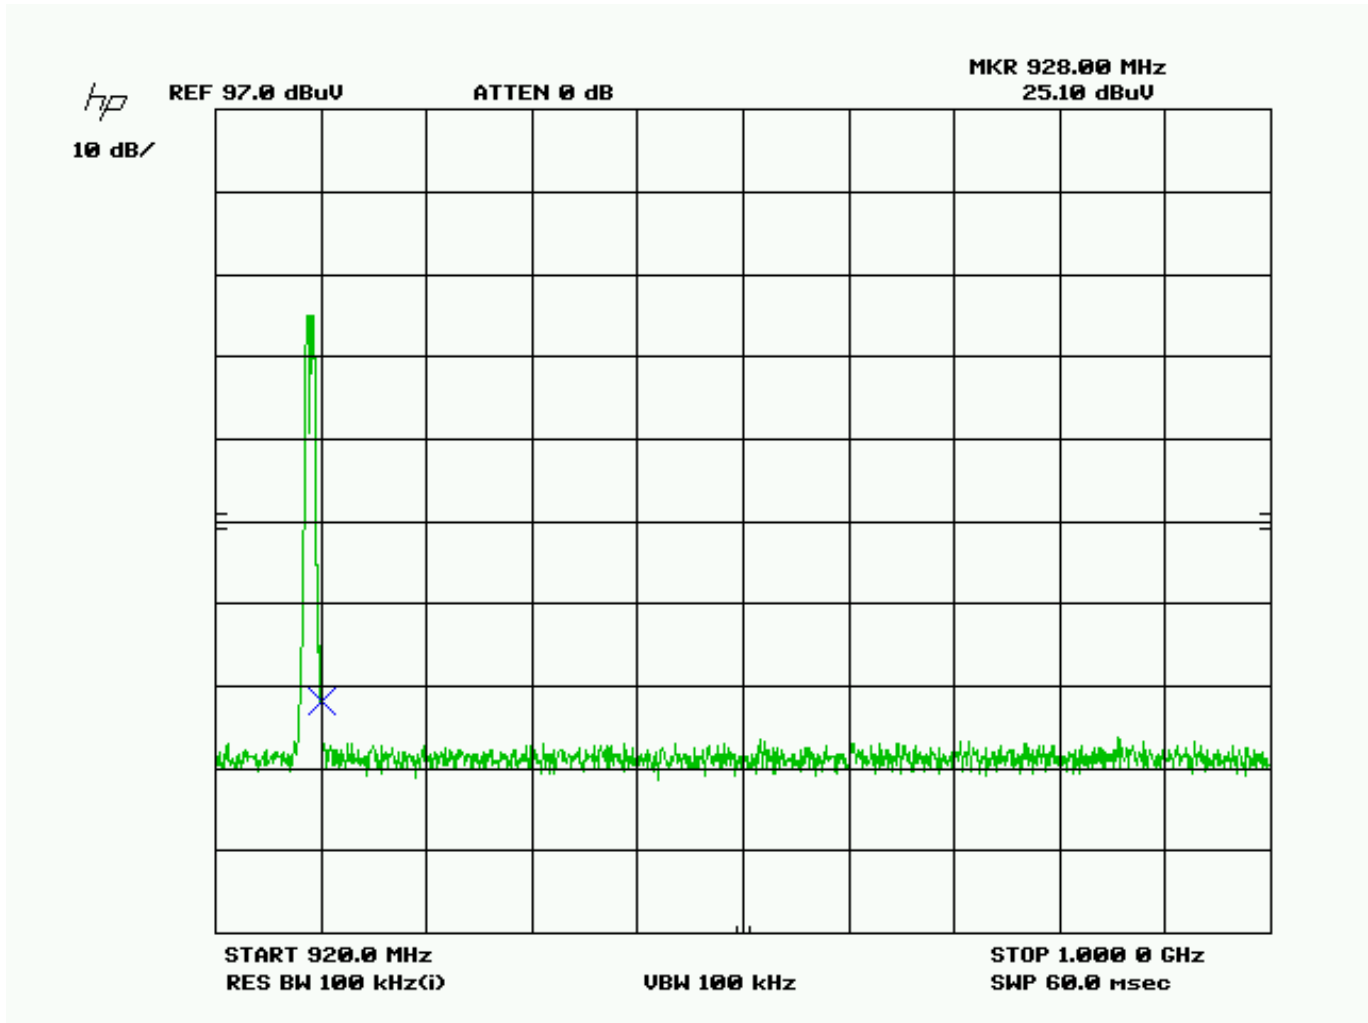

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m
927.1	928.00	25.1	V	1.99	23.96	51.05

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

Upper bandedge average -

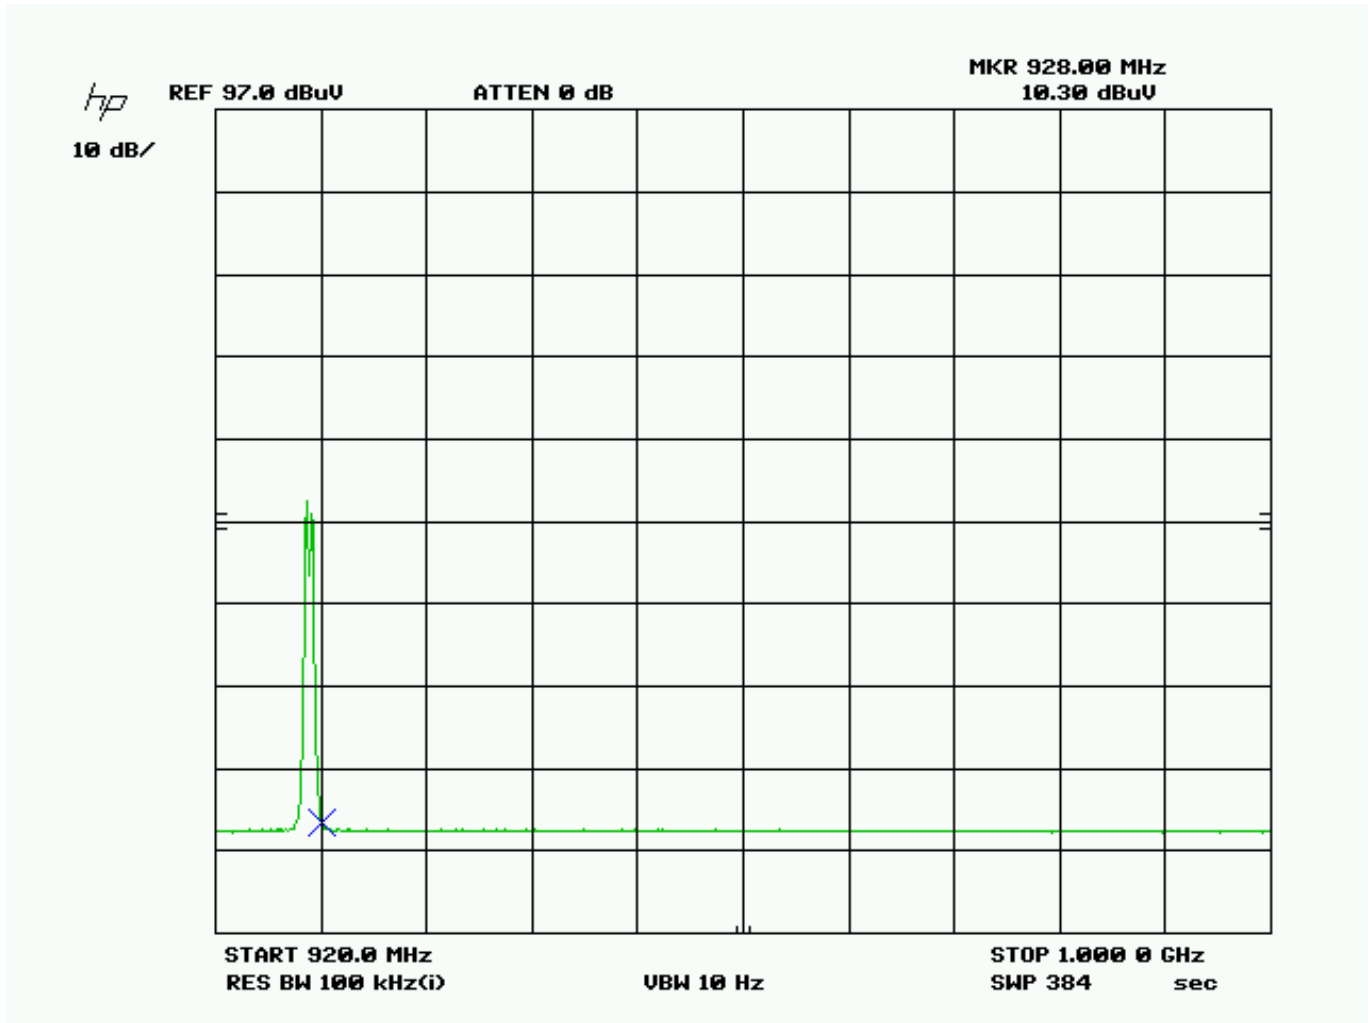

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m
927.1	928.00	10.3	V	1.99	23.96	36.25


APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc

POWER SPECTRAL DENSITY

Rules Part No.: 15.247(d)

Requirements: The peak level measured must be less than +8.0 dBm.

Test Data: SEE THE FOLLOWING PLOTS

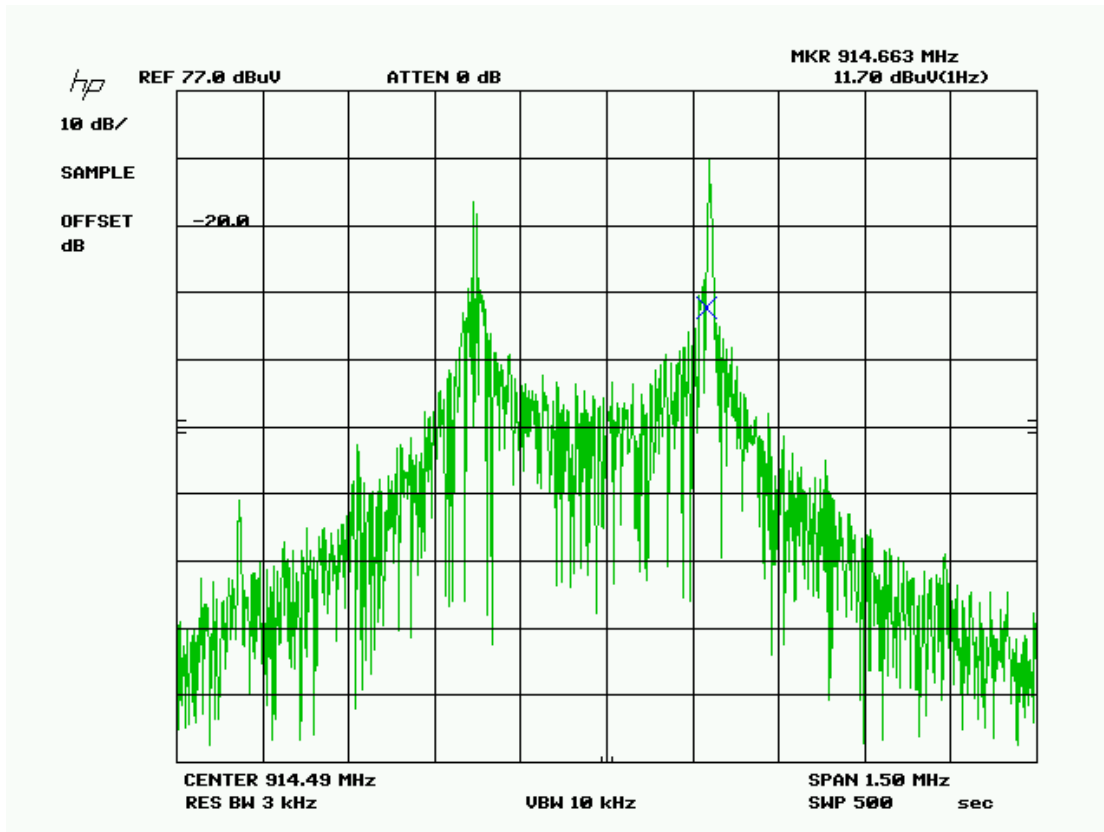

40 dB Attenuation Conducted measurement

Three places in the band were measured and the worst case reported.

11.7 dB μ V
 35 dB
40 dB
 -20.3 dBm

APPLICANT: T&D CORPORATION
 FCC ID: SRD50020
 IC: 5558A-50020
 REPORT: T\T&D CORP_SRD\809AUT11\809AUT11TestReport.doc