# Curtis-Straus Test Report

Report No EE0881-1

> Client Sensitech, INC.

> > 800 Cummings Center, Suite 258X

Beverly, MA 01915

Phone 978-720-2593 Fax 978-921-2112

**FRN** 0011744471

Models T11006740

FCC ID SRMT11006740

Equipment Type Low Power Communication Device Transmitter

**Equipment Code** DXX

> As detailed within this report Results

Prepared by Mairaj Hussain - Test Engineer

Michael Buchholz – EMC Manager

Issue Date 3/1/05

Authorized by

This Test Report is issued subject to the conditions stated in 'terms and conditions' Conditions of issue section of this

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Test Methodology       3         EUT Configuration       4         Statement of Conformity       5         Test Data and Plots       6         Section 15.249 (b)       6         Section 15.249 (d)       8         Occupied Bandwidth       11         Test Equipment Used       12         Terms And Conditions       16         A2LA Accreditation       18	Summary	3
EUT Configuration       .4         Statement of Conformity       .5         Test Data and Plots       .6         Section 15.249 (b)       .6         Section 15.249 (b) (1)       .6         Section 15.249 (d)       .8         Occupied Bandwidth       .11         Test Equipment Used       .12         Terms And Conditions       .16		
Test Data and Plots       6         Section 15.249 (b)       6         Section 15.249 (b) (1)       6         Section 15.249 (d)       8         Occupied Bandwidth       11         Test Equipment Used       12         Terms And Conditions       16		
Test Data and Plots       6         Section 15.249 (b)       6         Section 15.249 (b) (1)       6         Section 15.249 (d)       8         Occupied Bandwidth       11         Test Equipment Used       12         Terms And Conditions       16	Statement of Conformity	5
Section 15.249 (b) (1)       6         Section 15.249 (d)       8         Occupied Bandwidth       11         Test Equipment Used       12         Terms And Conditions       16	· · · · · · · · · · · · · · · · · · ·	
Section 15.249 (b) (1)       6         Section 15.249 (d)       8         Occupied Bandwidth       11         Test Equipment Used       12         Terms And Conditions       16	Section 15.249 (b)	6
Occupied Bandwidth		
Test Equipment Used	Section 15.249 (d)	8
Terms And Conditions16	Occupied Bandwidth	11
	Test Equipment Used	12
A2LA Accreditation18	Terms And Conditions	16
	A2LA Accreditation	18

## Summary

This report is an application for certification of a transmitter operating under 47 CFR 15.249 of the FCC rules provided for operation in the frequency band of 902-928MHz. The product covered by this report is T11006740, which is a Digital Relay Radio System (DRRS).

The manufacture requires the following antenna to be used with T11006740:

i) Ember antenna part number: 1513382-1

A detailed description of the above-mentioned antenna can be found in the antenna exhibit.

## Test Methodology

All testing was performed according to the procedures specified in ANSI C63.4 (2003). The product was tested with modulation on and peak readings were compared against the average limit presented in section CFR 15.249. Spurious emissions in the frequency range of 30MHz- 1000MHz were checked in an anechoic chamber.

Measurement Distance:		
Frequency (MHz)	Distance (m)	Comments
Fundamental (Three channels) 914.92, 922, & 927.56 MHz	3 m	Radiated
30MHz - 10GHz except 902 - 928 MHz	3m	Radiated Spurious
band		Measurements

The EUT was fully maximized. The EUT antenna can not be maximized separately. The product was evaluated at three channels of operation. (Channel 1, Channel 2, and Channel 3.)

The product is battery powered, therefore no AC conducted emissions were performed.

All readings are peak unless otherwise noted.

REPORT:EE0881-1 FCC ID:SRMT11006740

## **EUT Configuration**

**Product Name**: RF TT4 Ambient 2K Monitor

Part Number: T11006740

**Serial Number:** 1427400050

**EUT Cables:** None

**EUT Power Source:** Battery (fresh battery used for testing)

**Environmental Conditions** 

November 8, 2004: 24.1°C; 22%RH

**Standard Operating Voltage** 

3.6VDC (lithium battery)

## Statement of Conformity

The T11006740 has been found to conform with the following parts of the 47 CFR as detailed below:

47 CFR Part #	47 CFR Part #	RSS- 210	Comments
	15.15(b)	5.7	The product contains no user accessible controls that increase transmission power above allowable levels.
2.925	15.19	5.10	The label is shown in the label exhibit. The label is permanently attached.
	15.21	5.11	Information to the user is shown in the instruction manual exhibit.
	15.27		No special accessories are required for compliance.
	15.31(e)		Voltage variation test was not performed on the product because it drives power from a battery.
	15.203	5.5	The device utilizes antenna specific to the product.
	15.204	5.5	See attached documentation describing the antenna.
	15.205 15.209	6.2.1	The fundamental is not in a Restricted band and the spurious comply with the general emission limits of 15.209.
	15.207	6.6	Unit is DC powered and drives its power from a battery, therefore AC line conducted emissions testing was not done.
15.249	15.249 (a)	6.2.2	The EUT meets the field strength limit of 50mV/m (94dBµV/m) at the fundamental.
	15.249 (d)	6.2.1	Spurious emissions meet the general radiated emissions limits of section 15.209.
	15.249 (e)	6.2.1	Spurious emissions found above 1GHz meet the FCC class B limits.
		5.9.1	Emission bandwidth plot is provided with this report.

## Test Data and Plots

## **Section 15.249 (b)**

Band Ed	ge										Curtis -S t	raus LLC
Date:	Date: 08-Nov-04			Company:	Sensited	ch				V	ork Order:	E0881
Engineer:	Mairaj Hussa	in	EUT Desc: TTRF Monitor									
								ļ	Measuremer	nt Distance:	3 m	
Notes:												
Antenna			Preamp	Antenna	Cable	Adjusted				F	CC Class I	В
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading	Limit	Margin	Result	Limit	Margin	Result
(H / V)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)
Hpk	928.0	31.7	21.8	23.6	5.0	38.5				46.0	-7.5	Pass
Hpk	928.22	26.5	21.8	23.6	5.0	33.3				46.0	-12.7	Pass
Vpk	902.0	21.2	21.8	23.4	1.6	24.4				46.0	-21.6	Pass
Table	e Result:	Pass	by	-7.5	dB				Worst Freq: 928.0 MHz			
Test Site:	"A"	Pre-Amp:	Blue	Cable:	65 ft RG	i8A/U	Analyzer:	Black	Antenna: Blue-White			

Note: All readings are peak unless otherwise noted.

	The product meets the respective limit at
Conclusion:	lower/upper restricted band bandedge.

Sample calculation:


Adjusted Reading = reading + cable factor + antenna factor – distance factor

## Section 15.249 (b) (1)

undam	ental										Curtis -S t	raus LLC
Date:	08-Nov-04			Company:	Sensited	h				٧	Vork Order:	E0881
Engineer: Mairaj Hussain EUT Desc: TTRF Monitor												
								ļ	Measuremer	nt Distance:	3 m	
Notes:	Notes: EUT Max Freq: 827.5MHz											
Antenna			Preamp	Antenna	Cable	Adjusted					FCC 15.249	)
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading	Limit	Margin	Result	Limit	Margin	Result
(H / V)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dBµV/m)	(dB)	(Pass/Fail)
CH1 Hpk	914.92	64.6	0.0	23.5	5.0	93.1				94.0	-0.9	Pass
CH3 Hpk	927.56	63.5	0.0	23.6	5.0	92.1				94.0	-1.9	Pass
CH2 Hpk	922.0	64.7	0.0	23.5	5.0	93.2				94.0	-0.8	Marginal
Table	e Result:	Pass	by	-0.8	dB		·	·	Worst Freq: 922.2 MHz			
Test Site:	"A"	Pre-Amp:	none	Cable:	65 ft RG	8A/U	Analyzer:	Black	Antenna: Blue-White			


Sample calculation:

Adjusted reading = Reading + Antenna factor + Cable factor

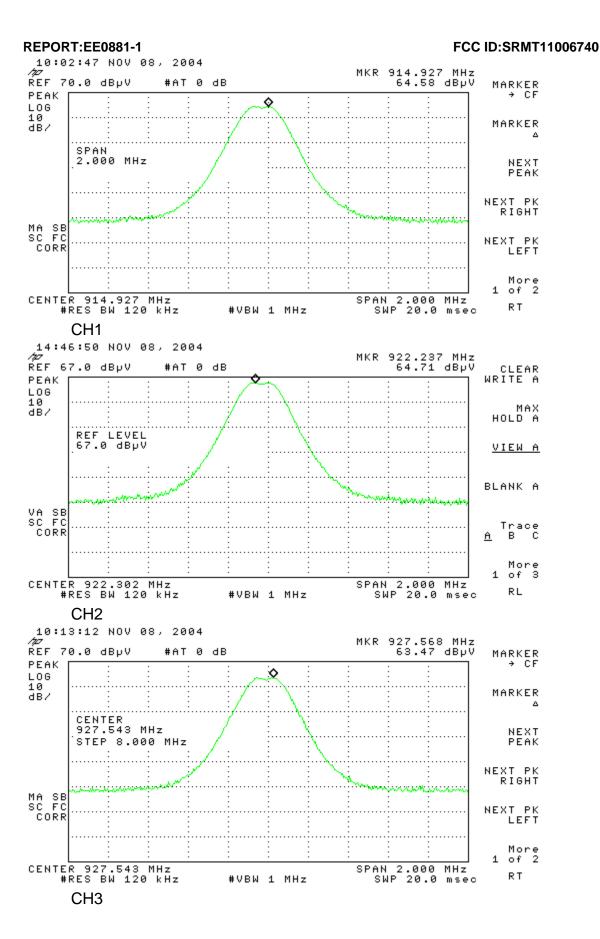


<u>Curtis-Straus</u> LLC • 527 Great Road • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828 Page 7 of 20

## **Section 15.249 (d)**

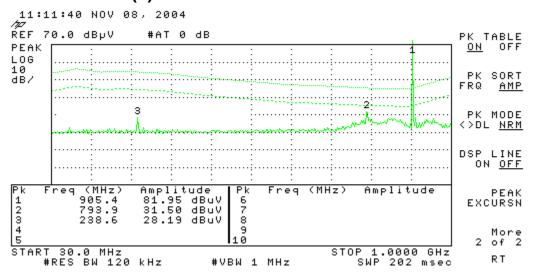


### Tx mode receiving antenna H

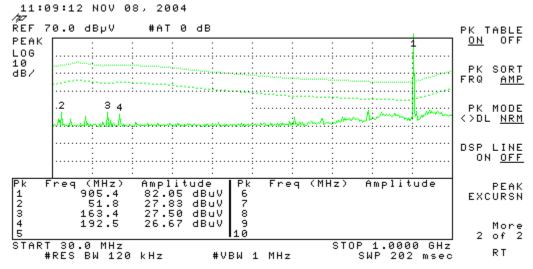


Tx mode receiving antenna V



### FCC ID:SRMT11006740

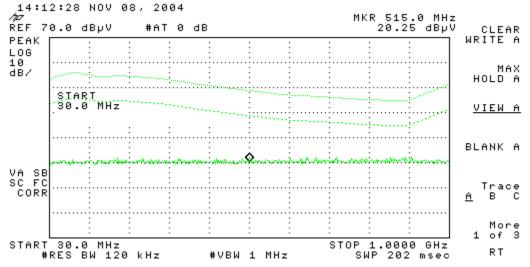

### Rx mode receiving antenna H

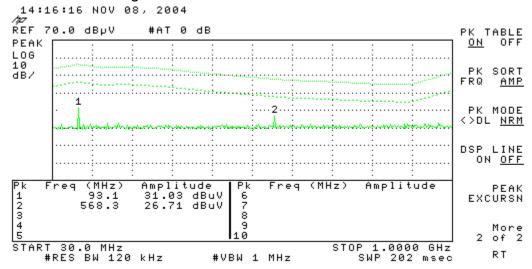


Rx mode receiving antenna V

	08-Nov-04			Company:				Work Order: E0881					
Engineer:	Mairaj Hussa	in		EUT Desc:	RF TT4	Ambient 2k	Monitor						
	Freque	ncy Range:	1 - 10GHz					Measuremer	nt Distance:	3 m			
	VHP16 used Tx mode	upto 2.9GHz	2					EU.	T Max Freq:	927.6MHz			
Antenna			Preamp	Antenna	Cable	Adjusted			F	CC Class I	3		
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading			Limit	Margin	Result		
(H / V)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)			(dBµV/m)	(dB)	(Pass/Fail		
Readings include	e filter loss.												
Run at CH1													
/pk(10Hz VBW)	1829.8	39.5	19.1	30.3	1.7	52.4			54.0	-1.6	Pass		
Vpk	1829.8	40.9	19.1	30.3	1.7	53.8			74.0	-20.2	Pass		
Vpk	2744.6	39.8	20.4	32.8	2.1	54.3			74.0	-19.7	Pass		
/pk(10Hz VBW)	2744.6	34.7	20.4	32.8	2.1	49.2			54.0	-4.8	Pass		
Table	Result:	Pass	by	-1.6	dB			We	orst Freq:	1829.8	MHz		
Test Site:	"A"	Pre-Amp:	Yel-Blk	Cable:	6 RG14	2LL	Analyzer: Black		Antenna:	Yellow Horr			

REPORT:EE0881-1 FCC ID:SRMT11006740

Spurious	s Emissi	osn									Curtis -S t	raus LLC			
Date:	08-Nov-04			Company:	Sensited	ch			Work Order: E0881						
Engineer:	Mairaj Hussa	in		EUT Desc:	RF TT4	Ambient 2k	Monitor								
	Freque	ncy Range:	1 - 10GHz					М	easureme	nt Distance:	3 m				
Notes:	RX mode								EU.	T Max Freq:	927.6MHz				
Antenna			Preamp	Antenna	Cable	Adjusted				ı	CC Class I	3			
Polarization	Frequency	Reading	Factor	Factor	Factor	Reading				Limit	Margin	Result			
(H / V)	(MHz)	(dBµV)	(dB)	(dB/m)	(dB)	(dBµV/m)				(dBµV/m)	(dB)	(Pass/Fail)			
Run at CH1 Vpk	1829.1	34.0	19.1	30.3	1.7	46.9				54.0	-7.1	Pass			
Table	e Result:	Pass	by	-7.1	dB				Wo	orst Freq:	1829.1	MHz			
Test Site:	"A"	Pre-Amp:	Yel-Blk	Cable:	6 RG14	2LL	Analyzer: Bla	ick	Antenna: Yellow Horn		1				

## **Occupied Bandwidth**

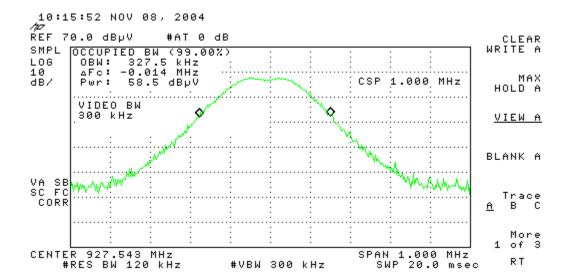

## Test Equipment Used

SPECTRUM ANALYZERS	RANGE	MN	MFR		SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	24			
WHITE	9kHz-22GHz	8593E	пР HP		41A03559 47U01252	00024 00022	26-MAY-2005
	9kHz-1.8GHz						04-MAR-2005
BLUE	9kHz-1.8GHz	8591E	HP		23A00227	00070	30-OCT-2004
YELLOW		8594E	HP		23A01958	00100	11-AUG-2005
GREEN	9kHz-26.5GHz	8593E	HP		29A03618	00143	02-AUG-2005
BLACK	9kHz-12.8GHz	8596E	HP		10A00944	00337	18-AUG-2005
YELLOW-BLACK	20Hz-40.0MHz	3585A	HP		04A05219	00030	02-DEC-2004
Orange	9kHz-26.5GHz	E4407B	HP	US	39440975	00394	03-JUN-2005
LISNS/MEASUREMENT PROBES	RANGE	MN		MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	)	SOLAR	956348	00753	02-APR-2005
BLUE	10kHz-30MHz	8012-50-R-24-BNC	)	SOLAR	956349	00752	02-APR-2005
YELLOW-BLACK	10kHz-30MHz	2 8012-50-R-24-BNC		SOLAR	984735	00248	02-APR-2005
ORANGE	10kHz-30MHz	8012-50-R-24-BNC		SOLAR	903707	00754	02-APR-2005
GOLD	10kHz-30MHz			SOLAR	984734	00247	02-APR-2005
WHITE-BLACK	10kHz-30MHz			SOLAR	972019	00678	02-APR-2005
BLACK	10kHz-30MHz			SOLAR	972017	00675	02-APR-2005
RED-BLACK	10kHz-30MHz			SOLAR	972016	00677	02-APR-2005
BLUE-BLACK	10kHz-30MHz	00.000.00.00.	-	SOLAR	972018	00676	02-APR-2005
BLUE MONITORING PROBE	0.01-150MHz		-	TEGAM	12350	00807	21-MAY-2005
YELLOW MONITORING PROBE	0.01-150MHz			ETS	50972	00493	24-NOV-2004
GREEN CURRENT TRANSFORMER	40Hz-20MHz		F	PEARSON	10226	00793	03-APR-2005
CISPR LINE PROBE	150kHz-	N/A		C-S	01	00805	20-DEC-2004
CISPR TELCO VOLTAGE PROB	30MHz F 10kHz-30MHz	CS A/C-10		C-S	CS01	00296	28-SEP-2005
CISPR 22 TELCO ISN	9kHz-30MHz	00.10.0		FISCHER	20115	00296	15-OCT-2004
OPEN AREA TEST SITE	E(OATS)	FCC CODE		IC CODE	VCCI		CALIBRATION DUE
SITE F		93448	10	C 2762-F	R-1	886	25-MAR-2005
SITE T		93448	10	C 2762-T	R-9	05	25-MAR-2005
SITE A		93448	10	C 2762-A	R-9	03	25-MAR-2005
SITE M		93448	10	C 2762-M	R-9	04	25-MAR-2005
BUBBLE (HP FACIL	LITY)	N/A		N/A R-		467	16-MAY-2005
LINE CONDUCTED TE	ST SITES	FCC CODE		IC CODE	VCCI	CODE	CALIBRATION DUE
EMI 1	31 OIIE3	93448		N/A	C-1		01-MAY-2006
EMI 2 EMI 3		93448 93448		N/A	C-18 C-18		01-MAY-2006
BUBBLE (HP FACIL	1774)	93446 N/A					01-MAY-2006
DORRIE (UL LACII	_IIY)	IN/A		N/A	C-1	000	16-MAY-2005
PREAMPS / ATTENUATORS /	RANGE	MN		MFR	SN	ASSET	CALIBRATION DUE
FILTERS							
RED	0.10-2000MHz 0.01-2000MHz	ZFL-1000-LN ZFL-1000-LN		C-S	N/A	00798	31-MAR-2005
BLUE BLUE BLACK				C-S	N/A	00759	26-JUL-2005
BLUE-BLACK	0.01-2000MHz 0.01-2000MHz	ZFL-1000-LN		C-S	N/A	00800	31-MAR-2005
GREEN	0.01-2000MHz	ZFL-1000-LN		C-S	N/A	00802	27-FEB-2005
BLACK		ZFL-1000-LN		C-S	N/A	00799	27-FEB-2005
ORANGE	0.01-2000MHz	ZFL-1000-LN		C-S	N/A	00765	27-FEB-2005
WHITE	1-20GHz	SMC-12A SMC-12A		C-S	426643	00760	21-JUL-2005
	YELLOW-BLACK 1-20GHz			C-S	535055	00801	21-JUL-2005
ORANGE-BLACK	1-20GHz	SMC-12A		C-S	637367	00761	21-JUL-2005
,		AFS4-18002650-60-8P-4		C-S	467559	00758	20-JUL-2005
HIGH PASS FILTER	1-18 GHz	SPA-F-55204		K&L	36	00817	06-JAN-2006
Low Pass Filter	1-9 GHz	11SL10-4100/X4400- O/O		K&L	4	00816	06-JAN-2006
HF 20DB ATTENUATOR	0.03-20 GHz	PE 7019-20	PA	Pasternack 01		00791	21-MAY-2005
Low FREQ LPF	10-100ĸHz	L200K1G1		IICROWAVE CIRCUITS	4460-01 DC0432	1019	30-AUG-2005

00796 00321

22-JUL-2005 31-DEC-2004

N/A 2245

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBI	RATION DUE		
GREEN BILOG	30MHz-2GHz	CBL6112B	CHASE	2742	00620		NPR-2006		
GREEN-BLACK BILOG	30MHz-2GHz	CBL6112B	CHASE	2412	00127	06-	IAN-2006		
GREEN-RED BILOG	30MHz-2GHz	CBL6112B	CHASE	2435	00990	06- <i>A</i>	APR-2006		
BLUE-WHITE BILOG	30MHz-2GHz	3142B	EMCO	1527	TELOGY RENTAL	03-A	UG-2006		
RED BILOG	30MHz-1GHz	3143	EMCO	1270	00042	17-N	1AR-2005		
BLUE BILOG	30MHz-1GHz	3143	EMCO	1271	00803		1AR-2005		
GRAY BILOG	26MHz-2GHz	3141	EMCO	9703-1038	00066	19-MAY-20	05(EMI) / 21-JUN- 005(RFI)		
YELLOW-BLACK BILOG	20-2000MHz	CBL6140A	CHASE	1112	00126	19-MAY-20	05(ÈMI) / 25-JUN- 005(RFI)		
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	22-MAY-2005(	EMI) / 28-SEP-2005 (RFI)		
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	12-	IUN-2005		
ORANGE HORN	1-18GHz	3115	EMCO	0004-6123	00390	04-5	IUN-2005		
HF (WHITE) HORN	18-26.5GHz	801-WLM	Wavelin E	00758	00758	15-	JUL-2005		
SMALL LOOP (RENTAL)	10kHz-30MHz	PLA-130/A	ARA	1009	TELOGY	11-F	EB-2006		
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755		EB-2006		
LARGE LOOP	20Hz-5MHz	6511	EMCO	9704-1154	00067		IOV-2005		
ACTIVE MONOPOLE	30Hz-30MHz	3301B	EMCO	3824	00068		1AY-2005		
INDUCTION COIL	50-60Hz	1000-4-8	C-S	N/A	00778		SEP-2006		
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00775		IUN-2005		
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00756		IUN-2005		
RE101 LOOP SENSOR	30Hz-100kHz	RE101-	LIVICO	1371	00738	20-0	IOIN-2003		
RE TO I LOOP SENSOR	301 12-100KI 12	13.3CM	C-S	N/A	00616	07-5	IAN-2005		
RS101 RADIATING LOOP	30Hz-100ĸHz	RS101-12CM	C-S	N/A	00819	07	IAN-2005		
RS101 RADIATING LOOP	30Hz-100KHz	RS101-12CM RS101-4CM	C-S	N/A N/A	00819		IAN-2005 IAN-2005		
RS TO T LOOP SENSOR	301 12-100KI 12	K3101-40M	U-3	IN/A	00620	07-0	IAIN-2005		
MIXERS/DIPLEXERS	RANGE	MN	MFR		SN	ASSET	CALIBRATION DU		
Mixer / Horn	26.5-40 GHz	11970A/28-442- 6	HP/ATN	И 2332A	.00900/A046903-0		N/A		
Mixer / Horn	26.5-40 GHz	11970A/28-442- 6	HP/ATN	И 2332A	.01695/A046903-0 <sup>-</sup>	1 1087	23-AUG-2005		
Mixer / Horn	26.5-40 GHz	11970A/28-442- 6	HP/ATN	И 3003A	.07825/A046903-0 <sup>-</sup>	1 1086	23-AUG-2005		
Mixer / Horn	40-60 GHz	M19HW/A	OML		U30110-1	00821	03-JAN-2005		
MIXER / HORN	60-90 GHz	M12HW/A	OML		E30110-1	00822	03-JAN-2005		
MIXER / HORN	90-140 GHz	MO8HW/A	OML		F21206-1	00811	05-DEC-2004		
MIXER / HORN	140-220 GHz	MO5HW/A	OML		G21206-1	00812	05-DEC-2004		
DIPLEXER		DPL.26	OML		N/A	00813	05-DEC-2004		
ABSORBING	RANGE	MN		MFR	SN	ASSET	CALIBRATION DL		
CLAMPS	30-1000MHz					00004			
FISCHER CLAMP	30-1000IVIH2	F-201-23MN	Л	FISCHER	10	00081	16-JAN-2006		
EFT		MN	MFR		SN	ASSET	CALIBRATION DU		
EFT DIRECT COUPLING	Сар	N/A	C-S		01	00794	29-JAN-2006		
ESD GENERATORS		MN	MFR		SN	ASSET	CALIBRATION DU		
GREEN		G435	SCHAFFNE	D	000839	00763	02-DEC-2004		
RED		G435 G435	SCHAFFNE		001625	00763	02-DEC-2004 09-DEC-2004		
YELLOW		30D	ETS	ĸ	201	00702	16-JUN-2005		
BEST EMC-2	IN MFR		Assı		CAL	LIBRATION DUE			
BLUE 711-	-1100 SCHAFF	) SCHAFFNER 199824- 002SC		17	28-JUL-2	2005 (Surge/D+I/EFT)			
RED 711-	-1100 SCHAFF	200122-		23 24-J	24-JUN-2005 (SURGE) /		/ 28-JUL-2005 (D+I) / 05-NOV-2004 (EFT)		
CHAMBERS AND STRIPLI		MN	MFR		SN	ASSET	CALIBRATION DU		
RFI 1 CHAMBER		ER COMPACT	Panash		N/A	00797	25-JUN-2005		
RFI 2 CHAMBER	04' x 07' S	HIELDING SYSTEM	LINDGR		13329	00795	21-JUN-2005		
DEI 3 STRIDI INE		NI/A	C-8		NI/A	00706	22-1111-2005		

C-S B-M-A Inc.

N/A SGTH-31S

RFI 3 STRIPLINE

ENVIRONMENTAL (SAFETY)

HARMONIC A		MN		MF		SN	ASSET	CALIBRATION DUE
HFTS	<u> </u>	HP6842	١	HP		3531A-00169	00738	03-DEC-2005
FREQUENCY (	COUNTER	MN		MF	₹	SN	ASSET	CALIBRATION DUE
5340	4	HP5340A	HP5340A			1440A02320	00787	30-JUL-2004
AMPLIFIERS	Range	. N	IN	MFR	SN	ASSET	CALIE	RATION DUE
RED			1000B	AR	18708	00032	23-	JUN-2005
GREEN	0.5-1000N	MHz 10W	1000B	AR	23423	00123	01-	JUN-2005
BLUE	0.01-250N	/Hz 75 <i>A</i>	250	AR	19165	00039	19-JAN-2005	(CRFI) / 23-JUN-2005
		_		AR			22 ILIN 2005/C	(RFI)
BLACK	0.01-250N		250		23411	00122		RFI)/ 25-JUN-2005(RFI) 05(CRFI) / 02-JUN-
ORANGE	0.01-250N	ИН <b>z 75</b> А	250	AR	26827	00367		005(RFI)
HP489A	1.0-2.0GI	Hz HP4	189A	HP	449-00762		28-	SEP-2005
HP491C	2.0-4.0GI		191C	HP	449-00638			SEP-2005
HP493A #1	4.0-8.0GI		193A	HP	171402242			SEP-2005
HP493A #2	4.0-8.0GI		193A	HP	449-00562			SEP-2005
HP495A	7.0-12.0G	SHZ HP4	195A	HP	904-00237	00086	28-	SEP-2005
FIELD	RANGE	N.	IN		MFR	SN	ASSET	CALIBRATION DUE
PROBES								
RED	0.01-1000N		1422		OLADAY	90369	00031	20-MAY-2005
GREEN	0.01-1000N	1Hz HI-4	1422	Н	OLADAY	97363	00136	05-AUG-2005
SIGNAL GENER	RATORS	RANGE	MN		MfR	SN	ASSET	CALIBRATION DUE
RED		0.09-2000MHz	HP8648B		HP	3847U0219	92 00366	15-JAN-2005
BLUE		0.1-1000MHz	HP8648A		HP	3426A0054	18 00034	20-JUL-2005
GREEN		0.09-2000MHz	HP8648B		HP	3623A0207	72 00125	10-OCT-2004
ORANGE		0.1-1000MHz	HP8648B		HP	3537A0121		26-MAY-2005
BLACK (TELE	сом)	15MHz	HP33120A		HP	US3600467		12-NOV-2004
YELLOW		15MHz	HP33120A		HP	US360141		26-MAY-2005
BLUE-WHIT		0.1Hz-13MHz	HP3312A HP83752A		HP	1432A0763		09-MAR-2005
SWEEPER	-				HP	3610A0113		04-APR-2005
AM/FM STEREO S	IG. GEN.	0.1-170WHZ	LG3236		LEADER	3687301	00959	03-SEP-2005
<b>5</b>	0	Davios			14	011	A 2057	0
BULK INJECTIO		RANGE	MN		MFR	SN	ASSET	CALIBRATION DUE
GREE	N	0.01-100MHz	95236-		ETS	50215	00118	22-JUN-2005
RED		0.01-100MHz	95236-	1	ETS	34026	1020	07-JUL-2005
CDN NETW	ORKS	RANGE		MN				CALIBRATION DUE
BLACK		0.10-100MHz		20A M			0783	22-JUN-2005
BLUE	_	0.10-100MHz		15A M			0806	22-JUN-2005
ORANGE		0.10-100MHz		15A M-			0786	22-JUN-2005
RED White		0.10-100MHz 0.10-100MHz		15A M- 15A M-			0780 0782	22-JUN-2005 22-JUN-2005
YELLOW-BL	<b>ACK</b>	0.10-100MHz		15A M-			0782 0784	22-JUN-2005 22-JUN-2005
BLUE-BLA		0.10-100MHz		15A M	-		0781	22-JUN-2005 22-JUN-2005
GREEN		0.10-100MHz		30A M			0779	22-JUN-2005
YELLOW		0.10-100MHz		30A M-			0804	22-JUN-2005
BLUE-WHI		0.10-100MHz		15A M-			0788	22-JUN-2005
YELLOW (R	ES)	0.10-100MHz		2 RESIST	-		0810	28-SEP-2005
GREEN (RE		0.10-100MHz	1000	RESIST	or <b>N</b> wk	C-S 0	0785	09-MAR-2005
Oscillo		M		MF	₹	SN	Asset	CALIBRATION DUE
Oscillosco	PE 100MHz	TDS	220	TEKTRO	XINC	B068748	00885	02-JUN-2005
OSCILLOSCOPE 1			340	TEKTRO	XINC	B012357	00737	16-OCT-2004
OSCILLOSCOPE 1	00MHZ (TELEC	сом) 5464	5A	HP		US36320452	00103	02-JUL-2005
RMS VOLTMET	TERS/CURRE	ENT CLAMP	MN	M	NFR	SN	Asset	CALIBRATION DUE
	MS MULTIME		79111		LUKE	71700298	00769	15-OCT-2004
	MS MULTIME		177		UKE	83390024	00973	08-MAR-2005
TRUE-RMS MU			177		UKE	83390025	00974	08-MAR-2005
TRUE-RMS N			177		UKE	83430419	00975	08-MAR-2005
TRUE-RMS (	CLAMP METER	R (SAFETY)	36	Fı	UKE	68805882	00700	05-MAR-2005

Surge Generators		MN		MFR SN		ASSET	CALIBRATION DUE
TRANSIENT WAVEFORM MONITOR			TWM-5 CDI		003982	00323	17-JUN-2005
Universal Surge Generator			M5 C		003966	00324	09-JUN-2005
THREE PHASE COUPLING N	WK	3CN		CDI	003455	00325	09-JUN-2005
1.2x50uS Plugin Modul	.E	1.2x50uS Plugin		CDI	N/A	00842	09-JUN-2005
10x160uS Plugin Modul	.E	10x160	10x160uS Plugin		N/A	00843	09-JUN-2005
10x560uS Plugin Modul			10x560uS PLUGIN		N/A	00841	09-JUN-2005
10x700uS Plugin Module w/ Exte			10x700uS Plugin		N/A	00844/845	23-JUN-2005
PSURGE CONTROLLER MODULE			PSURGE 8000		Y 150267	00879	11-JUN-2005
COUPLING/DECOUPLING MODULE			PSD 900		Y 149213	08800	11-JUN-2005
IMPULSE MODULE			M 900	HAEFEL C-S		00881	11-JUN-2005
HIGH VOLTAGE CAP NWK 5KVDC, 18μF			CS-HVCC		01	00772	28-SEP-2006
NEBS Surge Generato	R		N/A	C-S	N/A	88000	17-JUN-2005
2x10uS Surge Generato			(10∪S	C-S	N/A	00846	23-JUN-2005
10x700uS Surge General		10>	(700uS	C-S	N/A	00847	17-JUN-2005
12 Pair Surge Resistor Mo	DULE		N/A	C-S	N/A	00768	28-SEP-2005
POWER SUPPLIES	MN	N	∕lFR		SN	ASSET	CALIBRATION DUE
10001i/2 AC POWER SYSTEM (2	) 5001	CALIFORNIA	INSTRUMENTS	HK	(53687/HK53688	00376	16-JUL-2005
	<u>,                                      </u>						
Power/Noise Meters		MN	MFR		SN	ASSET	CALIBRATION DUE
Power Meter		435B	HP		2445A11012	00773	07-APR-2005
POWER SENSOR		8481A	HP		2702A61351	00774	07-APR-2005
PSOPHOMETER		2429	BRUEL & KJ	AER	1237642	00585	18-FEB-2005
TRANSMISSION LINE TESTER (DBR	NC)	185T	AMREL		998658	00823	08-MAR-2005
	,,						
OVERVOLTAGE CHAMBERS	MN	MFR		S	SN	ASSET	CALIBRATION DUE
72kW Power Fault Simulator	OV1	C-S	N/A		00792	31-MAR-2005	
POWER FAULT SIMULATOR	OV2	C-S	N/A		00116	31-MAR-2005	
1 OWER TABLE DIMIDLATOR OVE 0-0 IN/A 00110 S1-WAR-2003							01 111/11 2000
DIPOLE TAPE MEASURES	N	IN	MFR		SN	ASSET	CALIBRATION DUE
26FT TAPE #1		CME	LUFKIN		C3166-1	00776	26-FEB-2005
26FT TAPE #1		CME	LUFKIN		C3166-2	00777	26-FEB-2005
201117112 #2	2000	ONE	LOTKIN		03100 2	00777	201 LD 2003
METEOROLOGICAL METERS		MN		MFR	SN	ASSET	CALIBRATION DUE
TEMP./HUMIDITY/ATM. PRESSURE	=					00965	
GAUGE	74	100 PERCEPT	ION II	Davis	N/A	00000	19-JAN-2005
TEMPERATURE /HUMIDITY GAUGE		THG-912		HUGER	4000562	00789	08-JAN-2005
TRACEABLE CLOCKS MN		IN	MFR		SN	ASSET	CALIBRATION DUE
5003	50	03	CONTROL CO	MPANY	99026940	00808	09-DEC-2004
CONSUMABLES	S	SPEC. MFR		STOCK/MN		ASSET	CALIBRATION DUE
NEBS CHEESECLOTH		28M/KG			ACC-01	N/A	N/A
NEBS CARBON BLOCK		P 1KV SURGE	· · · · · · · · · · · · · · · · · · ·		3AB	N/A	N/A
	0 0/1	000L	ILLIADE	_	O, 12	1 4/ / 1	1 1// 1

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

## Terms And Conditions

### Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

### Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.

  Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of
- the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- Designate a person who is authorized to receive copies of LABORATORY's reports.
- Undertake the following:
  - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the
  - equipment proposed to require technical services, together with any relevant data.
    (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

### Paragraph 3. GENERAL CONDITIONS:

- LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.

  THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED
- HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.

  The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.

  The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample
- 3.7 to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.

  The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of
- test data.
- It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

### Paragraph 4. INSURANCE:

- LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.

  No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any
- other party's responsibility for damages resulting from their operations or for furnishing work and materials.

### Paragraph 5. PAYMENT:

- CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.
- CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT. Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

### Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY. CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

## A2LA Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999
--

CURTIS-STRAUS1 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880

ELECTRICAL.

Valid until: July 31, 2005

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC), Telecommunications, and Product Safety tests:

Radiated emissions testing (electric and magnetic fields); Conducted emissions testing (voltage and current); Electrostatic Discharge testing; Electrical Fast Transient testing; Radiated Immunity testing; Conducted Immunity testing; Lightning Immunity testing; Voltage Dips, Interrupts and Voltage Variations testing; Magnetic Immunity testing; RP Ower measurements; Frequency, Stability measurements; Longitudial Induction measurements; Harmonic emissions testing; Light flicker testing; Low frequency disturbance voltage testing; Disturbance Power

Digital apparatus

Title

EMC Standards

CNS13438 1994

CISPR 22 1997 with amendments 1 and 2

FN55022-1994 and 1998

SABS CISPR 22:1997 Canada ICES-003 1997

AS/NZS 3548 1995

CISPR 11 1990, 1997, 1999

characteristics of information technology equipment. Limits and methods of measurement of radio interference characteristics of information technology equipment.

Limits and methods of measurement of radio disturbance Limits and methods of measurement of radio disturbance characteristics of information technology equipment. Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

Australian/New Zealand Standard Limits and methods of ement of radio disturbance characteristics of informati technology equipment
Limits and methods of measurement of electromagnetic

disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.

 $^{\rm l}$  Note: This accreditation covers testing performed at the laboratory listed above and the satellite facility located at 168 Ayer Rd, Littleton, MA 01460

(A2LA Cert. No. 1627-01) 10/31/03 CISPR 14-2 1996, 1997 + A1:2001

CISPR 20: 1995, 2002 with amendment 3

Election agreet immunity of induces receivers and Associated equipment. Information technology equipment – Immunity characteristics – Limits and methods of measurement Information technology equipment – Immunity characteristics –

European Union Basic EMC Standards EN 61000-4-2: 1995, 1999, 2001

EN 61000-4-3:1997, 1998, 2002 AS/NZS 61000.4.3 1999

EN 61000-4-4 1995

EN 55020: 1995, 2002

(associated group only) CISPR 24

SABS CISPR 24 1997

AS/NZS 3200.1.2: 1995

EN 61000-4-5 1995 AS/NZS 61000.4.5 1999 EN 61000-4-6 1996 AS/NZS 61000.4.6 1999

EN 61000-4-8 1994

EN 61000-4-11 1994

ENV 61000-2-2 1993

EU Product Family Standards EN 50081-1 1992

EN 50081-2 1993

EN 50082-1 1992, 1998 EN 50082-2 1995

Immunity requirements for household appliances, tools and

similar apparatus.

Limits and methods of measurement of immunity characteristics of sound and television broadcast receivers and associated

equipment. Electromagnetic immunity of broadcast receivers and

Limits and methods of measurement Approval and test specification – Medical electrical Equipn – General requirements for safety – Collateral Standard: Electromagnetic compatibility – Requirements and tests.

Electromagnetic compatibility (EMC). Part 4: Testing and Electromagnetic compatibility (EMC.). Part 4: Testing and measurement techniques. Section 2: Electrostatic discharge immunity test – Basic EMC Publication Electromagnetic compatibility (EMC.). Part 4: Testing and measurement techniques. Section 3: Radiated, radio-frequency, electromagnetic field immunity test

Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 4: Electrical fast transient/burst immunity test – Basic EMC publication (EMC) Part 4: Testing and measurement techniques. Section 5: Surge immunity test. Electromagnetic compatibility (EMC). Part 4: Testing

and measurement techniques. Section 6: Immunity to conducted disturbances, induce by radio-frequency fields. Electromagnetic compatibility (EMC). Part 4: Testing and measurement techniques. Section 8: Power frequency magnetic

field immunity test. (EMC) Part 4: Testing and measurement techniques. Section 11:

Voltage dips, short interruptions and voltage Variations immunity tests. Electromagnetic compatibility (EMC). Part 2: Environment, Section 2: Compatibility levels for low-frequency conducted disturbances and signaling in public low-voltage power supply systems (IEC 1000-2-2:1990)

Electromagnetic capability – Generic emission standard. Part 1: Residential, commercial and light industry. (I.S.) Electromagnetic compatibility - Generic emission standard. Part 2: Industrial environment

2: Industria environment Electromagnetic compatibility – Generic emission standard. Part 1: Residential, commercial and light industry Electromagnetic compatibility – Generic immunity Standard. Part 2: Industrial environment

Page 3 of 11 (A2LA Cert. No. 1627-01) 10/31/03

EN 55011 1991, 1998 Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio

frequency equipment.

Industrial, scientific and medical (ISM) radio-frequency equipment —

Electromagnetic disturbance characteristics Limits and methods of measurement Industrial, scientific and medical radio frequency generators

Industrial, Scientific and Medical Instrument Limits and methods of measurement of electromagnetic disturbance

Limits and methods of measurement of electromagnetic distributions characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.

Electromagnetic Emission from Data Processing Equipment and

Electronic Office Machines Limits and methods of measurement of radio interference CISPR 13:1996, 1998, 2001

characteristics of sound and television broadcast receivers and EN 55013: 1990, 2001

characteristics of sound and delevision broadcast receivers and associated equipment. Sound and television broadcast receivers and associated equipment: Electromagnetic compatibility. Part 1: Specification for limits and methods of measurement of radio disturbance characteristics of

methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment. Amendment 12 Limits and methods of measurement of radio interference EN 55013 Amend 12 1994

SABS CISPR 13: 1996 characteristics of sound and television broadcast receivers and

associated equipment.

Broadcast receiver and associated equipment Limits and methods of measurement of radio interference characteristics of sound and television broadcast receivers and associated equipment. CNS 13439 AS/NZS 1053: 1999

CISPR 14 1993 Limits and methods of measurement of radio disturbance Limits and mentions on measurement of radio disturbance for household and similar purposes, electric tools and electric apparatus. Limits and methods of measurement of radio disturbance (except characteristics of electrical motor- operated and thermal appliances for household and similar purposes, electric tools and similar electric (except discontinuous disturbances) EN 55014 1993, 1997

discontinuous disturbances) AS/NZS 1044: 1995 Limits and methods of measurement of radio disturbance (except

characteristics of electrical motor- operated and thermal appliance household and similar purposes, electric tools and similar electric

Immunity CNS13783-1 SABS CISPR 14-1 1993

Household Electrical Appliances Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 1: Emission – Product family standard

Product family standard

Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus Part 2: Immunity -SABS CISPR 14-2 1997 + A1:2001

Product family standard

(A2LA Cert. No. 1627-01) 10/31/03 Page 2 of 11

SABS CISPR 11:1997

Canada ICES-001 1998 CNS13803

AS/NZS 2064: 1997

CSA C108.8 - M1983

EN 61000-6-1: 1997, 2001 Electromagnetic Compatibility (EMC)- Part 6: Generic standards-

environments
Electromagnetic Compatibility (EMC)- Part 6: Generic standards-EN 61000-6-2: 1998, 2001

Section 2: Immunity for industrial environments Specification for Uninterruptible Power Systems (UPS). Part 2: EMC EN 50091-2 1996

specimental on Uninerrupture Fower Systems (CF3), Fait 2: Earc requirements Information technology equipment – Immunity Characteristics – Limits and methods of measurement. Electromagnetic Compatibility – Product family standard for audio, EN 55024 1998

EN 55103-1 1997 video, audio-visual and entertainment lighting control apparatus for rofessional use. Part 1: Emission EN 55103-2 1997

professional use. Frait 1. Emission
Electromagnetic Compatibility – Product family standard for audio,
video, audio-visual and entertainment lighting control professional use.
Part 2: Immunity

Electrical equipment for measurement, control and laboratory use – EN 61326 1998 EMC requirements EN 61547 1996

Ende equations of general lighting purposes – EMC immunity requirements
Alarm Systems. Part 4: Electromagnetic compatibility. Product family standard: Immunity requirements for components of fire, intruder and EN 50130-4 1996

social alarm systems. EN 55104 1995 EN 50083-2 1995

social alarm systems.

Electromagnetic compatibility immunity – requirements for household appliances, tools and similar apparatus. Product family standard. Cabled distribution systems for television and sound signals. Part 2: Electromagnetic compatibility for equipment.

Medical electrical equipment Part 1: general requirements for safety Section 2: Collateral standard: Electromagnetic compatibility – EN 60601-1-2: 1993, 2002

Section 2: Collateral standard: Electromagnetic compatibility – requirements and tests Adjustable speed electrical power drive systems. Part 3: EMC product standard including specific test methods. Disturbances in supply systems caused by household appliances and similar electrical equipment. Part 2: Harmonics IEC 1800-3 1995 EN 60555 Part 2 1987

EN 60555 Part 3 1987 Disturbances in supply systems caused by household appliances and Similar electrical equipment. Part 3: Voltage fluctuations.
Electromagnetic compatibility (EMC). Part 3: Limits Section 2: Limits for harmonic current emissions Electromagnetic compatibility (EMC). Part 3: Limits Section 2: EN 61000-3-2; 1995, 2000

AS/NZS 61000.3.2 1998 EN 61000-3-3 1995 AS/NZS 61000.3.3 1999 Limitation of voltage fluctuations and flicker in low-voltage supply

Systems. Equipment Engineering (EE); Public telecommunication network equipment electro-magnetic compatibility (EMC) requirements Product family overview, compliance criteria and test levels ETS 300 386-1 1994

Page 4 of 11 (A2LA Cert. No. 1627-01) 10/31/03

### FCC ID:SRMT11006740

ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1	Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family	EN 300 328-2:2001 v1.2.1	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential
ETS 300 132-1 1996	standard.  Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by	EN 301 489-1:2002	requirements under article 3.2 of the R&TTE Directive Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment
ETS 300 132-2 1996	alternating current (ac) derived from direct current (dc) sources Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by	EN 60669-2-1:2002	and services; Part 1: Common technical requirements Switches for household and similar fixed electrical installations Part 2-1: Particular requirements Electronic switches
ETR 283 1997	direct current (dc) Equipment Engineering (EE): Transient voltages at Interface A on telecommunications direct current (DC) power distributions.	Canada Radio Standards Canadian GL-36 1995	Industry Canada – technical requirements for low power Devices in the 2400 – 2483.5 MHz band.
EU radio standards		Canadian RSS-119 1999, 2000 Issue 6	Industry Canada - Land mobile and fixed radio Transmitters and
(ETS) EN 300 385 v1.2.1: 1998, 1999	Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for	Canadian RSS-134 1996 & 2000, Issue 1	receivers, 27.41 to 960.0 MHz Industry Canada – 900 MHz narrowband personal communications
EN 300 330 v1.2.1: 1998, 1999	fixed radio links and ancillary equipment (ETS) Electromagnetic compatibility and Radio spectrum matters	Rev 1 Canadian RSS-210 2000 Issue 3,	services Industry Canada – Low power license-exempt radio 2001 Issue 5
	(ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz	RFS29 1998	communication devices Specification for Restricted Radiation Radio Apparatus (New Zealand)
ETS 300 328 1996	to 30 MHz Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data	FCC Standards 47 CFR FCC low power transmitters operating on frequencies below 1 GHz,	Scope AI
	transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques	emergency alert systems, unintentional radiators and ISM devices.	
ETS EN 300 440 v1.2.1 1999	Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 Ghz to 40 Ghz	47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum	Scope A2
EN 301 893:2002	frequency range Broadband Radio Access Networks (BRAN); 5 GHz (draft)	devices.  47 CFR FCC Unlicensed Personal Scope	A 2
v1.2.1	high performance RLAN; Harmonized EN covering Essential	Communications System (PCS) devices	
ETS 300 836-1:1998	requirements of article 3.2 of the R&TTE Directive Broadband Radio Access Networks (BRAN); High Performance	47 CFR FCC Unlicensed National Scope Information Infrastructure devices and	Α4
	Radio Local Area Network (HIPERLAN) Type I; Conformance testing specification; Part 1: Radio Type approval and Radio	low power transmitters using spread spectrum techniques.	
EN301 489-17:2002	Frequency (RF) conformance test specification Electromagnetic compatibility and Radio spectrum Matters	47 CFR FCC Personal mobile Scope Radio Services in the following FCC	B1
v1.2.1	(ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for	Rule Parts 22, 24, 25, 27. 47 CFR FCC General Mobile Radio	B2
	2,4 GHz wideband transmission systems and 5 GHz high	Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97.	
	performance RLAN equipment	47 CFR FCC Maritime and Aviation	В3
		Scope RadioServices in 47 CFR Parts 80 and 87	
		47 CFR FCC Microwave Radio Services Scope in 47 CFR Parts 21, 74 and 101.	B4
(A2LA Cert. No. 1627-01) 10/31/03	Page 5 of 11	(A2LA Cert. No. 1627-01) 10/31/03	Page 6 of 11
ECC/OCT MD 5 1007	FOOT LIGHT STATE OF THE LOS	TIA TIA IC 0/0	The second of th
FCC/OST MP-5 1986	FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific	TIA/EIA-IS-968	Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone
GR-1089-CORE: 1997, 1999 issue 2/	and medical equipment.  Bellcore electromagnetic compatibility and electrical safety –	TIA/EIA-IS-883	Network Telecommunications Telephone Terminal Equipment Supplemental
2002 Issue 3	Generic criteria for network telecommunications equipment.		Technical Requirements for Connection of Stutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network
ANSI EMC Standards ANSI C63.4: 1992, 1999, 2001, 2003	American National Standard for methods of measurement of	TIA-968-A	Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone
,,,,,	radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz.	T1.TRQ.6-2001	Network Technical Requirements for SHDSL, HDSL2, HDSL4 Digital
ANSI C63.5 1988	American National Standard for electromagnetic compatibility -	11.1KQ.0-2001	Subscriber Line Terminal Equipment to Prevent Harm to the Telephone
	radiated emissions measurements in electromagnetic interference (EMI) control – calibration of antennas.	Canada VDSL	Network Industry Terminal Attachment Program Requirements and Test Methods for
IEEE EMC Standards		Issue 1 January 2003	Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment
IEEE C62.41: 1980, 1991	IEEE recommended practice on surge voltages in low-voltage AC power circuits	AS/ACIF S002-2001	Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone
Swedish EMC Standards		AS/ACIF S016-2001	Network Requirements for Customer Equipment for connection to hierarchical
BAKOM 3336.3 1995	Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document	AS/ACIF S031-2001	digital interfaces Requirements for ISDN Basic Access Interface
	information over the OFCOM requirements.	AS/ACIF S038-2001 AS/ACIF S043-2001	Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic
South African EMC standards other than CIS SABS 1718-1: 1996	PR equivalents South African Bureau of Standards: Specification for Gaming		Local Loop Interface of a Telecommunications Network — Part 1: General
	equipment. Part 1: Casino equipment.		Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband
Japanese VCCI Standards	To be I Do a form of	ITU-T G.703	Physical/electrical characteristics of hierarchical Digital interfaces
VCCI V-3/99.05 1999 VCCI V-4/99.05 1999	Technical Requirements Instruction for Test Conditions for Requirement under Test	HKTA 2028	Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s
		HKTA 2029	Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s
Telecommunications Telecommunications Registration; General te	st methods; Lightning surge; Drop testing; Balance testing; Signal	TBR 1: 1995	Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT
power (metallic and longitudinal); Frequency	measurements; Pulse templates; Leakage testing; Impedance cluding volume control); Protocol analysis and Jitter testing.		Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation
Telecom Standards			X.21 but operating at any data signaling rate up to, and including,
	Title	TBR 2: 1997	1 984 kbit/s Attachment requirements for Data Terminal Equipment (DTE) to
FCC 47 CFR Part 68 Telephone	Connection of terminal equipment to the telephone Terminal Equipment network. Analog and Digital Equipment. TCB Scope		connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1
CS-03 Issue 8 1996 through amendment 5	C1. Specification for terminal equipment, terminal systems,		920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit
TIA/EIA TSB31-B 1998	Network protection devices, connection arrangements and hearing aids compatibility. Bulletin Part 68 Rationale and Measurement Guidelines (Feb		
(A2LA Cert. No. 1627-01) 10/31/03	1998)		
	Page 7 of 11	(A2LA Cert. No. 1627-01)	10/31/03 Page 8 of 11

### FCC ID:SRMT11006740

TBR 3: 1995 + Amdt: 1997 Integrated Services Digital Network (ISDN); Attachment IEC 60950 2000 Safety of information technology equipment EN 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 requirements for terminal equipment to connect to an ISDN Safety of information technology equipment, including using ISDN basic access
Integrated Services Digital Network (ISDN); Attachment
requirements for terminal equipment to connect to an ISDN Electrical business equipment UL 60950-1 2001 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993 TBR 4: 1995 + Amdt: 1997 using ISDN primary rate access TBR 012 : 1993 + Amdt : 1996 Business Telecommunications (BT); Open Network Provision Approval and test specification - Safety of information technology Approval and test specification – Safety of information technology equipment including electrical business Equipment.

Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993)

Australian Communications Authority – Safety requirements for (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal AS/NZS 3260 Supp 1 1996 reased line (D2048U) Attachment requirements for terminal equipment
Business TeleCommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for TBR 013: 1996 ACA TS 001 1997 terminal equipment interface customer equipment. customer equipment.
Telephone Equipment
Safety requirements for electrical equipment for measurement, control
and laboratory use, Part 1: General requirements.
Safety requirements for electrical equipment for measurement, control
and laboratory use, Part 1: General requirements. terminal equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network TBR 21: 1998 UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling Business TeleCommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface IEC 61010-1 2001 UL 61010B-1 2003 UL 3101-1 1993 CAN/CSA 1010-1 1999 (Including AM 2) UL 3111-1 1996 UL 3121-1 1995 IEC 60601-1 1995 TBR 24: 1997 Electrical equipment for laboratory use Part 1: General requirements. Electrical measuring and test equipment. Part 1: General requirements. Medical electrical equipment, Part 1: General requirements for safety. Medical electrical equipment. Fart 1: General requirements for safety. Medical electrical equipment. Part 1: General Requirements for safety. Audio, video and similar electronic apparatus – Safety requirements Audio/video and musical instrument apparatus for TS 002 : 1997 Analogue Interworking and Non interference Requirements for EN 60601-1 1995 (Including AM 2) Customer Equipment Connected to the Public Switched
Telephone Network
General Requirements for Customer Equipment Connected to UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 TS 016: 1997 Oeneral Requirements for Usstomer Equipment Connected to Hierarchical Digital Interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband Additional CAN/CSA 60065-00 AS/NZS 3250 1995 TS 031: 1997 AS/NZS 60065 2000 AS/ACIF S043.2:2001 Canadian C22.2 No. 1-94 (1-98) EN 60065 1994 Safety requirements for main operated electronic and related apparatus Safety requirements for main operated electronic and related apparatus for household and similar general use. Radiation safety of laser products, equipment Classification, requirements and user's guide Safety of laser products Part 1: equipment Classification, requirements and user's guide. Safety of laser products - Part 2: Safety of optical communication Product Safety Fround Supery
General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests;
Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing
tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current
measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power IEC 60825 1990 EN 60825-1 1994 IEC 60825-1 2001 IEC 60825-2 2000-5 cross tests (excluding x-ray tests). IEC 60825-4 1997-11 Safety of laser products – Part 4: Laser guards
IEC 60335-1 1995 Safety of household and similar electrical appliances
(Including AMZ – 1997 & AM 12 – 1997) Part 1: General requirements
EN 60335-1 2001
UL 60335-1 1998
(CANCEN ESCRETARY) Product Safety Standards Specific Product Safety Standards IEC 950 1991 Safety of information technology equipment including Includes Amendments 1, 2, 3, and 4 electrical business equipment UL 1950 1998 Safety of information technology equipment, including CAN/CSA E335-1 1994 Safety of Information Technology Equipment, Including lectrical business equipment. Safety of Information Technology Equipment (UL 1950) Safety of information technology equipment (A2LA Cert. No. 1627-01) 10/31/03 (A2LA Cert. No. 1627-01) 10/31/03 Page 9 of 11 Page 10 of 11 UL 61010A-1: 2002 Electrical equipment for laboratory use; part 1: General requirements
Safety requirements for electrical equipment for measurement,
control, and laboratory use - Part 1: General requirements
Safety information technology equipment EN 61010-1: 2001 AS/NZS 60950 : 2000 Environmental 1 Environmental Standards GR-63-CORE ETS 300 019 <u>Title</u>
NEBS Requirements: Physical Protection
Environmental conditions and environmental tests For (vibration up to 1000Hz) telecommunications equipment <sup>2</sup> Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460 (A2LA Cert. No. 1627-01) 10/31/03 Page 11 of 11