



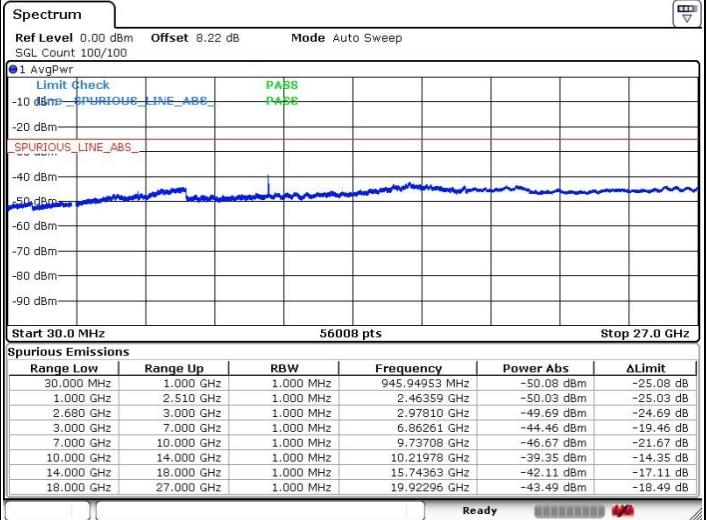

LTE Band 41 / 20MHz+20MHz

Lowest Channel / QPSK

Lowest Channel / 16QAM

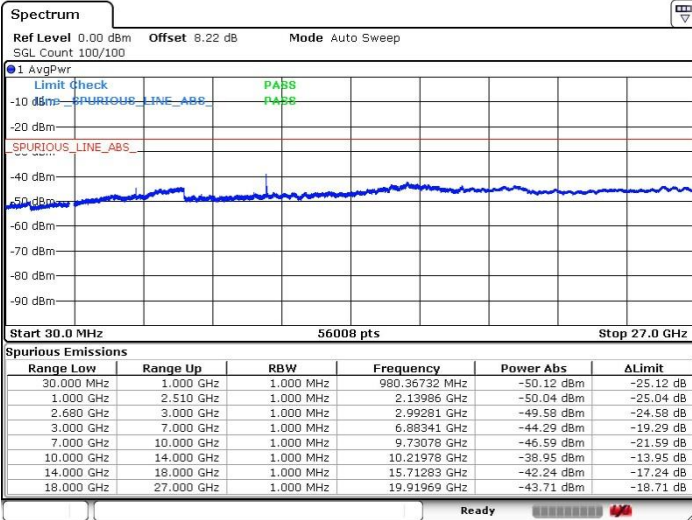


Date: 20 JUL 2019 18:48:26

Date: 20 JUL 2019 18:47:19

Lowest Channel / 64QAM

N/A

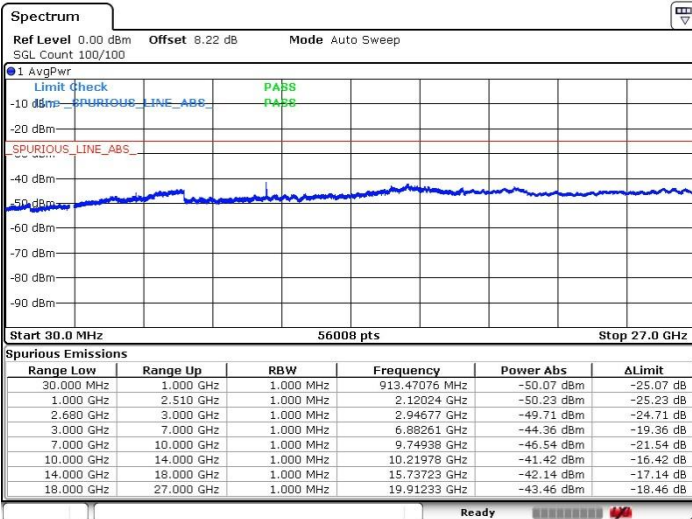


Date: 20 JUL 2019 18:46:05




LTE Band 41 / 20MHz+20MHz

MiddleChannel / QPSK

Middle Channel / 16QAM

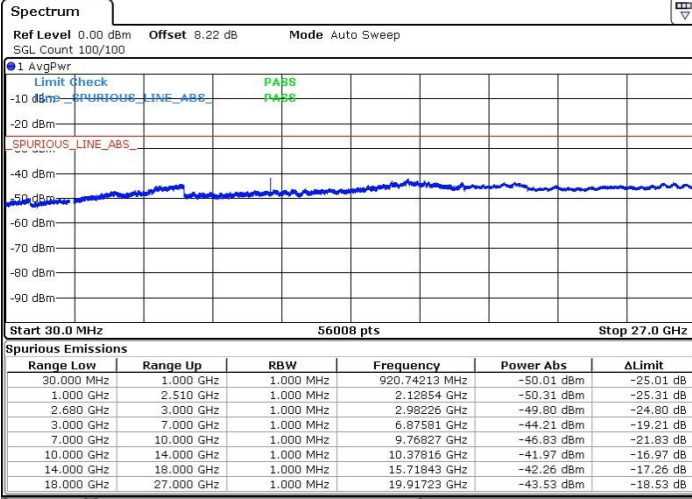


Date: 20 JUL 2019 18:40:45

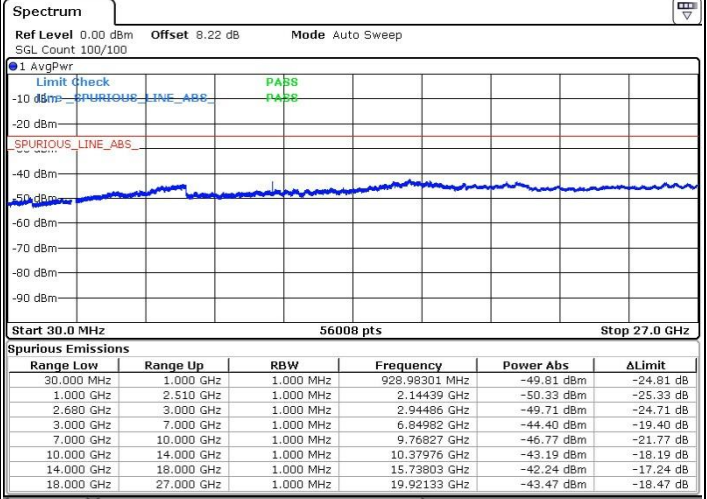

Date: 20 JUL 2019 18:41:50

Middle Channel / 64QAM

N/A

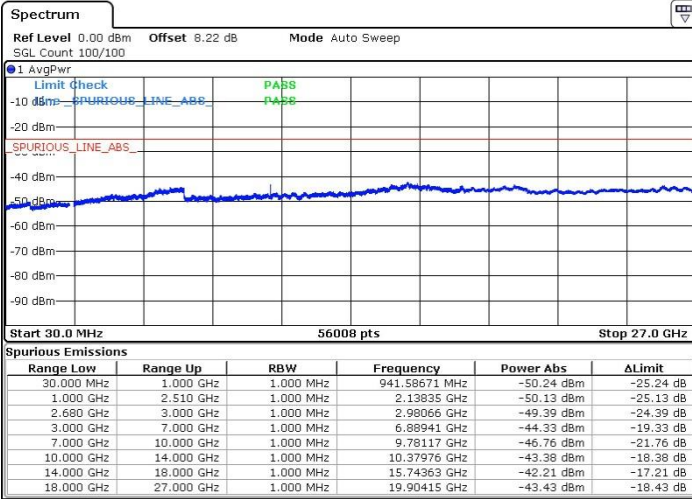



Date: 20 JUL 2019 18:42:48



LTE Band 41 / 20MHz+20MHz

Highest Channel / QPSK

Highest Channel / 16QAM

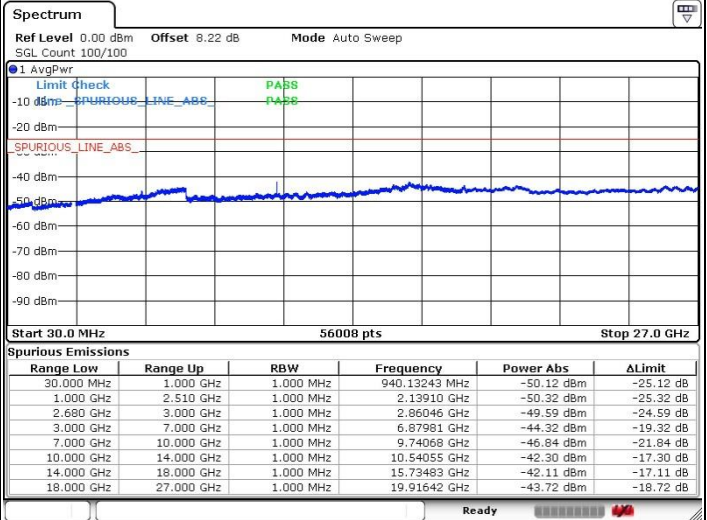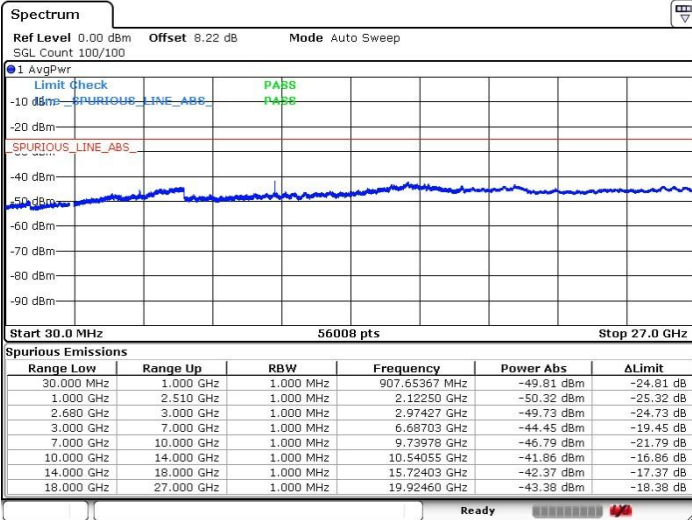


Date: 20 JUL 2019 18:39:20

Date: 20 JUL 2019 18:02:35

Highest Channel / 64QAM

N/A

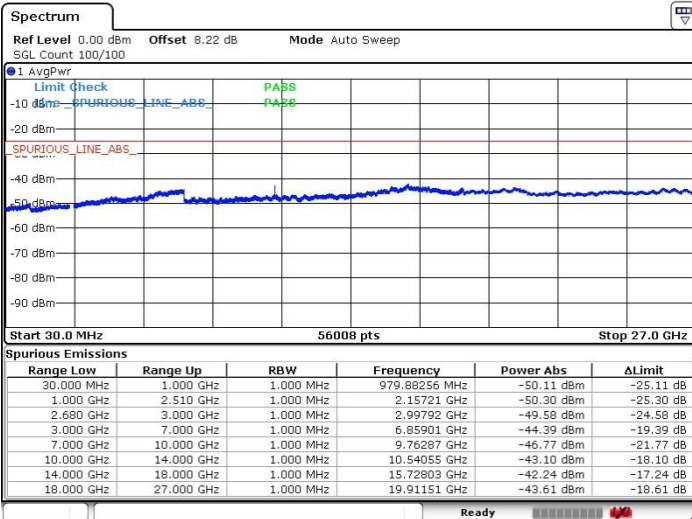

Date: 20 JUL 2019 18:00:20



Frequency Stability

Test Conditions		LTE Band 7 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0023	PASS
40	Normal Voltage	0.0028	
30	Normal Voltage	0.0007	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0019	
0	Normal Voltage	0.0032	
-10	Normal Voltage	0.0001	
-20	Normal Voltage	0.0004	
-30	Normal Voltage	0.0020	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0024	
20	Battery End Point	0.0027	

Note:

1. Normal Voltage = 3.87V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 12 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0010	PASS
40	Normal Voltage	0.0023	
30	Normal Voltage	0.0092	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0100	
0	Normal Voltage	0.0007	
-10	Normal Voltage	0.0024	
-20	Normal Voltage	0.0075	
-30	Normal Voltage	0.0066	
20	Maximum Voltage	0.0010	
20	Normal Voltage	0.0004	
20	Battery End Point	0.0103	

**Note:**

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 13 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0010	PASS
40	Normal Voltage	0.0004	
30	Normal Voltage	0.0047	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0052	
0	Normal Voltage	0.0063	
-10	Normal Voltage	0.0013	
-20	Normal Voltage	0.0060	
-30	Normal Voltage	0.0066	
20	Maximum Voltage	0.0004	
20	Normal Voltage	0.0012	
20	Battery End Point	0.0046	

**Note:**

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 25 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0019	PASS
40	Normal Voltage	0.0014	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0018	
0	Normal Voltage	0.0022	
-10	Normal Voltage	0.0003	
-20	Normal Voltage	0.0002	
-30	Normal Voltage	0.0009	
20	Maximum Voltage	0.0015	
20	Normal Voltage	0.0004	
20	Battery End Point	0.0001	

**Note:**

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage = 4.45V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 26 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0042	PASS
40	Normal Voltage	0.0057	
30	Normal Voltage	0.0020	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0047	
0	Normal Voltage	0.0060	
-10	Normal Voltage	0.0037	
-20	Normal Voltage	0.0002	
-30	Normal Voltage	0.0011	
20	Maximum Voltage	0.0043	
20	Normal Voltage	0.0033	
20	Battery End Point	0.0019	

**Note:**

- 1. Normal Voltage = 3.87V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.45 V.
- 2. Note: The frequency fundamental emissions stay within the authorized frequency block.





Test Conditions		LTE Band 41 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0004	PASS
40	Normal Voltage	0.0021	
30	Normal Voltage	0.0020	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0010	
0	Normal Voltage	0.0014	
-10	Normal Voltage	0.0009	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0013	
20	Maximum Voltage	0.0017	
20	Normal Voltage	0.0008	
20	Battery End Point	0.0007	

**Note:**

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 66 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0001	PASS
40	Normal Voltage	0.0020	
30	Normal Voltage	0.0048	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0056	
0	Normal Voltage	0.0057	
-10	Normal Voltage	0.0053	
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0010	
20	Maximum Voltage	0.0052	
20	Normal Voltage	0.0059	
20	Battery End Point	0.0012	

**Note:**

1. Normal Voltage =3.87 V. ; Battery End Point (BEP) = 3.5V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions		LTE Band 71 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0049	PASS
40	Normal Voltage	0.0031	
30	Normal Voltage	0.0009	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0035	
0	Normal Voltage	0.0025	
-10	Normal Voltage	0.0004	
-20	Normal Voltage	0.0046	
-30	Normal Voltage	0.0019	
20	Maximum Voltage	0.0041	
20	Normal Voltage	0.0021	
20	Battery End Point	0.0004	

**Note:**

1. Normal Voltage = 3.87V. ; Battery End Point (BEP) =3.5 V. ; Maximum Voltage =4.45 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



# Appendix B. Test Results of Radiated Test

## Radiated Spurious Emission

LTE Band 7 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-67.37	-25	-42.37	-77.58	3.03	13.24	H
	7504	-61.07	-25	-36.07	-70.52	3.56	13.01	H
	10000	-37.56	-25	-12.56	-47.08	3.92	13.44	H
	5004	-66.01	-25	-41.01	-76.22	3.03	13.24	V
	7504	-60.42	-25	-35.42	-69.87	3.56	13.01	V
	10000	-38.44	-25	-13.44	-47.96	3.92	13.44	V
Middle	5052	-53.06	-25	-28.06	-63.27	3.03	13.24	H
	7580	-57.29	-25	-32.29	-66.74	3.56	13.01	H
	10100	-36.16	-25	-11.16	-45.68	3.92	13.44	H
	5052	-65.00	-25	-40.00	-75.21	3.03	13.24	V
	7580	-59.78	-25	-34.78	-69.23	3.56	13.01	V
	10100	-40.07	-25	-15.07	-49.59	3.92	13.44	V
Highest	5104	-67.13	-25	-42.13	-77.34	3.03	13.24	H
	7652	-60.90	-25	-35.90	-70.35	3.56	13.01	H
	10200	-36.70	-25	-11.70	-46.22	3.92	13.44	H
	5104	-65.58	-25	-40.58	-75.79	3.03	13.24	V
	7652	-60.42	-25	-35.42	-69.87	3.56	13.01	V
	10200	-42.66	-25	-17.66	-52.18	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 12 / 10MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-69.00	-13	-56.00	-75.97	1.58	10.70	H
	2098	-67.70	-13	-54.70	-75.95	2.102	12.50	H
	2798	-65.23	-13	-52.23	-74.12	2.856	13.90	H
	1400	-69.06	-13	-56.06	-76.03	1.58	10.70	V
	2098	-66.80	-13	-53.80	-75.05	2.10	12.50	V
	2798	-65.08	-13	-52.08	-73.97	2.86	13.90	V
Middle	1406	-67.47	-13	-54.47	-74.44	1.58	10.70	H
	2110	-60.51	-13	-47.51	-68.76	2.102	12.50	H
	2812	-63.90	-13	-50.90	-72.79	2.856	13.90	H
	1406	-68.35	-13	-55.35	-75.32	1.58	10.70	V
	2108	-67.62	-13	-54.62	-75.87	2.10	12.50	V
	2812	-64.28	-13	-51.28	-73.17	2.86	13.90	V
Highest	1412	-69.18	-13	-56.18	-76.15	1.58	10.70	H
	2119	-68.32	-13	-55.32	-76.57	2.102	12.50	H
	2826	-64.19	-13	-51.19	-73.08	2.856	13.90	H
	1413	-69.66	-13	-56.66	-76.63	1.58	10.70	V
	2119	-68.03	-13	-55.03	-76.28	2.10	12.50	V
	2826	-64.00	-13	-51.00	-72.89	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 13 / 5MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1554	-68.38	-13	-55.38	-71.01	1.09	5.87	H
	2331	-66.34	-13	-53.34	-68.74	1.37	5.92	H
	3108	-64.54	-13	-51.54	-68.43	1.64	7.68	H
	1554	-68.40	-13	-55.40	-71.03	1.09	5.87	V
	2332	-66.32	-13	-53.32	-68.72	1.37	5.92	V
	3108	-64.36	-13	-51.36	-68.25	1.64	7.68	V
Middle	1560	-68.15	-42.15	-26.00	-70.78	1.09	5.87	H
	2340	-65.41	-13	-52.41	-67.81	1.37	5.92	H
	3120	-64.82	-13	-51.82	-68.71	1.64	7.68	H
	1560	-68.81	-42.15	-26.66	-71.44	1.09	5.87	V
	2339	-64.95	-13	-51.95	-67.35	1.37	5.92	V
	3120	-64.88	-13	-51.88	-68.77	1.64	7.68	V
Highest	1564	-68.77	-42.15	-26.62	-71.40	1.09	5.87	H
	2346	-65.16	-13	-52.16	-67.56	1.37	5.92	H
	3129	-64.44	-13	-51.44	-68.33	1.64	7.68	H
	1564	-69.21	-42.15	-27.06	-71.84	1.09	5.87	V
	2346	-63.90	-13	-50.90	-66.30	1.37	5.92	V
	3129	-64.53	-13	-51.53	-68.42	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

LTE Band 13 / 10MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1556	-68.37	-13	-55.37	-71.00	1.09	5.87	H
	2332	-62.73	-13	-49.73	-65.13	1.37	5.92	H
	3110	-64.02	-13	-51.02	-67.91	1.64	7.68	H
	1556	-67.85	-13	-54.85	-70.48	1.09	5.87	V
	2332	-66.52	-13	-53.52	-68.92	1.37	5.92	V
	3110	-64.51	-13	-51.51	-68.40	1.64	7.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 25 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-60.42	-13	-47.42	-72.68	2.641	14.90	H
	5553	-57.86	-13	-44.86	-69.72	2.94	14.80	H
	7404	-51.81	-13	-38.81	-61.58	3.39	13.16	H
	3702	-59.87	-13	-46.87	-72.13	2.64	14.90	V
	5553	-57.43	-13	-44.43	-69.29	2.94	14.80	V
	7404	-51.46	-13	-38.46	-61.23	3.39	13.16	V
Middle	3747	-59.53	-13	-46.53	-71.79	2.641	14.90	H
	5622	-42.62	-13	-29.62	-54.48	2.94	14.80	H
	7500	-51.80	-13	-38.80	-61.57	3.39	13.16	H
	3747	-59.01	-13	-46.01	-71.27	2.64	14.90	V
	5622	-37.63	-13	-24.63	-49.49	2.94	14.80	V
	7500	-51.16	-13	-38.16	-60.93	3.39	13.16	V
Highest	3792	-60.13	-13	-47.13	-72.39	2.641	14.90	H
	5688	-57.83	-13	-44.83	-69.69	2.94	14.80	H
	7584	-51.68	-13	-38.68	-61.45	3.39	13.16	H
	3792	-60.10	-13	-47.10	-72.36	2.64	14.90	V
	5688	-57.62	-13	-44.62	-69.48	2.94	14.80	V
	7584	-51.29	-13	-38.29	-61.06	3.39	13.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 26 / 15MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-68.84	-13	-55.84	-75.81	1.58	10.70	H
	2474	-65.42	-13	-52.42	-73.67	2.102	12.50	H
	3300	-65.27	-13	-52.27	-74.16	2.856	13.90	H
	1650	-69.40	-13	-56.40	-76.37	1.58	10.70	V
	2474	-65.17	-13	-52.17	-73.42	2.10	12.50	V
	3300	-64.88	-13	-51.88	-73.77	2.86	13.90	V
Middle	1660	-69.23	-13	-56.23	-76.20	1.58	10.70	H
	2490	-62.31	-13	-49.31	-70.56	2.102	12.50	H
	3318	-64.30	-13	-51.30	-73.19	2.856	13.90	H
	1660	-69.44	-13	-56.44	-76.41	1.58	10.70	V
	2490	-62.59	-13	-49.59	-70.84	2.10	12.50	V
	3318	-64.93	-13	-51.93	-73.82	2.86	13.90	V
Highest	1670	-69.46	-13	-56.46	-76.43	1.58	10.70	H
	2504	-64.96	-13	-51.96	-73.21	2.102	12.50	H
	3342	-64.59	-13	-51.59	-73.48	2.856	13.90	H
	1670	-69.74	-13	-56.74	-76.71	1.58	10.70	V
	2504	-64.33	-13	-51.33	-72.58	2.10	12.50	V
	3342	-64.32	-13	-51.32	-73.21	2.86	13.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





LTE Band 41 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-63.44	-25	-38.44	-73.65	3.03	13.24	H
	7504	-60.94	-25	-35.94	-70.39	3.56	13.01	H
	10000	-35.85	-25	-10.85	-45.37	3.92	13.44	H
	5004	-65.22	-25	-40.22	-75.43	3.03	13.24	V
	7504	-60.47	-25	-35.47	-69.92	3.56	13.01	V
	10000	-37.25	-25	-12.25	-46.77	3.92	13.44	V
Middle	5168	-61.84	-25	-36.84	-72.05	3.03	13.24	H
	7752	-55.28	-25	-30.28	-64.73	3.56	13.01	H
	10340	-37.94	-25	-12.94	-47.46	3.92	13.44	H
	5168	-61.15	-25	-36.15	-71.36	3.03	13.24	V
	7752	-59.68	-25	-34.68	-69.13	3.56	13.01	V
	10340	-42.52	-25	-17.52	-52.04	3.92	13.44	V
Highest	5340	-66.12	-25	-41.12	-76.33	3.03	13.24	H
	8015	-56.03	-25	-31.03	-65.48	3.56	13.01	H
	10683	-45.86	-25	-20.86	-55.38	3.92	13.44	H
	5340	-65.11	-25	-40.11	-75.32	3.03	13.24	V
	8015	-59.48	-25	-34.48	-68.93	3.56	13.01	V
	10683	-50.60	-25	-25.60	-60.12	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 66 / 20MHz / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3423	-62.81	-13	-49.81	-73.55	2.604	13.34	H
	5133	-59.23	-13	-46.23	-69.74	3.011	13.52	H
	6843	-56.27	-13	-43.27	-66.47	3.271	13.47	H
	3422	-62.80	-13	-49.80	-73.54	2.604	13.34	V
	5133	-58.70	-13	-45.70	-69.21	3.011	13.52	V
	6843	-56.16	-13	-43.16	-66.36	3.271	13.47	V
Middle	3471	-61.88	-13	-48.88	-72.62	2.604	13.34	H
	5208	-56.96	-13	-43.96	-67.47	3.011	13.52	H
	6945	-55.23	-13	-42.23	-65.43	3.271	13.47	H
	3471	-62.55	-13	-49.55	-73.29	2.604	13.34	V
	5208	-57.44	-13	-44.44	-67.95	3.011	13.52	V
	6945	-54.75	-13	-41.75	-64.95	3.271	13.47	V
Highest	3522	-62.59	-13	-49.59	-73.33	2.604	13.34	H
	5283	-60.32	-13	-47.32	-70.83	3.011	13.52	H
	7044	-54.16	-13	-41.16	-64.36	3.271	13.47	H
	3522	-62.83	-13	-49.83	-73.57	2.604	13.34	V
	5283	-60.26	-13	-47.26	-70.77	3.011	13.52	V
	7044	-53.99	-13	-40.99	-64.19	3.271	13.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 71 / 20MHz / QPSK								
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-69.02	-13	-56.02	-70.77	1.02	4.92	H
	1992	-67.95	-13	-54.95	-69.92	1.27	5.39	H
	2656	-64.88	-13	-51.88	-67.81	1.49	6.57	H
	1328	-69.02	-13	-56.02	-70.77	1.02	4.92	V
	1992	-68.01	-13	-55.01	-69.98	1.27	5.39	V
	2656	-64.78	-13	-51.78	-67.71	1.49	6.57	V
Middle	1344	-68.69	-13	-55.69	-70.44	1.02	4.92	H
	2014	-68.53	-13	-55.53	-70.50	1.27	5.39	H
	2686	-64.14	-13	-51.14	-67.07	1.49	6.57	H
	1344	-69.09	-13	-56.09	-70.84	1.02	4.92	V
	2014	-68.13	-13	-55.13	-70.10	1.27	5.39	V
	2686	-64.43	-13	-51.43	-67.36	1.49	6.57	V
Highest	1358	-67.78	-13	-54.78	-69.53	1.02	4.92	H
	2037	-68.23	-13	-55.23	-70.20	1.27	5.39	H
	2716	-64.97	-13	-51.97	-67.90	1.49	6.57	H
	1358	-68.56	-13	-55.56	-70.31	1.02	4.92	V
	2037	-68.60	-13	-55.60	-70.57	1.27	5.39	V
	2716	-65.09	-13	-52.09	-68.02	1.49	6.57	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



For CA

LTE Band 7 CA / 20M+20M / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5000	-60.21	-25	-35.21	-68.70	1.83	10.32	H
	7503.27	-62.73	-25	-37.73	-71.74	2.60	11.61	H
	10005	-47.13	-25	-22.13	-57.89	2.67	13.43	H
	5000	-60.68	-25	-35.68	-69.17	1.83	10.32	V
	7503.27	-60.40	-25	-35.40	-69.41	2.60	11.61	V
	10005	-48.76	-25	-23.76	-59.52	2.67	13.43	V
Middle	5030	-56.22	-25	-31.22	-64.71	1.83	10.32	H
	7548.57	-42.75	-25	-17.75	-51.76	2.60	11.61	H
	10065	-35.37	-25	-10.37	-46.13	2.67	13.43	H
	12582	-57.13	-25	-32.13	-67.89	2.67	13.43	H
	5032.38	-59.13	-25	-34.13	-67.62	1.83	10.32	V
	7550	-44.07	-25	-19.07	-53.08	2.60	11.61	V
	10065	-36.34	-25	-11.34	-47.10	2.67	13.43	V
12582	-58.35	-25	-33.35	-69.11	2.67	13.43	V	
Highest	5065.00	-61.98	-25	-36.98	-70.47	1.83	10.32	H
	7593.87	-63.31	-25	-38.31	-72.32	2.60	11.61	H
	10125.00	-44.97	-25	-19.97	-55.73	2.67	13.43	H
	5065.00	-61.28	-25	-36.28	-69.77	1.83	10.32	V
	7593.87	-63.31	-25	-38.31	-72.32	2.60	11.61	V
	10125.00	-48.50	-25	-23.50	-59.26	2.67	13.43	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 41 CA / 20M+20M / QPSK								
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-60.75	-25	-35.75	-70.96	3.03	13.24	H
	7492	-61.60	-25	-36.60	-71.05	3.56	13.01	H
	9988	-36.88	-25	-11.88	-46.40	3.92	13.44	H
	4992	-59.94	-25	-34.94	-70.15	3.03	13.24	V
	7492	-61.13	-25	-36.13	-70.58	3.56	13.01	V
	9988	-41.37	-25	-16.37	-50.89	3.92	13.44	V
Middle	5148	-53.35	-25	-28.35	-63.56	3.03	13.24	H
	7724	-43.98	-25	-18.98	-53.43	3.56	13.01	H
	10296	-31.16	-25	-6.16	-40.68	3.92	13.44	H
	5148	-60.51	-25	-35.51	-70.72	3.03	13.24	V
	7724	-46.16	-25	-21.16	-55.61	3.56	13.01	V
	10296	-33.65	-25	-8.65	-43.17	3.92	13.44	V
Highest	5304	-61.61	-25	-36.61	-71.82	3.03	13.24	H
	7952	-54.80	-25	-29.80	-64.25	3.56	13.01	H
	10604	-47.23	-25	-22.23	-56.75	3.92	13.44	H
	5304	-62.29	-25	-37.29	-72.50	3.03	13.24	V
	7952	-60.26	-25	-35.26	-69.71	3.56	13.01	V
	10604	-49.49	-25	-24.49	-59.01	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.