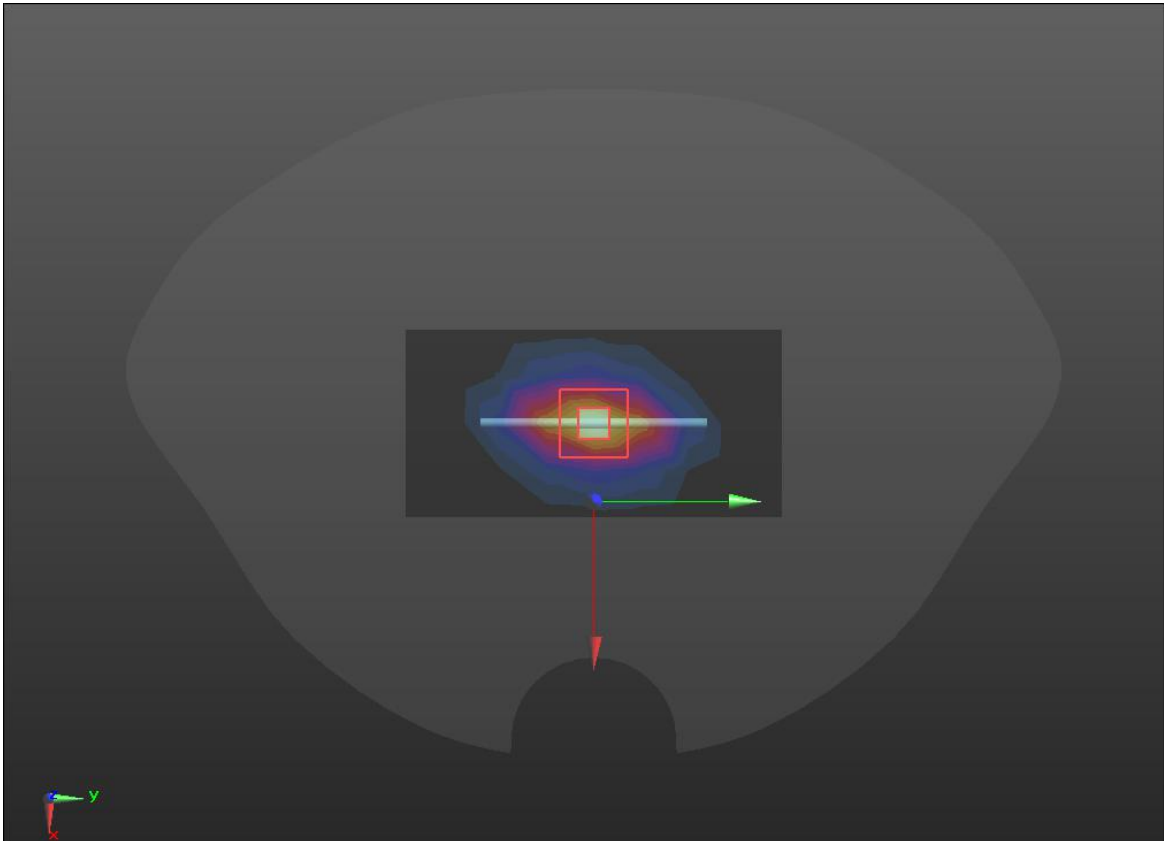
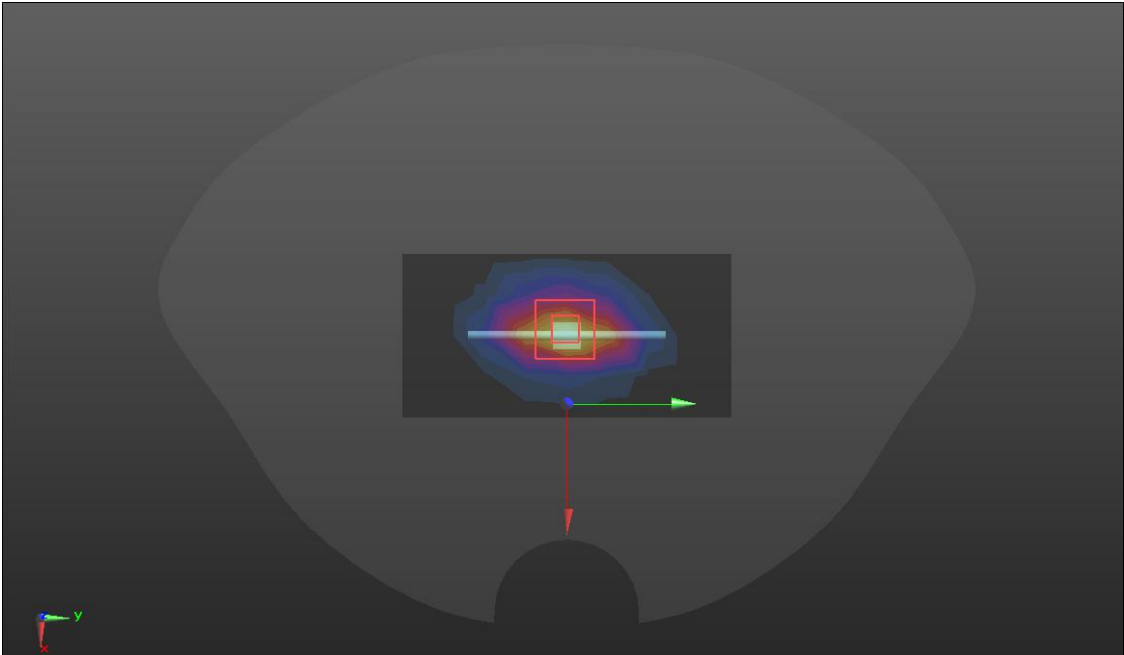


System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.45 \text{ S/m}</math>; <math>\epsilon_r = 40.69</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D1800/Dipole 1800MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 13.9 W/kg</p> <p><b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 105.5 V/m; Power Drift = 0.01 dB            Peak SAR (extrapolated) = 16.8 W/kg  <b>SAR(1 g) = 9.63 W/kg; SAR(10 g) = 5.18 W/kg</b>            Maximum value of SAR (measured) = 15.1 W/kg</p> 	


SRTC performed system check by using 250mw at antenna port

System check	1800MHz
<p>Communication System: UID 0, OFDM (0); Frequency: 1800 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.45 \text{ S/m}</math>; <math>\epsilon_r = 40.69</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) @ 1800 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D1800/Dipole 1800MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 14.3 W/kg</p> <p><b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 107.8 V/m; Power Drift = 0.01 dB            Peak SAR (extrapolated) = 16.7 W/kg  <b>SAR(1 g) = 9.70 W/kg; SAR(10 g) = 5.32 W/kg</b>            Maximum value of SAR (measured) = 15.2 W/kg</p> 	


SRTC performed system check by using 250mw at antenna port

System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.73</math> S/m; <math>\epsilon_r = 39.04</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2450/Dipole 2450MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 19.1 W/kg</p> <p><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 109.6 V/m; Power Drift = 0.04 dB            Peak SAR (extrapolated) = 24.1 W/kg  <b>SAR(1 g) = 13.05 W/kg; SAR(10 g) = 6.25 W/kg</b>            Maximum value of SAR (measured) = 21.3 W/kg</p>	
	


SRTC performed system check by using 250mw at antenna port

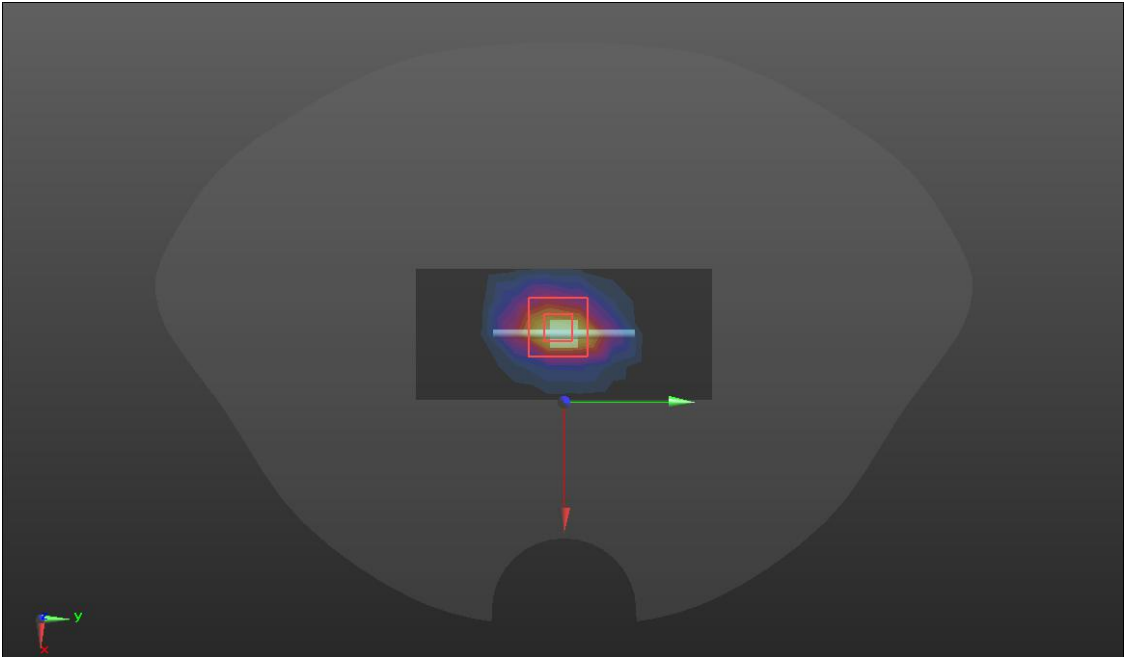System check	2450MHz
<p>Communication System: UID 0, OFDM (0); Frequency: 2450 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.73</math> S/m; <math>\epsilon_r = 39.04</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p>	
<p>Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45) @ 2450 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2450/Dipole 2450MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 107.6 V/m; Power Drift = 0.06 dB            Peak SAR (extrapolated) = 25.1 W/kg  <b>SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.29 W/kg</b>            Maximum value of SAR (measured) = 20.3 W/kg</p>	
	


SRTC performed system check by using 250mw at antenna port

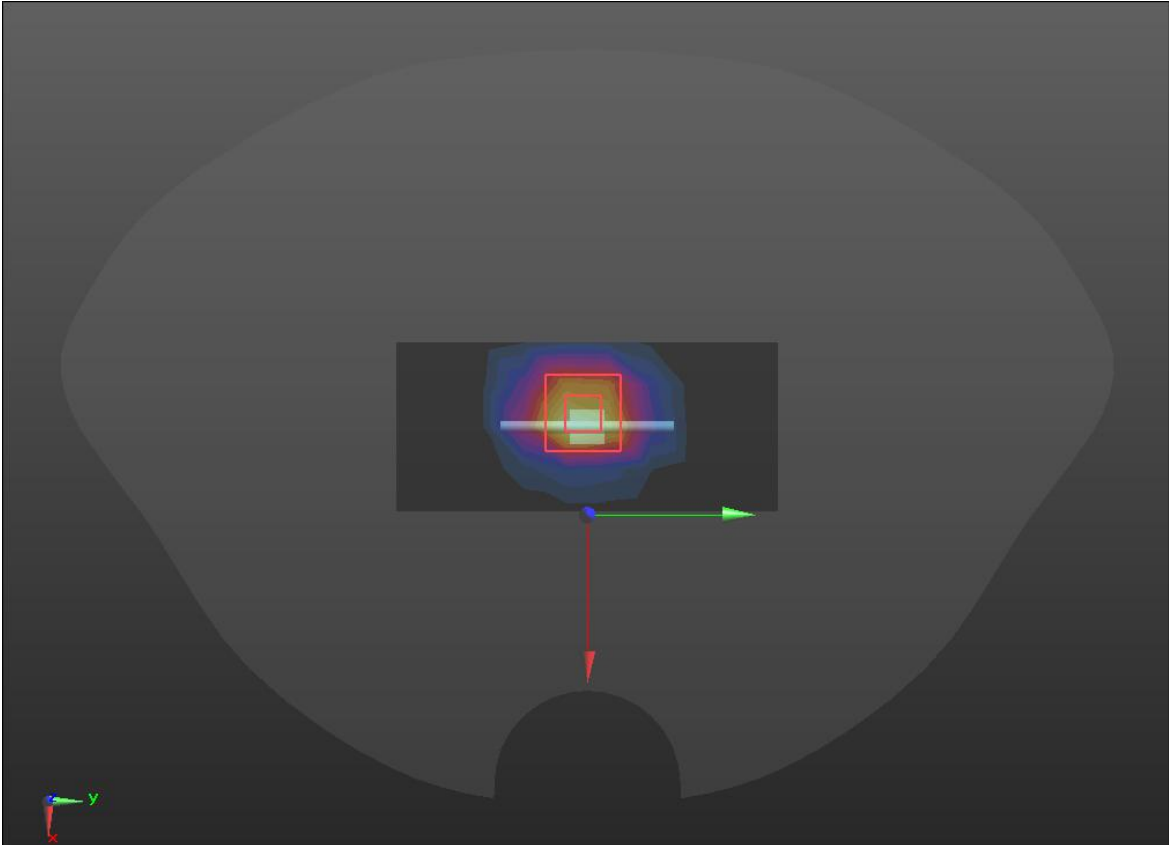System check	2600MHz
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2600 \text{ MHz}</math>; <math>\sigma = 2.01 \text{ S/m}</math>; <math>\epsilon_r = 37.16</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38) @ 2600 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2600/Dipole 2600MHz/Area Scan (5x10x1):</b> Measurement grid: <math>dx=12\text{mm}</math>, <math>dy=12\text{mm}</math>            Maximum value of SAR (measured) = 21.6 W/kg</p> <p><b>D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 107.0 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 27.6 W/kg  <b>SAR(1 g) = 14.66 W/kg; SAR(10 g) = 6.55 W/kg</b>            Maximum value of SAR (measured) = 21.3 W/kg</p> 	


SRTC performed system check by using 250mw at antenna port

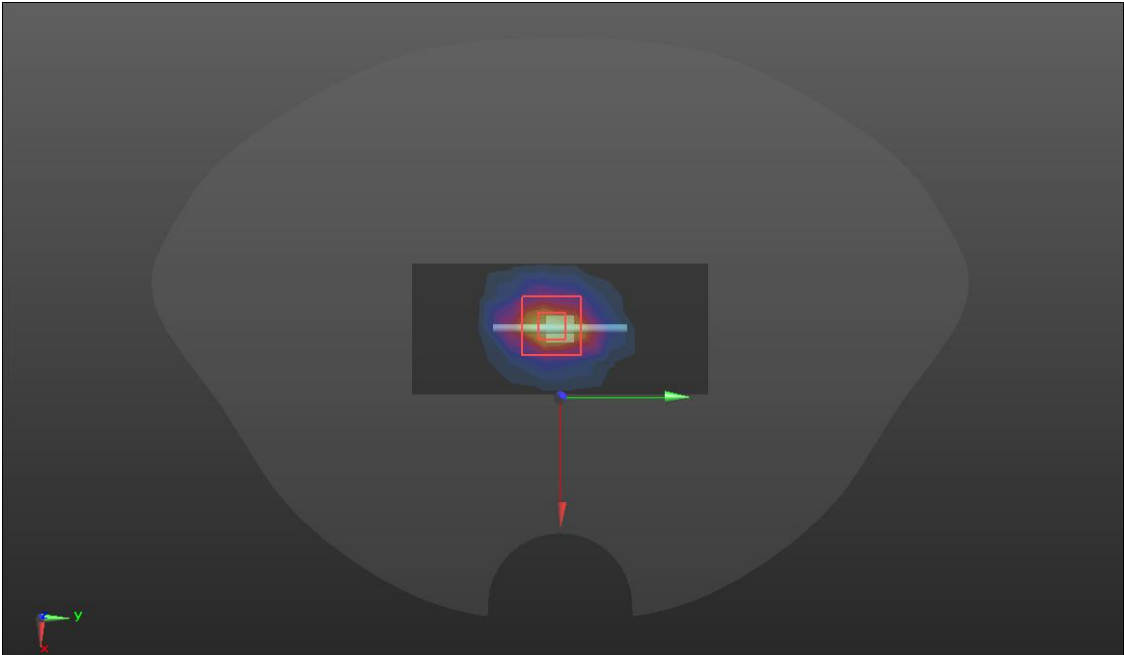System check	2600MHz
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2600</math> MHz; <math>\sigma = 2.01</math> S/m; <math>\epsilon_r = 37.16</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38) @ 2600 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D2600/Dipole 2600MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 21.0 W/kg</p> <p><b>D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 107.0 V/m; Power Drift = 0.00 dB            Peak SAR (extrapolated) = 27.8 W/kg  <b>SAR(1 g) = 13.85 W/kg; SAR(10 g) = 6.31 W/kg</b>            Maximum value of SAR (measured) = 21.7 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

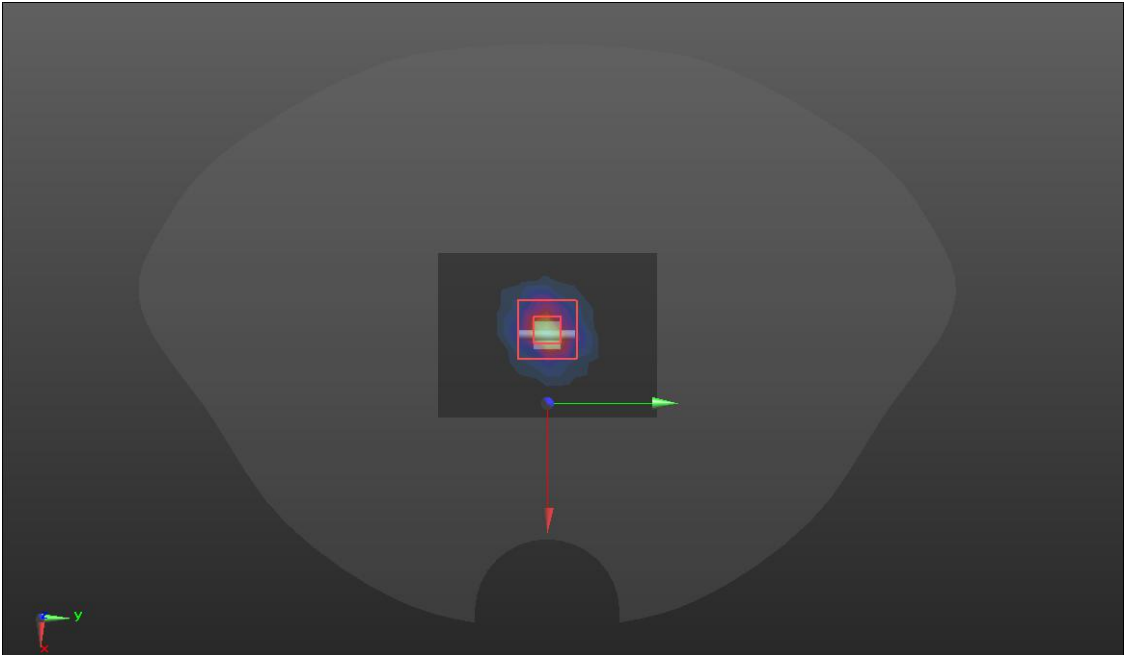
System check	5200MHz
<p>Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 5200 \text{ MHz}</math>; <math>\sigma = 4.50 \text{ S/m}</math>; <math>\epsilon_r = 36.85</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58) @ 5200 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <b>D5GV2 /D5200 SYSTEM CHECK 2 2/Area Scan (7x9x1)</b>: Measurement grid: <math>dx=10\text{mm}</math>, <math>dy=10\text{mm}</math>              Maximum value of SAR (measured) = 18.2 W/kg  <b>D5GV2 /D5200 SYSTEM CHECK 2 2/Zoom Scan (7x7x12)/Cube 0</b>: Measurement grid: <math>dx=4\text{mm}</math>, <math>dy=4\text{mm}</math>, <math>dz=2\text{mm}</math>              Reference Value = 68.10 V/m; Power Drift = 0.09 dB              Peak SAR (extrapolated) = 30.7 W/kg  <b>SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.2 W/kg</b>              Maximum value of SAR (measured) = 18.9 W/kg</li> </ul> 	

SRTC performed system check by using 100mw at antenna port

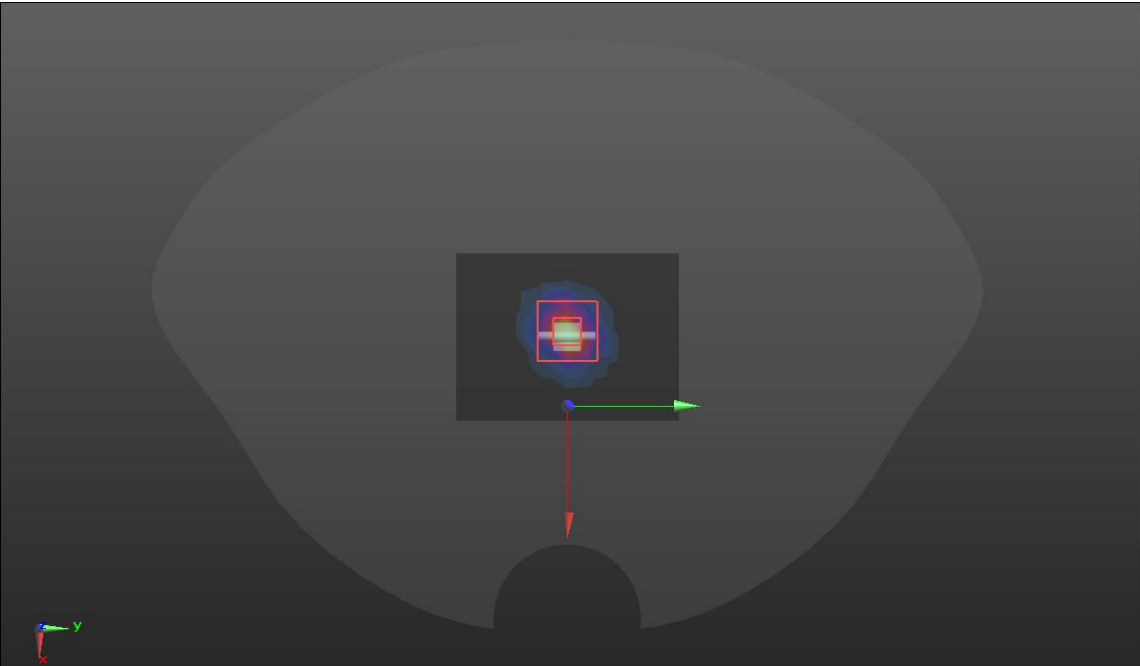System check	5300MHz
<p>Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 5300 \text{ MHz}</math>; <math>\sigma = 4.93 \text{ S/m}</math>; <math>\epsilon_r = 35.58</math>; <math>\rho = 1000 \text{ kg/m}^3</math></p>	
<p>Phantom section: Flat Section</p>	
<p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(5.52, 5.52, 5.52) @ 5300 MHz; Calibrated: 10/20/2021</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>• Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <b>D5GV2 /D5300 SYSTEM CHECK/Area Scan (7x9x1)</b>: Measurement grid: dx=10mm, dy=10mm            Maximum value of SAR (measured) = 17.8 W/kg  <b>D5GV2 /D5300 SYSTEM CHECK/Zoom Scan (7x7x12)/Cube 0</b>: Measurement grid: dx=4mm, dy=4mm, dz=2mm            Reference Value = 66.76 V/m; Power Drift = 0.08 dB            Peak SAR (extrapolated) = 30.5 W/kg  <b>SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.1 W/kg</b>            Maximum value of SAR (measured) = 18.4 W/kg</li> </ul>	
	

SRTC performed system check by using 100mw at antenna port

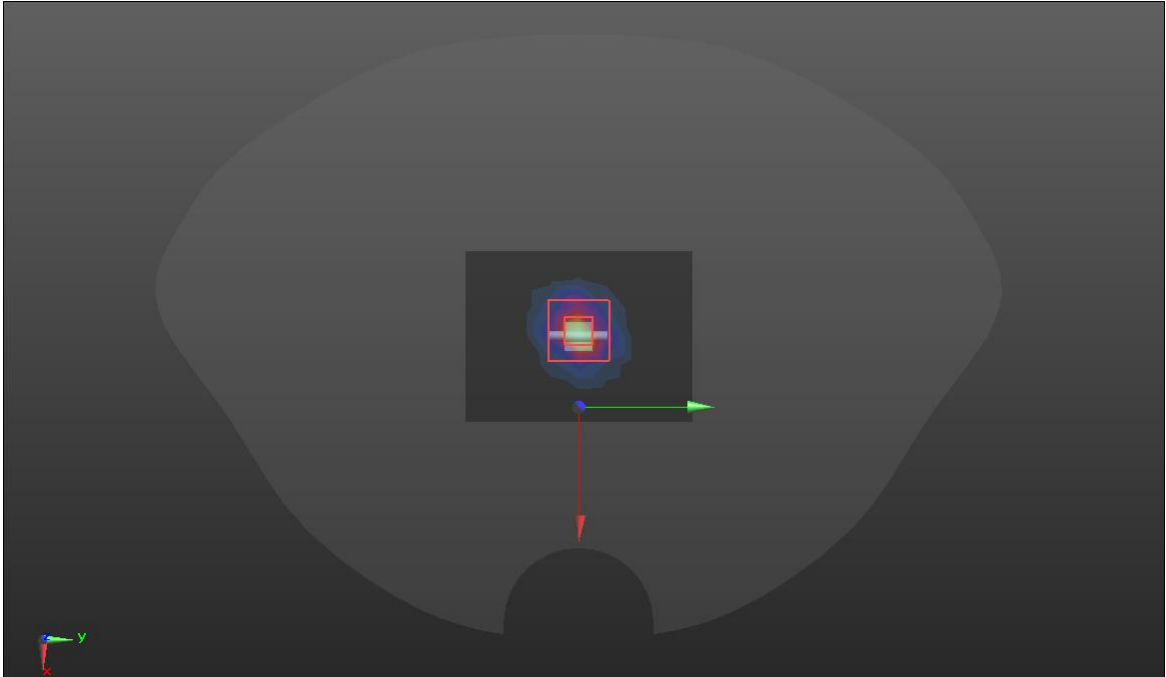

System check	5600MHz
<p>Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 5800</math> MHz; <math>\sigma = 5.09</math> S/m; <math>\epsilon_r = 34.68</math>; <math>\rho = 1000</math> kg/m<sup>3</sup></p> <p>Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5800 MHz; Calibrated: 10/20/2021</li> <li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx</li> <li>Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)</li> </ul> <p><b>D5GV2 /D5600 SYSTEM CHECK 2/Area Scan (7x9x1):</b> Measurement grid: dx=10mm, dy=10mm            Maximum value of SAR (measured) = 18.1 W/kg</p> <p><b>D5GV2 /D5600 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0:</b> Measurement grid: dx=4mm, dy=4mm, dz=2mm            Reference Value = 64.34 V/m; Power Drift = 0.09 dB            Peak SAR (extrapolated) = 34.5 W/kg  <b>SAR(1 g) =7.6 W/kg; SAR(10 g) = 2.2 W/kg</b>            Maximum value of SAR (measured) = 18.9 W/kg</p> 	

SRTC performed system check by using 100mw at antenna port


GSM 1900

Hotspot	Bottom
---------	--------

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 4:8  
 Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.02, 8.02, 8.02); Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Bottom/GSM1900/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.63 W/kg
- Bottom/GSM1900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 18.62 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 2.07 W/kg  
**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.563 W/kg**  
 Maximum value of SAR (measured) = 1.68 W/kg

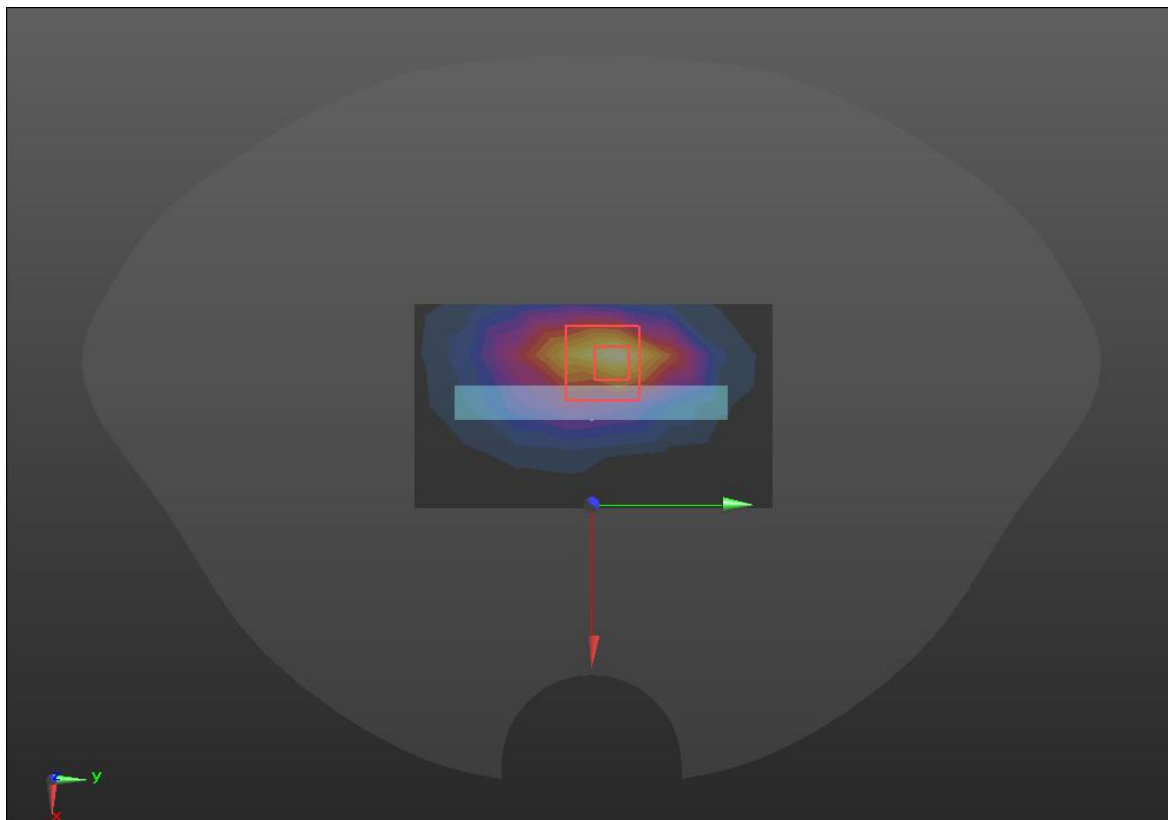


WCDMA B2

Hotspot	Back
---------	------

Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17); Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Back/WCDMA B2/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.47 W/kg
- Back/WCDMA B2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 13.31 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 2.10 W/kg  
**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.645 W/kg**  
 Maximum value of SAR (measured) = 1.75 W/kg

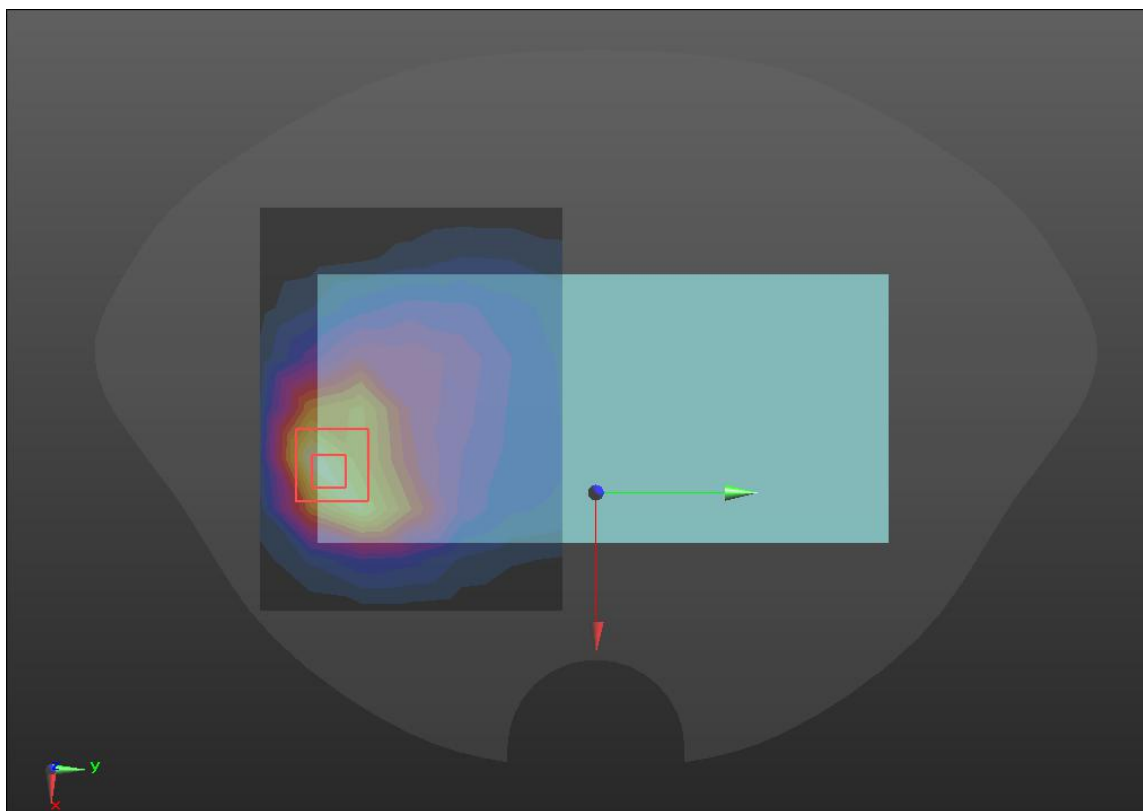


WCDMA B4

Hotspot	Back
---------	------

Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17); Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Back/WCDMA B4/Area Scan (9x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.924 W/kg
- Back/WCDMA B4/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 8.934 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.37 W/kg  
**SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.455 W/kg**  
 Maximum value of SAR (measured) = 1.13 W/kg

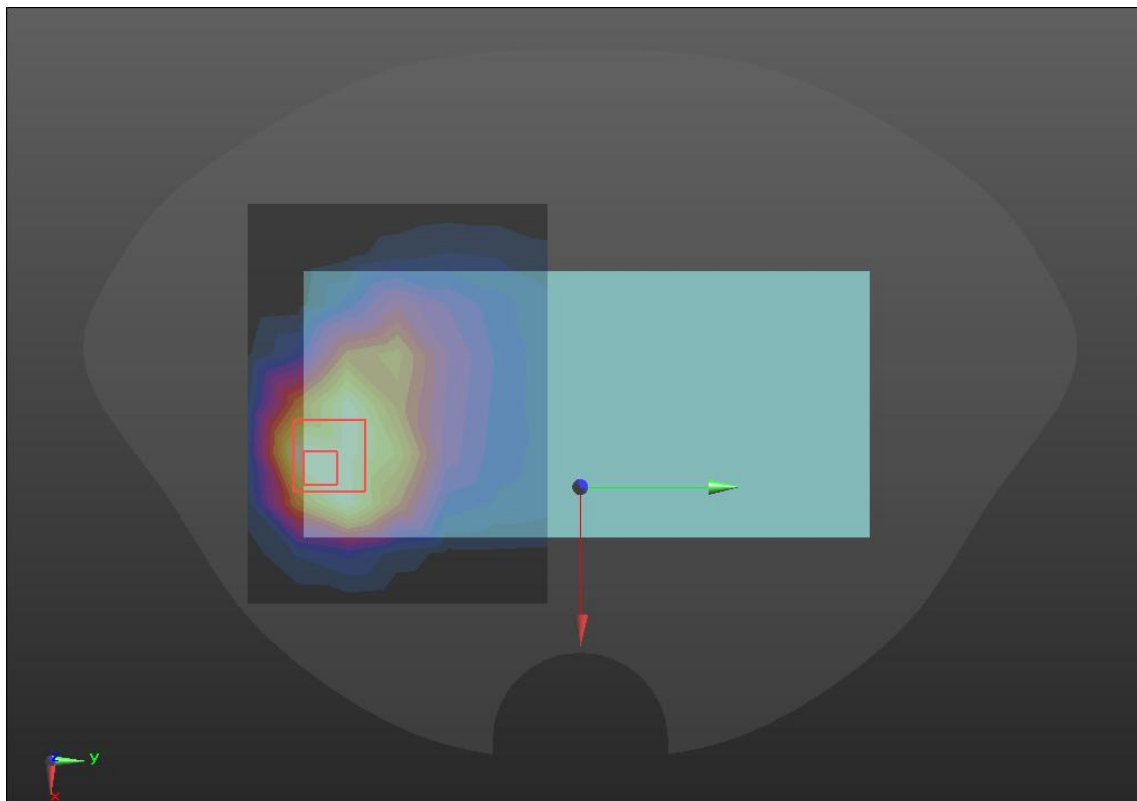


LTE Band2

Hotspot	Bottom
---------	--------

Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1880$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Bottom/LTE B2/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.97 W/kg  
**Bottom/LTE B2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 21.55 V/m; Power Drift = 0.11dB  
 Peak SAR (extrapolated) = 2.53 W/kg  
**SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.733 W/kg**  
 Maximum value of SAR (measured) = 2.08 W/kg

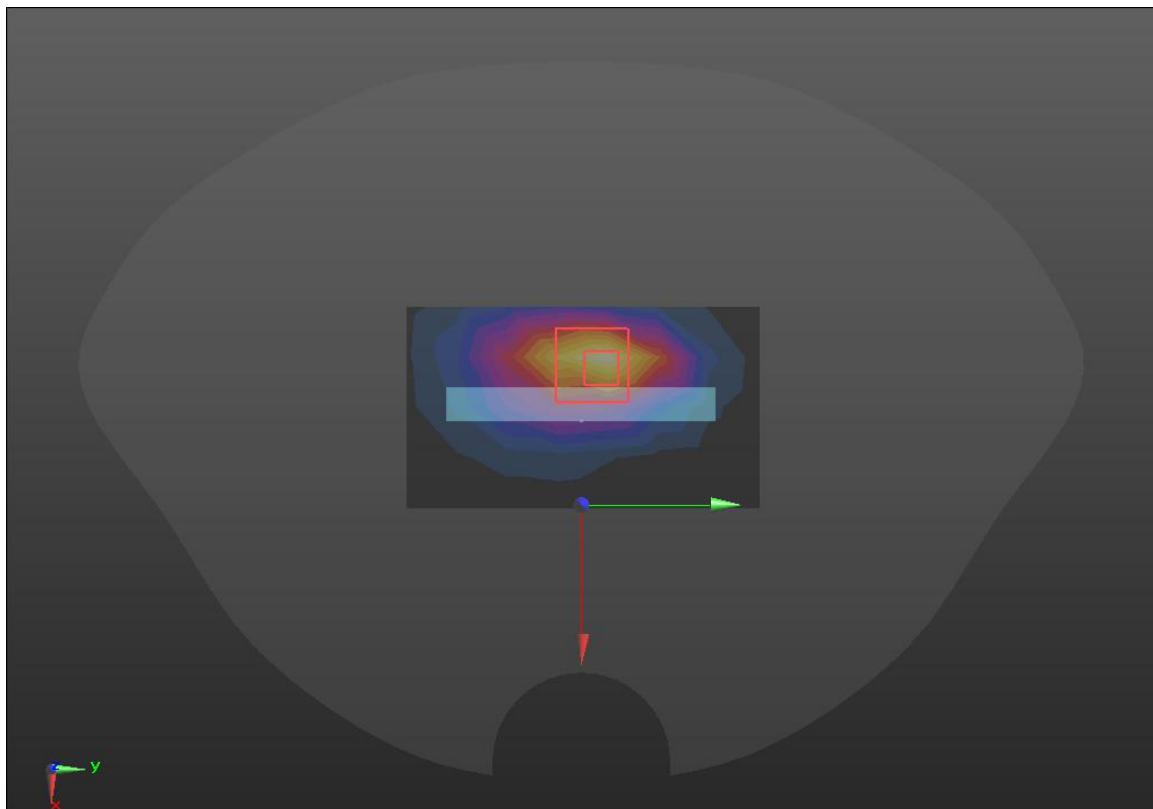


LTE Band4

Hotspot	Bottom
---------	--------

Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 40.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(8.17, 8.17, 8.17) ; Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Bottom/LTE B4/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.55 W/kg  
**Bottom/LTE B4/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 20.26 V/m; Power Drift = 0.00dB  
 Peak SAR (extrapolated) = 1.95 W/kg  
**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.604 W/kg.**  
 Maximum value of SAR (measured) = 1.63 W/kg

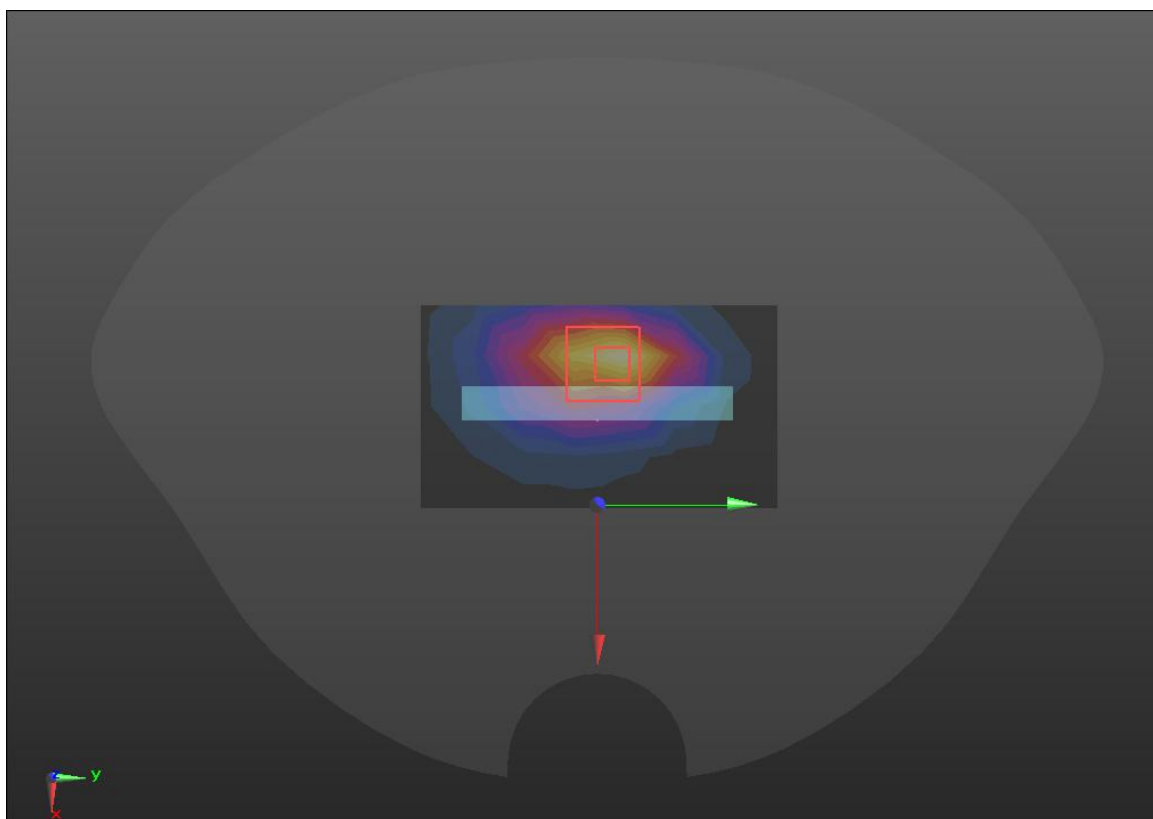

LTE Band41

Hotspot	Bottom
---------	--------

Communication System: UID 0, LTE Band 38 (0); Frequency: 2593 MHz; Duty Cycle: 0.633:1  
 Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 2.01$  S/m;  $\epsilon_r = 37.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.38, 7.38, 7.38); Calibrated: 10/20/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn720; Calibrated: 10/8/2021
- Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
- MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)


**Bottom/LTE B41/Area Scan (6x10x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.919 W/kg

**Bottom/LTE B41/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 11.31 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.357 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

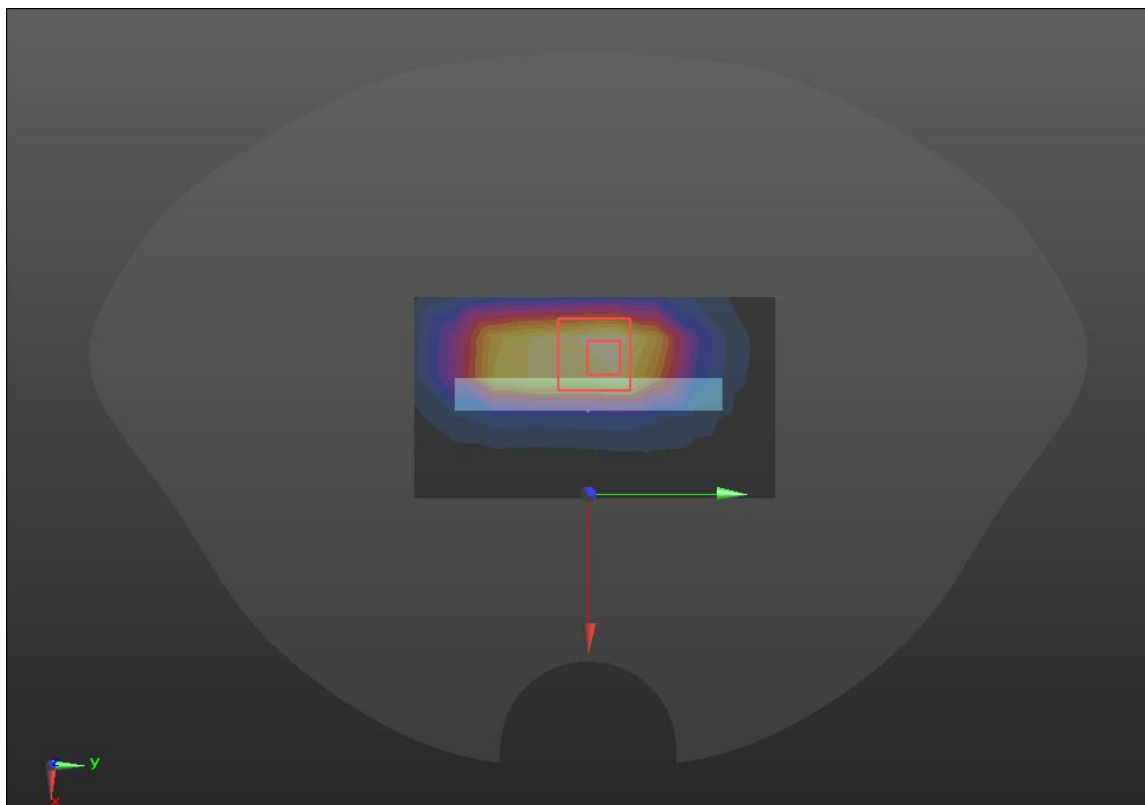


WIFI 2.4GHz

Head	Left Tilt
------	-----------

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz; Duty Cycle: 0.999:1  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 2021/10/20;
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Left Tilt/WIFI 2.4G/Area Scan (10x9x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 1.77 W/kg
- Left Tilt/WIFI 2.4G/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 22.43 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 2.46 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.513 W/kg**  
 Maximum value of SAR (measured) = 1.91 W/kg

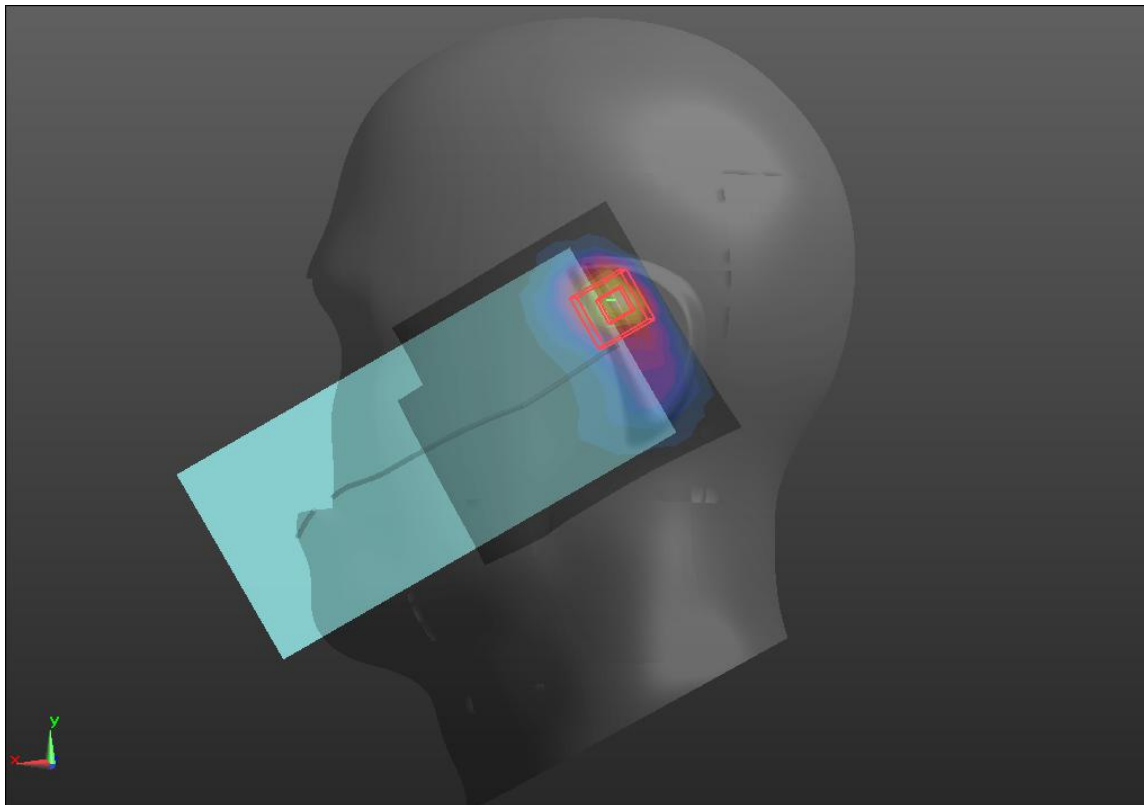




WIFI 5.2GHz

Head	Left Tilt
------	-----------


Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5220 MHz; Duty Cycle: 0.992:1  
 Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 4.50$  S/m;  $\epsilon_r = 36.85$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY Configuration:


- Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20;
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Left Tilt/WIFI 5G NII1/Area Scan (9x11x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 1.56 W/kg
- Left Tilt/WIFI 5G NII1/Zoom Scan (6x6x12)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 8.409 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 3.19 W/kg  
**SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.198 W/kg**  
 Maximum value of SAR (measured) = 1.67 W/kg

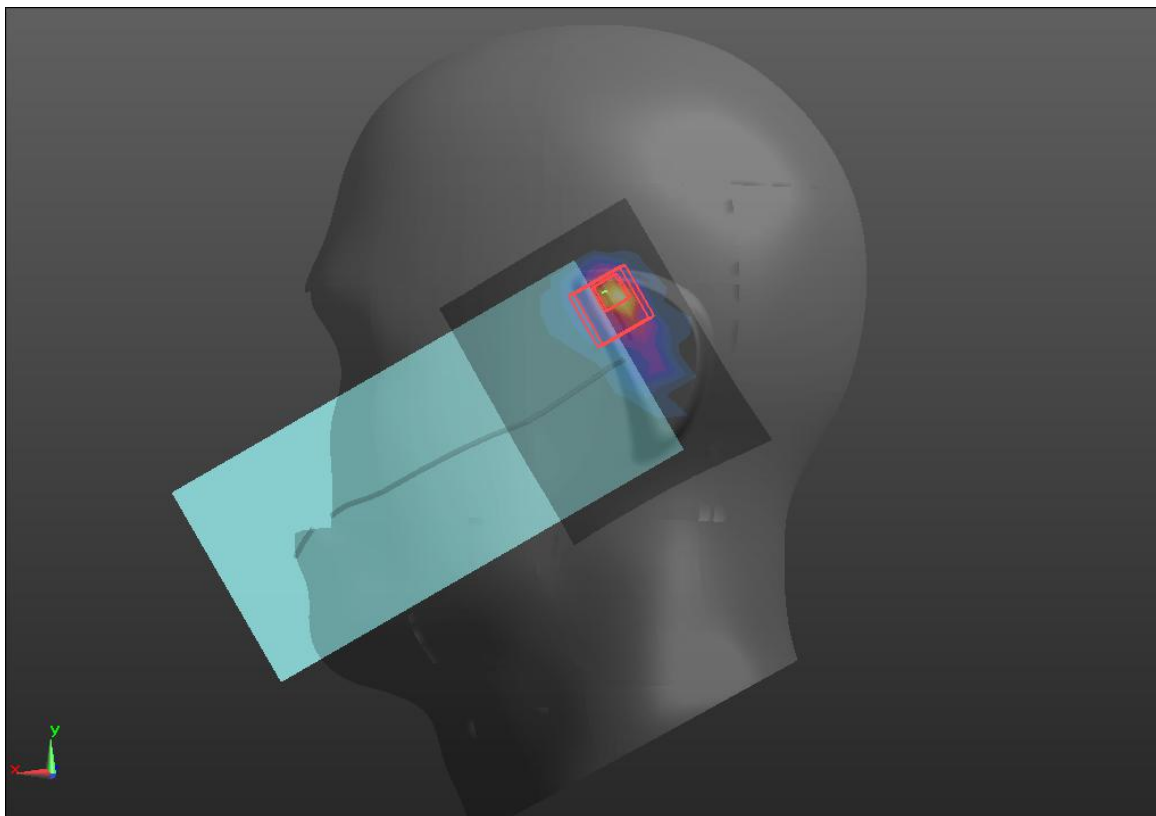

WIFI 5.3GHz

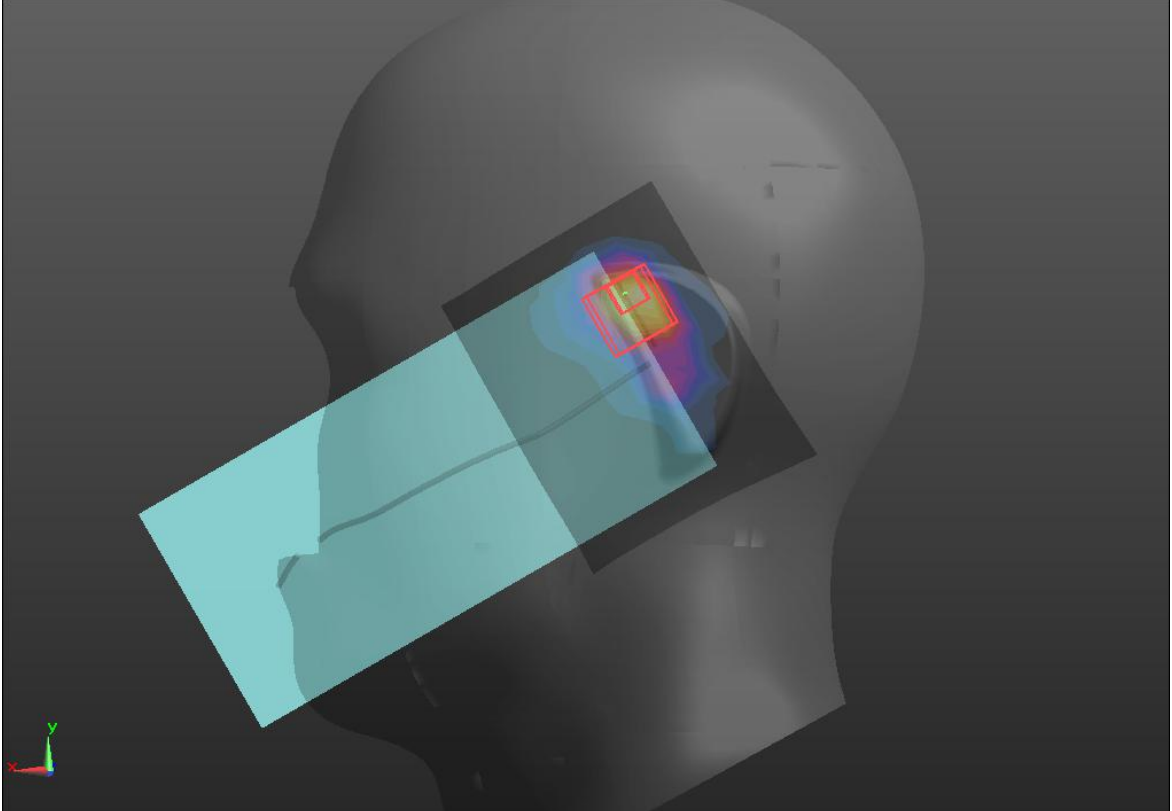Head	Left Tilt
<p>Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5280 MHz; Duty Cycle: 0.993:1            Medium parameters used (interpolated): <math>f = 5280</math> MHz; <math>\sigma = 4.93</math> S/m; <math>\epsilon_r = 35.58</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p>	
<p>DASY Configuration:</p>	
<ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(5.58, 5.58, 5.58); Calibrated: 2021/10/20;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>Left Tilt/WIFI 5G NII2A/Area Scan (9x11x1):</b> Measurement grid: dx=10mm, dy=10mm            Maximum value of SAR (measured) = 1.04 W/kg</p> <p><b>Left Tilt/WIFI 5G NII2A/Zoom Scan (6x6x12)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm            Reference Value = 9.770 V/m; Power Drift = -0.04 dB            Peak SAR (extrapolated) = 2.72 W/kg  <b>SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.190 W/kg</b>            Maximum value of SAR (measured) = 1.65 W/kg</p>	
	

WIFI 5.6GHz

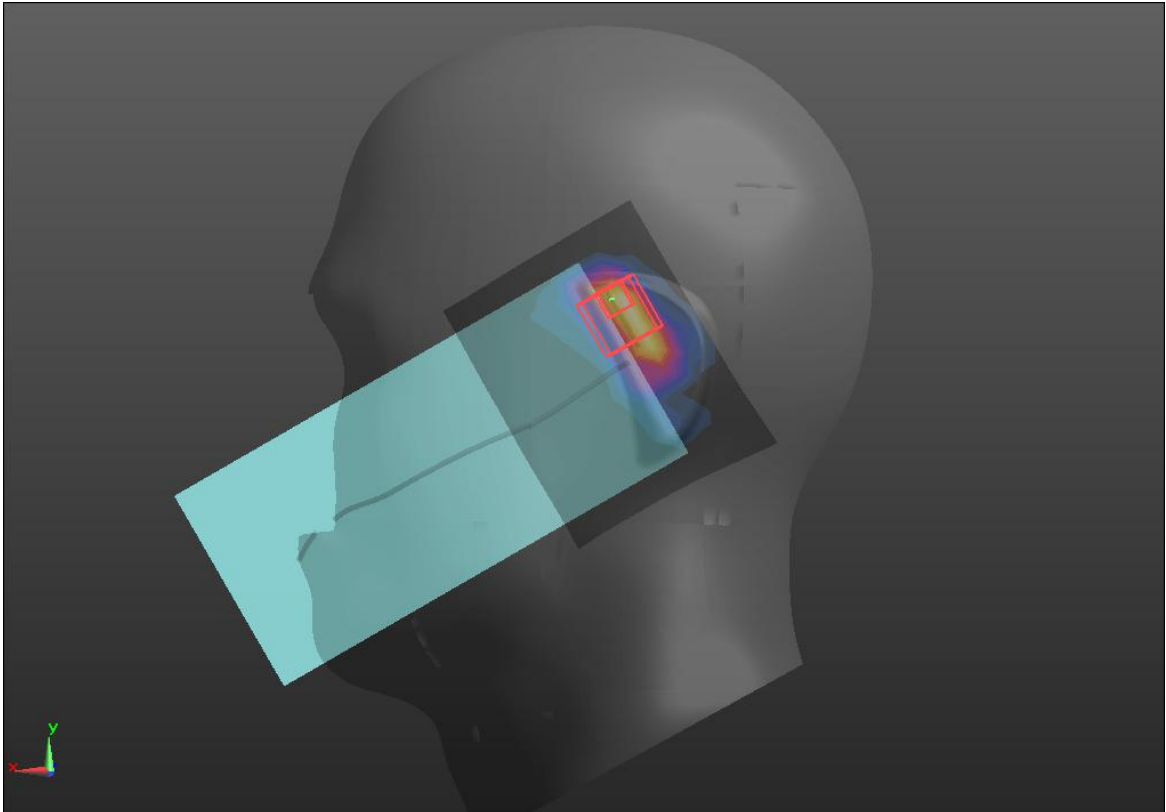Head	Left Tilt
<p>Communication System: UID 0, WIFI 802.11 5GHz (0); Frequency: 5580 MHz; Duty Cycle: 0.9926:1            Medium parameters used (interpolated): <math>f = 5580</math> MHz; <math>\sigma = 5.09</math> S/m; <math>\epsilon_r = 34.68</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Left Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: EX3DV4 - SN3708; ConvF(5.05, 5.05, 5.05); Calibrated: 2021/10/20;</li> <li>• Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn720; Calibrated: 10/8/2021</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)</li> </ul> <p><b>Left Tilt/WIFI 5G NII2C/Area Scan (9x11x1):</b> Measurement grid: dx=10mm, dy=10mm            Maximum value of SAR (measured) = 1.65 W/kg</p> <p><b>Left Tilt/WIFI 5G NII2C/Zoom Scan (6x6x12)/Cube 0:</b> Measurement grid: dx=5mm, dy=5mm, dz=2mm            Reference Value = 13.46 V/m; Power Drift = -0.00 dB            Peak SAR (extrapolated) = 4.33 W/kg  <b>SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.237 W/kg</b>            Maximum value of SAR (measured) = 2.39 W/kg</p> 	


BT

Head	Left Tilt
------	-----------

Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.787:1  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.04$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN3708; ConvF(7.45, 7.45, 7.45); Calibrated: 10/20/2021
  - Sensor-Surface: 1.4mm (Mechanical Surface Detection)
  - Electronics: DAE4 Sn720; Calibrated: 10/8/2021
  - Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660
  - MEASUREMENT SW: DASY52, VERSION 52.10 (4); SEMCAD X VERSION 14.6.14 (7483)
- Left Tilt /BT/Area Scan (10x9x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.240 W/kg  
**Left Tilt/BT/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 7.260 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.337 W/kg  
**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.064 W/kg**  
 Maximum value of SAR (measured) = 0.262 W/kg

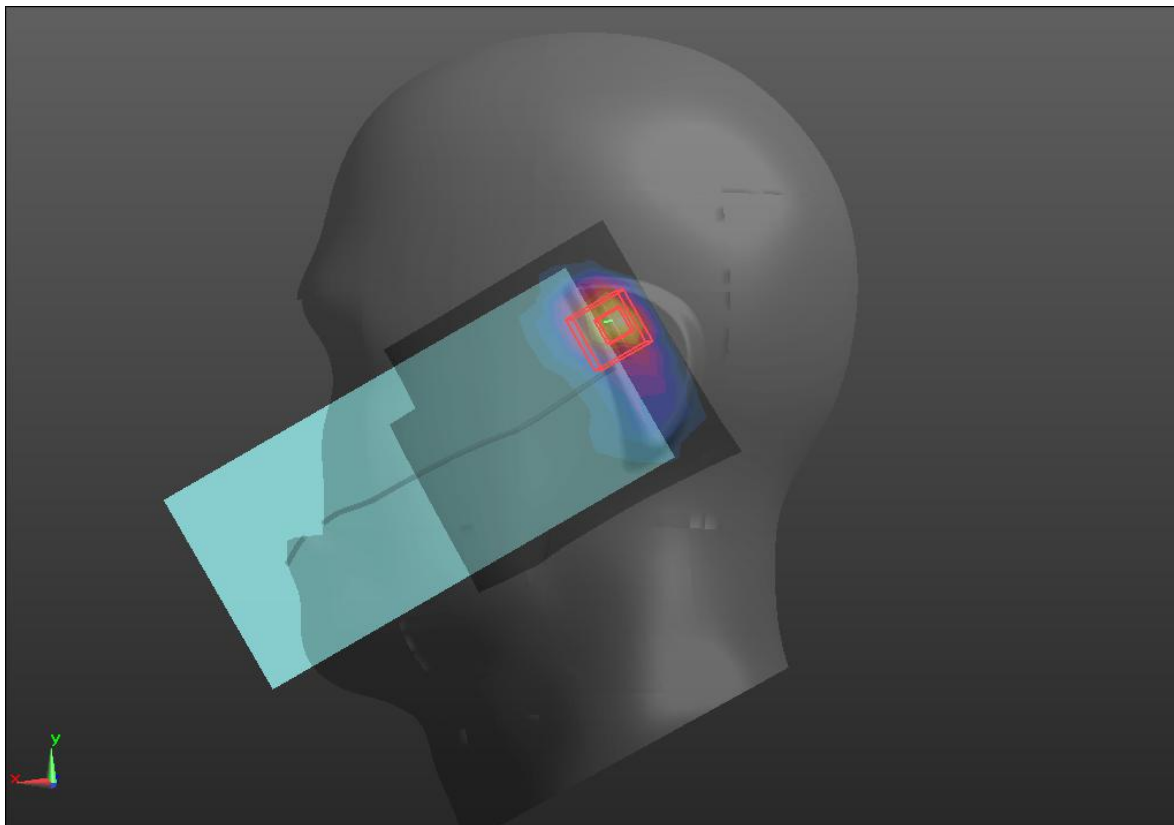

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.