


FCC Test Report


APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/GSM (GPRS) Dual-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE C310, ZTE Blade C310, Blade C310
FCC ID : SRQ-C310
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was completed on Apr. 09, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2009 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Louis Wu / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification subjective to this standard.....	6
1.5. Modification of EUT	6
1.6. Test Location.....	7
1.7. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	10
2.3. Support Unit used in test configuration and system.....	11
2.4. EUT Operation Test Setup.....	12
3. TEST RESULT	13
3.1. Test of AC Conducted Emission Measurement	13
3.2. Test of Radiated Emission Measurement	19
4. LIST OF MEASURING EQUIPMENT	25
5. UNCERTAINTY OF EVALUATION	26
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC4D0802-03	Rev. 01	Initial issue of report	Apr. 30, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 6.07 dB at 0.530 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.67 dB at 30.970 MHz



1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE C310, ZTE Blade C310, Blade C310
FCC ID	SRQ-C310
EUT supports Radios application	GSM/GPRS/WCDMA/HSPA/HSPA+ (Downlink Only)/ WLAN 2.4GHz 802.11b/g/n(HT20)/ Bluetooth v2.1 + EDR
HW Version	TM_BASE_13C_W14.41
SW Version	ZTE-CN-QD-C310V1.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850 : 824.2 MHz ~ 848.8 MHz GSM1900 : 1850.2 MHz ~ 1909.8MHz WCDMA Band V : 826.4 MHz ~ 846.6 MHz WCDMA Band II : 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850 : 869.2 MHz ~ 893.8 MHz GSM1900 : 1930.2 MHz ~ 1989.8 MHz WCDMA Band V : 871.4 MHz ~ 891.6 MHz WCDMA Band II : 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GPS : PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GPS : BPSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	CO01-KS	03CH01-KS	03CH02-KS	149928

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2009

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


Item	EUT Configuration	Test Condition	
		EMI AC	EMI RE
1.	Charging Mode (EUT with adapter)	☒	☒
2.	Data application transferred mode (EUT connected with notebook)	☒	☒

Abbreviations:


- EMI AC: AC conducted emissions
- EMI RE: EUT radiated emissions

Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM850 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone + Camera<Fig.1> Mode 2: GSM1900 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone +MPEG4<Fig.1> Mode 3: WCDMA Band V Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx<Fig.2> Mode 4: WCDMA Band II Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx<Fig.2>
Radiated Emissions < 1GHz	1/2	Mode 1: GSM850 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone + Camera<Fig.1> Mode 2: GSM1900 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone +MPEG4<Fig.1> Mode 3: WCDMA Band V Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx<Fig.2> Mode 4: WCDMA Band II Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx<Fig.2>
Radiated Emissions $\geq$ 1GHz	1/2	Mode 1: GSM850 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone + Camera<Fig.1> Mode 2: WCDMA Band II Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx<Fig.2>
Remark: - The worst case of AC is mode 2; and the USB Link mode of AC is mode 3, only the test data of these modes are reported. - The worst case of RE < 1G is mode 1; and the USB Link mode of RE is mode 4, only the test data of these modes are reported. - Link with Notebook means data application transferred mode between EUT and Notebook		

2.2. Connection Diagram of Test System

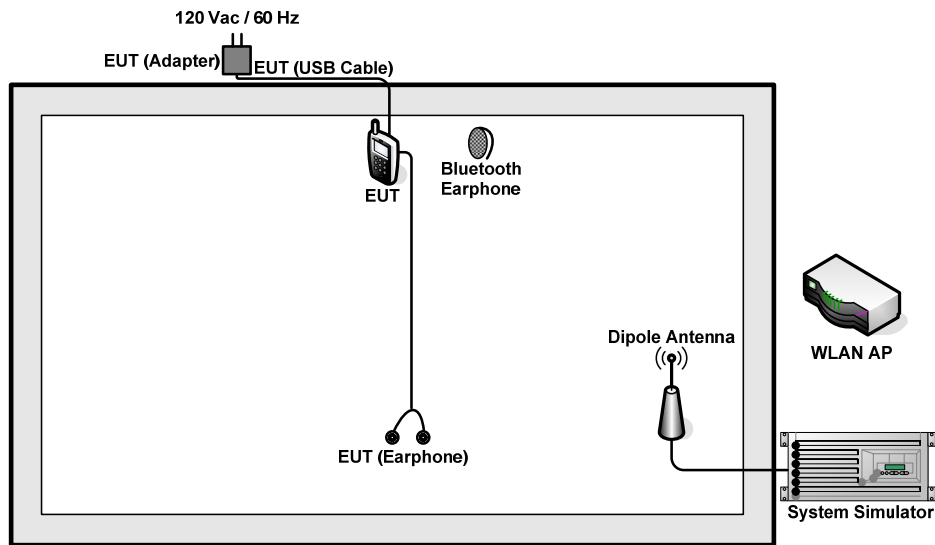

<Fig.1>

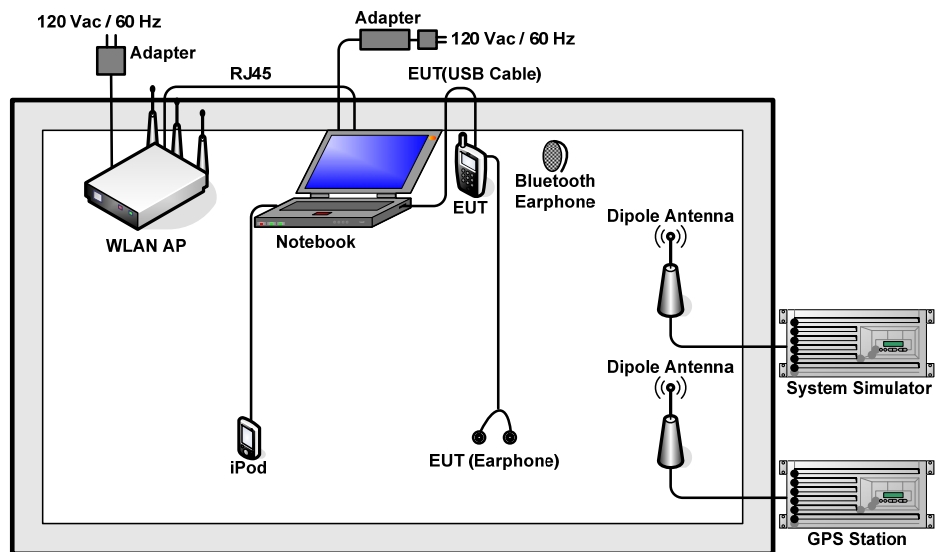

<Fig.2>

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NVII	N/A	Unshielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
6.	Bluetooth Earphone	Nokia	LBH301	N/A	N/A	N/A
7.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

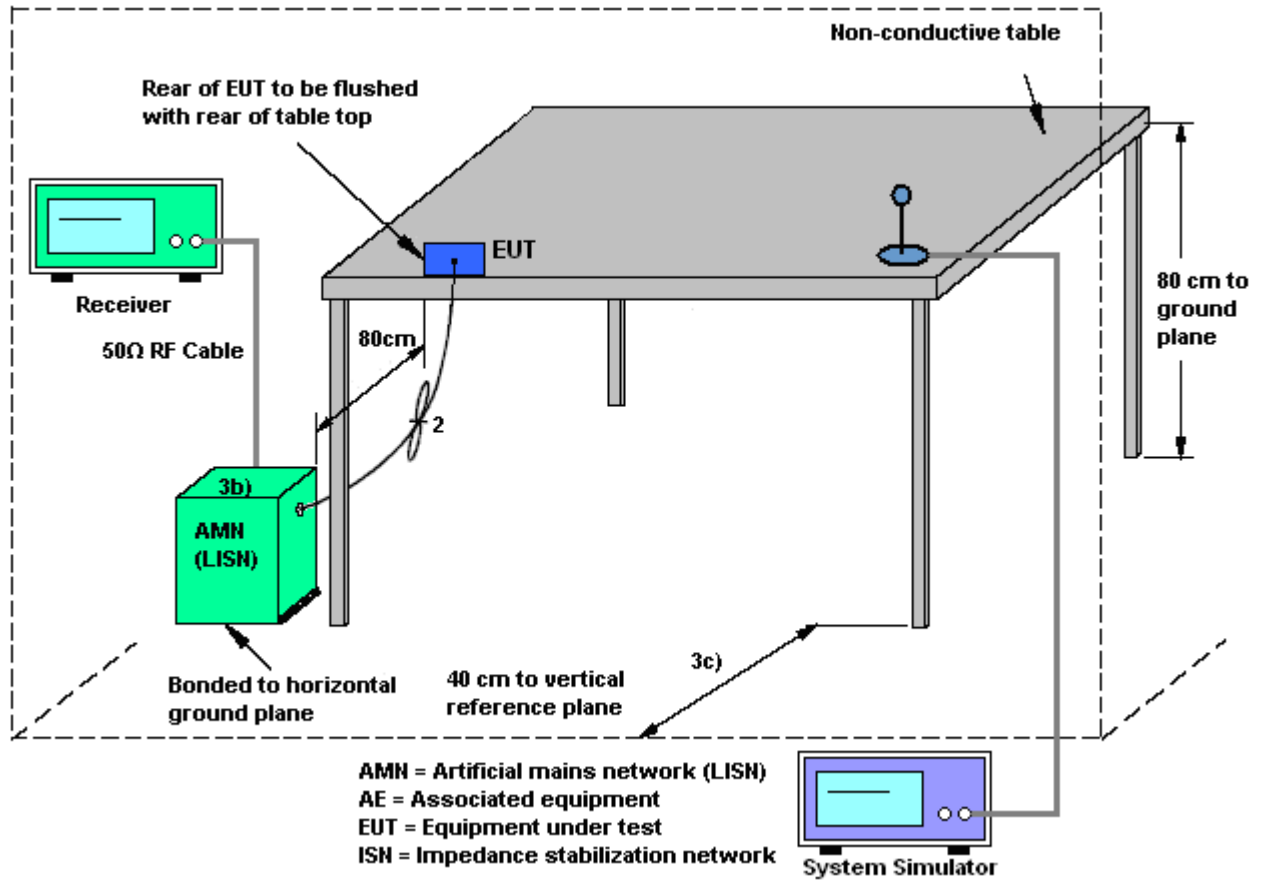



3.1.5 Test Result of AC Conducted Emission


Test Mode :	Mode 2	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone +MPEG4		

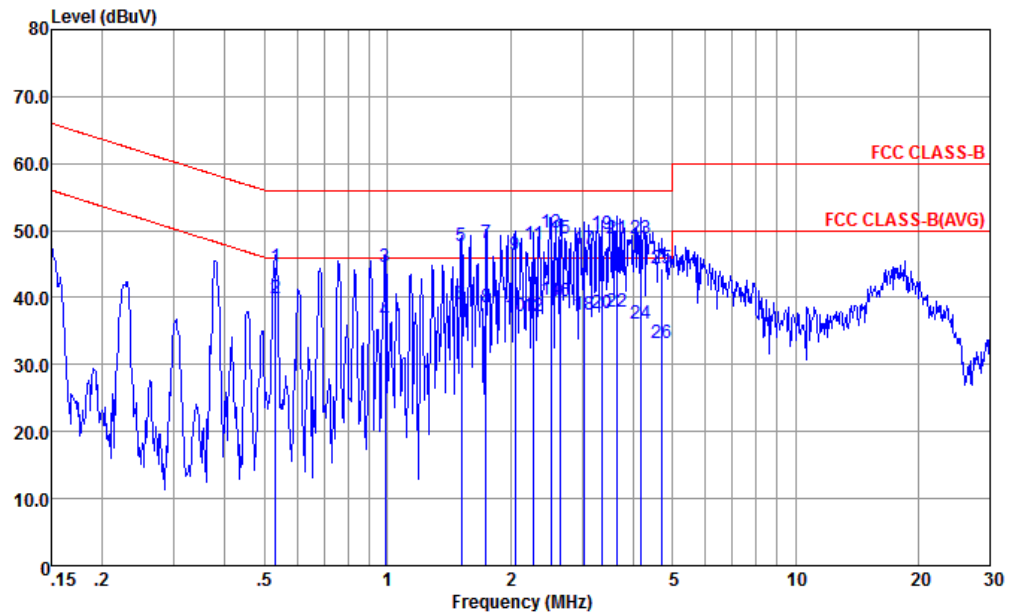

Site : CO01-KS
Condition : FCC CLASS-B LISN-L20140306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.53	44.53	-11.47	56.00	33.70	0.20	10.63	QP
2 *	0.53	39.93	-6.07	46.00	29.10	0.20	10.63	Average
3	0.99	44.55	-11.45	56.00	33.80	0.10	10.65	QP
4	0.99	36.65	-9.35	46.00	25.90	0.10	10.65	Average
5	1.52	47.88	-8.42	56.00	36.80	0.10	10.68	QP
6	1.52	38.98	-7.02	46.00	28.20	0.10	10.68	Average
7	1.74	48.09	-7.91	56.00	37.30	0.10	10.69	QP
8	1.74	38.59	-7.41	46.00	27.80	0.10	10.69	Average
9	2.05	46.40	-9.60	56.00	35.60	0.10	10.70	QP
10	2.05	37.30	-8.70	46.00	26.50	0.10	10.70	Average
11	2.28	47.82	-8.18	56.00	36.99	0.11	10.72	QP
12	2.28	37.22	-8.78	46.00	26.39	0.11	10.72	Average
13	2.51	49.65	-6.35	56.00	38.80	0.12	10.73	QP
14	2.51	39.65	-6.35	46.00	28.80	0.12	10.73	Average
15	2.65	48.86	-7.14	56.00	38.00	0.12	10.74	QP
16	2.65	39.46	-6.54	46.00	28.60	0.12	10.74	Average
17	3.04	47.23	-8.77	56.00	36.30	0.14	10.79	QP
18	3.04	37.53	-8.47	46.00	26.60	0.14	10.79	Average
19	3.35	49.57	-6.43	56.00	38.60	0.16	10.81	QP
20	3.35	37.77	-8.23	46.00	26.80	0.16	10.81	Average
21	3.64	48.79	-7.21	56.00	37.80	0.17	10.82	QP
22	3.64	37.79	-8.21	46.00	26.80	0.17	10.82	Average
23	4.18	48.82	-7.18	56.00	37.80	0.19	10.83	QP
24	4.18	36.12	-9.88	46.00	25.10	0.19	10.83	Average
25	4.72	44.44	-11.56	56.00	33.40	0.20	10.84	QP
26	4.72	33.24	-12.76	46.00	22.20	0.20	10.84	Average

Test Mode :	Mode 2	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone +MPEG4		

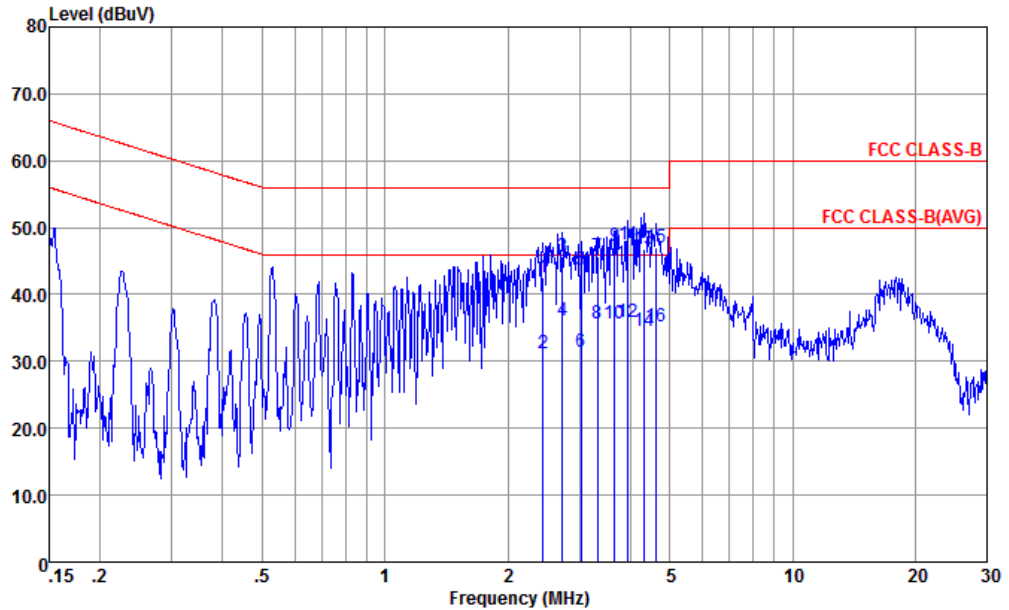


Site : CO01-KS
Condition : FCC CLASS-B LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
		dBuV	dB	dBuV	dBuV	dB	dB	
1	2.45	42.64	-13.36	56.00	31.80	0.11	10.73	QP
2	2.45	31.14	-14.86	46.00	20.30	0.11	10.73	Average
3	2.72	45.67	-10.33	56.00	34.80	0.12	10.75	QP
4	2.72	36.07	-9.93	46.00	25.20	0.12	10.75	Average
5	3.03	43.73	-12.27	56.00	32.80	0.14	10.79	QP
6	3.03	31.33	-14.67	46.00	20.40	0.14	10.79	Average
7	3.33	45.77	-10.23	56.00	34.80	0.16	10.81	QP
8	3.33	35.57	-10.43	46.00	24.60	0.16	10.81	Average
9	3.66	47.30	-8.70	56.00	36.30	0.18	10.82	QP
10	3.66	35.60	-10.40	46.00	24.60	0.18	10.82	Average
11 *	3.94	47.41	-8.59	56.00	36.40	0.18	10.83	QP
12	3.94	35.91	-10.09	46.00	24.90	0.18	10.83	Average
13	4.31	46.83	-9.17	56.00	35.80	0.19	10.84	QP
14	4.31	34.63	-11.37	46.00	23.60	0.19	10.84	Average
15	4.62	46.94	-9.06	56.00	35.90	0.20	10.84	QP
16	4.62	35.14	-10.86	46.00	24.10	0.20	10.84	Average



Test Mode :	Mode 3	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx		

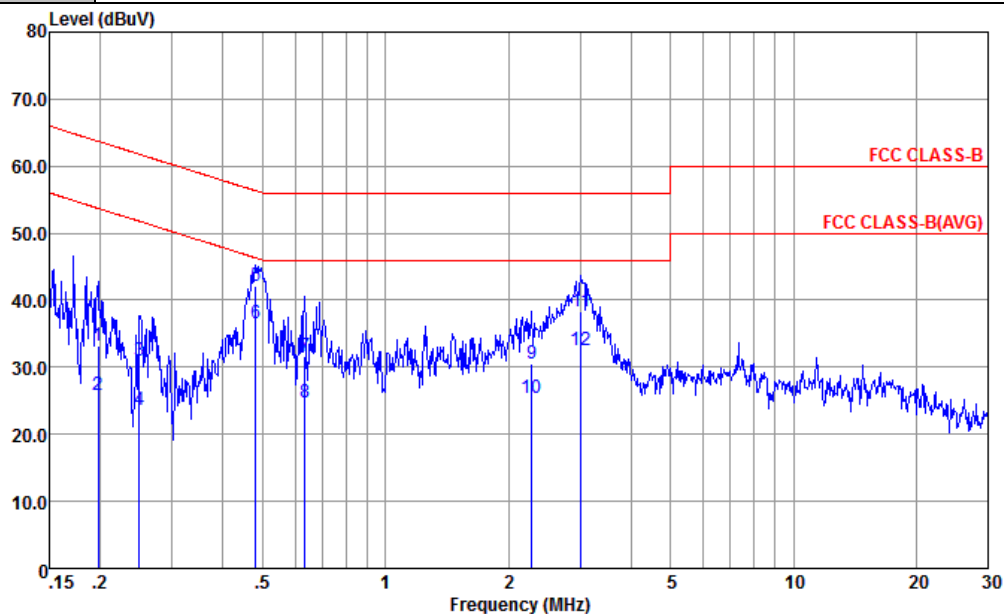


Site : CO01-KS
Condition : FCC CLASS-B LISN-L20140306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.20	33.12	-30.59	63.71	21.60	1.02	10.50	QP
2	0.20	25.82	-27.89	53.71	14.30	1.02	10.50	Average
3	0.25	30.92	-30.86	61.78	19.51	0.88	10.53	QP
4	0.25	23.72	-28.06	51.78	12.31	0.88	10.53	Average
5	0.48	42.14	-14.18	56.32	31.30	0.22	10.62	QP
6 *	0.48	36.54	-9.78	46.32	25.70	0.22	10.62	Average
7	0.63	31.74	-24.26	56.00	20.90	0.20	10.64	QP
8	0.63	24.66	-21.34	46.00	13.82	0.20	10.64	Average
9	2.28	30.62	-25.38	56.00	19.79	0.11	10.72	QP
10	2.28	25.42	-20.58	46.00	14.59	0.11	10.72	Average
11	3.01	38.42	-17.58	56.00	27.49	0.14	10.79	QP
12	3.01	32.42	-13.58	46.00	21.49	0.14	10.79	Average



Test Mode :	Mode 3	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	30~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WCDMA Band V Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx		

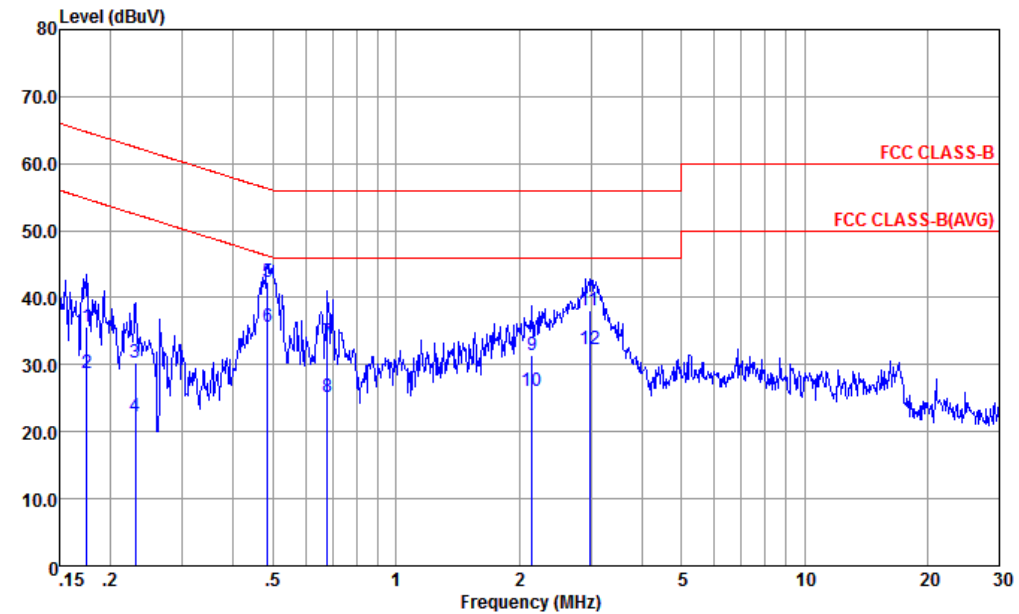

Site : CO01-KS
Condition : FCC CLASS-B LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.17	35.64	-29.08	64.72	23.80	1.40	10.44	QP
2	0.17	28.64	-26.08	54.72	16.80	1.40	10.44	Average
3	0.23	30.35	-32.09	62.44	18.89	0.94	10.52	QP
4	0.23	22.35	-30.09	52.44	10.89	0.94	10.52	Average
5	0.48	42.34	-13.93	56.27	31.41	0.31	10.62	QP
6 *	0.48	35.74	-10.53	46.27	24.81	0.31	10.62	Average
7	0.68	33.35	-22.65	56.00	22.50	0.21	10.64	QP
8	0.68	25.15	-20.85	46.00	14.30	0.21	10.64	Average
9	2.16	31.41	-24.59	56.00	20.60	0.10	10.71	QP
10	2.16	26.11	-19.89	46.00	15.30	0.10	10.71	Average
11	2.98	38.12	-17.88	56.00	27.20	0.14	10.78	QP
12	2.98	32.22	-13.78	46.00	21.30	0.14	10.78	Average

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBμV/m) = 20 log Emission level (μV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

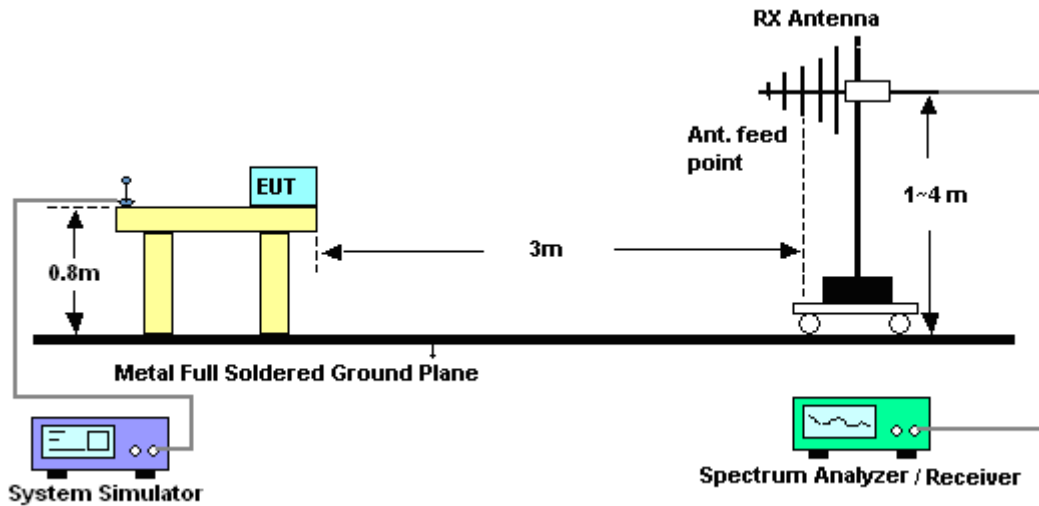


For radiated emissions above 1GHz

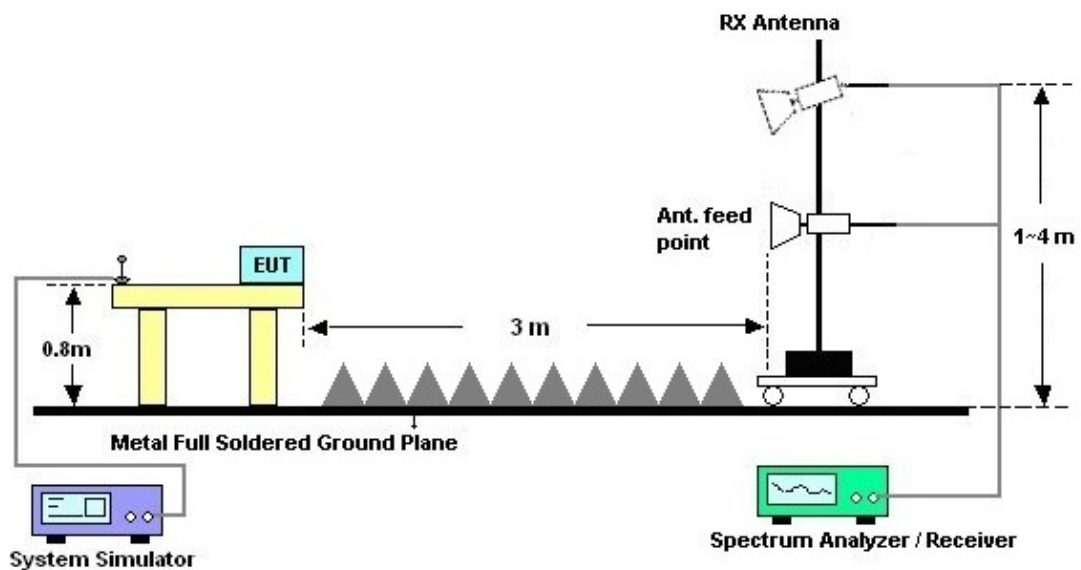

3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Kear Huang	Relative Humidity :	48~52%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	GSM850 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone + Camera		
Remark :	#7is system simulator signal which can be ignored.		

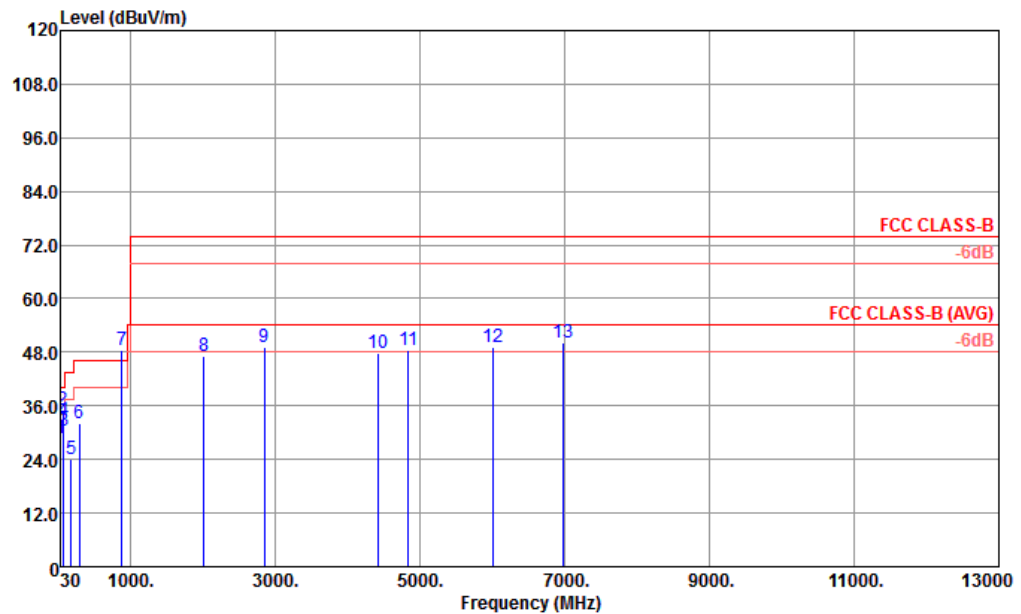


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_37879 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	28.69	-11.31	40.00	41.36	19.20	0.79	32.66	---	---	Peak
2 !	64.92	35.03	-4.97	40.00	59.68	7.15	0.79	32.59	100	308	Peak
3	72.68	30.55	-9.45	40.00	53.71	8.45	1.04	32.65	---	---	Peak
4	79.47	32.86	-7.14	40.00	55.45	9.02	1.04	32.65	---	---	Peak
5	175.50	24.07	-19.43	43.50	44.38	10.73	1.44	32.48	---	---	Peak
6	293.84	31.96	-14.04	46.00	49.57	12.89	1.90	32.40	---	---	Peak
7 *	881.66	48.37			54.59	22.08	3.50	31.80	---	---	Peak
8	2018.00	47.24	-26.76	74.00	49.35	30.82	5.69	38.62	---	---	Peak
9	2854.00	49.24	-24.76	74.00	44.53	32.50	6.77	34.56	---	---	Peak
10	4412.00	47.85	-26.15	74.00	39.02	34.73	8.52	34.42	---	---	Peak
11	4836.00	48.48	-25.52	74.00	41.57	34.90	8.73	36.72	---	---	Peak
12	6000.00	49.29	-24.71	74.00	43.65	35.00	9.89	39.25	---	---	Peak
13	6980.00	50.02	-23.98	74.00	42.41	35.69	10.62	38.70	---	---	Peak



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Kear Huang	Relative Humidity :	48~52%
Test Distance :	3m	Polarization :	Vertical
Function Type :	GSM850 Idle + WLAN Idle + Buletooth Idle + USB Cable(Charging from Adapter) + Earphone + Camera		
Remark :	#7is system simulator signal which can be ignored.		

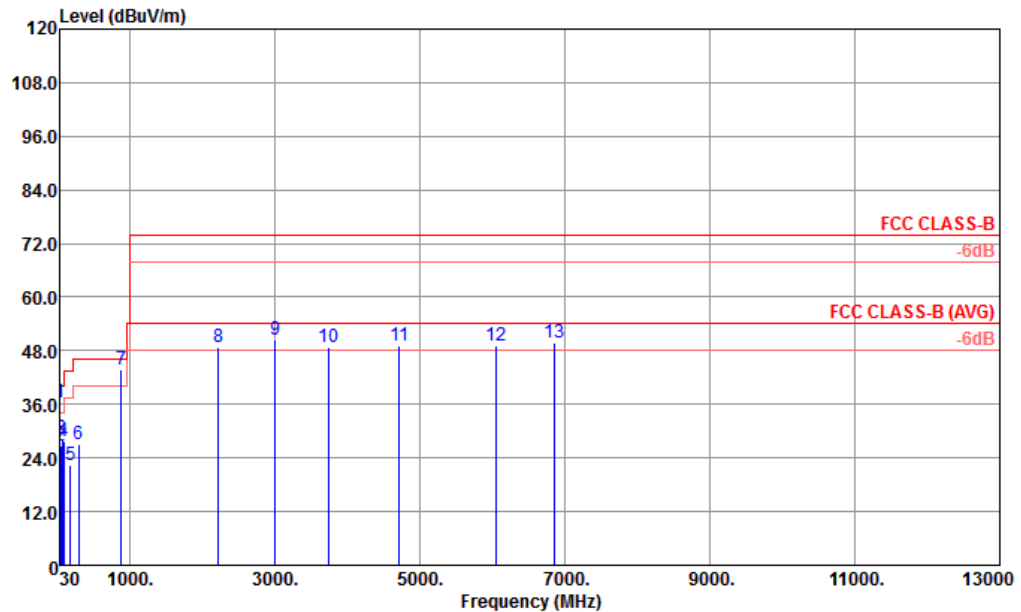


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_37879 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 !	30.97	36.33	-3.67	40.00	49.49	18.71	0.79	32.66	118	204	Peak
2	50.37	26.91	-13.09	40.00	50.04	8.70	0.79	32.62	---	---	Peak
3	63.95	28.47	-11.53	40.00	53.33	6.94	0.79	32.59	---	---	Peak
4	82.38	27.80	-12.20	40.00	50.08	9.32	1.04	32.64	---	---	Peak
5	175.50	22.40	-21.10	43.50	42.71	10.73	1.44	32.48	---	---	Peak
6	293.84	27.15	-18.85	46.00	44.76	12.89	1.90	32.40	---	---	Peak
7 !	881.66	43.86			50.08	22.08	3.50	31.80	---	---	Peak
8	2216.00	48.68	-25.32	74.00	48.56	31.12	5.96	36.96	---	---	Peak
9	3000.00	50.59	-23.41	74.00	45.35	32.80	6.96	34.52	---	---	Peak
10	3732.00	48.82	-25.18	74.00	39.76	34.14	7.99	33.07	---	---	Peak
11	4712.00	49.02	-24.98	74.00	41.60	34.82	8.65	36.05	---	---	Peak
12	6048.00	49.06	-24.94	74.00	43.19	35.06	9.92	39.11	---	---	Peak
13	6860.00	49.88	-24.12	74.00	42.86	35.59	10.50	39.07	---	---	Peak



Test Mode :	Mode 4	Temperature :	23~25°C
Test Engineer :	Kear Huang	Relative Humidity :	48~52%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	WCDMA Band II Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx		

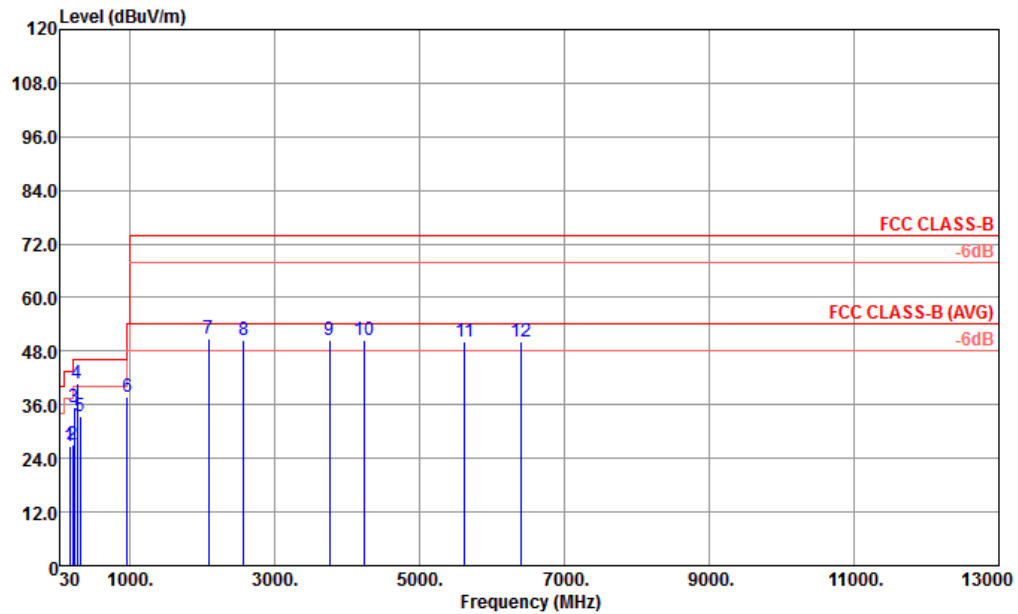


Site : 03CH01-KS
Condition : FCC CLASS-B 3m LF_ANT_37879 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1	165.80	26.61	-16.89	43.50	46.60	11.10	1.44	32.53	---	Peak
2	214.30	27.16	-16.34	43.50	47.58	10.46	1.61	32.49	---	Peak
3	225.94	35.42	-10.58	46.00	55.31	10.99	1.61	32.49	---	Peak
4	268.62	40.74	-5.26	46.00	58.84	12.44	1.90	32.44	100	Peak
5	314.21	33.31	-12.69	46.00	50.11	13.58	2.02	32.40	---	Peak
6	960.23	37.85	-16.15	54.00	44.34	21.54	3.68	31.71	---	Peak
7	2090.00	50.79	-23.21	74.00	46.10	32.32	5.80	33.43	---	Peak
8	2576.00	50.58	-23.42	74.00	42.75	33.01	6.43	31.61	---	Peak
9	3762.00	50.53	-23.47	74.00	38.01	34.89	8.06	30.43	---	Peak
10	4227.00	50.47	-23.53	74.00	38.65	35.42	8.52	32.12	---	Peak
11	5626.00	50.05	-23.95	74.00	39.81	36.11	9.51	35.38	---	Peak
12	6394.00	50.09	-23.91	74.00	40.42	36.38	10.17	36.88	---	Peak



Test Mode :	Mode 4	Temperature :	23~25°C
Test Engineer :	Kear Huang	Relative Humidity :	48~52%
Test Distance :	3m	Polarization :	Vertical
Function Type :	WCDMA Band II Idle + WLAN Idle + Buletooth Idle + USB Cable(Data Link with Notebook) + Earphone + GPS Rx		

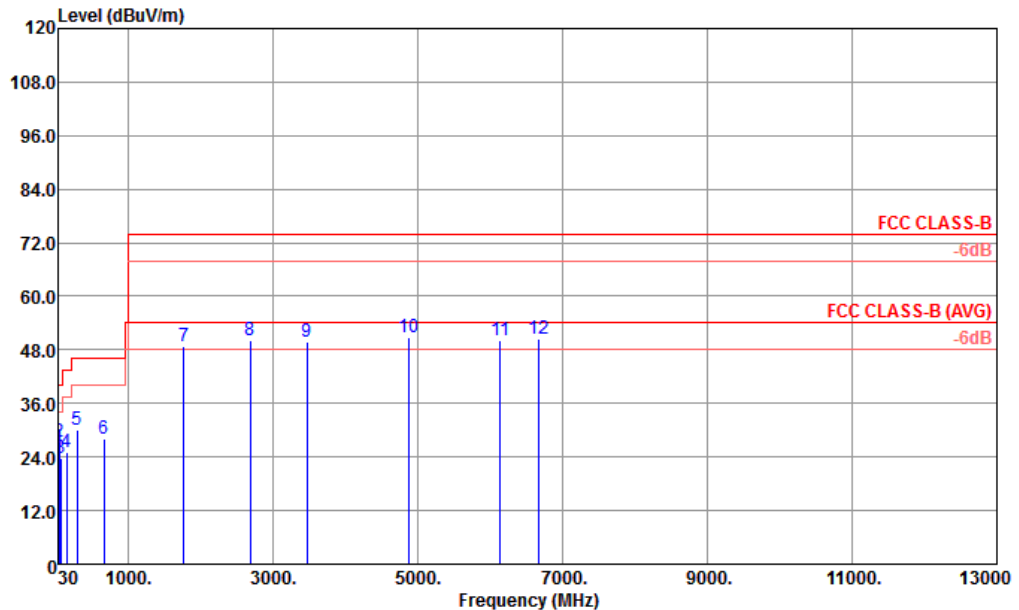

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	32.91	26.16	-13.84	40.00	40.28	17.73	0.79	32.64	---	---	Peak
2	47.46	27.28	-12.72	40.00	48.90	10.23	0.79	32.64	139	105	Peak
3	67.83	23.73	-16.27	40.00	47.79	7.78	0.79	32.63	---	---	Peak
4	152.22	25.02	-18.48	43.50	44.51	11.63	1.44	32.56	---	---	Peak
5	288.02	30.14	-15.86	46.00	47.87	12.79	1.90	32.42	---	---	Peak
6	668.26	28.12	-17.88	46.00	37.41	19.62	3.05	31.96	---	---	Peak
7	1764.00	48.73	-25.27	74.00	47.22	31.35	5.26	35.10	---	---	Peak
8	2680.00	50.30	-23.70	74.00	41.67	33.15	6.57	31.09	---	---	Peak
9	3472.00	49.83	-24.17	74.00	38.26	34.39	7.53	30.35	---	---	Peak
10	4874.00	50.70	-23.30	74.00	40.83	35.74	8.76	34.63	---	---	Peak
11	6138.00	50.02	-23.98	74.00	40.05	36.33	9.98	36.34	---	---	Peak
12	6678.00	50.48	-23.52	74.00	39.88	36.44	10.38	36.22	---	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 25, 2014	Dec. 30, 2014	Oct. 24, 2015	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Dec. 30, 2014	May 03, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Dec. 30, 2014	Nov. 07, 2015	Radiation (03CH01-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Dec. 30, 2014	Sep. 12, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Dec. 30, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Oct. 28, 2014	Dec. 30, 2014	Oct. 27, 2015	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 30, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 30, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 30, 2014	NCR	Radiation (03CH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 29, 2014	Apr. 09, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz;Max 30dBm	Sep. 25, 2014	Apr. 09, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Apr. 09, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Apr. 09, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz Gain 32dB	Sep. 13, 2014	Apr. 09, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 28, 2014	Apr. 09, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 09, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Apr. 09, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Apr. 09, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Dec. 16, 2014~ Apr. 03, 2015	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Dec. 16, 2014~ Apr. 03, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Dec. 16, 2014~ Apr. 03, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Dec. 16, 2014~ Apr. 03, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH01-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH02-KS

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------