



TEST REPORT

No. I15Z40451-EMC01

for

ZTE CORPORATION

WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

Model Name: ZTE Kis II Max/ Kis II Max/ZTE KIS II Max/

KIS II Max/ZTE Kis II Max plus/ ZTE Kis II Max plus

FCC ID: SRQ-IIMAXPLUS

with

Hardware Version: TMBI

Software Version: ZTE-CN-FQB25S-P172R10V1.0.0

Issued Date: 2015-03-17

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No. 525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15Z40451-EMC01	Rev.0	1st edition	2015-03-17

CONTENTS

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	7
4. REFERENCE DOCUMENTS	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS	12

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35℃


Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2015-03-10

Testing End Date: 2015-03-16


1.4. Signature



Wang Junqing
(Prepared this test report)



Qu Pengfei
(Reviewed this test report)



Liu Baodian
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE CORPORATION
Address /Post: J0411, No. 889 Bibo Road, ZhangjiangHi-TechPark, Shanghai, China
City: Shanghai
Postal Code: 201203
Country: China
Contact Person: Zhang Min
Contact Email: /
Telephone: 0086-21-68897541
Fax: /

2.2. Manufacturer Information

Company Name: ZTE CORPORATION
Address /Post: J0411, No. 889 Bibo Road, ZhangjiangHi-TechPark, Shanghai, China
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-68897541
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA/GSM(GPRS) Dual-Mode Digital Mobile Phone
Model Name	ZTE Kis II Max/ Kis II Max/ZTE KIS II Max /KIS II Max/ZTE Kis II Max plus/ ZTE Kis II Max plus
FCC ID	SRQ-IIMAXPLUS
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	865730029523004	TMBI	ZTE-CN-FQB25S-P172R10V1.0.0

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	1540451BA001
AE2	USB	/	1540451DC001
AE3	Charger	/	1540451CH001

AE1

Model	Li3712T42P3h634445
Manufacturer	ZTE CORPORATION
Capacitance	1200mAh
Nominal voltage	3.7V

AE2

Model	CDA3122002C1
Manufacturer	/
Length of cable	65cm

AE3

Model	STC-A22O50I700USBA-Z
Manufacturer	RUIDE
Length of cable	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+ AE2 + AE3	Charger
Set.2	EUT1+ AE1+ AE2	USB

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	10-1-13 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low - Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
Location Column	1/2/3/4	The test is performed in test location 1, 2, 3 or 4 which are described in section 1.1 of this report

Clause	List	Clause in FCC rules	Verdict	Location
1	Radiated Emission	15.109(a)	P	1
2	Conducted Emission	15.107(a)	P	1

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100235	R&S	2016-03-02	1 year
2	Test Receiver	ESCI 7	100948	R&S	2015-07-16	1 year
3	Universal Radio Communication Tester	CMU200	109914	R&S	2015-04-13	1 year
4	Test Receiver	FSV	101047	R&S	2015-07-03	1 year
5	LISN	ENV216	101200	R&S	2015-07-07	1 year
6	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-16	3 years
7	EMI Antenna	3115	9906-5827	ETS-Lindgren	2016-12-15	3 years
8	PC	OPTIPLEX 380	2X1YV2X	DELL	N/A	N/A
9	Monitor	E178FPc	CN-OWR979-64180-7AJ-D2MS	DELL	N/A	N/A
10	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
11	Keyboard	L100	CN0RH659658907 ATOI40	DELL	N/A	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 10 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.3 \text{ dB}$, $k=2$.

Measurement results for Set.1:**Charging Mode/Average detector**

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17885.250	46.6	-18.5	45.6	19.500	V
17872.500	46.3	-18.5	45.6	19.200	H
17886.313	46.3	-18.5	45.6	19.200	V
17909.688	46.3	-18.5	45.6	19.200	H
17871.438	46.3	-18.5	45.6	19.200	V
17894.813	46.3	-18.5	45.6	19.200	H

Charging Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity
17855.500	58.1	-18.5	45.6	31.000	V
17910.750	58.0	-18.5	45.6	30.900	H
17881.000	57.5	-18.5	45.6	30.400	V
17886.313	57.5	-18.5	45.6	30.400	H
18000.000	57.4	-45.6	44.5	58.466	V
17879.938	57.3	-18.5	45.6	30.200	V

Measurement results for Set.2:**USB Mode/Average detector**

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17887.375	46.6	-18.5	45.6	19.500	V
17867.188	46.4	-18.5	45.6	19.300	V
17873.563	46.4	-18.5	45.6	19.300	V
17893.750	46.2	-18.5	45.6	19.100	H
17874.625	46.2	-18.5	45.6	19.100	H
17869.313	46.2	-18.5	45.6	19.100	V

USB Mode/Peak detector

Frequency(MHz)	Result(dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity
17881.000	58.3	-18.5	45.6	31.200	V
17879.938	57.9	-18.5	45.6	30.800	V
17988.313	57.6	-17.7	45.6	29.700	H
17915.000	57.2	-17.7	45.6	29.300	H
17975.563	57.2	-17.7	45.6	29.300	V
17885.250	57.2	-18.5	45.6	30.100	V

Charging Mode, Set.1

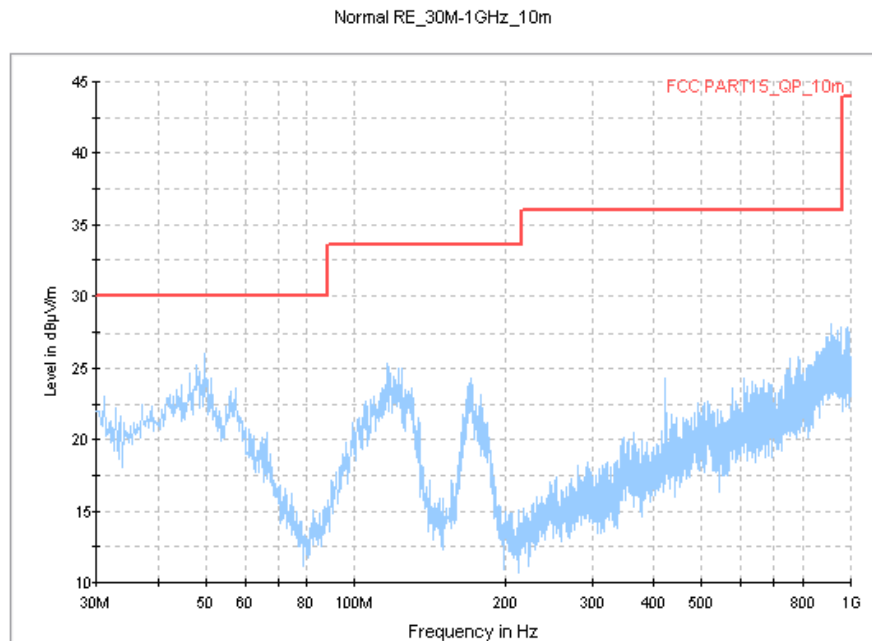


Fig.1 Radiated Emission from 30MHz to 1GHz

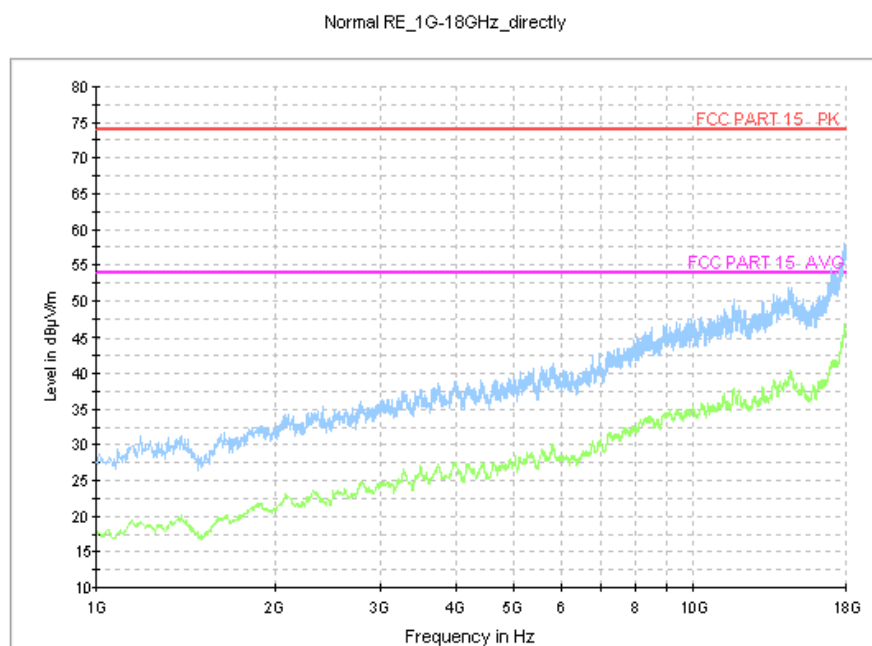


Fig.2 Radiated Emission from 1GHz to 18GHz

USB Mode, Set.2

Normal RE_30M-1GHz_10m

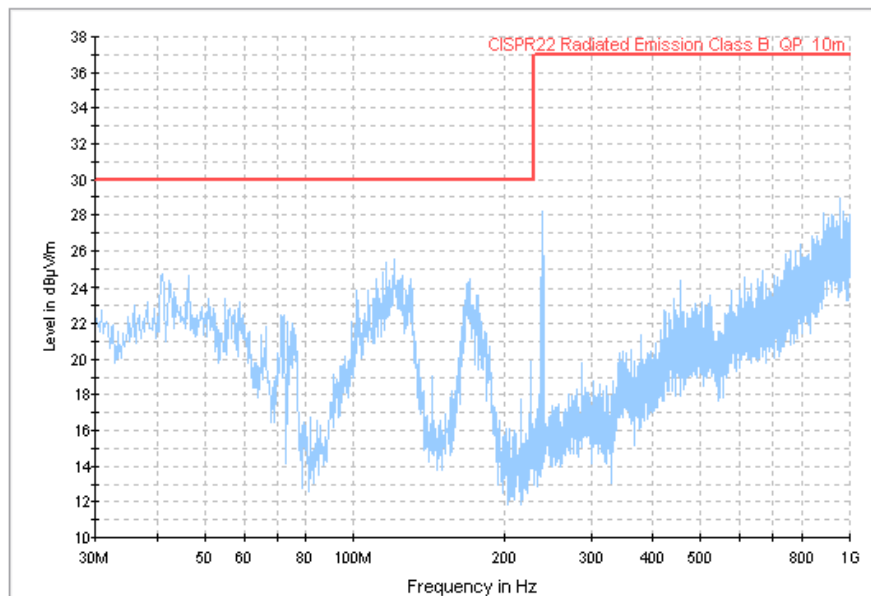


Fig.3 Radiated Emission from 30MHz to 1GHz

Normal RE_1G-18GHz_directly

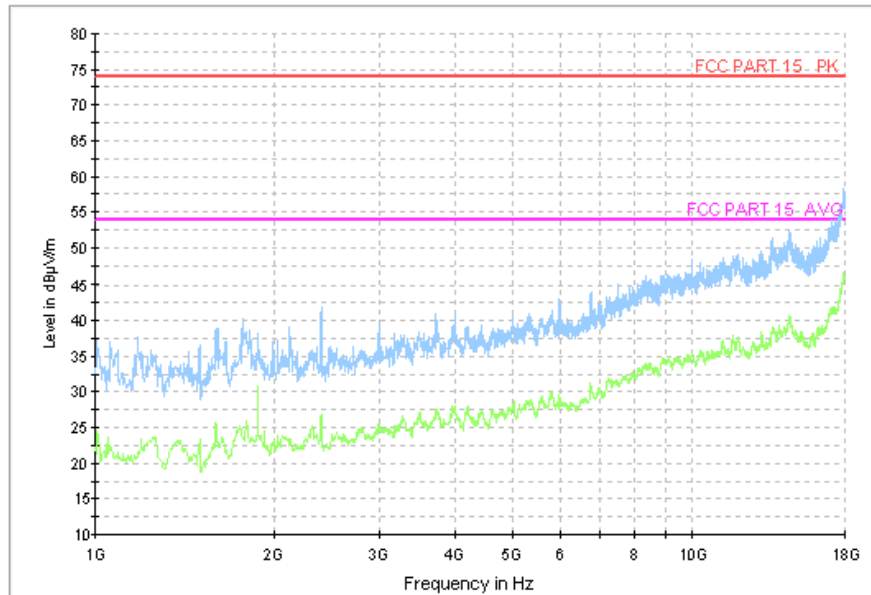


Fig.4 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2009, section 7.2.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 380, and the serial number of the PC is 2X1YV2X. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 2.9 \text{ dB}$, $k=2$.

Charging Mode, Set.1

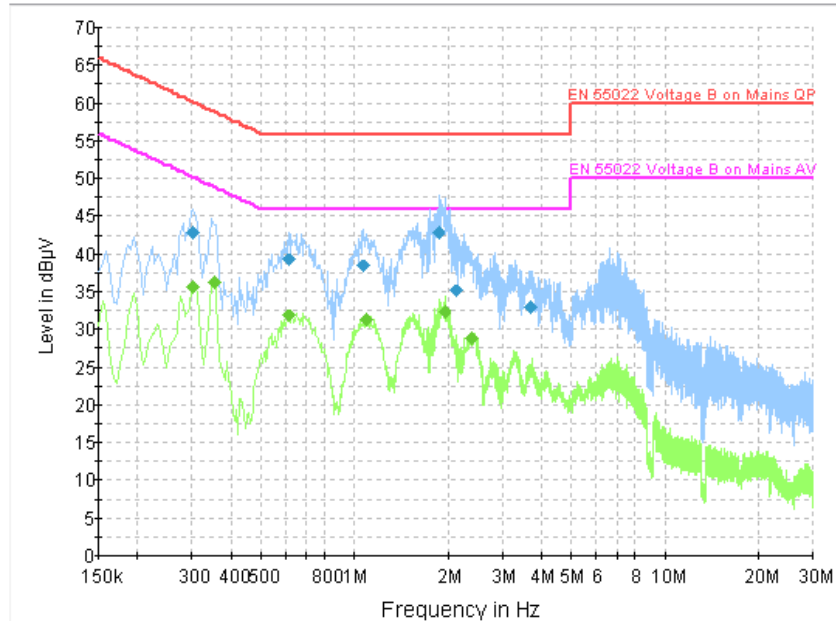


Fig.5 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	42.9	GND	N	19.8	17.2	60.2
0.613500	39.3	GND	N	19.8	16.7	56.0
1.063500	38.4	GND	L1	19.7	17.6	56.0
1.864500	43.0	GND	L1	19.6	13.0	56.0
2.125500	35.2	GND	N	19.6	20.8	56.0
3.687000	33.0	GND	L1	19.7	23.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	35.7	GND	N	19.8	14.4	50.2
0.352500	36.3	GND	N	19.8	12.6	48.9
0.613500	31.9	GND	N	19.8	14.1	46.0
1.090500	31.4	GND	N	19.7	14.6	46.0
1.950000	32.4	GND	L1	19.6	13.6	46.0
2.386500	28.9	GND	N	19.6	17.1	46.0

USB Mode, Set.2

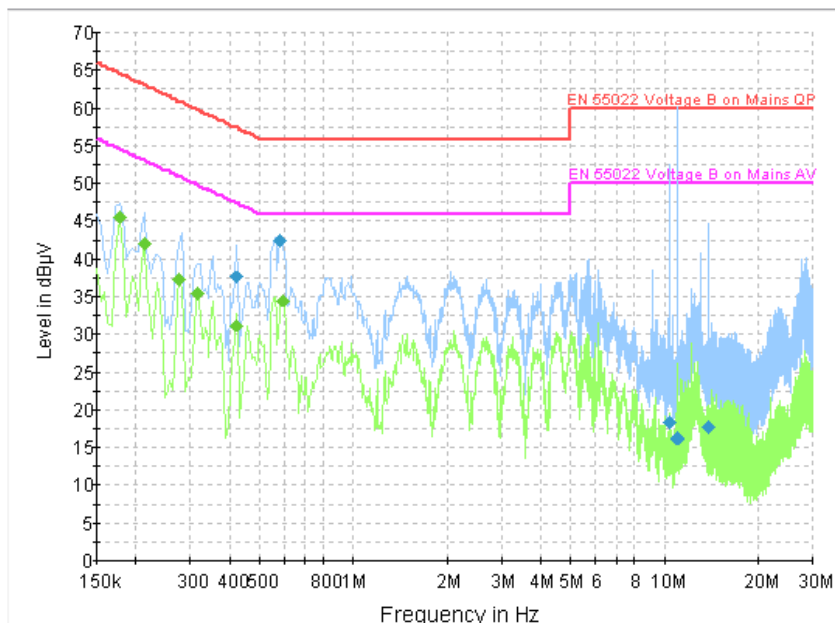


Fig.6 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.420000	37.6	GND	N	19.8	19.8	57.4
0.582000	42.4	GND	N	19.8	13.6	56.0
10.378500	18.3	GND	L1	19.8	41.7	60.0
11.017500	16.3	GND	L1	19.8	43.7	60.0
11.049000	16.1	GND	L1	19.8	43.9	60.0
13.870500	17.6	GND	L1	20.1	42.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.177000	45.5	GND	L1	19.7	9.1	54.6
0.213000	42.1	GND	L1	19.8	11.0	53.1
0.276000	37.3	GND	L1	19.8	13.6	50.9
0.316500	35.6	GND	L1	19.7	14.2	49.8
0.420000	31.2	GND	N	19.8	16.3	47.4
0.595500	34.5	GND	N	19.8	11.5	46.0

END OF REPORT