
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2021-9004(F)-21030302(F)

Product Name: WIFI Router

Product Model: MF263, MF266B

Applicant: ZTE CORPORATION

Manufacturer: ZTE CORPORATION

Specification: FCC Part 15 Subpart C (2020)

FCC ID: SRQ-MF263

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant's details	2
1.4 Manufacturer's details	2
1.5 Test Environment	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 Final Equipment Build Status	4
2.2 Description of Test Modes	5
2.2.1 Test Mode Applicability and Tested Channel Detail	5
2.3 EUT Operating conditions	6
2.4 Support Equipment	7
3 REFERENCE SPECIFICATION	7
4 KEY TO NOTES AND RESULT CODES	8
5 RESULT SUMMARY	9
6 TEST RESULT	10
6.1 Peak Power Output	10
6.2 6dB Bandwidth	11
6.3 Transmitter Power Spectral Density	12
6.4 Conducted Out of band emission measurement	13
6.5 Band-edge measurement	14
6.6 Spurious Radiated Emissions	15
6.7 AC Power line Conducted Emission	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	58

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Fax:	--
Email:	gongyu@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Fax:	--
Email:	gongyu@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-03-03
Testing Start Date:	2021-03-03
Testing End Date:	2021-04-23

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	32

Normal Supply Voltage (V d.c.):	12.0
---------------------------------	------

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band:	2.412GHz~2.462GHz
Number of Channel For 20MHz:	11
Number of Channel For 40MHz:	7
Modulation Type:	802.11b/g/n (HT20/HT40)
Power Supply:	Charger
Hardware Version:	MF266BHW1.0
Software Version:	BD_CLAPEIDUMF266BV1.0.0B01
IMEI or Sample:	#1
Antenna type:	Refer to Note
Antenna connector:	Refer to Note

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency band (GHz)	Antenna type	Connector Type
N/A	N/A	Ant0:2.5dBi Ant1:2.6dBi	2.4GHz~2.4835GHz	Fixed Internal Antenna	N/A

Note1: Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

Note2: The antenna gain is provided by the customer and involved in the calculation and influence of the test results. Our laboratory takes the value declared by the customer as the criterion, and the customer is responsible for the antenna gain value. Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance.

Note3: 802.11b/g cannot transmit at the same time. 802.11n MIMO is uncorrelated signal, Directional Gain is not a common character in 802.11n simultaneous transmitting modes.

11n MIMO DG=2.55dBi

d) *Unequal antenna gains, with equal transmit powers.* For antenna gains given by G_1, G_2, \dots, G_N dBi

(i) If transmit signals are *correlated*, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

(ii) If all transmit signals are *completely uncorrelated*, then

Directional gain = $10 \log[10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10} / N_{ANT}]$ dBi

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE ≥ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where

RE ≥ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1/6/11 For HT20 3/6/9 For HT40	DBPSK/BPSK	1,6, 6.5,13.5 8.6,17.2

2.3 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.4 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment:	Charger1
Manufacturer:	SHENZHEN BAIJUNDA ELECTRONIC CO LTD
Model Number:	STC-A1215C55A-Z
Equipment:	Charger2
Manufacturer:	Shenzhen Ruijing Industrial Co.,Ltd.
Model Number:	STC-A1215C55A-Z

3 REFERENCE SPECIFICATION


Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e))	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Hou Siyu 	Issued date: 20210428

6 TEST RESULT

6.1 Peak Power Output

6.2.1 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.3 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

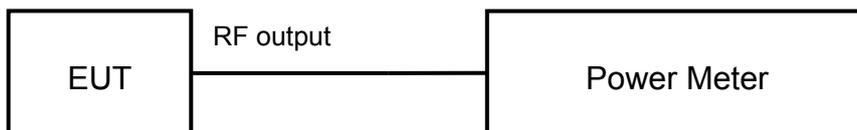

6.2.5 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

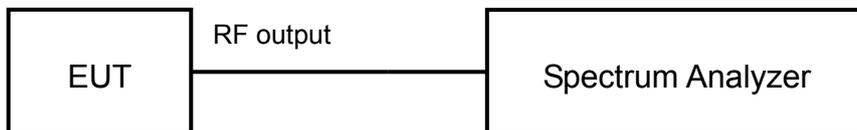

6.1.5 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

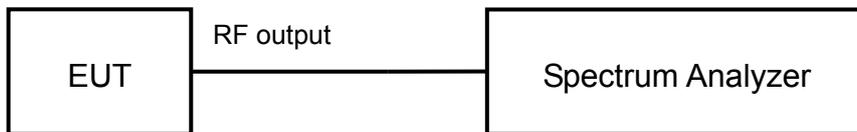

6.3.5 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.4.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

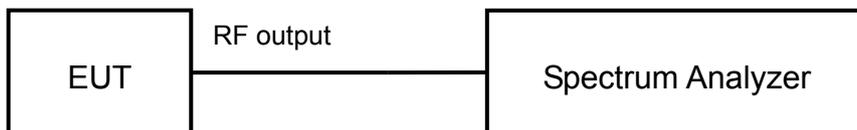

6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW ≥ 300 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

6.5.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW ≥ 300 kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

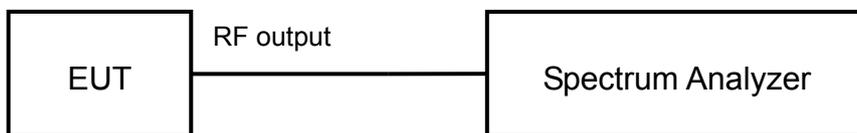

6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.3 Test Procedure Used

ANSI C63.10-2013

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.4 Test Settings

Average Field Strength Measurements

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.5 Test Setup


For Radiated emission below 30MHz

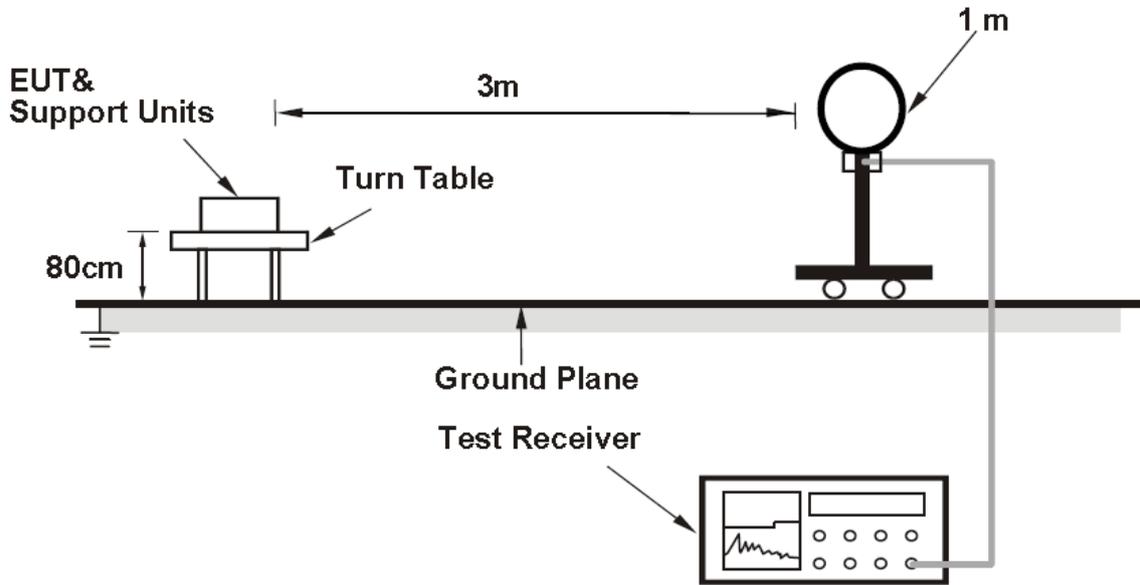

For Radiated emission 30MHz to 1GHz

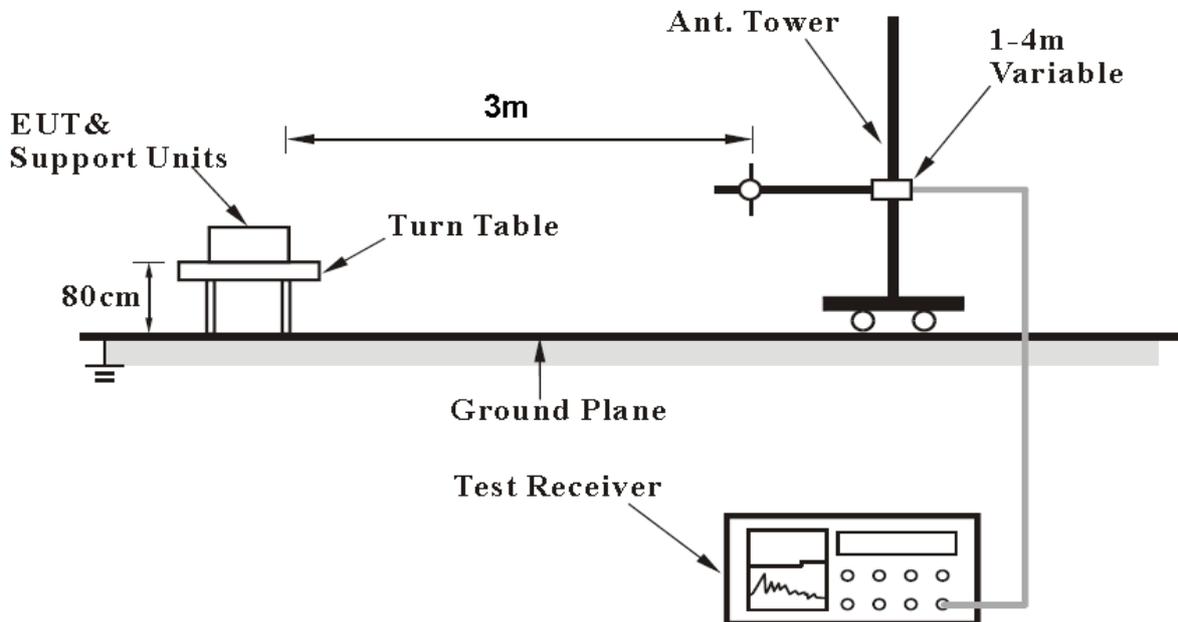

For Radiated emission above 1GHz

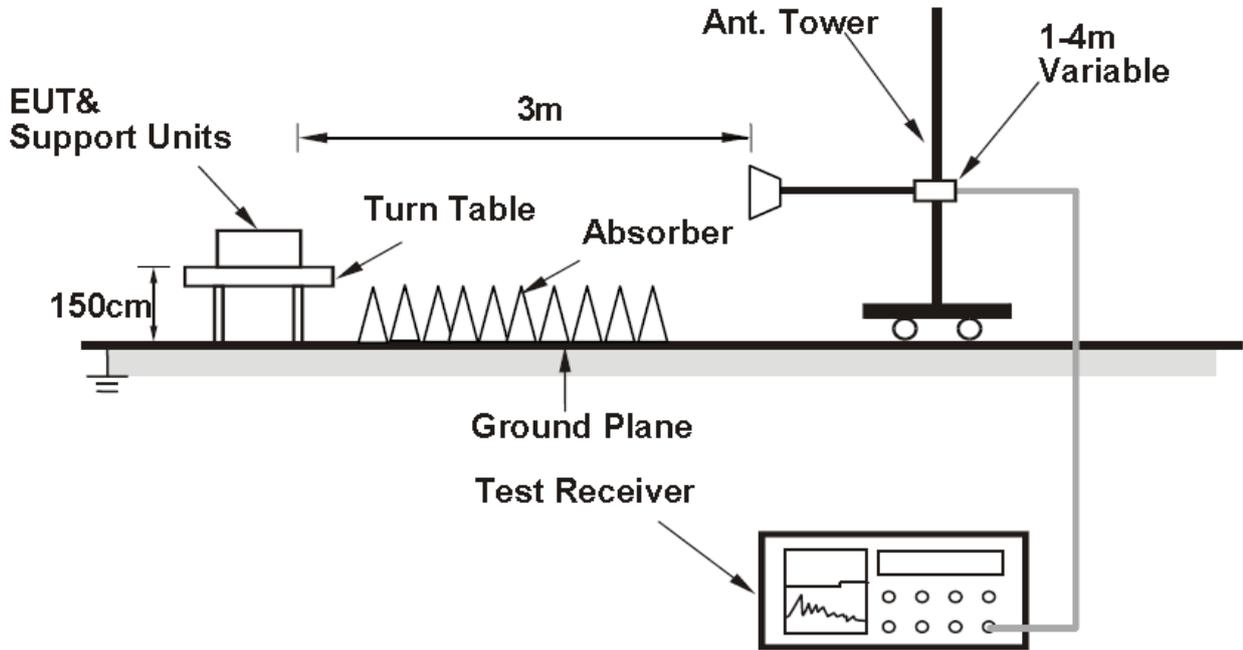

6.6.6 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.2 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/240V/60Hz.

6.7.3 Test Setup

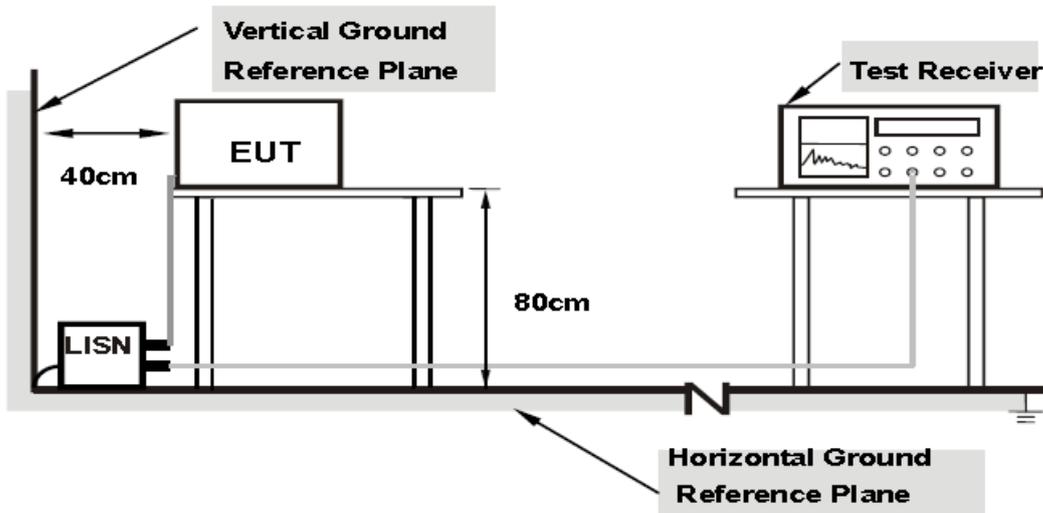

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.4 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2020.08.20	2021.08.19
2.	N9020A Spectrum Analyzer	Agilent	MY48010771	2020.08.20	2021.08.19
3.	Power Meter E4416A	Agilent	MY52370013	2021.04.13	2022.04.12
4.	Power Sensor E9327A	Agilent	MY52420006	2021.04.13	2022.04.12
5.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2020.08.20	2021.08.19
6.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
7.	Turn table Diameter:5m	FRANKONIA	----	----	----
8.	Antenna master SAC(MA4.0)	MATURO	----	----	----
9.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
10.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
11.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2020.08.20	2021.08.19
12.	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
13.	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
14.	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
15.	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5Mbps)
802.11n HT40	MCS0(13.5Mbps)

Antenna gain

Band	Chain0 Ant Gain (dBi)	Chain1 Ant Gain (dBi)	Power Limit (dBm)	PSD Limit (dBm/3kHz)
2.4GHz	2.5	2.6	30.0	8.0

Duty cycle

Test Mode	Duty Cycle (%)	Correction Factor(dB)
802.11b	99.62	0.02
802.11g	97.48	0.11
802.11n HT20	98.97	0.04
802.11n HT40	97.84	0.09

Conducted power


Mode	Tones/ RU Index	Freq(MHz)	Chain	Peak power output (dBm)	Average power output (dBm)
802.11b	NA	2412MHz	Chain0	20.68	17.64
	NA		Chain1	20.95	17.90
	NA	2437MHz	Chain0	20.99	17.95
	NA		Chain1	20.83	17.72
	NA	2462MHz	Chain0	21.12	18.15
	NA		Chain1	21.52	18.52
802.11g	NA	2412MHz	Chain0	23.52	15.31
	NA		Chain1	23.92	15.65
	NA	2437MHz	Chain0	23.97	15.71
	NA		Chain1	23.89	15.63
	NA	2462MHz	Chain0	24.20	15.97
	NA		Chain1	24.57	16.29
802.11n20M	NA	2412MHz	Chain0	23.10	14.69
	NA		Chain1	23.23	14.81
	NA		MIMO	26.18	17.76
	NA	2437MHz	Chain0	23.37	14.97
	NA		Chain1	23.19	14.76
	NA		MIMO	26.29	17.88
	NA	2462MHz	Chain0	23.42	15.04
	NA		Chain1	23.85	15.43
	NA		MIMO	26.65	18.25
802.11n40M	NA	2422MHz	Chain0	22.61	14.48
	NA		Chain1	22.34	14.22
	NA		MIMO	25.49	17.36
	NA	2437MHz	Chain0	22.84	14.73
	NA		Chain1	22.65	14.51
	NA		MIMO	25.76	17.63
	NA	2452MHz	Chain0	22.74	14.65
	NA		Chain1	22.62	14.48
	NA		MIMO	25.69	17.58

6dB Bandwidth


Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	8.23
		Chain1	6.77
2437MHz	6	Chain0	8.63
		Chain1	7.46
2462MHz	11	Chain0	8.03
		Chain1	8.96


Test Mode:802.11b Chain0

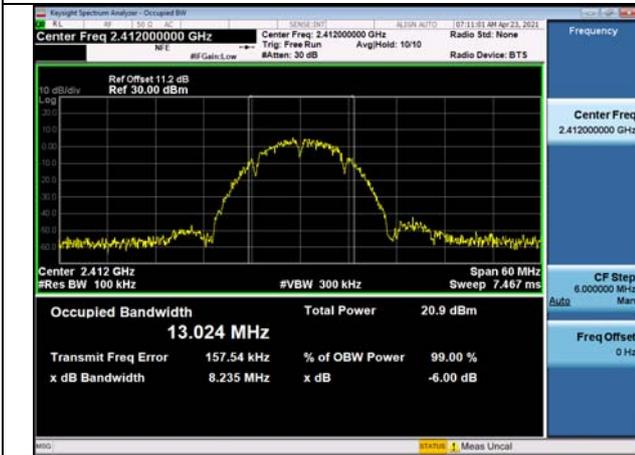

Test Mode:802.11b Chain0

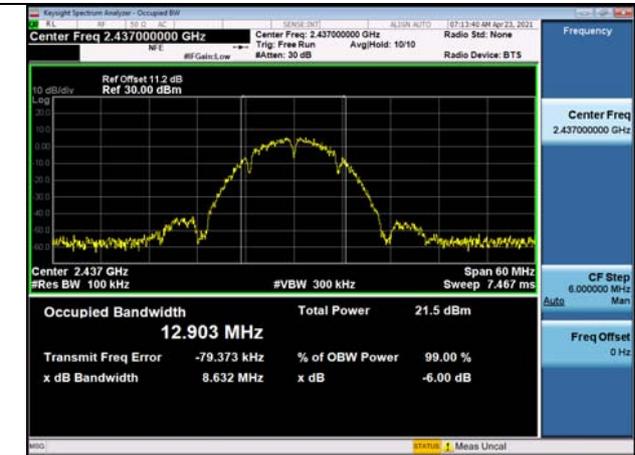

Test Mode:802.11b Chain0

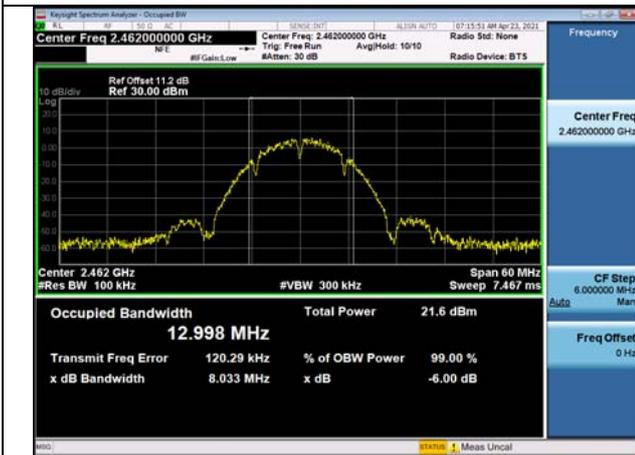


Test Mode:802.11b Chain1



Test Mode:802.11b Chain1

Test Mode:802.11b Chain1

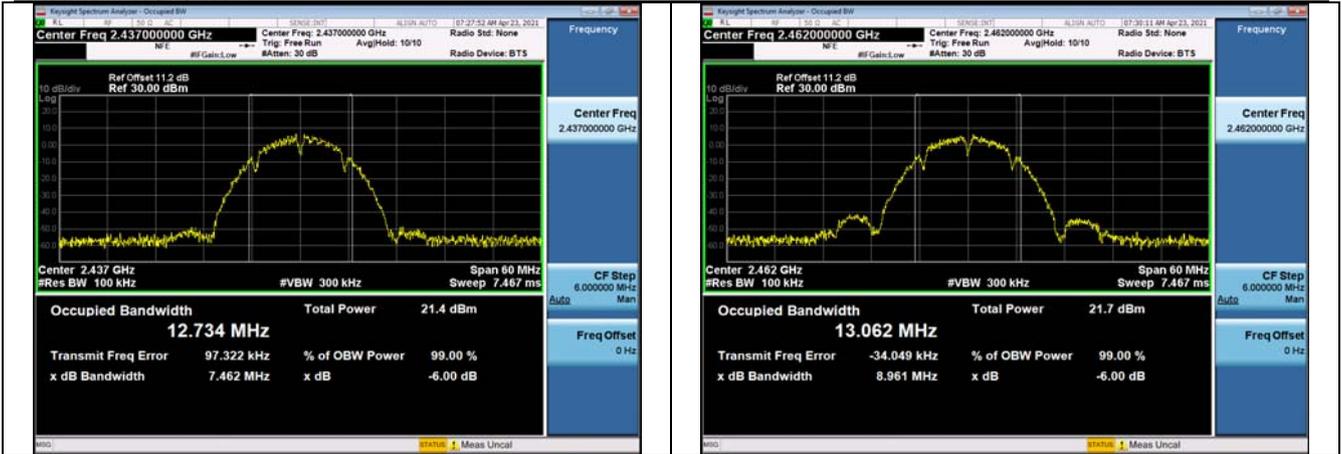


Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	16.35
		Chain1	16.53
2437MHz	6	Chain0	16.44
		Chain1	16.29
2462MHz	11	Chain0	16.42
		Chain1	16.37


Test Mode:802.11g Chain0




Test Mode:802.11g Chain0

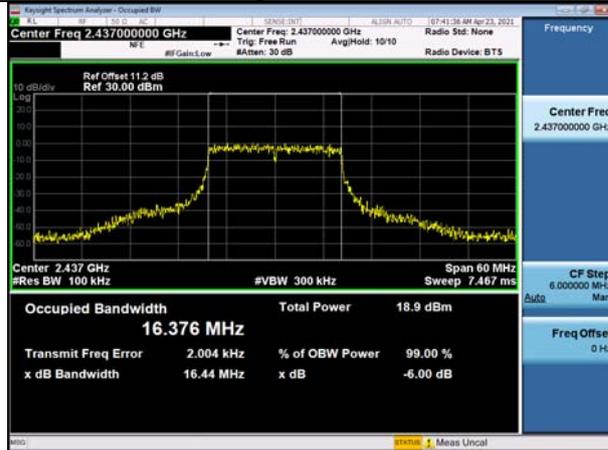

Test Mode:802.11g Chain0

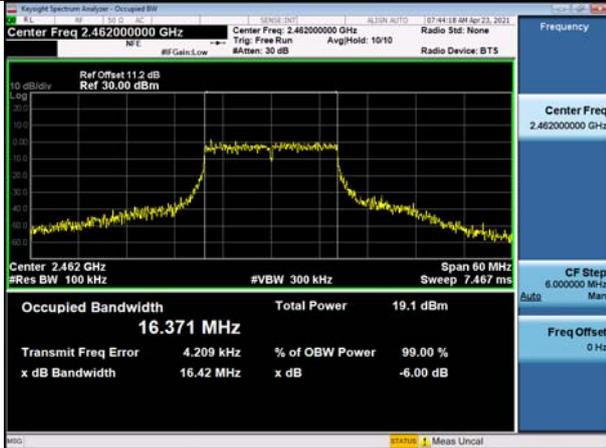


Test Mode:802.11g Chain1

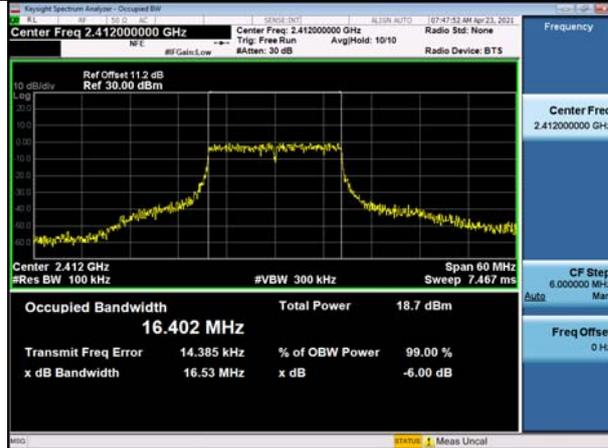

Test Mode:802.11g Chain1


Test Mode:802.11g Chain1

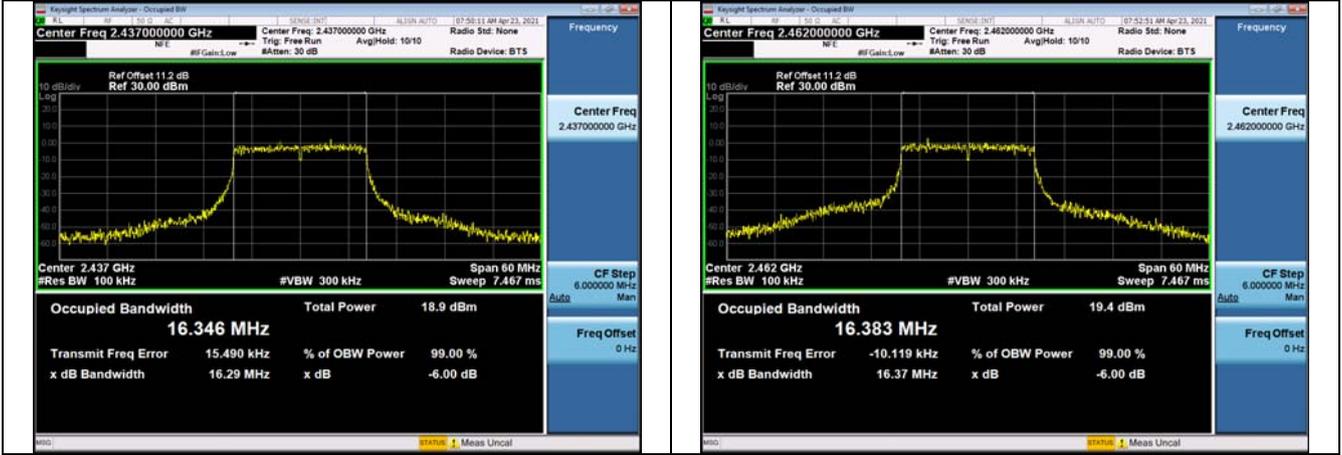

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	17.71
		Chain1	17.71
2437MHz	6	Chain0	17.25
		Chain1	17.54
2462MHz	11	Chain0	17.69
		Chain1	17.70

Test Mode:802. 11n HT20 Chain0

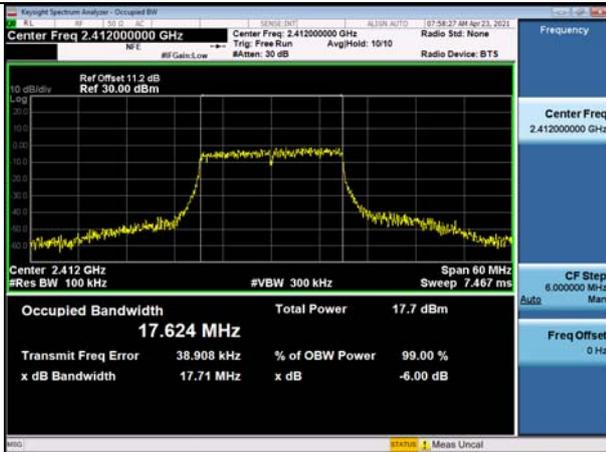


Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain1

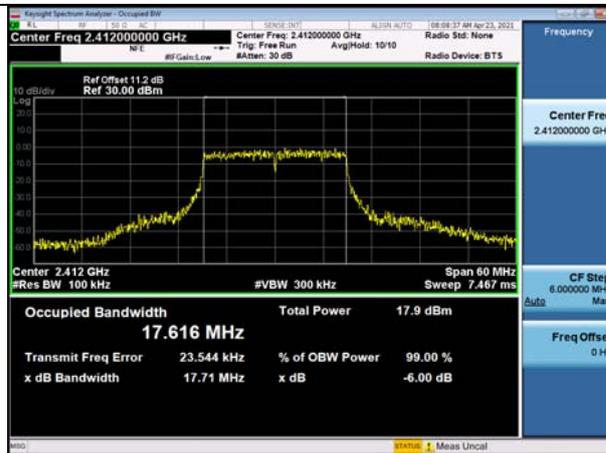

Test Mode:802. 11n HT20 Chain1

Test Mode:802. 11n HT20 Chain1

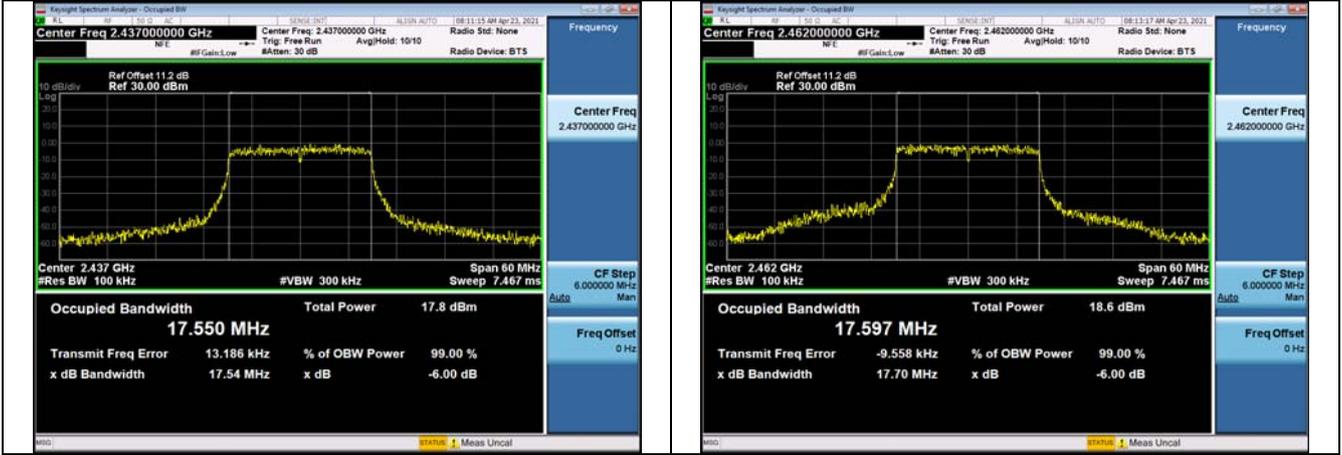


Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2422MHz	3	Chain0	35.15
		Chain1	35.74
2437MHz	6	Chain0	29.95
		Chain1	34.41
2452MHz	9	Chain0	36.17
		Chain1	36.27

Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0

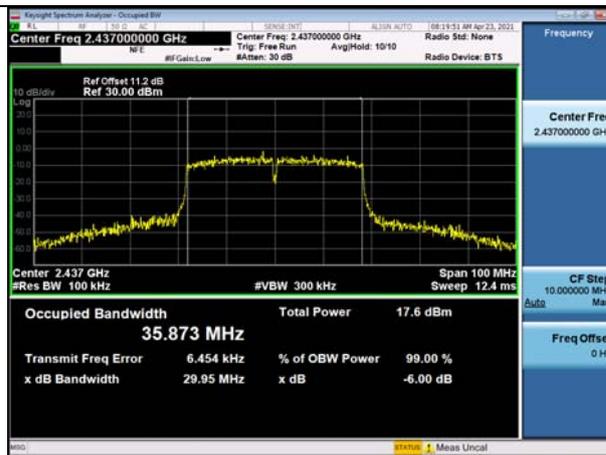

Test Mode:802. 11n HT40 Chain0




Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1

Test Mode:802. 11n HT40 Chain1

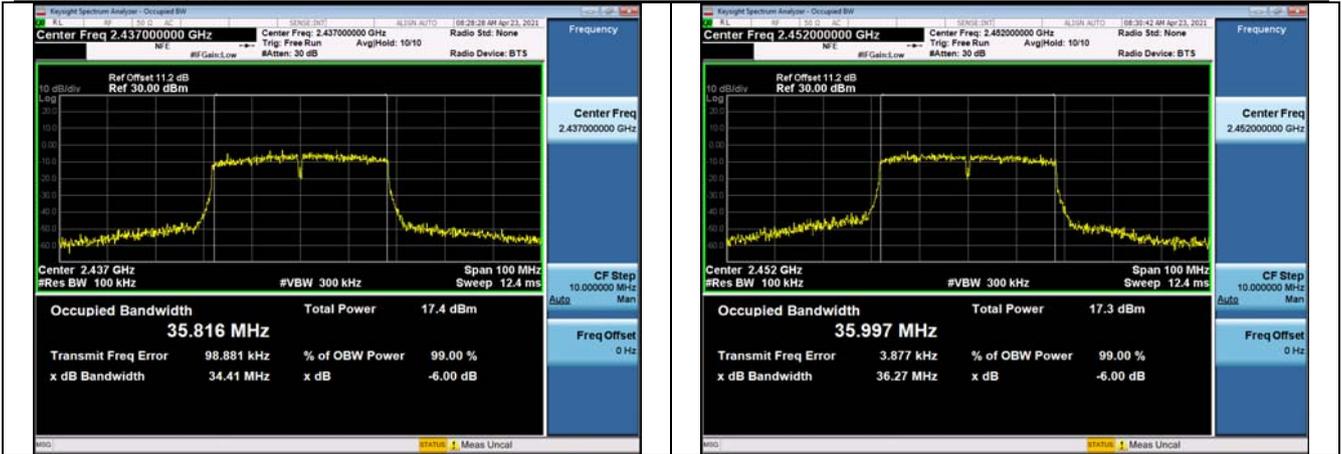


99% Bandwidth

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	12.853
		Chain1	13.012
2437MHz	6	Chain0	12.963
		Chain1	12.767
2462MHz	11	Chain0	13.091
		Chain1	13.047


Test Mode:802.11b Chain0

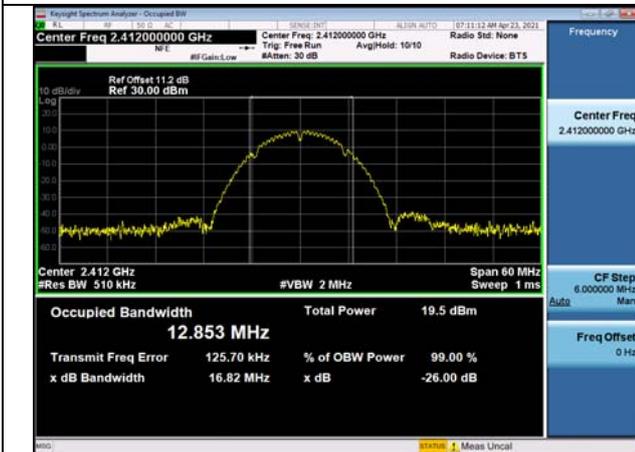


Test Mode:802.11b Chain0



Test Mode:802.11b Chain0

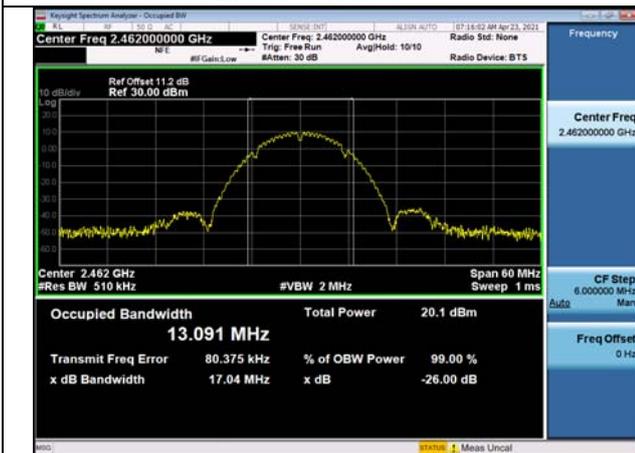


Test Mode:802.11b Chain1

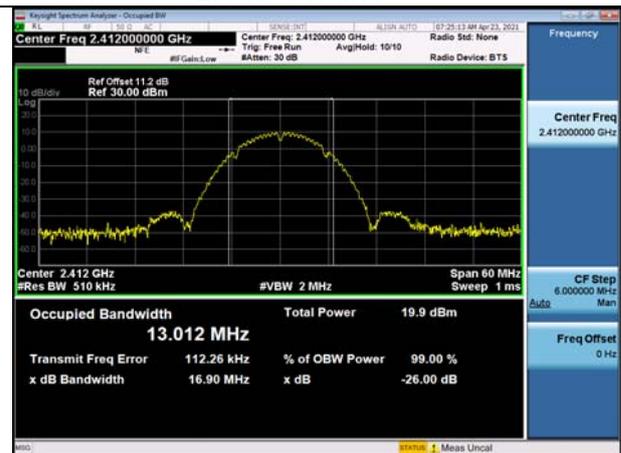

Test Mode:802.11b Chain1

Test Mode:802.11b Chain1

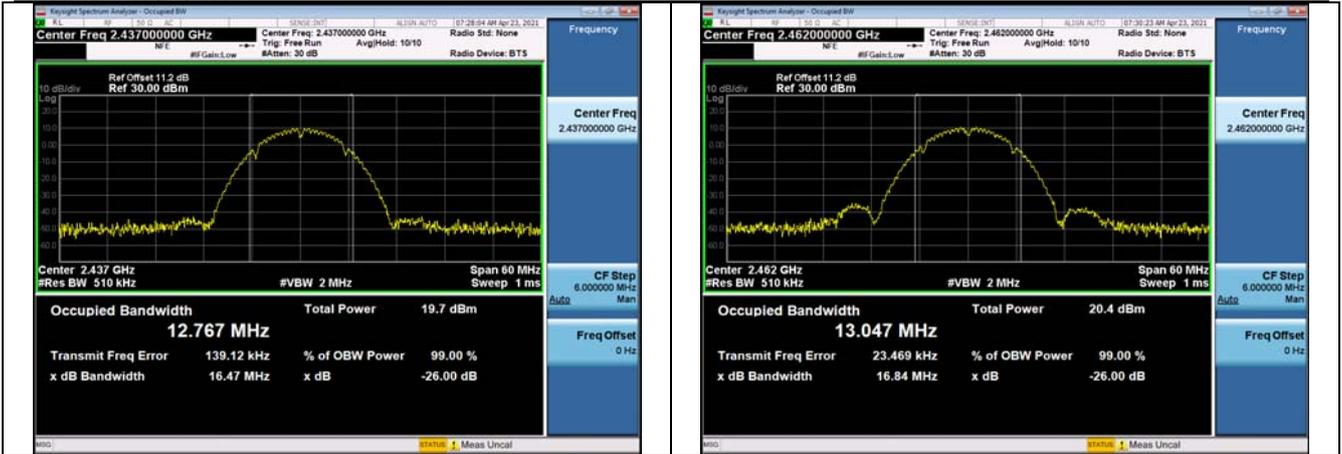

Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	16.543
		Chain1	16.572
2437MHz	6	Chain0	16.606
		Chain1	16.560
2462MHz	11	Chain0	16.584
		Chain1	16.716

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0



Test Mode:802.11g Chain0




Test Mode:802.11g Chain1



Test Mode:802.11g Chain1


Test Mode:802.11g Chain1

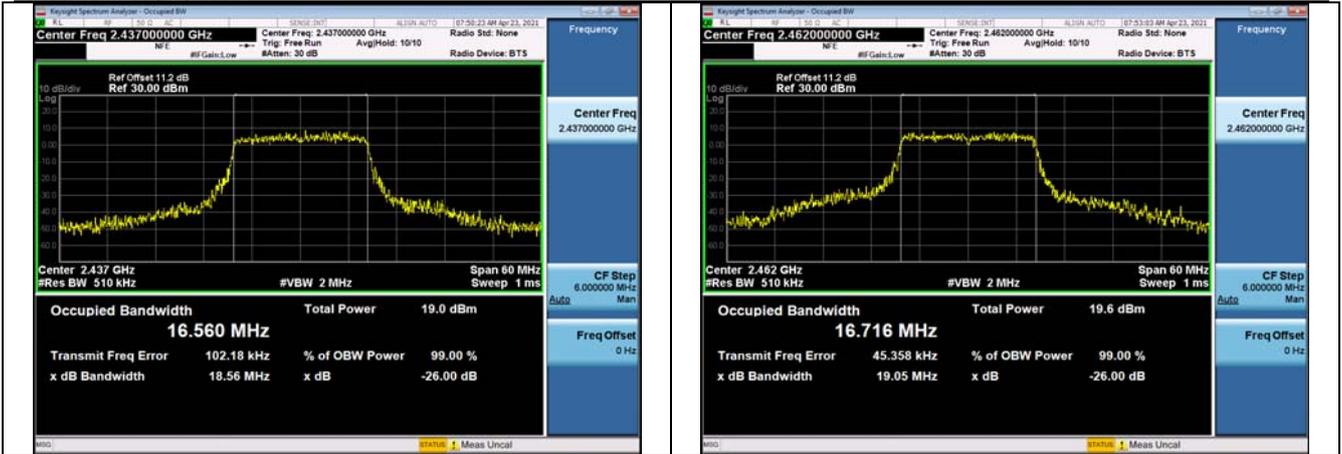

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	17.803
		Chain1	17.751
2437MHz	6	Chain0	17.696
		Chain1	17.708
2462MHz	11	Chain0	17.788
		Chain1	17.792

Test Mode:802. 11n HT20 Chain0

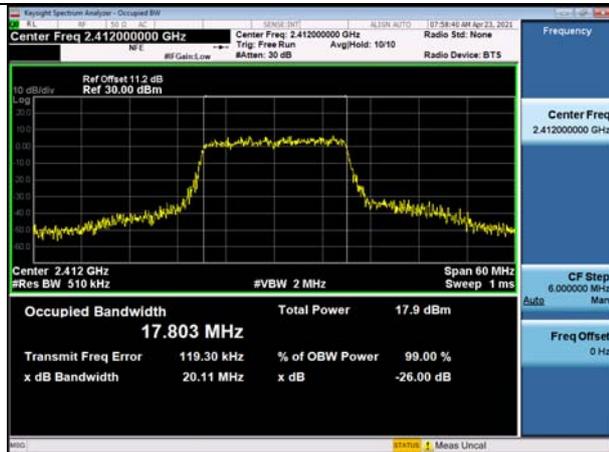

Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain1



Test Mode:802. 11n HT20 Chain1

Test Mode:802. 11n HT20 Chain1

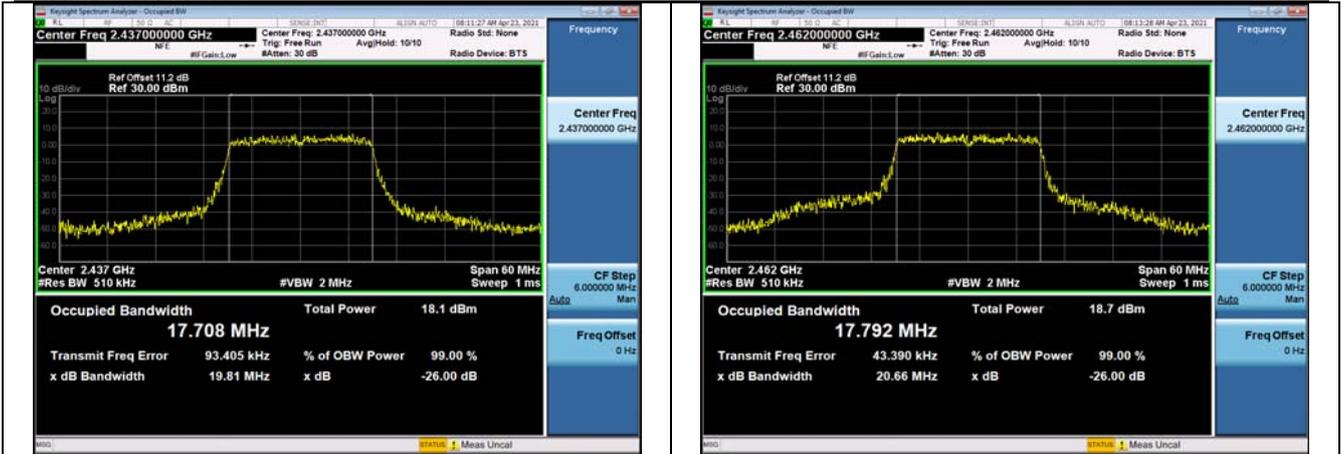

Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2422MHz	3	Chain0	35.725
		Chain1	35.988
2437MHz	6	Chain0	35.826
		Chain1	35.741
2452MHz	9	Chain0	36.059
		Chain1	35.974

Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0



Test Mode:802. 11n HT40 Chain0




Test Mode:802. 11n HT40 Chain1



Test Mode:802. 11n HT40 Chain1

Test Mode:802. 11n HT40 Chain1

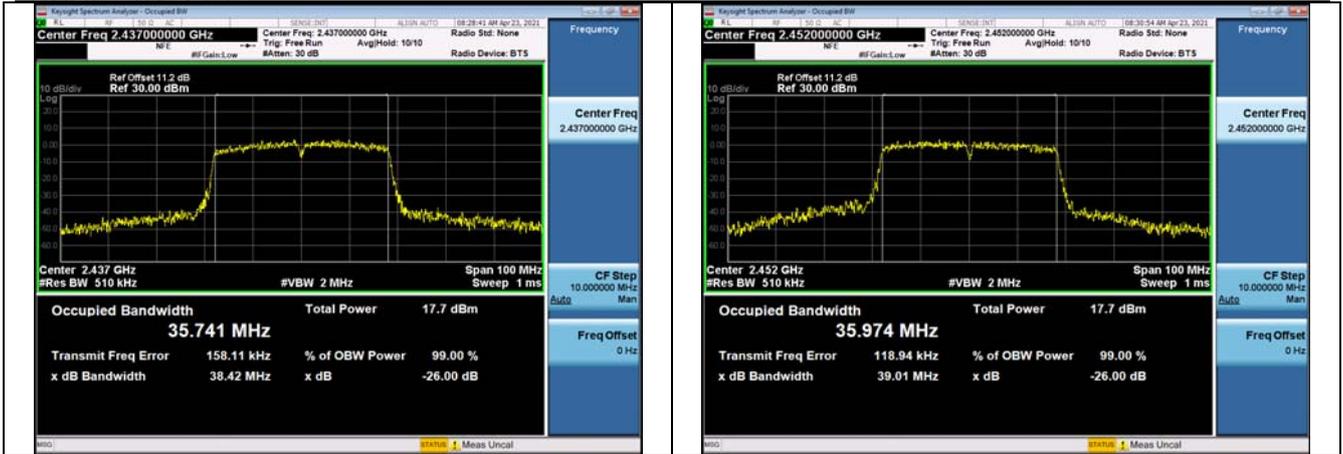

Transmitter Power Spectral Density

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-13.394
		Chain1	-13.509
2437MHz	6	Chain0	-13.487
		Chain1	-13.579
2462MHz	11	Chain0	-13.632
		Chain1	-13.083

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11b Chain1



Test Mode:802.11b Chain1


Test Mode:802.11b Chain1



Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-10.964
		Chain1	-11.003
2437MHz	6	Chain0	-10.912
		Chain1	-10.604
2462MHz	11	Chain0	-10.886
		Chain1	-10.377


Test Mode:802.11g Chain0

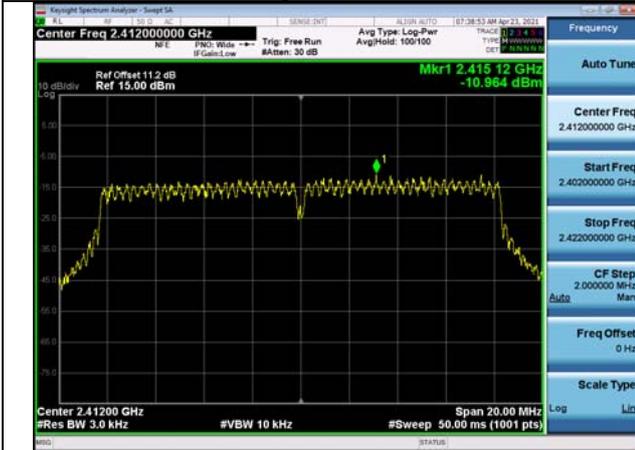

Test Mode:802.11g Chain0



Test Mode:802.11g Chain0

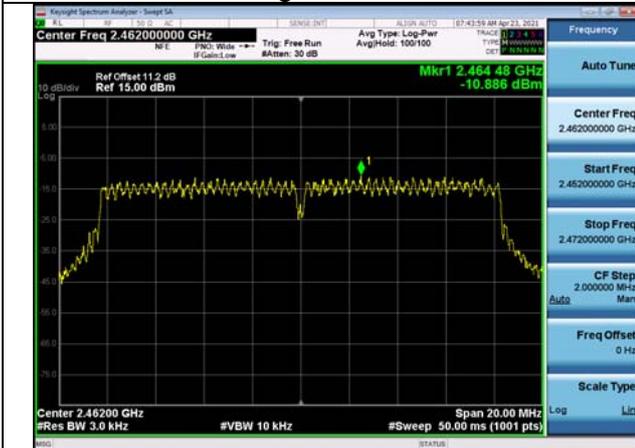


Test Mode:802.11g Chain1



Test Mode:802.11g Chain1


Test Mode:802.11g Chain1

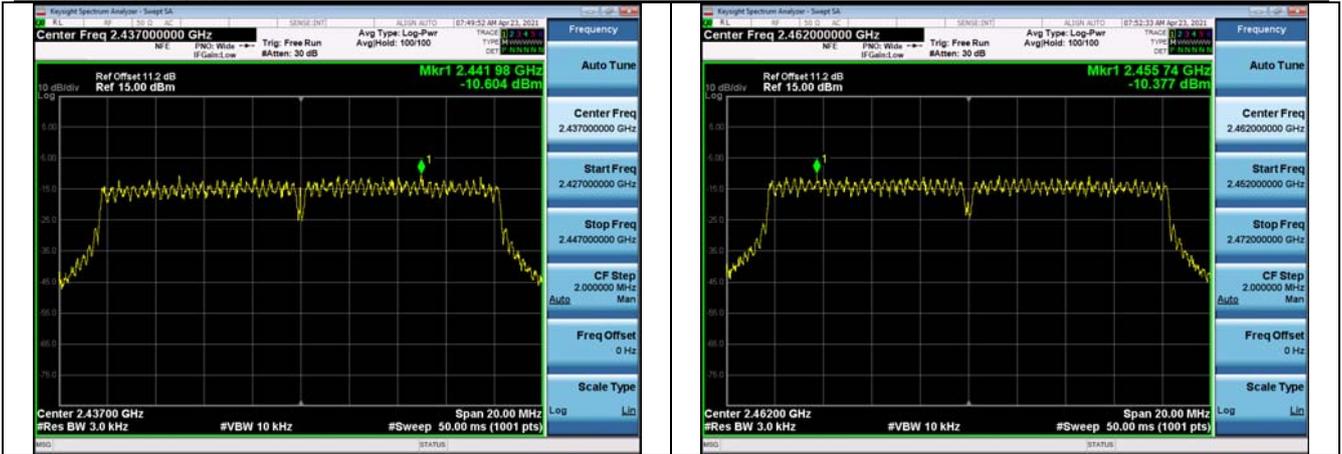


Test Mode:802. 11n HT40

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2422MHz	3	Chain0	-12.417
		Chain1	-12.942
		MIMO	-9.66
2437MHz	6	Chain0	-12.159
		Chain1	-12.513
		MIMO	-9.32
2452MHz	9	Chain0	-12.187
		Chain1	-12.626
		MIMO	-9.39


Test Mode:802. 11n HT40 Chain0

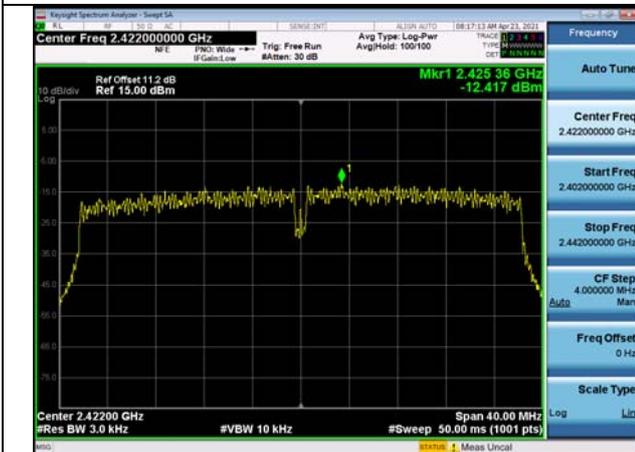


Test Mode:802. 11n HT40 Chain0

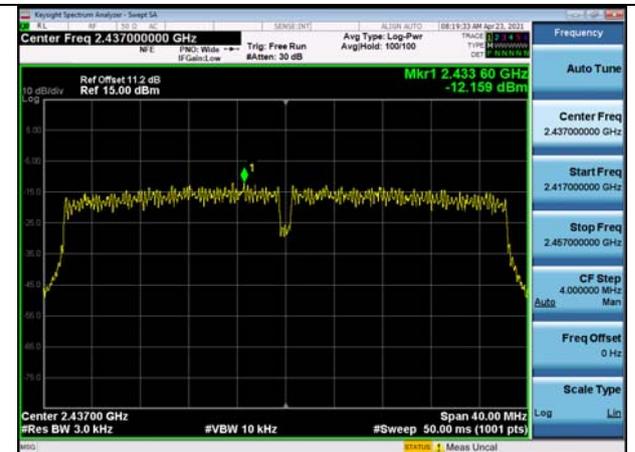

Test Mode:802. 11n HT40 Chain0

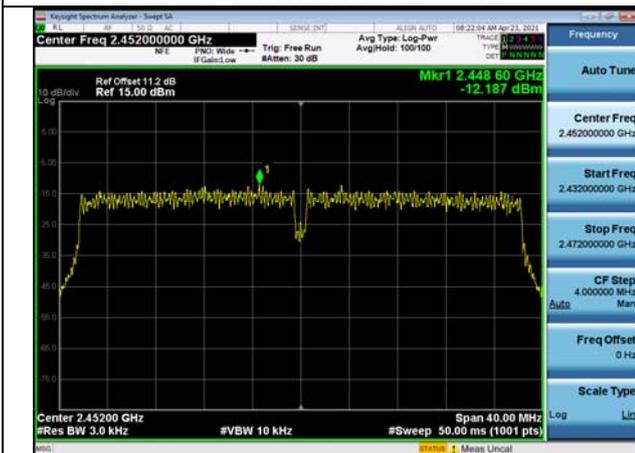


Test Mode:802. 11n HT40 Chain1

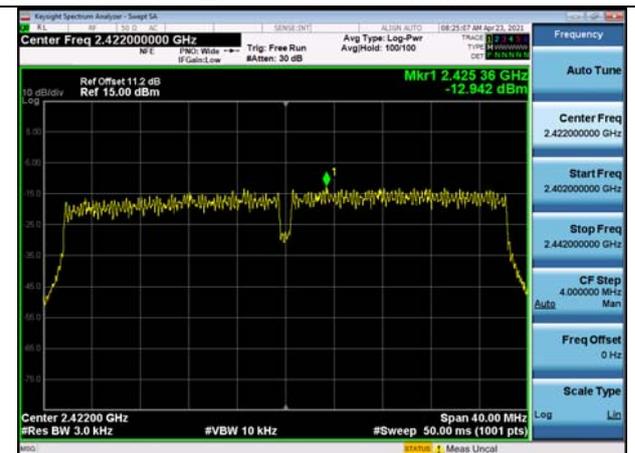

Test Mode:802. 11n HT40 Chain1

Test Mode:802. 11n HT40 Chain1

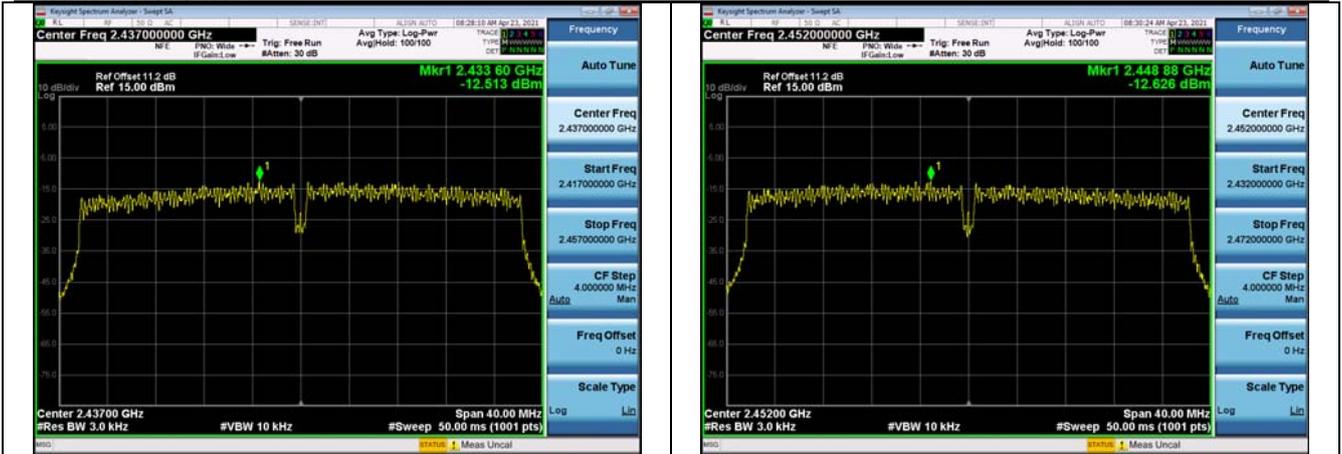

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-12.000
		Chain1	-11.965
		MIMO	-8.97
2437MHz	6	Chain0	-12.296
		Chain1	-11.638
		MIMO	-8.94
2462MHz	11	Chain0	-11.166
		Chain1	-11.588
		MIMO	-8.36

Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain0



Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain1

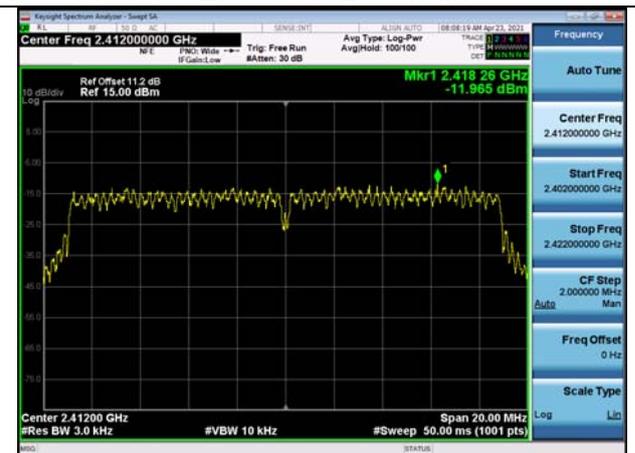

Test Mode:802. 11n HT20 Chain1

Test Mode:802. 11n HT20 Chain1

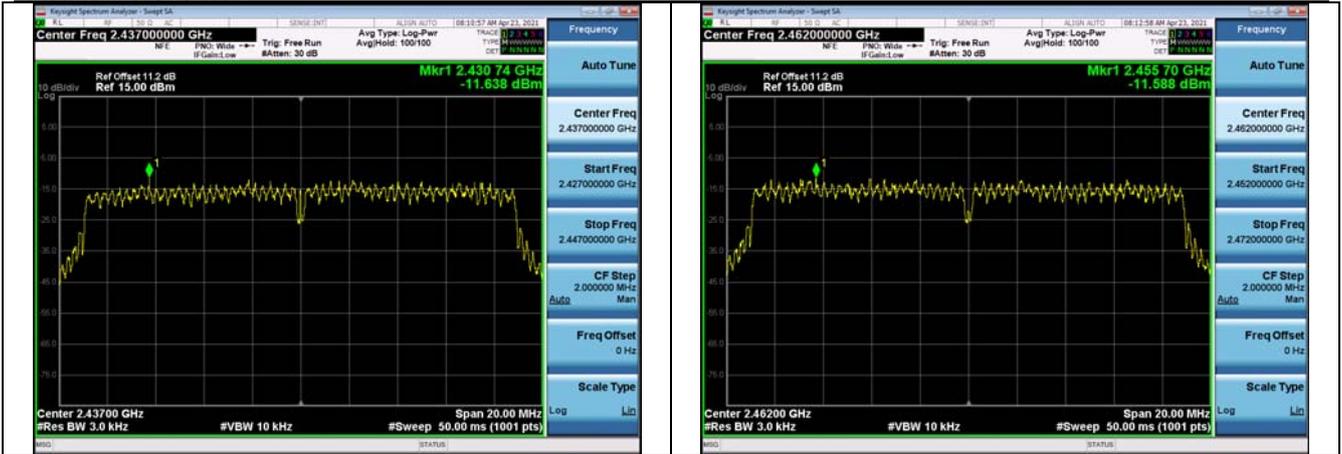


Conducted Out of band emission measurement

Test Mode:802.11b

Test Mode:802.11b Chain0 CH1




Test Mode:802.11b Chain0 CH6

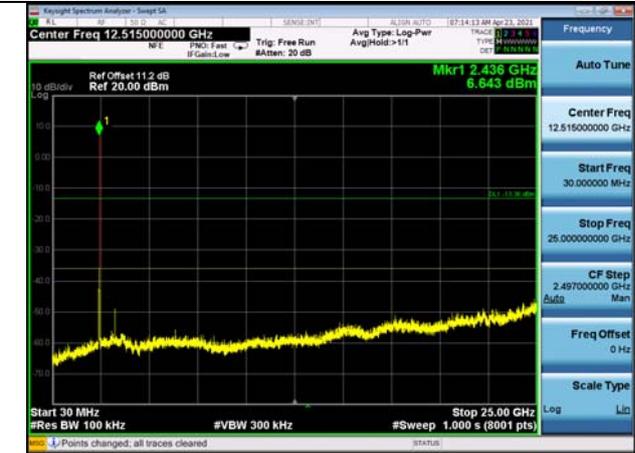


Test Mode:802.11b Chain0 CH11



Test Mode:802.11b Chain1 CH1

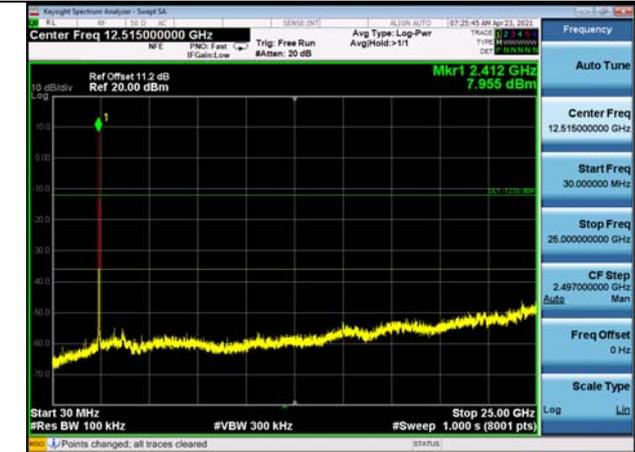

Test Mode:802.11b Chain1 CH6

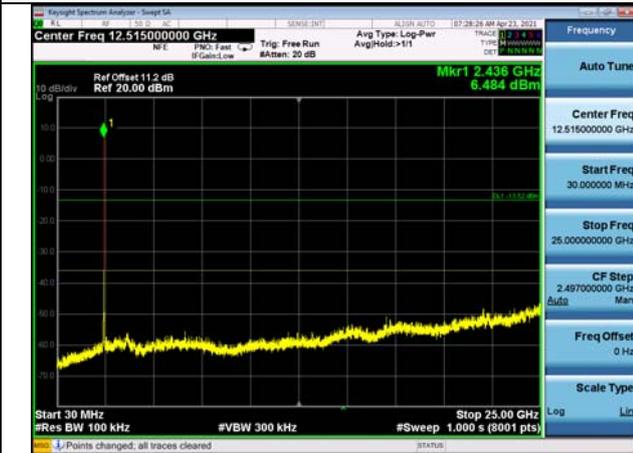



Test Mode:802.11b Chain1 CH11



Test Mode:802.11g


Test Mode:802.11g Chain0 CH1

Test Mode:802.11g Chain0 CH6

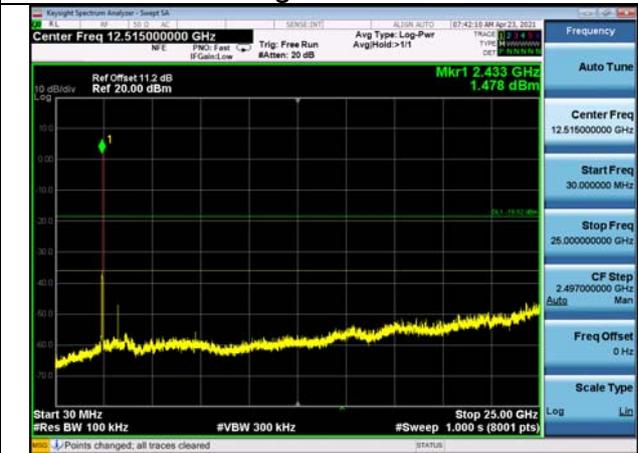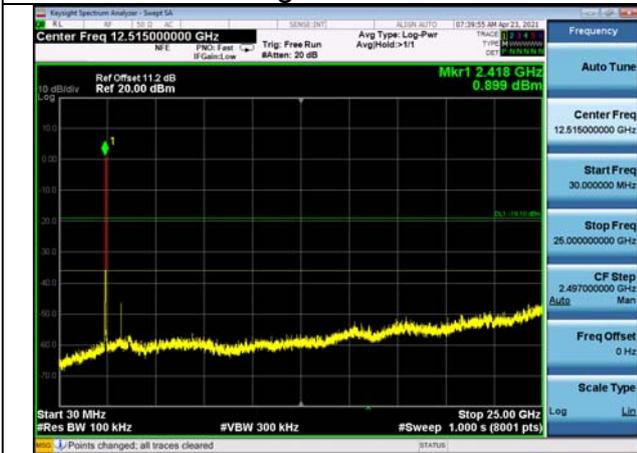



Test Mode:802.11g Chain0 CH11

Test Mode:802.11g Chain1 CH1

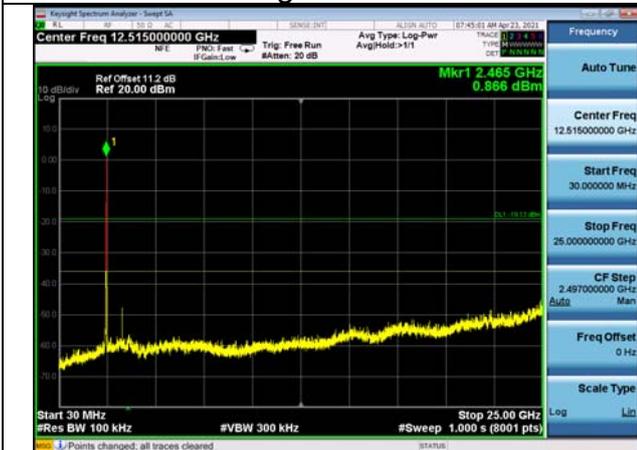

Test Mode:802.11g Chain1 CH6



Test Mode:802.11g Chain1 CH11

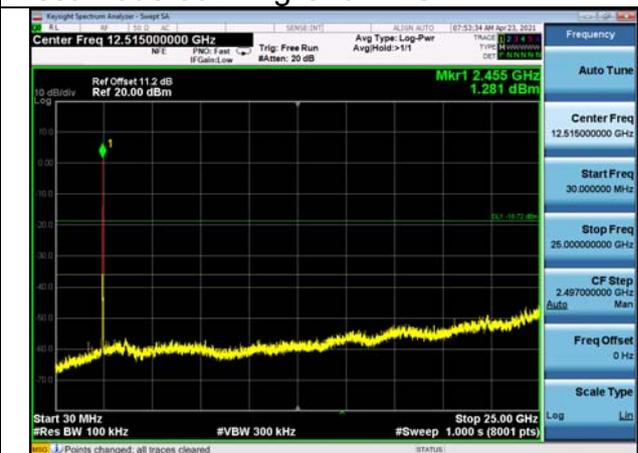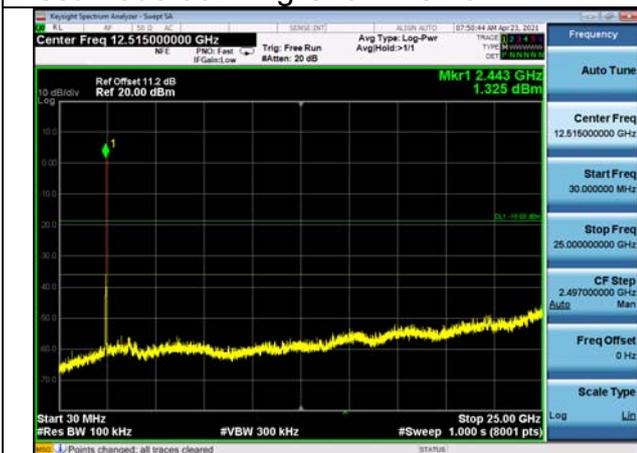

Test Mode:802. 11n HT20



Test Mode:802. 11n HT20 Chain0 CH1

Test Mode:802. 11n HT20 Chain0 CH6

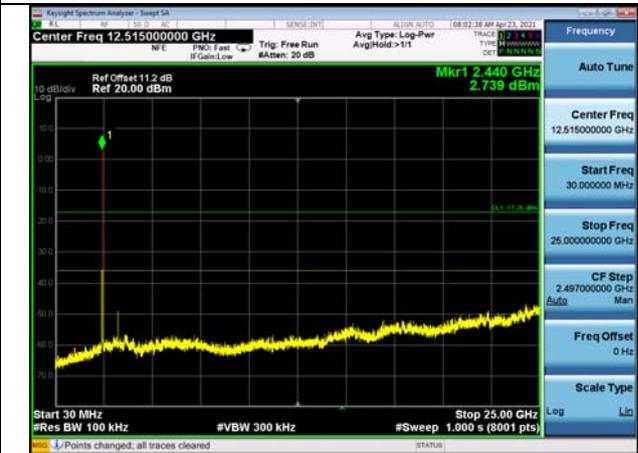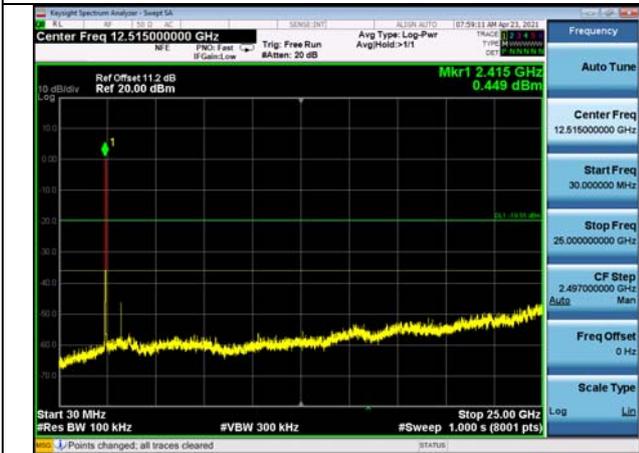


Test Mode:802. 11n HT20 Chain0 CH11

Test Mode:802. 11n HT20 Chain1 CH1

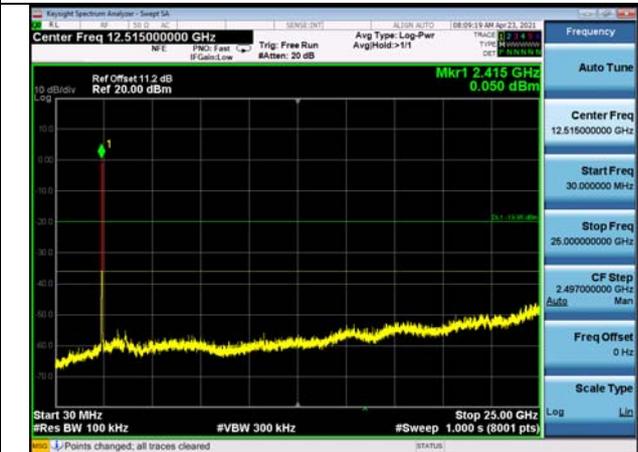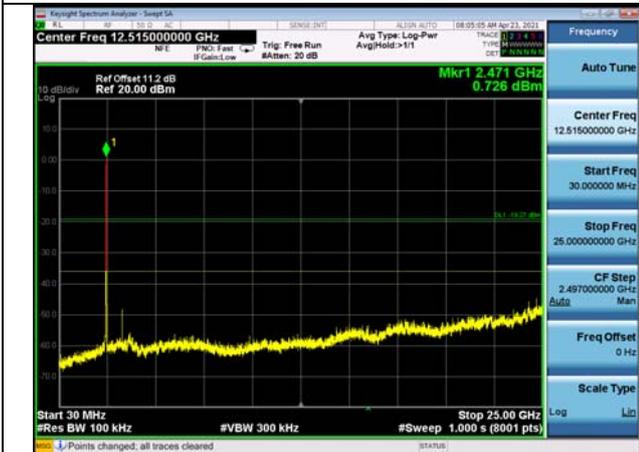

Test Mode:802. 11n HT20 Chain1 CH6


Test Mode:802. 11n HT20 Chain1 CH11

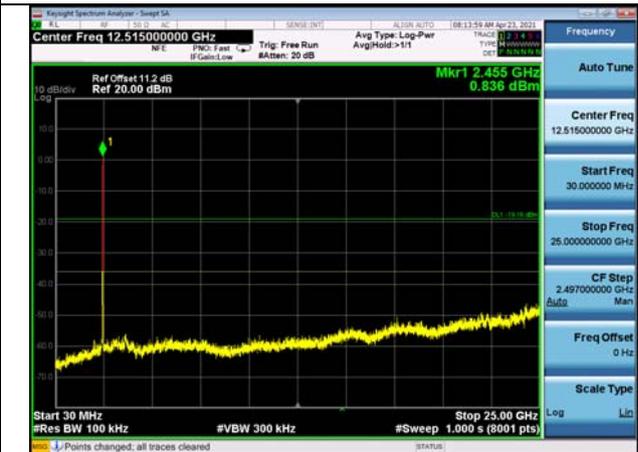

Test Mode:802. 11n HT40

Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH6

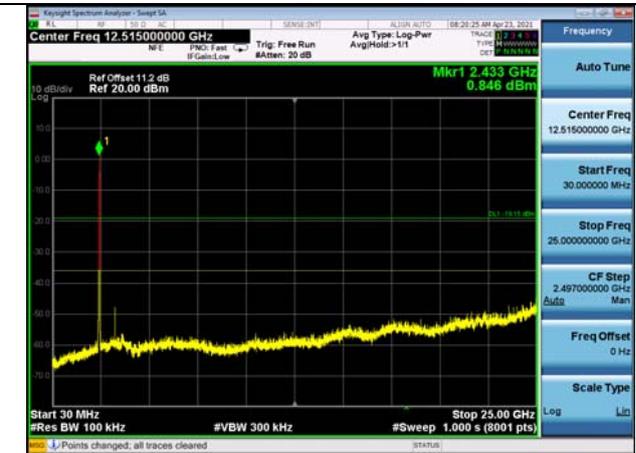


Test Mode:802. 11n HT40 Chain0 CH9

Test Mode:802. 11n HT40 Chain1 CH3



Test Mode:802. 11n HT40 Chain1 CH6


Test Mode:802. 11n HT40 Chain1 CH9

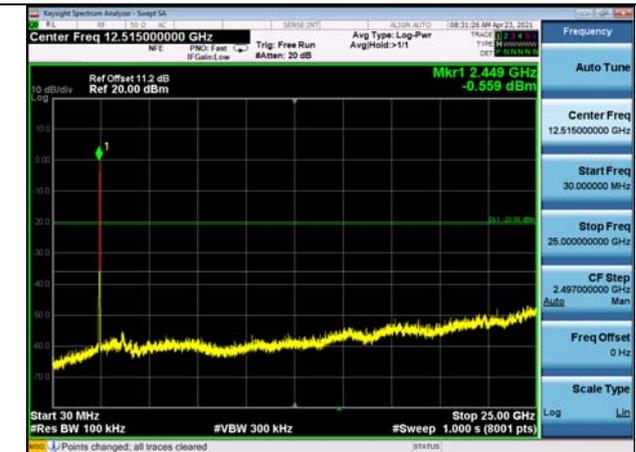

Band edge measurement

Test Mode:802.11b


Test Mode:802.11b Chain0 CH1

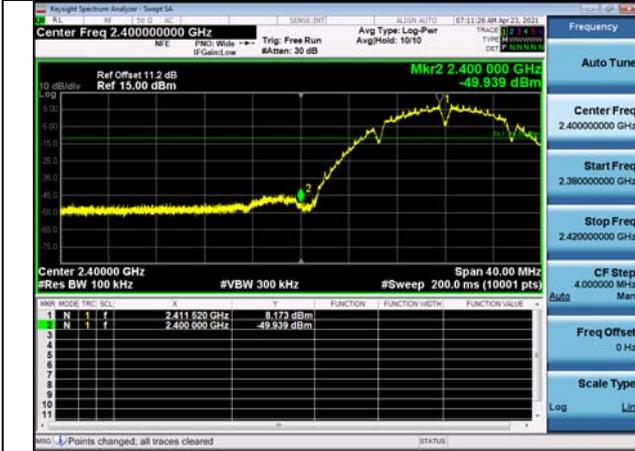


Test Mode:802.11b Chain0 CH11



Test Mode:802.11b Chain1 CH1

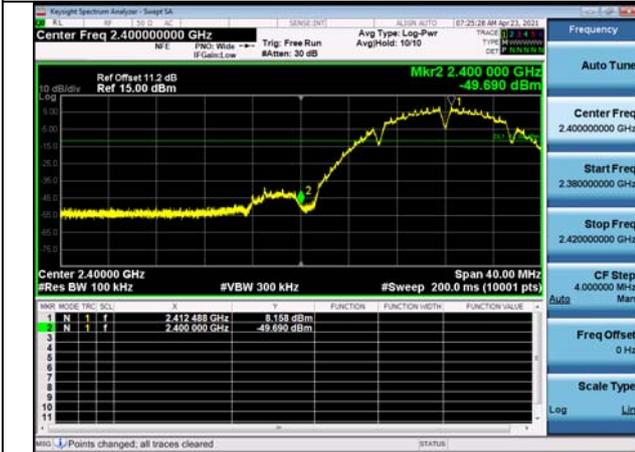



Test Mode:802.11b Chain1 CH11

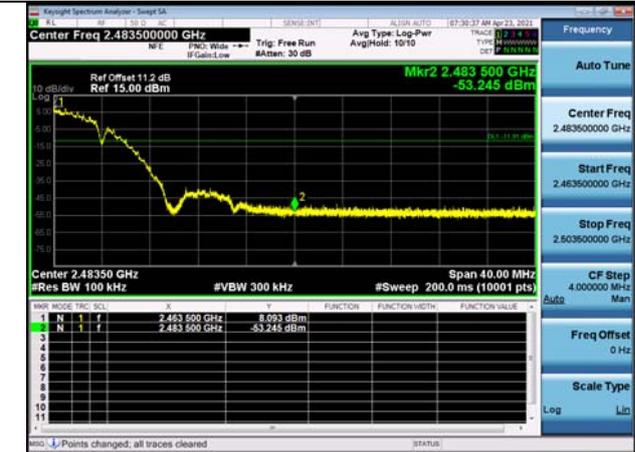

Test Mode:802.11g



Test Mode:802.11g Chain0 CH1

Test Mode:802.11g Chain0 CH11

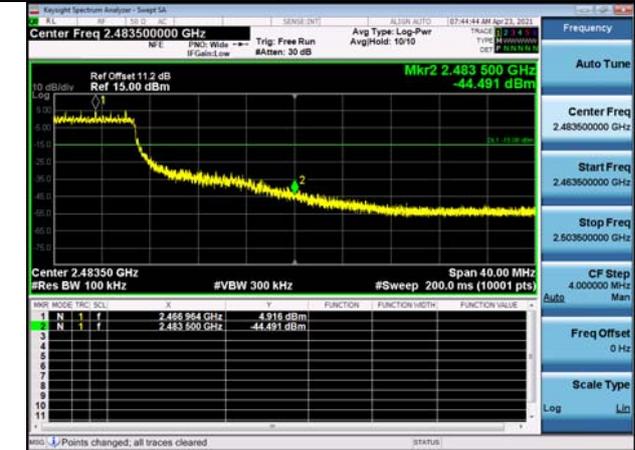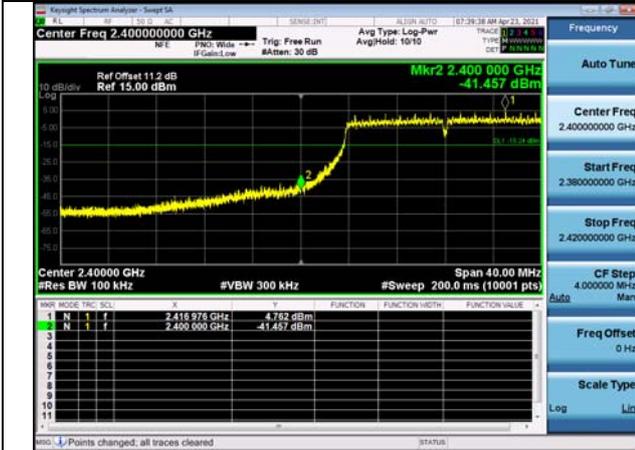

Test Mode:802.11g Chain1 CH1



Test Mode:802.11g Chain1 CH11

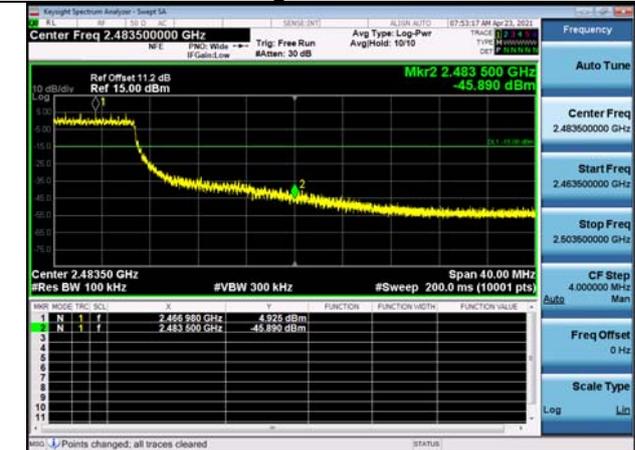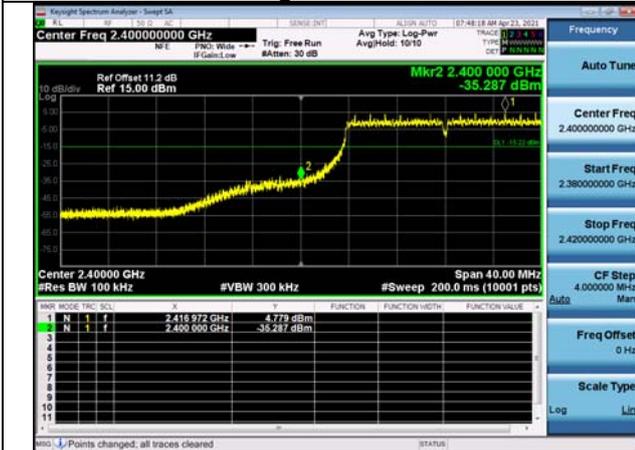

Test Mode:802. 11n HT20



Test Mode:802. 11n HT20 Chain0 CH1

Test Mode:802. 11n HT20 Chain0 CH11

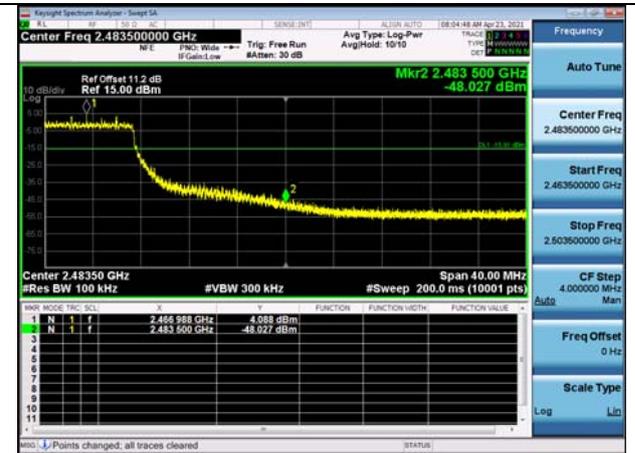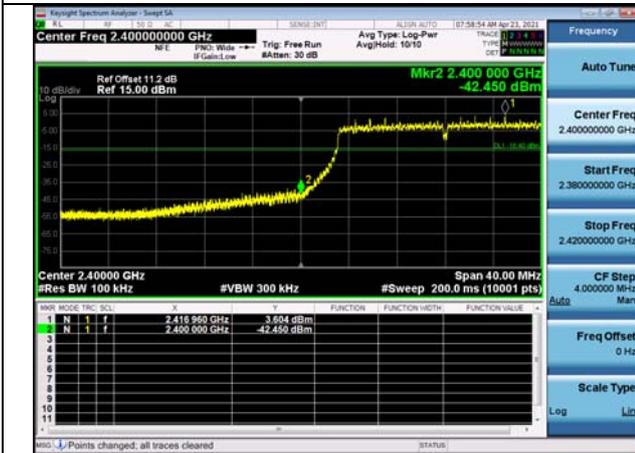

Test Mode:802. 11n HT20 Chain1 CH1



Test Mode:802. 11n HT20 Chain1 CH11

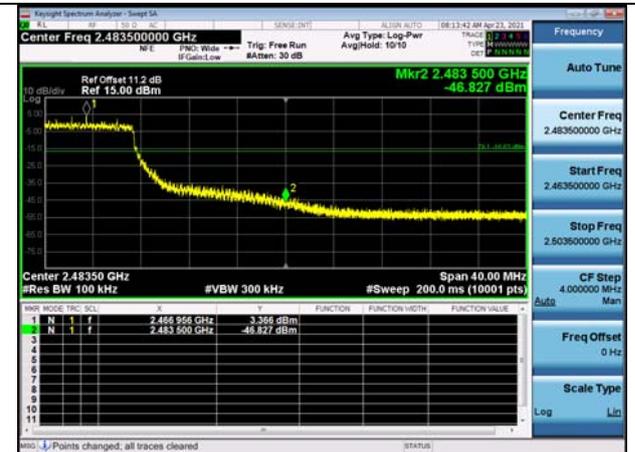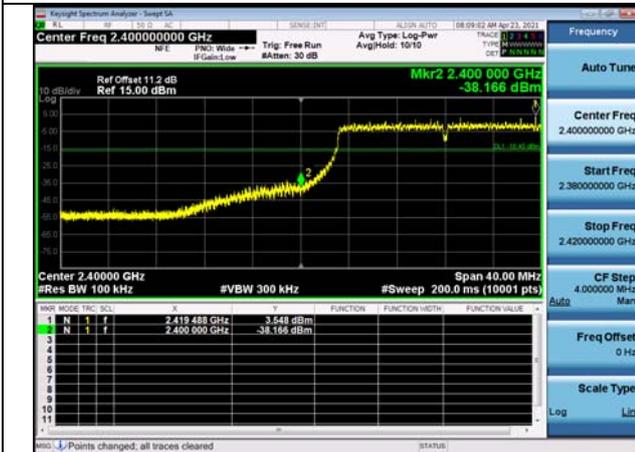

Test Mode:802. 11n HT40



Test Mode:802. 11n HT40 Chain0 CH3

Test Mode:802. 11n HT40 Chain0 CH9

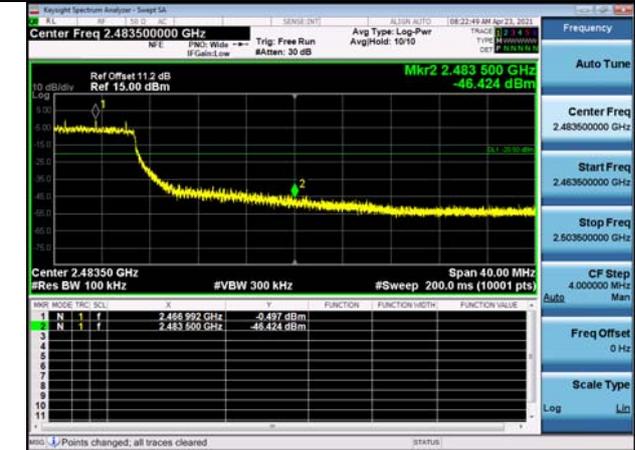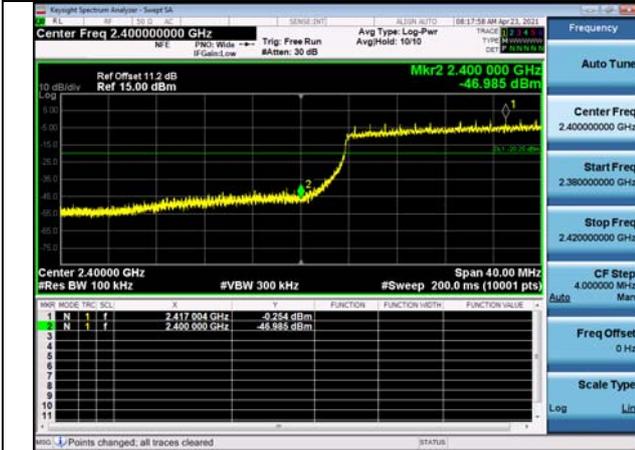

Test Mode:802. 11n HT40 Chain1 CH3

Test Mode:802. 11n HT40 Chain1 CH9

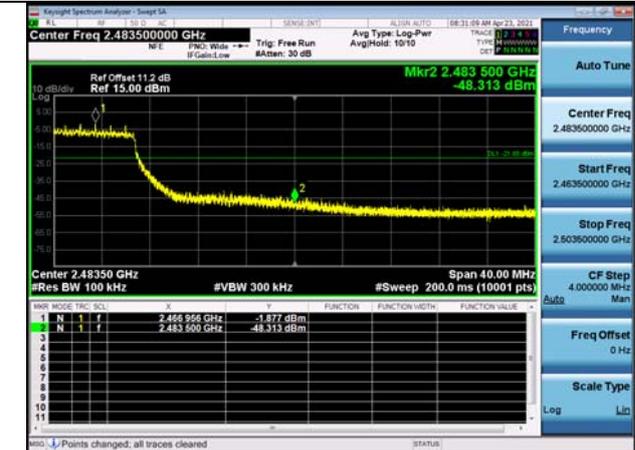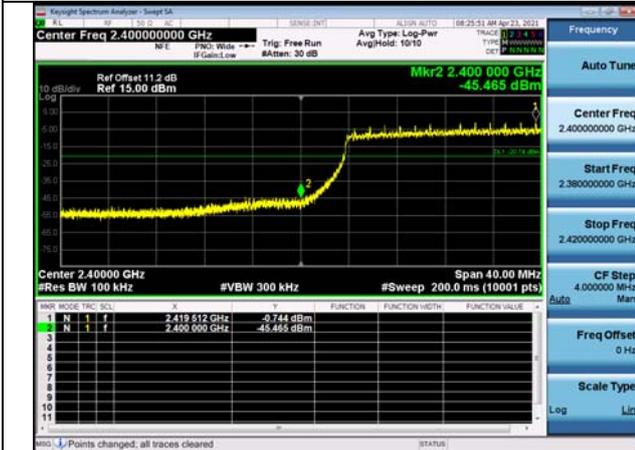

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (92.16 dBuV/m) = (58.16dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2412MHz.

The measurement results contain the correction factor of the duty cycle.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b (Chain1)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.16	58.16	N/A	N/A	8.90	25.10
2	2390	27.67	-6.33	-46.33	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b (Chain1)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	90.02	56.02	N/A	N/A	8.90	25.10
2	2390	27.17	-6.83	-46.83	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b (Chain1)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.38	53.38	N/A	N/A	8.90	25.10
2	2390	21.10	-12.90	-32.90	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b (Chain1)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	84.51	50.51	N/A	N/A	8.90	25.10
2	2390	20.98	-13.02	-33.02	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b (Chain1)

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.33	58.33	N/A	N/A	8.90	25.10
2	2483.5	27.54	-6.46	-46.46	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b (Chain1)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	89.50	55.50	N/A	N/A	8.90	25.10
2	2483.5	27.35	-6.65	-46.65	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b (Chain1)

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.68	54.68	N/A	N/A	8.90	25.10
2	2483.5	22.55	-11.45	-31.45	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b (Chain1)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	85.69	51.69	N/A	N/A	8.90	25.10
2	2483.5	21.94	-12.06	-32.06	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g (Chain1)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	92.57	58.57	N/A	N/A	8.90	25.10
2	2390	27.05	-6.95	-46.95	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g (Chain1)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.67	55.67	N/A	N/A	8.90	25.10
2	2390	27.50	-6.50	-46.50	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g (Chain1)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.75	53.75	N/A	N/A	8.90	25.10
2	2390	22.26	-11.74	-31.74	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g (Chain1)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.75	53.75	N/A	N/A	8.90	25.10
2	2390	22.26	-11.74	-31.74	54.00	8.90	25.10

1	2412	85.61	51.61	N/A	N/A	8.90	25.10
2	2390	23.21	-10.79	-30.79	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g (Chain1)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	91.37	57.37	N/A	N/A	8.90	25.10
2	2483.5	28.62	-5.38	-45.38	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g (Chain1)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	89.31	55.31	N/A	N/A	8.90	25.10
2	2483.5	27.94	-6.06	-46.06	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g (Chain1)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.49	54.49	N/A	N/A	8.90	25.10
2	2483.5	21.74	-12.26	-32.26	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g (Chain1)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	85.57	51.57	N/A	N/A	8.90	25.10
2	2483.5	22.71	-11.29	-31.29	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20) (MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	91.95	57.95	N/A	N/A	8.90	25.10
2	2390	28.70	-5.30	-45.30	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20) (MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	89.33	55.33	N/A	N/A	8.90	25.10
2	2390	29.13	-4.87	-44.87	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20) (MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	87.86	53.86	N/A	N/A	8.90	25.10
2	2390	21.84	-12.16	-32.16	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20) (MIMO)

Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	85.67	51.67	N/A	N/A	8.90	25.10
2	2390	21.06	-12.94	-32.94	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20) (MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	92.46	58.46	N/A	N/A	8.90	25.10
2	2483.5	27.78	-6.22	-46.22	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20) (MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	89.53	55.53	N/A	N/A	8.90	25.10
2	2483.5	27.78	-6.22	-46.22	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20) (MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	88.06	54.06	N/A	N/A	8.90	25.10
2	2483.5	22.92	-11.08	-31.08	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20) (MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	85.94	51.94	N/A	N/A	8.90	25.10
2	2483.5	21.99	-12.01	-32.01	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40) (MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	74.62	40.62	N/A	N/A	8.90	25.10
2	2390	27.58	-6.42	-46.42	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40) (MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	71.69	37.69	N/A	N/A	8.90	25.10
2	2390	27.23	-6.77	-46.77	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40) (MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	68.54	34.54	N/A	N/A	8.90	25.10
2	2390	22.94	-11.06	-31.06	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40) (MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	68.54	34.54	N/A	N/A	8.90	25.10
2	2390	22.94	-11.06	-31.06	54.00	8.90	25.10

1	2412	65.97	31.97	N/A	N/A	8.90	25.10
2	2390	22.24	-11.76	-31.76	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40) (MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	75.29	41.29	N/A	N/A	8.90	25.10
2	2483.5	27.22	-6.78	-46.78	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40) (MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	72.54	38.54	N/A	N/A	8.90	25.10
2	2483.5	27.02	-6.98	-46.98	74.00	8.90	25.10


Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40) (MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	68.42	34.42	N/A	N/A	8.90	25.10
2	2483.5	21.64	-12.36	-32.36	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40) (MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	65.94	31.94	N/A	N/A	8.90	25.10
2	2483.5	22.63	-11.37	-31.37	54.00	8.90	25.10

Copy of 002C_FCC

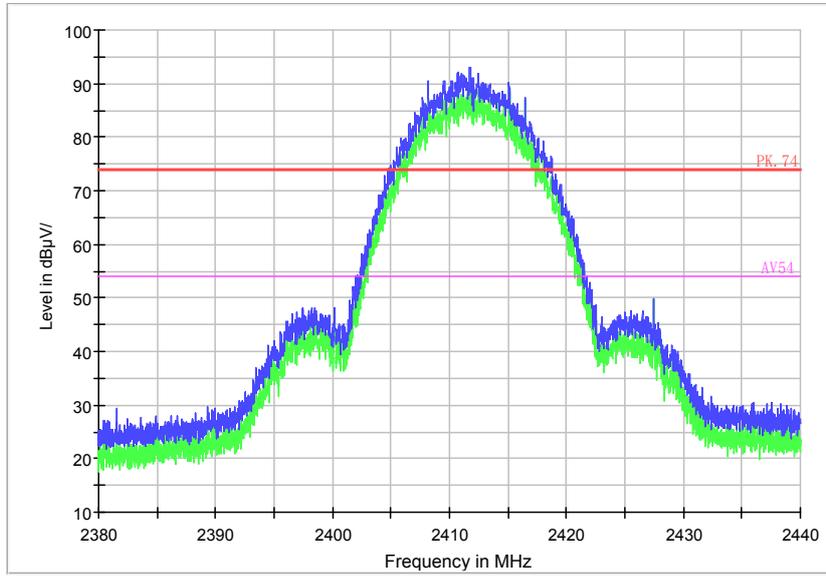

Radiated Emission Band Edge for 2412MHz

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation: (31.55 dB μ V/m) = (48.85 dB μ V) + (-17.3 dB/m), the corresponding frequency is 51.1945MHz.

The worst case attitude: The mobile lay down.

For 802.11b(Chain1) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.1945	31.55	-17.3	48.85	Vertical	40
57.354	31.76	-17.9	49.66	Vertical	40
127.4365	29.29	-22	51.29	Vertical	43.5
207.995	14.62	-18.3	32.92	Vertical	43.5
533.333	12.98	-10.1	23.08	Vertical	46
940.636	18.91	-3	21.91	Vertical	46

For 802.11g(Chain1) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.758	31.65	-17.3	48.95	Vertical	40
57.4025	31.95	-18	49.95	Vertical	40
126.8545	28.9	-21.9	50.8	Vertical	43.5
209.4985	14.02	-18.3	32.32	Vertical	43.5
555.934	13.14	-9.6	22.74	Vertical	46
932.876	18.91	-3	21.91	Vertical	46

For 802.11n(HT20 MIMO) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.564	31.29	-17.2	48.49	Vertical	40
57.645	32.9	-18	50.9	Vertical	40
126.9515	28.64	-21.9	50.54	Vertical	43.5
206.346	14.44	-18.4	32.84	Vertical	43.5
541.772	13.05	-9.9	22.95	Vertical	46
943.6915	18.79	-3	21.79	Vertical	46

For 802.11b(Chain1) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.564	31.29	-17.2	48.49	Vertical	40
57.645	32.9	-18	50.9	Vertical	40
126.9515	28.64	-21.9	50.54	Vertical	43.5
206.346	14.44	-18.4	32.84	Vertical	43.5
541.772	13.05	-9.9	22.95	Vertical	46
943.6915	18.79	-3	21.79	Vertical	46

For 802.11g(Chain1) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.6125	31.43	-17.2	48.63	Vertical	40
56.19	31.84	-17.7	49.54	Vertical	40
122.1015	24.28	-21.6	45.88	Vertical	43.5
207.3645	14.15	-18.3	32.45	Vertical	43.5
480.08	11.59	-11.3	22.89	Vertical	46
945.777	18.74	-3.1	21.84	Vertical	46

For 802.11n(HT20 MIMO) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.437	30.93	-17.3	48.23	Vertical	40
57.6935	31.74	-18	49.74	Vertical	40
128.261	28.57	-22	50.57	Vertical	43.5
206.734	13.77	-18.4	32.17	Vertical	43.5
517.6675	12.72	-10.3	23.02	Vertical	46
908.238	18.58	-3.1	21.68	Vertical	46

For 802.11b(Chain1) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
50.8065	31.63	-17.3	48.93	Vertical	40
57.5965	32.19	-18	50.19	Vertical	40
118.1245	27.99	-21.2	49.19	Vertical	43.5
193.154	12.31	-19.2	31.51	Vertical	43.5
513.4965	12.74	-10.4	23.14	Vertical	46
919.684	18.58	-3.1	21.68	Vertical	46

For 802.11g(Chain1) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
49.109	31.18	-17.2	48.38	Vertical	40
56.481	31.79	-17.8	49.59	Vertical	40
96.639	27.06	-19.5	46.56	Vertical	43.5
194.7545	11.99	-19	30.99	Vertical	43.5
535.758	12.96	-10	22.96	Vertical	46
934.5735	18.94	-3	21.94	Vertical	46

For 802.11n(HT20 MIMO) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.0975	31.55	-17.3	48.85	Vertical	40
57.451	32.49	-18	50.49	Vertical	40
125.933	26.77	-21.9	48.67	Vertical	43.5
193.7845	12.12	-19.1	31.22	Vertical	43.5
550.1625	12.91	-9.8	22.71	Vertical	46
916.6285	18.58	-3.1	21.68	Vertical	46

For 802.11n(HT40 MIMO) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.0005	31.65	-17.3	48.95	Vertical	40
56.0445	32.11	-17.7	49.81	Vertical	40
117.688	28.28	-21.1	49.38	Vertical	43.5
192.6205	12.23	-19.2	31.43	Vertical	43.5
524.1665	12.82	-10.3	23.12	Vertical	46
925.407	18.96	-3.1	22.06	Vertical	46


For 802.11n(HT40 MIMO) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
49.206	31.13	-17.2	48.33	Vertical	40
56.5295	32.27	-17.8	50.07	Vertical	40
119.8705	27.07	-21.4	48.47	Vertical	43.5
193.833	11.93	-19.1	31.03	Vertical	43.5
556.322	12.96	-9.6	22.56	Vertical	46
910.081	18.59	-3.1	21.69	Vertical	46


For 802.11n(HT40 MIMO) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB/m)	Pmea (dBuV)	Polarity	Limit (dBuV/m)
51.049	31.54	-17.3	48.84	Vertical	40
57.16	31.71	-17.9	49.61	Vertical	40
117.9305	27.13	-21.1	48.23	Vertical	43.5
192.7175	12.14	-19.2	31.34	Vertical	43.5
528.4345	12.9	-10.2	23.1	Vertical	46
935.9315	18.98	-3	21.98	Vertical	46

Carrier frequency (MHz): 2412
Channel No.:1

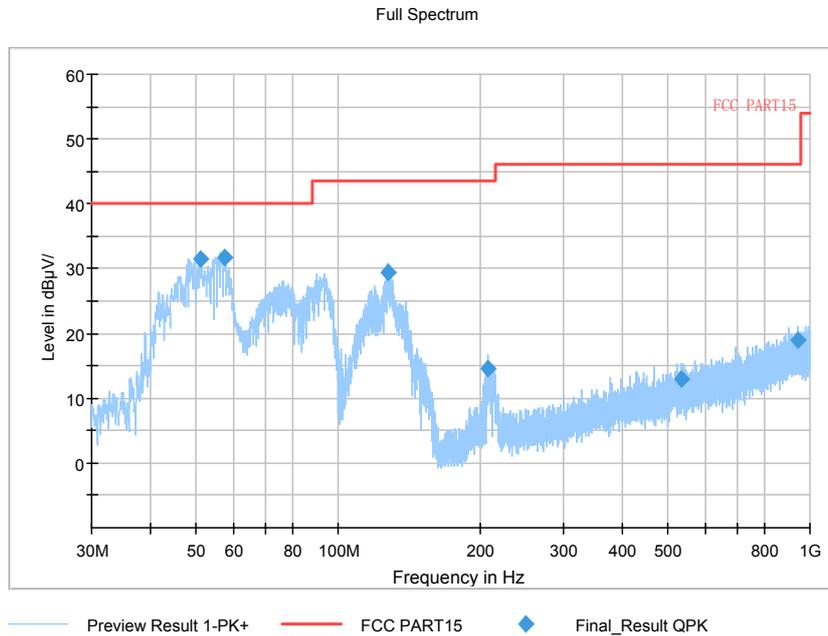


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11b Chian1

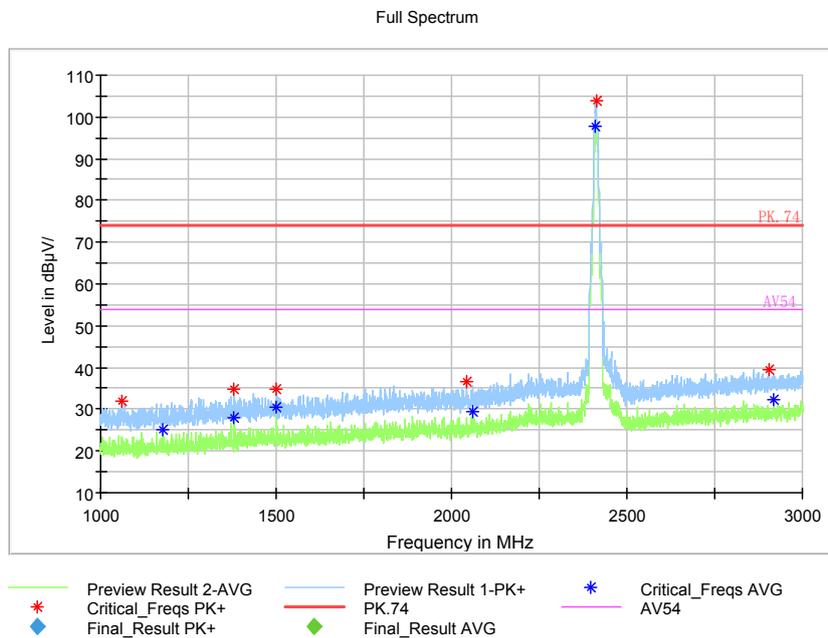


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

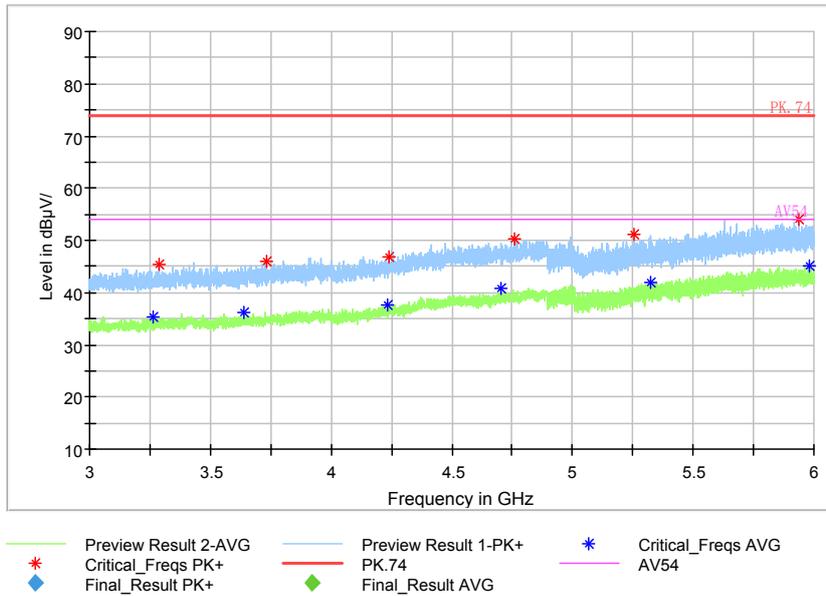


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

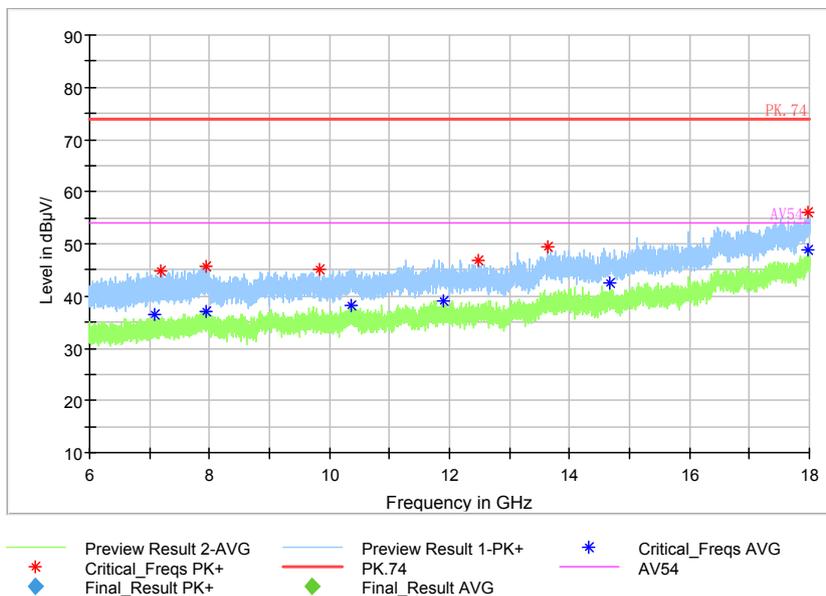


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

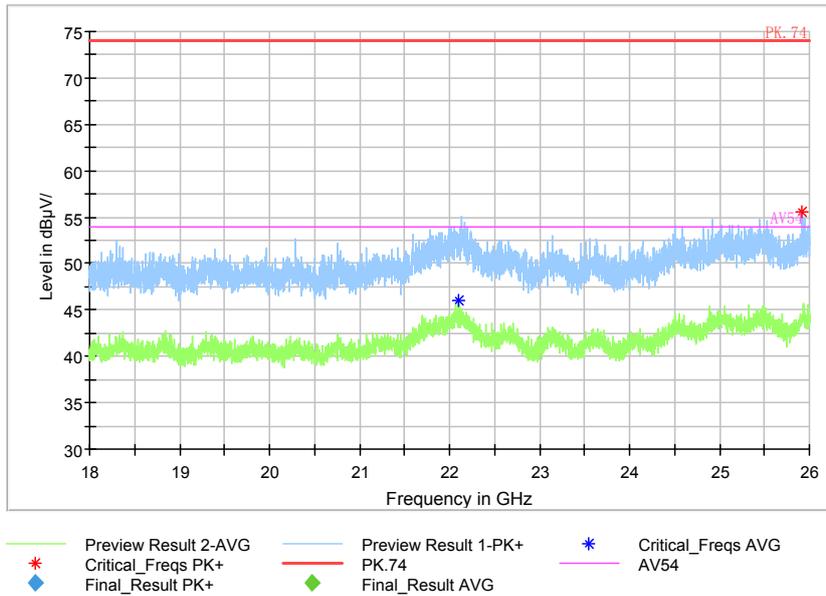


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

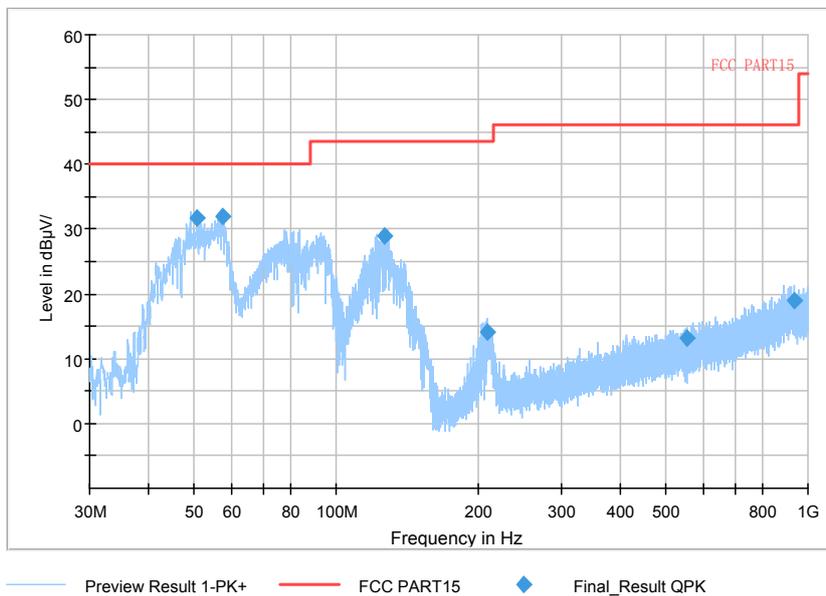


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g Chian1

Full Spectrum

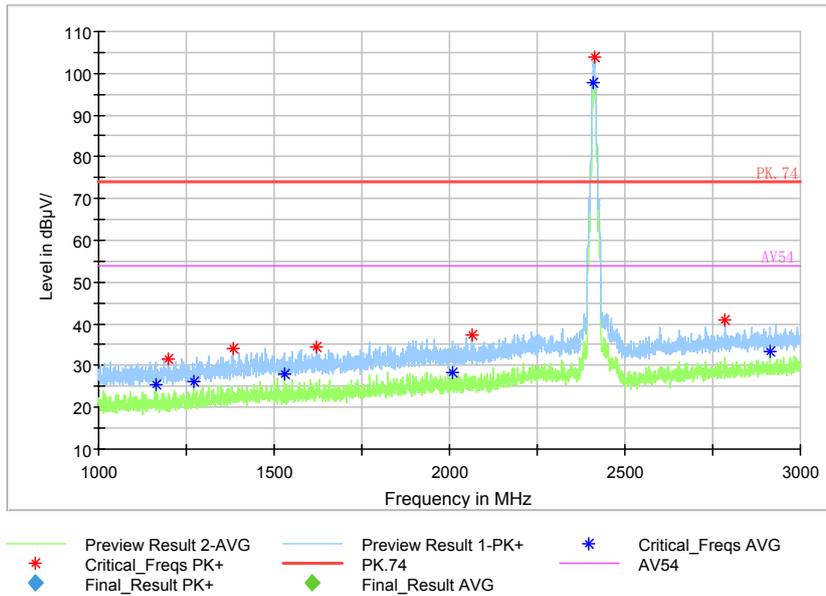


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

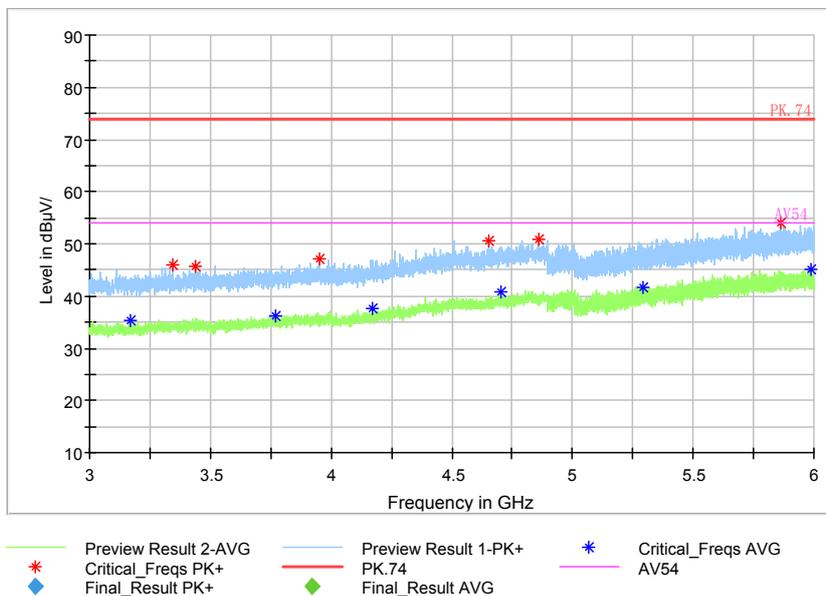

Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

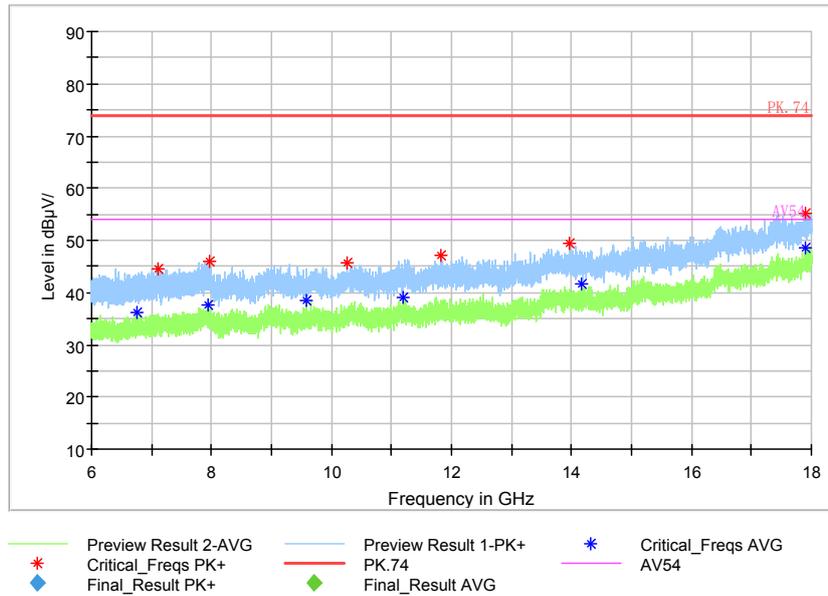


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum



Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1


Full Spectrum

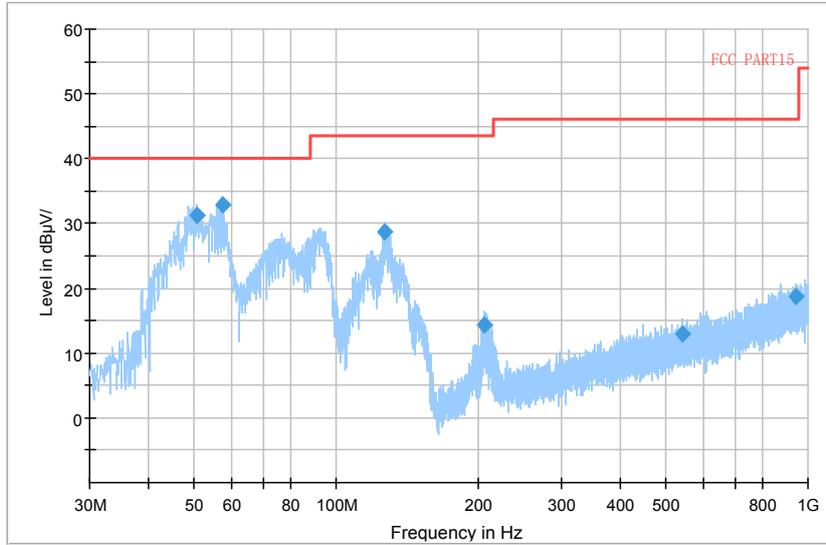

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

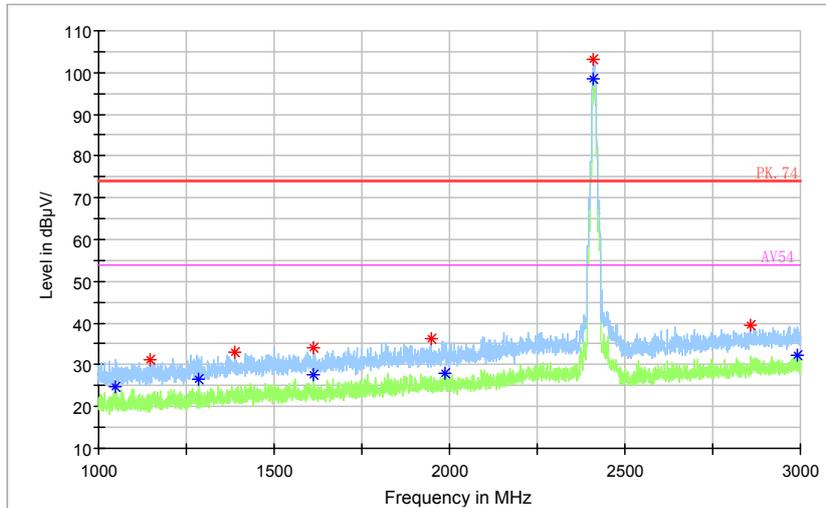

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

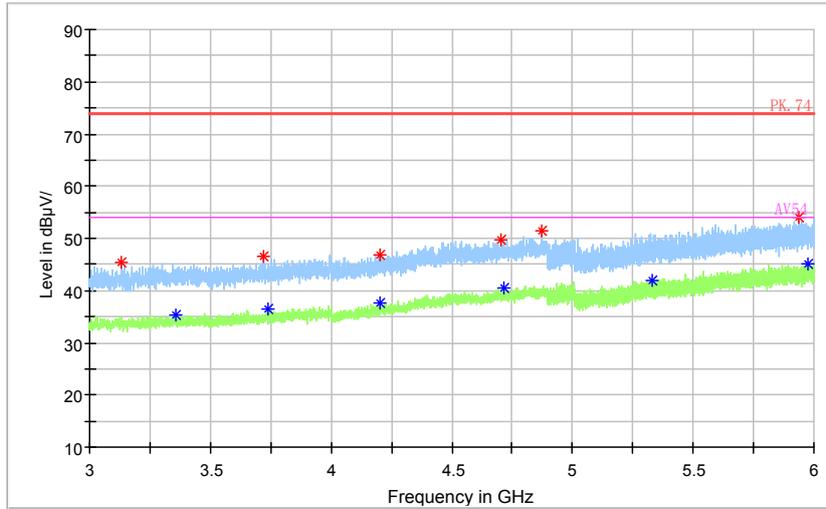

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

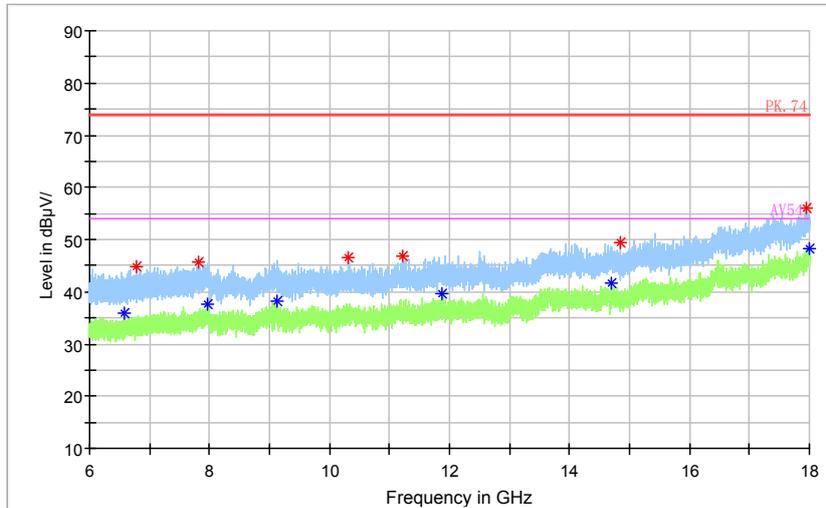

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

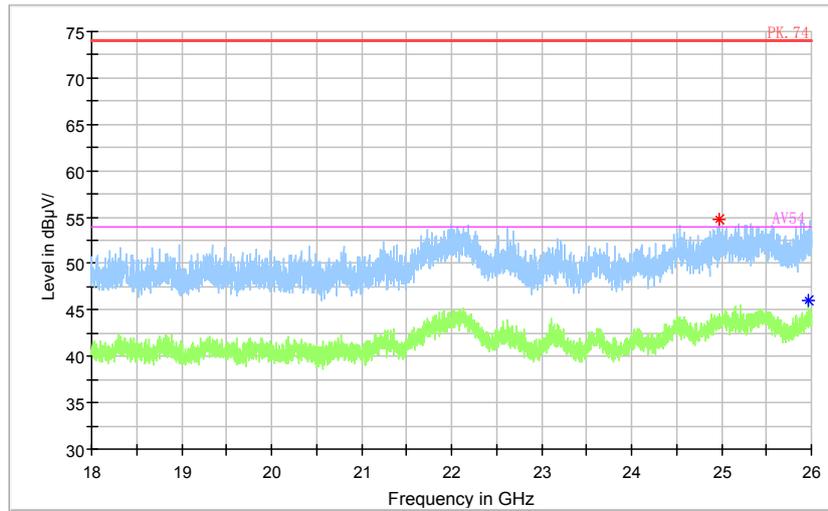


- Preview Result 2-AVG
- * Critical_Freqs PK+
- ◆ Final_Result PK+
- Preview Result 1-PK+
- ◆ Final_Result AVG
- * Critical_Freqs AVG
- ◆ AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)


Carrier frequency (MHz): 2437
Channel No.:6

Full Spectrum

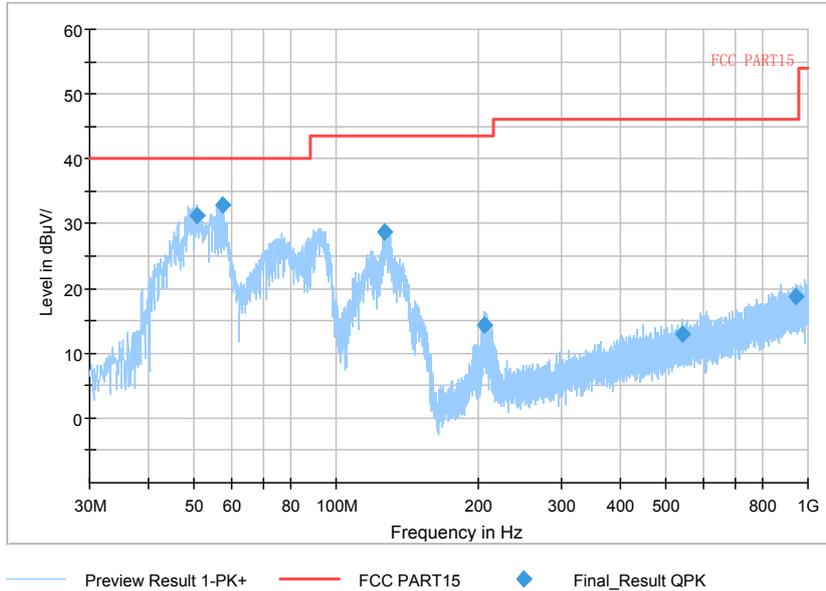


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11b Chian1

Full Spectrum

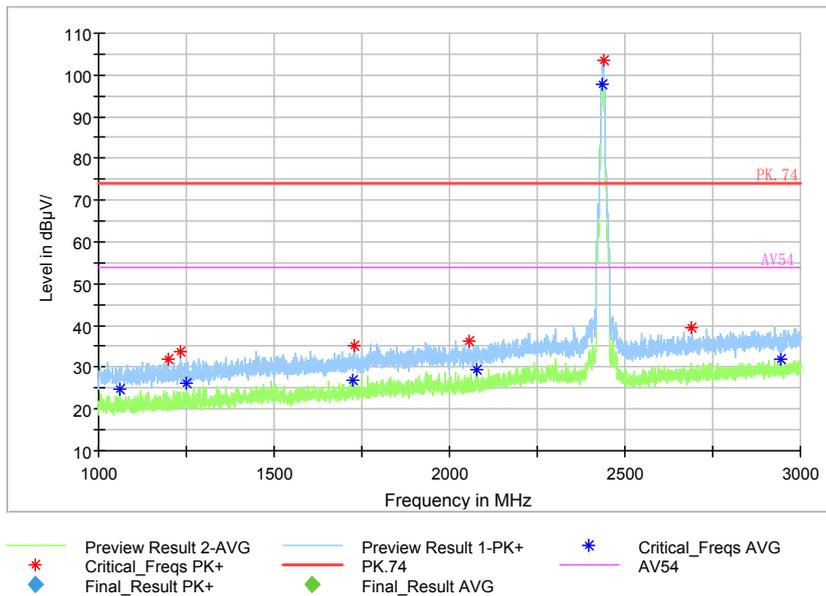


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

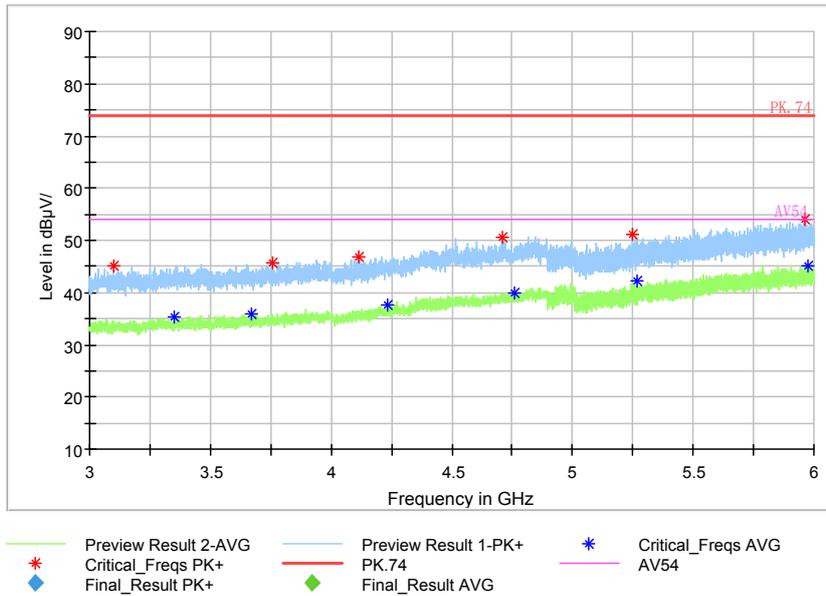


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

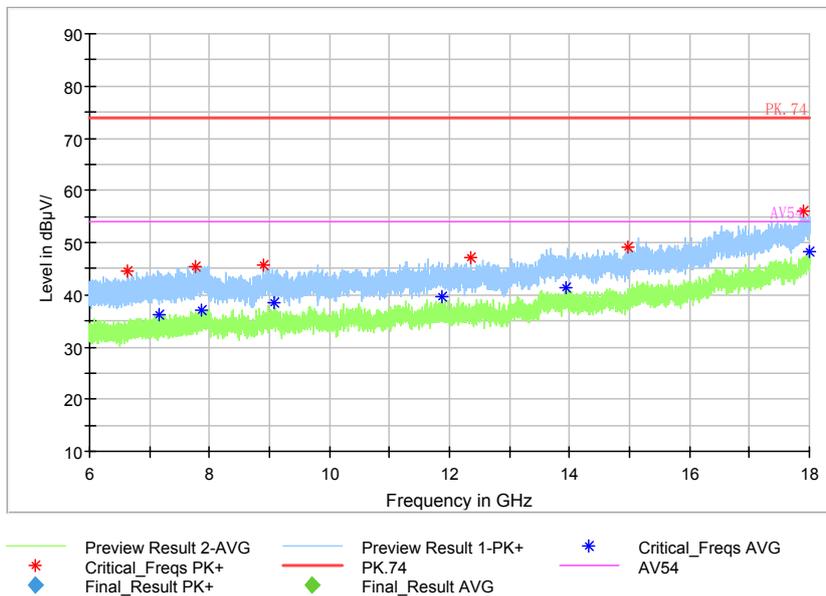


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

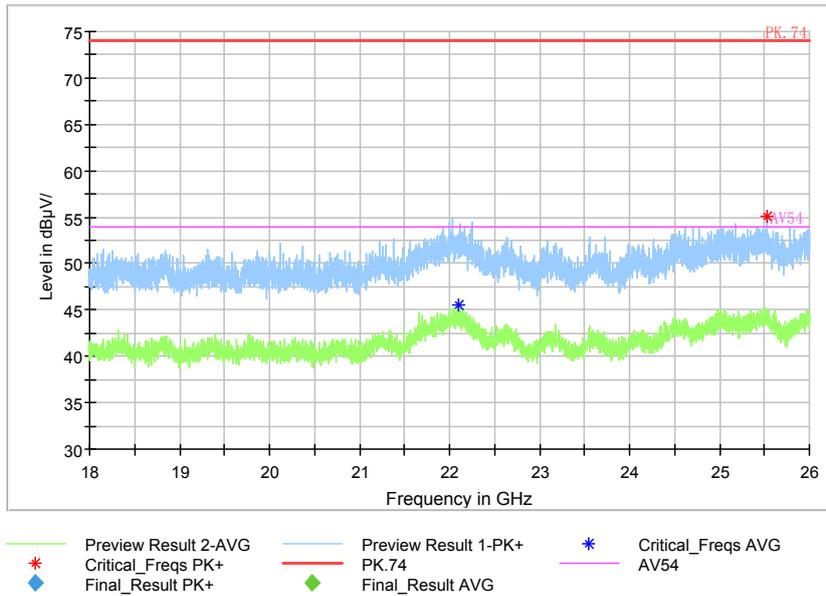


Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

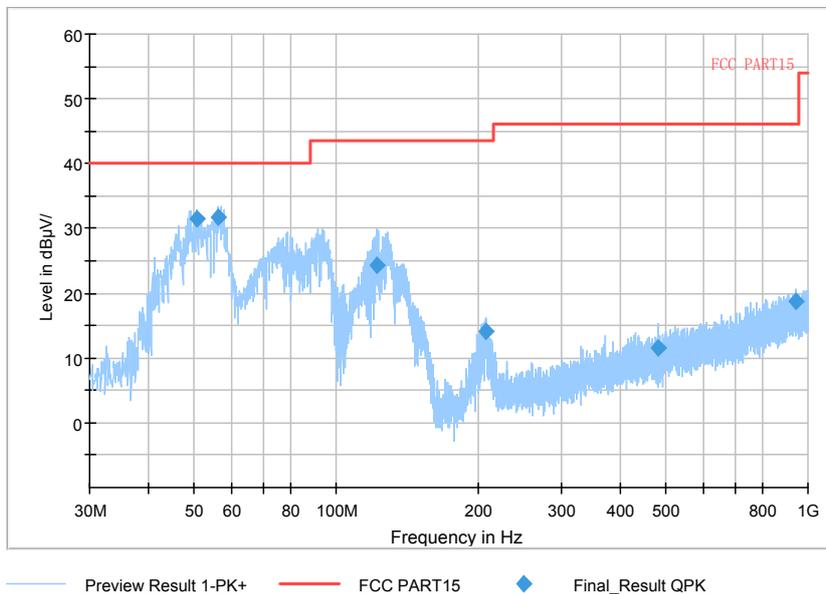


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g Chian1

Full Spectrum

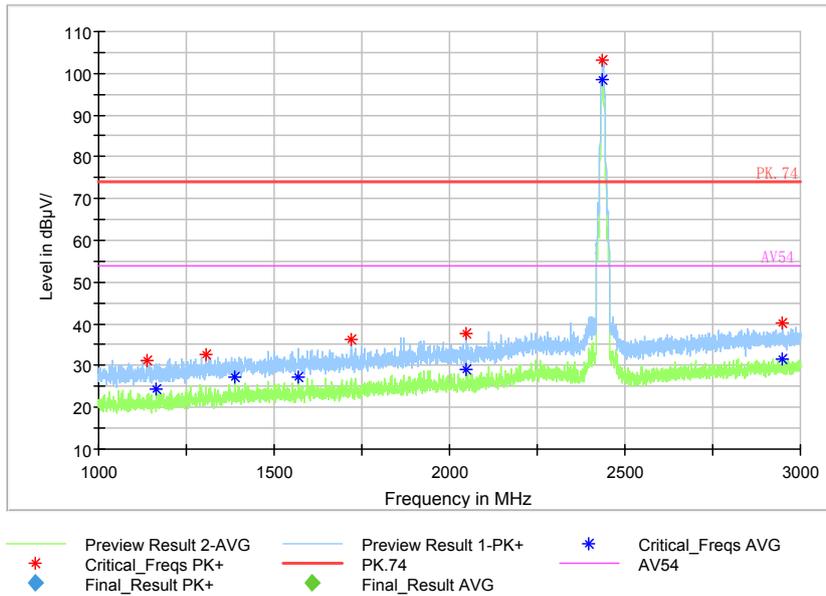


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

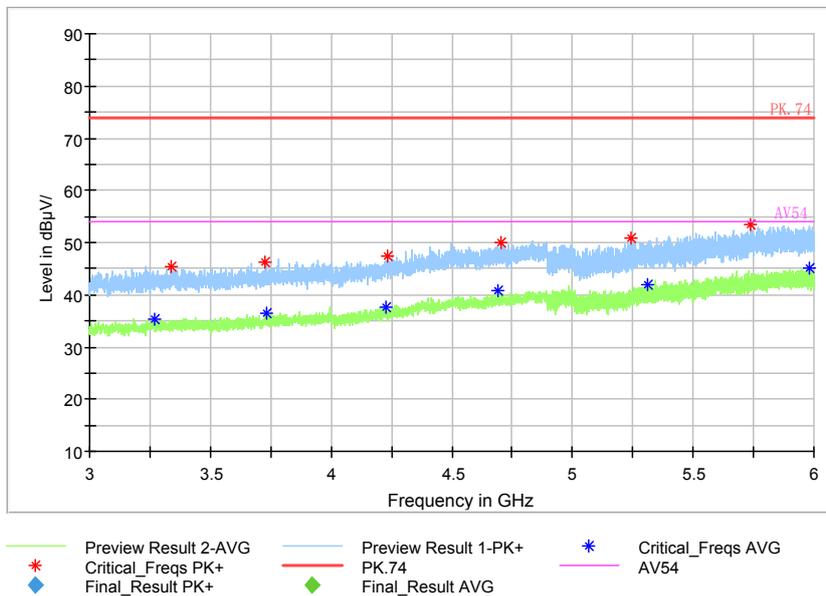


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

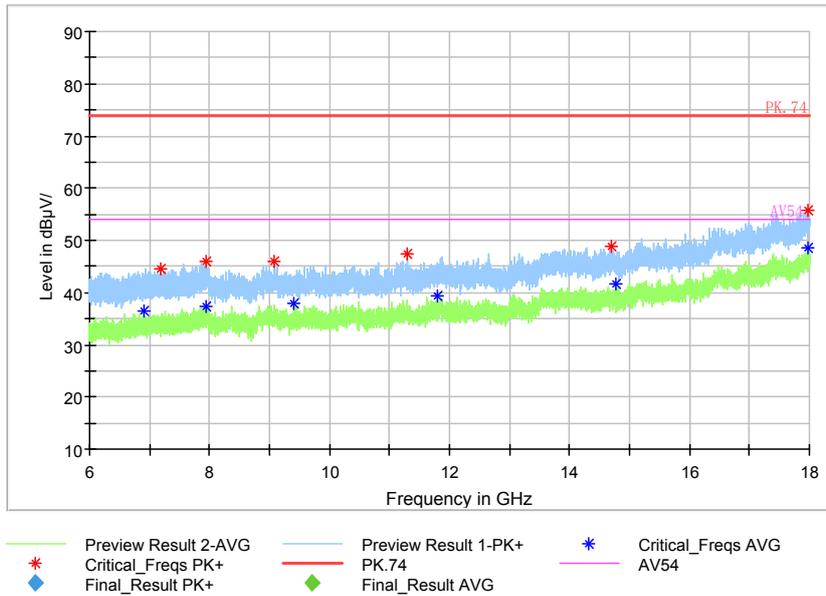


Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g Chian1

Full Spectrum

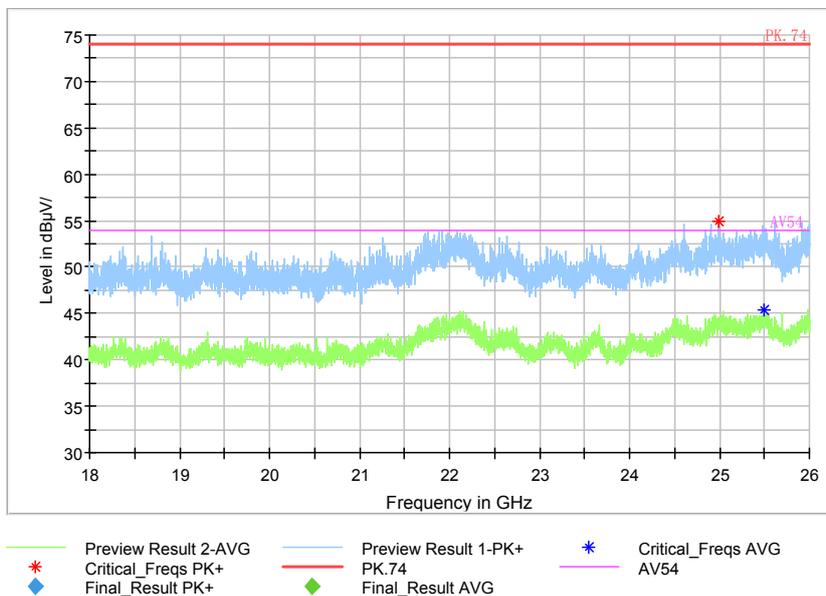


Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11g Chian1

Full Spectrum

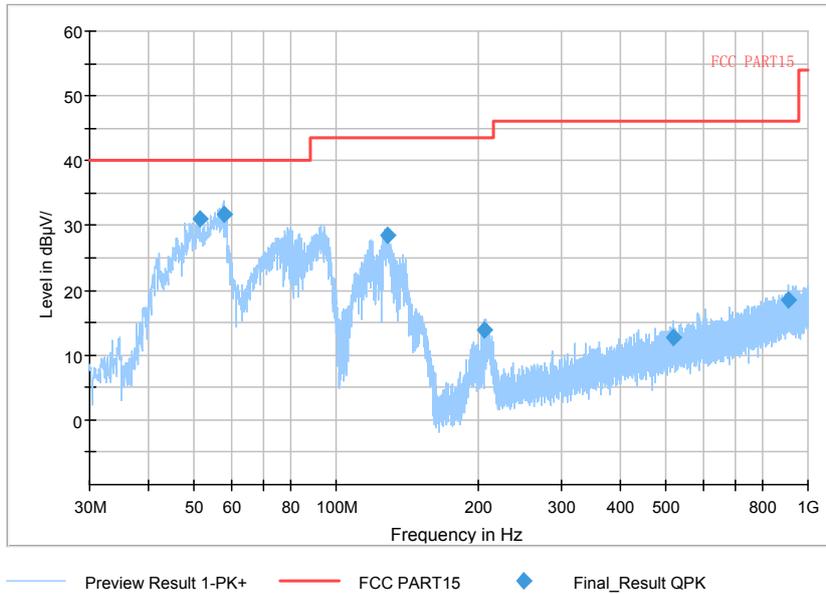


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

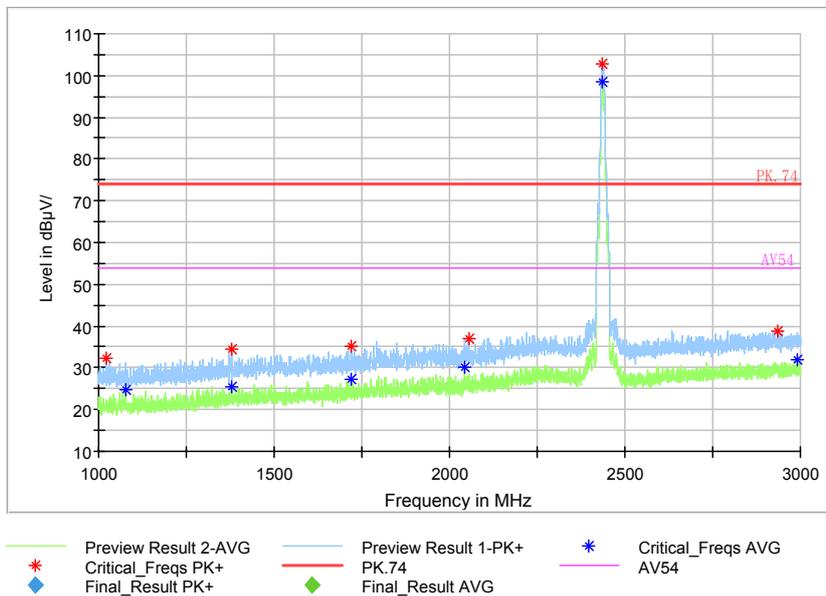


Frequency Range: 1GHz -3GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

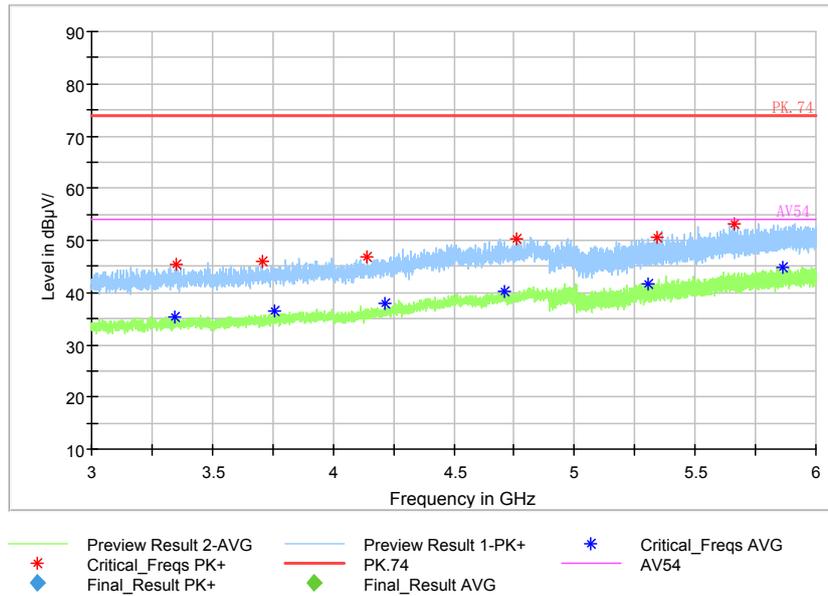


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

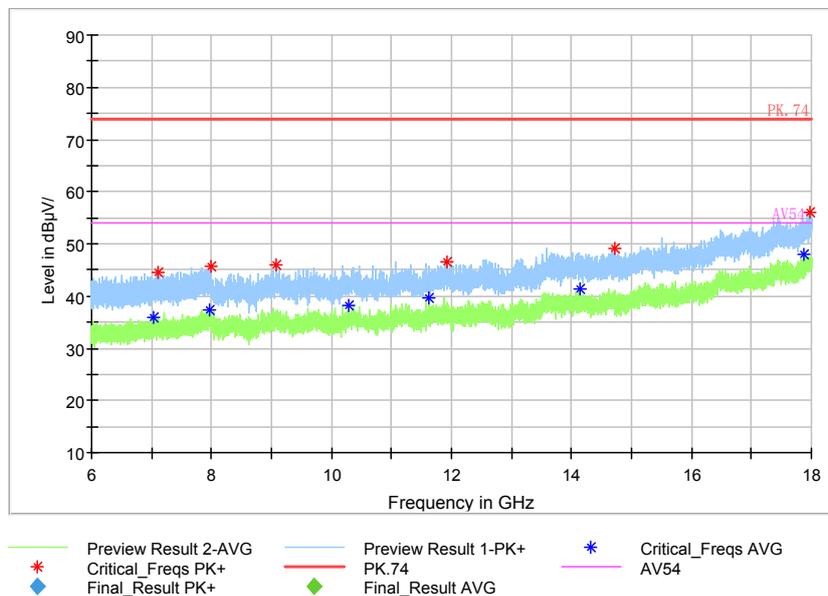

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

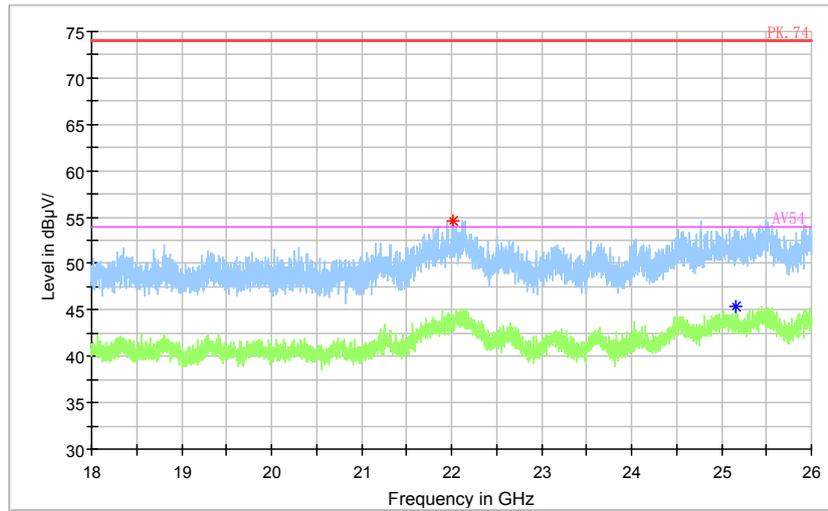


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- * Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)


Carrier frequency (MHz): 2462
Channel No.:11

Full Spectrum

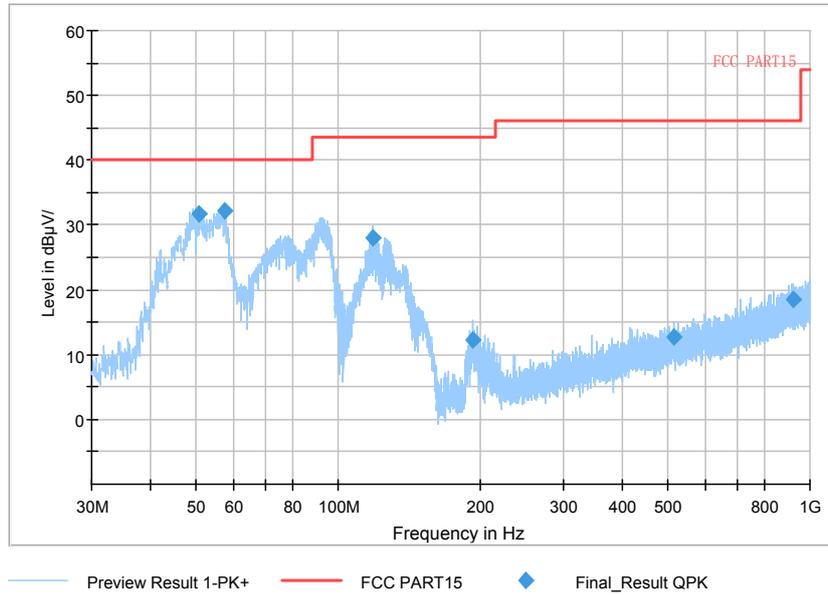


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11b Chian1

Full Spectrum

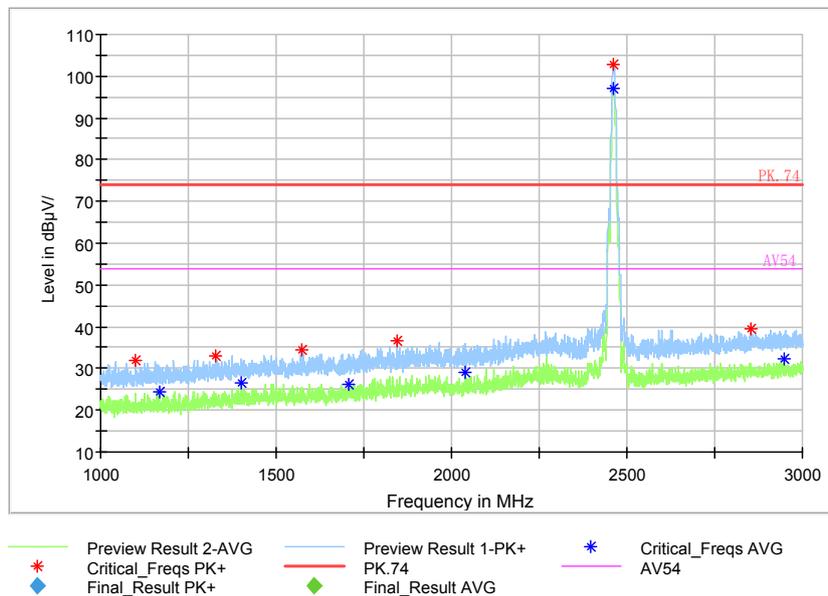


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

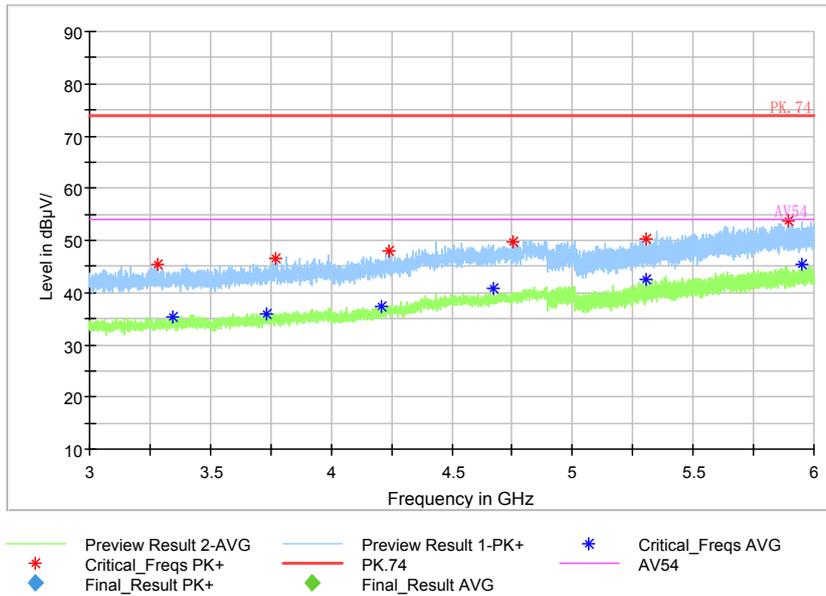


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

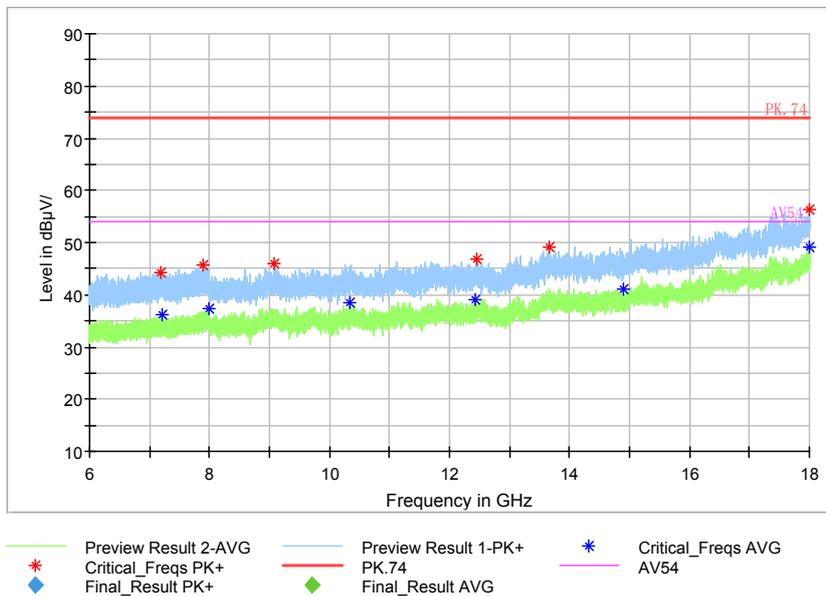


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b Chian1

Full Spectrum

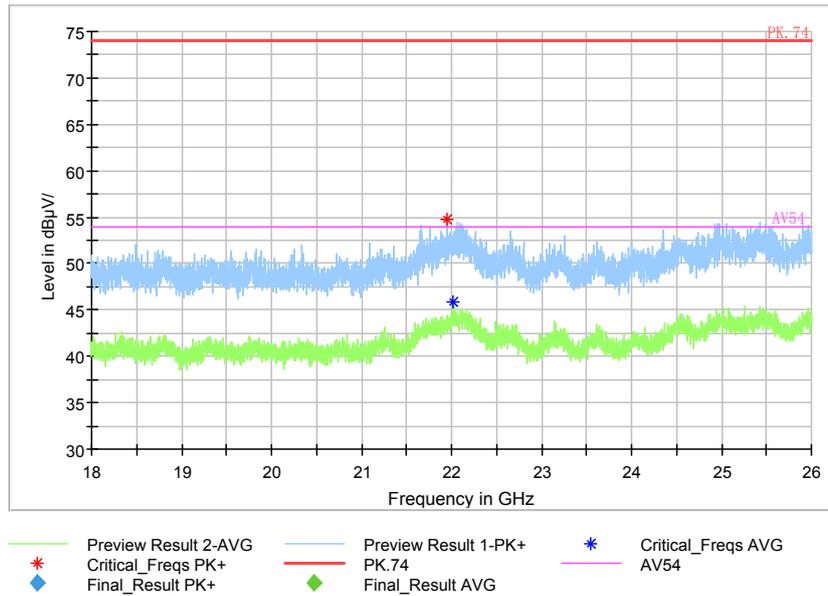


Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11b Chian1

Full Spectrum

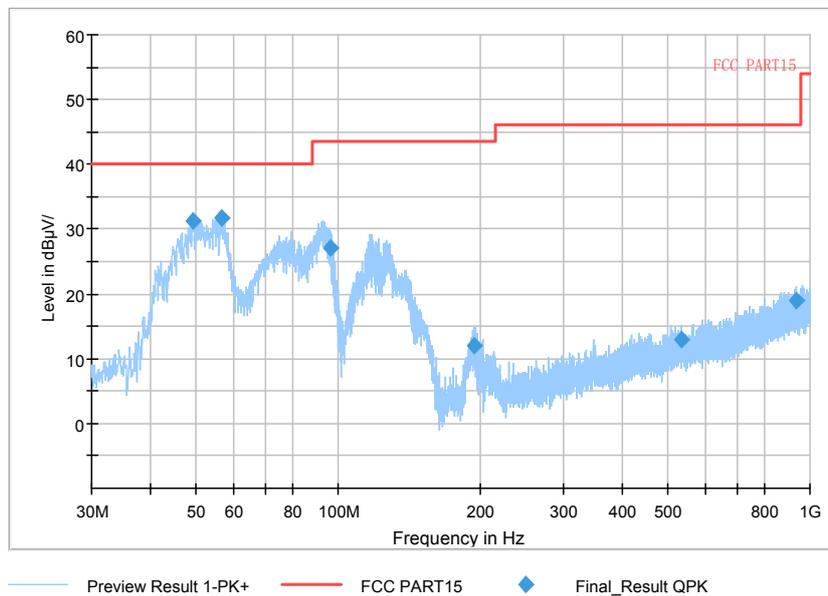


Frequency Range: 30MHz -1GHz
 Detector: QP mode
 Modulation type: 802.11g Chian1

Full Spectrum

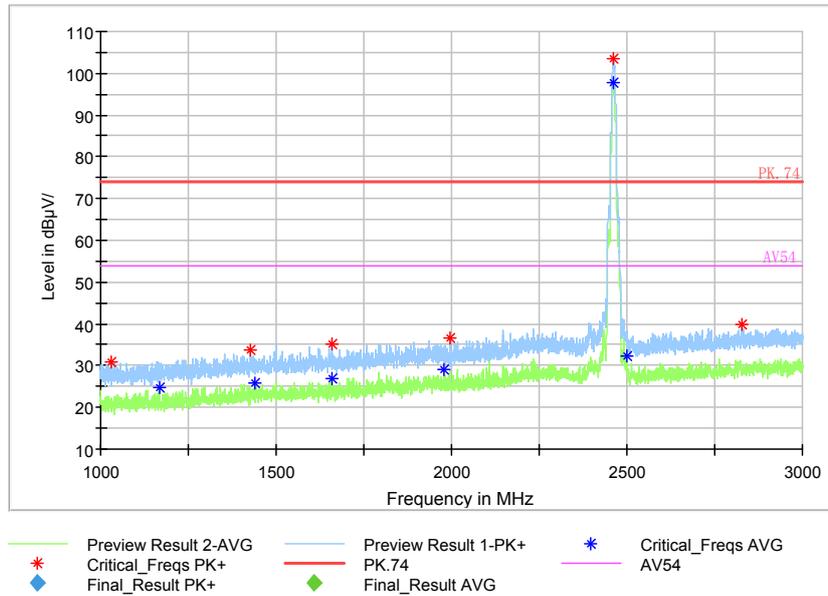


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

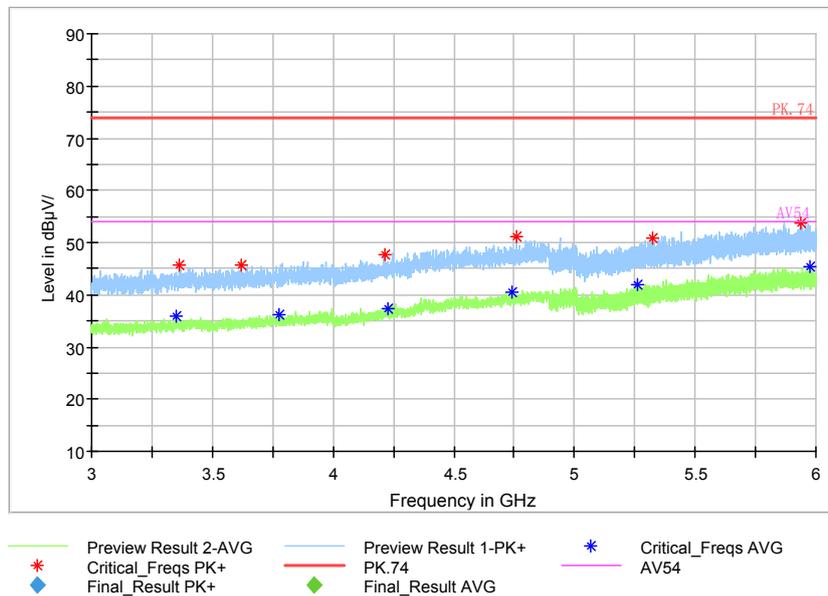


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

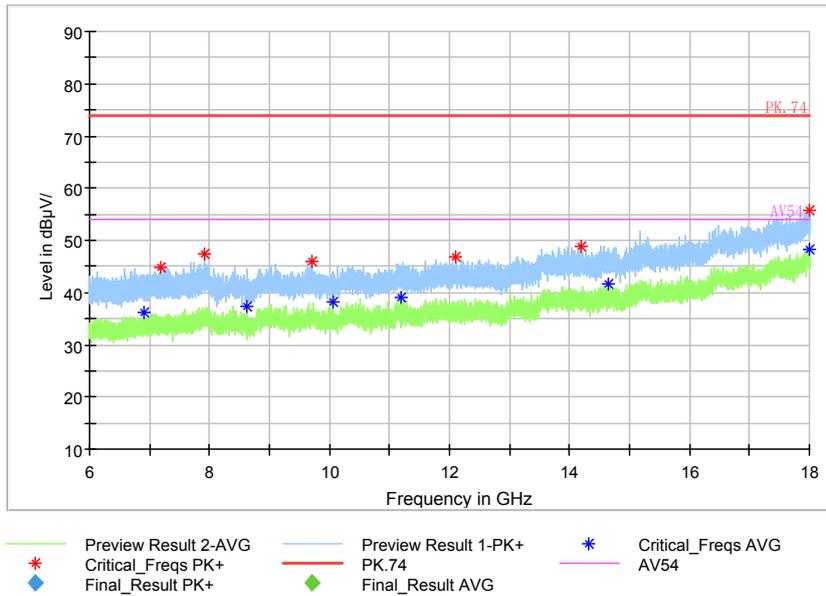


Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1

Full Spectrum

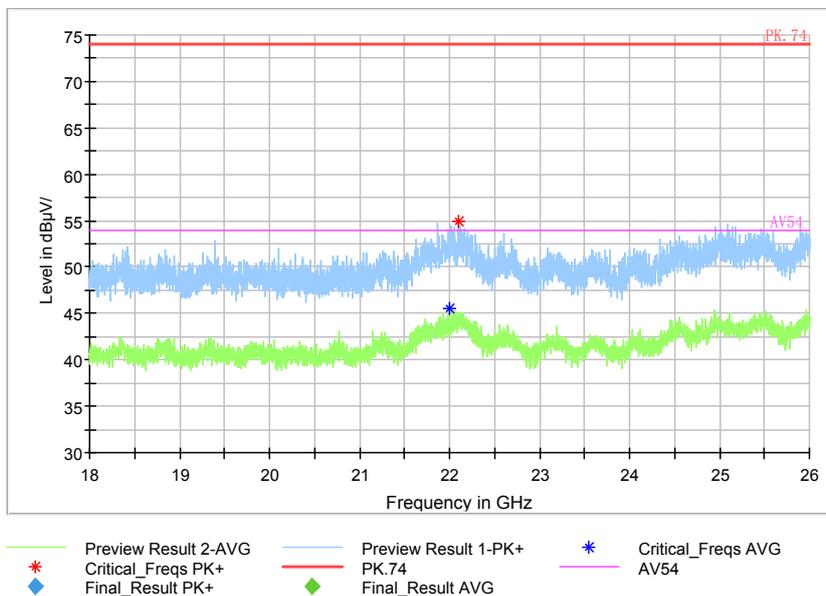

Frequency Range: 18GHz-26GHz
Detector: Av mode and PK mode
Modulation type: 802.11g Chian1


Full Spectrum

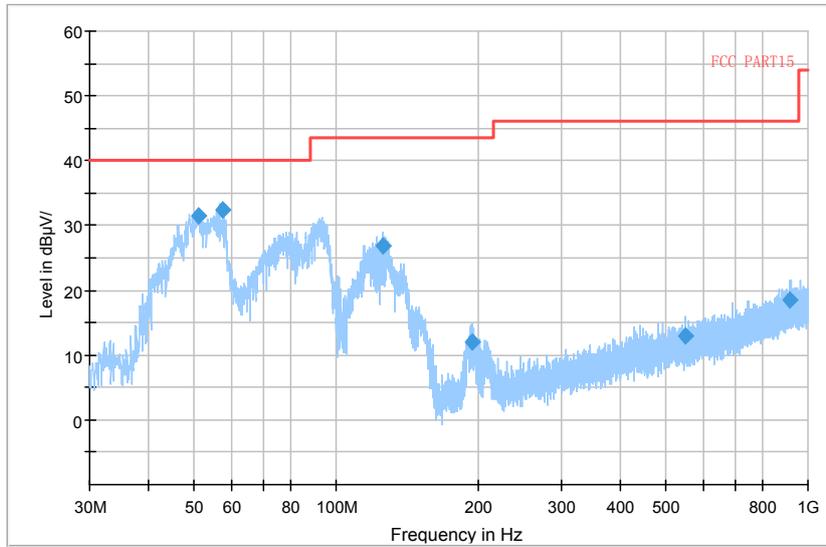

Preview Result 1-PK+ FCC PART15 Final_Result QPK

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

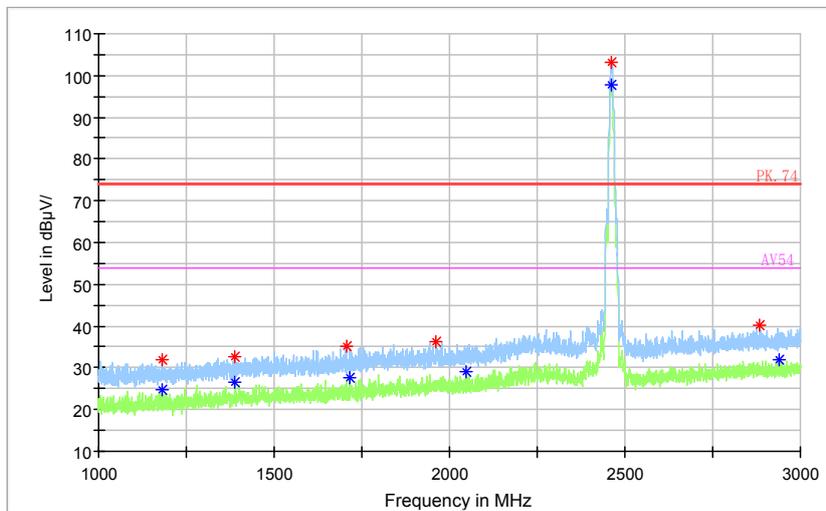

Preview Result 2-AVG Preview Result 1-PK+ Critical_Freqs AVG
Critical_Freqs PK+ PK.74 AV54
Final_Result PK+ Final_Result AVG


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

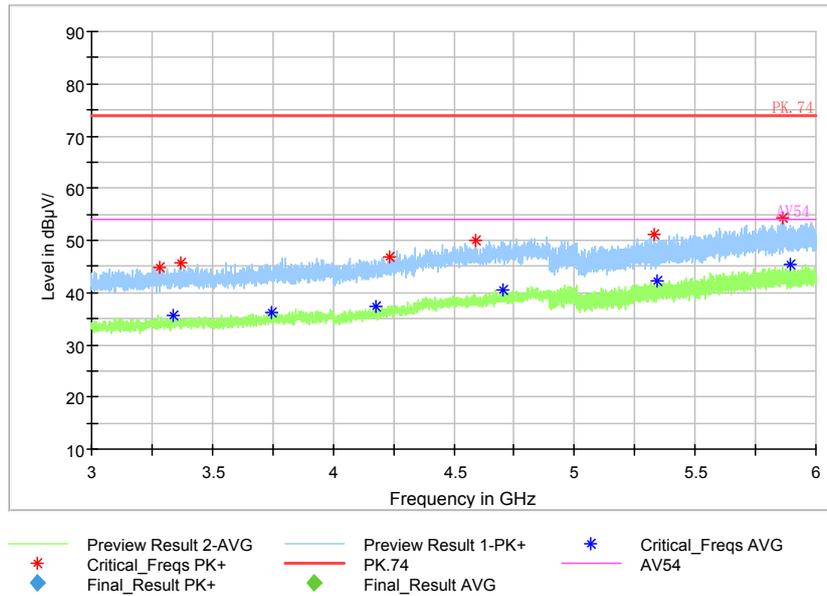


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)

Full Spectrum

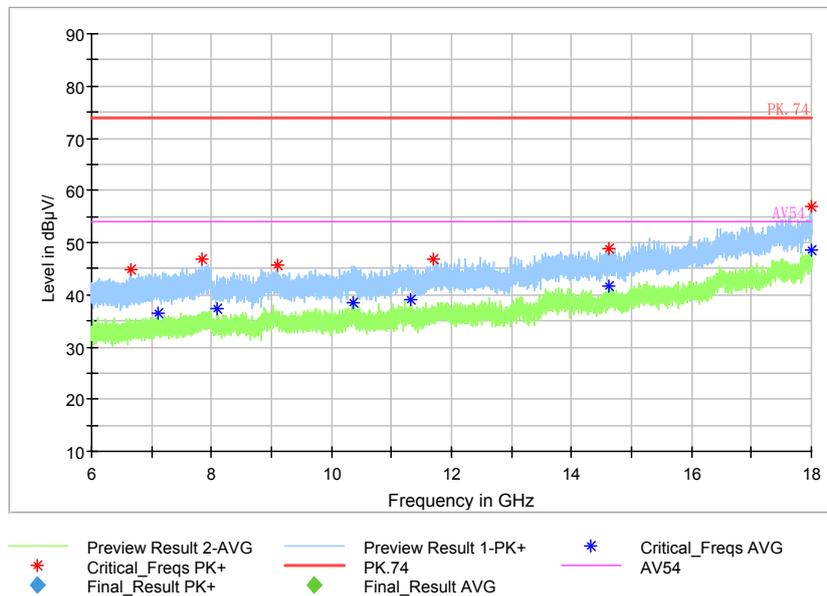

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

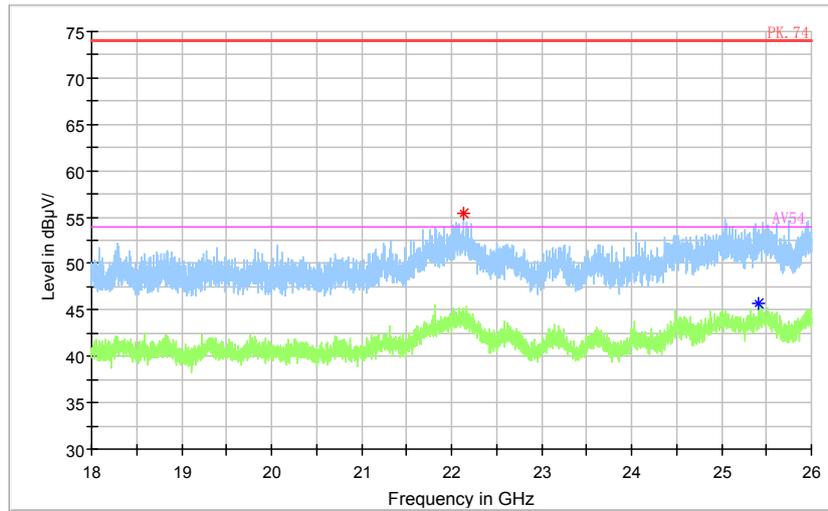


- Preview Result 2-AVG
- Preview Result 1-PK+
- Critical_Freqs PK+
- PK.74
- Final_Result AVG
- Critical_Freqs AVG AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT20 MIMO)

Carrier frequency (MHz): 2422
Channel No.:3

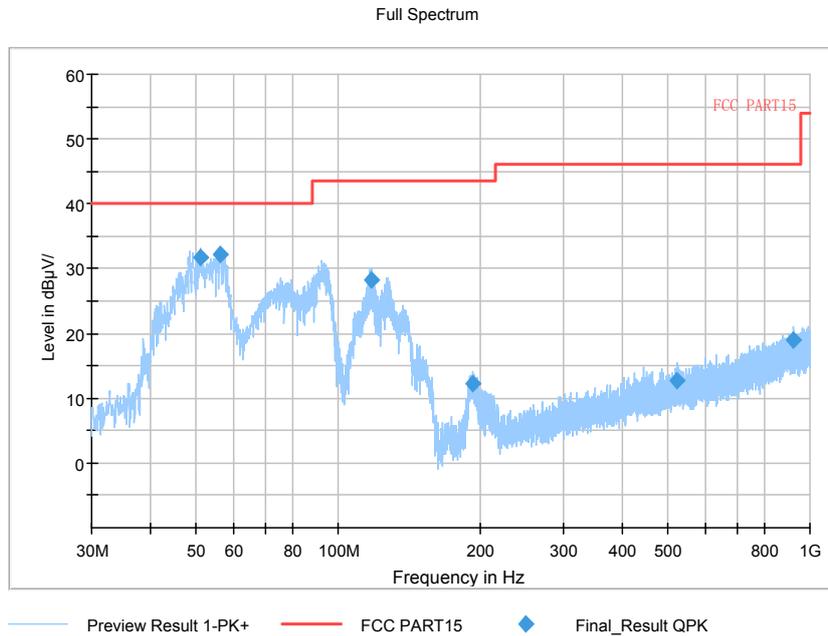


Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11n(HT40 MIMO)

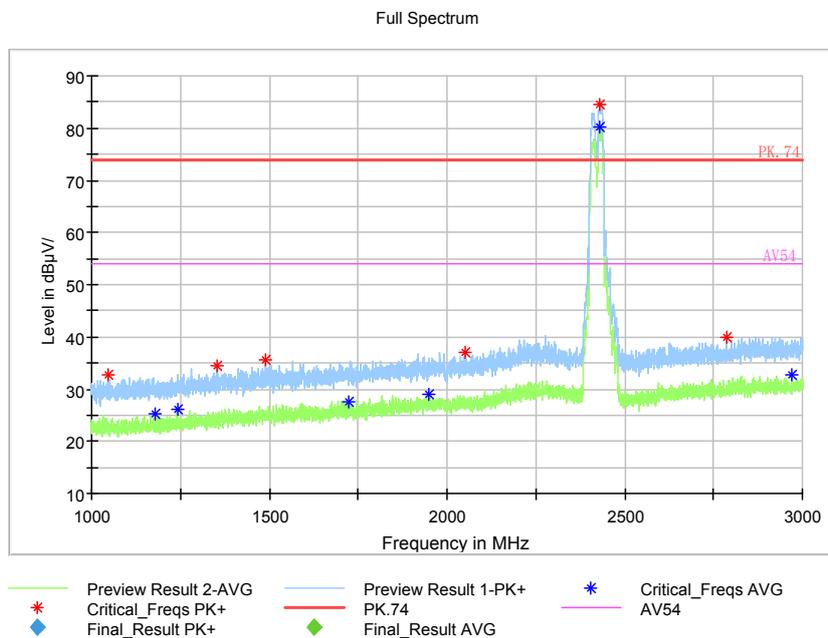

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

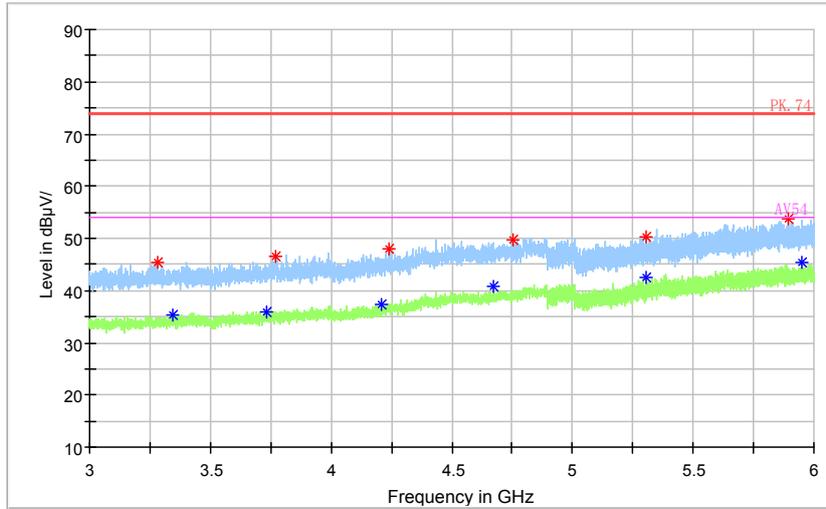

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

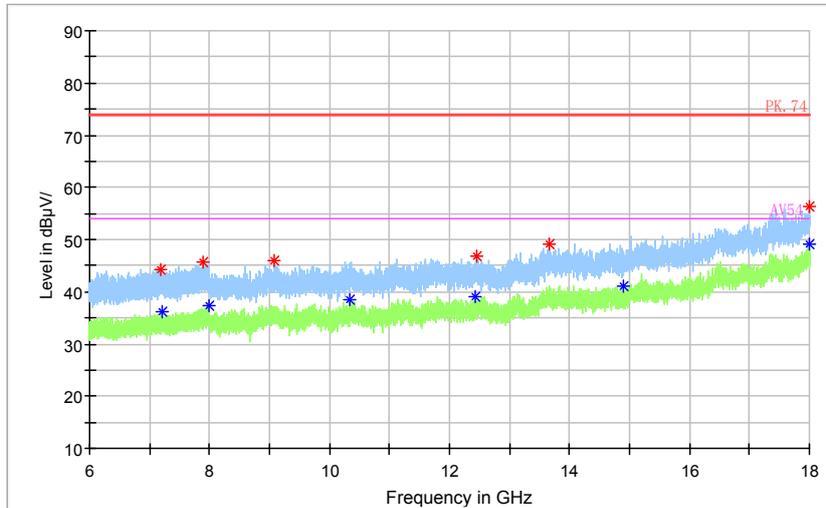

— Preview Result 2-AVG — Preview Result 1-PK+ * Critical_Freqs AVG
* Critical_Freqs PK+ — PK.74 — AV54
◆ Final_Result PK+ ◆ Final_Result AVG

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

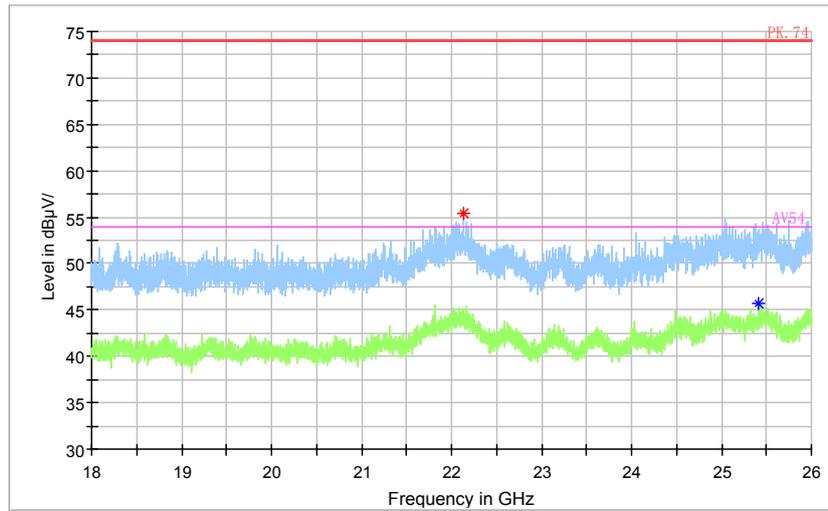


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- * Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)


Carrier frequency (MHz): 2437
Channel No.:6

Full Spectrum

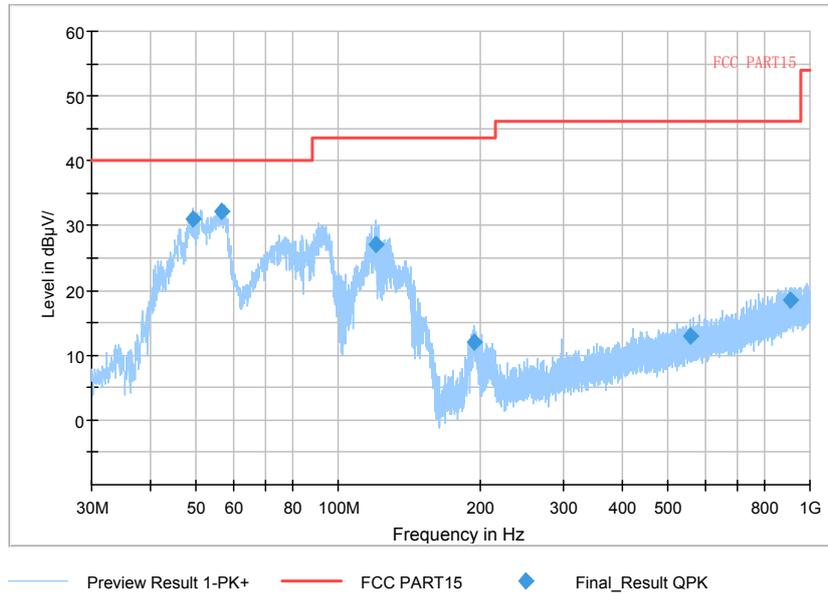


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40 MIMO)

Full Spectrum

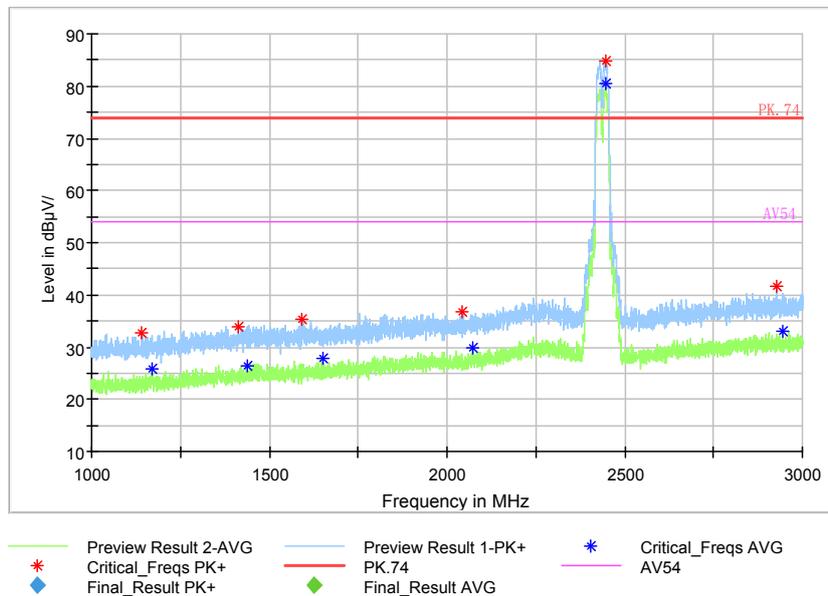


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

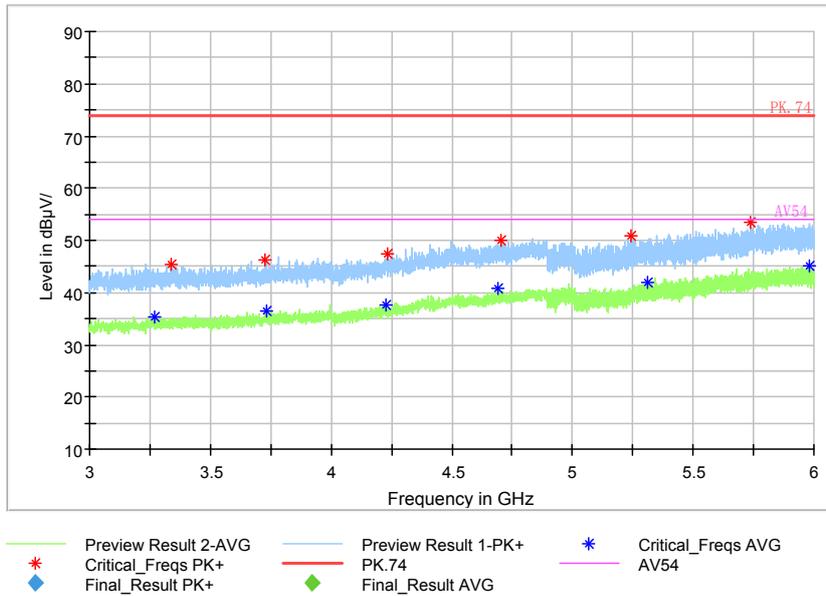


Frequency Range: 3GHz -6GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

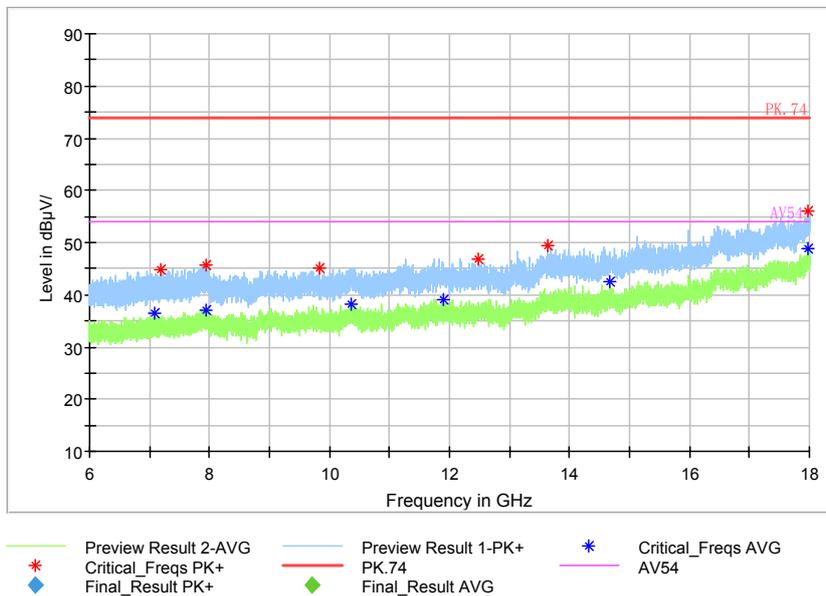

Frequency Range: 6GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)


Full Spectrum

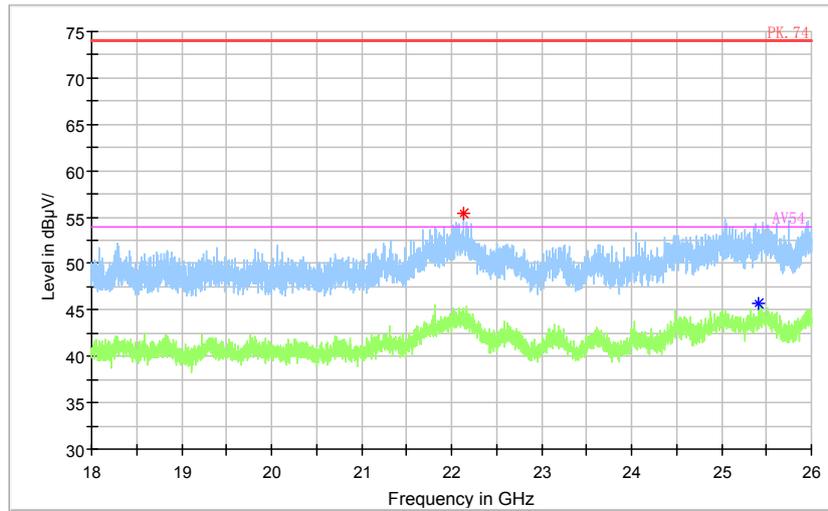


- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs AVG
- * Critical_Freqs PK+
- PK.74
- AV54
- * Final_Result PK+
- ♦ Final_Result AVG

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)

Carrier frequency (MHz): 2452
Channel No.:9

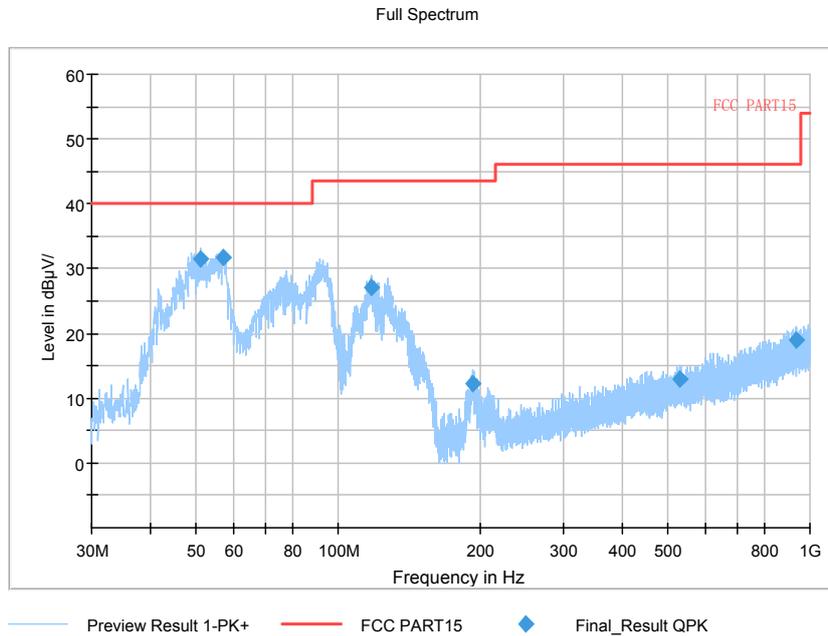


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11n(HT40 MIMO)

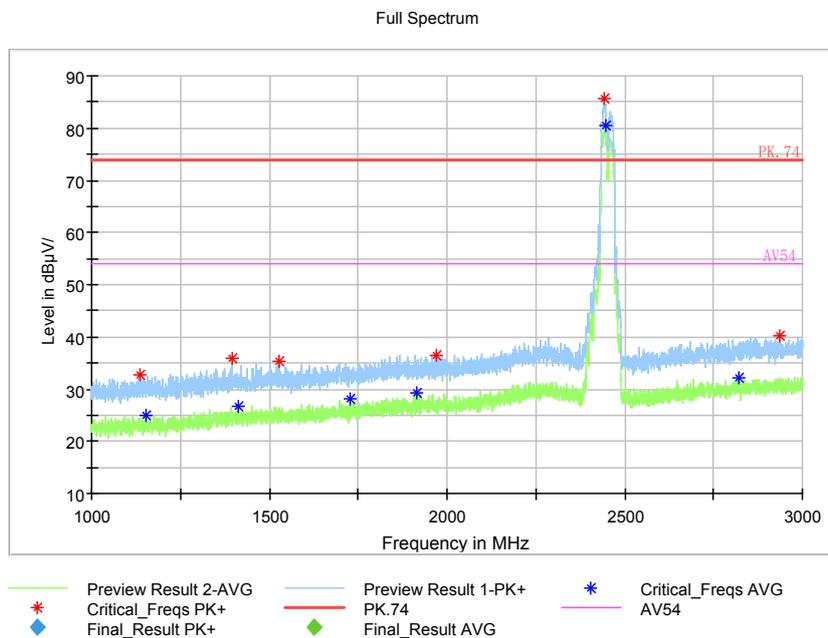


Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

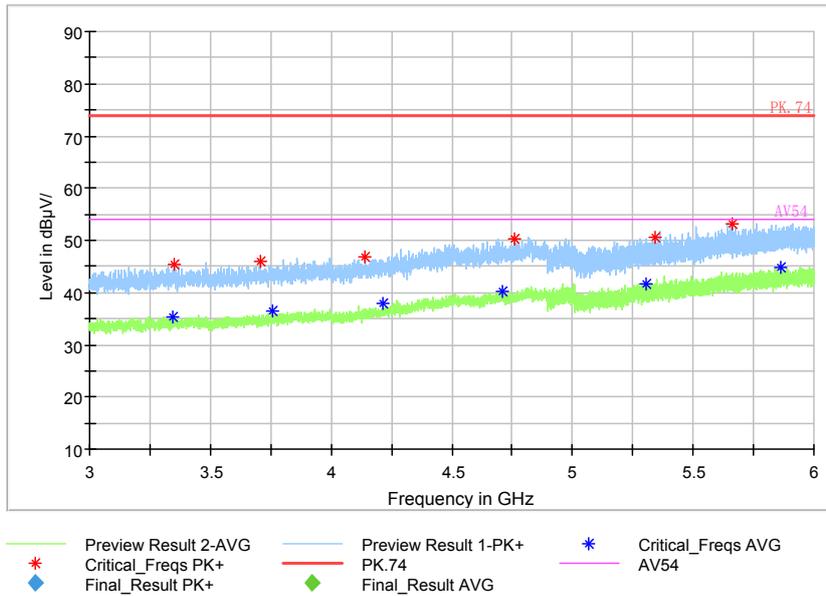


Frequency Range: 3GHz -6GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

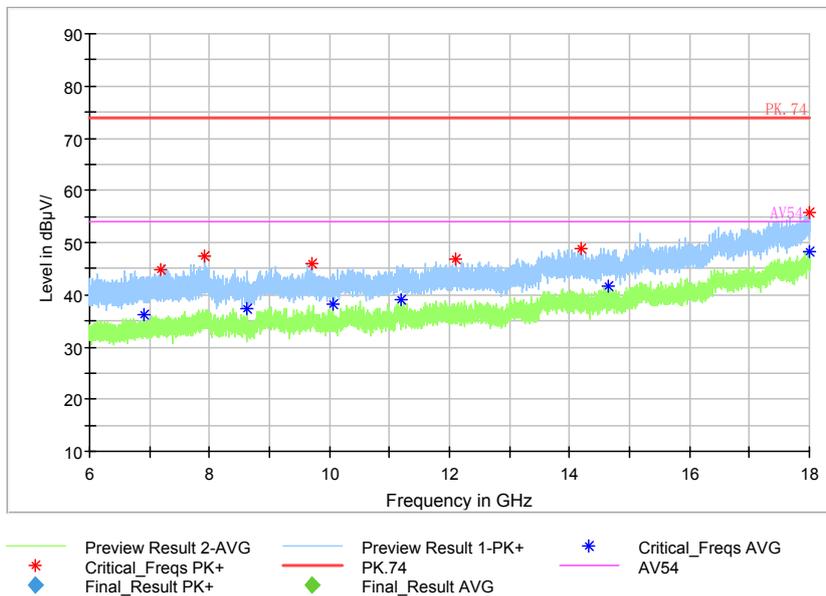

Frequency Range: 6GHz -18GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)

Full Spectrum

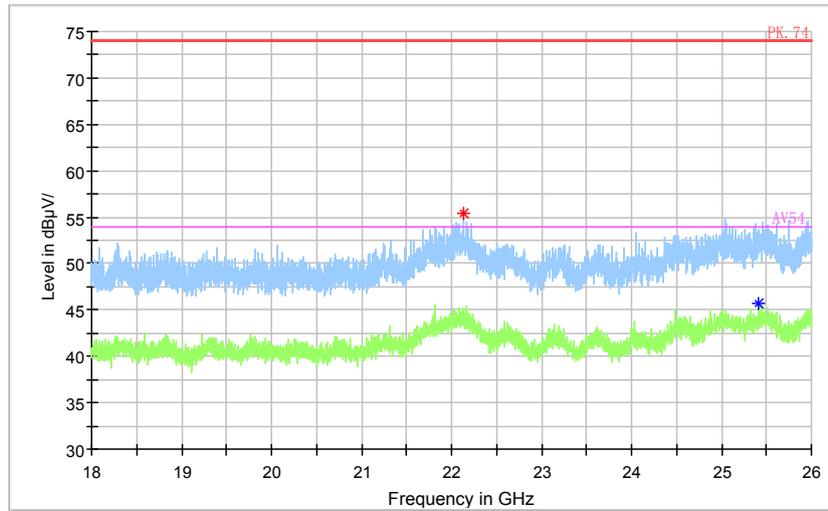

- Preview Result 2-AVG
- Preview Result 1-PK+
- * Critical_Freqs PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- * Critical_Freqs AVG
- AV54

Frequency Range: 18GHz-26GHz
 Detector: Av mode and PK mode
 Modulation type: 802.11n(HT40 MIMO)


AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result} = P_{mea} + Corr.(dB)$$

Sample calculation: $(32.24 \text{ dB}\mu\text{V}) = (2.54 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$, the corresponding frequency is 0.150000MHz.

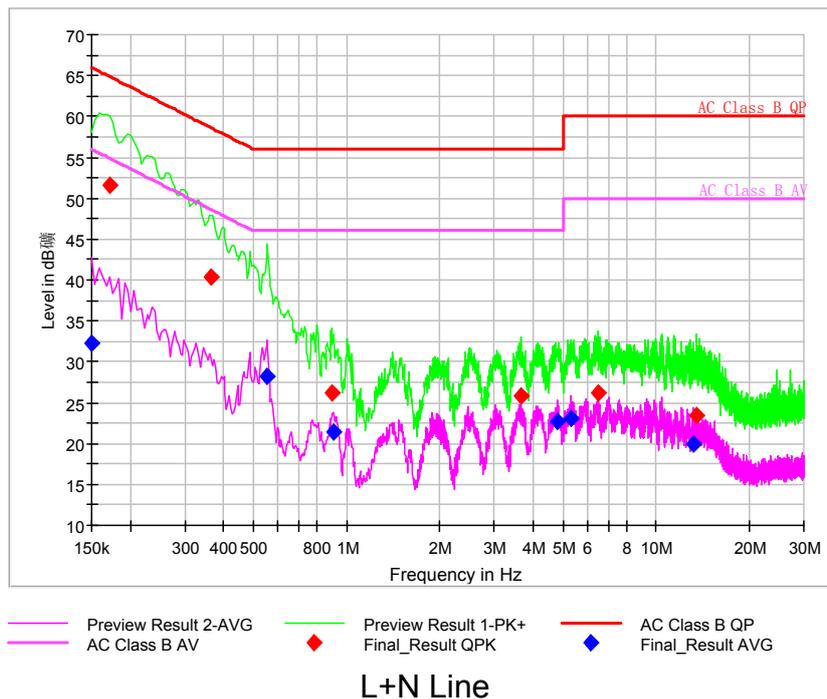

MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)	Pmea Quasi Peak (dBμV)	Pmea Average (dBμV)
0.150000	---	32.24	56.00	23.76	L1	29.7	---	2.54
0.171321	51.65	---	64.90	13.25	L1	29.7	21.95	---
0.363214	40.37	---	58.66	18.28	L1	29.7	10.67	---
0.555107	---	28.17	46.00	17.83	N	29.7	---	-1.53
0.896250	26.27	---	56.00	29.73	L1	29.8	-3.53	---
0.904779	---	21.44	46.00	24.56	N	29.8	---	-8.36
3.646714	25.79	---	56.00	30.21	L1	29.8	-4.01	---
4.785279	---	22.67	46.00	23.33	N	29.8	---	-7.13
5.314050	---	22.99	50.00	27.01	L1	29.8	---	-6.81
6.525107	26.21	---	60.00	33.79	L1	29.8	-3.59	---
13.151807	---	19.95	50.00	30.05	L1	30.0	---	-10.05
13.505743	23.50	---	60.00	36.50	L1	30.0	-6.5	---

---End of the test report---