






LTE Band 2 15MHz QPSK 100%RB CH-Low

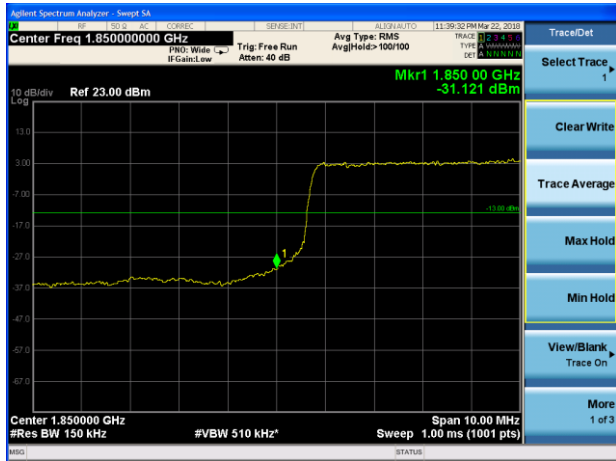


LTE Band 2 15MHz QPSK 100%RB CH-High

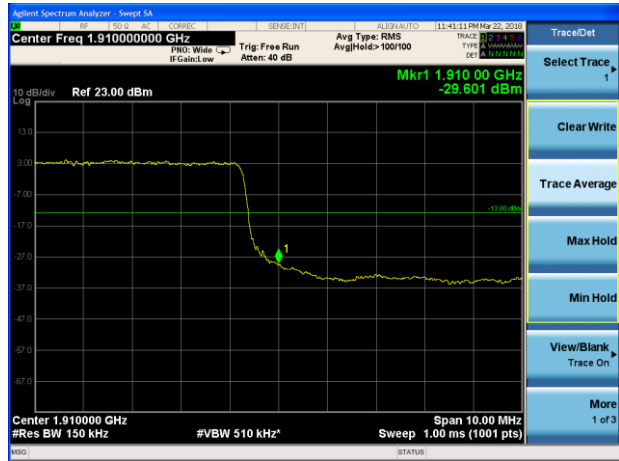


LTE Band 2 20MHz QPSK 1RB CH-Low

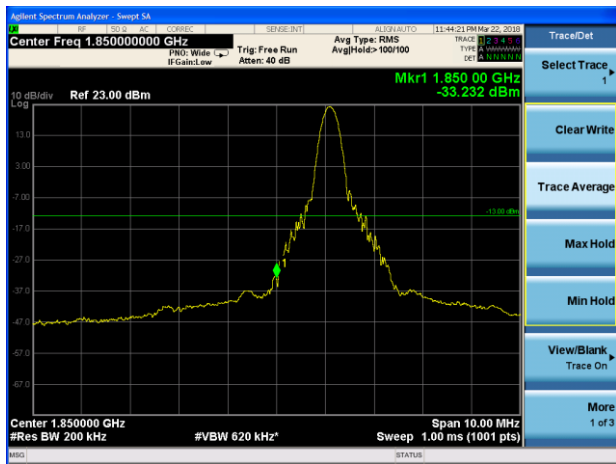


LTE Band 2 20MHz QPSK 1RB CH-High

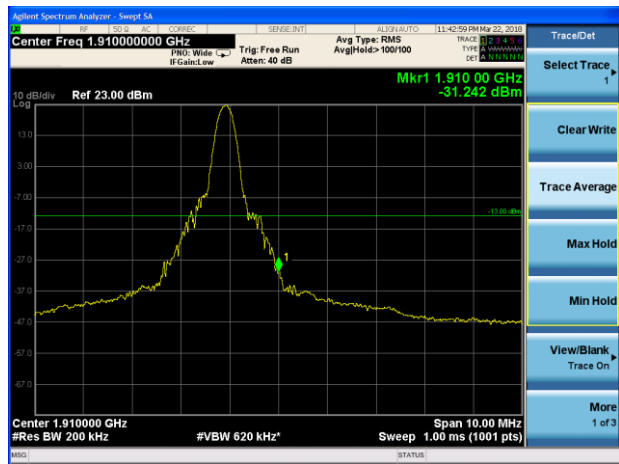

LTE Band 2 20MHz QPSK 100%RB CH-Low

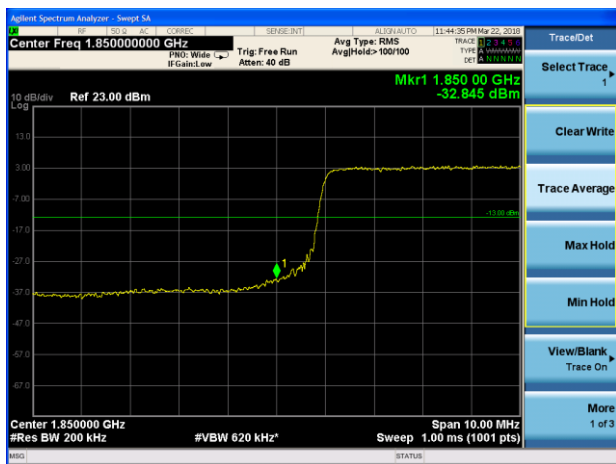


LTE Band 2 20MHz QPSK 100%RB CH-High

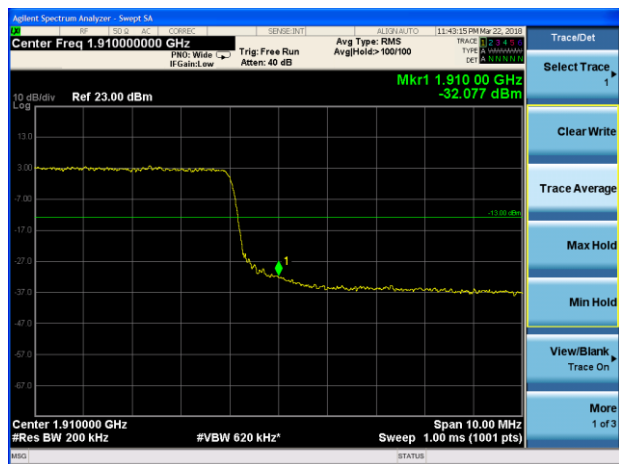





LTE Band 2 1.4MHz 16QAM 1RB CH-Low

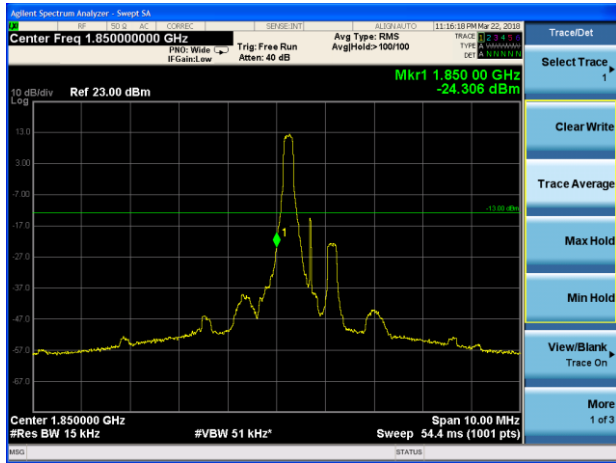


LTE Band 2 1.4MHz 16QAM 1RB CH-High

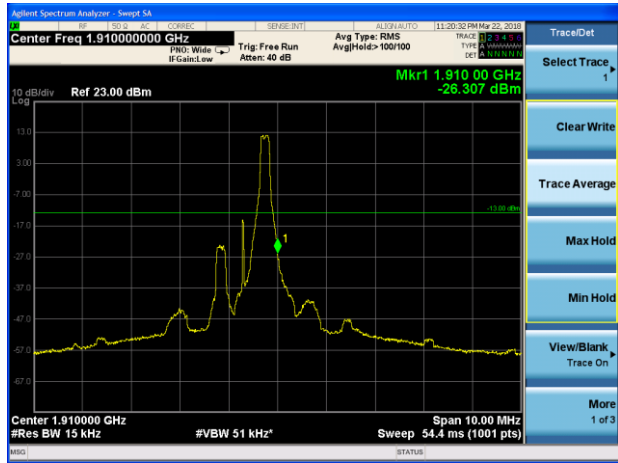


LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

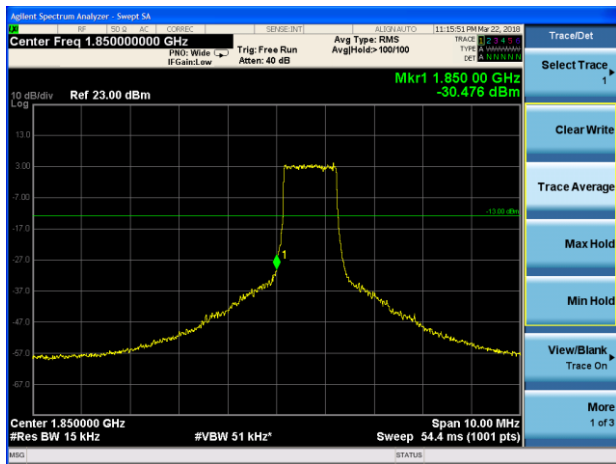


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

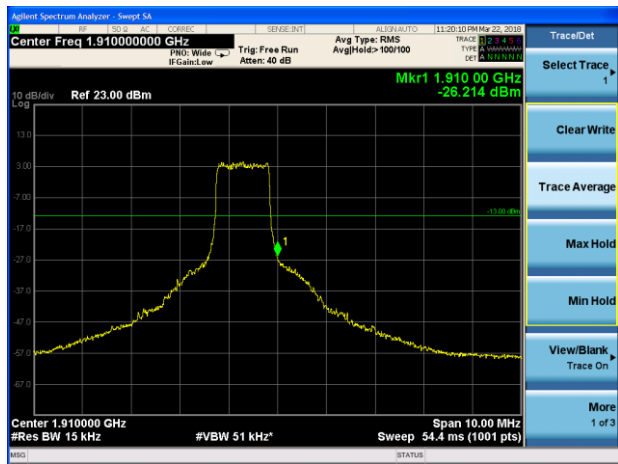

LTE Band 2 3MHz 16QAM 1RB CH-Low

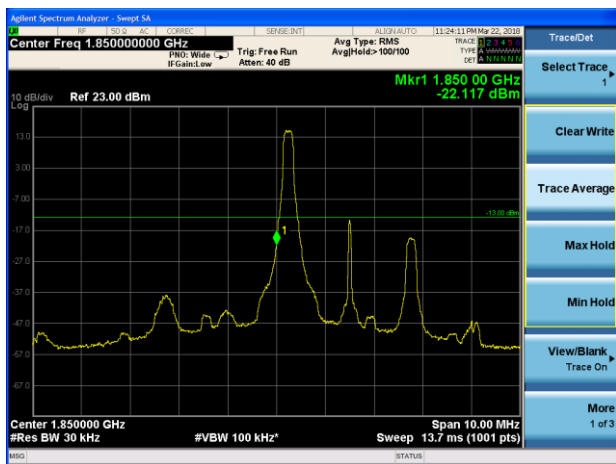


LTE Band 2 3MHz 16QAM 1RB CH-High

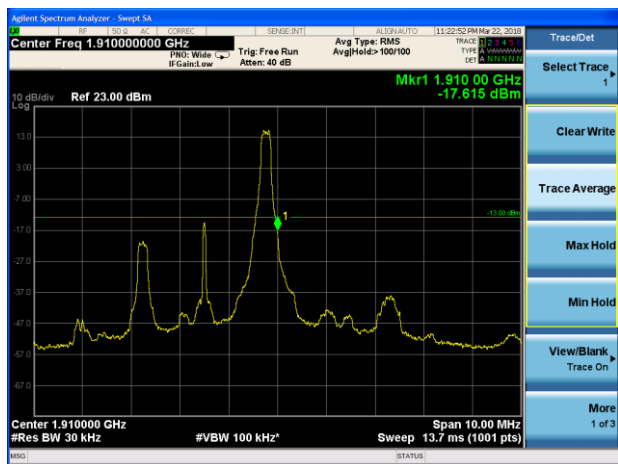




### LTE Band 2 3MHz 16QAM 100%RB CH-Low

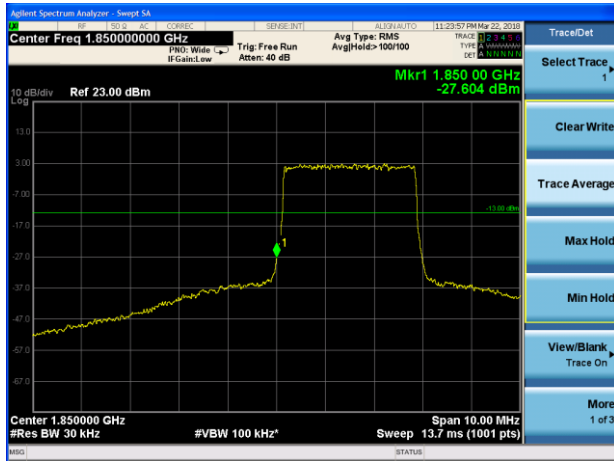


### LTE Band 2 3MHz 16QAM 100%RB CH-High




### LTE Band 2 5MHz 16QAM 1RB CH-Low

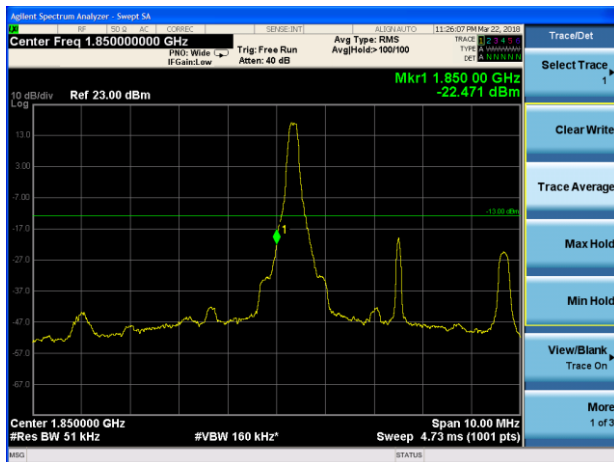


### LTE Band 2 5MHz 16QAM 1RB CH-High

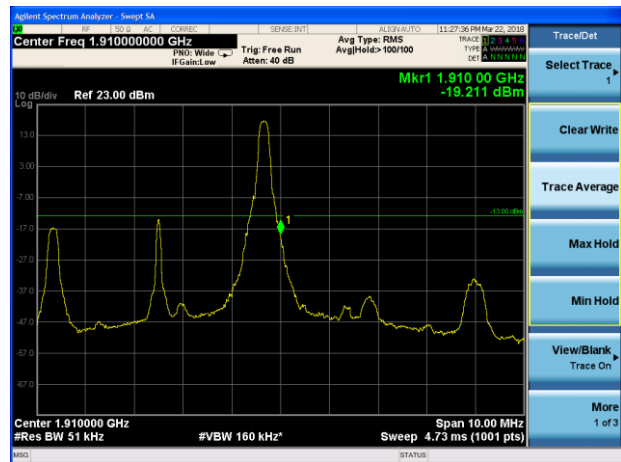

### LTE Band 2 5MHz 16QAM 100%RB CH-Low

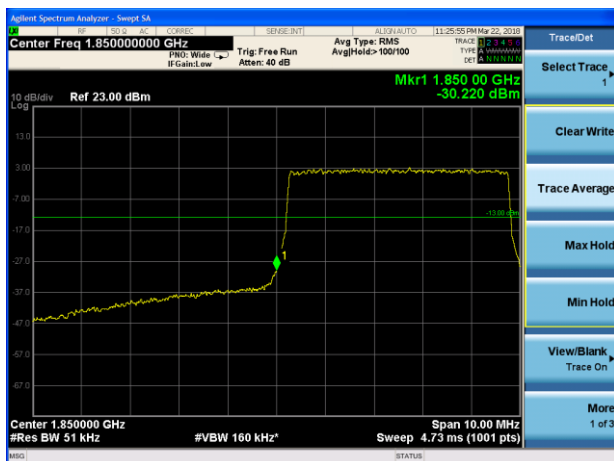


### LTE Band 2 5MHz 16QAM 100%RB CH-High

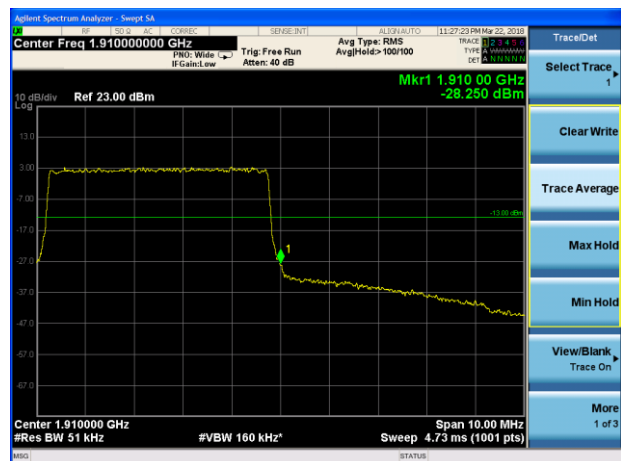





### LTE Band 2 10MHz 16QAM 1RB CH-Low

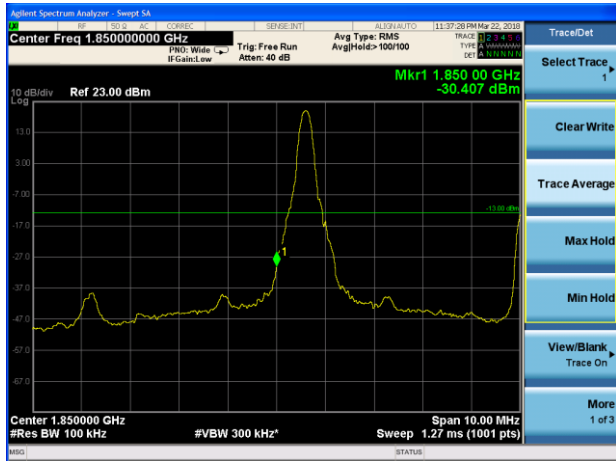


### LTE Band 2 10MHz 16QAM 1RB CH-High

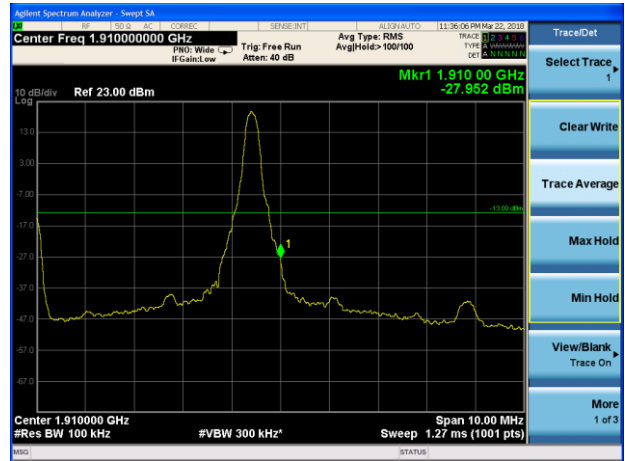


### LTE Band 2 10MHz 16QAM 100%RB CH-Low

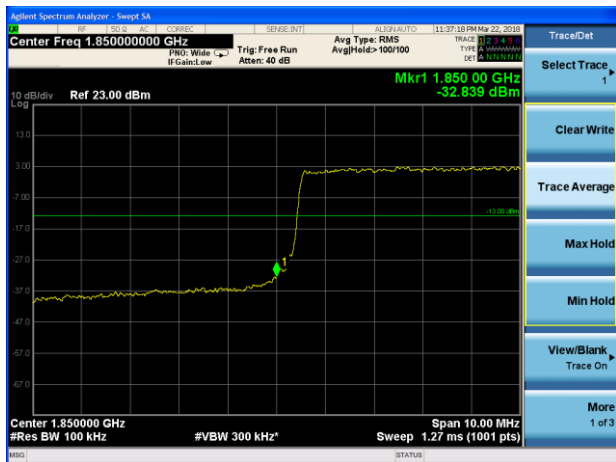


### LTE Band 2 10MHz 16QAM 100%RB CH-High

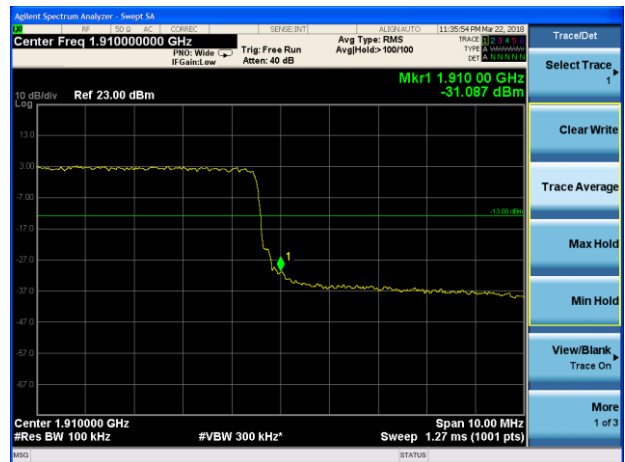

### LTE Band 2 15MHz 16QAM 1RB CH-Low

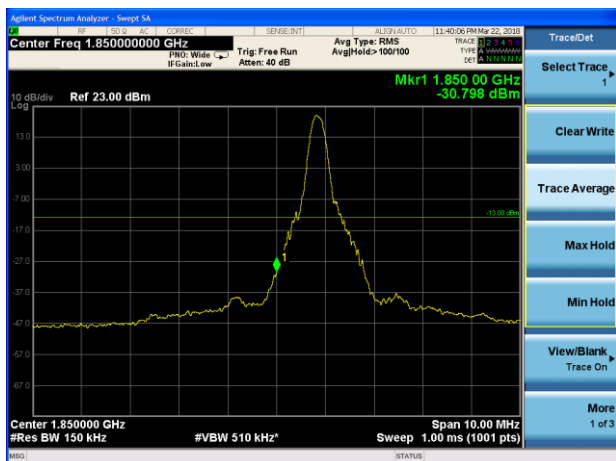


### LTE Band 2 15MHz 16QAM 1RB CH-High

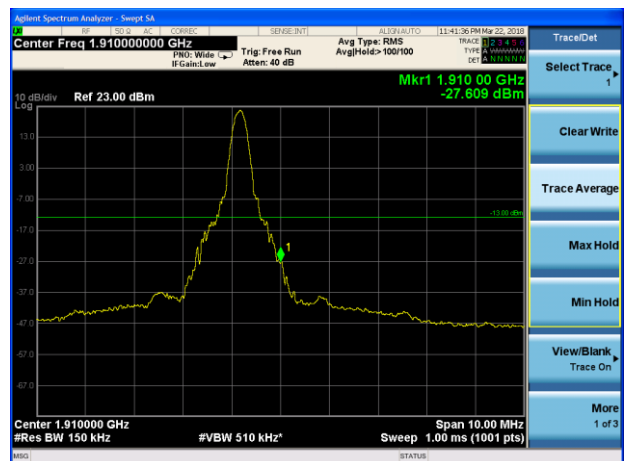





LTE Band 2 15MHz 16QAM 100%RB CH-Low

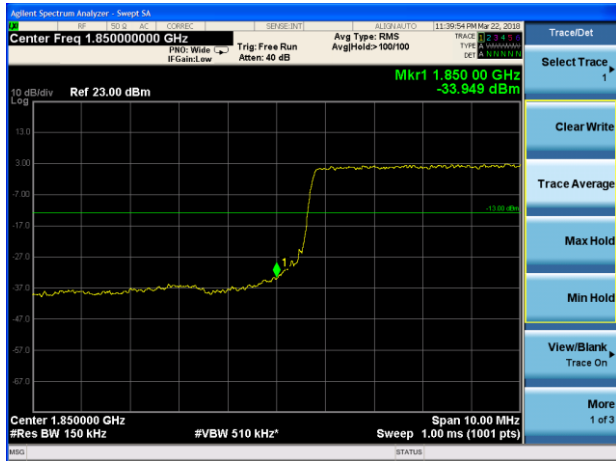


LTE Band 2 15MHz 16QAM 100%RB CH-High

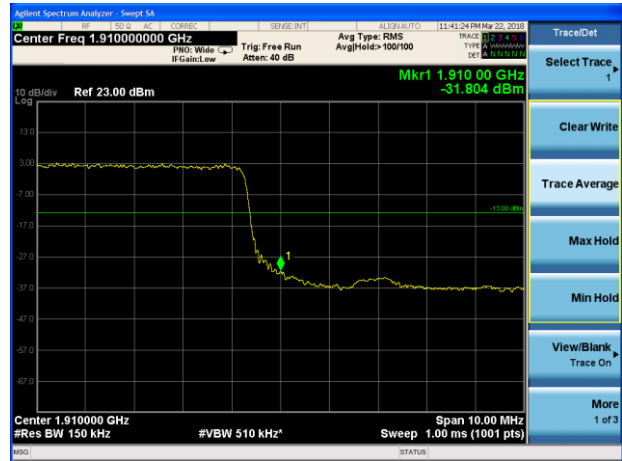


LTE Band 2 20MHz 16QAM 1RB CH-Low

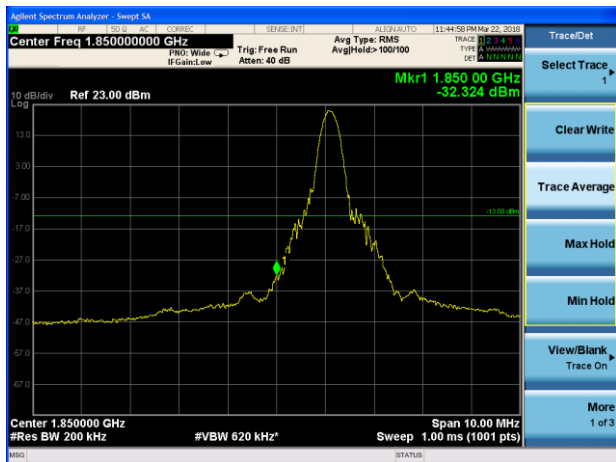


LTE Band 2 20MHz 16QAM 1RB CH-High

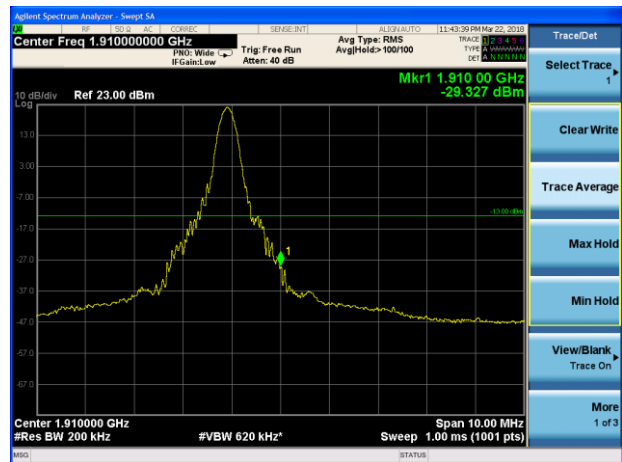

LTE Band 2 20MHz 16QAM 100%RB CH-Low

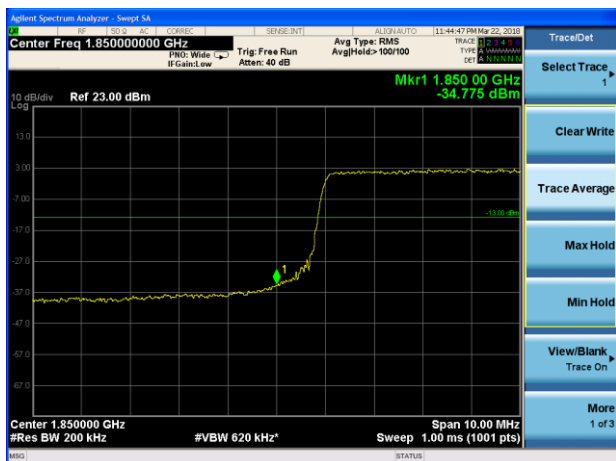

LTE Band 2 20MHz 16QAM 100%RB CH-High

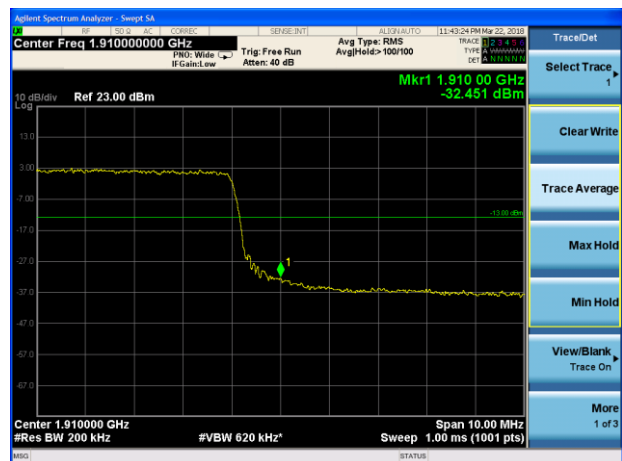

### 5.4. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

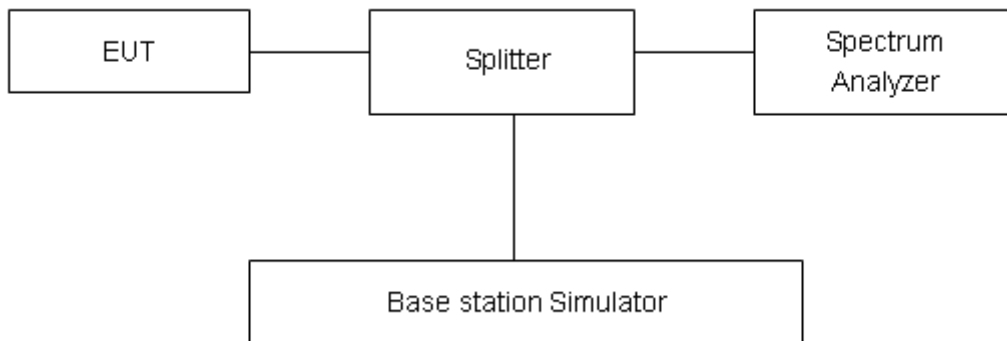

#### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



## Test Results

LTE Band 2								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	18607	1850.7	26.60	22.02	4.58	≤13	PASS
		18900	1880.0	26.95	22.14	4.81	≤13	PASS
		19193	1909.3	26.25	22.24	4.01	≤13	PASS
	3	18615	1851.5	26.70	21.96	4.74	≤13	PASS
		18900	1880	26.95	22.04	4.91	≤13	PASS
		19185	1908.5	26.55	22.20	4.35	≤13	PASS
	5	18625	1852.5	26.59	21.94	4.65	≤13	PASS
		18900	1880	26.98	22.03	4.95	≤13	PASS
		19175	1907.5	26.66	22.18	4.48	≤13	PASS
	10	18650	1855	26.70	22.02	4.68	≤13	PASS
		18900	1880	26.94	22.05	4.89	≤13	PASS
		19150	1905	26.85	22.22	4.63	≤13	PASS
	15	18675	1857.5	26.74	22.00	4.74	≤13	PASS
		18900	1880	26.95	22.01	4.94	≤13	PASS
		19125	1902.5	26.89	22.17	4.72	≤13	PASS
20	18700	1860	26.71	21.97	4.74	≤13	PASS	
	18900	1880	26.81	21.96	4.85	≤13	PASS	
	19100	1900	26.88	22.13	4.75	≤13	PASS	
16QAM	1.4	18607	1850.7	26.33	20.92	5.41	≤13	PASS
		18900	1880.0	26.81	21.11	5.70	≤13	PASS
		19193	1909.3	25.83	21.10	4.73	≤13	PASS
	3	18615	1851.5	26.73	21.20	5.53	≤13	PASS
		18900	1880	26.83	21.07	5.76	≤13	PASS
		19185	1908.5	26.49	21.30	5.19	≤13	PASS
	5	18625	1852.5	26.64	21.18	5.46	≤13	PASS
		18900	1880	26.76	21.03	5.73	≤13	PASS
		19175	1907.5	26.54	21.25	5.29	≤13	PASS
	10	18650	1855	26.70	21.21	5.49	≤13	PASS
		18900	1880	26.80	21.08	5.72	≤13	PASS
		19150	1905	26.78	21.29	5.49	≤13	PASS
	15	18675	1857.5	26.70	21.18	5.52	≤13	PASS
		18900	1880	26.71	21.03	5.68	≤13	PASS
		19125	1902.5	26.77	21.25	5.52	≤13	PASS
20	18700	1860	26.73	21.16	5.57	≤13	PASS	
	18900	1880	26.71	20.99	5.72	≤13	PASS	
	19100	1900	26.81	21.22	5.59	≤13	PASS	

### 5.5. Frequency Stability

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

##### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

##### Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.4 V and 4.35 V, with a nominal voltage of 3.8V.

#### Test setup

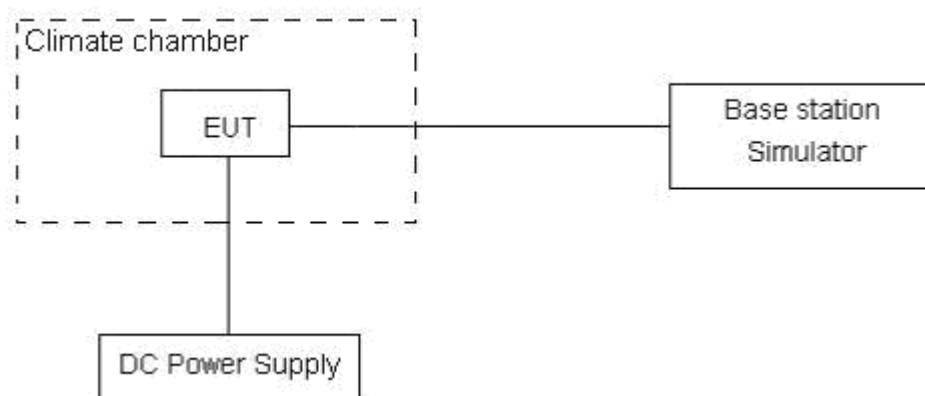



**Limits**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .



## Test Result

LTE Band 2					
(QPSK, 20MHz BANDWIDTH)					
Condition		1850	1910	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.6441	1909.4894	3.01	0.00160
Extreme (55°C)		1850.6441	1909.4894	3.89	0.00207
Extreme (50°C)		1850.6441	1909.4894	3.60	0.00191
Extreme (40°C)		1850.6441	1909.4894	2.68	0.00143
Extreme (30°C)		1850.6441	1909.4894	2.03	0.00108
Extreme (20°C)		1850.6441	1909.4894	1.01	0.00054
Extreme (10C)		1850.6441	1909.4894	3.90	0.00207
Extreme (0°C)		1850.6441	1909.4894	5.63	0.00299
Extreme (-10°C)		1850.6441	1909.4894	1.08	0.00057
Extreme (-20°C)		1850.6441	1909.4894	3.77	0.00201
Extreme (-30°C)		1850.6441	1909.4894	3.41	0.00181
25°C		LV	1850.6441	1909.4894	2.90
	HV	1850.6441	1909.4894	5.14	0.00273
(16QAM, 20MHz BANDWIDTH)					
Condition		1850	1910	Delta(Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	1850.5806	1909.4535	-3.32	-0.00177
Extreme (55°C)		1850.5806	1909.4535	-4.22	-0.00224
Extreme (50°C)		1850.5806	1909.4535	0.09	0.00005
Extreme (40°C)		1850.5806	1909.4535	0.26	0.00014
Extreme (30°C)		1850.5806	1909.4535	0.23	0.00012
Extreme (20°C)		1850.5806	1909.4535	-2.33	-0.00124
Extreme (10C)		1850.5806	1909.4535	-4.00	-0.00213
Extreme (0°C)		1850.5806	1909.4535	-0.81	-0.00043
Extreme (-10°C)		1850.5806	1909.4535	-4.48	-0.00238
Extreme (-20°C)		1850.5806	1909.4535	-4.66	-0.00248
Extreme (-30°C)		1850.5806	1909.4535	-2.66	-0.00141
25°C		LV	1850.5806	1909.4535	-3.56
	HV	1850.5806	1909.4535	-4.98	-0.00265

### 5.6. Spurious Emissions at Antenna Terminals

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.

RBW is set to 100kHz, VBW is set to 300kHz for 30MHz~1GHz

RBW is set to 1MHz, VBW is set to 3MHz for above 1GHz, Sweep is set to ATUO.

RBW is set to 1 kHz (0.009MHz~ 0.15 MHz),


RBW is set to 10 kHz (0.15 MHz~ 30 MHz)

RBW is set to 100 kHz (30MHz~1000 MHz)

RBW is set to 1000 kHz (above 1000MHz)

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

#### Test setup

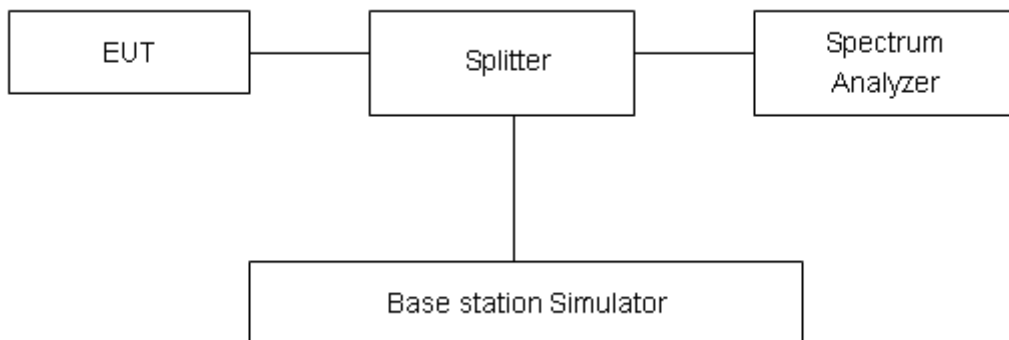

#### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

Limit	-13 dBm

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-20GHz	1.407 dB




### Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


LTE Band 2 1.4MHz CH-Low 30MHz~1GHz

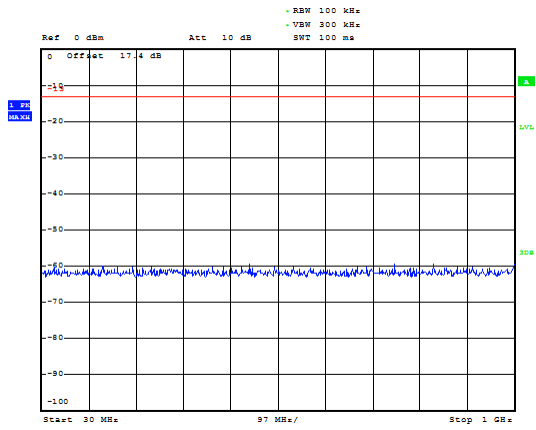


LTE Band 2 1.4MHz CH-Middle 30MHz~1GHz

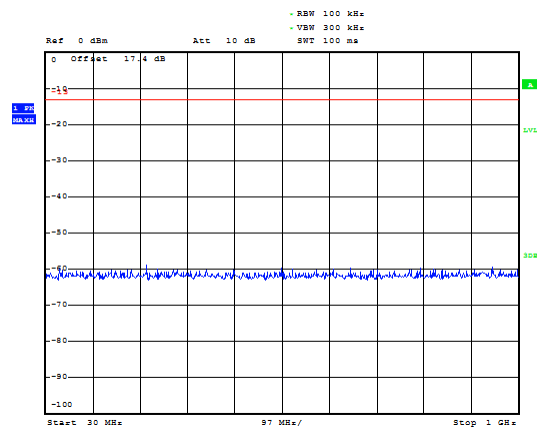


LTE Band 2 1.4MHz CH-Low 1GHz~3GHz

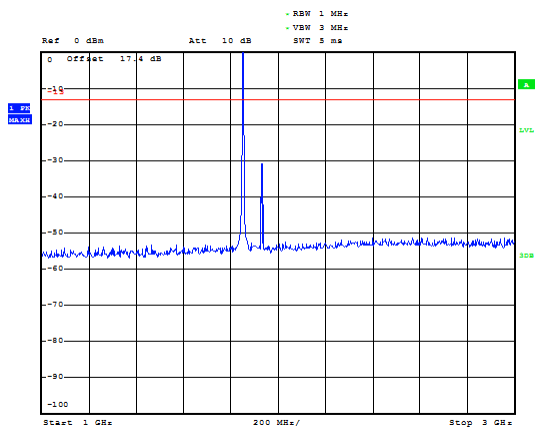


LTE Band 2 1.4MHz CH-Middle 1GHz~3GHz

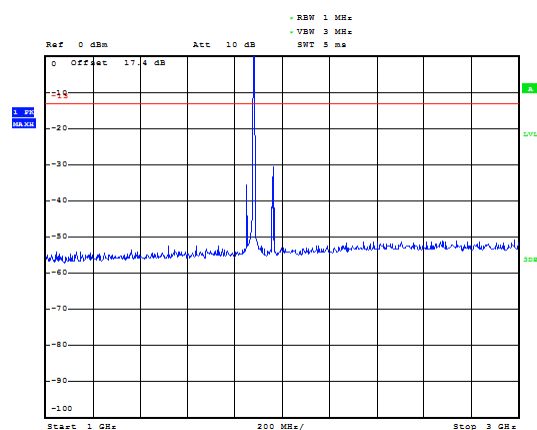

LTE Band 2 1.4MHz CH-Low 3GHz~20GHz

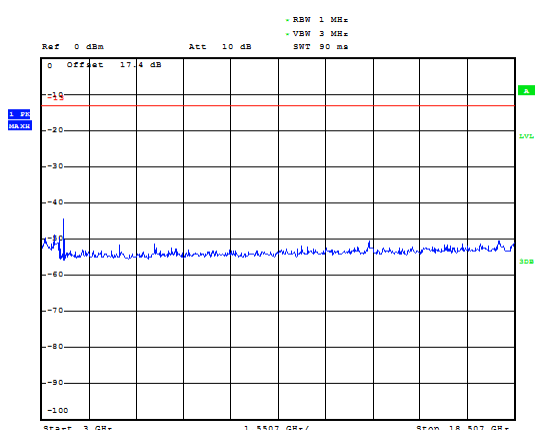


LTE Band 2 1.4MHz CH-Middle 3GHz~20GHz

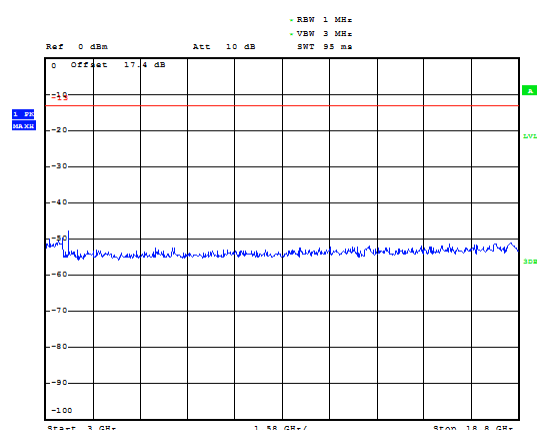





### LTE Band 2 1.4MHz CH-High 30MHz~1GHz

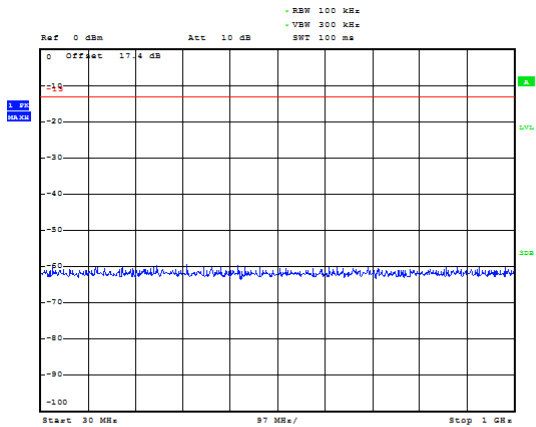


### LTE Band 2 3MHz CH-Low 30MHz~1GHz

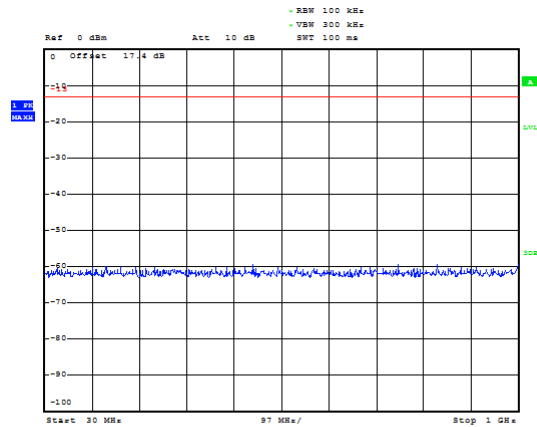


### LTE Band 2 1.4MHz CH-High 1GHz~3GHz

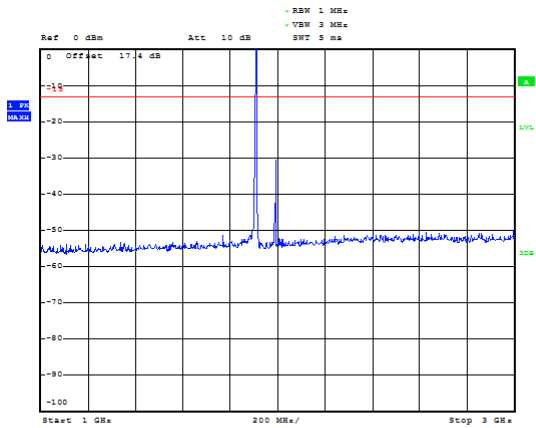


### LTE Band 2 3MHz CH-Low 1GHz~3GHz

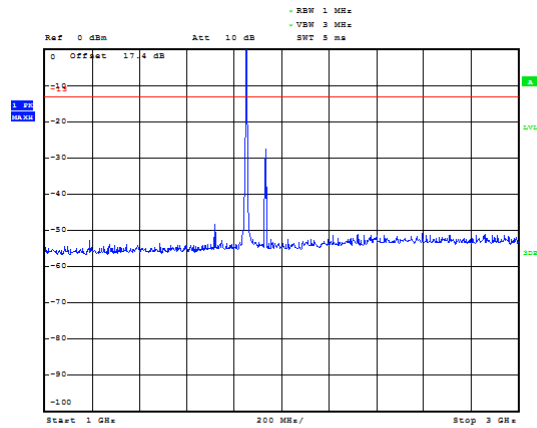

### LTE Band 2 1.4MHz CH-High 3GHz~20GHz

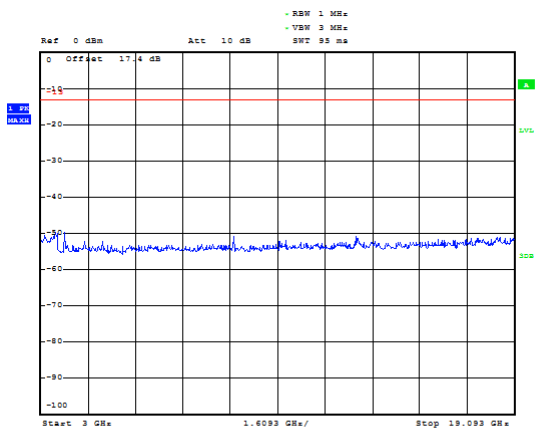


### LTE Band 2 3MHz CH-Low 3GHz~20GHz

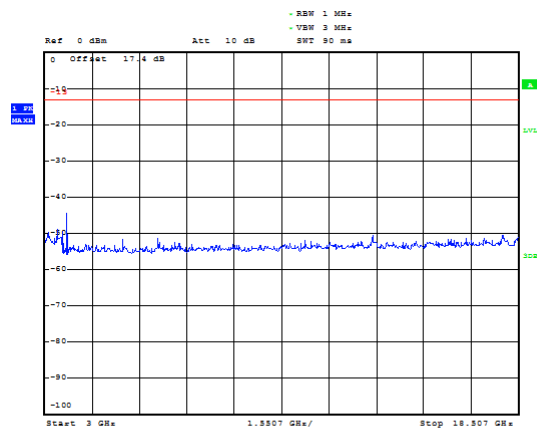





### LTE Band 2 3MHz CH-Middle 30MHz~1GHz

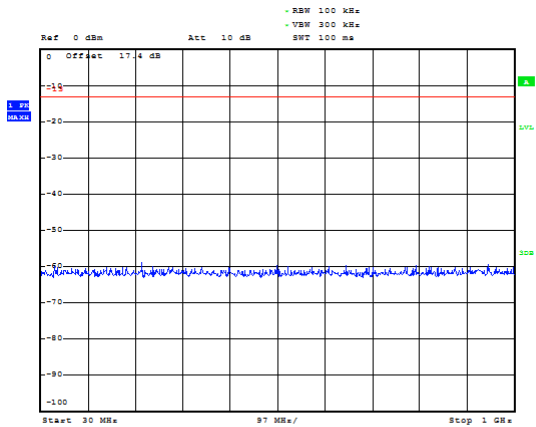


### LTE Band 2 3MHz CH-High 30MHz~1GHz

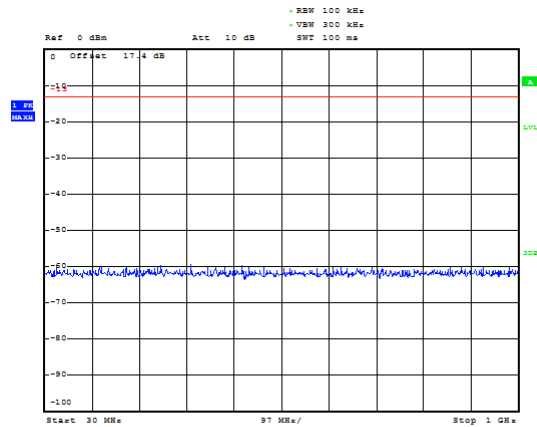


### LTE Band 2 3MHz CH-Middle 1GHz~3GHz

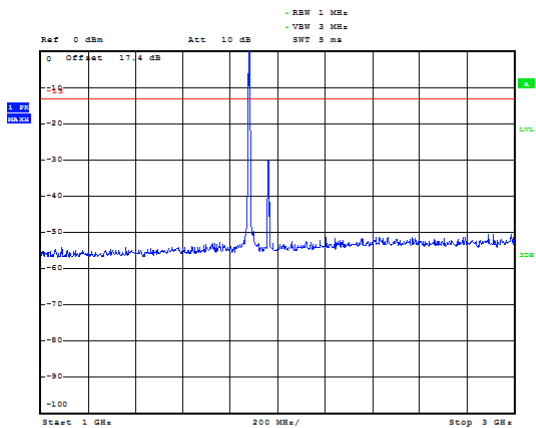


### LTE Band 2 3MHz CH-High 1GHz~3GHz

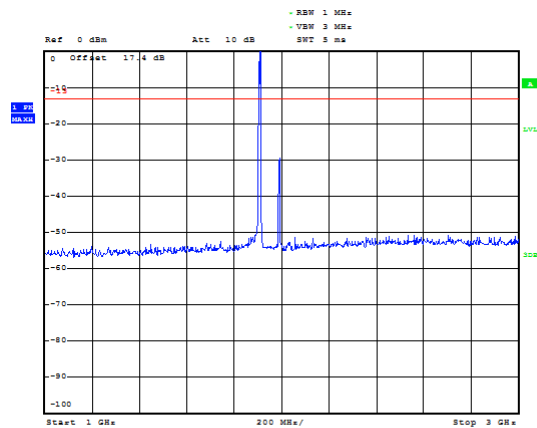

### LTE Band 2 3MHz CH-Middle 3GHz~20GHz

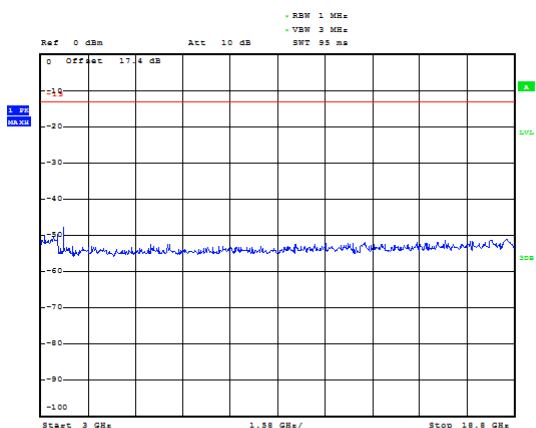


### LTE Band 2 3MHz CH-High 3GHz~20GHz

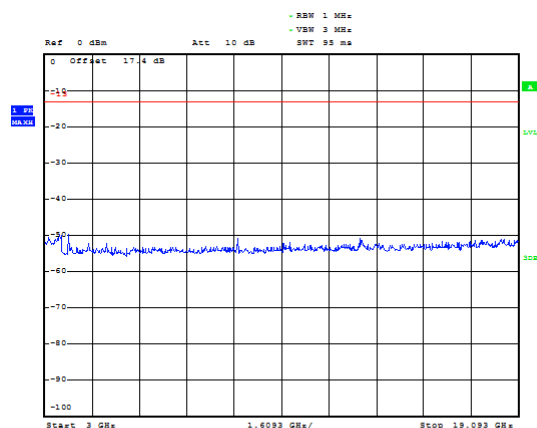





### LTE Band 2 5MHz CH-Low 30MHz~1GHz

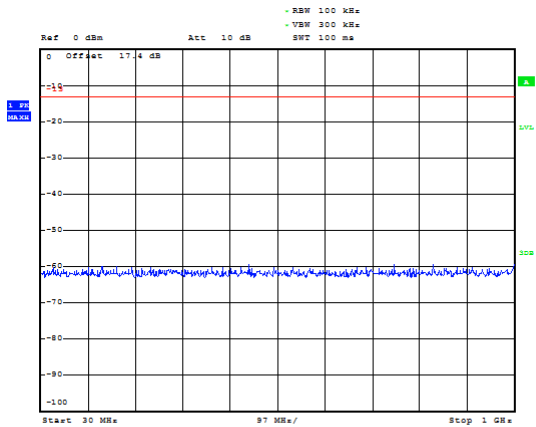


### LTE Band 2 5MHz CH-Middle 30MHz~1GHz

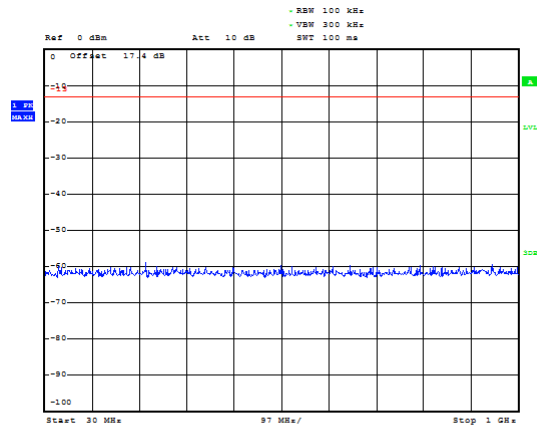


### LTE Band 2 5MHz CH-Low 1GHz~3GHz

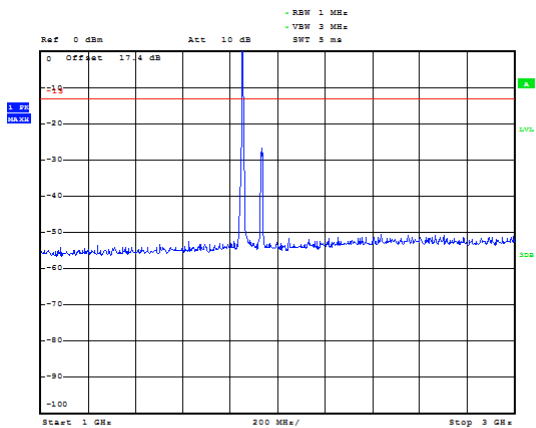


### LTE Band 2 5MHz CH-Middle 1GHz~3GHz

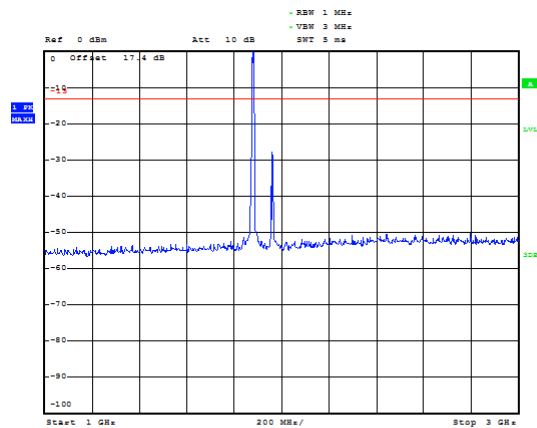

### LTE Band 2 5MHz CH-Low 3GHz~20GHz

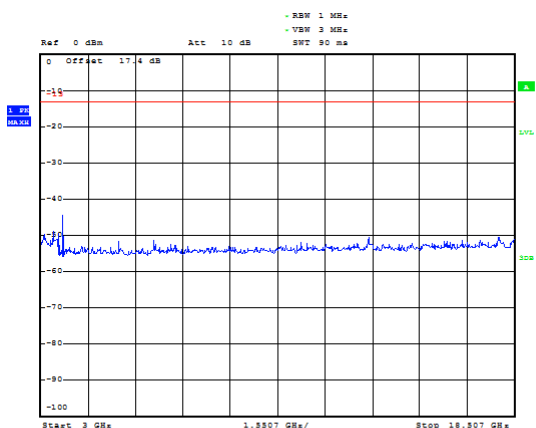


### LTE Band 2 5MHz CH-Middle 3GHz~20GHz

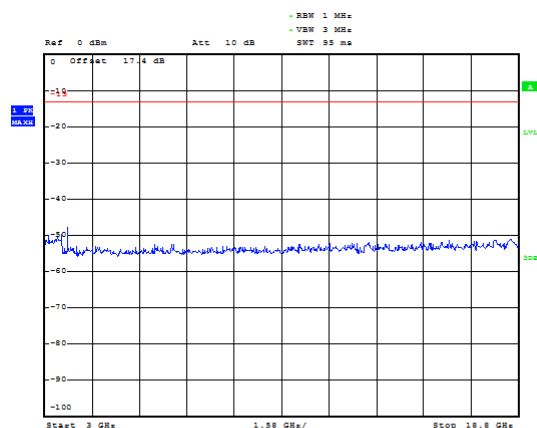





### LTE Band 2 5MHz CH-High 30MHz~1GHz

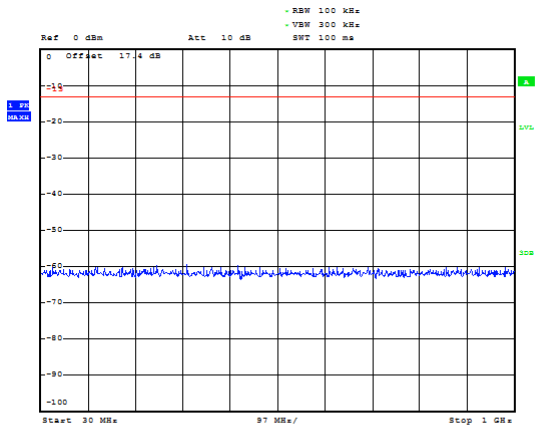


### LTE Band 2 10MHz CH-Low 30MHz~1GHz

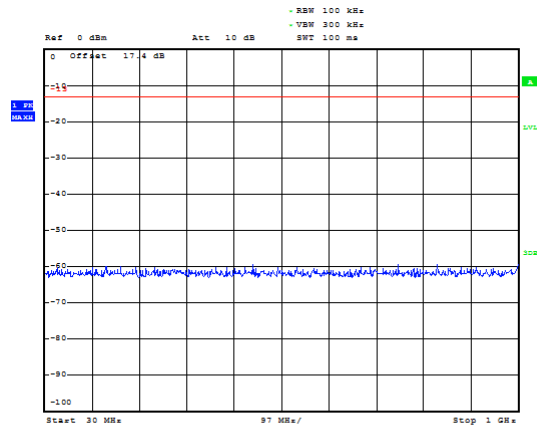


### LTE Band 2 5MHz CH-High 1GHz~3GHz

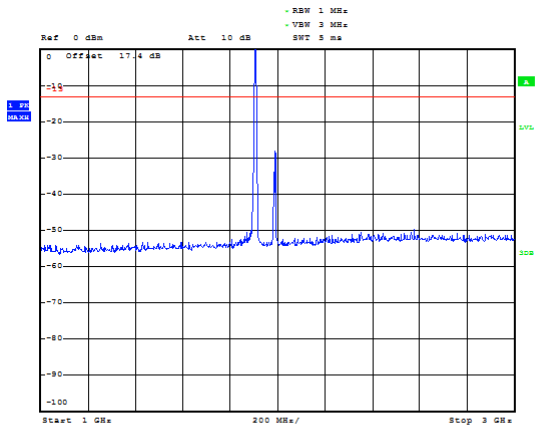


### LTE Band 2 10MHz CH-Low 1GHz~3GHz

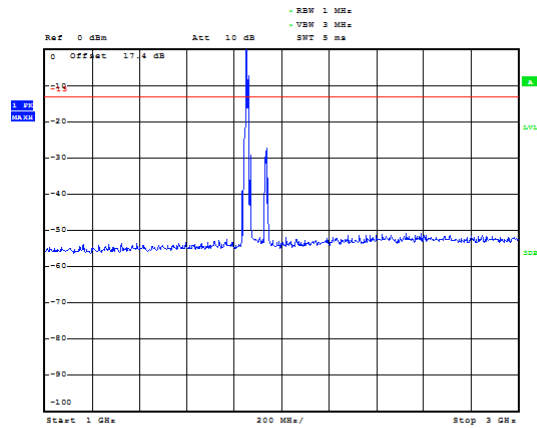

### LTE Band 2 5MHz CH-High 3GHz~20GHz

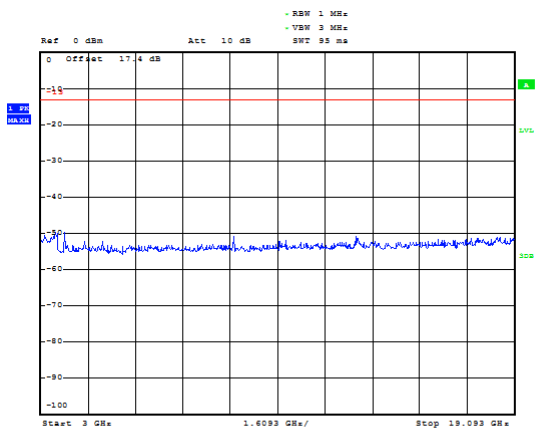


### LTE Band 2 10MHz CH-Low 3GHz~20GHz

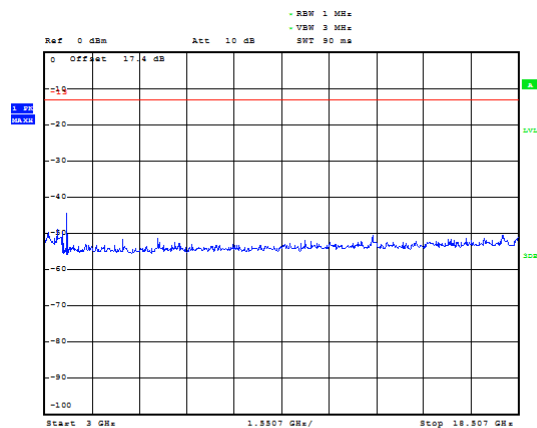







LTE Band 2 10MHz CH-Middle 30MHz~1GHz

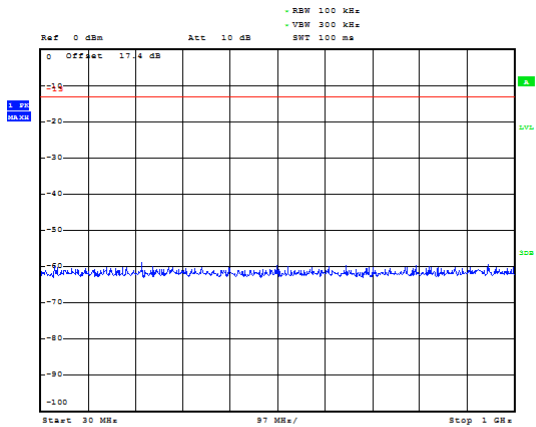


LTE Band 2 10MHz CH-High 30MHz~1GHz

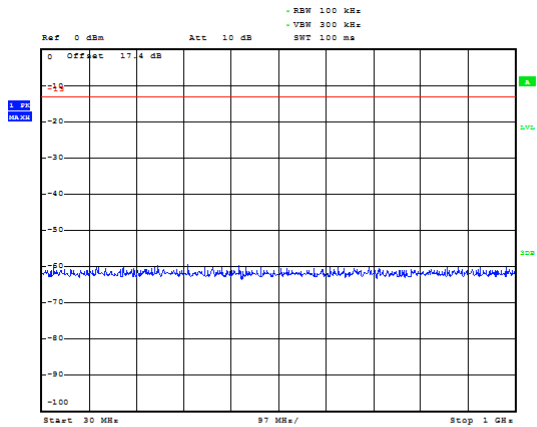


LTE Band 2 10MHz CH-Middle 1GHz~3GHz

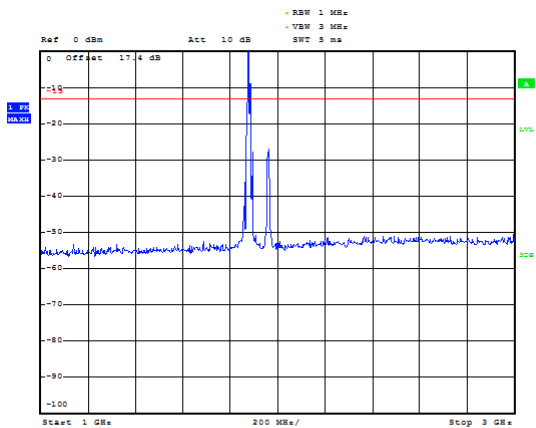


LTE Band 2 10MHz CH-High 1GHz~3GHz

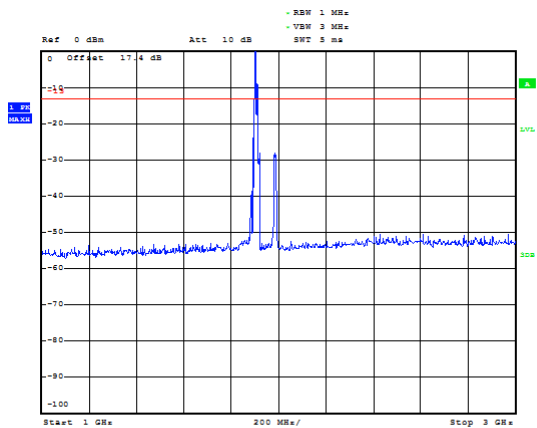

LTE Band 2 10MHz CH-Middle 3GHz~20GHz

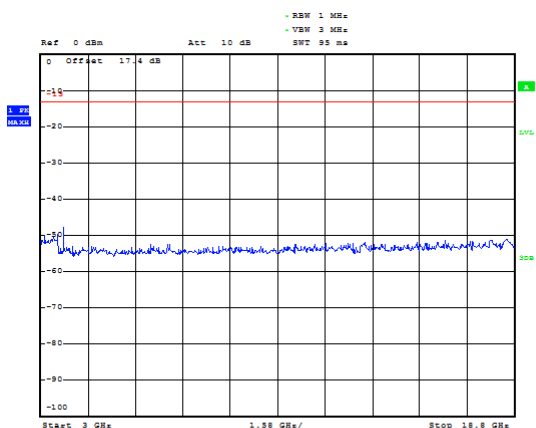


LTE Band 2 10MHz CH-High 3GHz~20GHz

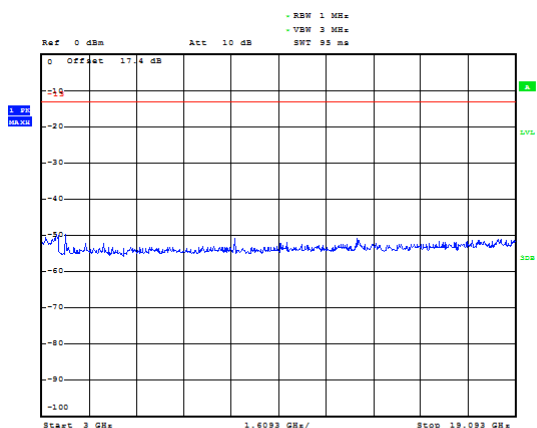





LTE Band 2 15MHz CH-Low 30MHz~1GHz

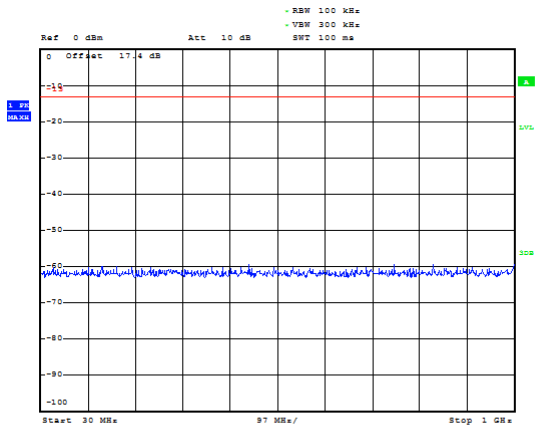


LTE Band 2 15MHz CH-Middle 30MHz~1GHz

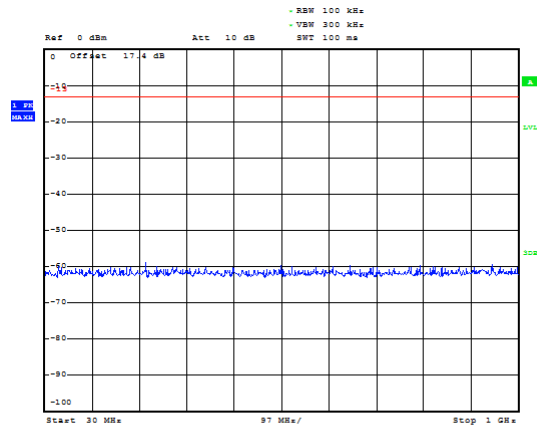


LTE Band 2 15MHz CH-Low 1GHz~3GHz

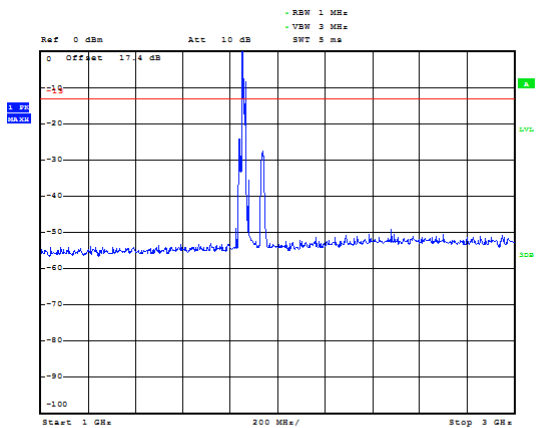


LTE Band 2 15MHz CH-Middle 1GHz~3GHz

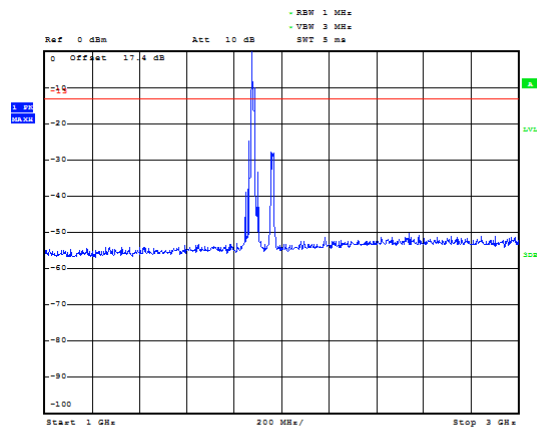

LTE Band 2 15MHz CH-Low 3GHz~20GHz

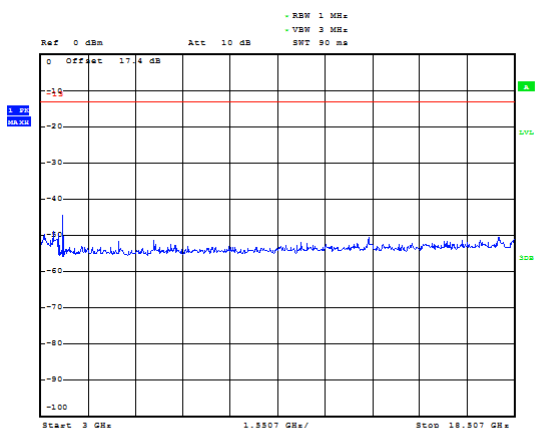


LTE Band 2 15MHz CH-Middle 3GHz~20GHz

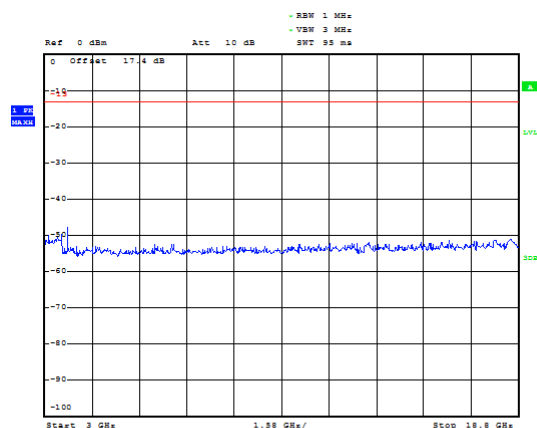





### LTE Band 2 15MHz CH-High 30MHz~1GHz

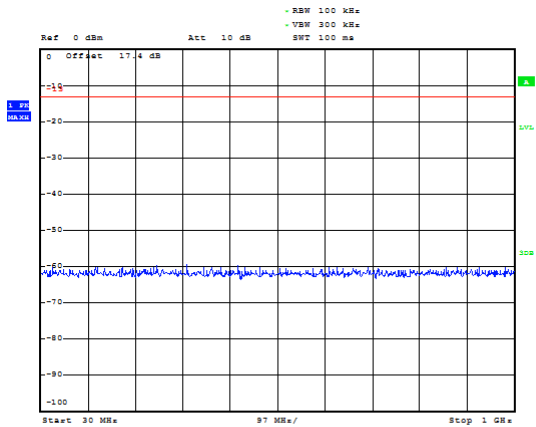


### LTE Band 2 20MHz CH-Low 30MHz~1GHz

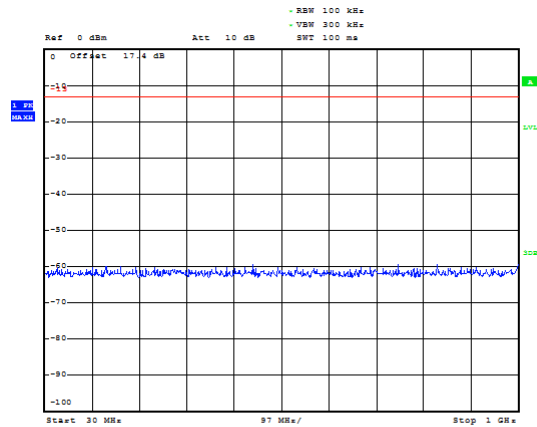


### LTE Band 2 15MHz CH-High 1GHz~3GHz

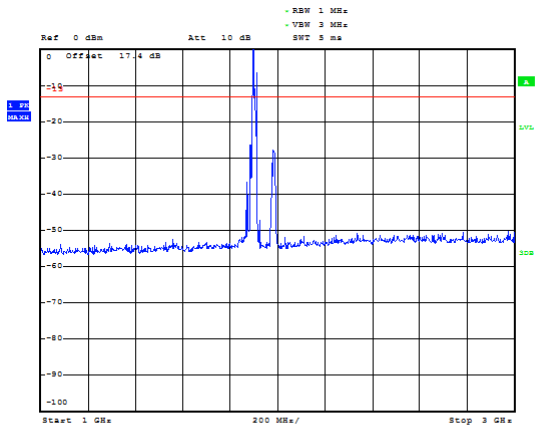


### LTE Band 2 20MHz CH-Low 1GHz~3GHz

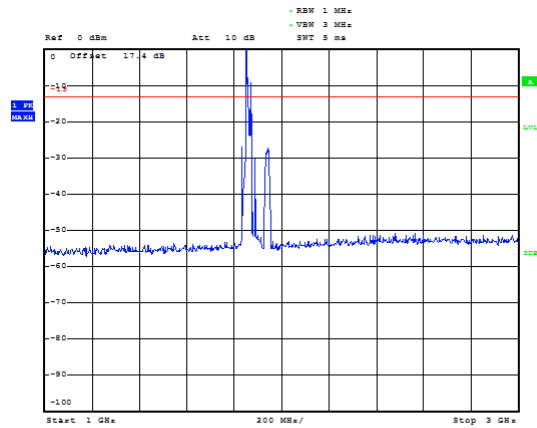

### LTE Band 2 15MHz CH-High 3GHz~20GHz

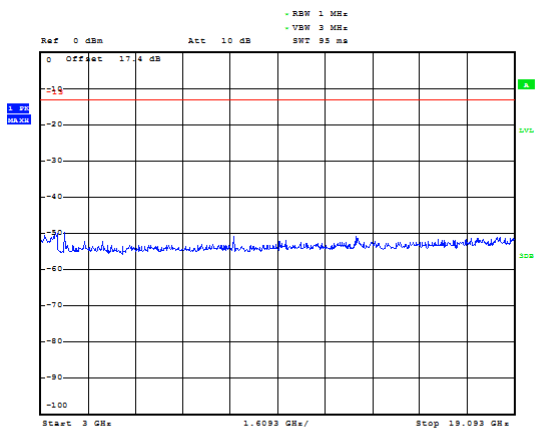


### LTE Band 2 20MHz CH-Low 3GHz~20GHz

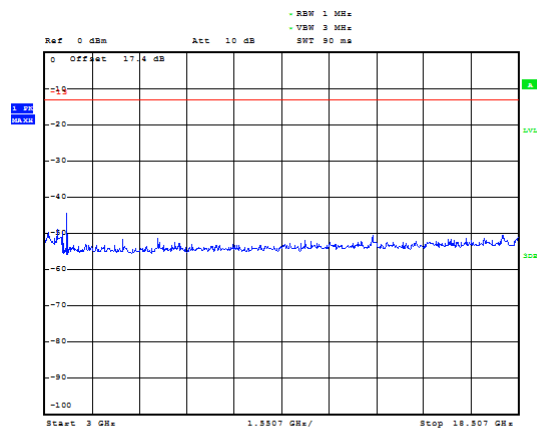





### LTE Band 2 20MHz CH-Middle 30MHz~1GHz

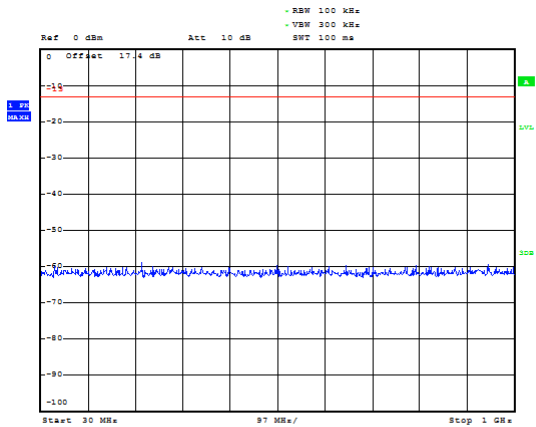


### LTE Band 2 20MHz CH-High 30MHz~1GHz

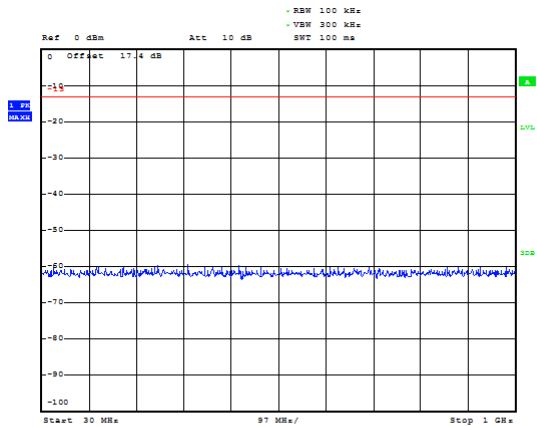


### LTE Band 2 20MHz CH-Middle 1GHz~3GHz

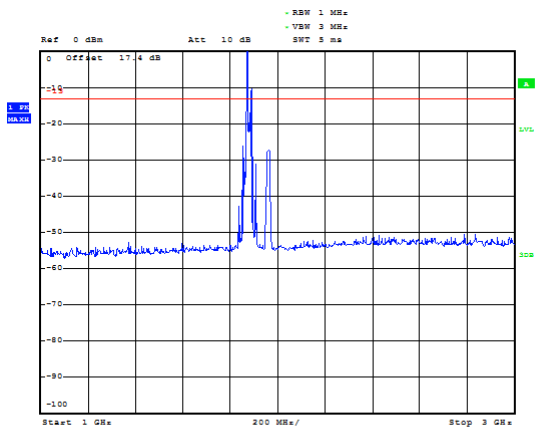


### LTE Band 2 20MHz CH-High 1GHz~3GHz

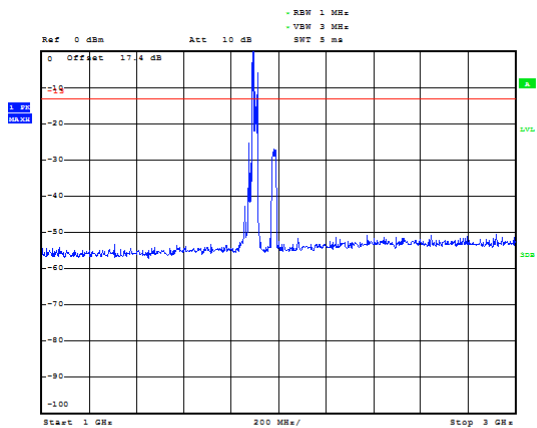

### LTE Band 2 20MHz CH-Middle 3GHz~20GHz

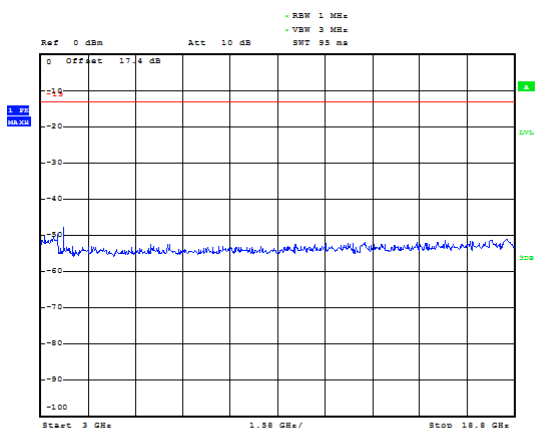

### LTE Band 2 20MHz CH-High 3GHz~20GHz

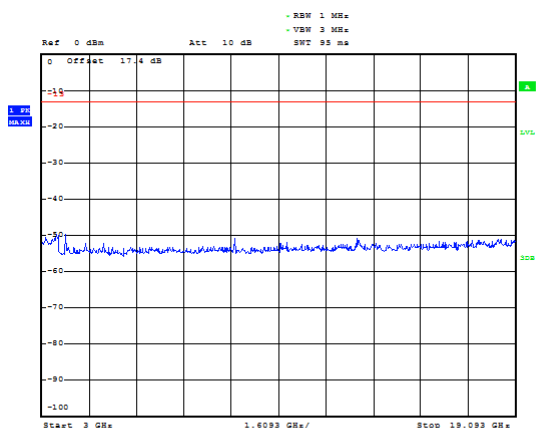

## 5.7. Radiates Spurious Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz , RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
 $Power(EIRP)=PMea- PAg - Pcl + Ga$   
 The measurement results are amend as described below:  
 $Power(EIRP)=PMea- Pcl + Ga$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

**Test setup**


**9KHz ~ 30MHz**

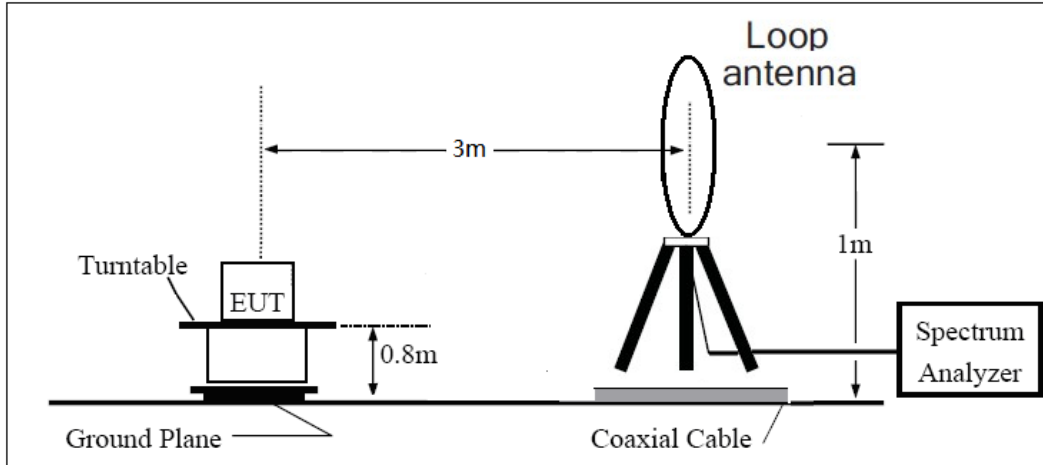

**30MHz ~ 1GHz**

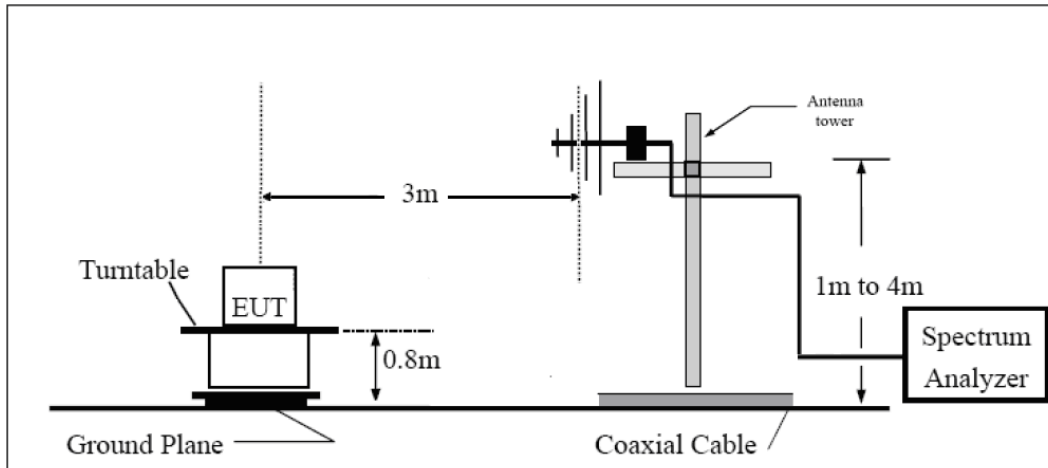

**Above 1GHz**

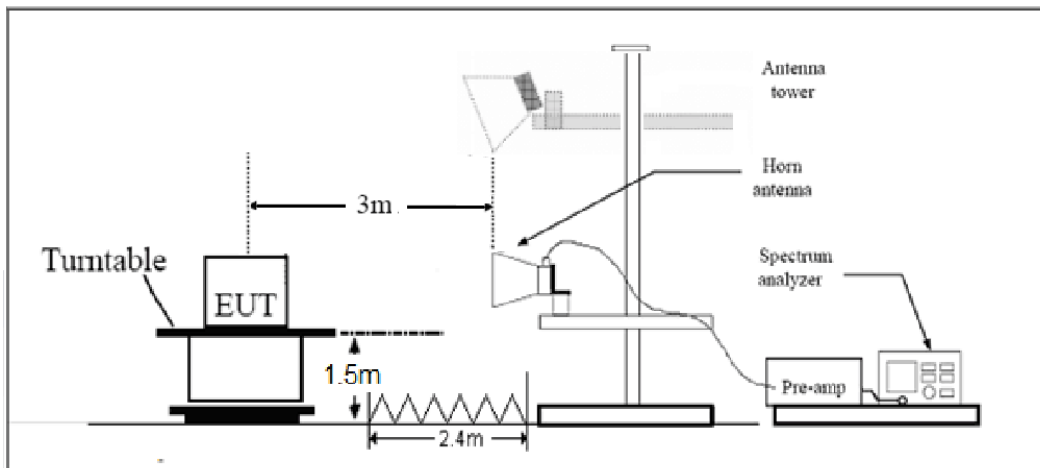



Note: Area side: 2.4mX3.6m

### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.”

Limit	-13 dBm
-------	---------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 2 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.1	-54.51	5.1	11.05	Horizontal	-48.56	-13.00	35.56	0
3	5550.8	-43.32	5.42	12.65	Horizontal	-36.09	-13.00	23.09	90
4	7409.3	-48.39	6.7	13.85	Horizontal	-41.24	-13.00	28.24	270
5	9253.1	-46.94	7.01	14.75	Horizontal	-39.20	-13.00	26.20	0
6	11106.0	-46.79	7.48	15.95	Horizontal	-38.32	-13.00	25.32	180
7	12911.6	-45.53	7.51	16.55	Horizontal	-36.49	-13.00	23.49	90
8	14826.4	-40.73	8.24	15.35	Horizontal	-33.62	-13.00	20.62	225
9	16659.0	-43.24	8.41	14.95	Horizontal	-36.70	-13.00	23.70	0
10	18507.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-55.38	5.10	11.05	Horizontal	-49.43	-13.00	36.43	180
3	5638.9	-44.79	5.42	12.65	Horizontal	-37.56	-13.00	24.56	225
4	7517.6	-44.52	6.70	13.85	Horizontal	-37.37	-13.00	24.37	90
5	9393.8	-47.03	7.01	14.75	Horizontal	-39.29	-13.00	26.29	135
6	11274.8	-45.99	7.48	15.95	Horizontal	-37.52	-13.00	24.52	0
7	13152.4	-46.69	7.51	16.55	Horizontal	-37.65	-13.00	24.65	0
8	15034.5	-44.70	8.24	15.35	Horizontal	-37.59	-13.00	24.59	270
9	16974.0	-43.32	8.41	14.95	Horizontal	-36.78	-13.00	23.78	0
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-53.30	5.10	11.05	Horizontal	-47.35	-13.00	34.35	315
3	5726.6	-39.73	5.42	12.65	Horizontal	-32.50	-13.00	19.50	315
4	7635.8	-37.55	6.70	13.85	Horizontal	-30.40	-13.00	17.40	45
5	9533.3	-48.16	7.01	14.75	Horizontal	-40.42	-13.00	27.42	135
6	11412.0	-43.68	7.48	15.95	Horizontal	-35.21	-13.00	22.21	90
7	13367.3	-45.04	7.51	16.55	Horizontal	-36.00	-13.00	23.00	315
8	15242.6	-43.07	8.24	15.35	Horizontal	-35.96	-13.00	22.96	180
9	17156.3	-42.31	8.41	14.95	Horizontal	-35.77	-13.00	22.77	90
10	19093.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 3MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.1	-52.56	5.10	11.05	Horizontal	-46.61	-13.00	33.61	0
3	5556.0	-51.27	5.42	12.65	Horizontal	-44.04	-13.00	31.04	315
4	7406.6	-48.89	6.70	13.85	Horizontal	-41.74	-13.00	28.74	270
5	9262.1	-46.40	7.01	14.75	Horizontal	-38.66	-13.00	25.66	225
6	11101.5	-46.49	7.48	15.95	Horizontal	-38.02	-13.00	25.02	225
7	12966.8	-46.01	7.51	16.55	Horizontal	-36.97	-13.00	23.97	45
8	14821.9	-41.43	8.24	15.35	Horizontal	-34.32	-13.00	21.32	45
9	16664.6	-43.22	8.41	14.95	Horizontal	-36.68	-13.00	23.68	90
10	18515.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 3MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-53.05	5.10	11.05	Horizontal	-47.10	-13.00	34.10	0
3	5636.3	-43.96	5.42	12.65	Horizontal	-36.73	-13.00	23.73	0
4	7515.0	-47.29	6.70	13.85	Horizontal	-40.14	-13.00	27.14	270
5	9405.0	-46.48	7.01	14.75	Horizontal	-38.74	-13.00	25.74	0
6	11238.8	-45.49	7.48	15.95	Horizontal	-37.02	-13.00	24.02	315
7	13161.4	-47.49	7.51	16.55	Horizontal	-38.45	-13.00	25.45	0
8	15041.3	-44.96	8.24	15.35	Horizontal	-37.85	-13.00	24.85	225
9	16942.5	-41.23	8.41	14.95	Horizontal	-34.69	-13.00	21.69	180
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 3MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3814.1	-52.43	5.10	11.05	Horizontal	-46.48	-13.00	33.48	90
3	5721.8	-40.46	5.42	12.65	Horizontal	-33.23	-13.00	20.23	315
4	7629.4	-41.67	6.70	13.85	Horizontal	-34.52	-13.00	21.52	45
5	9564.8	-47.98	7.01	14.75	Horizontal	-40.24	-13.00	27.24	90
6	11464.9	-45.24	7.48	15.95	Horizontal	-36.77	-13.00	23.77	315
7	13348.1	-45.53	7.51	16.55	Horizontal	-36.49	-13.00	23.49	225
8	15267.4	-44.72	8.24	15.35	Horizontal	-37.61	-13.00	24.61	45
9	17169.8	-42.74	8.41	14.95	Horizontal	-36.20	-13.00	23.20	270
10	19085.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3705.4	-55.13	5.10	11.05	Horizontal	-49.18	-13.00	36.18	0
3	5558.6	-50.91	5.42	12.65	Horizontal	-43.68	-13.00	30.68	315
4	7430.6	-47.64	6.70	13.85	Horizontal	-40.49	-13.00	27.49	270
5	9265.5	-46.74	7.01	14.75	Horizontal	-39.00	-13.00	26.00	180
6	11110.5	-47.12	7.48	15.95	Horizontal	-38.65	-13.00	25.65	180
7	12965.6	-46.98	7.51	16.55	Horizontal	-37.94	-13.00	24.94	45
8	14861.3	-40.94	8.24	15.35	Horizontal	-33.83	-13.00	20.83	225
9	16675.9	-43.17	8.41	14.95	Horizontal	-36.63	-13.00	23.63	180
10	18525.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3756.8	-55.06	5.10	11.05	Horizontal	-49.11	-13.00	36.11	0
3	5637.4	-52.71	5.42	12.65	Horizontal	-45.48	-13.00	32.48	315
4	7524.0	-48.88	6.70	13.85	Horizontal	-41.73	-13.00	28.73	270
5	9400.5	-48.01	7.01	14.75	Horizontal	-40.27	-13.00	27.27	90
6	11284.9	-46.44	7.48	15.95	Horizontal	-37.97	-13.00	24.97	45
7	13163.6	-47.73	7.51	16.55	Horizontal	-38.69	-13.00	25.69	225
8	15041.3	-45.20	8.24	15.35	Horizontal	-38.09	-13.00	25.09	45
9	16980.8	-40.58	8.41	14.95	Horizontal	-34.04	-13.00	21.04	270
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3812.6	-53.42	5.10	11.05	Horizontal	-47.47	-13.00	34.47	90
3	5724.4	-49.07	5.42	12.65	Horizontal	-41.84	-13.00	28.84	0
4	7625.3	-48.33	6.70	13.85	Horizontal	-41.18	-13.00	28.18	135
5	9540.0	-48.97	7.01	14.75	Horizontal	-41.23	-13.00	28.23	0
6	11448.0	-45.21	7.48	15.95	Horizontal	-36.74	-13.00	23.74	270
7	13339.1	-45.25	7.51	16.55	Horizontal	-36.21	-13.00	23.21	0
8	15247.1	-43.12	8.24	15.35	Horizontal	-36.01	-13.00	23.01	270
9	17166.4	-42.71	8.41	14.95	Horizontal	-36.17	-13.00	23.17	0
10	19075.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3701.6	-56.59	5.10	11.05	Horizontal	-50.64	-13.00	37.64	45
3	5558.6	-53.00	5.42	12.65	Horizontal	-45.77	-13.00	32.77	315
4	7419.4	-48.51	6.70	13.85	Horizontal	-41.36	-13.00	28.36	225
5	9273.4	-47.75	7.01	14.75	Horizontal	-40.01	-13.00	27.01	270
6	11137.5	-45.46	7.48	15.95	Horizontal	-36.99	-13.00	23.99	135
7	12965.6	-46.78	7.51	16.55	Horizontal	-37.74	-13.00	24.74	90
8	14835.4	-41.38	8.24	15.35	Horizontal	-34.27	-13.00	21.27	135
9	16691.6	-41.84	8.41	14.95	Horizontal	-35.30	-13.00	22.30	225
10	18550.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3756.4	-54.13	5.10	11.05	Horizontal	-48.18	-13.00	35.18	0
3	5632.5	-52.59	5.42	12.65	Horizontal	-45.36	-13.00	32.36	0
4	7534.5	-48.74	6.70	13.85	Horizontal	-41.59	-13.00	28.59	270
5	9402.8	-46.26	7.01	14.75	Horizontal	-38.52	-13.00	25.52	225
6	11281.5	-45.82	7.48	15.95	Horizontal	-37.35	-13.00	24.35	90
7	13118.6	-47.02	7.51	16.55	Horizontal	-37.98	-13.00	24.98	270
8	15041.3	-45.72	8.24	15.35	Horizontal	-38.61	-13.00	25.61	135
9	16923.4	-41.80	8.41	14.95	Horizontal	-35.26	-13.00	22.26	315
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.4	-53.77	5.10	11.05	Horizontal	-47.82	-13.00	34.82	90
3	5710.9	-50.48	5.42	12.65	Horizontal	-43.25	-13.00	30.25	315
4	7619.6	-50.82	6.70	13.85	Horizontal	-43.67	-13.00	30.67	45
5	9524.3	-49.22	7.01	14.75	Horizontal	-41.48	-13.00	28.48	135
6	11417.6	-43.91	7.48	15.95	Horizontal	-35.44	-13.00	22.44	270
7	13334.6	-45.12	7.51	16.55	Horizontal	-36.08	-13.00	23.08	225
8	15240.4	-43.79	8.24	15.35	Horizontal	-36.68	-13.00	23.68	180
9	17142.8	-43.13	8.41	14.95	Horizontal	-36.59	-13.00	23.59	270
10	19050.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 15MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3703.9	-55.54	5.10	11.05	Horizontal	-49.59	-13.00	36.59	180
3	5553.0	-54.34	5.42	12.65	Horizontal	-47.11	-13.00	34.11	315
4	7431.0	-48.73	6.70	13.85	Horizontal	-41.58	-13.00	28.58	225
5	9298.1	-46.08	7.01	14.75	Horizontal	-38.34	-13.00	25.34	45
6	11140.9	-46.65	7.48	15.95	Horizontal	-38.18	-13.00	25.18	135
7	13066.9	-46.43	7.51	16.55	Horizontal	-37.39	-13.00	24.39	135
8	14812.9	-42.60	8.24	15.35	Horizontal	-35.49	-13.00	22.49	90
9	16746.8	-42.08	8.41	14.95	Horizontal	-35.54	-13.00	22.54	0
10	18575.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3772.9	-56.45	5.10	11.05	Horizontal	-50.50	-13.00	37.50	135
3	5677.5	-52.27	5.42	12.65	Horizontal	-45.04	-13.00	32.04	45
4	7522.9	-48.16	6.70	13.85	Horizontal	-41.01	-13.00	28.01	0
5	9402.8	-46.90	7.01	14.75	Horizontal	-39.16	-13.00	26.16	180
6	11248.9	-45.71	7.48	15.95	Horizontal	-37.24	-13.00	24.24	0
7	13161.4	-47.33	7.51	16.55	Horizontal	-38.29	-13.00	25.29	45
8	15036.8	-45.31	8.24	15.35	Horizontal	-38.20	-13.00	25.20	135
9	16936.9	-41.93	8.41	14.95	Horizontal	-35.39	-13.00	22.39	180
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 15MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3780.4	-55.18	5.10	11.05	Horizontal	-49.23	-13.00	36.23	135
3	5697.8	-53.32	5.42	12.65	Horizontal	-46.09	-13.00	33.09	225
4	7623.4	-48.84	6.70	13.85	Horizontal	-41.69	-13.00	28.69	225
5	9514.1	-48.91	7.01	14.75	Horizontal	-41.17	-13.00	28.17	90
6	11451.4	-44.48	7.48	15.95	Horizontal	-36.01	-13.00	23.01	45
7	13348.1	-45.58	7.51	16.55	Horizontal	-36.54	-13.00	23.54	135
8	15220.1	-43.49	8.24	15.35	Horizontal	-36.38	-13.00	23.38	135
9	17157.4	-42.54	8.41	14.95	Horizontal	-36.00	-13.00	23.00	135
10	19025.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 20MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3706.1	-55.31	5.10	11.05	Horizontal	-49.36	-13.00	36.36	0
3	5580.4	-40.21	5.42	12.65	Horizontal	-32.98	-13.00	19.98	315
4	7440.0	-46.69	6.70	13.85	Horizontal	-39.54	-13.00	26.54	270
5	9306.0	-45.79	7.01	14.75	Horizontal	-38.05	-13.00	25.05	135
6	11587.5	-46.14	7.48	15.95	Horizontal	-37.67	-13.00	24.67	315
7	13018.5	-46.25	7.51	16.55	Horizontal	-37.21	-13.00	24.21	180
8	14880.4	-41.85	8.24	15.35	Horizontal	-34.74	-13.00	21.74	270
9	16755.8	-42.01	8.41	14.95	Horizontal	-35.47	-13.00	22.47	90
10	18600.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2. The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3747.8	-54.50	5.10	11.05	Horizontal	-48.55	-13.00	35.55	0
3	5640.8	-45.66	5.42	12.65	Horizontal	-38.43	-13.00	25.43	0
4	7483.1	-48.58	6.70	13.85	Horizontal	-41.43	-13.00	28.43	270
5	9402.8	-48.52	7.01	14.75	Horizontal	-40.78	-13.00	27.78	270
6	11281.5	-45.18	7.48	15.95	Horizontal	-36.71	-13.00	23.71	45
7	13163.6	-47.52	7.51	16.55	Horizontal	-38.48	-13.00	25.48	315
8	15043.5	-44.97	8.24	15.35	Horizontal	-37.86	-13.00	24.86	45
9	16992.0	-42.78	8.41	14.95	Horizontal	-36.24	-13.00	23.24	90
10	18800.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3799.9	-52.39	5.10	11.05	Horizontal	-46.44	-13.00	33.44	90
3	5700.0	-40.43	5.42	12.65	Horizontal	-33.20	-13.00	20.20	0
4	7600.1	-44.29	6.70	13.85	Horizontal	-37.14	-13.00	24.14	180
5	9499.5	-49.20	7.01	14.75	Horizontal	-41.46	-13.00	28.46	270
6	11397.4	-44.85	7.48	15.95	Horizontal	-36.38	-13.00	23.38	45
7	13304.3	-45.28	7.51	16.55	Horizontal	-36.24	-13.00	23.24	270
8	15202.1	-42.82	8.24	15.35	Horizontal	-35.71	-13.00	22.71	135
9	17110.1	-42.46	8.41	14.95	Horizontal	-35.92	-13.00	22.92	90
10	19000.0	-	-	-	-	-	-	-	-

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2. The worst emission was found in the antenna is Horizontal position.



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMU200	118133	2020-05-17	2021-05-16
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2020-05-27	2021-05-26
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preampflier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*