



# RF TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-MF985U  
**Product** LTE UFI  
**Model** MF985U  
**Report No.** RXA1712-0441RF04  
**Issue Date** January 29, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Performed by: Xianqing Li*

*Approved by: Kai Xu*

---

## TA Technology (Shanghai) Co., Ltd.

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards .....	8
4. Test Configuration .....	9
5. Test Case Results .....	11
5.1. Average Power Output –Conducted.....	11
5.2. 6dB Bandwidth .....	14
5.3. Band Edge .....	18
5.4. Power Spectral Density .....	21
5.5. Spurious RF Conducted Emissions.....	28
5.6. Radiated Emissions in the Restricted Band .....	32
5.7. Radiates Emission .....	37
5.8. Conducted Emission .....	65
6. Main Test Instruments.....	67



## Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: December 26, 2017 ~ January 18, 2018			

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### General information

EUT Description	
Model	MF985U
IMEI	99000897000101
Hardware Version	MF985UHW1.0
Software Version	USCC_US_MF985UV1.0.0B02
Power Supply	Battery/AC adapter
Antenna Type	Internal Antenna
Antenna Gain	Antenna 1: 2.7 dBi Antenna 2: 2.5 dBi
additional beamforming gain	0 dB
Test Mode	802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type	802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :14.85dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz
EUT Accessory	
Adapter 1	Manufacturer: SHENZHEN RUIJING INDUSTRIAL CO LTD Model: STC-A515A-Z
Adapter 2	Manufacturer: Jiangsu Chenyang Electron Co., Ltd. Model: STC-A515A-Z
Adapter 3	Manufacturer: Shenzhen Dokocom Energy Technology Co., Ltd. Model: STC-A515A-Z
Battery	Manufacturer: ARBIN COSLIGHT POWER CO LTD Model: Li3930T44P4h794659
USB Cable 1	Manufacturer: LUXSHARE-ICT 100cm Cable, Shielded
USB Cable 2	Manufacturer: kingpower-tech 100cm Cable, Shielded
Note: The information of the EUT is declared by the manufacturer.	



2. There is more than one USB cable/one Adapter, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 1/ Adapter 1) will be recorded in this report.



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**
- **KDB 662911 D01 Multiple Transmitter Output v02r01**



## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

### The test software is used QRCT 3

Worst-case data rates are shown as following table.

Band	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11b	1 Mbps	1 Mbps	/
802.11g	6 Mbps	6 Mbps	/
802.11n HT20	MCS0	MCS0	MCS8
802.11n HT40	MCS0	MCS0	MCS8



The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	Antenna 2	MIMO
Average Power Output –Conducted	802.11b/g	802.11b/g	802.11n HT20 802.11n HT40
6dB Bandwidth	802.11b/g	--	802.11n HT20 802.11n HT40
Band Edge	802.11b/g	--	802.11n HT20 802.11n HT40
Power Spectral Density	802.11b/g	802.11b/g	802.11n HT20 802.11n HT40
Spurious RF Conducted Emissions	802.11b/g	--	802.11n HT20 802.11n HT40
Radiates Emission in the Restricted Band	802.11b/g	--	802.11n HT20 802.11n HT40
Radiates Emission	802.11b/g	--	802.11n HT20 802.11n HT40
Conducted Emission	802.11b/g	--	--
Note: "O": test all bands			

## 5. Test Case Results

### 5.1. Average Power Output –Conducted

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method AVGSA-2 in KDB 558074 D01 /KDB662911 D01 for this test

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	≤ 1W (30dBm)
----------------------	--------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**

Single Antenna Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11b	14	14	15	13	14	15
802.11g	12	13	13	12	12	12

MIMO Power Index						
Packet Type	Antenna 1			Antenna 2		
	CH1	CH6	CH11	CH1	CH6	CH11
802.11b	10	11	11	10	11	11
Packet Type	CH3	CH6	CH9	CH3	CH6	CH9
802.11g	10	11	11	10	11	11

Band	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.45	12.54	0.99	NA
802.11g	2.06	2.17	0.95	0.21
802.11n HT20	1.93	2.02	0.95	0.21
802.11n HT40	0.94	1.05	0.90	0.45

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

**SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Read Value (dBm)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	14.85	14.85	30	PASS
	2437	14.25	14.25	30	PASS
	2462	14.72	14.72	30	PASS
802.11g	2412	12.65	12.86	30	PASS
	2437	12.62	12.83	30	PASS
	2462	12.41	12.62	30	PASS

Note: Output Power= Read Value +Duty cycle correction factor

**SISO Antenna 2**

Network Standards	Carrier frequency (MHz)	Read Value (dBm)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	14.00	14.00	30	PASS
	2437	14.35	14.35	30	PASS
	2462	14.81	14.81	30	PASS
802.11g	2412	12.41	12.62	30	PASS
	2437	11.80	12.01	30	PASS
	2462	11.29	11.50	30	PASS

Note: Output Power= Read Value +Duty cycle correction factor

**MIMO**

Network Standards	Carrier frequency (MHz)	Antenna 1		Antenna 2		Total Power (dBm)	Limit (dBm)	Conclusion
		Read Value (dBm)	Average Output Power (dBm)	Read Value (dBm)	Average Output Power (dBm)			
802.11n HT20	2412	11.39	11.60	10.50	10.71	14.19	30	PASS
	2437	11.57	11.78	9.83	10.04	14.01	30	PASS
	2462	11.62	11.83	10.21	10.42	14.19	30	PASS
802.11n HT40	2422	10.62	11.07	10.64	11.09	14.09	30	PASS
	2437	10.59	11.04	10.93	11.38	14.23	30	PASS
	2452	11.04	11.49	10.49	10.94	14.24	30	PASS

Note: 1. Output Power=Read Value+Duty cycle correction factor  
 2. For Total Power, according to KDB 662911 D01 Multiple Transmitter Output v02r01 1),  
 The Total Power = $10\log(10^{(\text{Power antenna1 in dBm}/10)} + 10^{(\text{Power antenna2 in dBm}/10)})$ .  
 3. Direction gain calculation according to KDB662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii),so direction gain= $\max(\text{Gant1}, \text{Gant2})=2.7\text{dBi} < 6\text{dBi}$ . So the power limit is 30dBm

## 5.2. 6dB Bandwidth


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:****SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.643	8.052	500	PASS
	2437	13.106	8.089	500	PASS
	2462	12.945	7.109	500	PASS
802.11g	2412	16.274	15.470	500	PASS
	2437	16.371	16.340	500	PASS
	2462	16.311	15.710	500	PASS

**MIMO**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11n HT20	2412	17.433	15.980	500	PASS
	2437	17.573	16.830	500	PASS
	2462	17.487	15.980	500	PASS
802.11n HT40	2422	35.825	35.140	500	PASS
	2437	36.178	35.940	500	PASS
	2452	35.759	35.110	500	PASS



SISO Antenna 1

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462

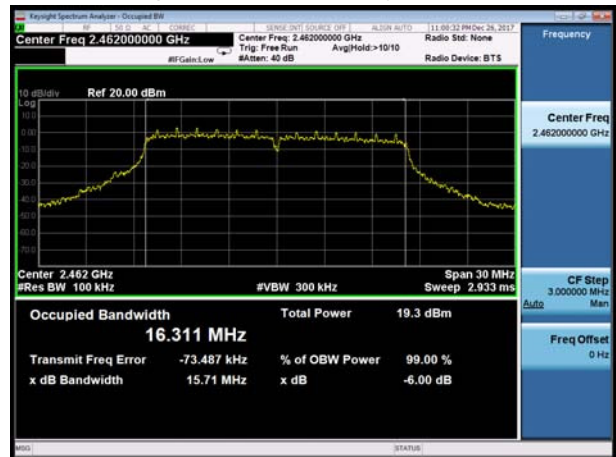






MIMO

802.11n(HT20), Carrier frequency (MHz): 2412

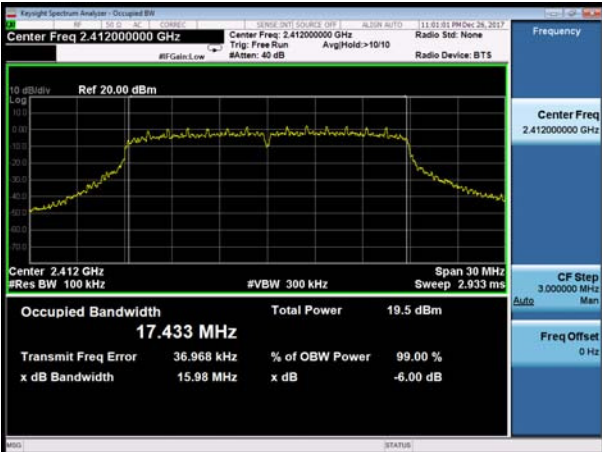

802.11n(HT40), Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2437



802.11n(HT40), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz):2462



802.11n(HT40), Carrier frequency (MHz):2452



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS

SISO Antenna 1


802.11b, Channel No.: 1

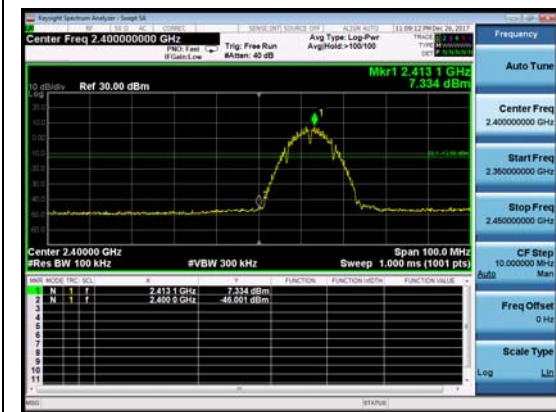


802.11b, Channel No.: 11

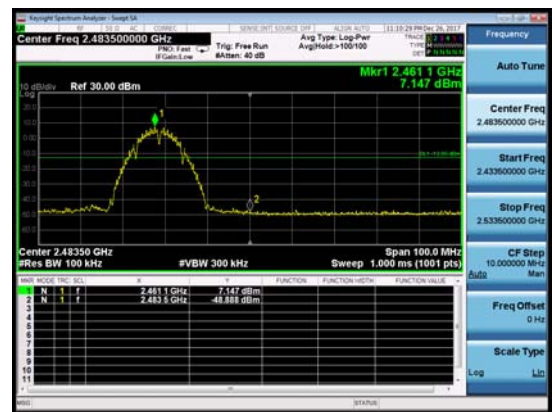

802.11g, Channel No.: 1

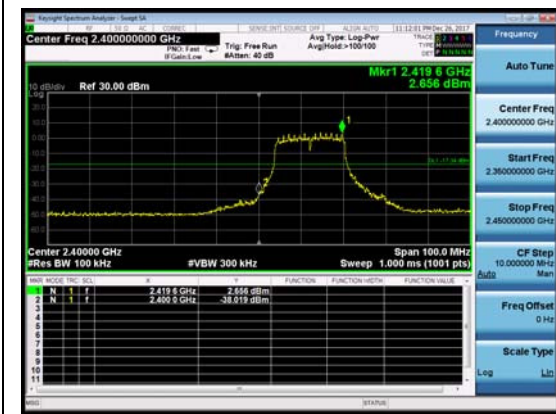


802.11g, Channel No.: 11

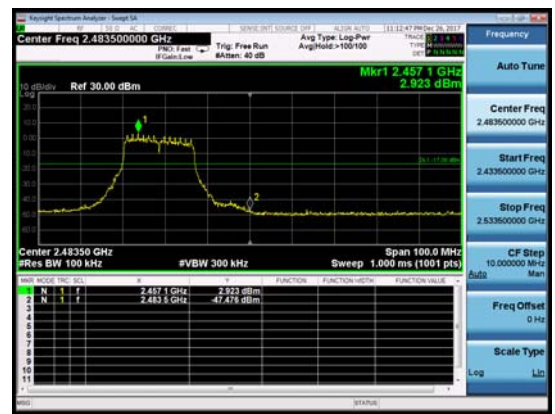




MIMO


802.11n(HT20), Channel No.: 1

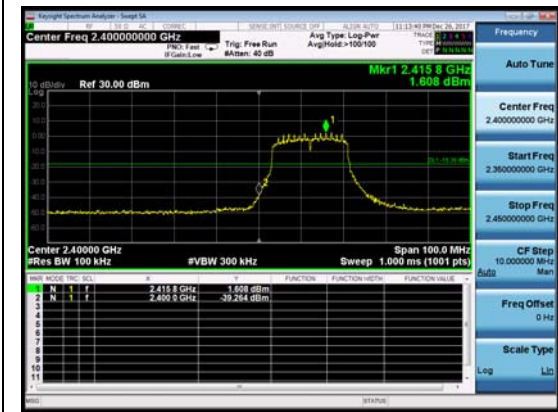

802.11n(HT20), Channel No.: 11

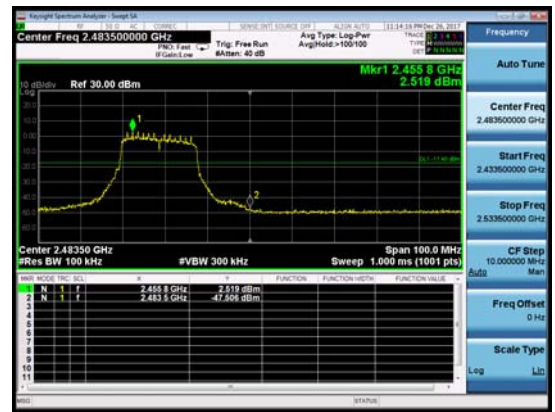

802.11n(HT40), Channel No.: 3

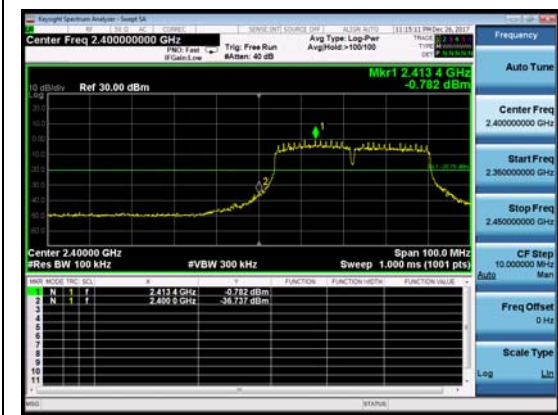

802.11n(HT40), Channel No.: 9



### 5.4. Power Spectral Density

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Method AVGPSD-2 in KDB 558074 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test setup



#### Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:****SISO Antenna 1**

Network Standards	Channel Number	Read Value (dBm)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.46	-16.46	8	PASS
	6	-17.59	-17.59	8	PASS
	11	-16.93	-16.93	8	PASS
802.11g	1	-21.02	-20.81	8	PASS
	6	-21.45	-21.24	8	PASS
	11	-21.62	-21.40	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**SISO Antenna 2**

Network Standards	Channel Number	Read Value (dBm)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-18.38	-18.38	8	PASS
	6	-16.34	-16.34	8	PASS
	11	-17.05	-17.05	8	PASS
802.11g	1	-22.16	-21.95	8	PASS
	6	-22.62	-22.40	8	PASS
	11	-23.28	-23.07	8	PASS

Note: Power Spectral Density =Read Value+Duty cycle correction factor

**MIMO**

Network Standards	Channel Number	Antenna 1		Antenna 2		Total PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
		Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)	Read Value (dBm / 3kHz)	Power Spectral Density (dBm / 3kHz)			
802.11n HT20	1	-22.25	-22.04	-23.90	-23.69	-19.77	8	PASS
	6	-22.48	-22.26	-24.71	-24.50	-20.23	8	PASS
	11	-21.68	-21.46	-24.51	-24.30	-19.64	8	PASS
802.11n HT40	1	-25.66	-25.20	-27.19	-26.74	-22.89	8	PASS
	6	-26.26	-25.81	-26.49	-26.04	-22.91	8	PASS
	11	-24.13	-23.68	-26.91	-26.45	-21.84	8	PASS

Note: 1. For Total PSD, according to KDB 662911 D01 Multiple Transmitter Output v02r01 2)a),the power spectral density= $10\log(10^{(PSD_{antenna1} \text{ in dBm}/10)} + 10^{(PSD_{antenna2} \text{ in dBm}/10)})$

2. Direction gain calculation according to KDB662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii),so direction gain= $\max(G_{ant1}, G_{ant2})=2.7\text{dBi}<6\text{dBi}$ . So the power limit is 30dBm. So the power limit is 8dBm






SISO Antenna 1

802.11b, Channel No.: 1




802.11g, Channel No.: 1

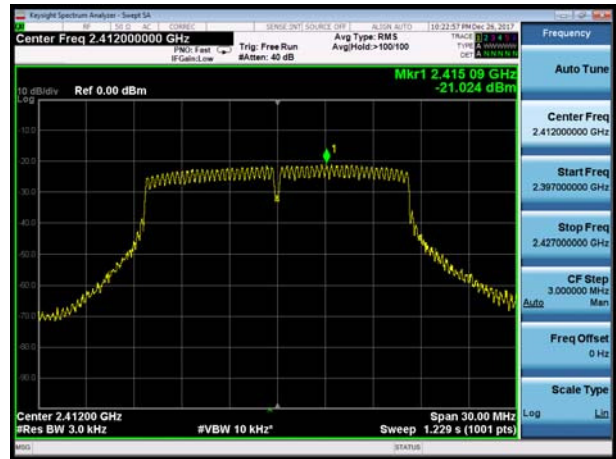

802.11b, Channel No.: 6




802.11g, Channel No.: 6

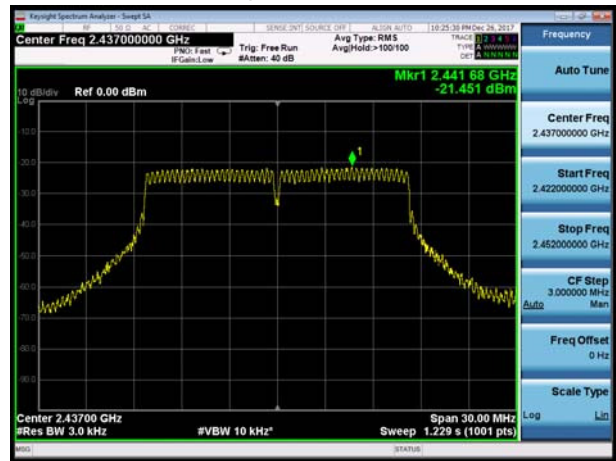

802.11b, Channel No.: 11



802.11g, Channel No.: 11

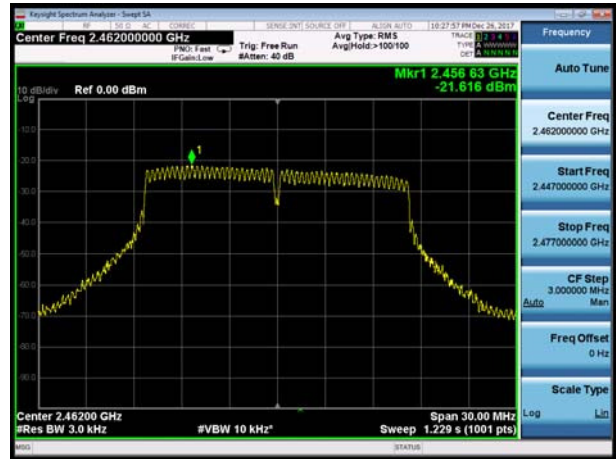






SISO Antenna 2

802.11b, Channel No.: 1




802.11g, Channel No.: 1

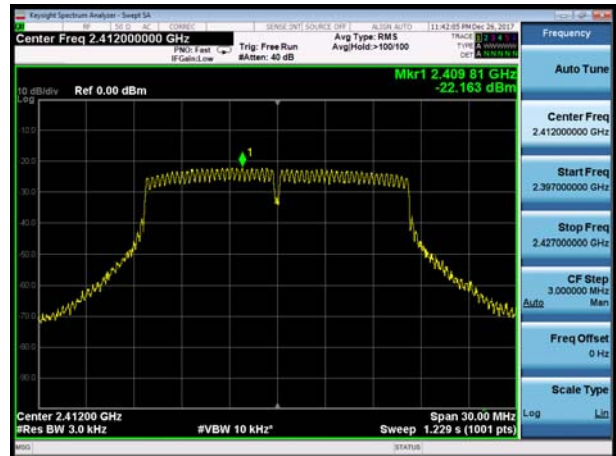

802.11b, Channel No.: 6



802.11g, Channel No.: 6

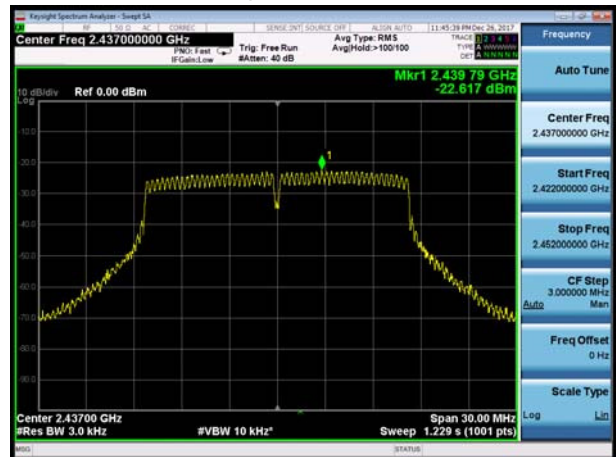

802.11b, Channel No.: 11




802.11g, Channel No.: 11





MIMO Antenna 1


802.11n(HT20), Channel No. 1

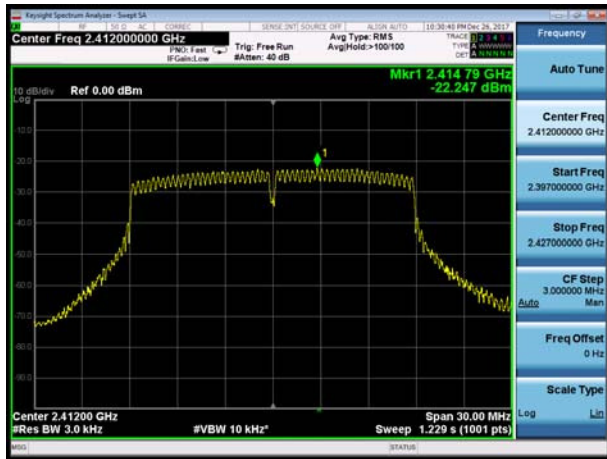

802.11n(HT40), Channel No. 3



802.11n(HT20), Channel No. 6

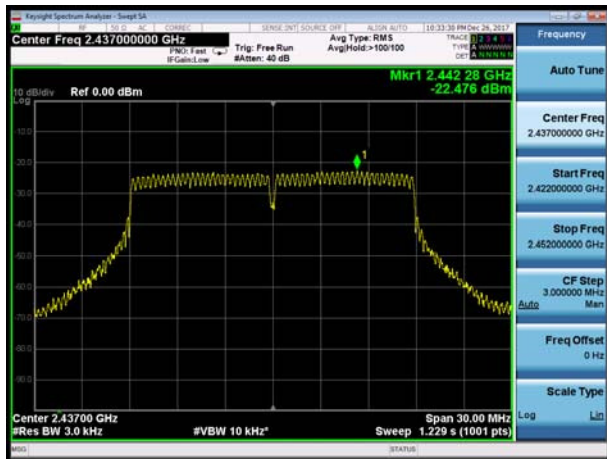

802.11n(HT40), Channel No. 6



802.11n(HT20), Channel No. 11




802.11n(HT40), Channel No. 9





### MIMO Antenna 2

802.11n(HT20), Channel No. 1

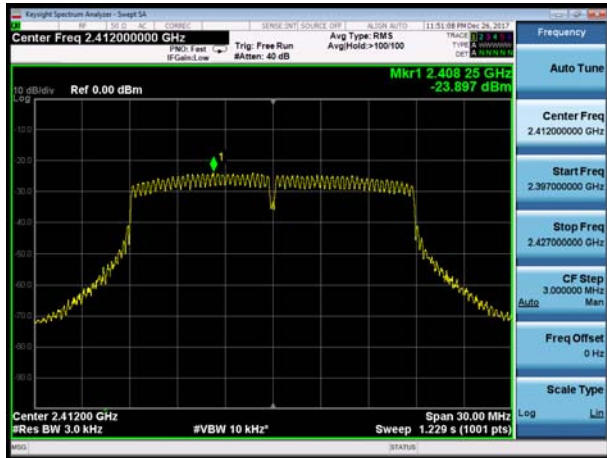

802.11n(HT40), Channel No. 3



802.11n(HT20), Channel No. 6



802.11n(HT40), Channel No. 6



802.11n(HT20), Channel No. 11



802.11n(HT40), Channel No. 9



### 5.5. Spurious RF Conducted Emissions

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

**Method of Measurement**

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

**Test setup**



**Limits**

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

**SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	6.56	-13.44
	2437	5.67	-14.34
	2462	6.42	-13.58
802.11g	2412	1.44	-18.56
	2437	1.15	-18.85
	2462	1.47	-18.53
802.11n HT20	2412	-0.85	-20.85
	2437	-0.73	-20.73
	2462	-1.73	-21.73
802.11n HT40	2422	-3.09	-23.09
	2437	-3.88	-23.88
	2452	-4.00	-24.00

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is



with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB





Test Results:


SISO Antenna 1

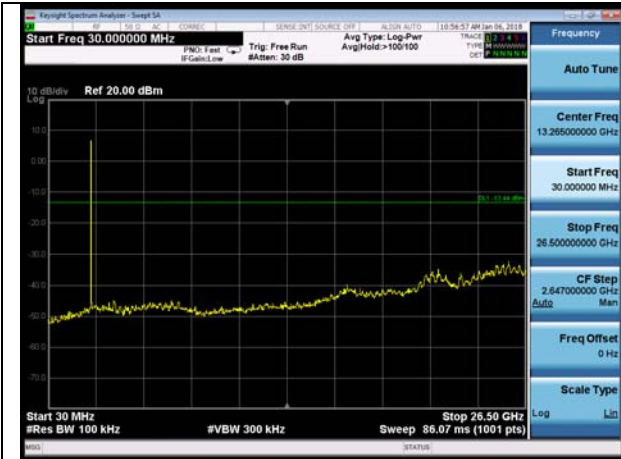

802.11b CH1 30MHz to 26.5GHz




802.11g CH1 30MHz to 26.5GHz

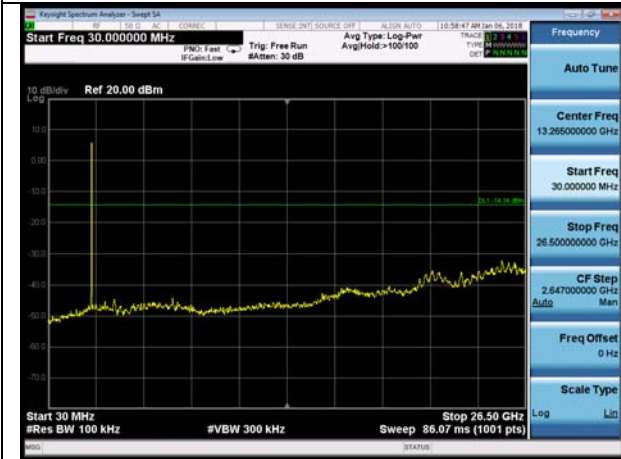

802.11b CH6 30MHz to 26.5GHz




802.11g CH6 30MHz to 26.5GHz

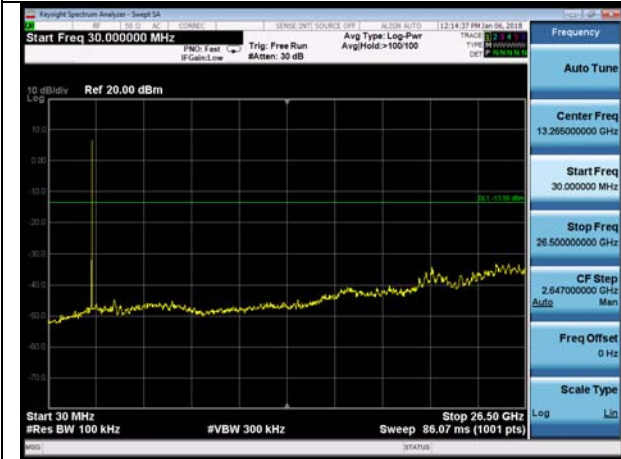

802.11b CH11 30MHz to 26.5GHz



802.11g CH11 30MHz to 26.5GHz

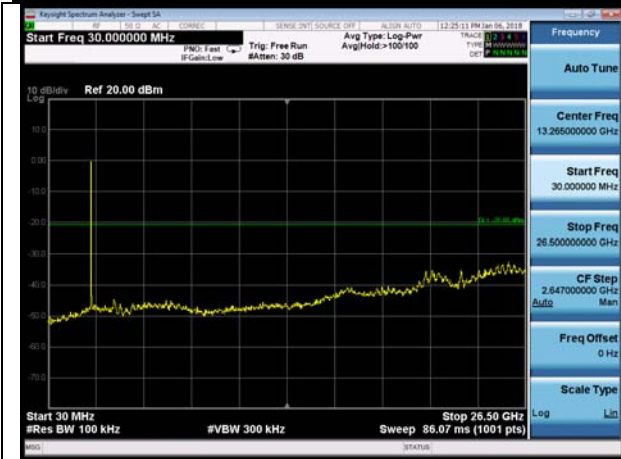

802.11n (HT20) CH1 30MHz to 26.5GHz




802.11n (HT40) CH3 30MHz to 26.5GHz



802.11n (HT20) CH6 30MHz to 26.5GHz



802.11n (HT40) CH6 30MHz to 26.5GHz

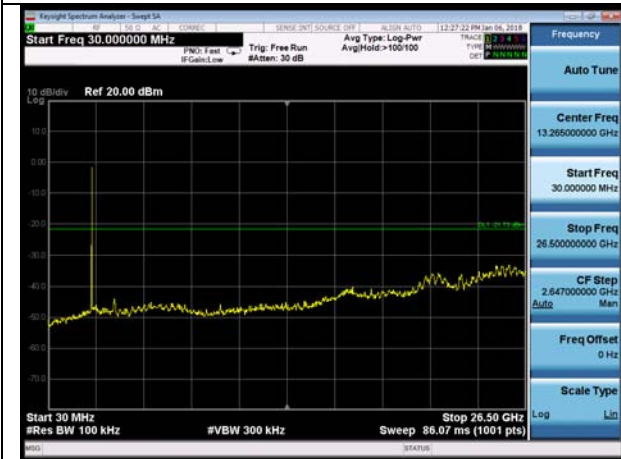

802.11n (HT20) CH11 30MHz to 26.5GHz



802.11n (HT40) CH9 30MHz to 26.5GHz

## 5.6. Radiated Emissions in the Restricted Band

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

This method refer to KDB 558074.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW  $\geq$  [3  $\times$  RBW]
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW  $\geq$  [3  $\times$  RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)]  $\leq$  RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)




g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis), antenna are vertical, horizontal. The worst emission was found in lie-down position (X axis) and the antenna is vertical.

The test is in transmitting mode.

**Test setup**

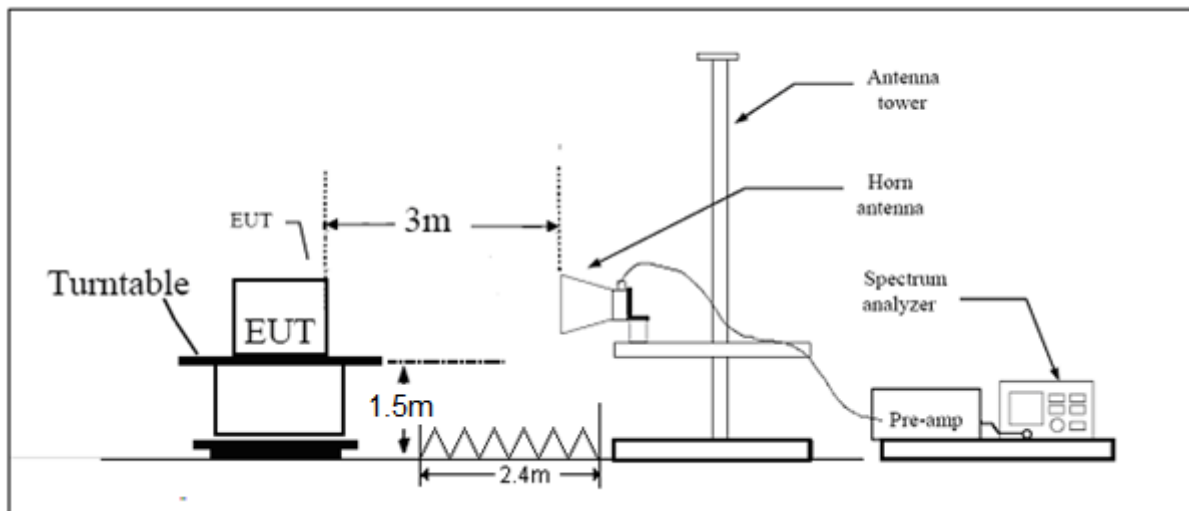

Note: Area side: 2.4mX3.6m

**Limits**

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:



MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

#### §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Results:****PASS**

The signal beyond the limit is carrier.

Band	T <sub>on</sub> (ms)	T <sub>(on+off)</sub> (ms)	Duty cycle	Duty cycle correction Factor(dB)
802.11b	12.45	12.54	0.99	NA
802.11g	2.06	2.17	0.95	0.21
802.11n HT20	1.93	2.02	0.95	0.21
802.11n HT40	0.94	1.05	0.90	0.45

Note: when Duty cycle>0.98, Duty cycle correction Factor not required.

**SISO Antenna 1****802.11b-Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	55.854	--	200.0	V	135	0	55.854	18.146	74
2390	--	43.565	200.0	V	135	0	43.565	10.435	54

**802.11b-Channel 11**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	56.557	--	200.0	V	135	0	56.557	17.443	74
2483.5	--	45.126	200.0	V	135	0	45.126	8.874	54

**802.11g-Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	62.246	--	150	V	65	0.21	62.456	11.544	74
2390	--	45.426	150	V	65	0.21	45.636	8.364	54

**802.11g-Channel 11**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	72.928	--	150	V	78	0.21	73.138	0.862	74
2483.5	--	50.637	150	V	78	0.21	50.847	3.153	54

**MIMO****802.11n HT20 -Channel 1**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	59.972	--	200	V	90	0.21	60.182	13.818	74
2390	--	48.518	200	V	90	0.21	48.728	5.272	54

**802.11n HT20-Channel 11**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	61.554	--	200	V	90	0.21	61.764	12.236	74
2483.5	--	48.682	200	V	90	0.21	48.892	5.108	54

**802.11n HT40 -Channel 3**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2390	68.914	--	150	V	46	0.45	69.364	4.636	74
2390	--	45.498	150	V	46	0.45	45.948	8.052	54

**802.11n HT40-Channel 9**

Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Duty cycle correction Factor(dB)	conclusion value (dBuV/m)	Margin (dB)	Limit (dBuV/m)
2483.5	61.892	--	150	V	46	0.45	62.342	11.658	74
2483.5	--	49.484	150	V	46	0.45	49.934	4.066	54

## 5.7. Radiates Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


The test is in transmitting mode.

**Test setup**


**9KHz ~ 30MHz**

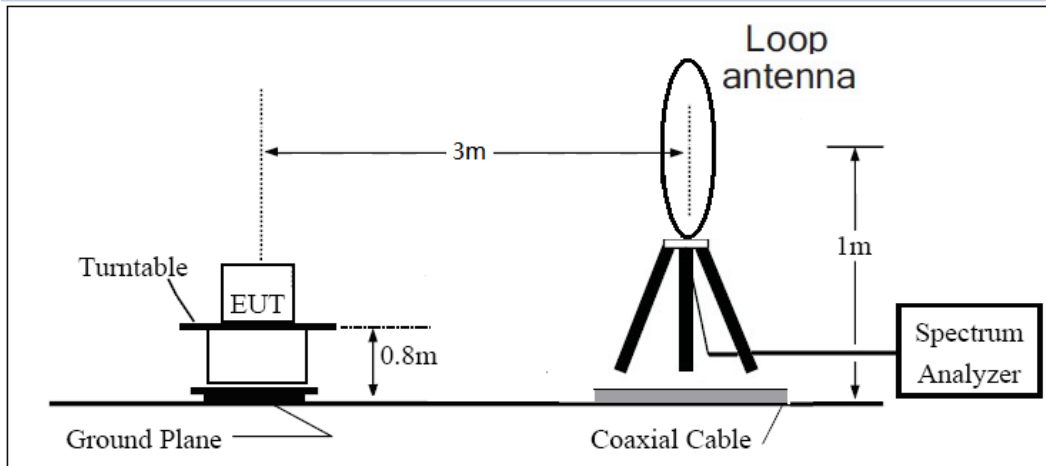

**30MHz ~ 1GHz**

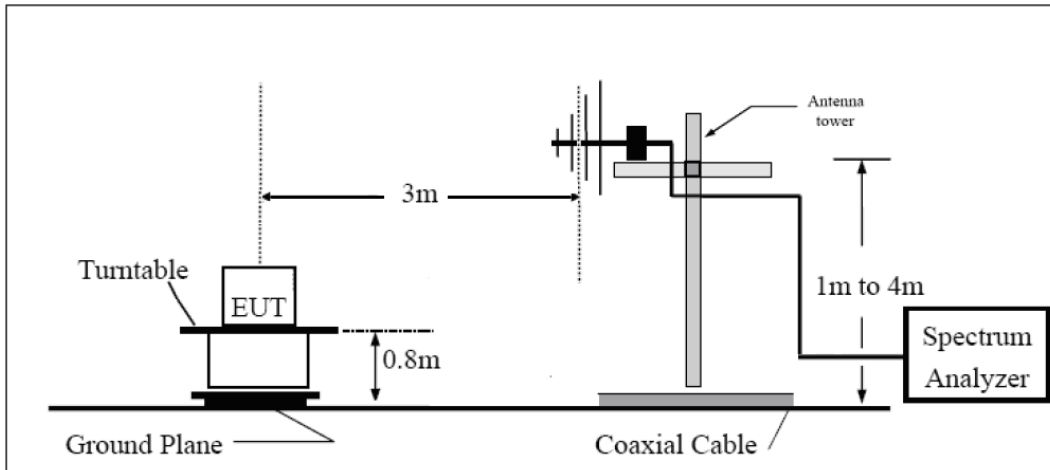

**Above 1GHz**

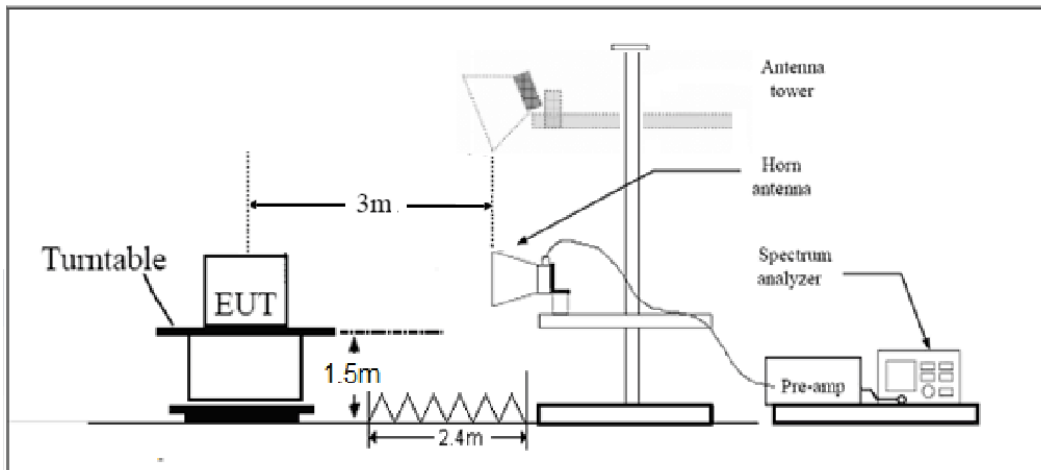

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

**Test result**

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

**After the pre test, Antenna 1 was selected as the worst antenna.**

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

**Continuous TX mode:**

RE 30M-1GHz QP

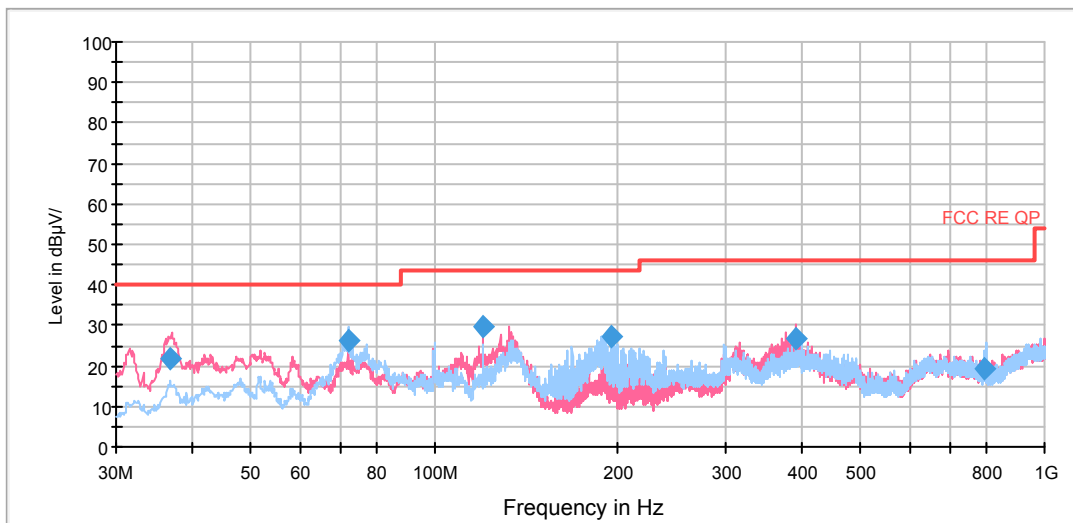

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Reading value (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
36.939919	21.9	40.5	100.0	V	171.0	-18.6	18.1	40.0
72.012619	26.5	53.4	225.0	H	336.0	-26.9	13.5	40.0
119.987581	29.8	56.9	100.0	V	22.0	-27.1	13.7	43.5
194.368016	27.1	52.1	175.0	H	76.0	-25.0	16.4	43.5
391.385000	26.7	46.8	125.0	V	38.0	-20.1	19.3	46.0
799.777500	19.4	36.0	200.0	H	119.0	-16.6	26.6	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
- 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
- 3. Margin = Limit – Quasi-Peak




802.11b CH1

RE 1G-3GHz PK+AV

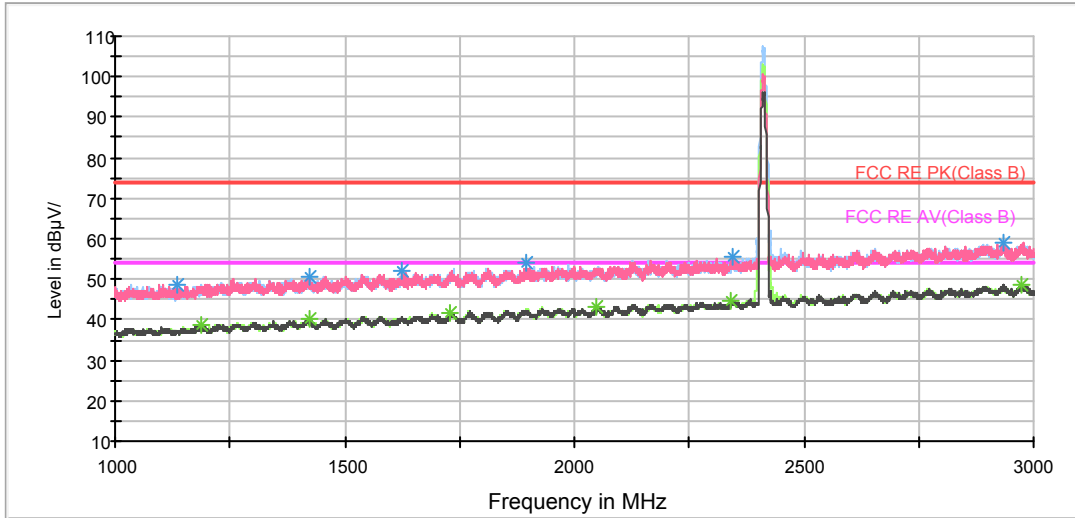


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

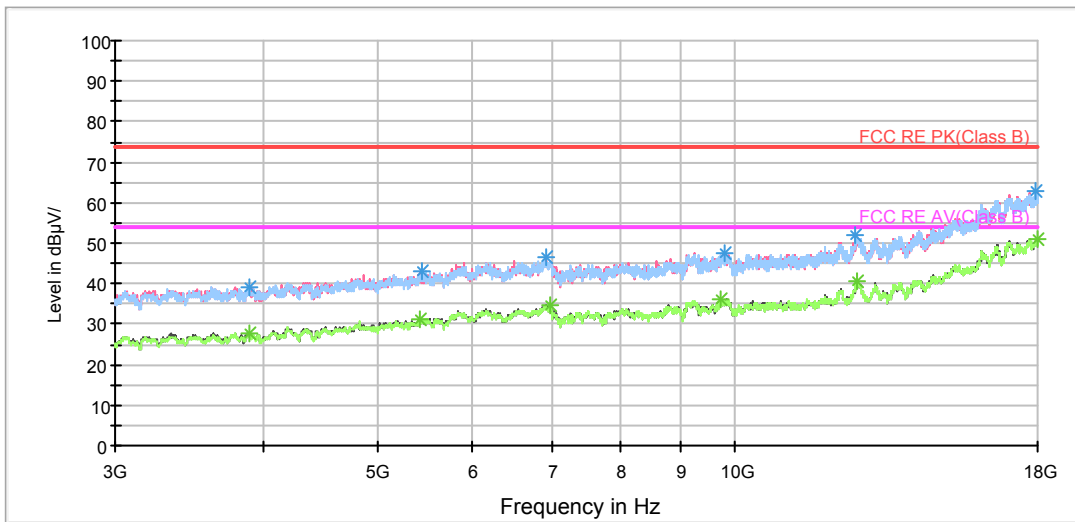

Radiates Emission from 3GHz to 18GHz

RE 3-18GHz PK+AV

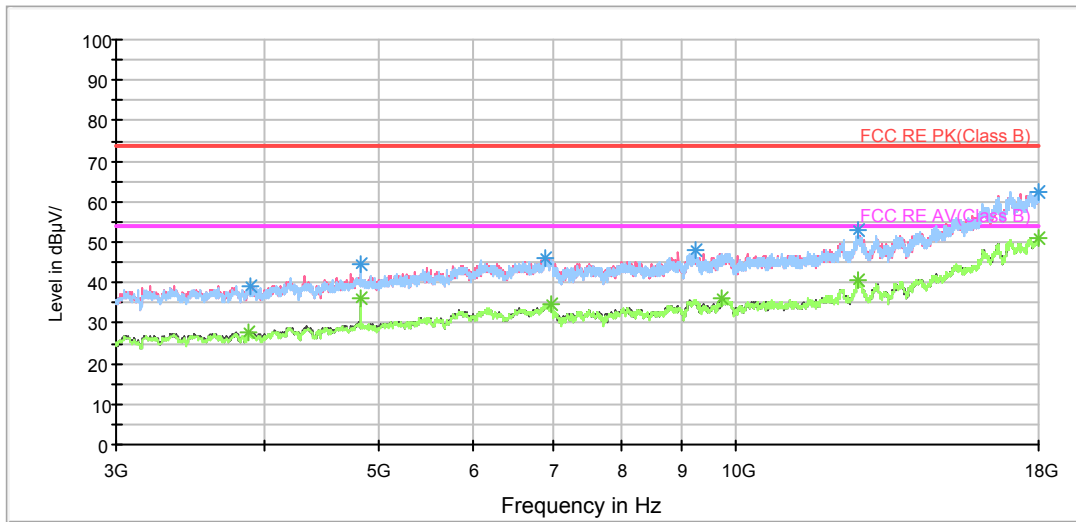

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1134.250000	48.8	100.0	H	240.0	47.2	1.6	25.2	74
1421.750000	50.6	100.0	V	42.0	47.5	3.1	23.4	74
1624.000000	51.9	100.0	V	112.0	46.7	5.2	22.1	74
1894.250000	54.0	100.0	H	257.0	48.0	6.0	20.0	74
2346.500000	55.5	100.0	V	0.0	46.8	8.7	18.5	74
2936.000000	59.0	100.0	V	95.0	47.2	11.8	15.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.750000	38.5	100.0	V	68.0	36.6	1.9	15.5	54
1424.250000	40.1	100.0	H	310.0	37.0	3.1	13.9	54
1730.750000	41.8	100.0	V	25.0	36.7	5.1	12.2	54
2049.750000	43.2	100.0	V	255.0	36.4	6.8	10.8	54
2342.250000	44.6	100.0	H	319.0	35.9	8.7	9.4	54
2973.000000	48.7	100.0	V	95.0	36.5	12.2	5.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH6

RE 1G-3GHz PK+AV

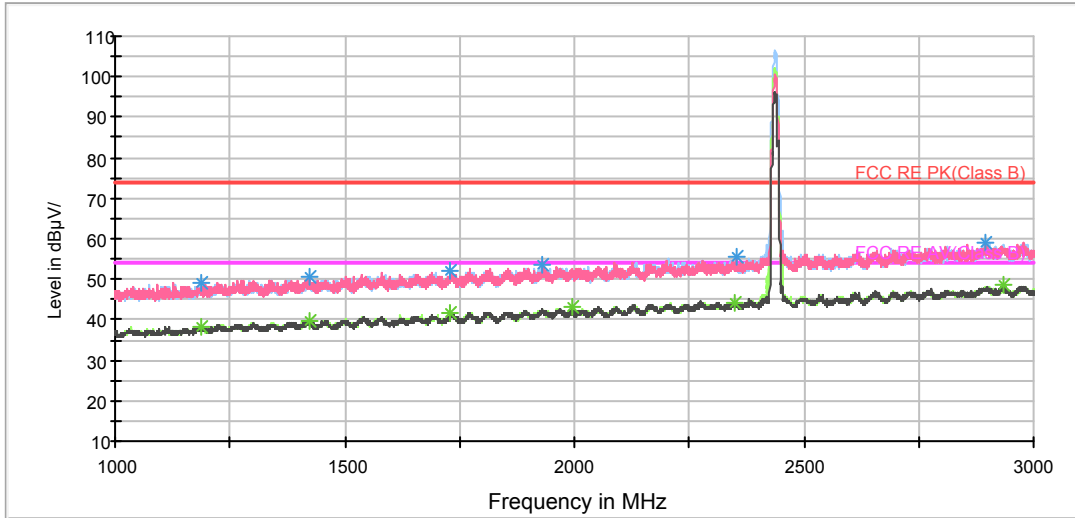


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

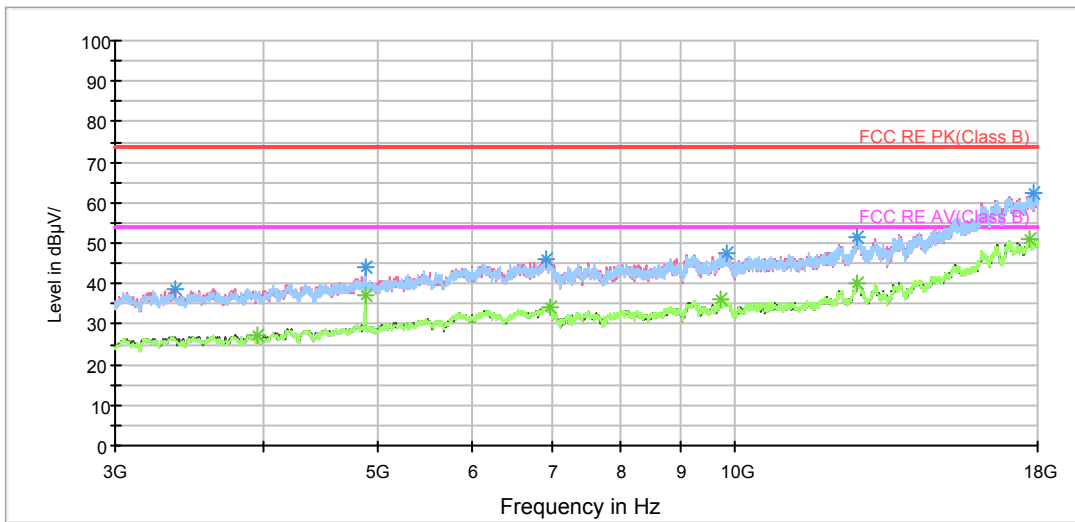

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

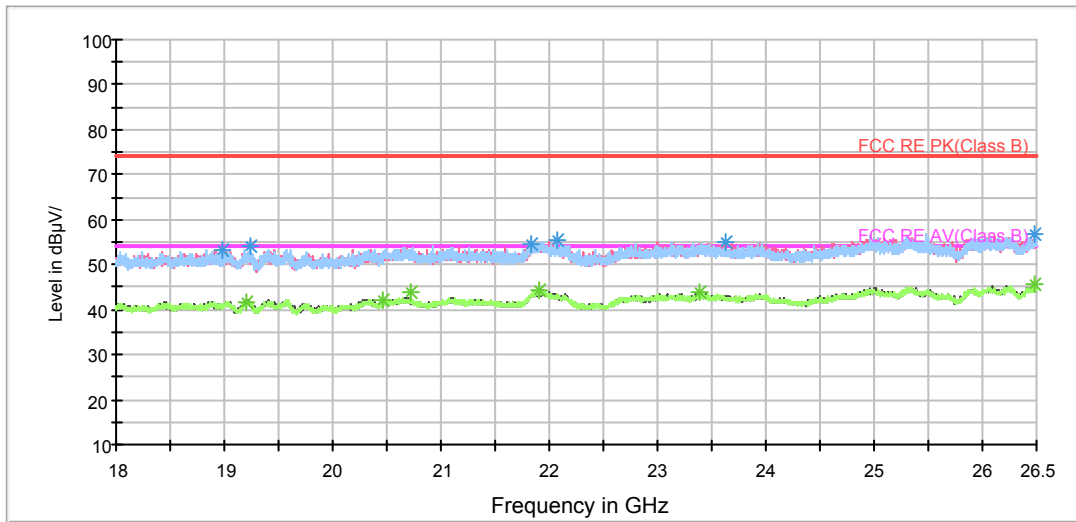

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.000000	49.1	100.0	H	0.0	47.2	1.9	24.9	74
1424.500000	50.5	100.0	V	287.0	47.4	3.1	23.5	74
1730.000000	52.0	100.0	H	261.0	47.0	5.0	22.0	74
1929.750000	53.4	100.0	V	0.0	47.1	6.3	20.6	74
2355.000000	55.6	100.0	V	26.0	47.0	8.6	18.4	74
2894.250000	59.0	100.0	V	88.0	46.9	12.1	15.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.250000	38.3	100.0	V	150.0	36.4	1.9	15.7	54
1422.750000	39.8	100.0	V	52.0	36.7	3.1	14.2	54
1731.000000	41.7	100.0	V	140.0	36.6	5.1	12.3	54
1993.750000	43.1	100.0	V	0.0	36.4	6.7	10.9	54
2348.000000	44.3	100.0	V	105.0	35.6	8.7	9.7	54
2935.500000	48.8	100.0	V	35.0	37.0	11.8	5.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH11

RE 1G-3GHz PK+AV

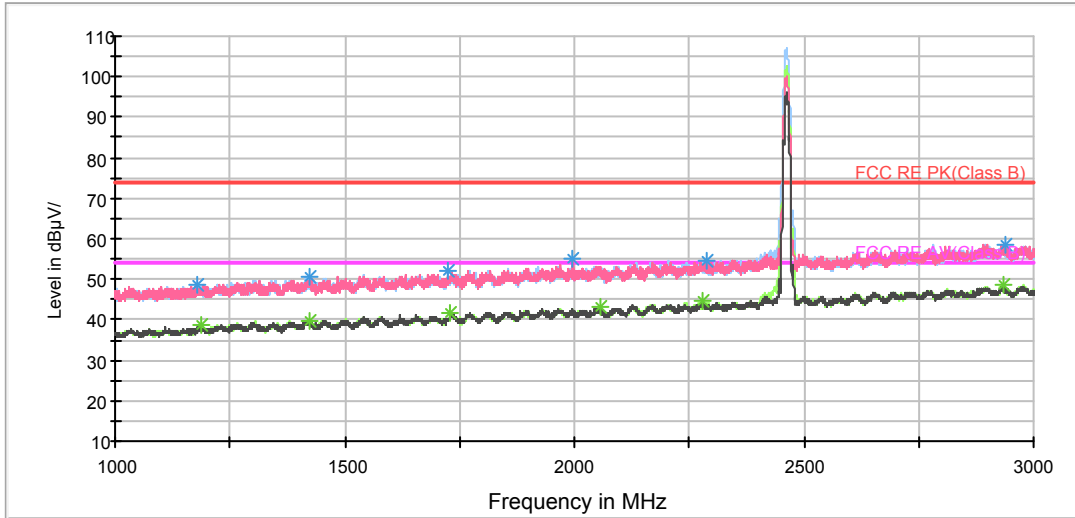


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

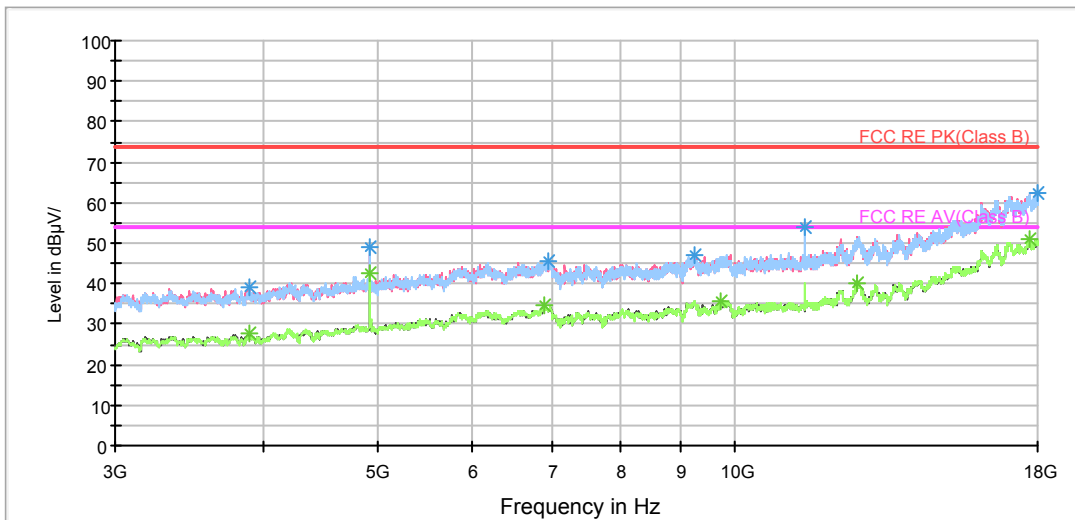

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

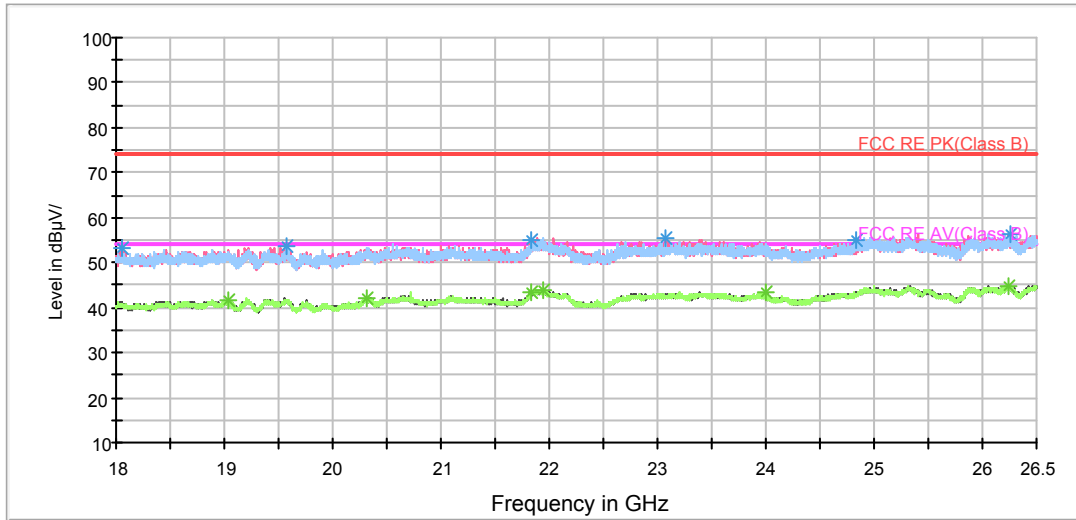

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.500000	48.4	100.0	H	162.0	46.4	2.0	25.6	74
1425.000000	50.6	100.0	H	0.0	47.5	3.1	23.4	74
1726.500000	52.2	100.0	H	289.0	47.3	4.9	21.8	74
1997.750000	55.0	100.0	V	0.0	48.3	6.7	19.0	74
2286.250000	54.6	100.0	V	90.0	46.2	8.4	19.4	74
2939.250000	58.7	100.0	V	280.0	46.8	11.9	15.3	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1186.750000	38.6	100.0	H	108.0	36.7	1.9	15.4	54
1424.250000	39.7	100.0	H	227.0	36.6	3.1	14.3	54
1730.750000	41.5	100.0	V	117.0	36.4	5.1	12.5	54
2057.250000	43.0	100.0	H	98.0	36.2	6.8	11.0	54
2279.000000	44.7	100.0	V	99.0	36.0	8.7	9.3	54
2936.000000	48.5	100.0	V	11.0	36.7	11.8	5.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH1

RE 1G-3GHz PK+AV

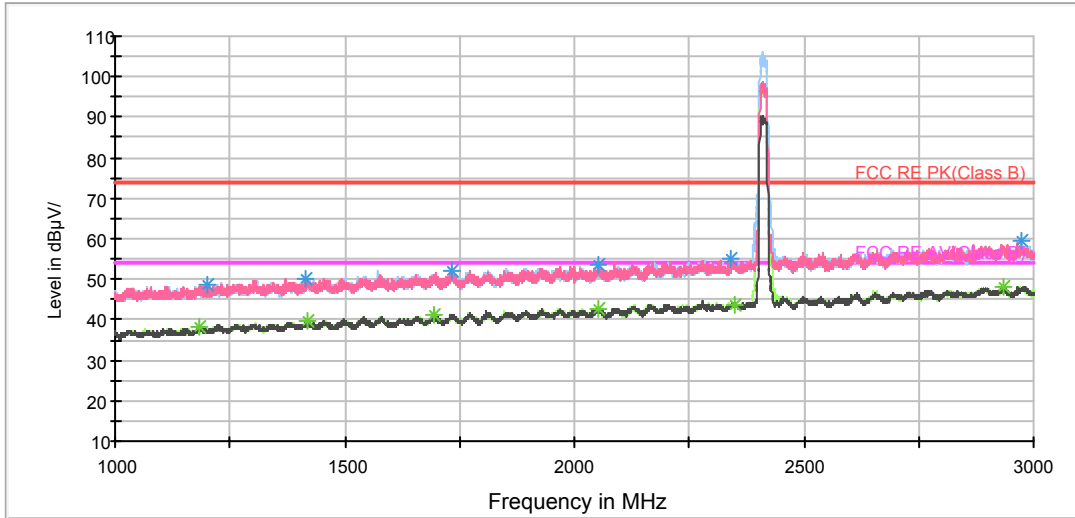


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

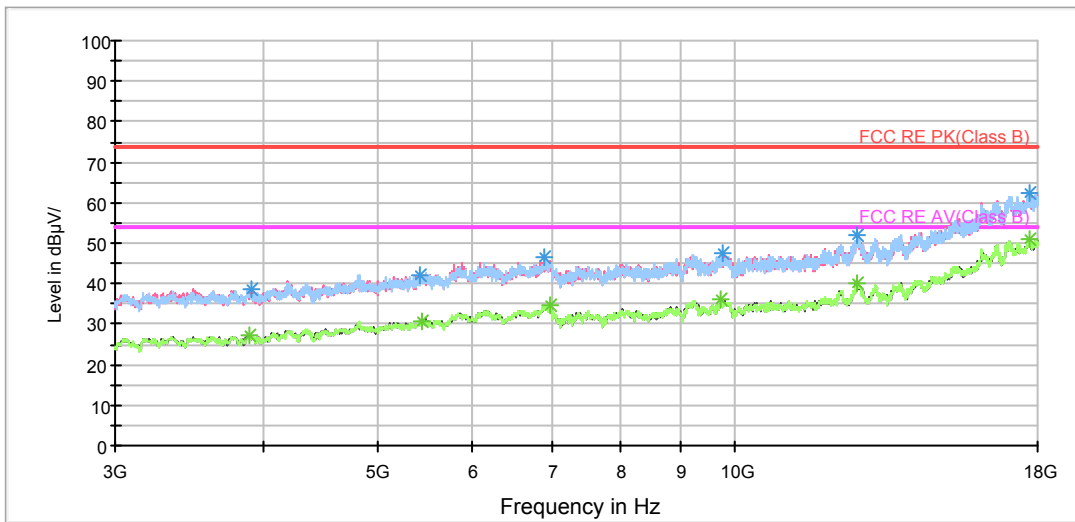

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

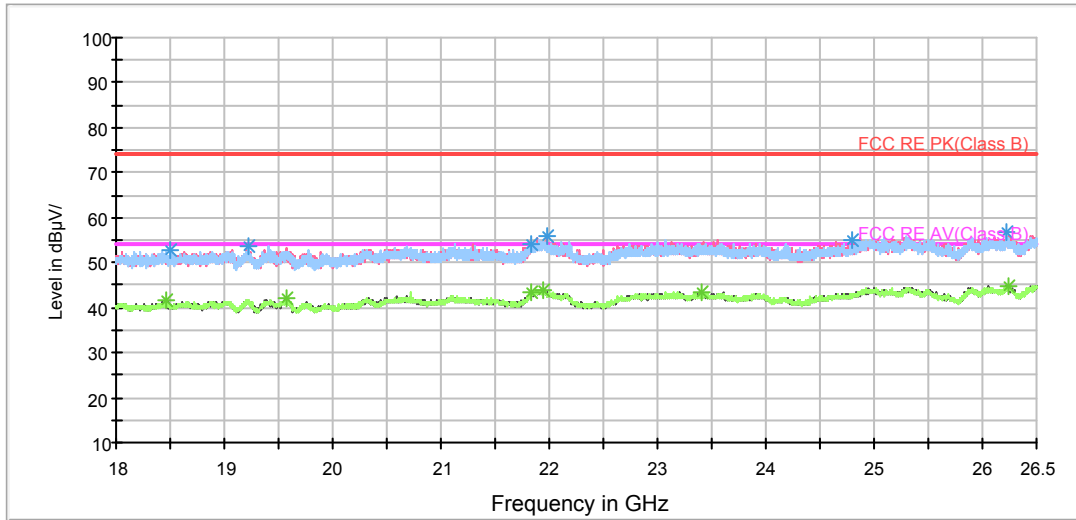

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.750000	48.6	100.0	H	0.0	46.8	1.8	25.4	74
1413.000000	50.2	100.0	V	2.0	47.3	2.9	23.8	74
1732.000000	52.0	100.0	H	155.0	46.8	5.2	22.0	74
2054.500000	53.3	100.0	H	0.0	46.5	6.8	20.7	74
2338.750000	54.8	100.0	V	215.0	46.1	8.7	19.2	74
2973.750000	59.4	100.0	H	330.0	47.2	12.2	14.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.500000	38.2	100.0	V	82.0	36.3	1.9	15.8	54
1419.750000	39.5	100.0	H	155.0	36.4	3.1	14.5	54
1696.250000	41.0	100.0	H	260.0	36.0	5.0	13.0	54
2052.250000	42.7	100.0	V	109.0	35.9	6.8	11.3	54
2350.000000	43.7	100.0	H	277.0	35.0	8.7	10.3	54
2934.000000	48.2	100.0	V	162.0	36.4	11.8	5.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




802.11g CH6

RE 1G-3GHz PK+AV

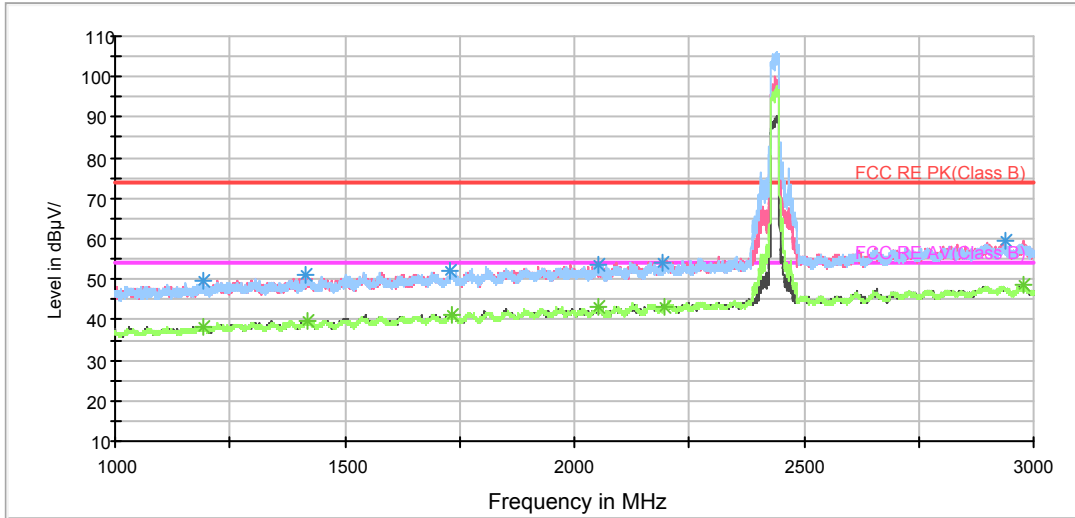


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

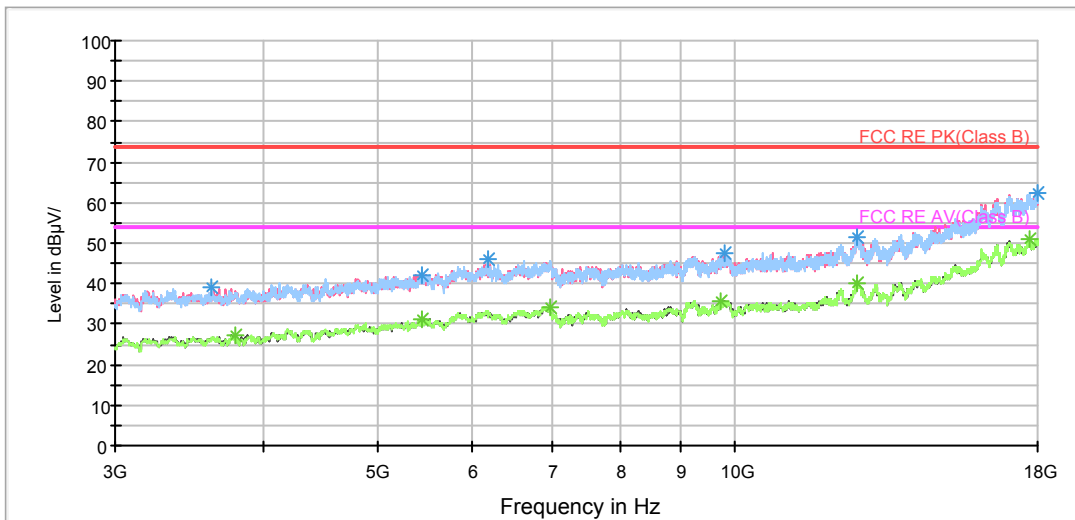

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

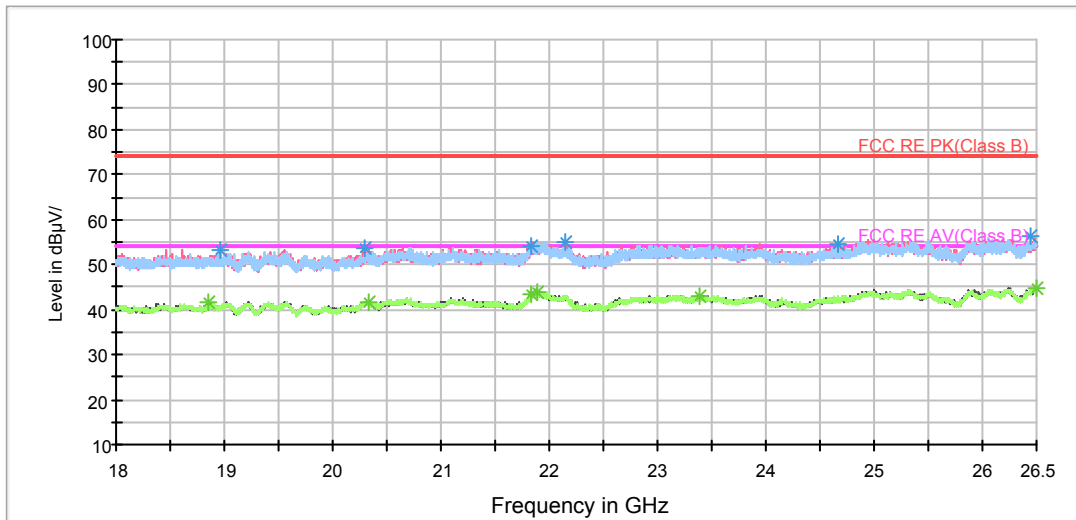

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1191.500000	49.4	100.0	V	232.0	47.6	1.8	24.6	74
1416.000000	50.9	100.0	H	35.0	47.9	3.0	23.1	74
1727.500000	51.9	200.0	V	66.0	47.0	4.9	22.1	74
2054.250000	53.6	100.0	V	242.0	46.8	6.8	20.4	74
2192.750000	53.8	100.0	V	164.0	45.9	7.9	20.2	74
2937.750000	59.6	200.0	H	199.0	47.7	11.9	14.4	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1194.250000	38.4	100.0	H	44.0	36.6	1.8	15.6	54
1420.250000	39.9	200.0	V	57.0	36.8	3.1	14.1	54
1731.750000	41.4	100.0	H	131.0	36.2	5.2	12.6	54
2054.500000	43.2	100.0	H	139.0	36.4	6.8	10.8	54
2195.250000	42.9	100.0	H	61.0	35.0	7.9	11.1	54
2976.000000	48.6	100.0	H	61.0	36.4	12.2	5.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH11

RE 1G-3GHz PK+AV

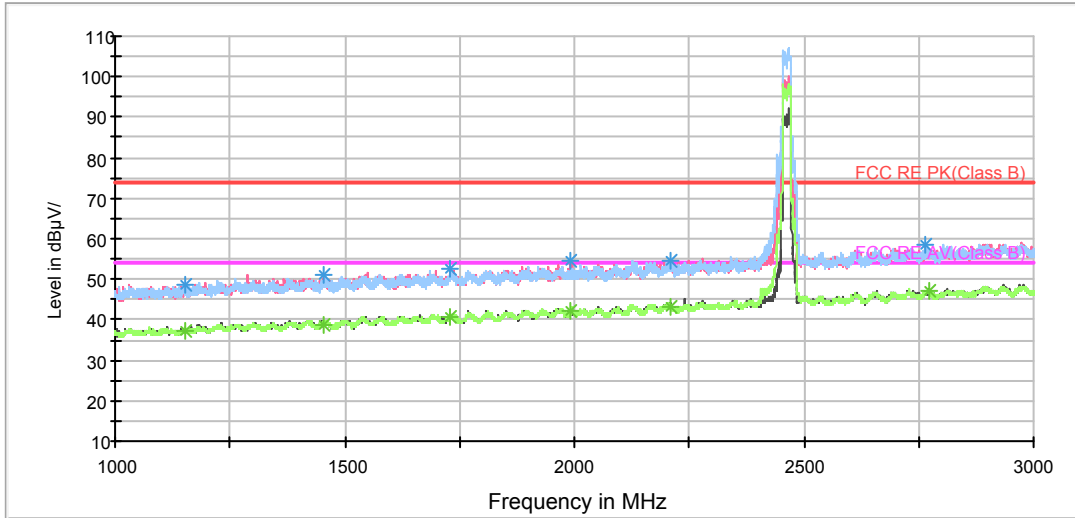


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

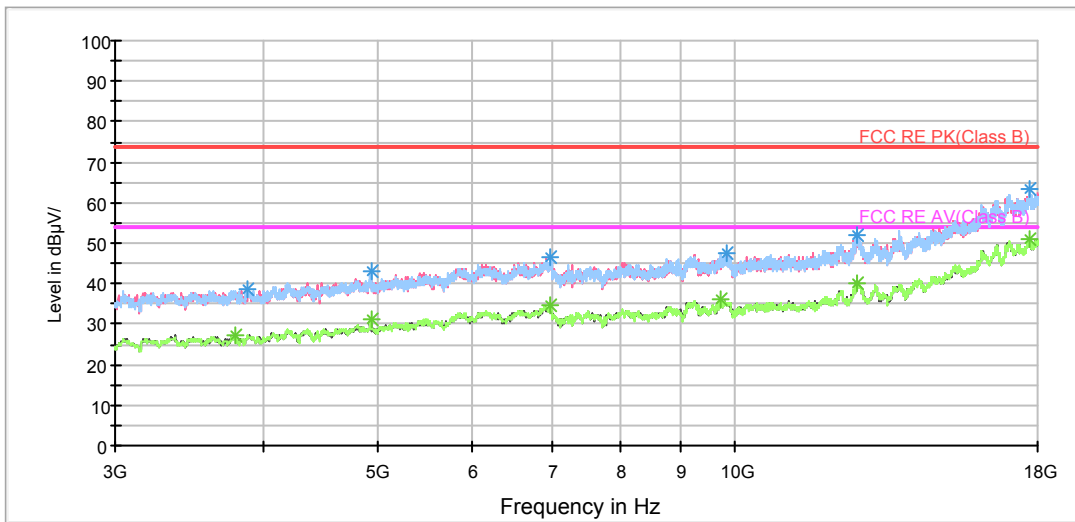

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

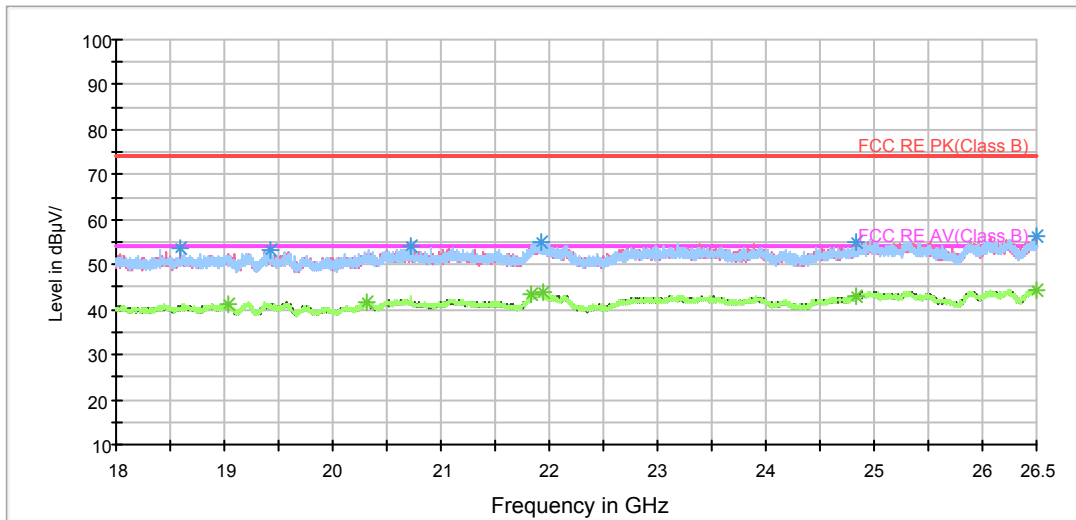

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1151.000000	48.8	100.0	H	0.0	47.3	1.5	25.2	74
1454.500000	51.0	100.0	V	133.0	47.7	3.3	23.0	74
1731.250000	52.6	100.0	V	300.0	47.5	5.1	21.4	74
1992.250000	54.5	100.0	V	0.0	47.8	6.7	19.5	74
2208.000000	54.6	100.0	H	262.0	46.8	7.8	19.4	74
2766.250000	58.4	200.0	V	129.0	47.6	10.8	15.6	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1151.000000	37.1	100.0	H	0.0	35.6	1.5	16.9	54
1454.500000	38.9	100.0	V	133.0	35.6	3.3	15.1	54
1731.250000	40.9	100.0	V	300.0	35.8	5.1	13.1	54
1992.250000	42.0	100.0	V	0.0	35.3	6.7	12.0	54
2208.000000	43.0	100.0	H	262.0	35.2	7.8	11.0	54
2774.250000	47.1	100.0	V	0.0	36.3	10.8	6.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH1

RE 1G-3GHz PK+AV

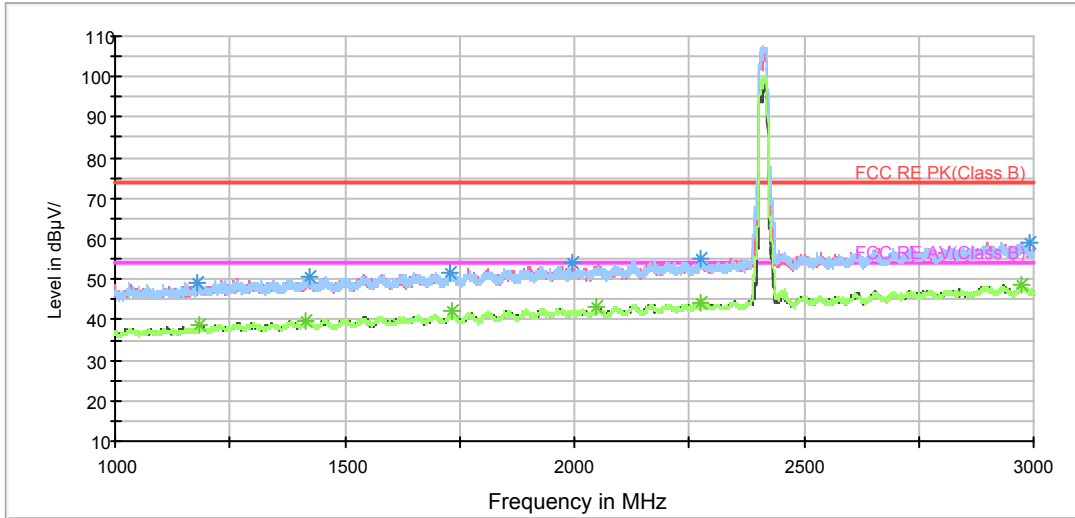


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

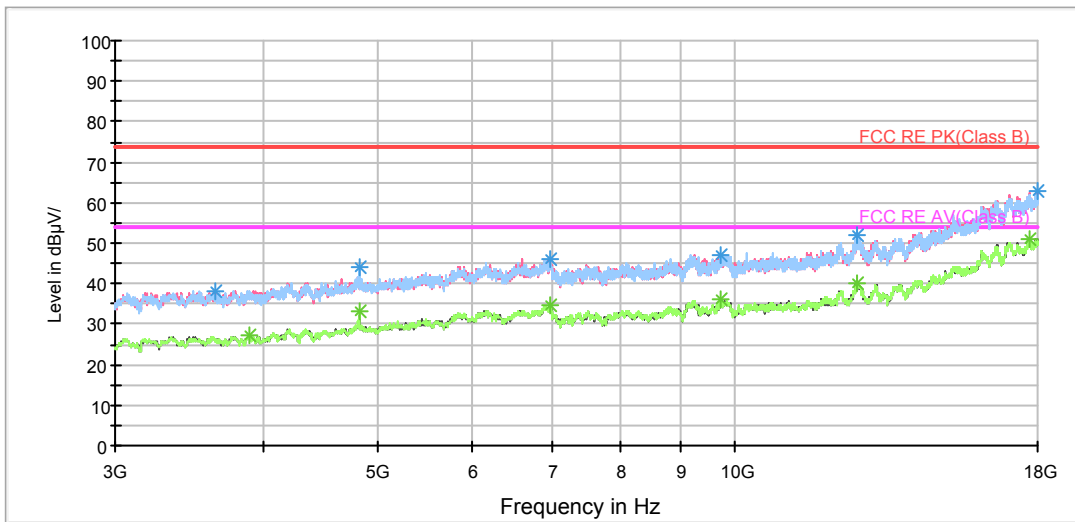

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

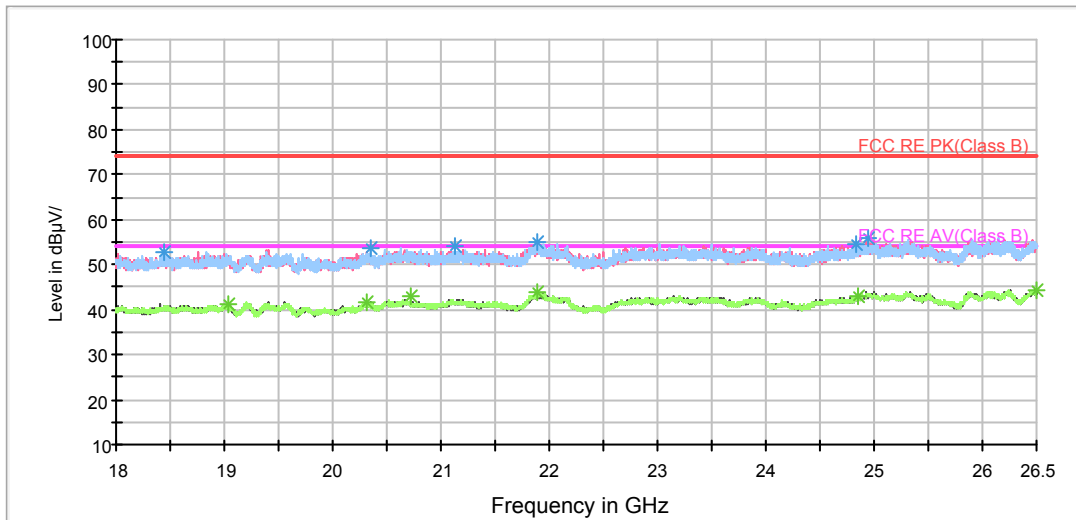

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1179.250000	49.1	200.0	V	317.0	47.1	2.0	24.9	74
1425.000000	50.7	200.0	H	321.0	47.6	3.1	23.3	74
1730.000000	51.7	100.0	V	217.0	46.7	5.0	22.3	74
1994.000000	53.9	100.0	H	36.0	47.1	6.8	20.1	74
2275.500000	54.9	100.0	V	0.0	46.4	8.5	19.1	74
2990.000000	59.1	100.0	V	207.0	46.9	12.2	14.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.500000	38.5	100.0	V	198.0	36.6	1.9	15.5	54
1416.250000	39.7	200.0	V	96.0	36.7	3.0	14.3	54
1731.750000	42.1	100.0	H	113.0	36.9	5.2	11.9	54
2049.000000	43.2	200.0	H	348.0	36.4	6.8	10.8	54
2275.500000	44.1	100.0	V	0.0	35.6	8.5	9.9	54
2975.000000	48.5	200.0	V	87.0	36.3	12.2	5.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH6

RE 1G-3GHz PK+AV

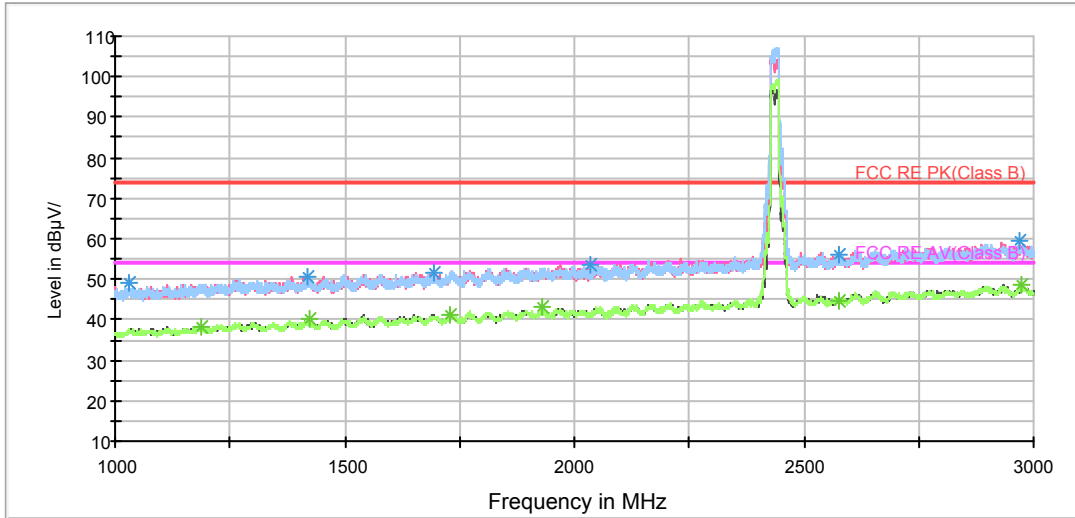


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

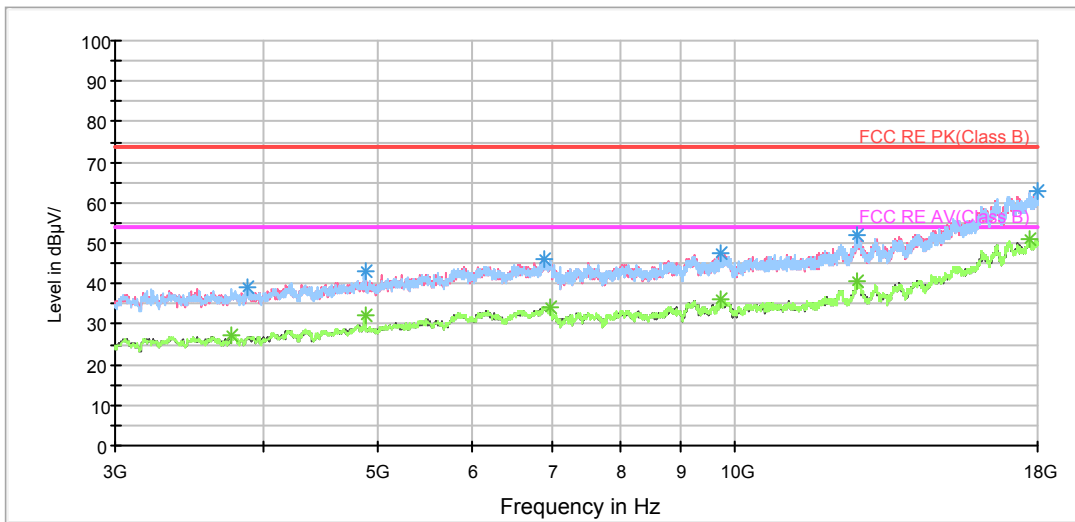

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

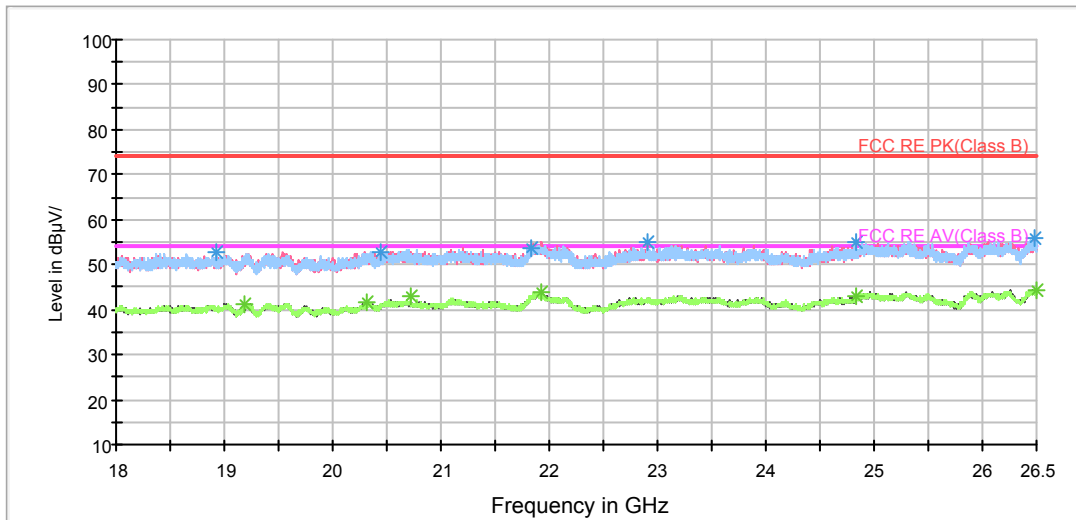

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1029.000000	48.9	200.0	H	32.0	48.0	0.9	25.1	74
1419.750000	50.8	200.0	V	139.0	47.7	3.1	23.2	74
1692.750000	51.7	200.0	H	328.0	46.7	5.0	22.3	74
2035.000000	53.4	200.0	H	311.0	46.7	6.7	20.6	74
2575.750000	56.1	100.0	H	192.0	46.7	9.4	17.9	74
2968.000000	59.3	100.0	H	79.0	47.1	12.2	14.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1189.500000	38.2	200.0	V	147.0	36.4	1.8	15.8	54
1422.750000	40.1	200.0	H	197.0	37.0	3.1	13.9	54
1728.000000	41.4	100.0	H	44.0	36.4	5.0	12.6	54
1928.500000	43.1	200.0	H	171.0	36.8	6.3	10.9	54
2575.250000	44.5	200.0	V	131.0	35.1	9.4	9.5	54
2973.250000	48.4	100.0	H	175.0	36.2	12.2	5.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




## 802.11n (HT20) CH11

## RE 1G-3GHz PK+AV

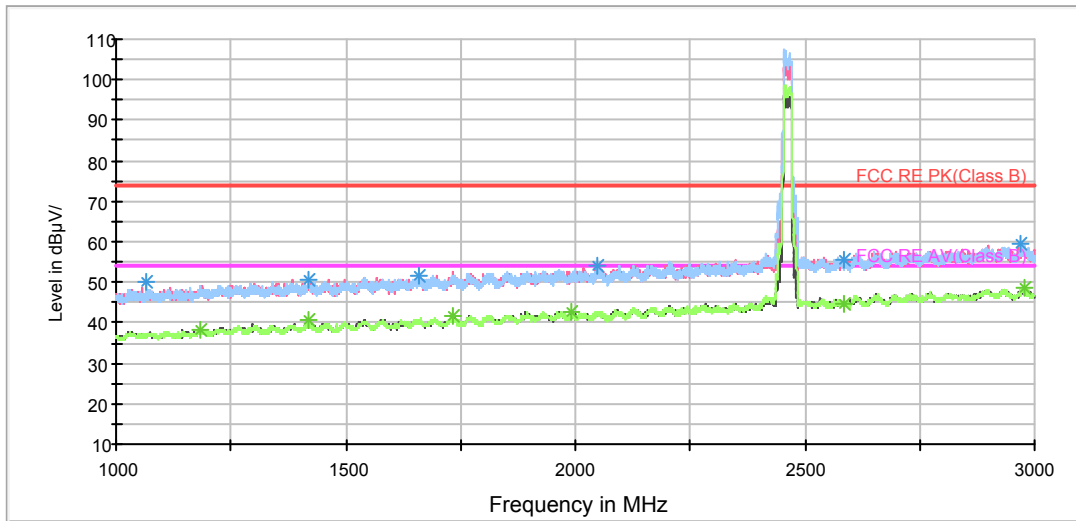


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

## RE 3-18GHz PK+AV

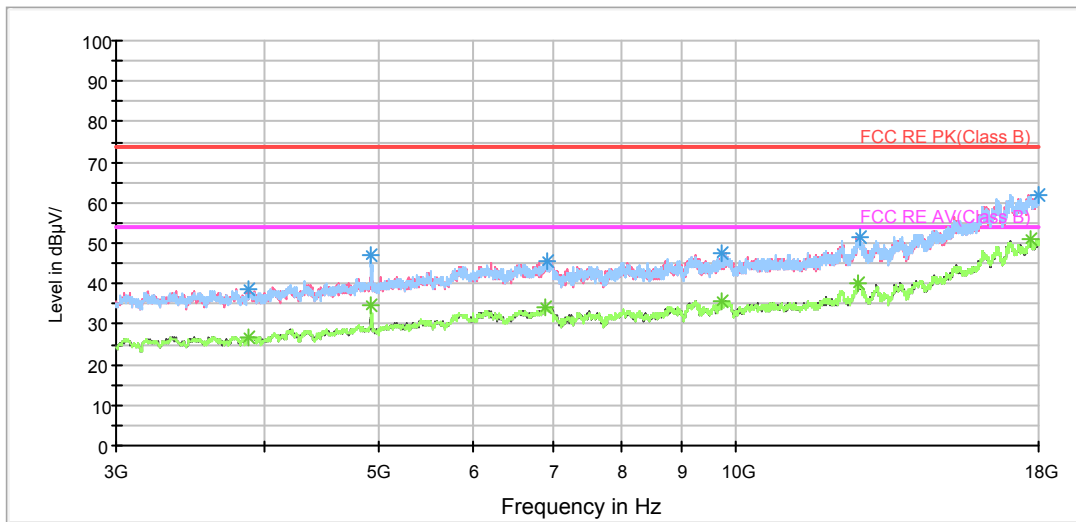

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

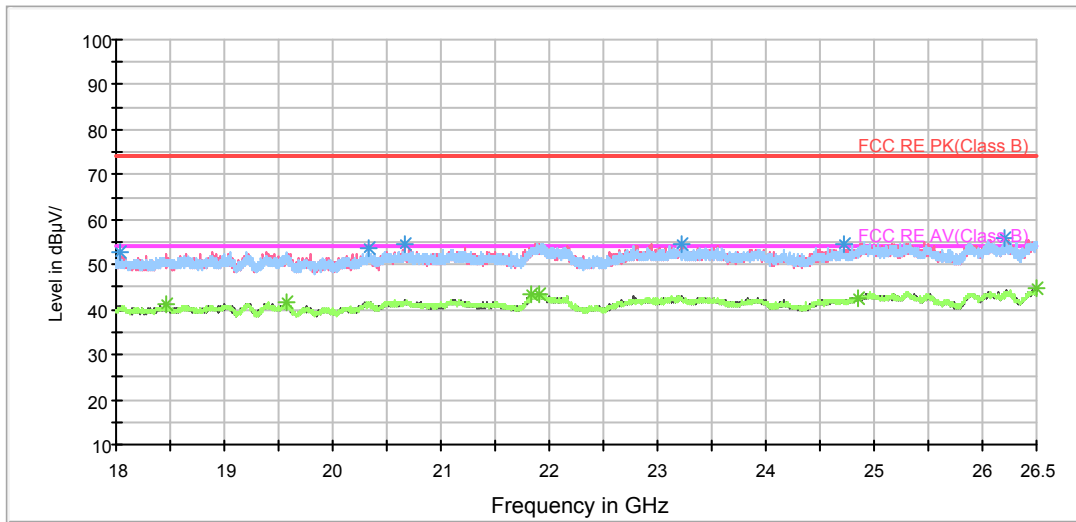

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1067.000000	50.1	200.0	H	192.0	48.9	1.2	23.9	74
1419.750000	50.5	200.0	H	252.0	47.4	3.1	23.5	74
1658.250000	51.5	200.0	H	340.0	46.7	4.8	22.5	74
2049.750000	54.1	100.0	H	271.0	47.3	6.8	19.9	74
2586.500000	55.6	100.0	H	74.0	45.8	9.8	18.4	74
2971.250000	59.3	100.0	H	74.0	47.1	12.2	14.7	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1183.750000	38.5	100.0	V	267.0	36.6	1.9	15.5	54
1418.250000	40.5	100.0	H	22.0	37.4	3.1	13.5	54
1731.750000	41.5	100.0	H	112.0	36.3	5.2	12.5	54
1992.750000	42.8	200.0	V	164.0	36.1	6.7	11.2	54
2586.500000	44.5	100.0	H	74.0	34.7	9.8	9.5	54
2978.000000	48.4	100.0	H	254.0	36.2	12.2	5.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH3

RE 1G-3GHz PK+AV

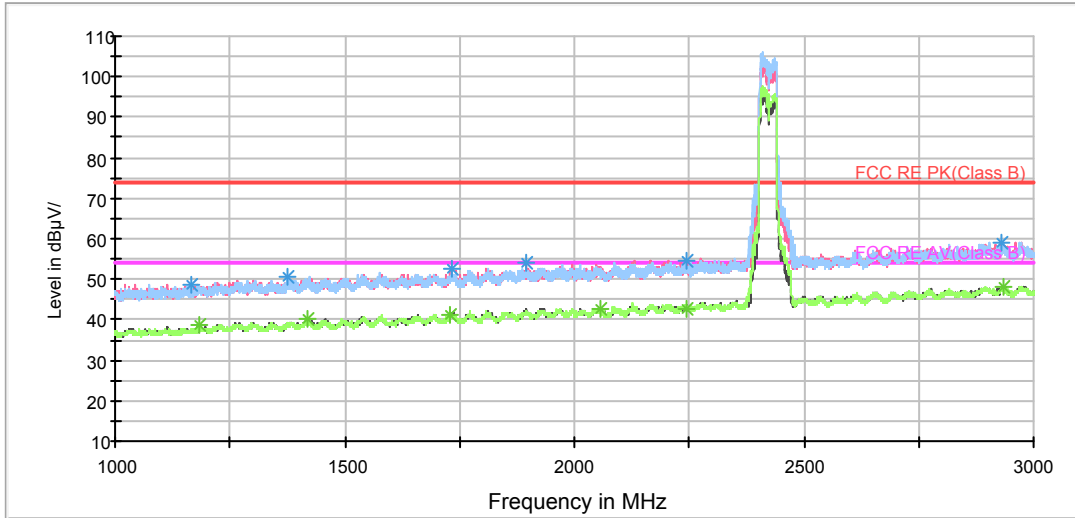


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

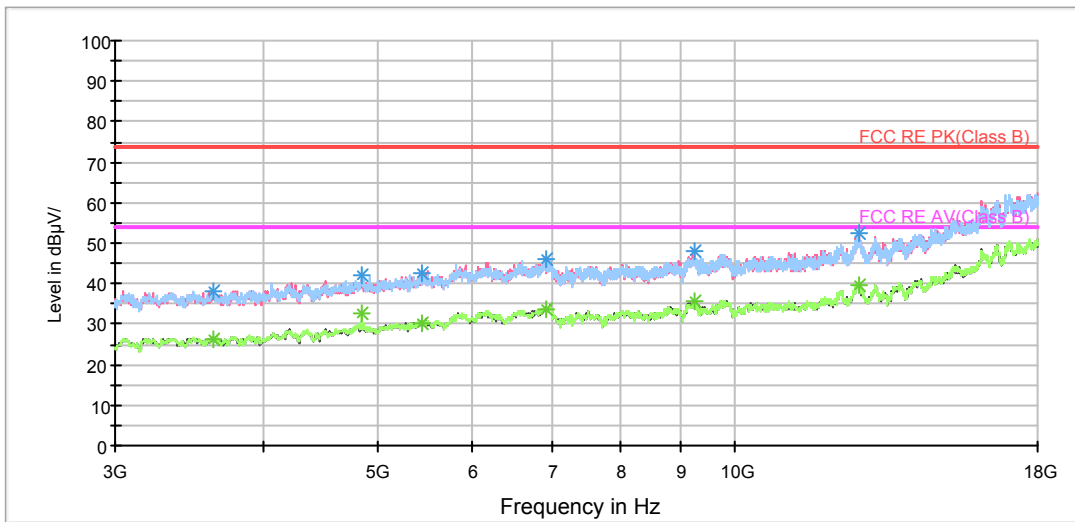

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

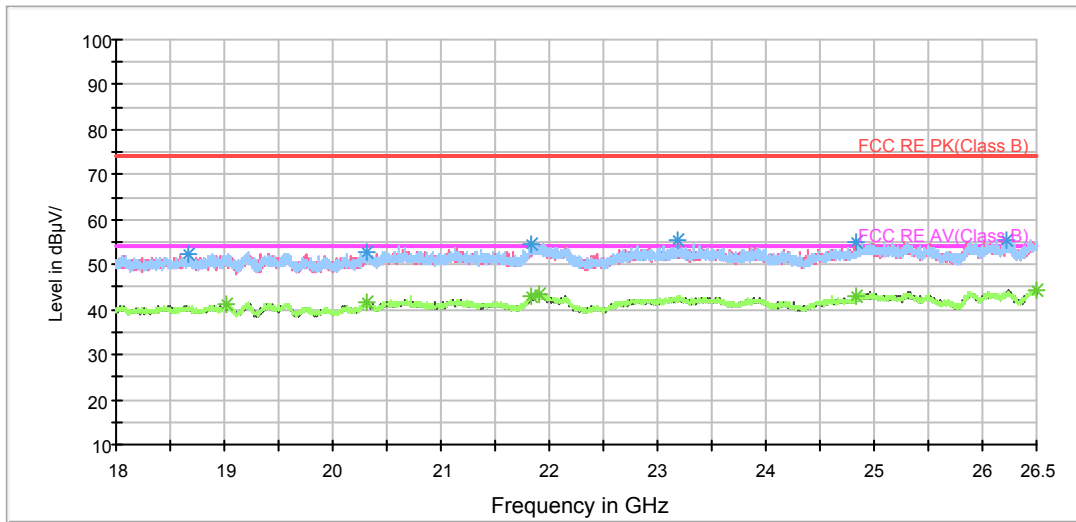

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1166.750000	48.8	100.0	H	143.0	47.0	1.8	25.2	74
1374.250000	50.5	100.0	H	259.0	47.6	2.9	23.5	74
1732.000000	52.5	200.0	H	359.0	47.3	5.2	21.5	74
1896.750000	54.2	200.0	V	130.0	48.1	6.1	19.8	74
2245.250000	54.8	100.0	V	110.0	47.2	7.6	19.2	74
2932.000000	59.2	200.0	V	0.0	47.4	11.8	14.8	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1184.750000	38.5	200.0	H	290.0	36.6	1.9	15.5	54
1420.500000	40.3	200.0	H	170.0	37.2	3.1	13.7	54
1728.750000	41.3	100.0	H	0.0	36.3	5.0	12.7	54
2055.750000	42.8	100.0	V	275.0	36.0	6.8	11.2	54
2245.250000	42.8	100.0	V	110.0	35.2	7.6	11.2	54
2933.250000	48.2	100.0	V	249.0	36.4	11.8	5.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH6

RE 1G-3GHz PK+AV

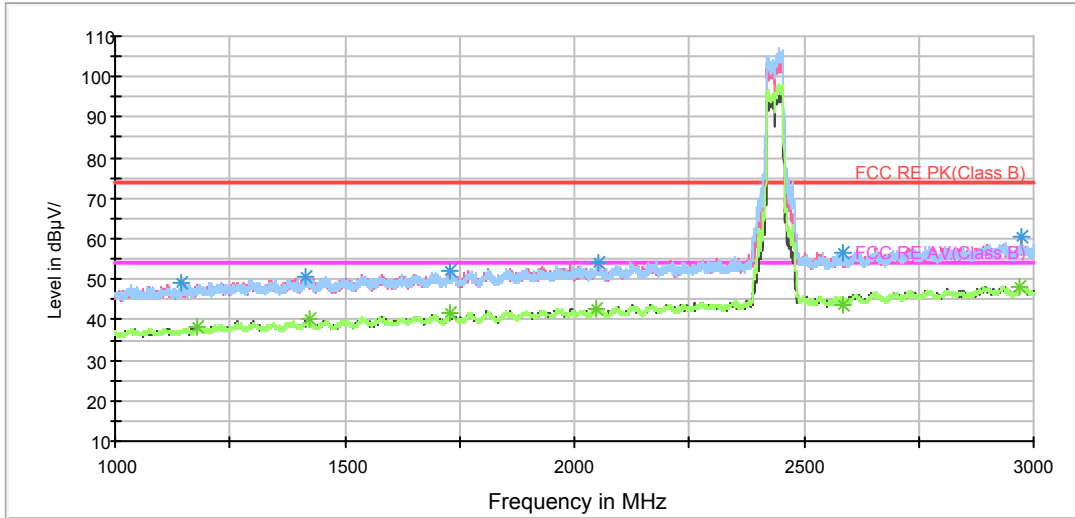


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

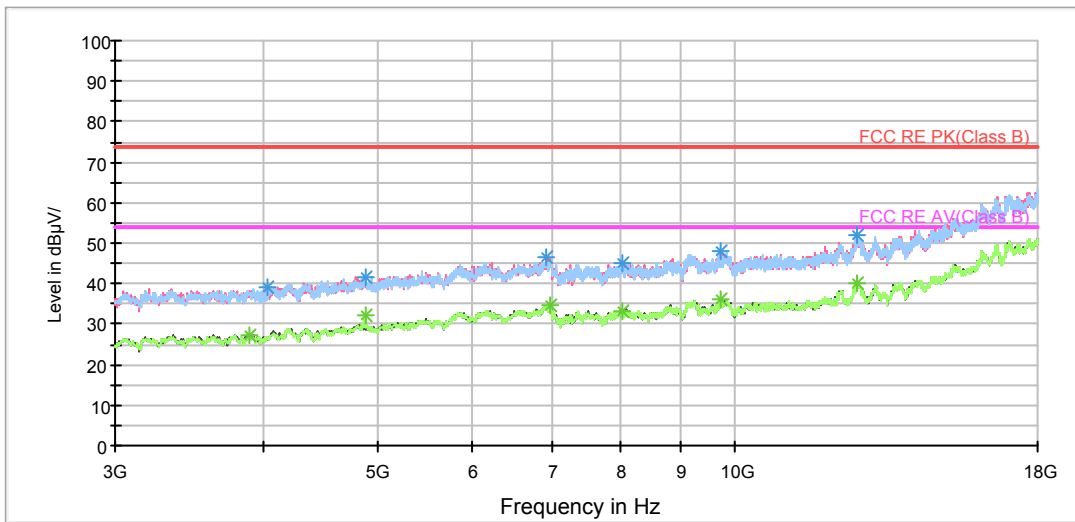

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

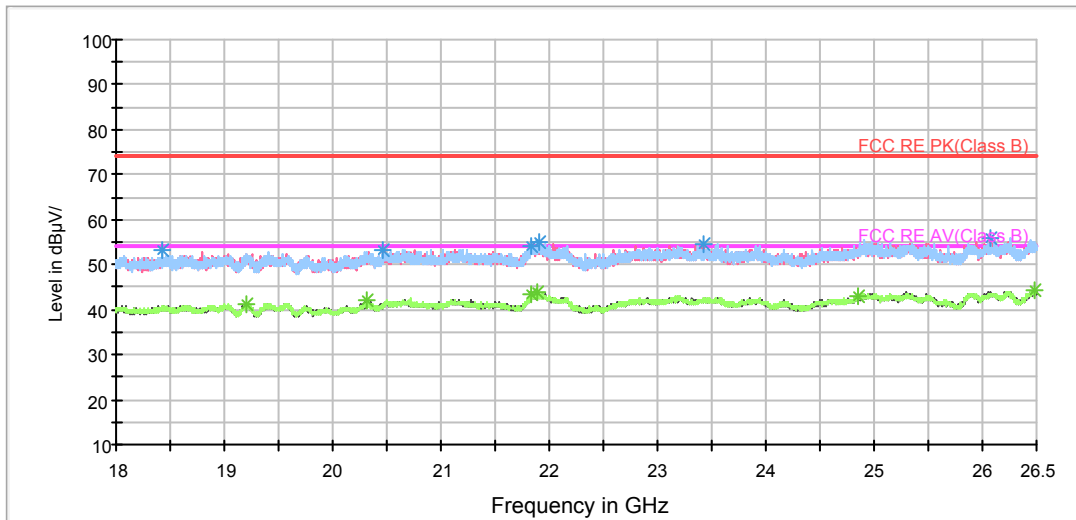

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1144.250000	49.0	100.0	H	85.0	47.5	1.5	25.0	74
1415.500000	50.5	100.0	H	41.0	47.5	3.0	23.5	74
1729.750000	52.1	200.0	H	190.0	47.1	5.0	21.9	74
2053.000000	54.0	200.0	V	25.0	47.2	6.8	20.0	74
2586.750000	56.6	100.0	V	0.0	46.7	9.9	17.4	74
2973.000000	60.5	100.0	V	333.0	48.3	12.2	13.5	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1181.000000	38.2	100.0	V	290.0	36.2	2.0	15.8	54
1424.000000	40.0	100.0	H	263.0	36.9	3.1	14.0	54
1731.000000	41.7	200.0	H	358.0	36.6	5.1	12.3	54
2049.750000	42.9	200.0	H	263.0	36.1	6.8	11.1	54
2586.750000	43.9	100.0	V	0.0	34.0	9.9	10.1	54
2970.500000	48.2	100.0	H	58.0	36.0	12.2	5.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT40) CH9

RE 1G-3GHz PK+AV

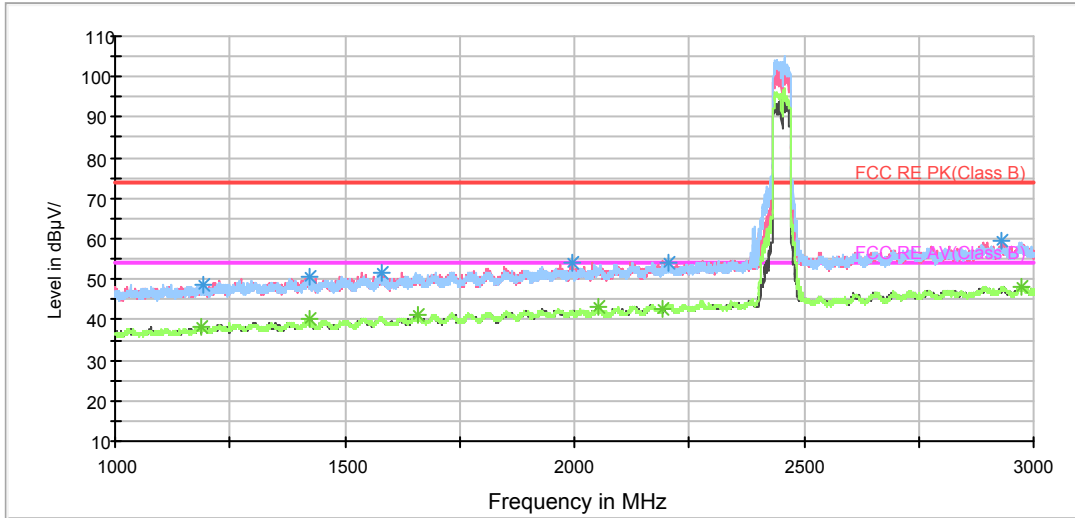


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

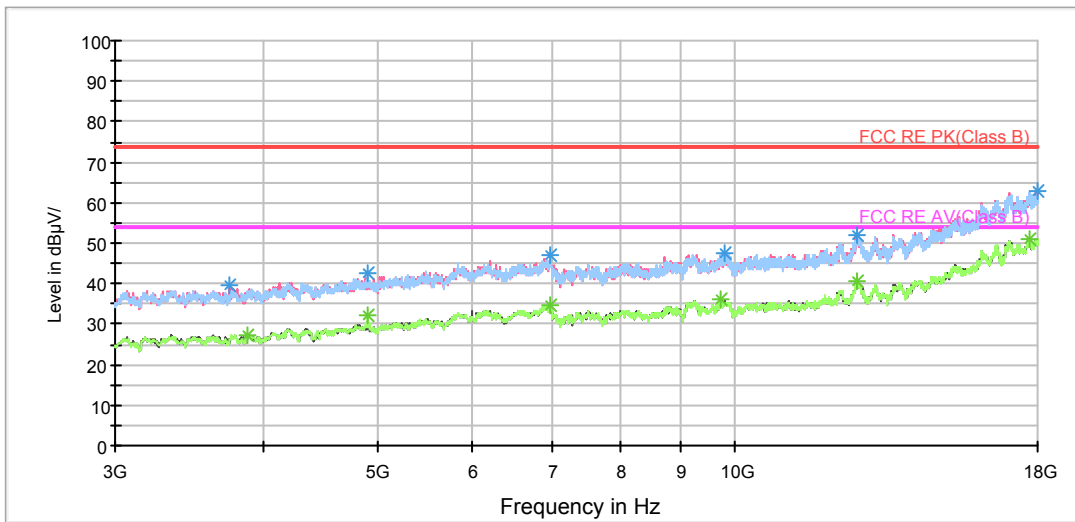

Radiates Emission from 3GHz to 18GHz

BELL\_RE 18-26.5GHz PK+AV

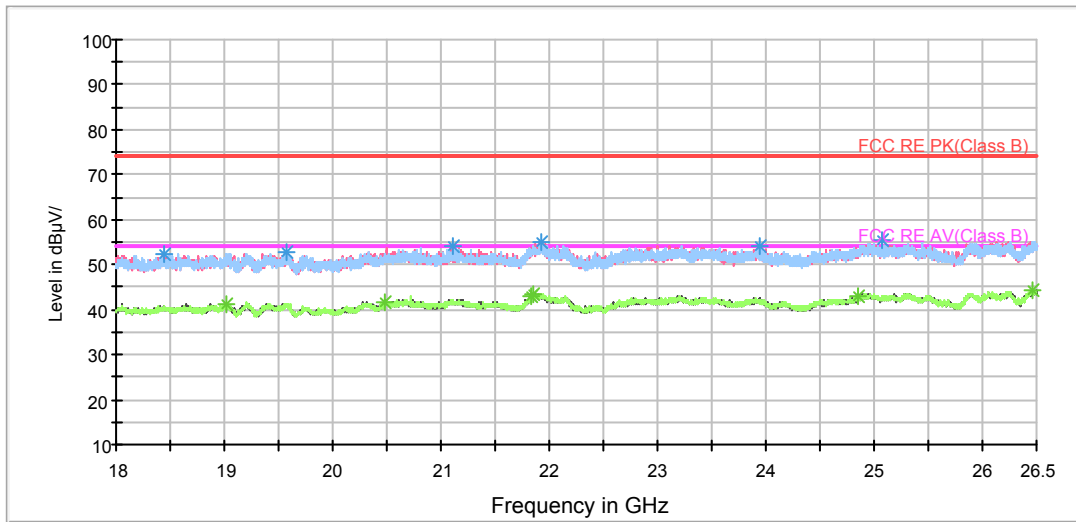

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.000000	48.7	200.0	V	0.0	46.9	1.8	25.3	74
1421.750000	50.4	200.0	V	40.0	47.3	3.1	23.6	74
1580.000000	51.7	200.0	V	22.0	48.0	3.7	22.3	74
1995.000000	54.0	100.0	V	0.0	47.2	6.8	20.0	74
2204.250000	54.3	100.0	H	128.0	46.4	7.9	19.7	74
2932.000000	59.3	100.0	V	236.0	47.5	11.8	14.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1185.750000	38.2	100.0	H	92.0	36.3	1.9	15.8	54
1422.500000	40.0	200.0	V	5.0	36.9	3.1	14.0	54
1660.000000	41.3	200.0	H	17.0	36.5	4.8	12.7	54
2050.500000	42.9	200.0	H	310.0	36.1	6.8	11.1	54
2194.250000	42.6	200.0	V	306.0	34.7	7.9	11.4	54
2975.250000	48.3	200.0	H	345.0	36.1	12.2	5.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



### 5.8. Conducted Emission

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

#### Test Setup

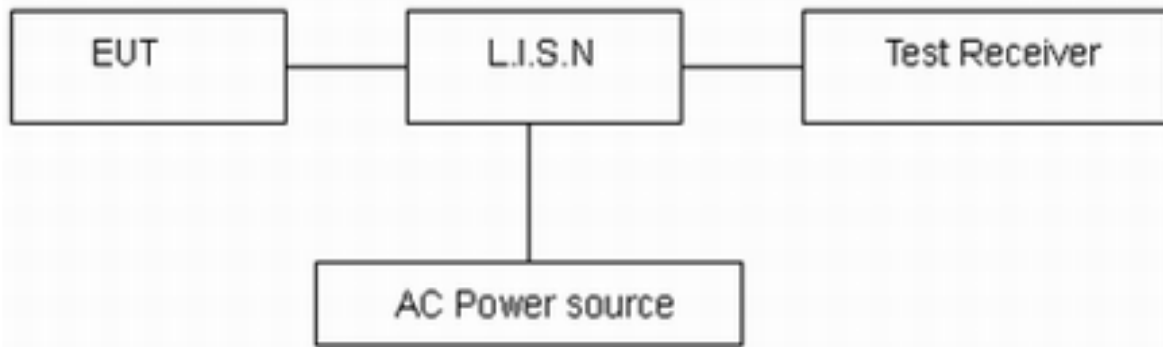

Note: AC Power source is used to change the voltage 110V/60Hz.

#### Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\*: Decreases with the logarithm of the frequency.


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.



**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11b, Channel 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

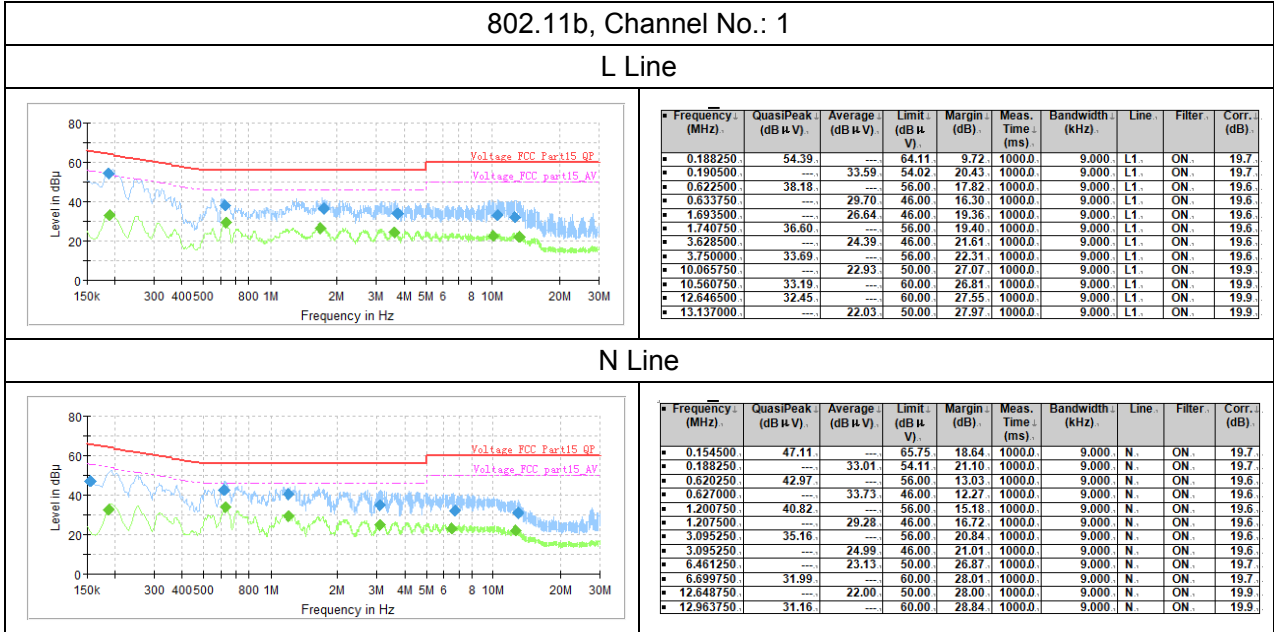



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2017-11-18	2020-11-17
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2019-12-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-11-18	2020-11-17
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2014-12-06	2019-12-05
EMI Test Receiver	R&S	ESCS30	100138	2017-12-17	2018-12-16
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03
Software (CE)	ROHDE&SCHW ARZ	EMC32	9.26.0	/	/
Software (RE/RSE)	ROHDE&SCHW ARZ	EMC32	8.52.0	/	/

\*\*\*\*\*END OF REPORT \*\*\*\*\*